

1 J. Curtis Edmondson (CA SBN # 236105)
2 Kiren U. Rockenstein (CA SBN #312301)
3 Law Offices of J. Curtis Edmondson
4 3699 NE John Olsen Ave.
5 Hillsboro, OR 97124
6 Phone: (503)-336-3749
7 Fax: (503)-482-7418
8 Email: jcedmondson@edmolaw.com
9 Email: kiren@edmolaw.com

10 *Attorneys for Plaintiff*
11 *TZU Technologies, LLC*

12 **UNITED STATES DISTRICT COURT**
13 **CENTRAL DISTRICT OF CALIFORNIA**

14 TZU TECHNOLOGIES, LLC, a California
15 Limited Liability Company

16 Plaintiff,

17 v.

18 INTERACTIVE HOLDINGS LIMITED, a
19 Hong Kong company, and
20 XPLOSION INC., a Nevada company.

21 Defendants.

Case No. 2:17-cv-9279

**COMPLAINT FOR INFRINGEMENT
OF U.S. PATENT NO. 6,368,268**

DEMAND FOR JURY TRIAL

1 **COMPLAINT FOR PATENT INFRINGEMENT**

2 Plaintiff Tzu Technologies LLC, (“TZU”), by and through its undersigned counsel, for its
3 complaint against Interactive Holdings Limited, marketing under the name SayberX
4 (“SAYBERX”) and Xplosion Incorporated (“XPLOSION”), (collectively, “Defendants”), makes
5 the following allegations. These allegations are made upon information and belief.

6
7 **NATURE OF THE ACTION**

8 1. This is an action against Defendants for infringement of one or more claims of
9 United States Patent No. 6,368,268 ("the ‘268 Patent"). A copy of the ‘268 Patent is attached to this
10 Complaint as Exhibit A.

11 2. This action for patent infringement arises under the patent laws of the United States,
12 including 35 U.S.C. §§ 271, 281, and 283-285.

13
14 **PARTIES**

15 3. Plaintiff TZU is a limited liability company organized under the laws of the State
16 of California and has an office and principal place of business at 35 Hugus Alley, Suite 210,
17 Pasadena, California 91103.

18 4. Defendant SAYBERX is a company organized under the laws of Hong Kong, it has
19 an office and principal place of business at Offices C – F, 11/Floor, Hollywood Centre, 77-91
20 Queen’s Road West, Sheung Wan, Hong Kong.

21 5. Defendant XPLOSION is a Nevada company, which in a recent SEC filing listed
22 468 North Camden Drive Beverly Hills, CA 90210 as the location of its executive office, Exhibit
23 B. XPLOSION is the global distributor for SAYBERX and ships merchandise from this location,
24 Exhibit C. XPLOSION’s agent for service of process is GKL Registered Agents of NV, Inc. located
25 at 3064 Silver Sage Dr., STE 150, Carson City, NV 89701.

JURISDICTION AND VENUE

6. This Court has subject matter jurisdiction over this action pursuant to 28 U.S.C. §§ 1331 and 1338(a) because it arises under United States Patent law.

7. This Court has personal jurisdiction over SAYBERX because, *inter alia*, it regularly conducts business in the State of California and continues to commit acts of patent infringement in the State of California including by making, using, offering to sell, and/or selling, and/or importing, adult oriented toys, and adult oriented real time services, which infringe at least one claim of the ‘268 Patent (hereafter “Accused Products”), over the Internet throughout the United States, including sales targeted at the State of California, thereby purposefully availing itself of the benefits of the state.

8. XPLOSION has entered into an Exclusive Global Rights Agreement with SAYBERX, and distributes Accused Products in the State of California.

9. This Court has personal jurisdiction over XPLOSION because, *inter alia*, it regularly conducts business in the State of California, and continues to commit acts of patent infringement in the State of California including by making, using, offering to sell, and/or selling, and/or importing, and distributing Accused Products in the State of California.

10. Venue is proper in this district pursuant to 28 U.S.C. §§ 1391(b), 1391(c) and 1400(b).

FACTS

11. TZU is the owner, by assignment, of the ‘268 Patent, entitled “Method and Device for Interactive Virtual Control of Sexual Aids Using Digital Computer Networks” which was duly and legally issued on April 9th, 2002 by the United States Patent and Trademark Office (“USPTO”).

12. A copy of the ‘268 Patent is attached to this Complaint as Exhibit A.

13. The claims of the ‘268 Patent are valid and enforceable.

14. SAYBERX sells, or has sold, to customers in the United States, Accused Products including, but not limited to, the Sayberx hand-held stimulator, the X-Ring and SayberX mobile

1 applications (IOS and Android app) for interacting with the Sayberx hand-held stimulator
2 (collectively, “SayberX Product Family) . The Sayberx hand-held stimulator and the X-Ring are
3 available directly from SAYBERX’s website, <https://www.sayberx.com> and on other websites
4 including www.amazon.com. The app is available via a free download directly from SAYBERX’s
5 website, or via Apple iTunes, or via Google Play for the IOS or Android versions respectively. The
6 SayberX handheld stimulator can be controlled via the app or via the X-ring which pairs to the
7 stimulator via a Bluetooth connection and allows movements of the X-ring to be translated into
8 movements in the stimulator.

9 15. The SayberX Product Family is a stimulation system. The stimulation system has a
10 hand-operable input device for generating a command signal in response to an input from a first
11 user. A first user interface is connected to the said input device, for generating a control signal based
12 upon the command signal. A second user interface is remotely located from first user interface and
13 a second user interface receives the control signal. A stimulation device receives a control signal
14 from the second user interface. The stimulation signal imparts stimulation to a user in response to
15 the control signal.

16 16. The SayberX Product Family infringe on one or more claims of the ‘268 Patent

17 17. Defendants import, buy, sell and offer to sell to their consumers the Accused
18 Products over worldwide websites without regard to the patent rights of TZU, including in this
19 district

20 18. SAYBERX’s sale of products and/or services on <https://www.sayberx.com> infringes
21 on one or more claims of the ‘268 Patent.

22 19. Defendants’ infringement of the ‘268 Patent has been, and continues to be, willful.

23 20. Unless enjoined by this Court, Defendants’ will continue to infringe the ‘268 Patent.

24 21. TZU has been, and will continue to be, irreparably harmed by Defendants’ ongoing
25 infringement of the ‘268 Patent.

1 22. This is an exceptional case under 35 U.S.C. § 285 and TZU should therefore be
2 awarded treble damages pursuant to 35 U.S.C. §284, of any and all damages awarded for
3 Defendants’ infringement of the ‘268 patent.

4
5 **COUNT I: CLAIM FOR PATENT INFRINGEMENT**

6 **UNDER 35 U.S.C. § 271 (‘268 PATENT)**

7 23. TZU hereby incorporates by reference the allegations of paragraphs 1 through 22 of
8 this Complaint as if fully set forth herein.

9 24. Defendants have imported, offered to sell and provide, have sold and provided, and
10 continue to offer to sell and provide, Accused Products in the United States and in this District.

11 25. SAYBERX’s sale of products and/or services on <https://www.sayberx.com> infringes
12 on one or more claims of the ‘268 Patent.

13 26. Defendants’ infringement of the ‘268 Patent has been, and continues to be, willful.

14 27. Unless enjoined by this Court, Defendants’ will continue to infringe the ‘268 Patent.

15 28. As a direct and proximate result of Defendant’s infringement of the ‘268 Patent,
16 TZU has been and will continue to be damaged in an amount yet to be determined, including but
17 not limited to TZU’s lost profits and/or reasonable royalties.

18
19 **PRAYER FOR RELIEF**

20 WHEREFORE, Plaintiff prays for relief against Defendant as follows:

21 A. For a permanent injunction to issue against Defendants, their agents, servants,
22 employees, successors and assigns and all others in concert and privity with them from making,
23 using, offering to sell, selling, or importing into the United States any product or service infringing
24 on claims of the ‘268 Patent;

25 B. An award of damages in an amount to be determined at trial, but not less than a
26 reasonable royalty and/or TZU’s lost profits as a result of Defendants’ infringing actions;

27 C. A finding that Defendants’ infringement has been willful;

1 D. A trebling, pursuant to 35 U.S.C. § 284, of any and all damages awarded for
2 Defendants' infringement of the '268 Patent;

3 E. A finding that this is an exceptional case under 35 U.S.C. § 285;

4 F. An award, pursuant to 35 U.S.C. § 285, of reasonable attorneys' fees;

5 G. An award of interest and costs; and

6 H. For such other and further relief as may be just and equitable.

7
8 **DEMAND FOR TRIAL BY JURY**

9 Pursuant to Rule 38 of the Federal Rules of Civil Procedure, Plaintiff hereby demands a jury
10 trial on all issues and causes of action triable to a jury.

11
12
13 Dated: December 29, 2017

Respectfully submitted,

14 /s/J. Curtis Edmondson

15 _____
16 J. Curtis Edmondson
17 Law Offices of J. Curtis Edmondson
18 *Counsel for Plaintiff*
19 *TZU Technologies, LLC*
20
21
22
23
24
25
26
27
28

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

EXHIBIT A

U.S. Patent No. 6,368,268

(12) **United States Patent**
Sandvick et al.

(10) **Patent No.:** US **6,368,268 B1**
 (45) **Date of Patent:** **Apr. 9, 2002**

(54) **METHOD AND DEVICE FOR INTERACTIVE VIRTUAL CONTROL OF SEXUAL AIDS USING DIGITAL COMPUTER NETWORKS**

5,554,160 A 9/1996 Caillouette
 5,556,401 A 9/1996 Caillouette

FOREIGN PATENT DOCUMENTS

(76) Inventors: **Warren J. Sandvick**, 7015 61st St., Lubbock, TX (US) 79407; **Jim W. Hughes**, 1619 Kingsway, Oak Grove, MO (US) 64075; **David Alan Atkinson**, 1205 Valley View La., Joplin, MO (US) 64804

WO 88/06077 * 8/1988 600/38

OTHER PUBLICATIONS

FUFME, Fuck U Fuck Me Product Info, 1999.*
 Odzer, ANCHOR, "Cybersex An online sexual revolution", Jul. 13, 1998 from www.ahref.com/guides/culture/199807/0713odzerprintable.html.
Virtual Sex Machine, www.vrinnovations.com, © 1998 Virtual Reality Innovations.

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

* cited by examiner

(21) Appl. No.: **09/134,751**

Primary Examiner—John P. Lacyk

(22) Filed: **Aug. 17, 1998**

(74) *Attorney, Agent, or Firm*—Blank Rome Comisky & McCauley LLP

(51) **Int. Cl.**⁷ **A61F 5/00**

(57) **ABSTRACT**

(52) **U.S. Cl.** **600/38**

(58) **Field of Search** 600/38; 128/897-98


An interactive virtual sexual stimulation system has one or more user interfaces. Each user interface generally comprises a computer having an input device, video camera, and transmitter. The transmitter is used to interface the computer with one or more sexual stimulation devices, which are also located at the user interface. In accordance with the preferred embodiment, a person at a first user interface controls the stimulation device(s) located at a second user interface. The first and second user interfaces may be connected, for instance, through a web site on the Internet. In another embodiment, a person at a user interface may interact with a prerecorded video feed. The invention is implemented by software that is stored at the computer of the user interface, or at a web site accessed through the Internet.


(56) **References Cited**

U.S. PATENT DOCUMENTS

- 3,874,373 A 4/1975 Sobel
- 3,978,851 A 9/1976 Sobel
- 4,412,535 A 11/1983 Teren
- 4,790,296 A 12/1988 Segal
- 4,834,115 A 5/1989 Stewart
- 5,063,915 A 11/1991 Wyckoff
- 5,437,605 A 8/1995 Helmy
- 5,454,840 A 10/1995 Krakovsky et al.
- 5,462,051 A 10/1995 Oka et al.
- 5,467,773 A 11/1995 Bergelson et al.
- 5,490,784 A 2/1996 Carmein
- 5,501,650 A 3/1996 Gellert
- 5,544,649 A 8/1996 David et al.

40 Claims, 5 Drawing Sheets

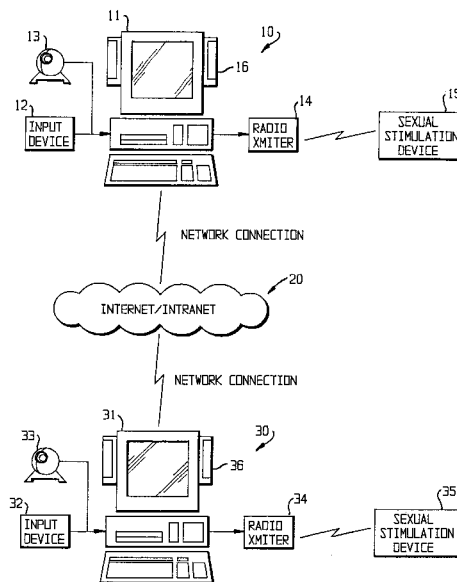

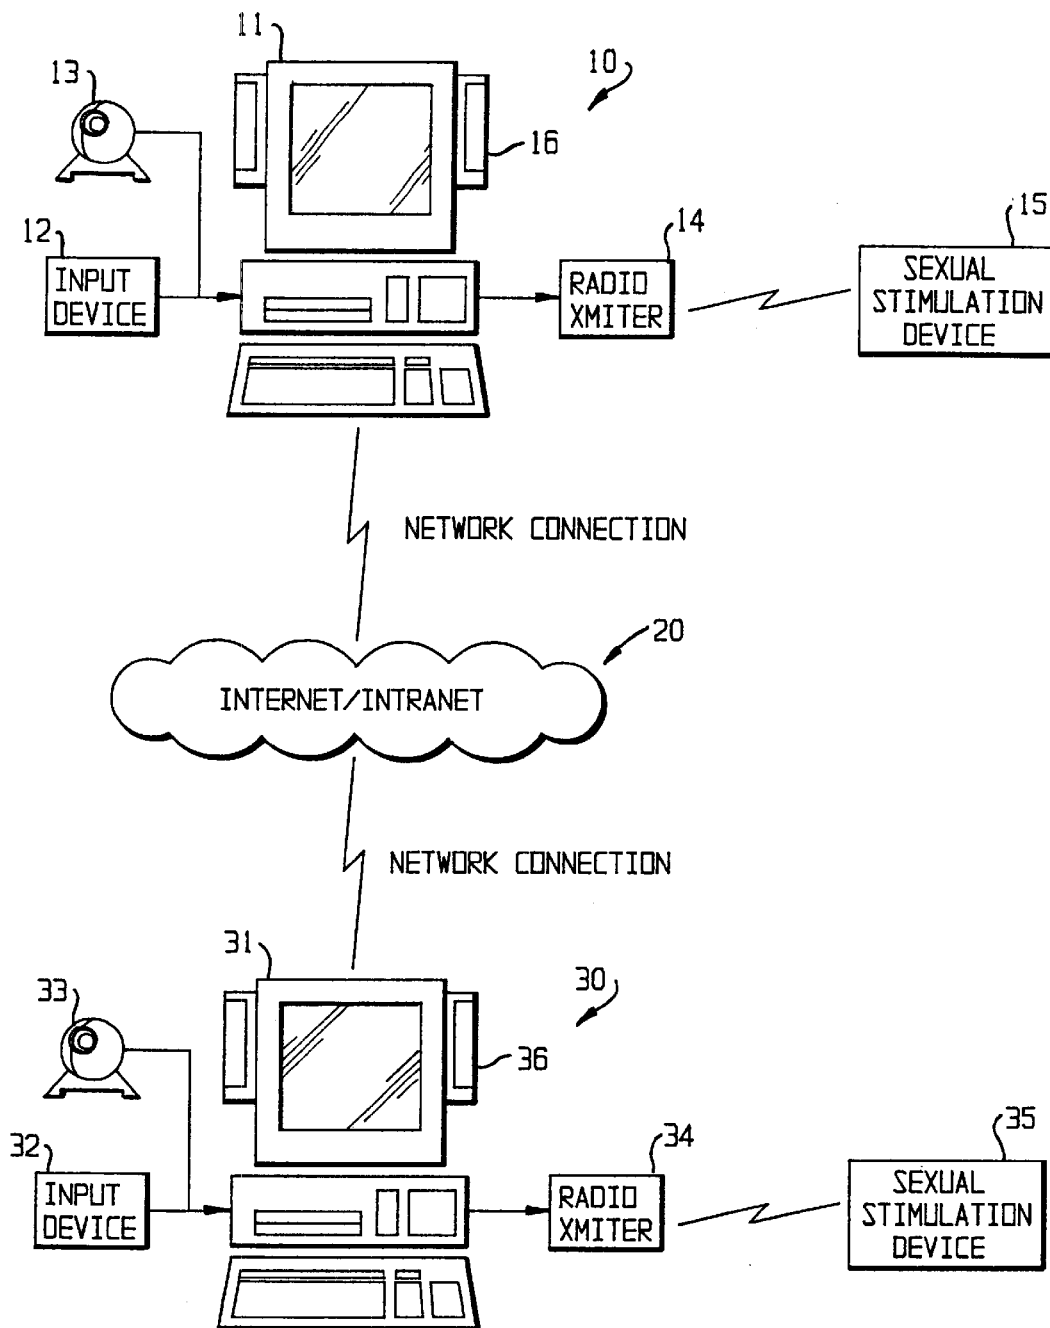

5

FIG. 1

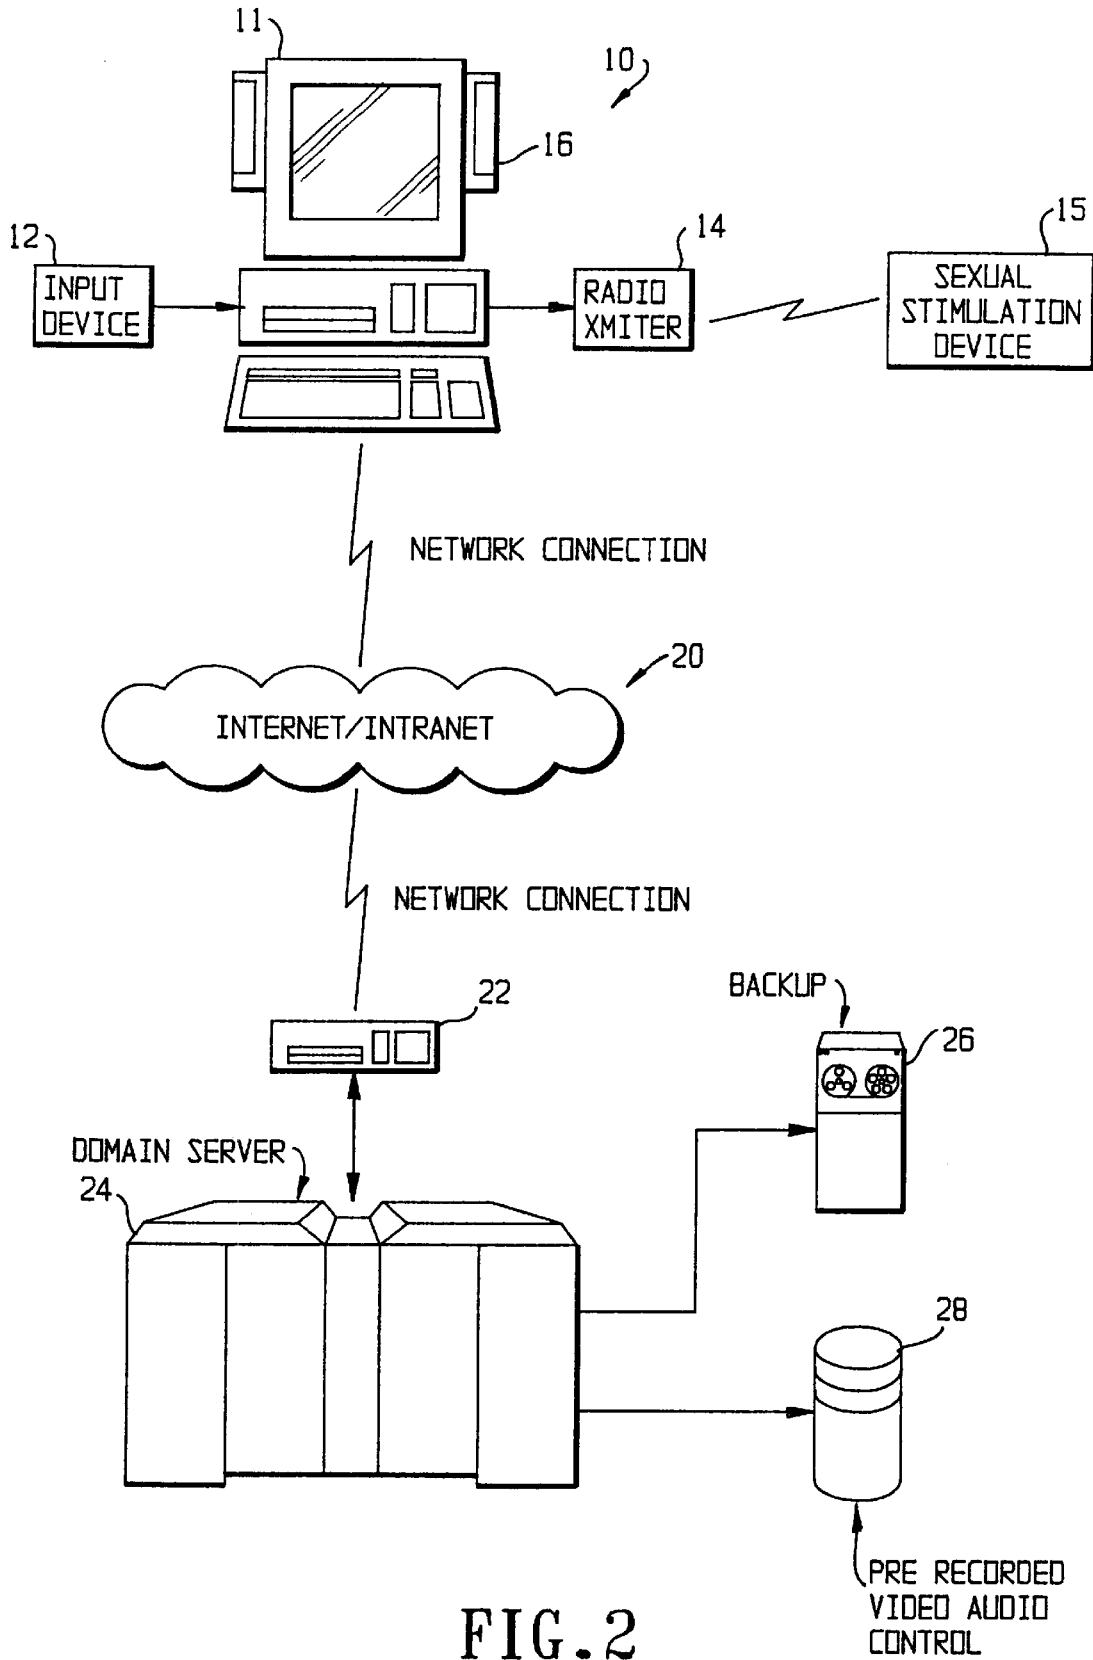
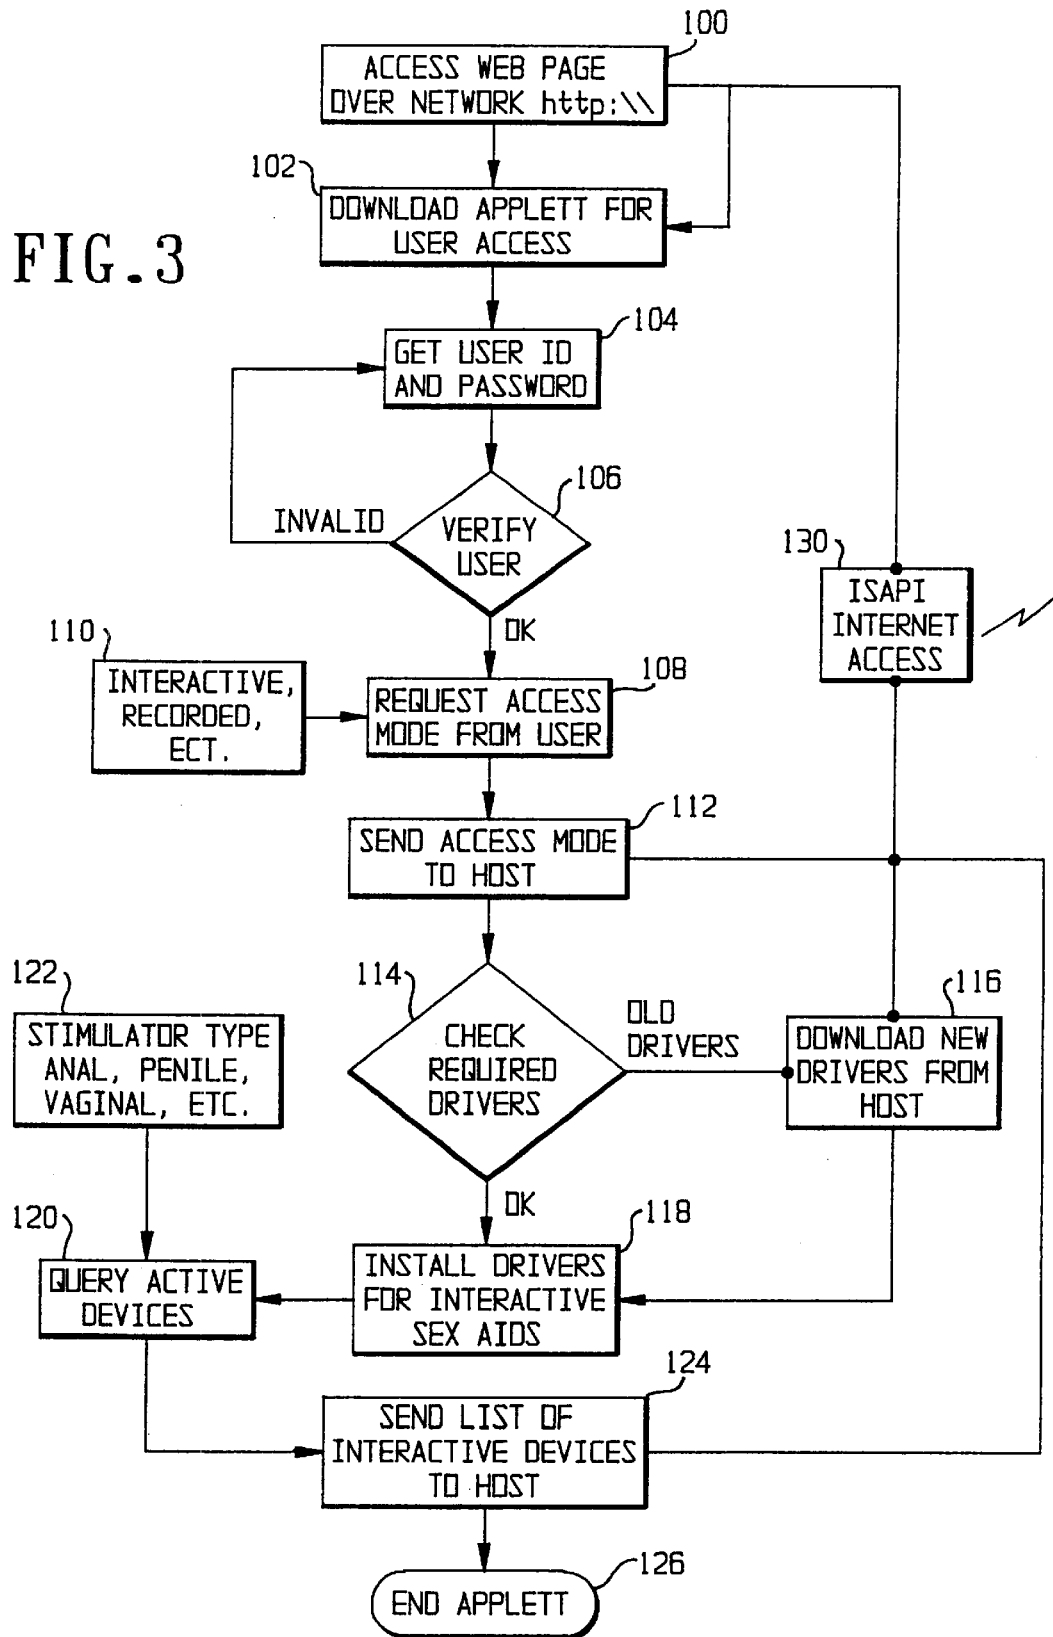


FIG. 3



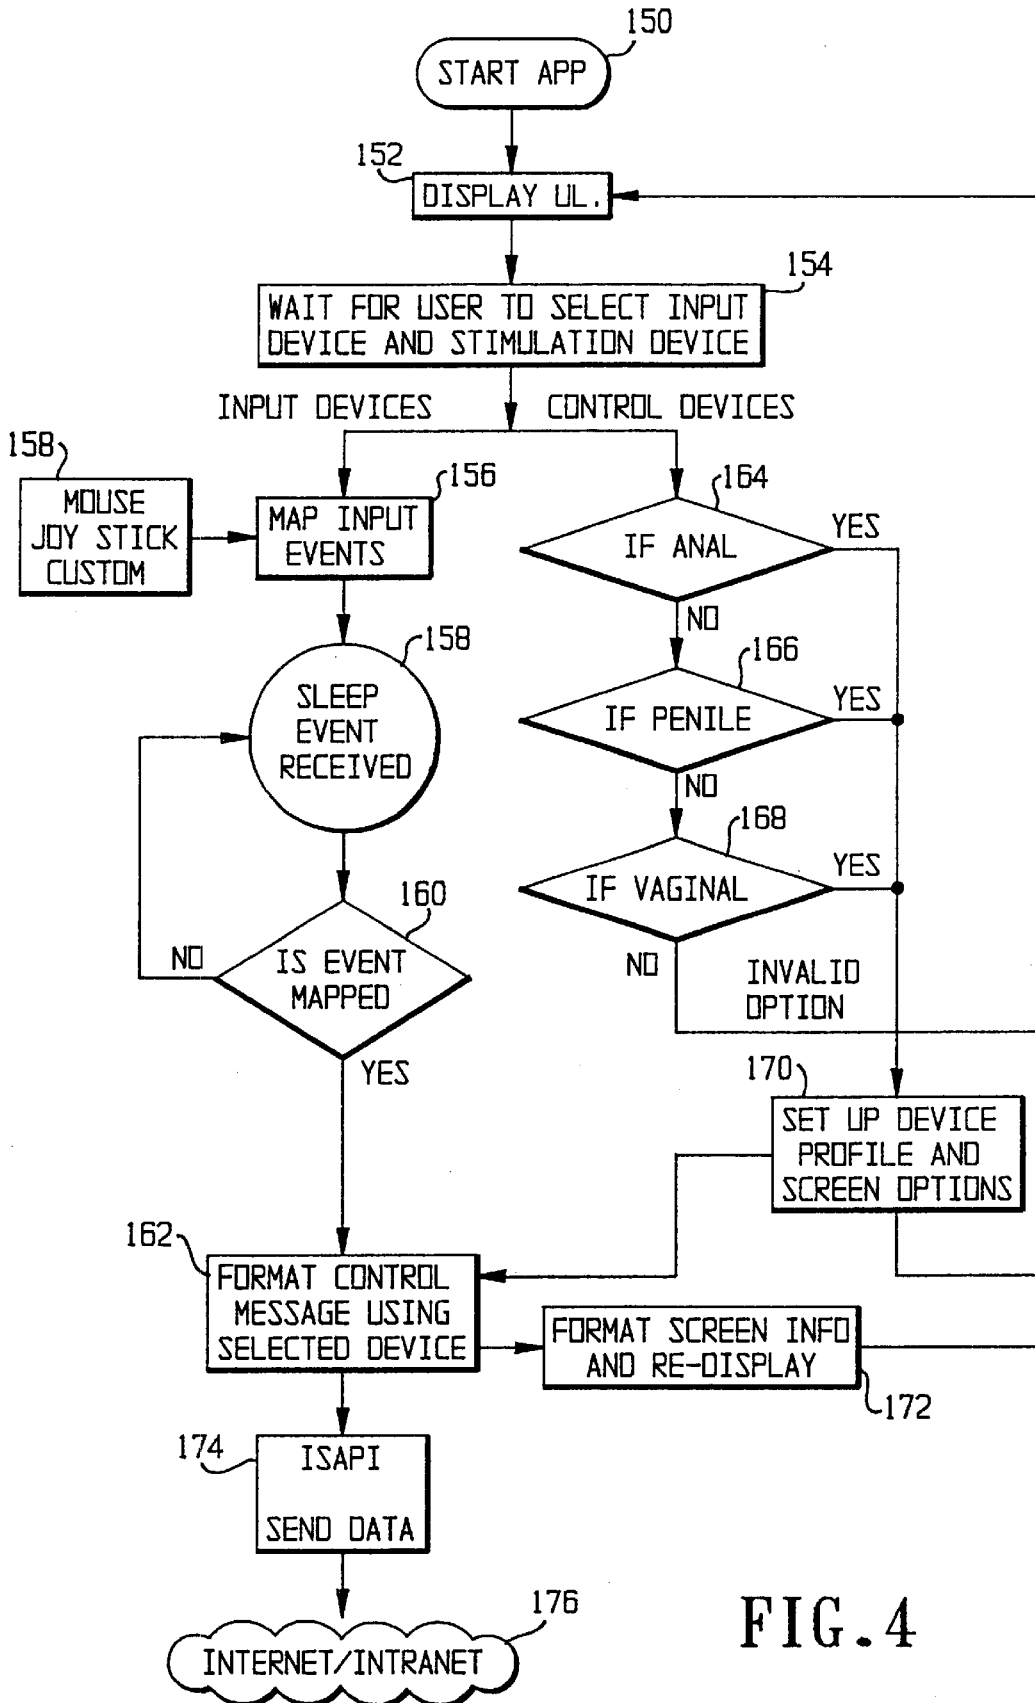


FIG. 4

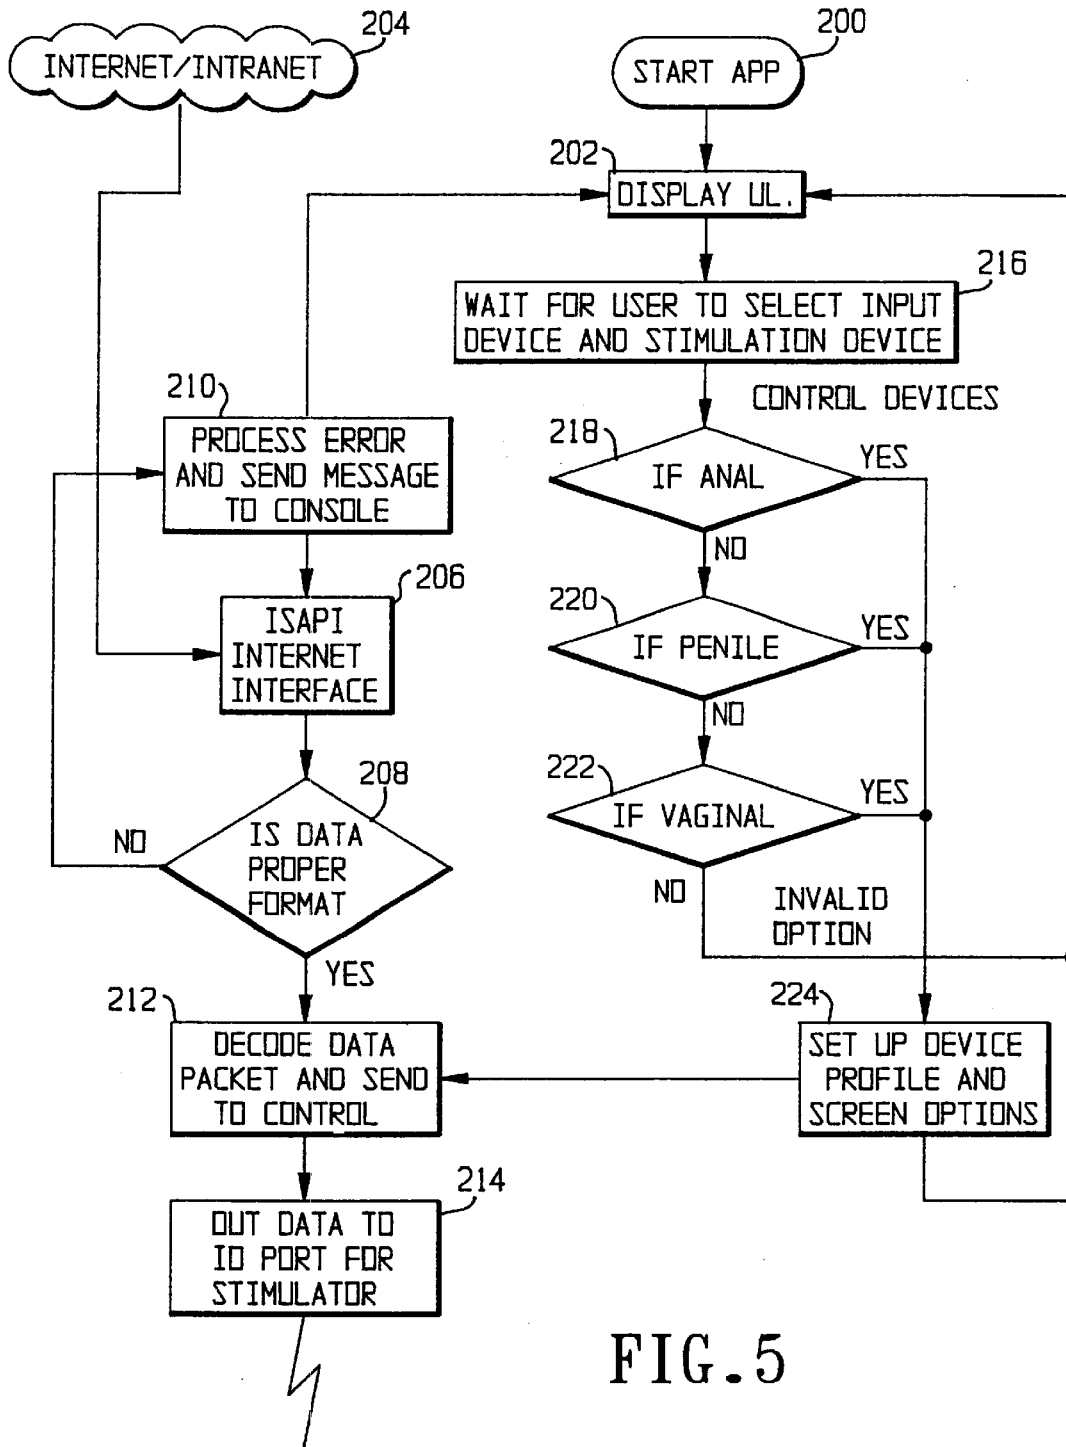


FIG. 5

US 6,368,268 B1

1

METHOD AND DEVICE FOR INTERACTIVE VIRTUAL CONTROL OF SEXUAL AIDS USING DIGITAL COMPUTER NETWORKS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to remotely-controlled sexual aids. More particularly, the invention relates to sexual aids that are controlled through personal computers and digital computer networks, such as the Internet, by user interactive programs.

2. Description of the Related Art

A number of sexual stimulation aids or devices are currently offered that are controlled by a person for self-stimulation, or to stimulate a third party (the "recipient"). For clarity, the term "operator" is used to refer to the person or persons operating the stimulation aid, and the term "recipient" is the person or persons being stimulated by the aid. It is to be understood that the operator and the recipient may be the same party or two different parties.

Stimulation devices have been developed that allow the operator to control the rate of stimulation, as well as other factors that affect the amount of stimulation imparted to the recipient. U.S. Pat. Nos. 5,501,650 and 4,790,296 to Gellert and Segal, respectively, show two different stimulation devices that permit the operator to control the amount of stimulation imparted to the recipient. In addition, U.S. Pat. No. 5,490,784 to Carmein shows a virtual reality system having a "virtual sex" application with an interactive solid that simulates a human partner.

These stimulation aids, however, require that the operator directly engage the stimulation aid. Only several stimulation aids are known that allow the stimulation aid to be operated by a remote controller-type device, such as shown in U.S. Pat. No. 4,834,115 to Stewart entitled "Penile Constrictor Ring," U.S. Pat. No. 4,412,535 to Teren entitled "Remotely Controlled Massaging Apparatus," U.S. Pat. Nos. 3,978,851 and 3,874,373, each to Sobel and entitled "Massaging Apparatus," and U.S. Pat. No. 5,454,840 to Krakovsky et al. entitled "Potency Package."

Nonetheless, these prior art devices all have the disadvantage that the operator must be in close proximity to the recipient. Medical communication systems are known that enable medical personnel located at a central station to monitor devices located at a patient via computer control over an existing telephone network. Medical communication systems are shown, for instance, by U.S. Pat. Nos. 5,462,051, 5,544,649 and 5,467,773 to Oka et al., David et al., and Bergelson et al., respectively. However, these medical communication systems are not readily suitable for use for sexual stimulation aids. Thus, no system enables an operator to control a stimulation aid from a location remote from the recipient.

SUMMARY OF THE INVENTION

Accordingly, it is a primary object of the invention to provide a system that permits an operator to have interactive control of a sexual aid used to stimulate a recipient that is remotely located from the operator. It is a further object of the invention to provide a system in which an operator may stimulate a recipient over currently existing computer networks, such as the Internet. It is yet another object of the invention to provide a multi-media event, such as a pre-recorded video feed, that automatically operates a stimulation aid located at a user interface.

2

In accordance with these and other objectives, the present invention is a system having one or more user interfaces. Each user interface generally comprises a computer. The user interface may be connected to an input device, video camera, and/or signal interface. The signal interface is used to interface the computer with one or more sexual stimulation devices, which are also connected to the user interface. In accordance with the preferred embodiment, a person at a first user interface controls the stimulation device(s) located at a second user interface. The first and second user interfaces may be connected, for instance, through a web site on the Internet.

In another embodiment, a person at a user interface may interact with a multi-media event, such as a pre-recorded video feed. The invention is implemented by software that is stored at the computer of the user interface, or at a web site accessed through the Internet.

These and other objects of the invention, as well as many of the intended advantages thereof, will become more readily apparent when reference is made to the following description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram of the overall system for interactive use by two or more users in accordance with the preferred embodiment of the invention.

FIG. 2 is a diagram of the overall system for a user to interact with pre-recorded video feeds in another embodiment of the invention.

FIG. 3 is a flow chart for initiation of a user to log into a web site that implements the invention.

FIG. 4 is a flow chart for a user to select the types of input devices and stimulation aids that transmit control signals by an operator in accordance with the present invention.

FIG. 5 is a flow chart showing operation of the system to decode control signals that are received and to format the control signals for transmission to the stimulation aid in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In describing preferred embodiments of the invention illustrated in the drawings, specific terminology will be resorted to for the sake of clarity. However, the invention is not intended to be limited to the specific terms so selected, and it is to be understood that each specific term includes all technical equivalents which operate in a similar manner to accomplish a similar purpose.

Turning to the drawings, FIG. 1 shows the overall system of the invention, generally designated by the numeral 5. The system 5 generally has a first user interface, generally designated by the numeral 10, connected through a network, generally designated by the numeral 20, to a second user interface, generally designated by the numeral 30. Each of the first and second user interfaces 10, 30 preferably comprise a personal computer 11, 31. Various devices are connected to the user interfaces 10, 30, including input devices 12, 32, video cameras 13, 33, signal interface or remote transmitters 14, 34, sexual stimulation devices 15, 35 and/or speakers 16, 36.

As used herein, the term "user" refers to a person or persons that is at any one of the user interfaces 10, 30. A "user" may also be either an operator, recipient, or both an operator and a recipient.

In accordance with the first embodiment of FIG. 1, the first and second user interfaces **10, 30** are each connected to a network **20** by a network connection. The network may be the Internet, or an Intranetwork such as a Local Area Network. However, the first and second interfaces **10, 30** may also be directly connected together, such as in a local connection or via a bulletin board service. Still yet, the first and second interfaces **10, 30** may be connected in any other suitable manner.

A first user, located at the first user interface **10**, may input commands or control signals into the computer **11** via input device **12** or the computer keyboard. The input device **12** may be, for instance, a joystick, mouse and/or microphone. Still yet, the input device **12** may be a custom designed input mechanism, such as an input device having acceleration sensor and both tactile input and feedback systems. Control signals input at the first interface may be used to control one or both of the sexual stimulation devices **15, 35** located at the first user interface **10** and the second user interface **30**, respectively.

Real-time video images may also be captured by camera **13** and displayed at the display device of the first user interface **10** and/or the second user interface **30**. Likewise, audio signals may be received at the first user interface **10** by a microphone (not shown) and output through speakers **16** and/or **36**.

Thus, in the preferred embodiment shown in FIG. 1, commands are input by the user at the first user interface **10**. The commands or control signals are then transmitted to stimulation devices **15, 35** at either the first or second user interfaces **10, 30** through remote transmitters **14, 34** and network **20**. The user may select one or more of the stimulation devices **15, 35** located at the first user interface **10**, second user interface **35**, or any other user interface (not shown). Control signals transmitted by the first user interface **10** to stimulation device **15** need not be transmitted through the network **20**.

The recipient located at each user interface **10, 30** engages the associated stimulation aid **15, 35** as required for the type of stimulation device being used. The selected stimulation devices **15, 35** are then operated by the control signals to vary the speed, multi-axis motion, pressure and type of stimulation to be imparted to the recipient. Multiple stimulation devices **15, 35** may be located at each user interface **10, 30**, and operated by one or more transmitters **14, 34** at each interface. Each recipient may be fitted with one or more stimulation aids **15, 35**, and multiple recipients and/or operators may be located at each user interface **10, 30**.

The remote transmitters **14, 34** are connected to an input/output port of the computer **11, 31**, such as the parallel port. The remote transmitters **14, 34** remove the risk of current leakage and other detrimental electrical signals that otherwise might be generated or received by the computer **11, 31**. The remote transmitters **14, 34** preferably are either radio or infrared links that isolate the associated stimulation devices **15, 35** from dangerous current. Alternatively, the stimulation device may be directly wired to the computer with a current protection circuit. The transmitter **14** functions as an interface between the stimulation device **15** and the computer **11**.

The sexual stimulation devices **15, 35** generally provide three basic types of stimulation: vaginal, penile and anal. However, the stimulation devices **15, 35** may also be a body massage or similarly suitable device. The transmitter **14** may be configured to be used in combination with any standard stimulation device that receives signals, such as those shown

in U.S. Pat. Nos. 4,834,115 and 4,412,535 to Stewart and Teren, respectively, the disclosures of which are hereby incorporated by reference.

Standard stimulation devices **15, 35** that are not capable of receiving remotely transmitted signals (i.e., hard-wired devices, such as shown in U.S. Pat. No. 3,978,851 to Sobel) may be adapted to be directly connected (or through an interface) to the computer to receive control signals.

Accordingly, an operator at the first user interface **10** may control the functions of a physical sexual stimulation device **35** over unlimited distance using a personal computer **11** and the Internet **20** in a virtual interactive method using existing input devices **12**. At the same time, that same operator at the first user interface **10** may also be a recipient that receives interactive audio and visual stimulation at a stimulation device **15** located at the first user interface **10**.

The Internet **20** further allows for operators and recipients to select each other from services, such as adult entertainment chat rooms, or through pay sites having adult live video feeds. Any number of persons may interconnect to form a session, each joining as either an operator, recipient, or an observer, or as both an operator and a recipient. The parties may also transmit messages over the Internet during the course of the session.

Another embodiment of the invention is shown in FIG. 2 involving only a single user interface **10**. The user interface **10** connects to a domain server **24** through the Internet **20** and router **22**. The domain server controls a backup **26** and pre-recorded video and audio feeds stored at control unit **28**.

According to this embodiment, a user located at the user interface **10** may access pre-recorded video and audio feeds at control unit **28**. The user may, for instance, select from a variety of pre-recorded video feeds. The control unit **28** then plays the selected video feed. Control signals associated with the selected video feed can be transmitted to the stimulation device **15** during display of the video on the display device and over speakers **16**.

As in the embodiment of FIG. 1, there may be multiple recipients and/or operators at the user interface **10**. Likewise, each recipient may be fitted with one or more stimulation aids **15**. A single transmitter **14** may control one or more stimulation aids **15**, or multiple transmitters **14** may be provided. The user interface **10** may also include a video camera (not shown), so that the user may create a video feed for storage on the control unit **28**.

Still yet, the embodiment of FIG. 2 may be combined with the embodiment of FIG. 1. Thus, users at multiple user interfaces **10, 30** may form a session to simultaneously view a single video feed. Video camera **13** and microphones (not shown) may also be used to add video and audio to the prerecorded video feed.

One possible implementation of the operation of the system will now be discussed starting with reference to FIG. 3. FIG. 3 shows network access by a user interface **10** to a web site controlled by server **24**. Operation is preferably implemented by the use of a Java applet, though access may be achieved in any suitable manner. Starting with step **100**, the user directs the computer **11** to access the desired web page over the Internet. This is typically done through the use of a standard Internet Service Application Program Interface (ISAPI) **130**, such as WINDOWS® software

In accordance with the preferred embodiment, the server **24** transmits an applet to the computer **11**, step **102**, which in accordance with the preferred embodiment prompts the user for an ID and password, step **104**. If the password and ID are verified at step **106**, the system proceeds to step **108**. Otherwise, the user is returned to step **104**.

US 6,368,268 B1

5

Once the user has entered the correct ID and password, the user is then prompted to select the desired mode of operation, step 108. The preferred modes of operation are: two (or more) person interactive (FIG. 1) and one person pre-recorded (FIG. 2), block 110. The selected mode is then transmitted to the host, step 112, via the ISAPI 130.

The system then checks whether the computer 11 at the first user interface 10 has the required drivers, step 114. If the drivers stored on the computer 11 are old, the drivers are updated, step 116, and installed, step 118. If the drivers are current, step 114, the drivers are installed at step 118.

Following installation of the drivers, the active stimulation devices 15 are queried, step 120. Here, the possible active devices may be, for instance, anal, penile, vaginal, etc., as represented at block 122. The list of active devices are then sent to the host, step 124, and the applet ends, step 126. The query may also include a search of input devices 12, 13 that are connected to the computer 11.

Once the user interface 10 has accessed the network site, FIG. 3, the application will be executed in a frame window on a browser located at the user interface 10. Accordingly, the system picks up at FIG. 4, which formats the computer at the first user interface 10 to properly transmit control signals. FIG. 4 may be used, for instance, when a user at the first user interface 10 controls a stimulation aid 35 at a second user interface 30 (FIG. 1).

At step 150, the applet is started, and the user interface is displayed, step 152. The user interface is preferably a WINDOWS® interface. Menus and dialog selections for input devices 12 and stimulation aids 15 are displayed in a window. The list of input devices 12 and aids 15 is generated based upon the query of active devices, step 120. The user selects one or more stimulation aids 35 and input devices 12, 13 that are located at the first user interface 10, step 154.

In order for the computer 11 to properly format control messages generated by the user at the first user interface 10, the system must first know the type of input devices 12, 13 being used at the first user interface. This is performed along the left branch of FIG. 4. In addition, the computer 11 must also know the type of stimulation aid 35 that is to be controlled at the second user interface 30. This operation is performed along the right branch of FIG. 4.

The two branches meet at step 162, which combines the information regarding the input device being used by the user with the type of stimulation aid to be controlled. This information is then used to properly format control messages for transmission to the server or the second user interface 30.

The computer maps input events, step 156, based upon the type of input devices 12, 13 selected by the user, block 158. The system then enters a sleep mode until an event is received, step 158, from the selected input device. Once an event is received, step 158, the system checks whether the event is mapped, step 160. If the event is mapped, the system then proceeds to step 162 where it awaits the receipt of control messages from the user. If the received event is not mapped, the control received from the input device is not recognized, and the system returns to step 158.

In addition, the user selects the type of stimulation aid 35 that is to be controlled at the second user interface 10. The user simply selects which stimulation aid 35 is to be controlled from the list of aids sent by the host. Steps 164, 166, 168 determine, for instance, whether the type of stimulation aid 15 selected by the user is anal, penile or vaginal, respectively. If the device 15 is not recognized, the system returns to step 152. Otherwise, the device profile is set up and screen options are displayed to the user, step 170.

6

Once the input devices 12, 13 and stimulation devices 35 are selected, control signals generated by the user can then be properly formatted, step 162. The screen at the first user interface 10 is then updated, step 172, to display further instructions or options to the user. Information is transmitted, step 174, back over the Internet, block 176, to the server.

By way of example for illustrative purposes, one can envision that a user at the first user interface 10 is using a joy stick to control a stimulation aid located at the second user interface 30. An event might be the user moving the joy stick upwards, or pressing a button. If the stimulation aid is a massager, the movement of the joy stick upwards might generate a control signal to move the massager forward. If, on the other hand, the selected stimulation aid is a penile stimulator having a stroking mechanism, movement of the joy stick upwards may generate a control signal to increase the rate of the stroking mechanism. Accordingly, proper format of the control signal, step 162, depends upon the type of input device, as well as the stimulator being controlled.

FIG. 5 shows one implementation of the operation at the second (recipient) user interface, which is user interface 30 in the foregoing example. Thus, the operation of FIG. 5 details how control signals received from the first user interface 10 are processed. FIG. 5 also applies, for instance, to process control signals received from the server 24 when a one-person interactive prerecorded video feed is used, such as shown in FIG. 2.

Starting at step 200, an applet is initiated at the second user interface 30, the user interface is displayed, step 202, and the system awaits input by the user. Meanwhile, at blocks 204, 206, the user interface 30 receives a signal via the Internet. If the data is improperly formatted, step 208, an error signal is generated, step 210, and the system continues to await a valid message.

When properly formatted data is received, step 208, the data packet is decoded, step 212. However, in order for the data to be properly decoded and transmitted as a control signal to the stimulation aid 35, the computer 31 must know which stimulation device 35 is being used at the second user interface 30. The user may select the stimulation device and input device from amongst the active devices recognized, for instance, at step 120.

The data packet is decoded based upon the type of stimulation aid 35 that has been selected by the user, step 216. If the selected device is not anal, penile or vaginal, the computer indicates to the user that the user has selected an invalid option and returns to step 202. If, however, the selected aid 35 is recognized by the computer 31, steps 218, 220 and 222, the device profile is set up together with the screen options, step 224. The profiles are then used to decode the data packet, step 212. After the data packet has been decoded, it is sent through the Input/Output port of the computer to the transmitter 34 and respective stimulation device 35.

In addition to the steps of FIGS. 3–5, each computer 11, 31 at the various user interfaces may perform a query to determine which input devices and stimulation aids 15 are connected at that user interface. The user interfaces 10, 30 then communicate with each other (and/or to server 24) to indicate which stimulation aids and input devices are active or desired to be used. The control signals transmitted by the first user interface 10 (or server 24) to the second user interface 30 may then be properly formatted by the first user interface and decoded by the second user interface. The server may also operate to process and format messages

between the first and second user interfaces **10, 30**, based upon information received by computers **11, 31** indicating the types of input devices and stimulation aids located at the respective interfaces and desired to be used by the user.

In accordance with the preferred embodiment of the invention, the system and method of the present invention is implemented by computer software. The software may be stored on a CD-ROM at the user interface, or stored locally within a single free-standing computer or at a server for a group of computers networked together. The computer software may also be remotely located at a host server **24** that is accessed through a communication medium **20**, such as the Internet.

In addition, the input devices **12, 13**, as well as the stimulation device **15**, may be integrated into a single unit together with the user interface **10**. Thus, for instance, a portable unit may be configured that includes an input device, stimulation aid, and offers a connection to the Internet for communication with other remote units.

The foregoing descriptions and drawings should be considered as illustrative only of the principles of the invention. The invention may be configured in a variety of shapes and sizes and is not limited by the dimensions of the preferred embodiment. Numerous applications of the present invention will readily occur to those skilled in the art. For example, prepackaged user interactive games may be distributed on digital medium for single user stimulation. In addition, the computer **11** may be any suitable interface, such as a television that communicates through the Internet or a processor designed to implement the invention. Therefore, it is not desired to limit the invention to the specific examples disclosed or the exact construction and operation shown and described. Rather, all suitable modifications and equivalents may be resorted to, falling within the scope of the invention.

What is claimed is:

1. A stimulation system comprising:
 - a display device;
 - a user interface connected to said display device, said user interface causing an image to be displayed on said display device and outputting a control signal; and,
 - a stimulation device receiving the control signal from the user interface, said stimulation device imparting stimulation to the user in response to the control signal.
2. The stimulation system of claim 1, further comprising a signal interface connected to the user interface for receiving the control signal and transmitting the received control signal to said stimulation device.
3. The stimulation system of claim 2, wherein the signal interface comprises a radio transmitter.
4. The stimulation system of claim 2, wherein the signal interface comprises an infrared transmitter.
5. The stimulation system of claim 1, wherein the user interface comprises a computer.
6. The stimulation system of claim 1, the stimulation device comprising a sexual stimulation device, the control signal varying sexual stimulation imparted to the user.
7. The stimulation system of claim 1, wherein said display device, user interface and stimulation device are integrated into a single unit.
8. A stimulation system comprising:
 - a hand-operable input device for generating a command signal in response to an input received from a first user;
 - a first user interface connected to said input device, said first user interface generating a control signal based upon the command signal;

a second user interface remotely located from said first user interface, said second user interface receiving the control signal; and,

a stimulation device receiving the control signal from said second user interface, said stimulation device imparting stimulation to a second user in response to the control signal.

9. The stimulation system of claim 8, further comprising a signal interface connected to said second user interface for receiving the control signal and transmitting the received control signal to said stimulation device.

10. The stimulation system of claim 9, wherein the signal interface comprises a radio transmitter.

11. The stimulation system of claim 9, wherein the signal interface comprises an infrared transmitter.

12. The stimulation system of claim 8, the first and second user interfaces each comprising a computer.

13. The stimulation system of claim 8, further comprising a video camera connected to said first user interface for recording images for display at said second user interface.

14. The stimulation system of claim 8, the stimulation device comprising a sexual stimulation device, the control signal varying sexual stimulation imparted to the second user.

15. The stimulation system of claim 8, the first and second user interfaces connected through a local area network.

16. The stimulation system of claim 8, the first and second user interfaces connected through a global network.

17. A stimulation system comprising:

- a first hand-operable input device for generating a first command signal in response to an input received from a first user;

- a first user interface connected to said first input device, said first user interface generating a first control signal based upon the first command signal and receiving a second control signal;

- a first stimulation device receiving the second control signal from said first user interface, said first stimulation device imparting stimulation to the first user in response to receiving the second control signal;

- a second input device for generating a second command signal in response to an input received from a second user;

- a second user interface remotely located from said first user interface, said second user interface receiving the first control signal and generating the second control signal based upon the second command signal; and,

- a second stimulation device receiving the first control signal from said second user interface, said second stimulation device imparting stimulation to the second user in response to the first control signal.

18. The stimulation system of claim 17, further comprising a first signal interface connected to said first user interface for receiving the second control signal and transmitting the received second control signal to said first stimulation device.

19. The stimulation system of claim 18, further comprising a second signal interface connected to said second user interface for receiving the first control signal and transmitting the received first control signal to said second stimulation device.

20. The stimulation system of claim 17, the first and second user interfaces each comprising a computer.

21. The stimulation system of claim 17, further comprising a first video camera connected to said first user interface for capturing images for display at said second user interface.

22. The stimulation system of claim 17, the first and second stimulation devices each comprising a sexual stimulation device, the first and second control signals varying sexual stimulation imparted to the first and second users, respectively.

23. The stimulation system of claim 17, wherein the first and second control signals occur substantially simultaneously.

24. The stimulation system of claim 17, the first and second user interfaces connected through a global network.

25. A stimulation system comprising a user interface outputting an automated control signal including an image, a stimulation device receiving the automated control signal from the user interface, and a display device connected to said user interface and displaying the image, wherein said stimulation device imparts stimulation to a user in response to the automated control signal.

26. The stimulation system of claim 25, wherein the automated control signal is based upon prerecorded information.

27. The stimulation system of claim 26, wherein the prerecorded information is stored at said user interface.

28. The stimulation system of claim 26, wherein the prerecorded information is stored at a server accessed by said user interface through a global network.

29. The stimulation system of claim 25, further comprising a server located remotely from said user interface, said server generating the automated control signal and transmitting the automated control signal to said user interface.

30. The stimulation system of claim 25, further comprising a remote user interface, said remote user interface generating the automated control signal and transmitting the automated control signal to said user interface.

31. The stimulation system of claim 1, wherein said user interface receives an image signal having the image.

32. The stimulation system of claim 31, wherein the control signal causes said stimulation device to impart stimulation to the user based upon the image of the image signal.

33. The stimulation system of claim 1, wherein the image is a video image.

34. The stimulation system of claim 1, wherein the image is a real-time image.

35. The stimulation system of claim 1, wherein said user interface is connected to a global network, and the image signal is received from the global network.

36. The stimulation system of claim 8, wherein said hand-operable input device comprises either a mouse or a joystick.

37. The stimulation system of claim 25, the user interface outputting one of a plurality of user selectable automated control signals.

38. A stimulation system comprising:
an input device for generating a command signal in response to an input received from a user;
a computer connected to said input device, said computer generating a control signal based upon the command signal; and,
a stimulation device receiving the control signal from the computer, said stimulation device imparting stimulation to the user in response to the control signal.

39. A stimulation system comprising:
an input device for generating a command signal in response to an input received from a first user;
a first user interface connected to said input device, said first user interface generating a control signal based upon the command signal;
a camera connected to said first user interface for recording images;
a second user interface remotely located from said first user interface, said second user interface receiving the control signal and the recorded images;
a stimulation device receiving the control signal from said second user interface, said stimulation device imparting stimulation to a second user in response to the control signal; and,
a display device connected to said second user interface for displaying the recorded images.

40. A stimulation system comprising a server generated a control signal, a user interface remotely located from said server and receiving the control signal, and a stimulation device receiving the control signal from the user interface, said stimulation device imparting stimulation to a user in response to the control signal.

* * * * *

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

EXHIBIT B

Xplosion SEC Filing

S-1 1 xplosion_s1.htm FORM S-1

**UNITED STATES
SECURITIES AND EXCHANGE COMMISSION
Washington, D.C. 20549**

FORM S-1

Registration Statement under the Securities Act of 1933

**XPLOSION
INCORPORATED**

(Exact name of registrant as specified in its charter)

NEVADA	2835	N/A
(State or other jurisdiction of incorporation or organization)	(Primary Standard Industrial Classification Code Number)	(I.R.S. Employer Identification Number)

Suite 223 – 468 North Camden Drive, Beverly Hills, CA 90210

Telephone: 1-310-601-3080

(Address, including zip code, and telephone number, including area code, of registrant's principal executive offices)

**GKL Registered Agents of Nevada, Inc.
3064 Silver Sage Dr., Suite 150, Carson City, NV 89701**

Telephone: 775-841,0644

(Name, address, including zip code, and telephone number,
including area code, of agent for service)

Copy of communication to:

**William L. Macdonald
Macdonald Tuskey Corporate & Securities Lawyers
Suite 409 – 221 W. Esplanade, North Vancouver, BC Canada V7M 3J3**

Tel: 604-973-0582

Fax: 604-973-0579

(Name, address, including zip code, and telephone number, including area code, of agent for service)

Approximate Date of Commencement of Proposed Sale to the Public: **As soon as practicable after this Registration Statement is declared effective.**

If any of the securities being registered on this Form are to be offered on a delayed or continuous basis pursuant to Rule 415 under the Securities Act of 1933, please check the following box.

If this Form is filed to register additional securities for an offering pursuant to Rule 462(b) under the Securities Act, please check the following box and list the Securities Act Prospectus number of the earlier effective registration statement for the same offering.

If this Form is a post-effective amendment filed pursuant to Rule 462(c) under the Securities Act, check the following box and list the Securities Act registration statement number of the earlier effective registration statement for the same offering.

If this Form is a post-effective amendment filed pursuant to Rule 462(d) under the Securities Act, check the following box and list the Securities Act registration statement number of the earlier effective registration statement

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

EXHIBIT C

Global Distribution Location

CONTACT US

hello@sayberx.com

Sayber X HQ
77-91 Queen's Road
West
11/Floor (Offices C – F),
Hollywood Centre
Sheung Wan, Hong
Kong

Global distribution by
Xplosion Inc.
468 North Camden
Drive
Suite 223
Beverly Hills CA 90210

SUPPORT

support@sayberx.com
cs@sayberx.com
(Customer Service)

Warranty
Privacy
Returns
Terms and Conditions
FAQs

PRODUCTS

SayberX
X-Ring
Inner Sleeves
Gun Oil Lube



SayberX
2016 © All
Rights
Reserved.