




US 20200135617A1

(19) **United States**(12) **Patent Application Publication**
Shen et al.(10) **Pub. No.: US 2020/0135617 A1**(43) **Pub. Date: Apr. 30, 2020**(54) **ION THROUGH-SUBSTRATE VIA***H01L 23/532* (2006.01)*H01L 21/265* (2006.01)(71) Applicant: **Taiwan Semiconductor Manufacturing Co., Ltd.**, Hsin-Chu (TW)(52) **U.S. Cl.**
CPC *H01L 23/481* (2013.01); *H01L 23/5226* (2013.01); *H01L 23/53214* (2013.01); *H01L 23/53228* (2013.01); *H01L 21/265* (2013.01); *H01L 25/18* (2013.01)(72) Inventors: **Yu-Yang Shen**, Kaohsiung City (TW);
Chien-Hsien Tseng, Hsinchu (TW);
Dun-Nian Yaung, Taipei City (TW);
Nai-Wen Cheng, Tainan City (TW);
Pao-Tung Chen, Tainan (TW)(21) Appl. No.: **16/391,550**(22) Filed: **Apr. 23, 2019****Related U.S. Application Data**

(60) Provisional application No. 62/749,752, filed on Oct. 24, 2018.

Publication Classification(51) **Int. Cl.**
H01L 23/48 (2006.01)
H01L 23/522 (2006.01)
H01L 25/18 (2006.01)(57) **ABSTRACT**

Various embodiments of the present disclosure are directed towards an integrated circuit (IC) including a first through substrate via (TSV) within a first semiconductor substrate. The first semiconductor substrate has a front-side surface and a back-side surface respectively on opposite sides of the first semiconductor substrate. The first semiconductor substrate includes a first doped channel region extending from the front-side surface to the back-side surface. The first through substrate via (TSV) is defined at least by the first doped channel region. A first interconnect structure on the front-side surface of the first semiconductor substrate. The first interconnect structure includes a plurality of first conductive wires and a plurality of first conductive vias, and the first conductive wires and the first conductive vias define a conductive path to the first TSV.

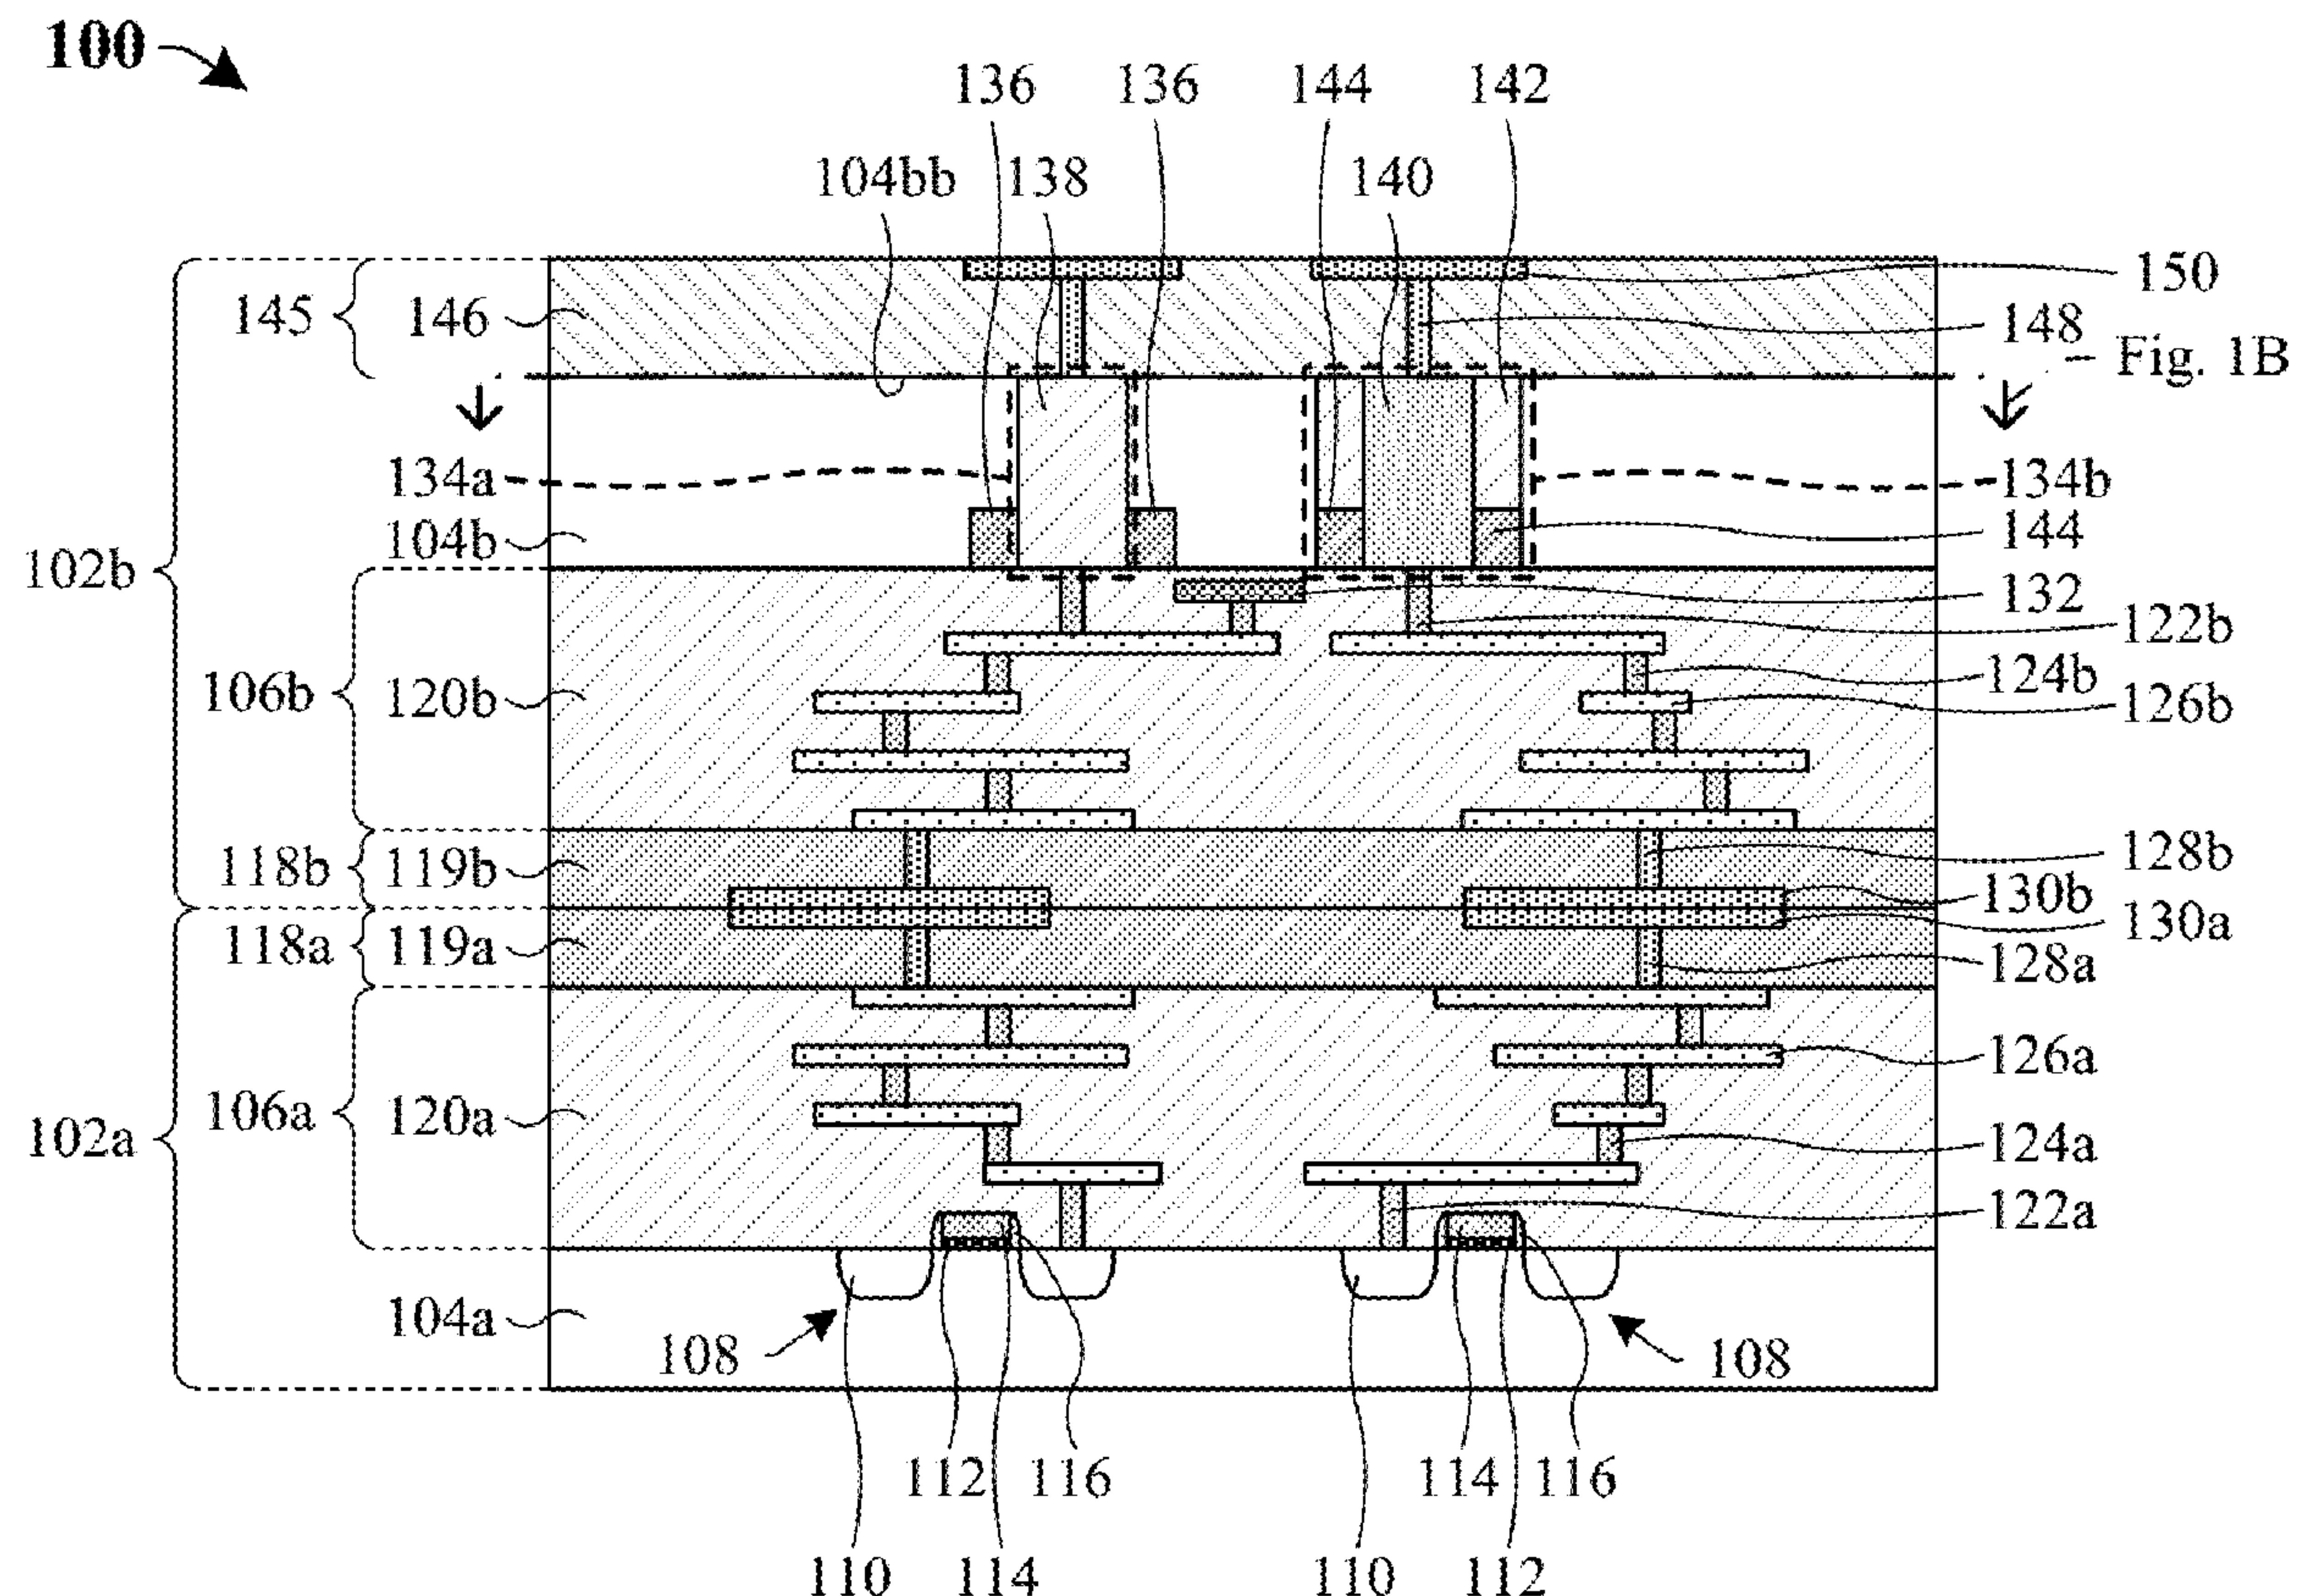

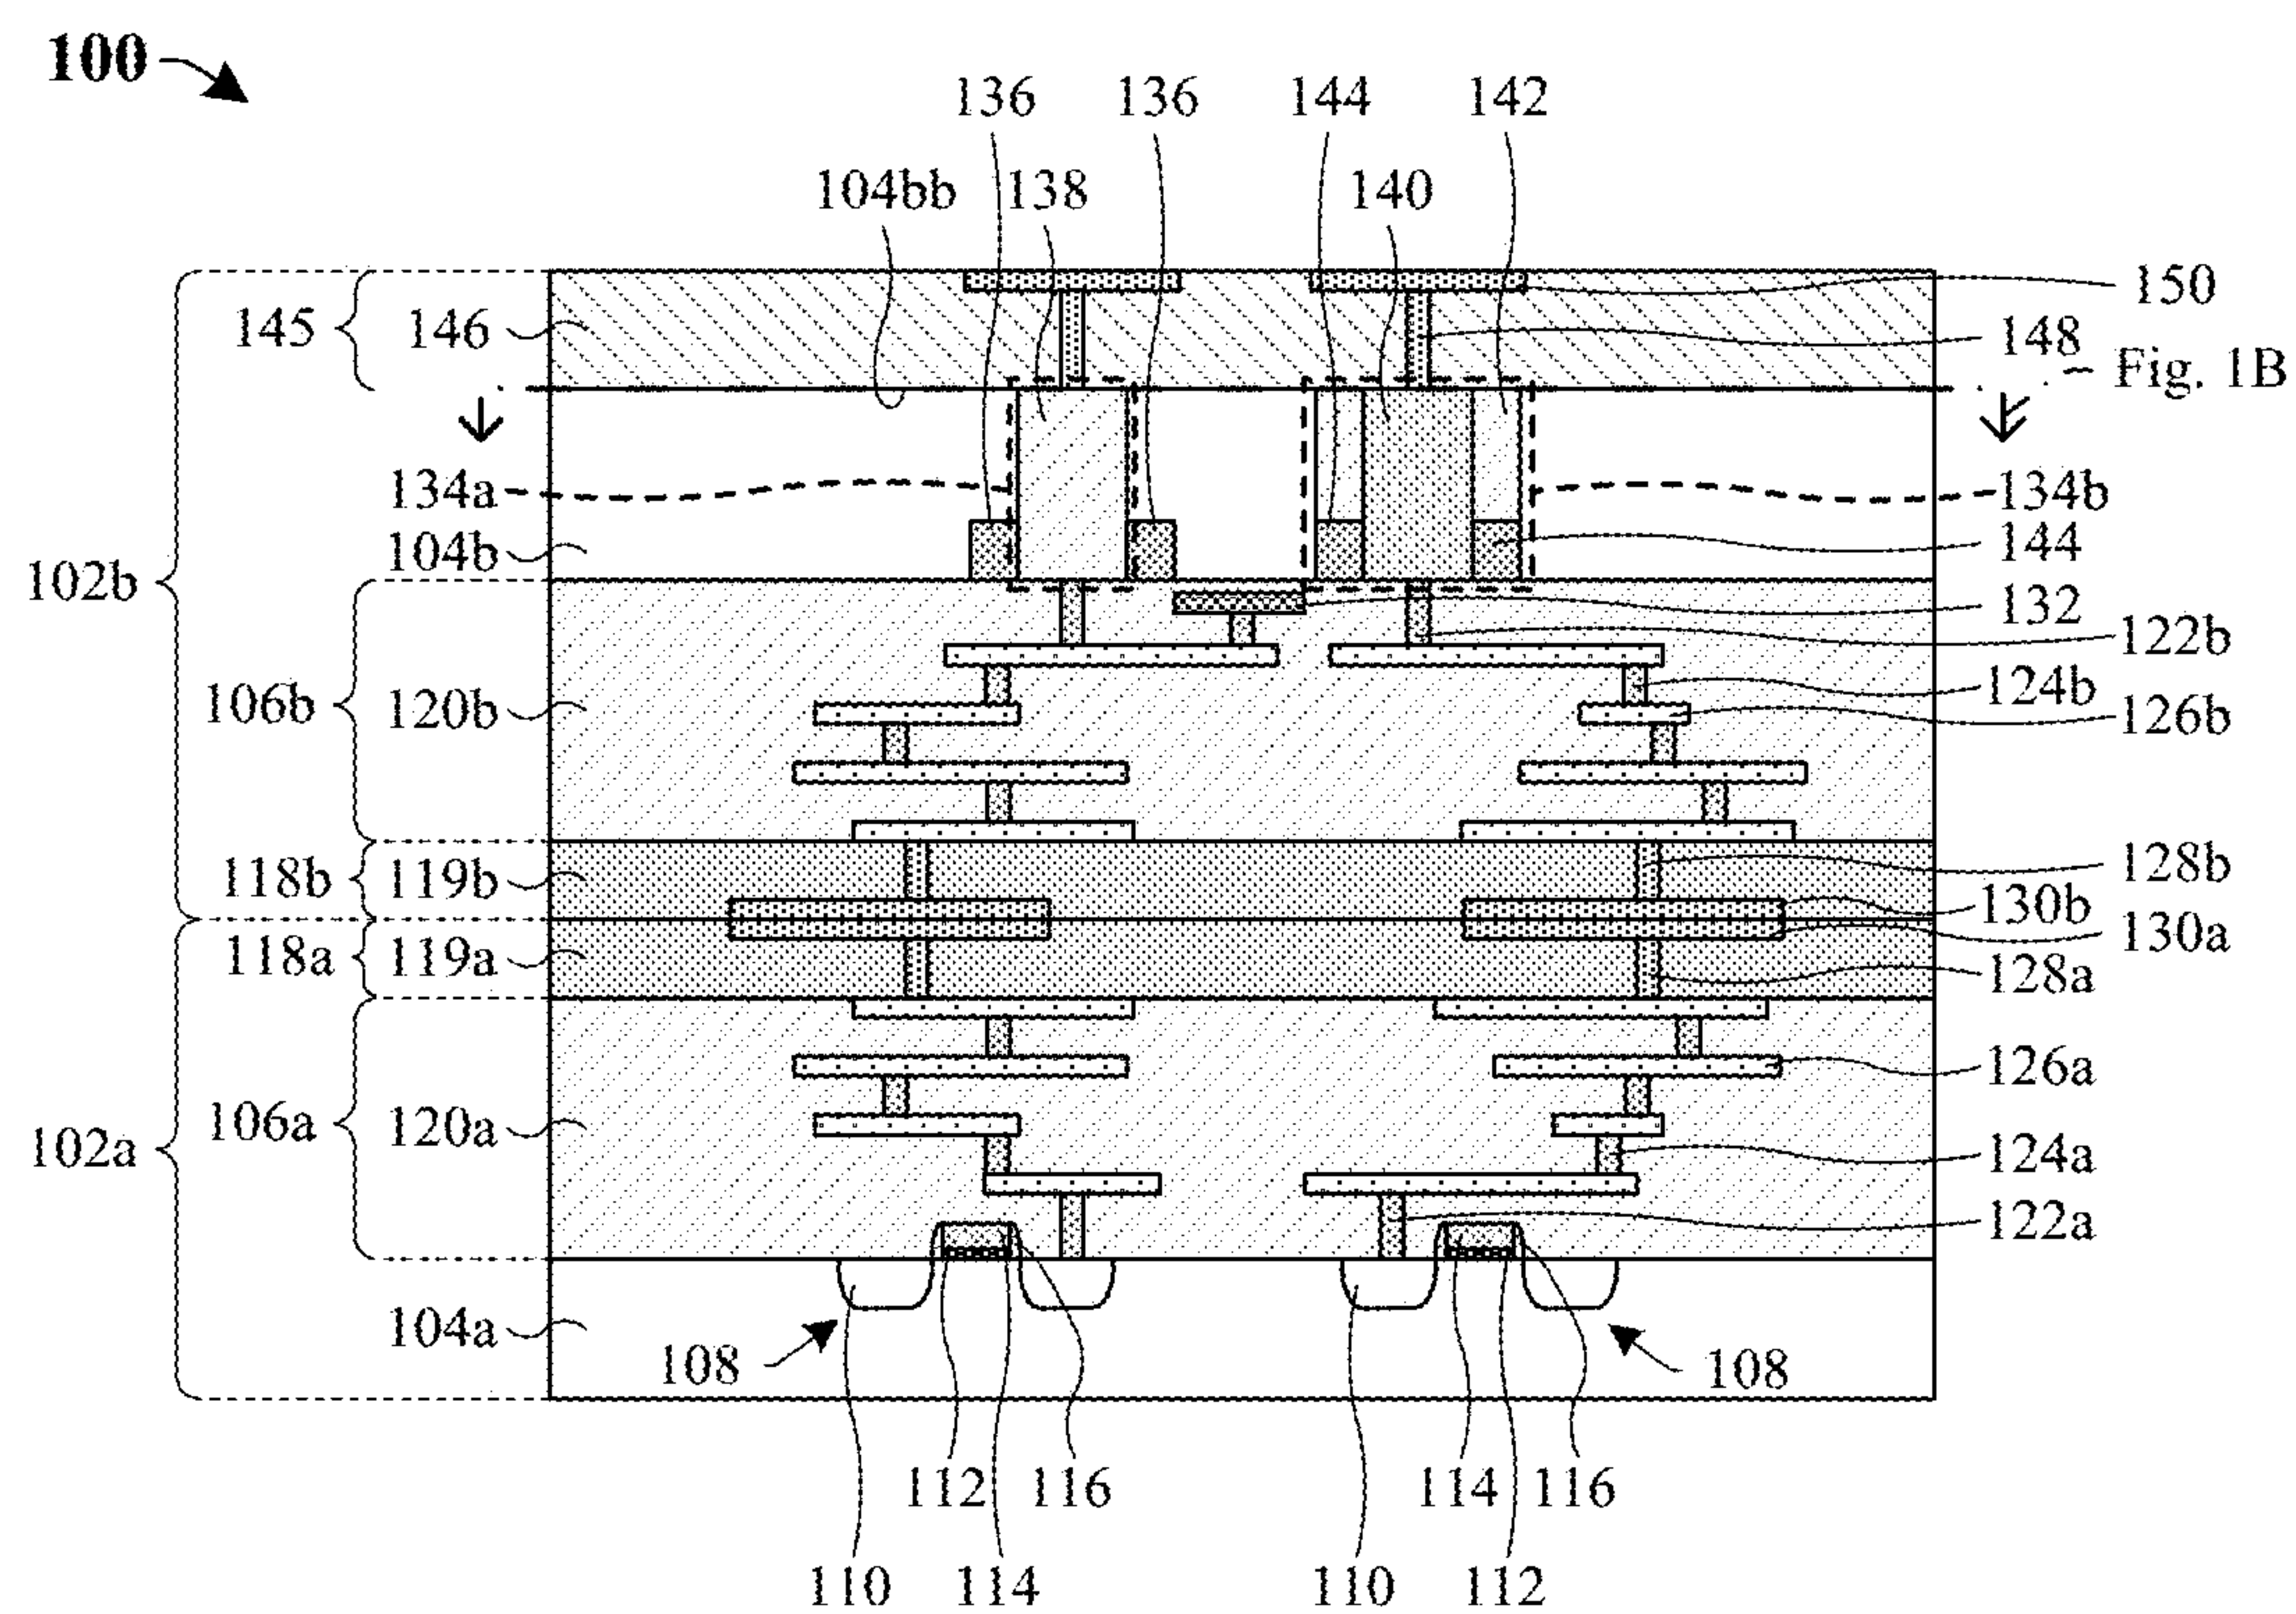


Fig. 1A

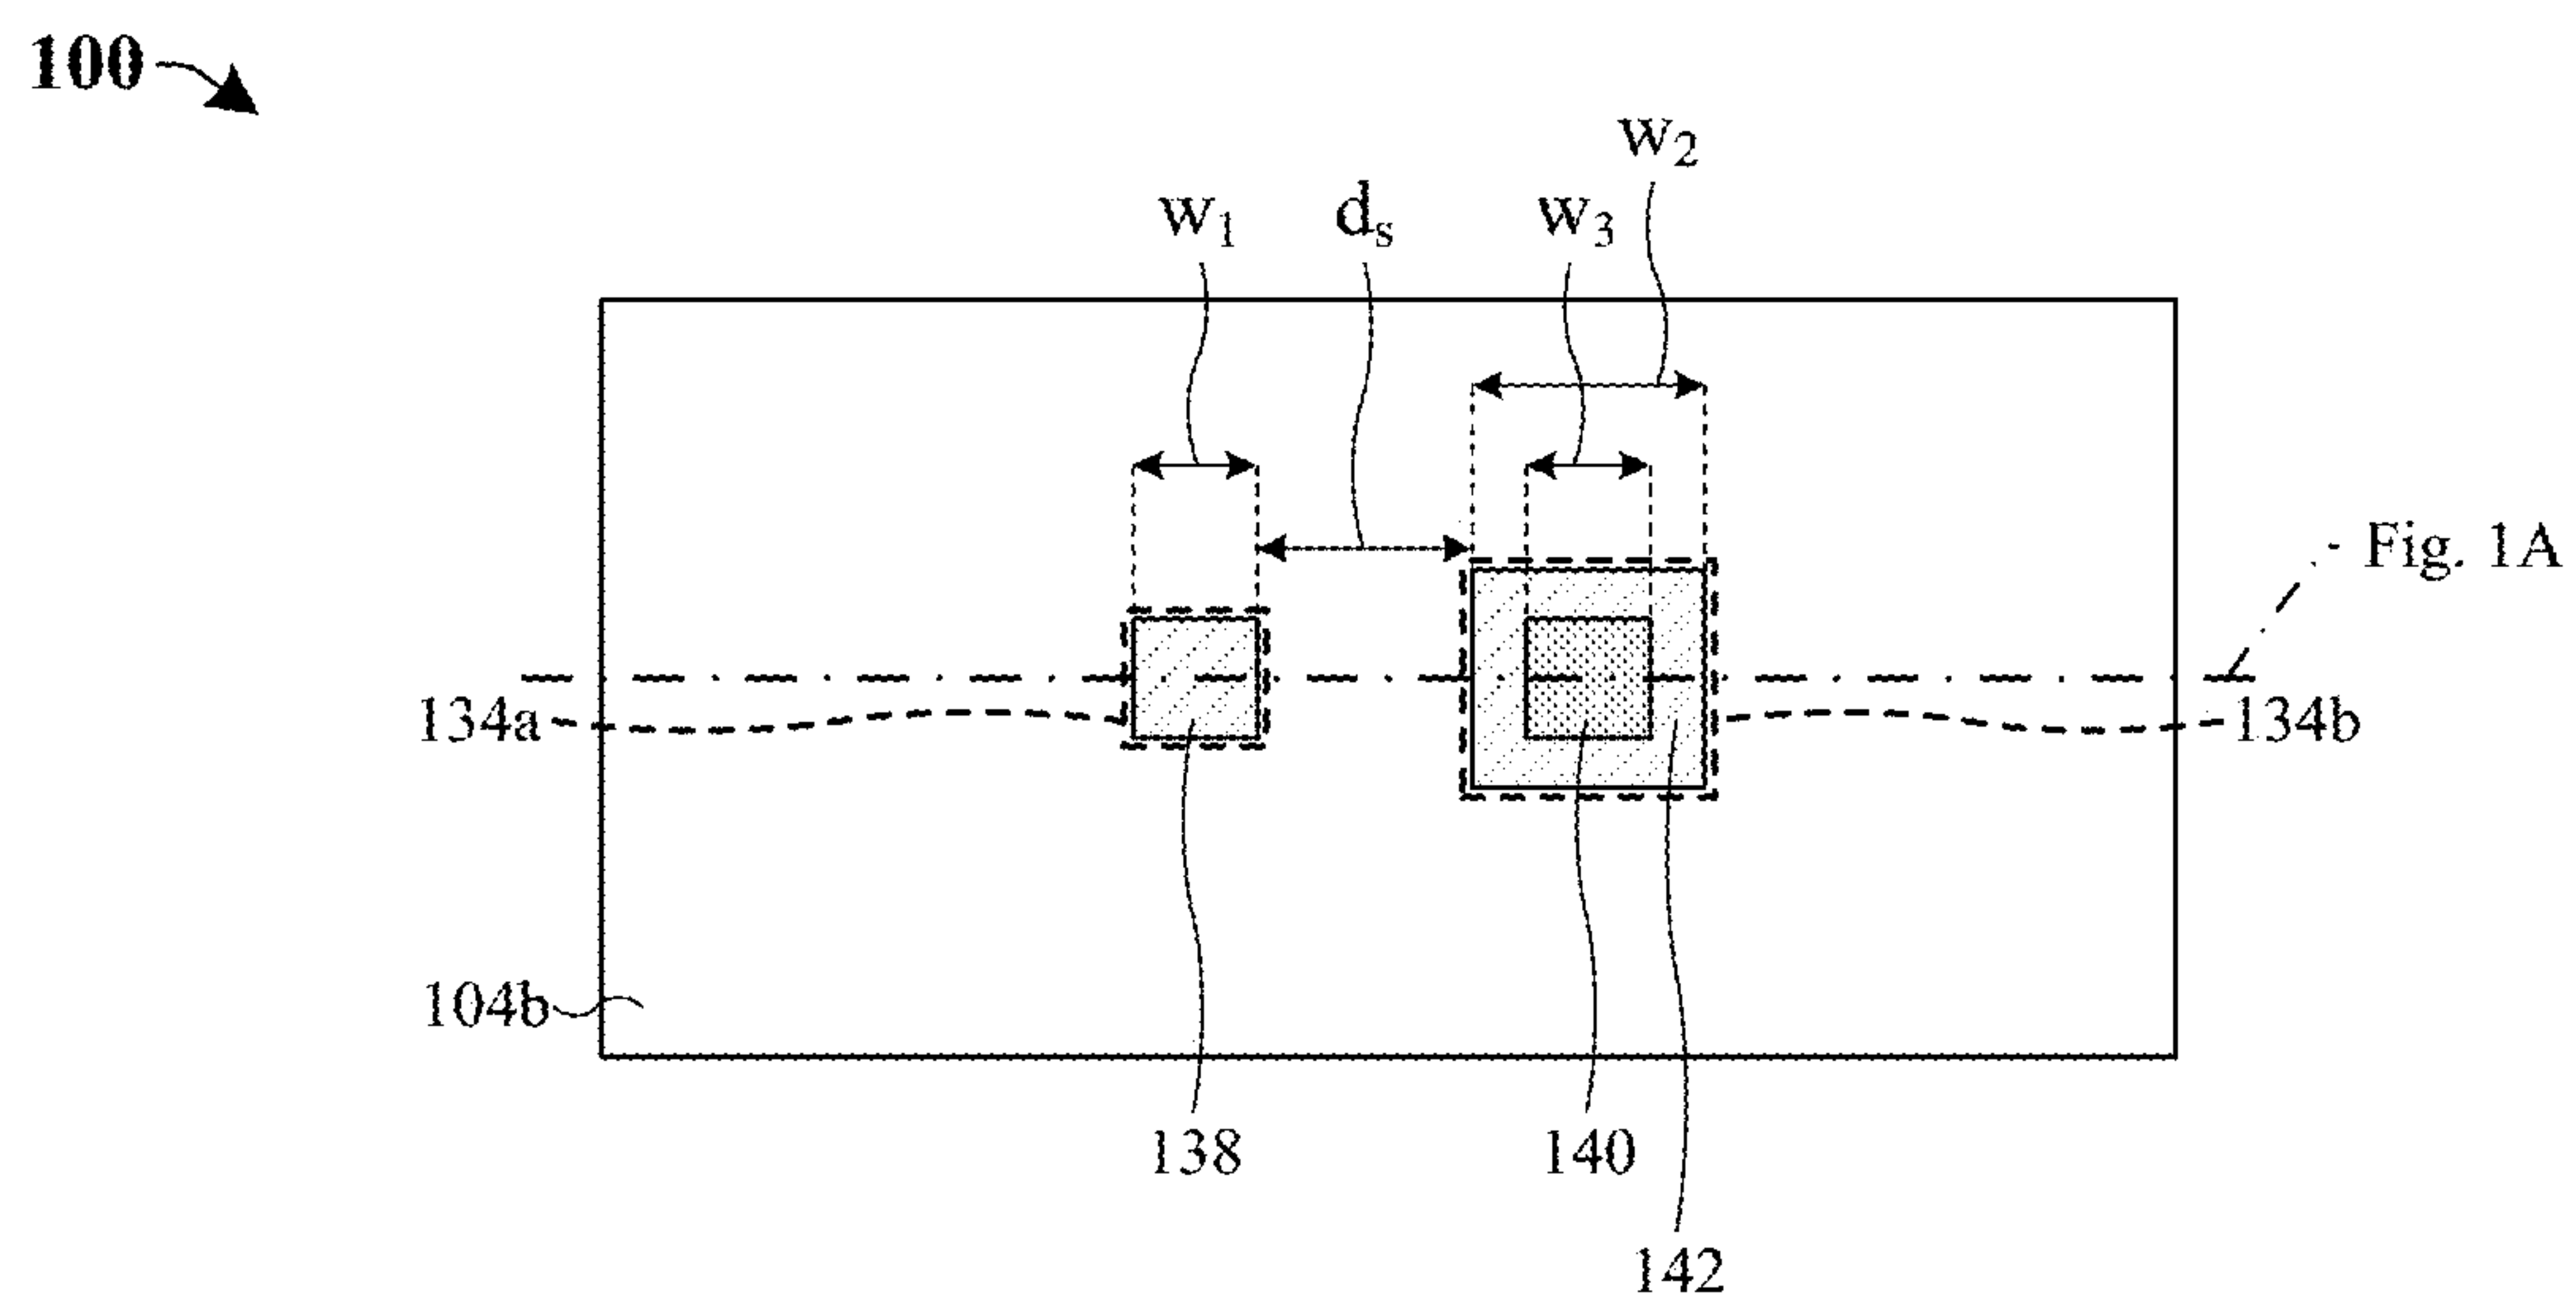


Fig. 1B

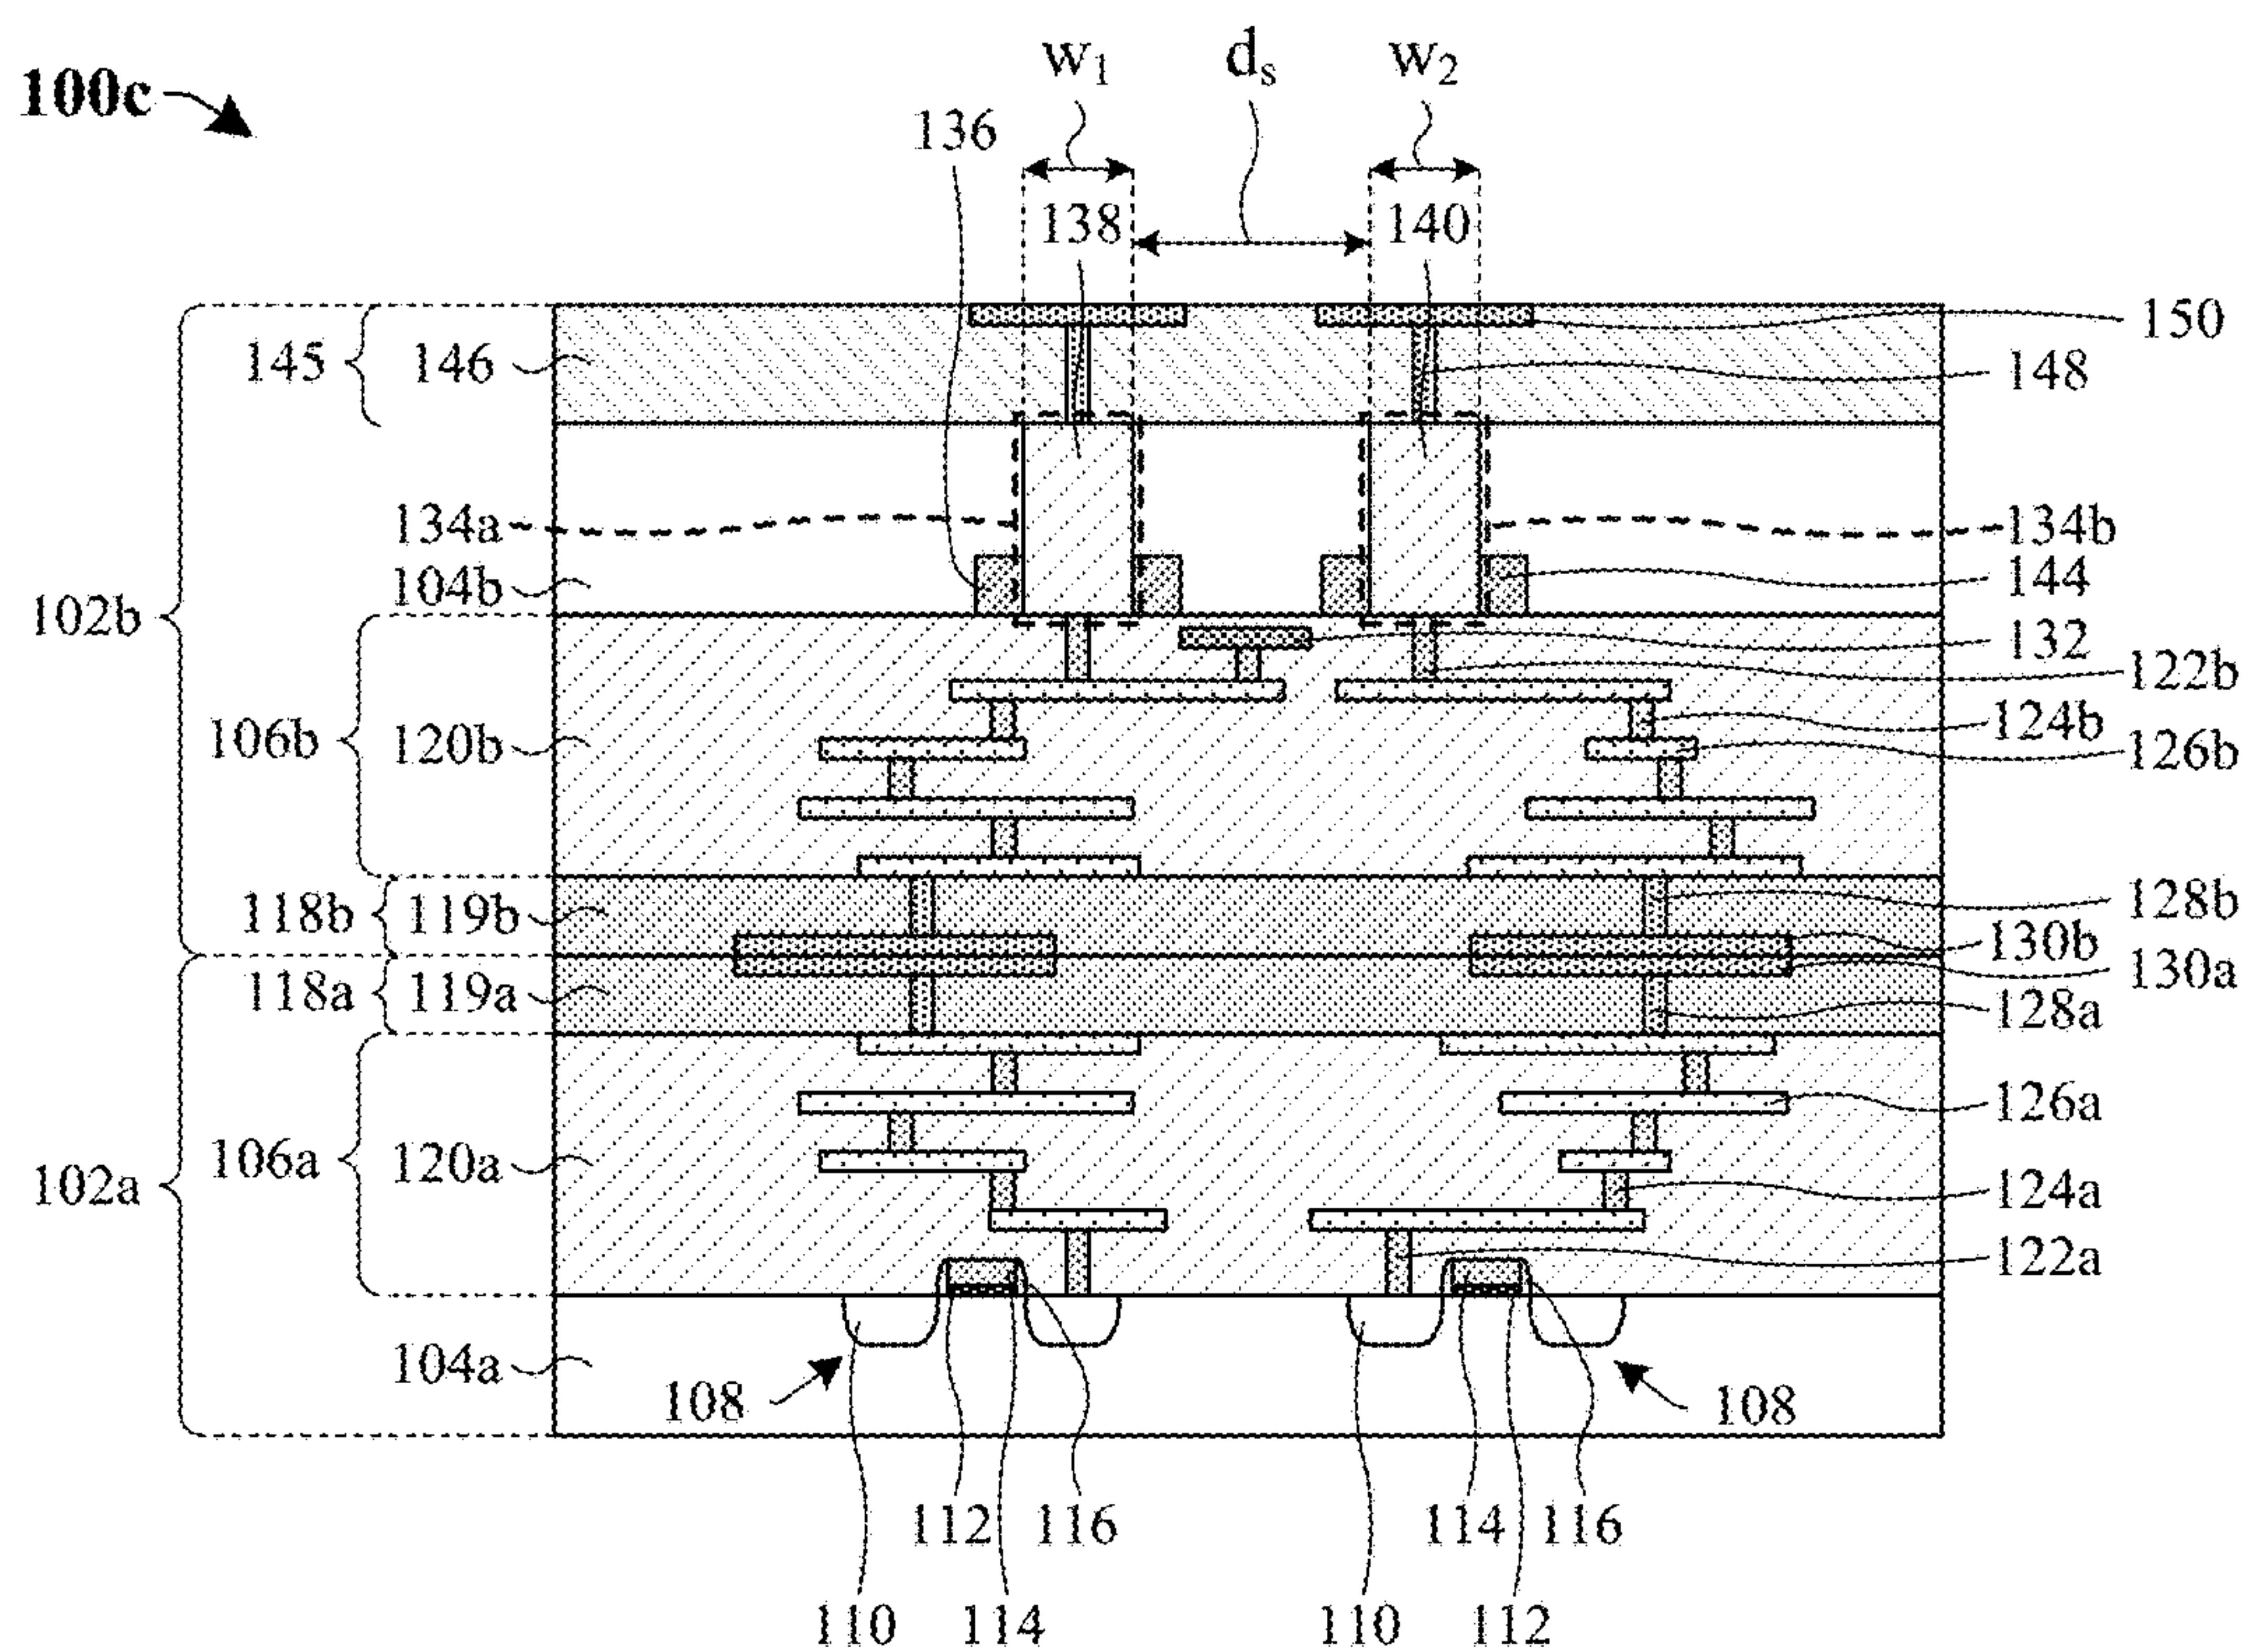


Fig. 1C

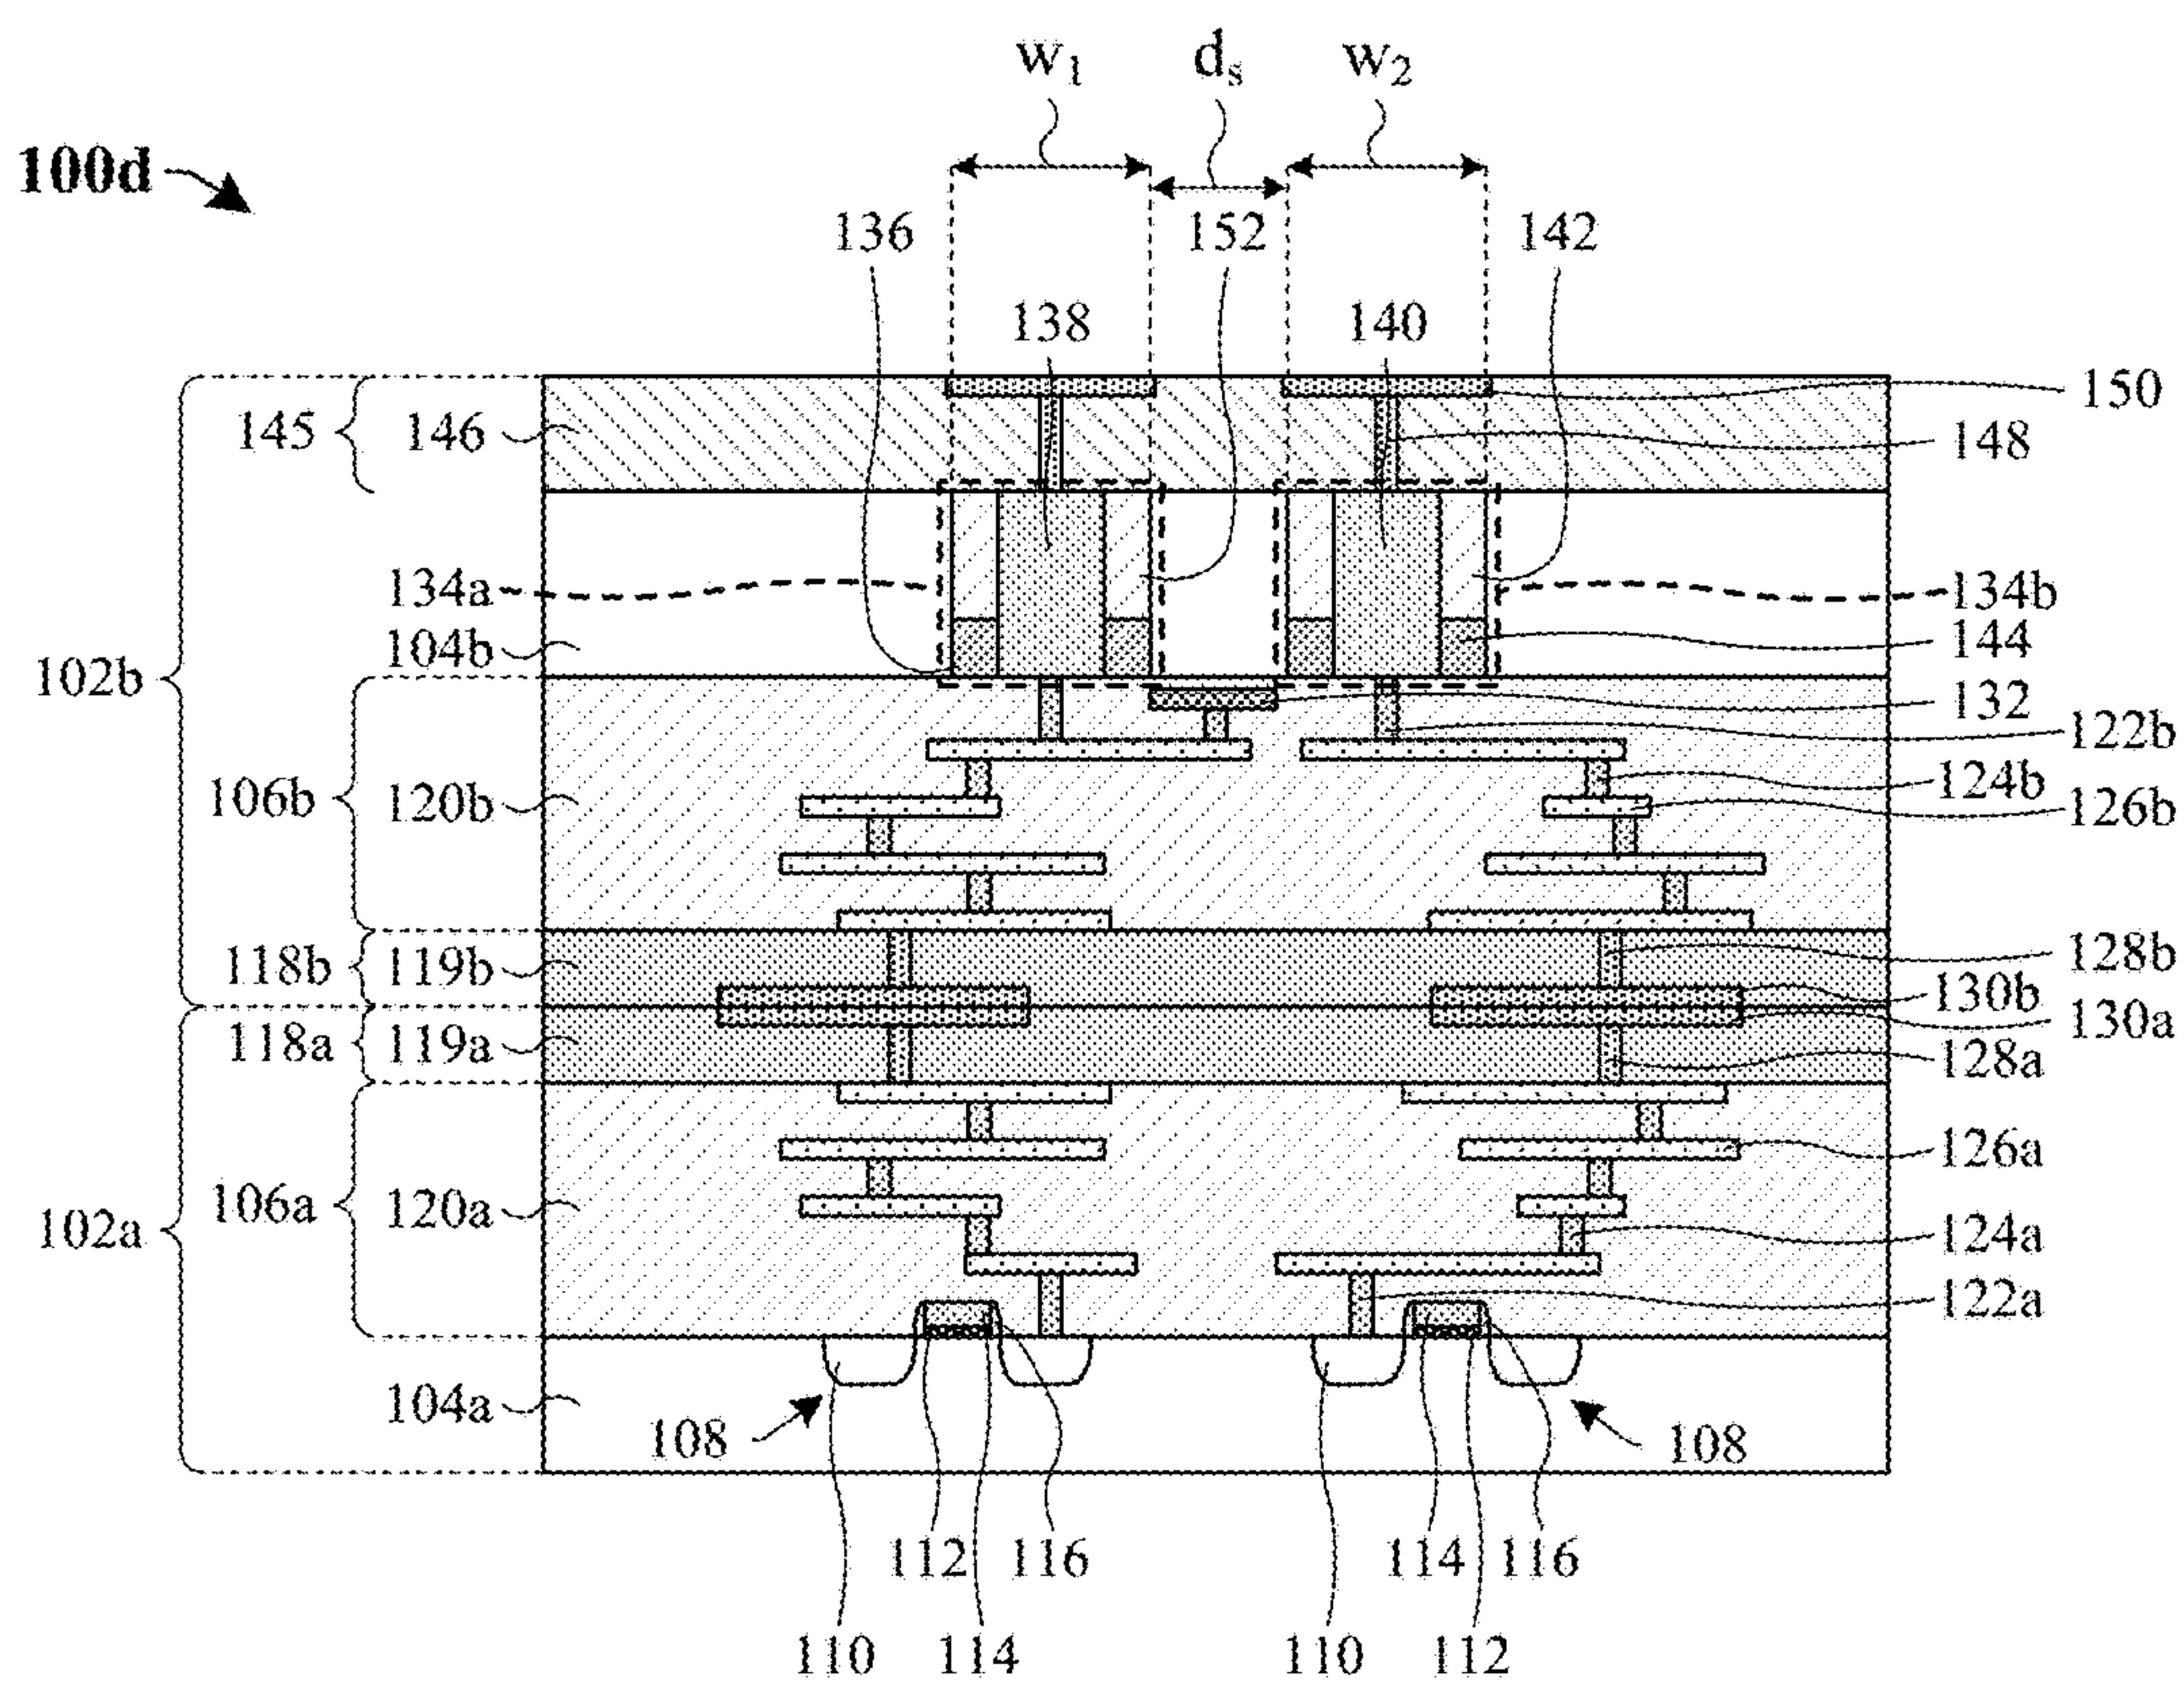


Fig. 1D

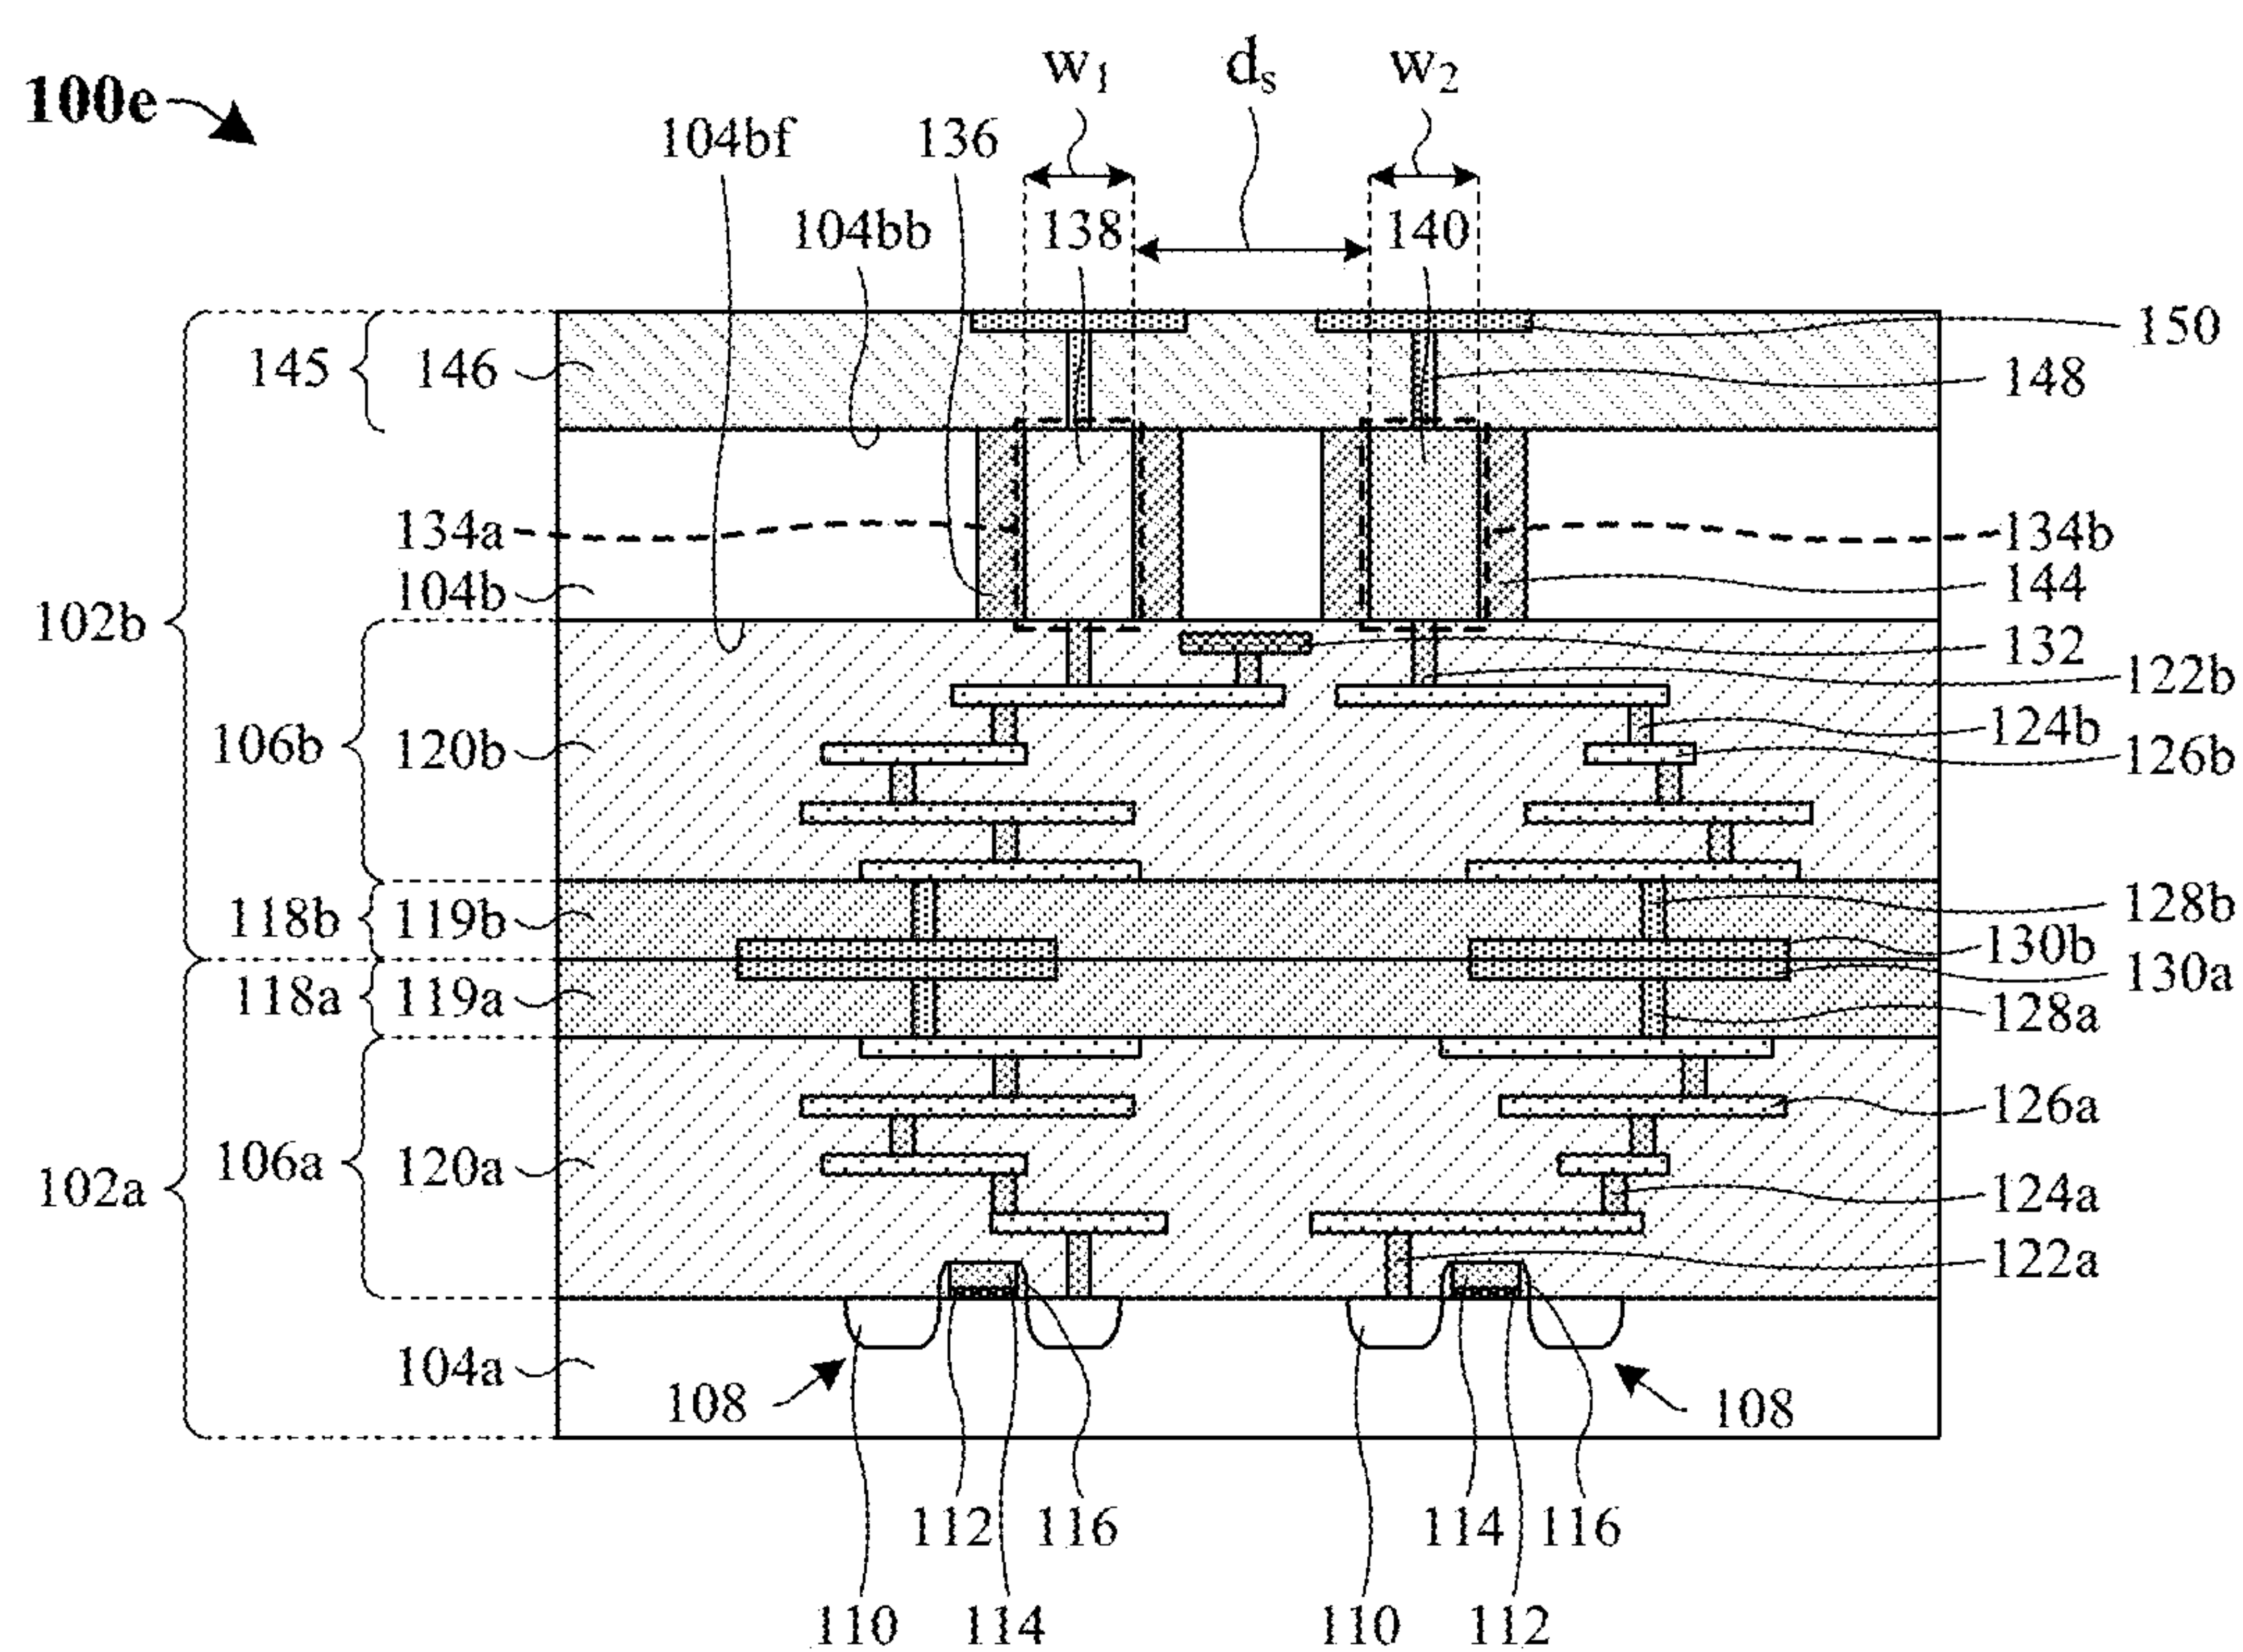


Fig. 1E

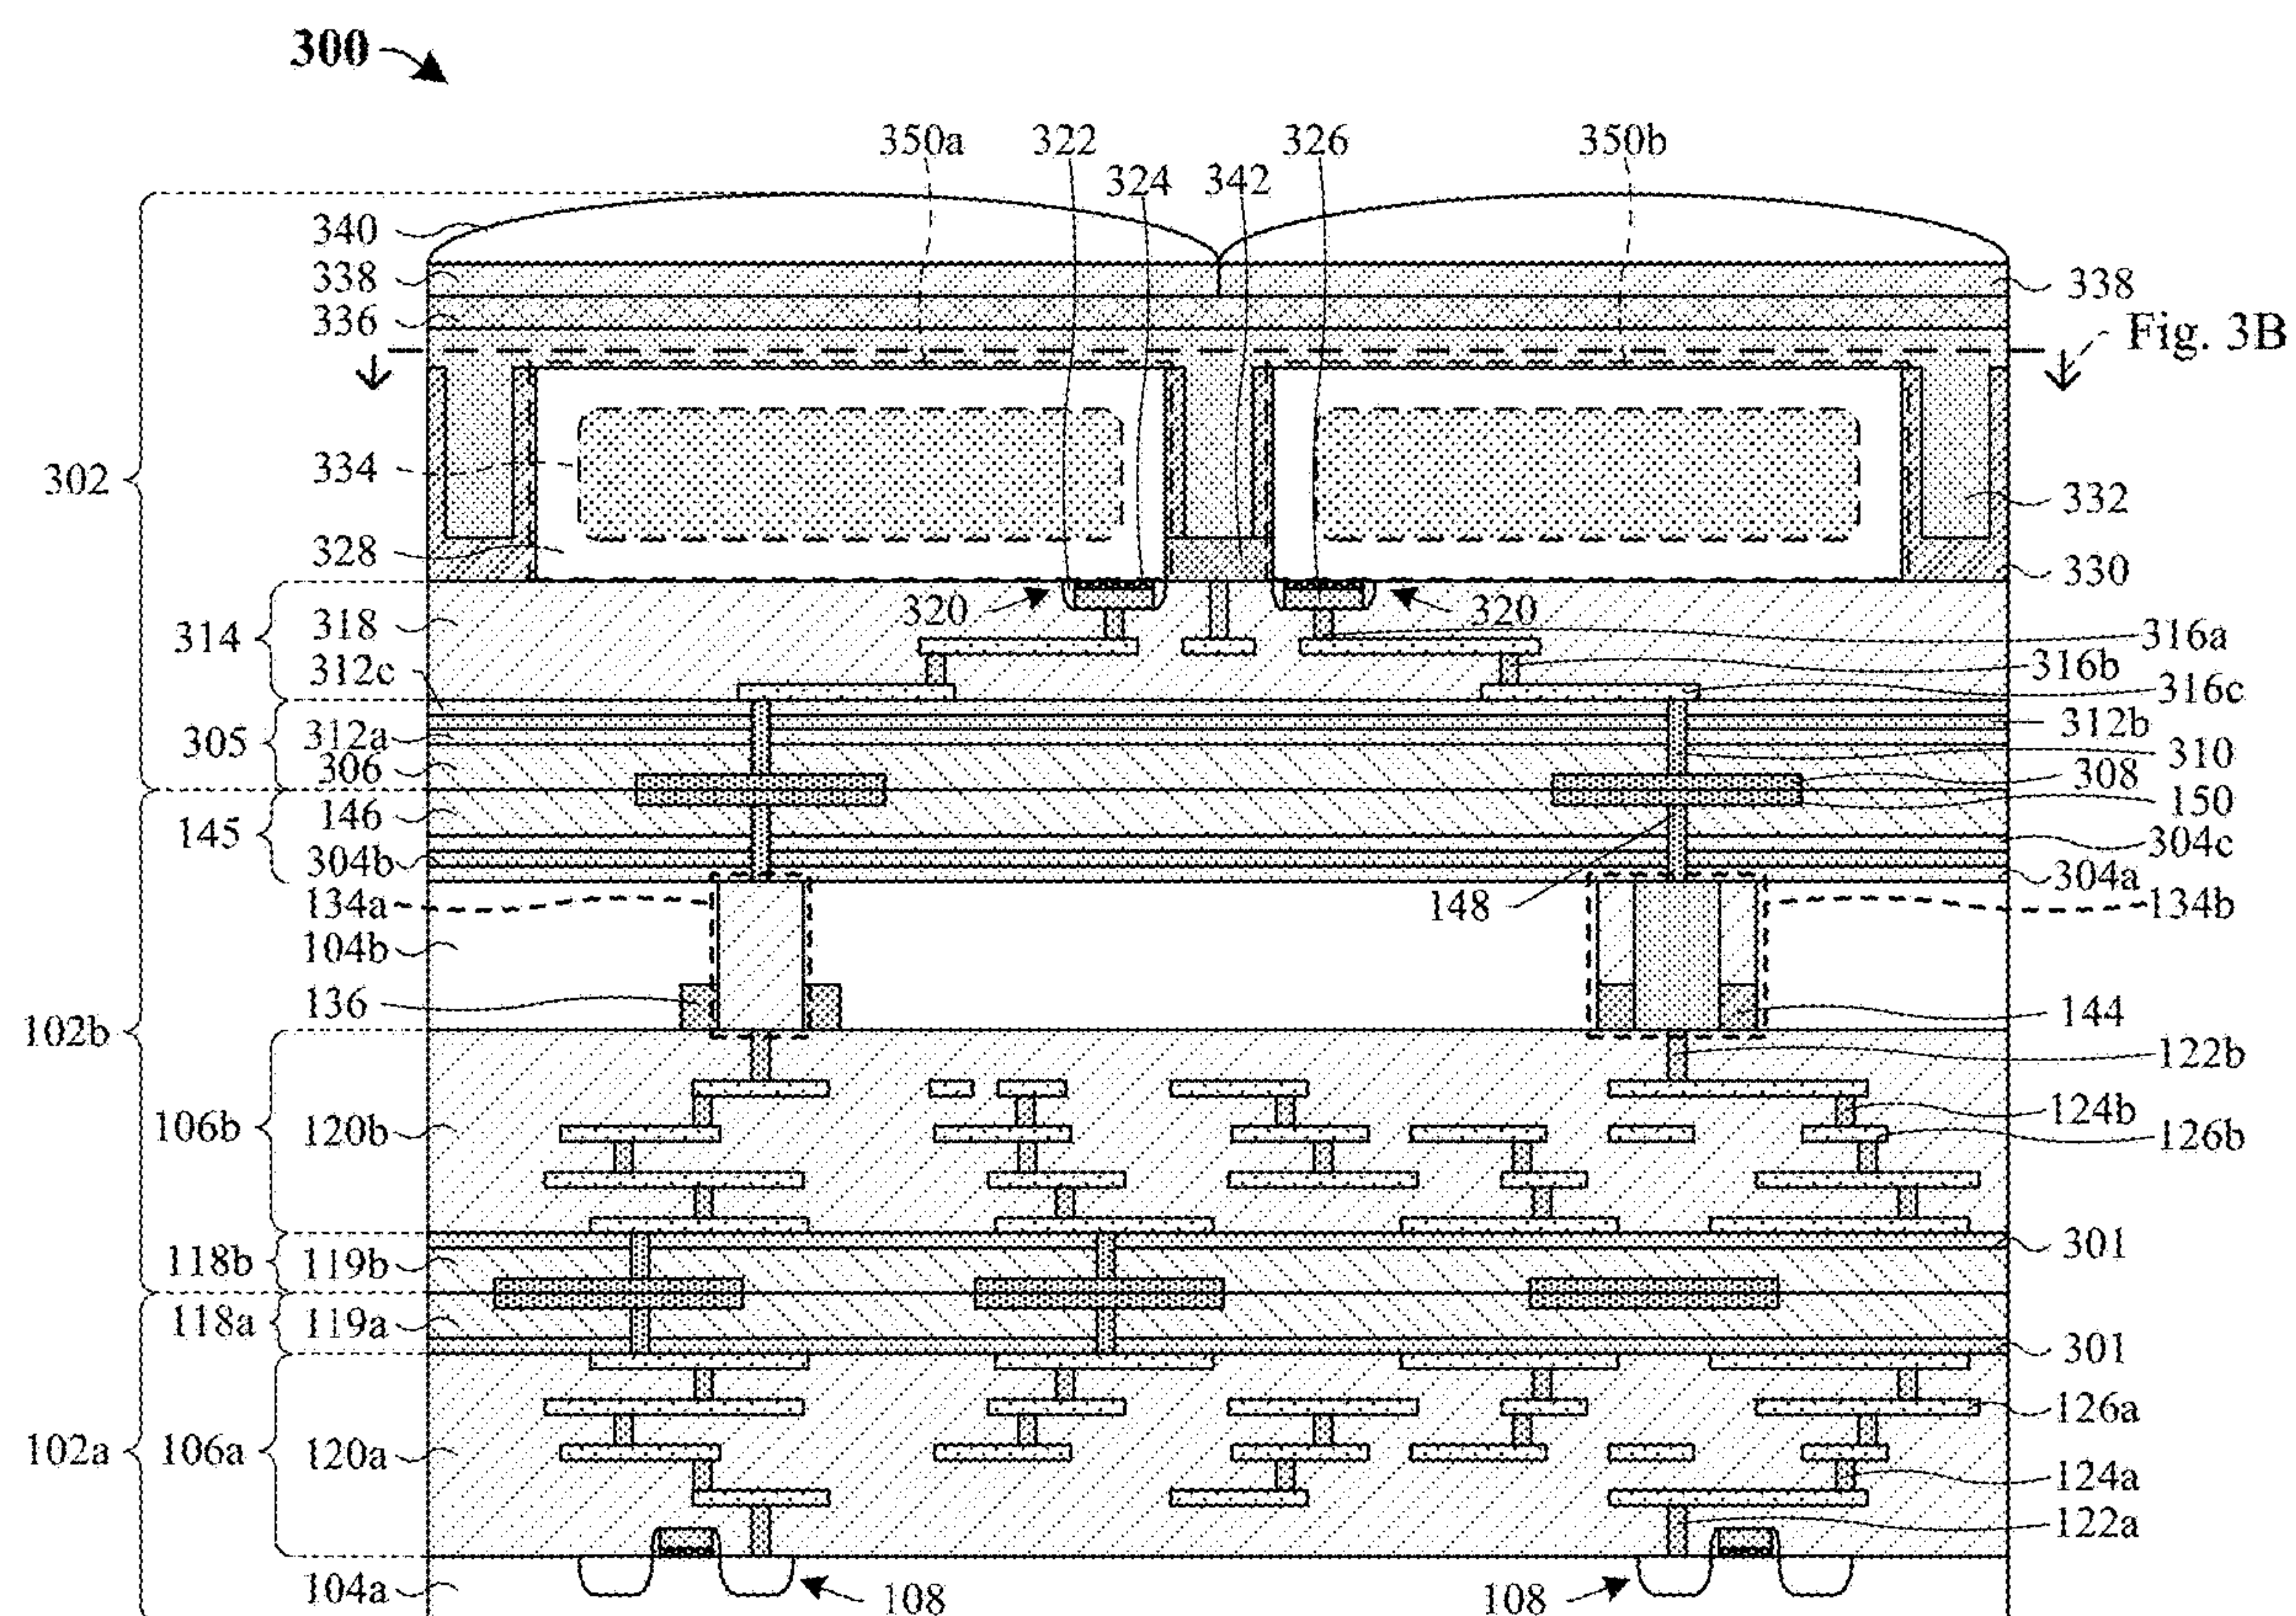


Fig. 3A

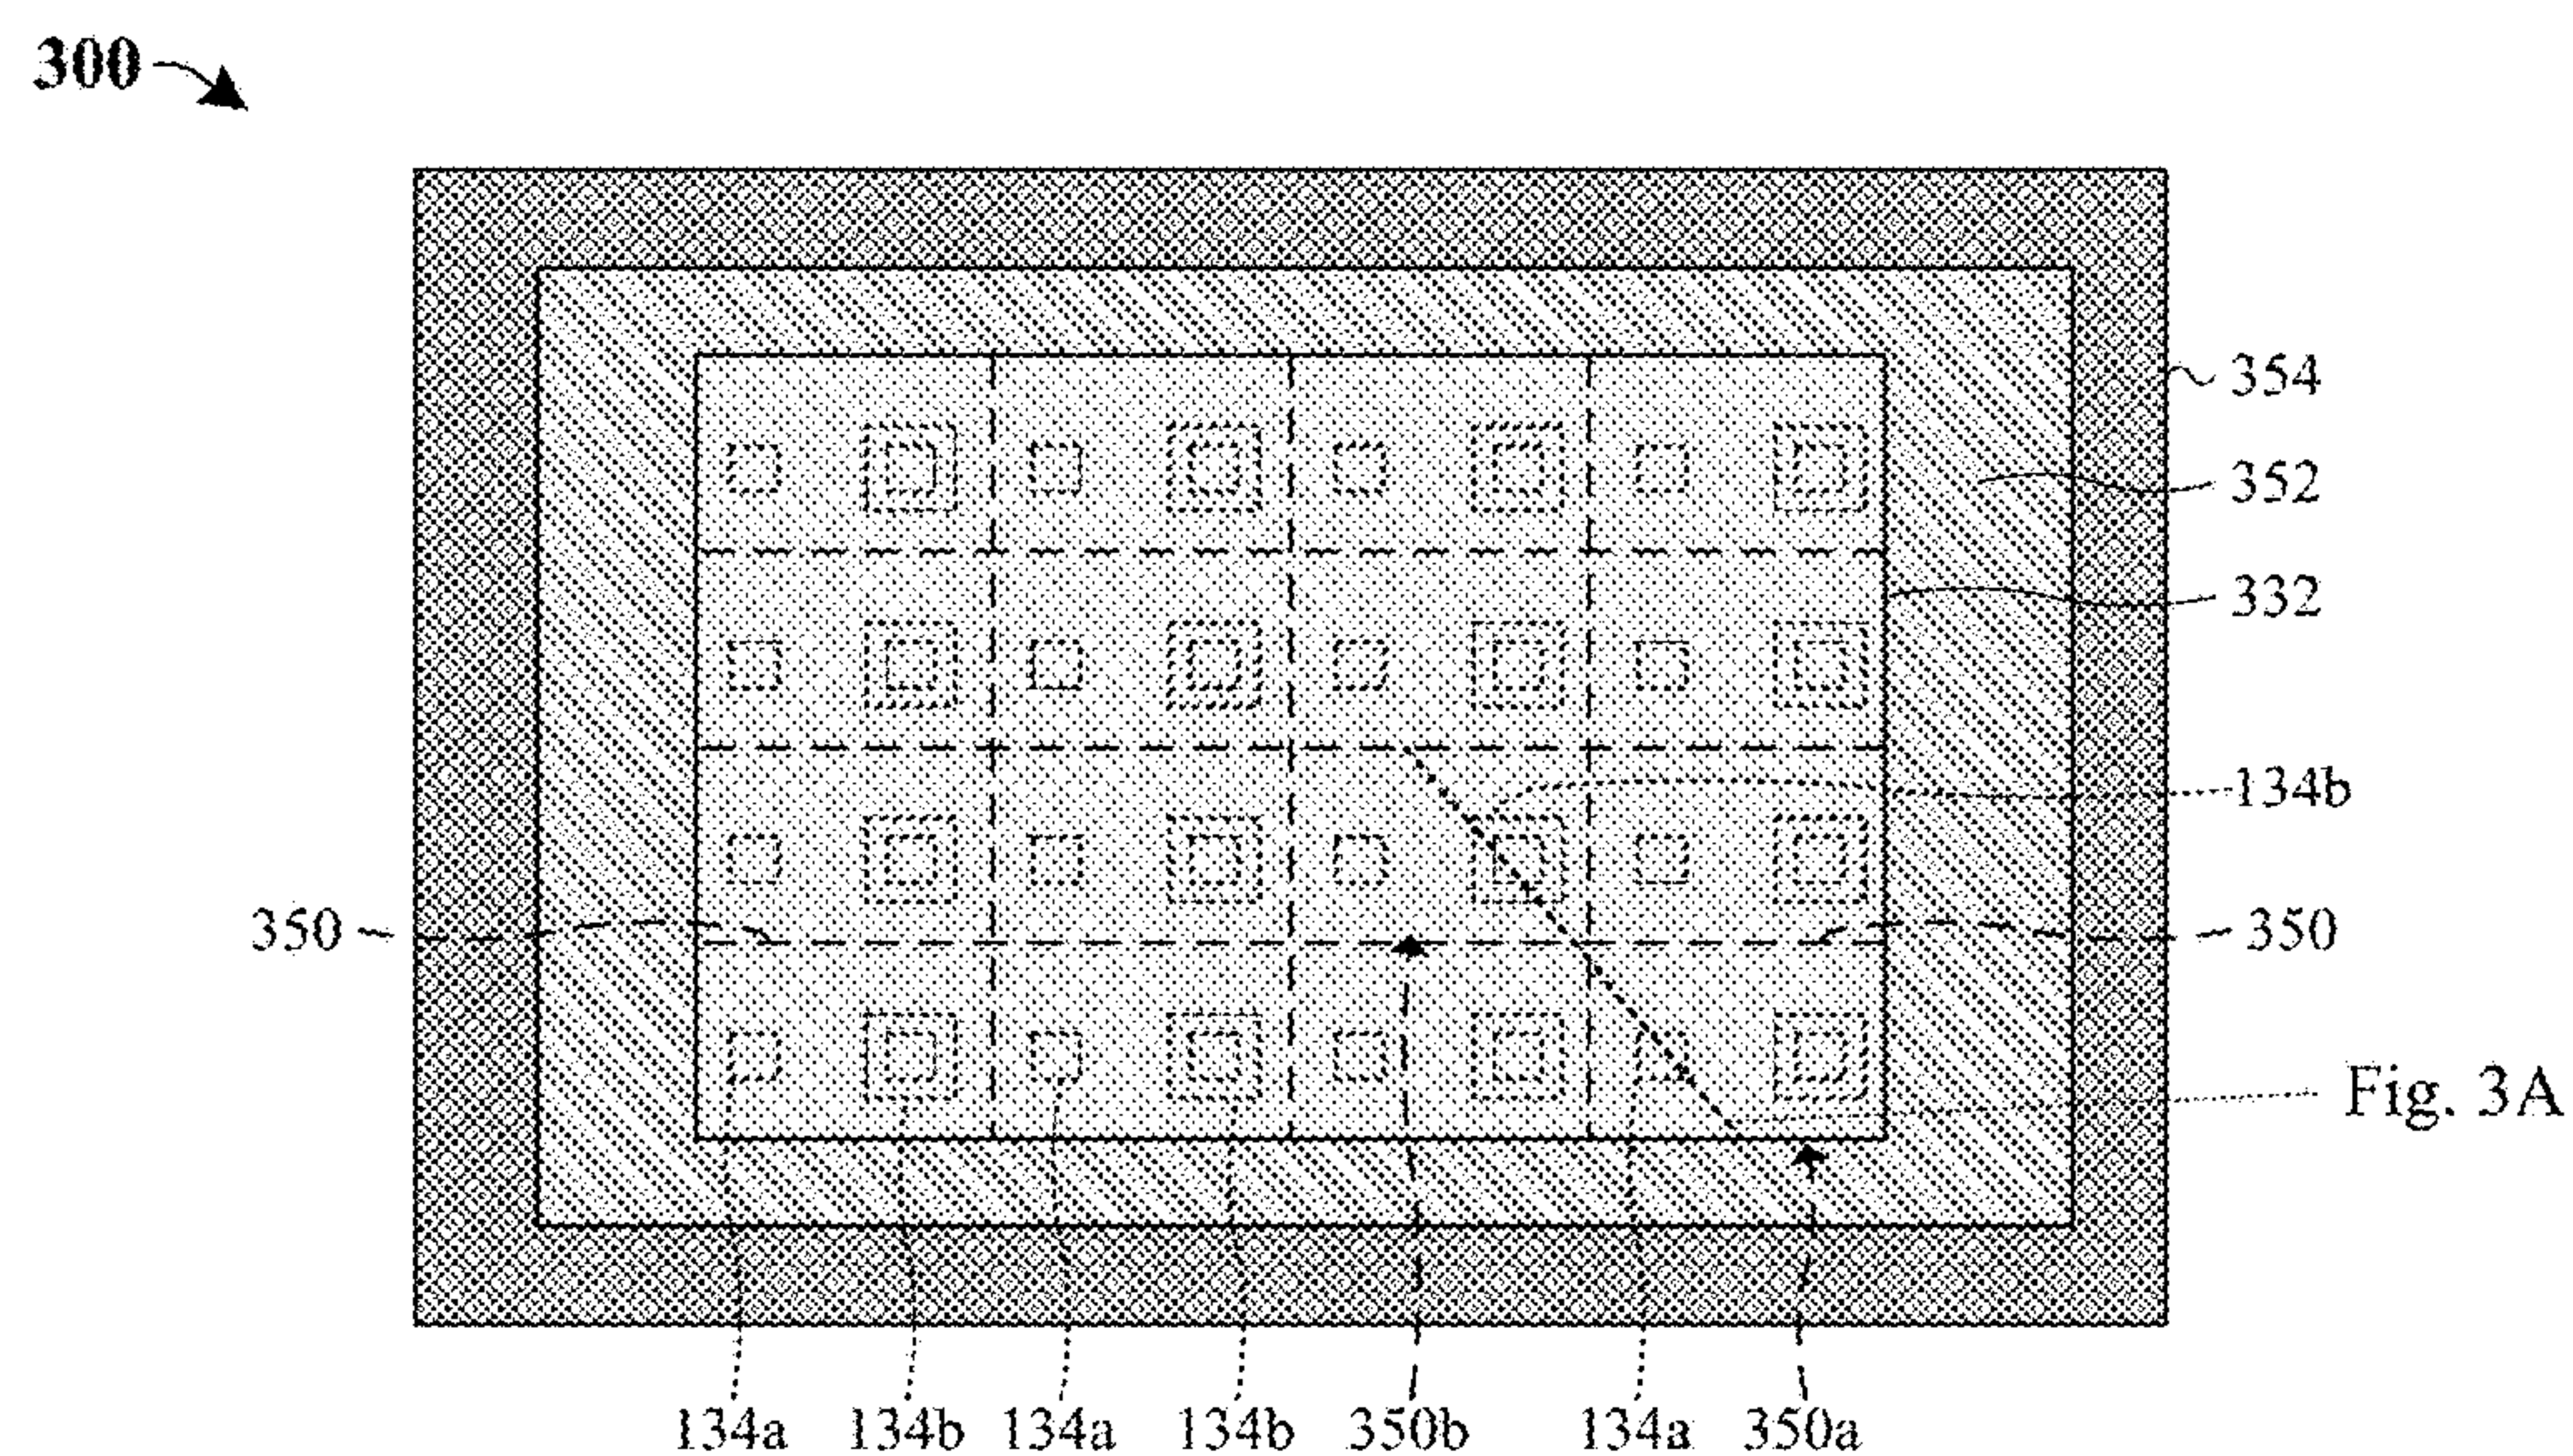


Fig. 3B

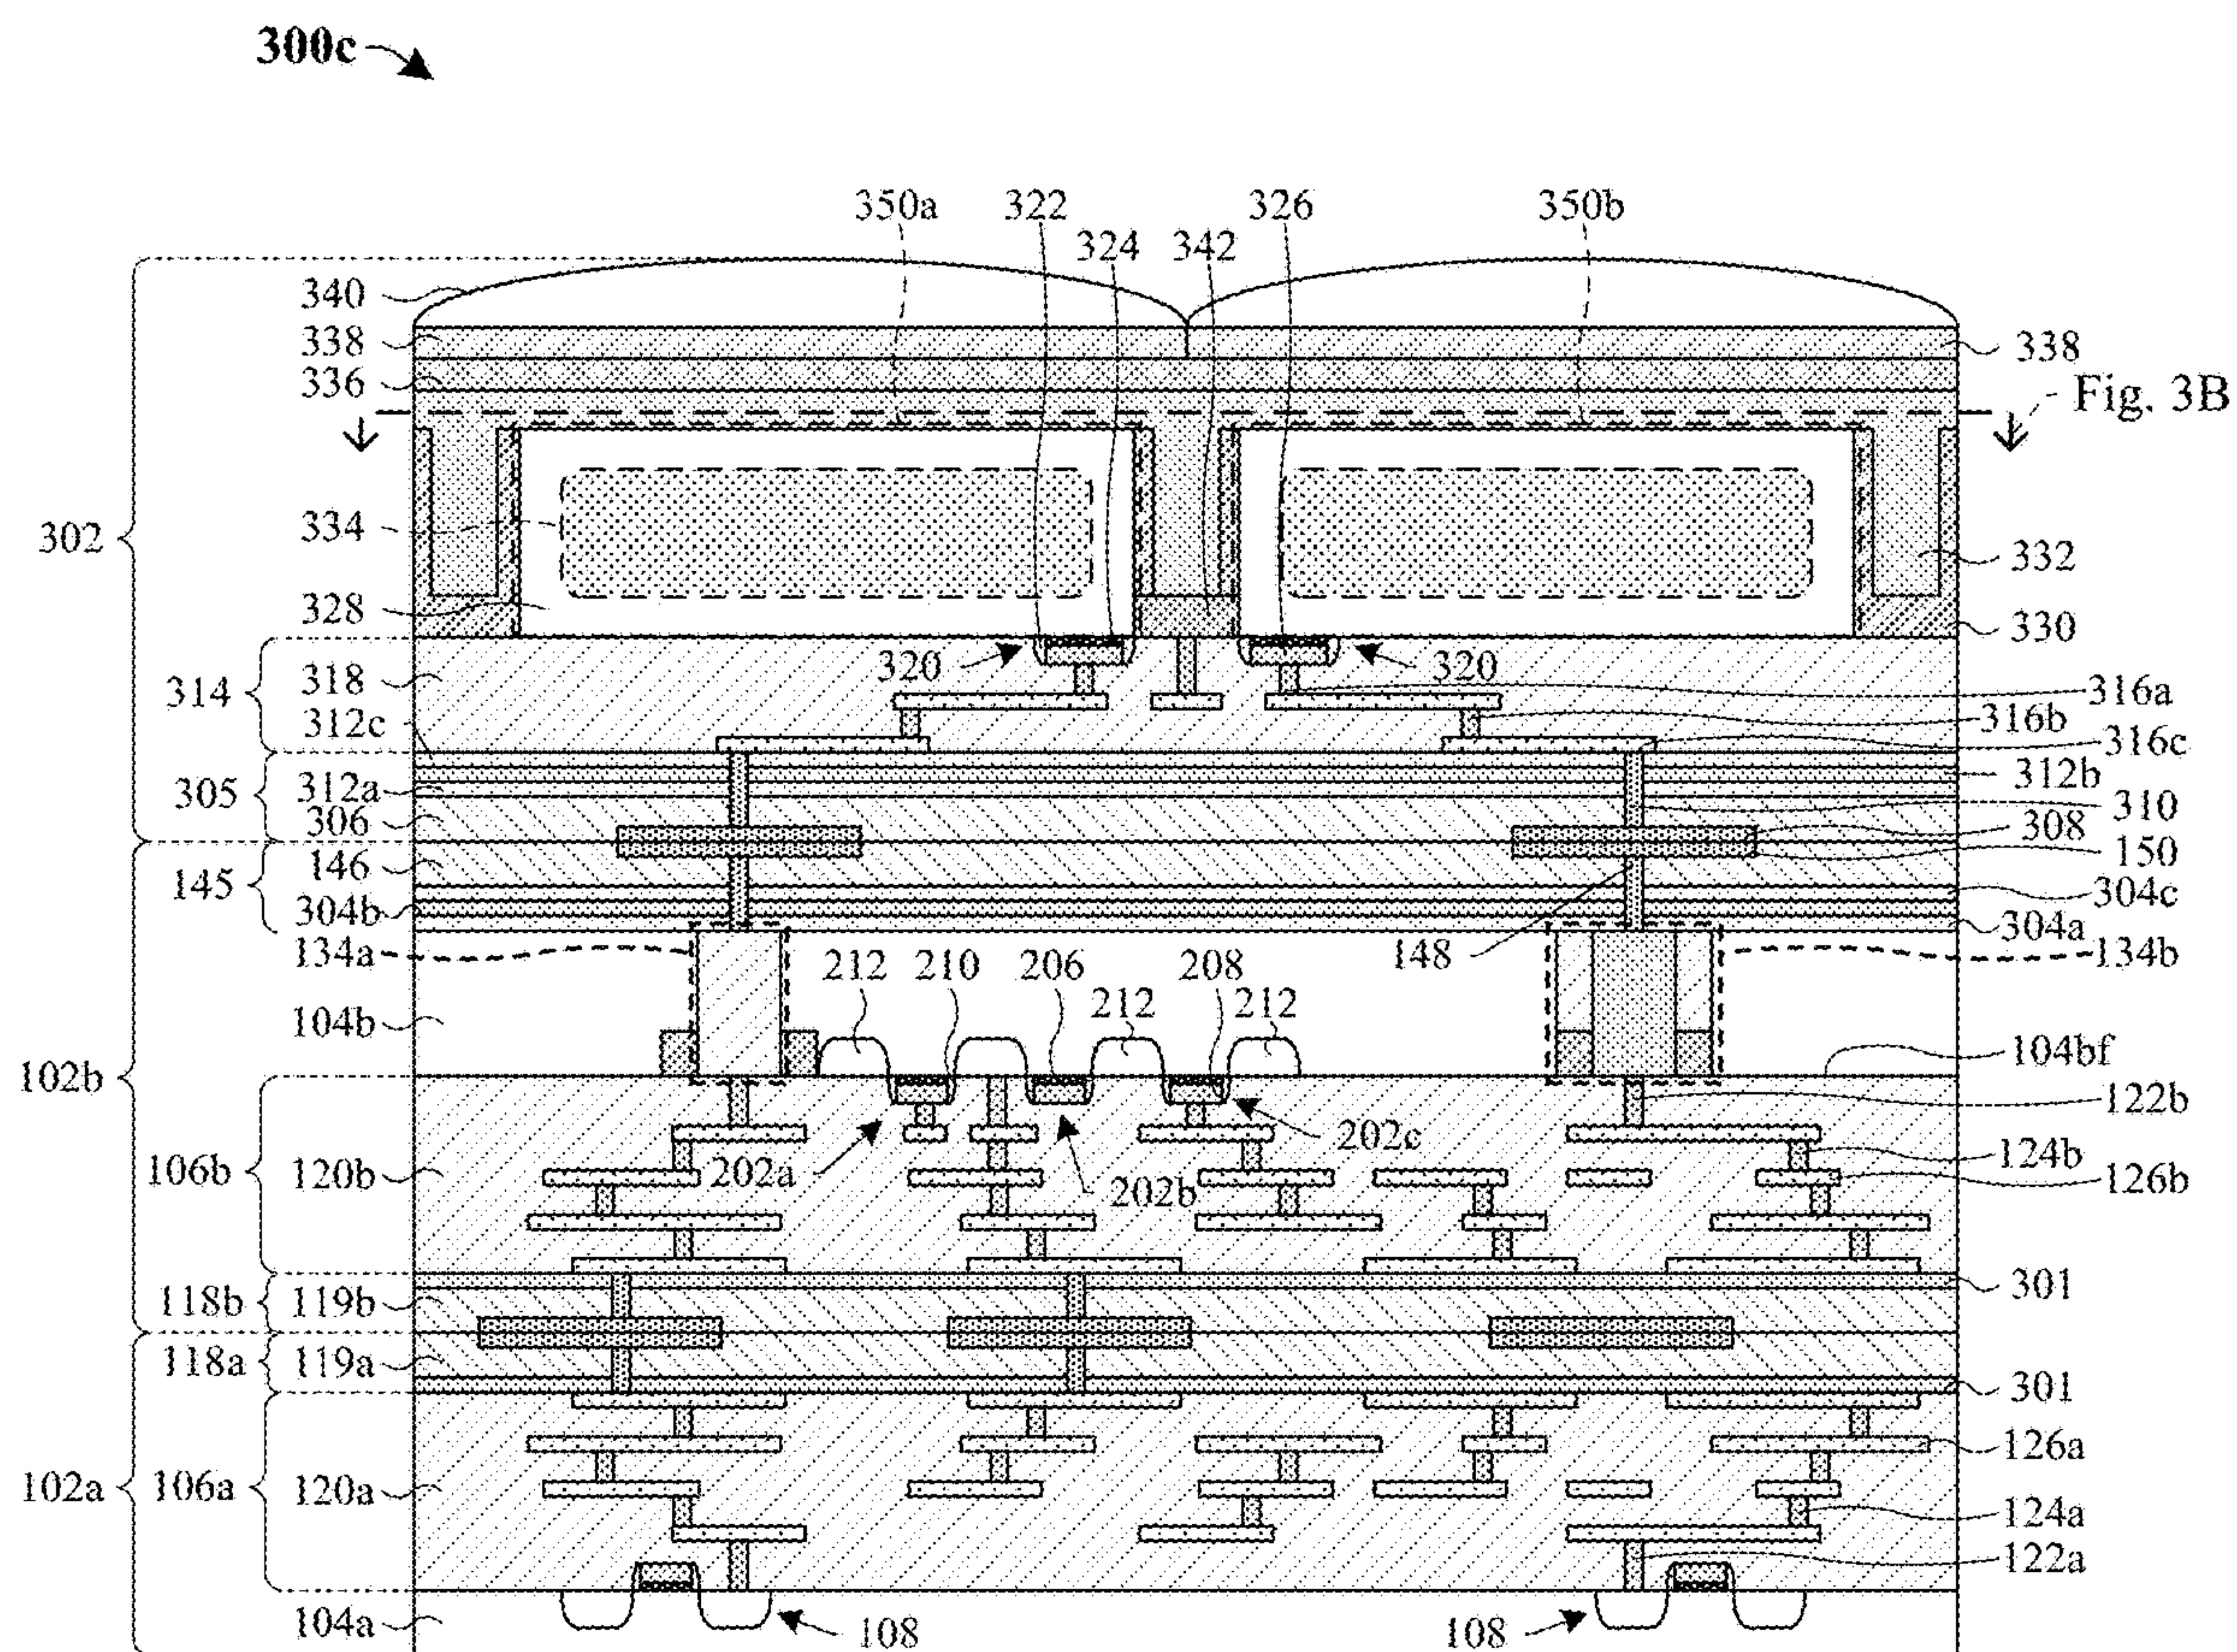


Fig. 3C

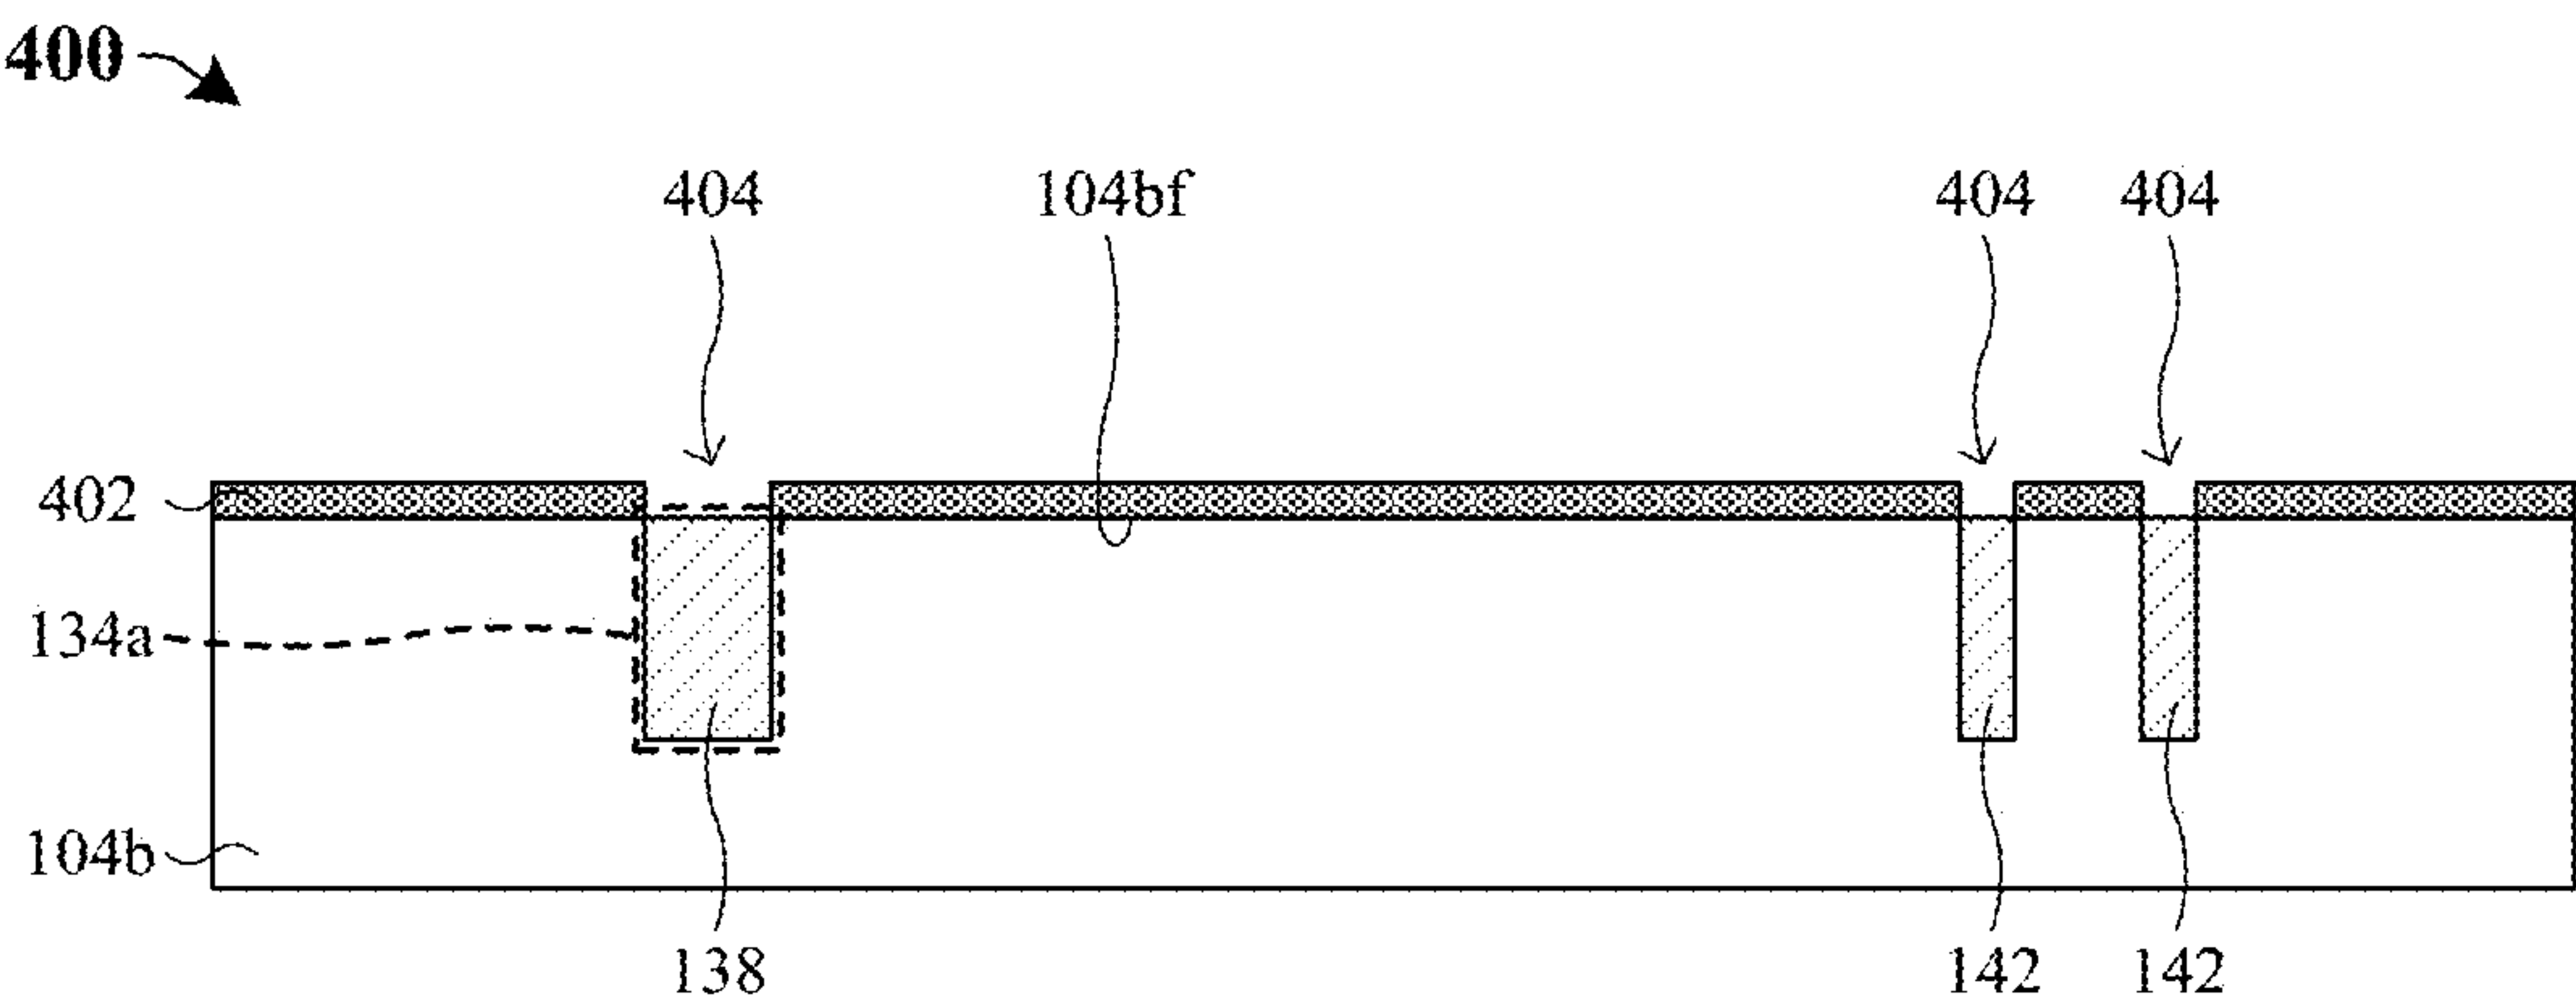


Fig. 4

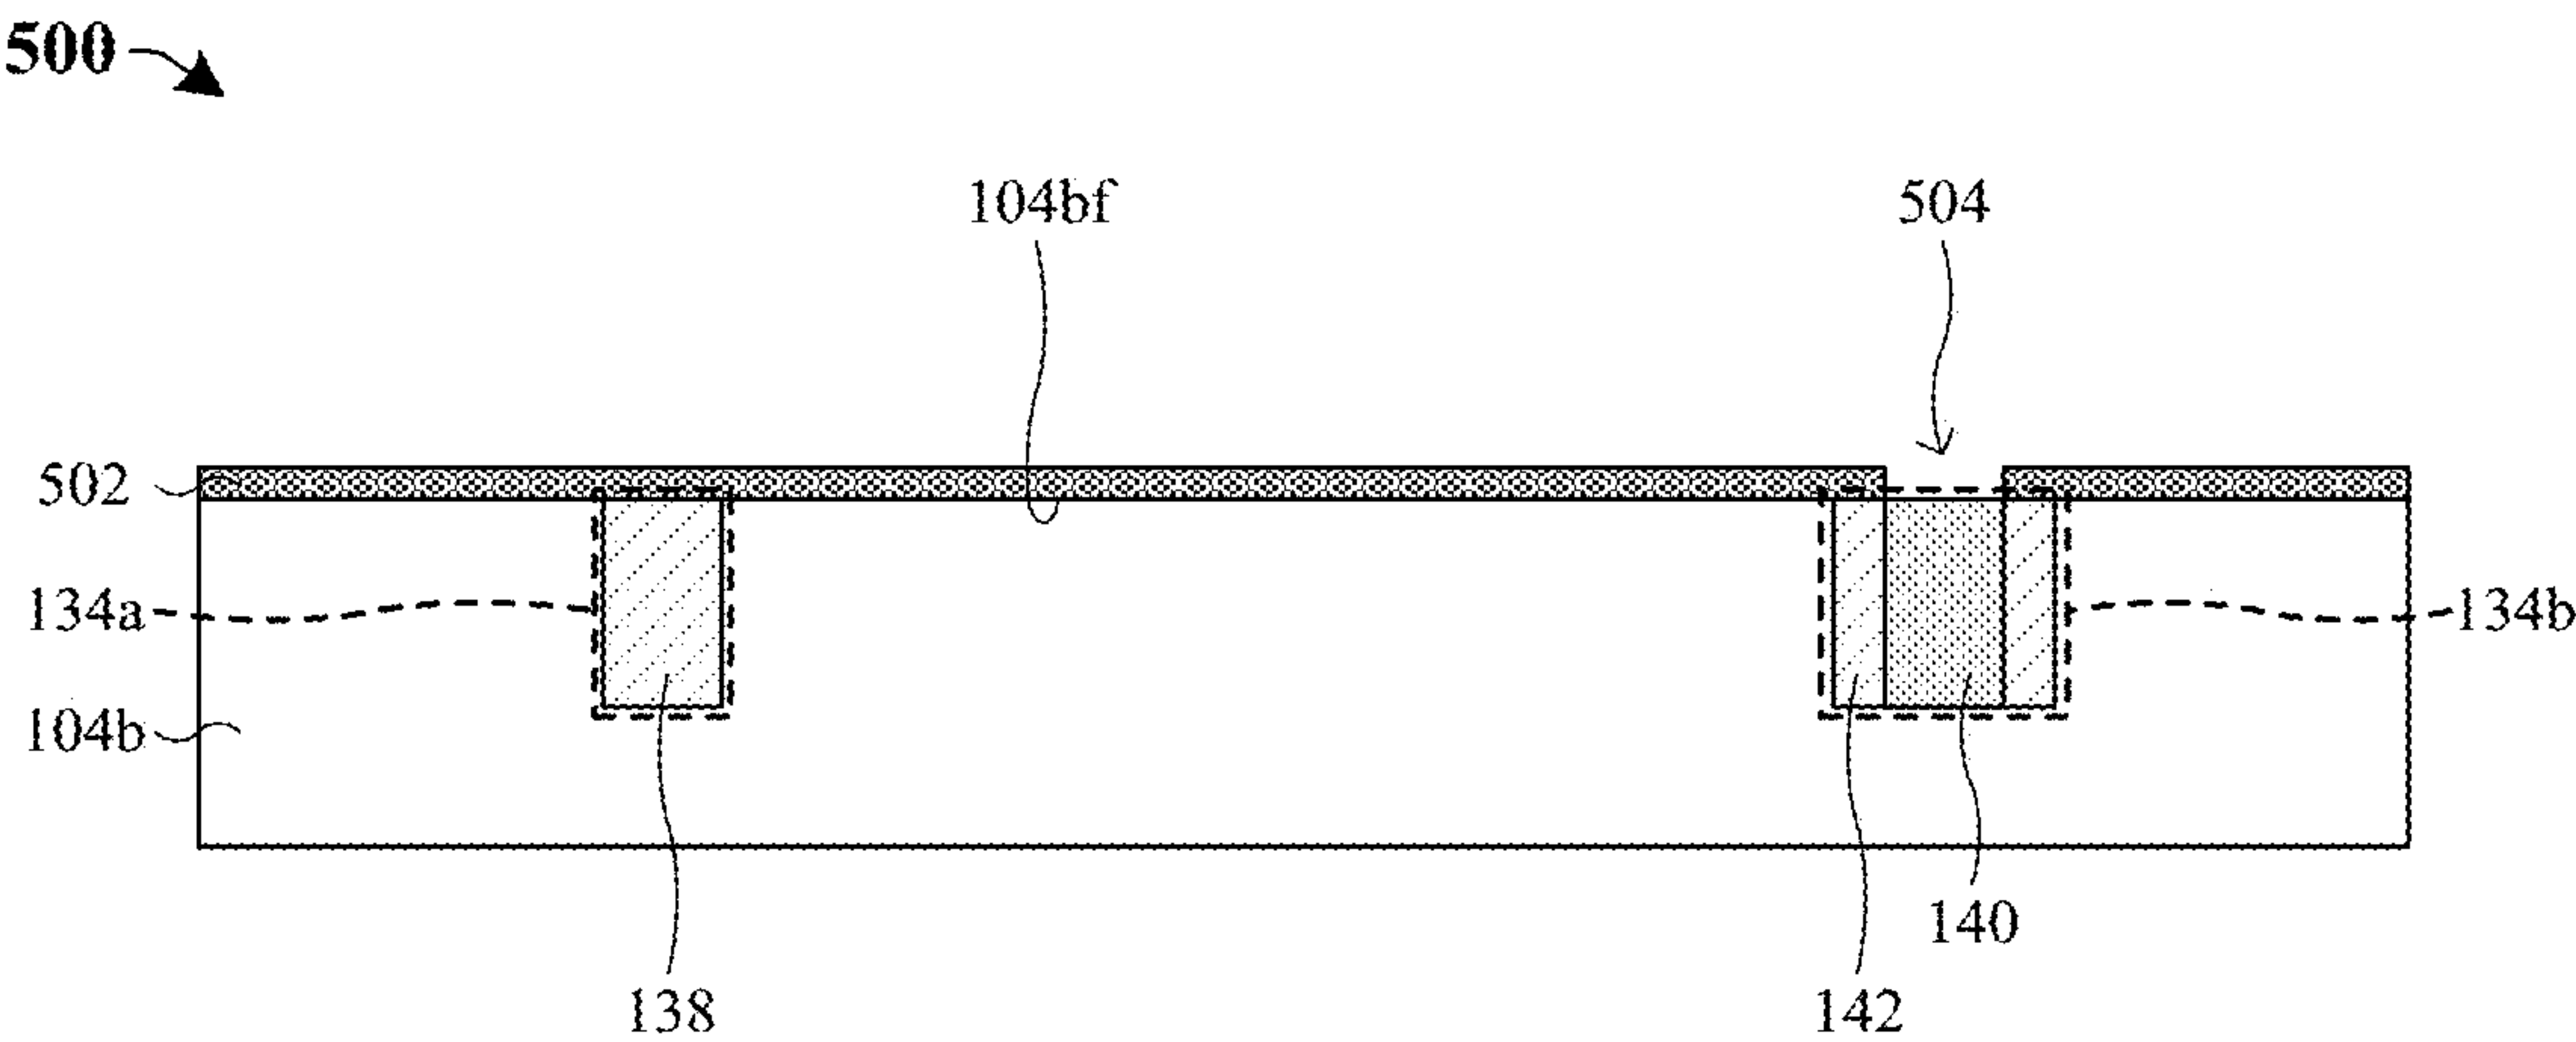


Fig. 5

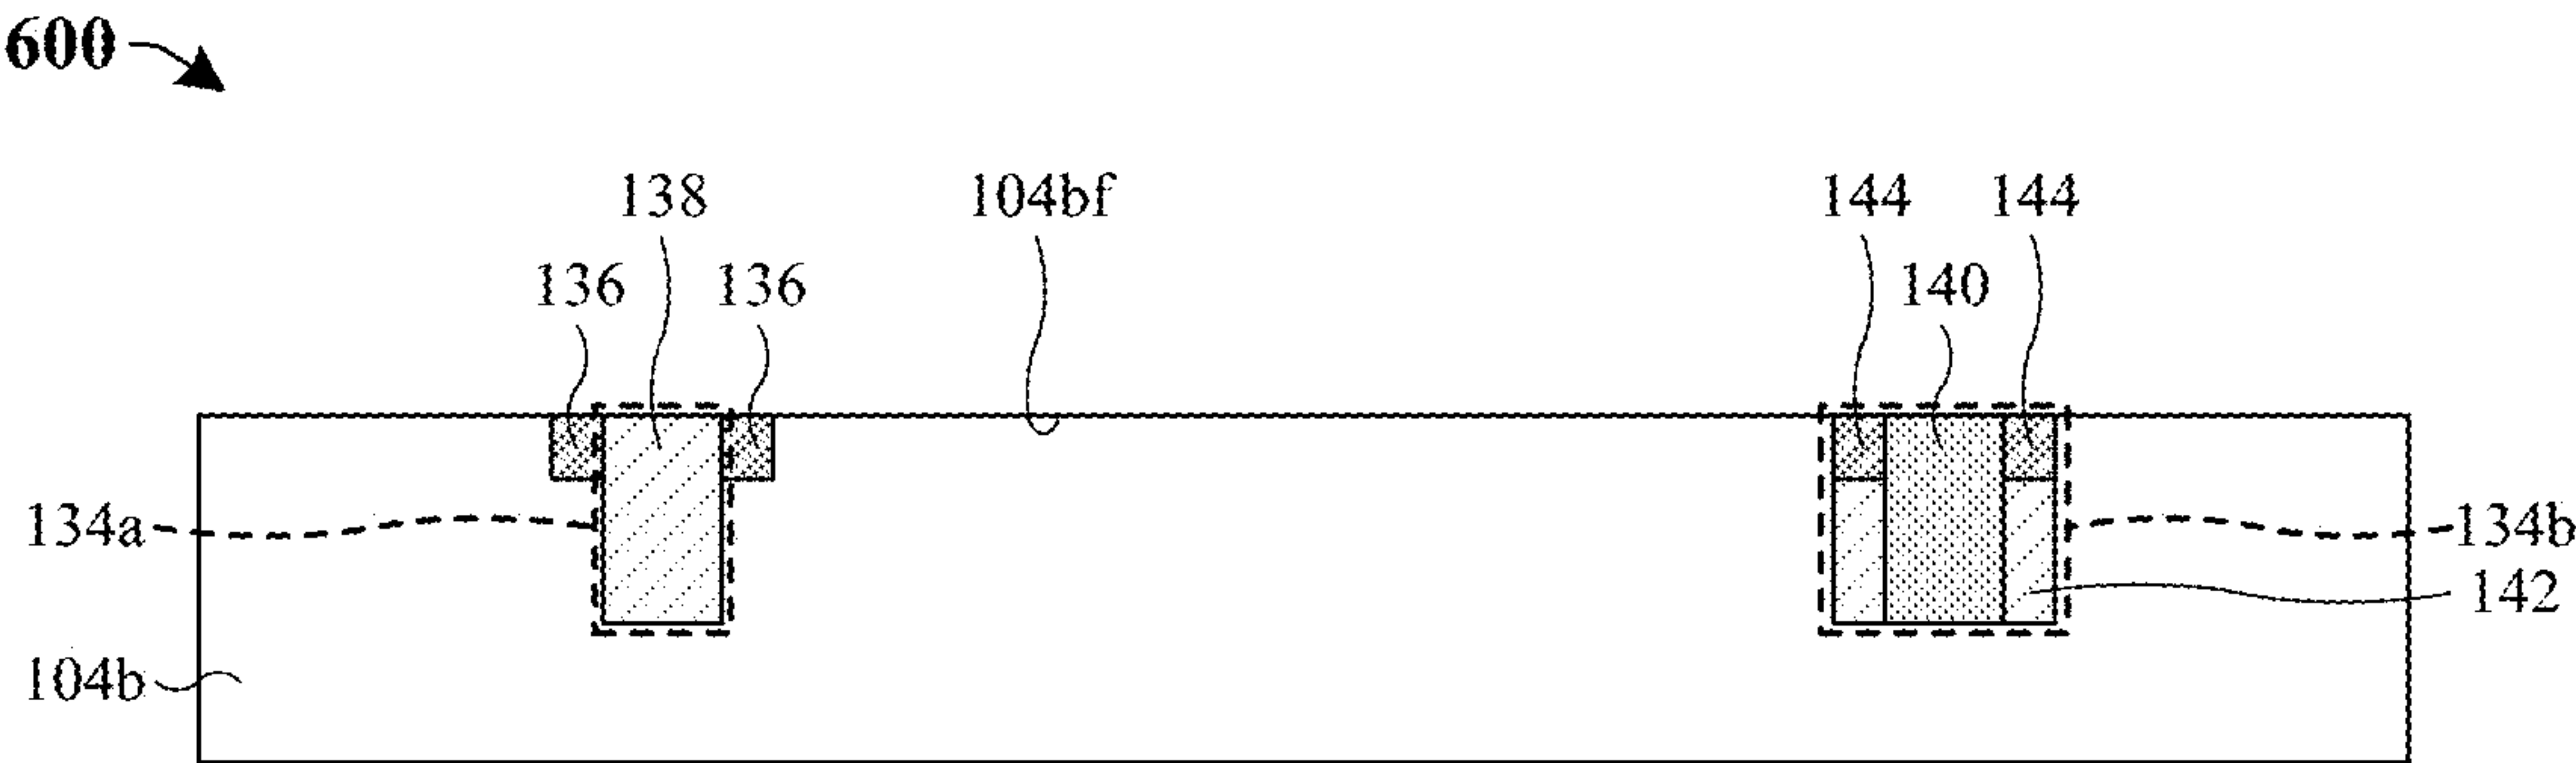


Fig. 6

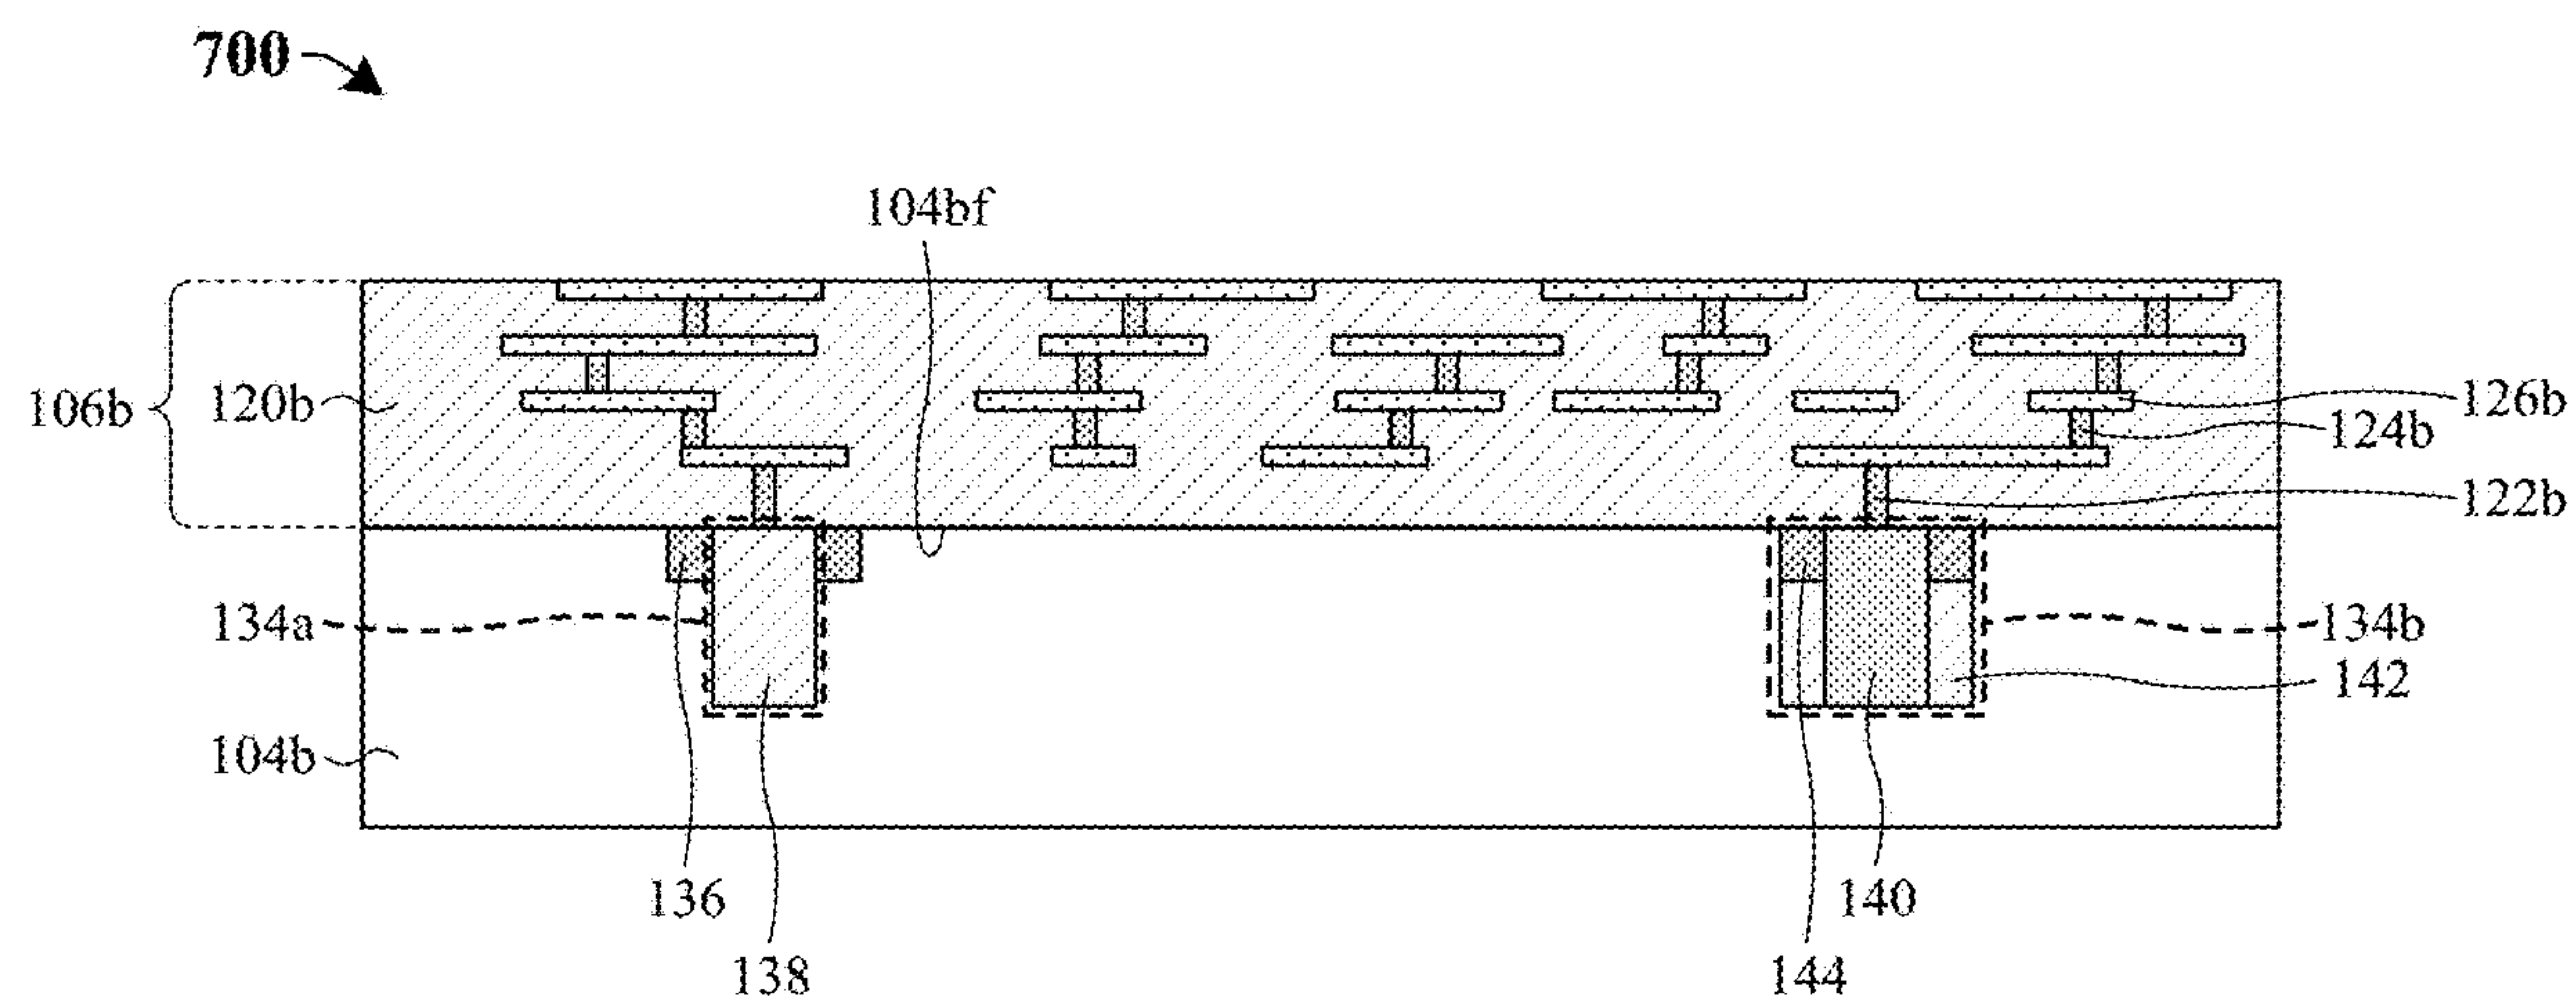


Fig. 7

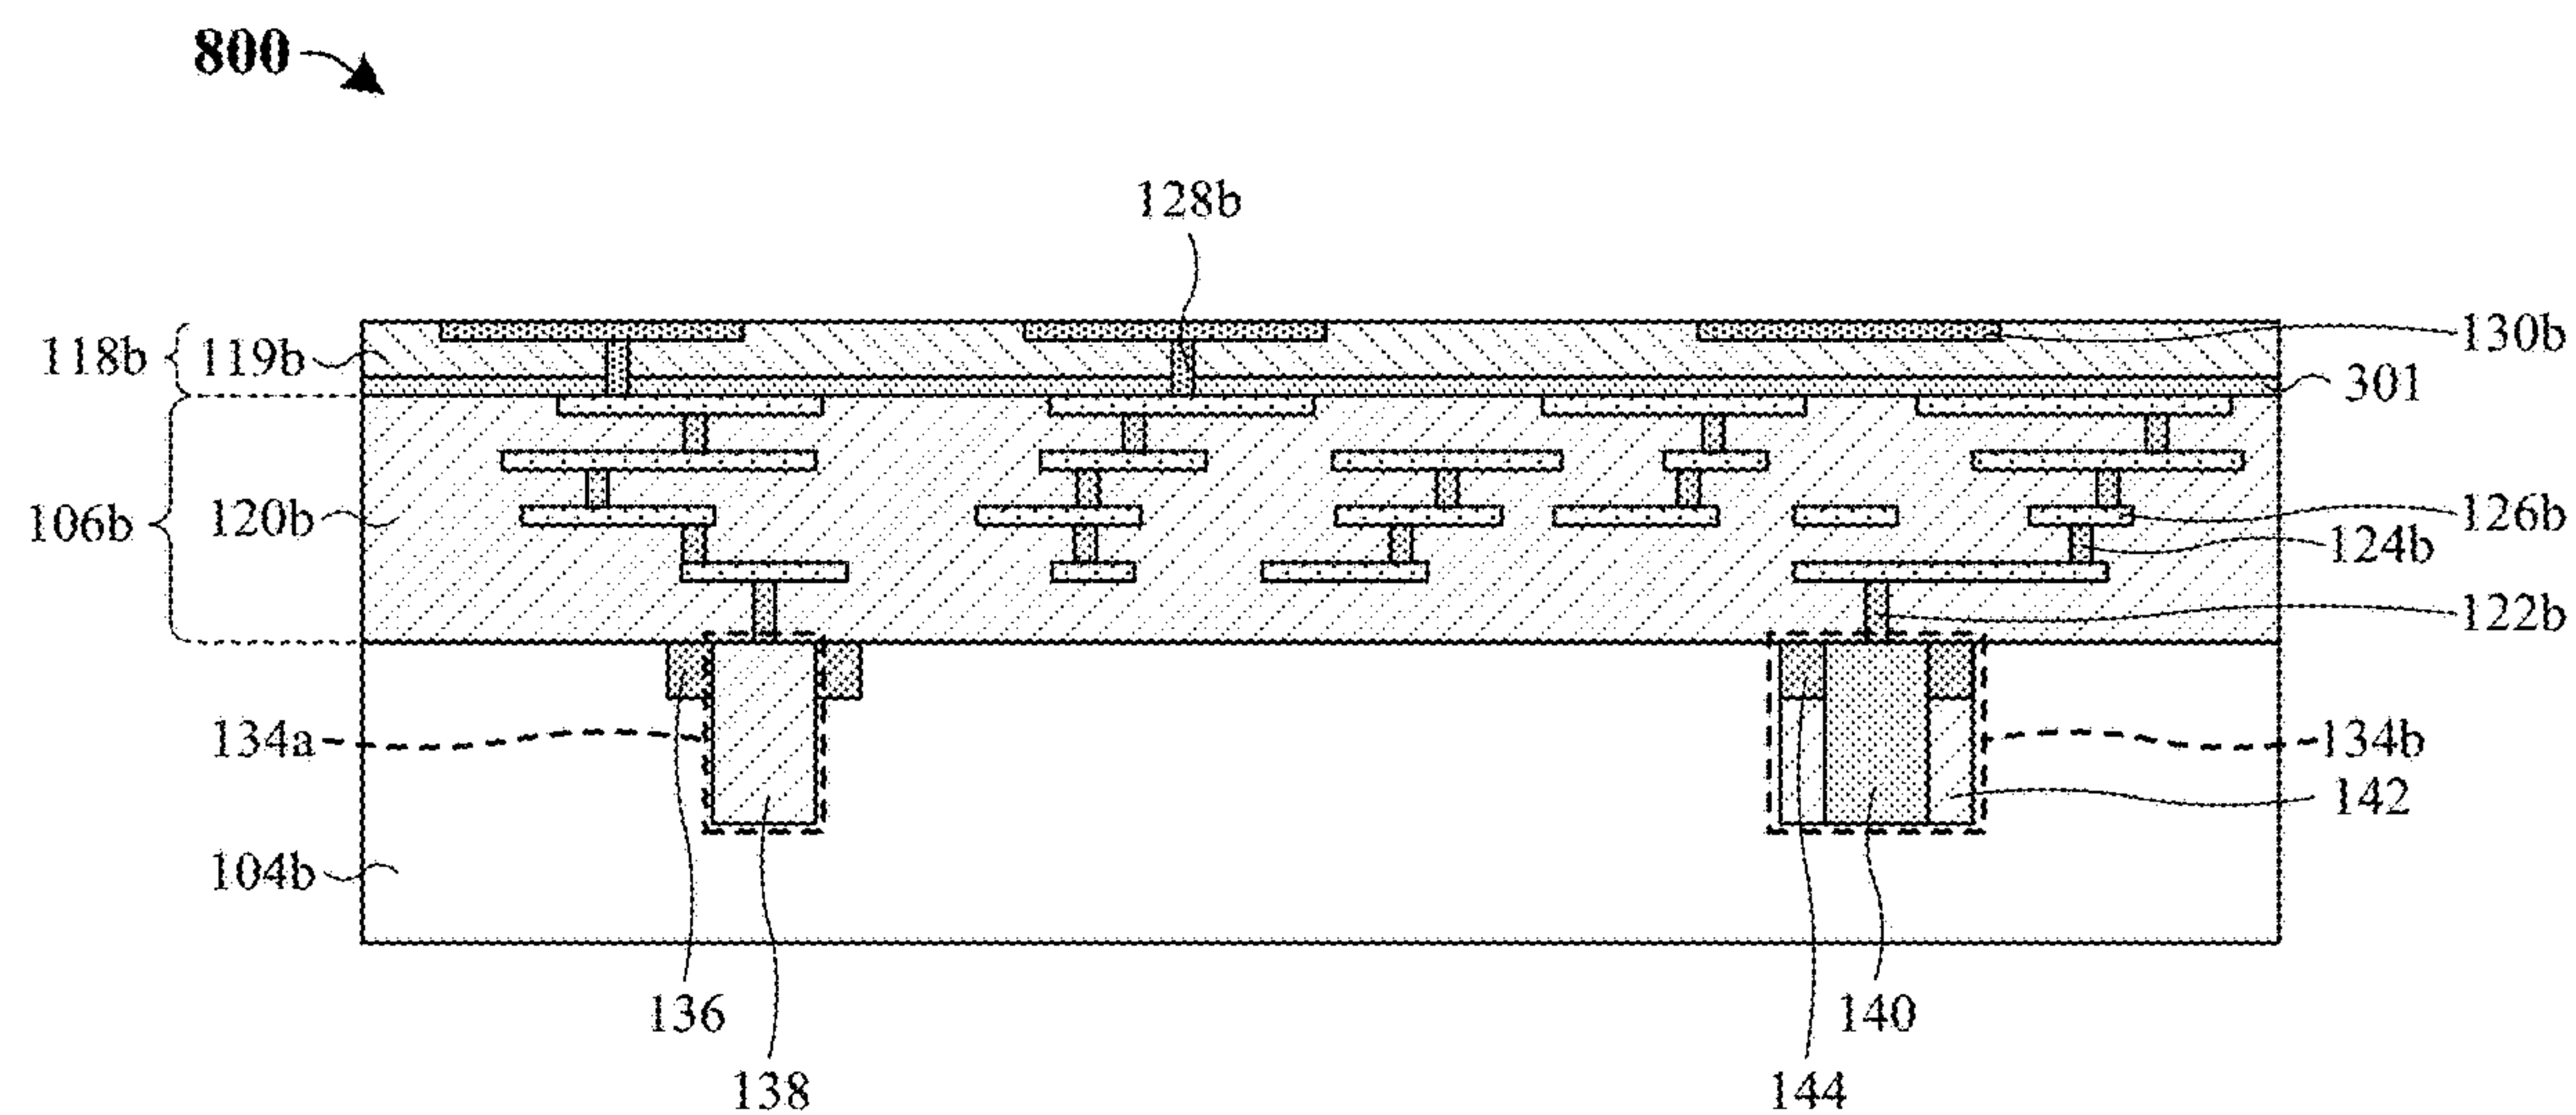


Fig. 8

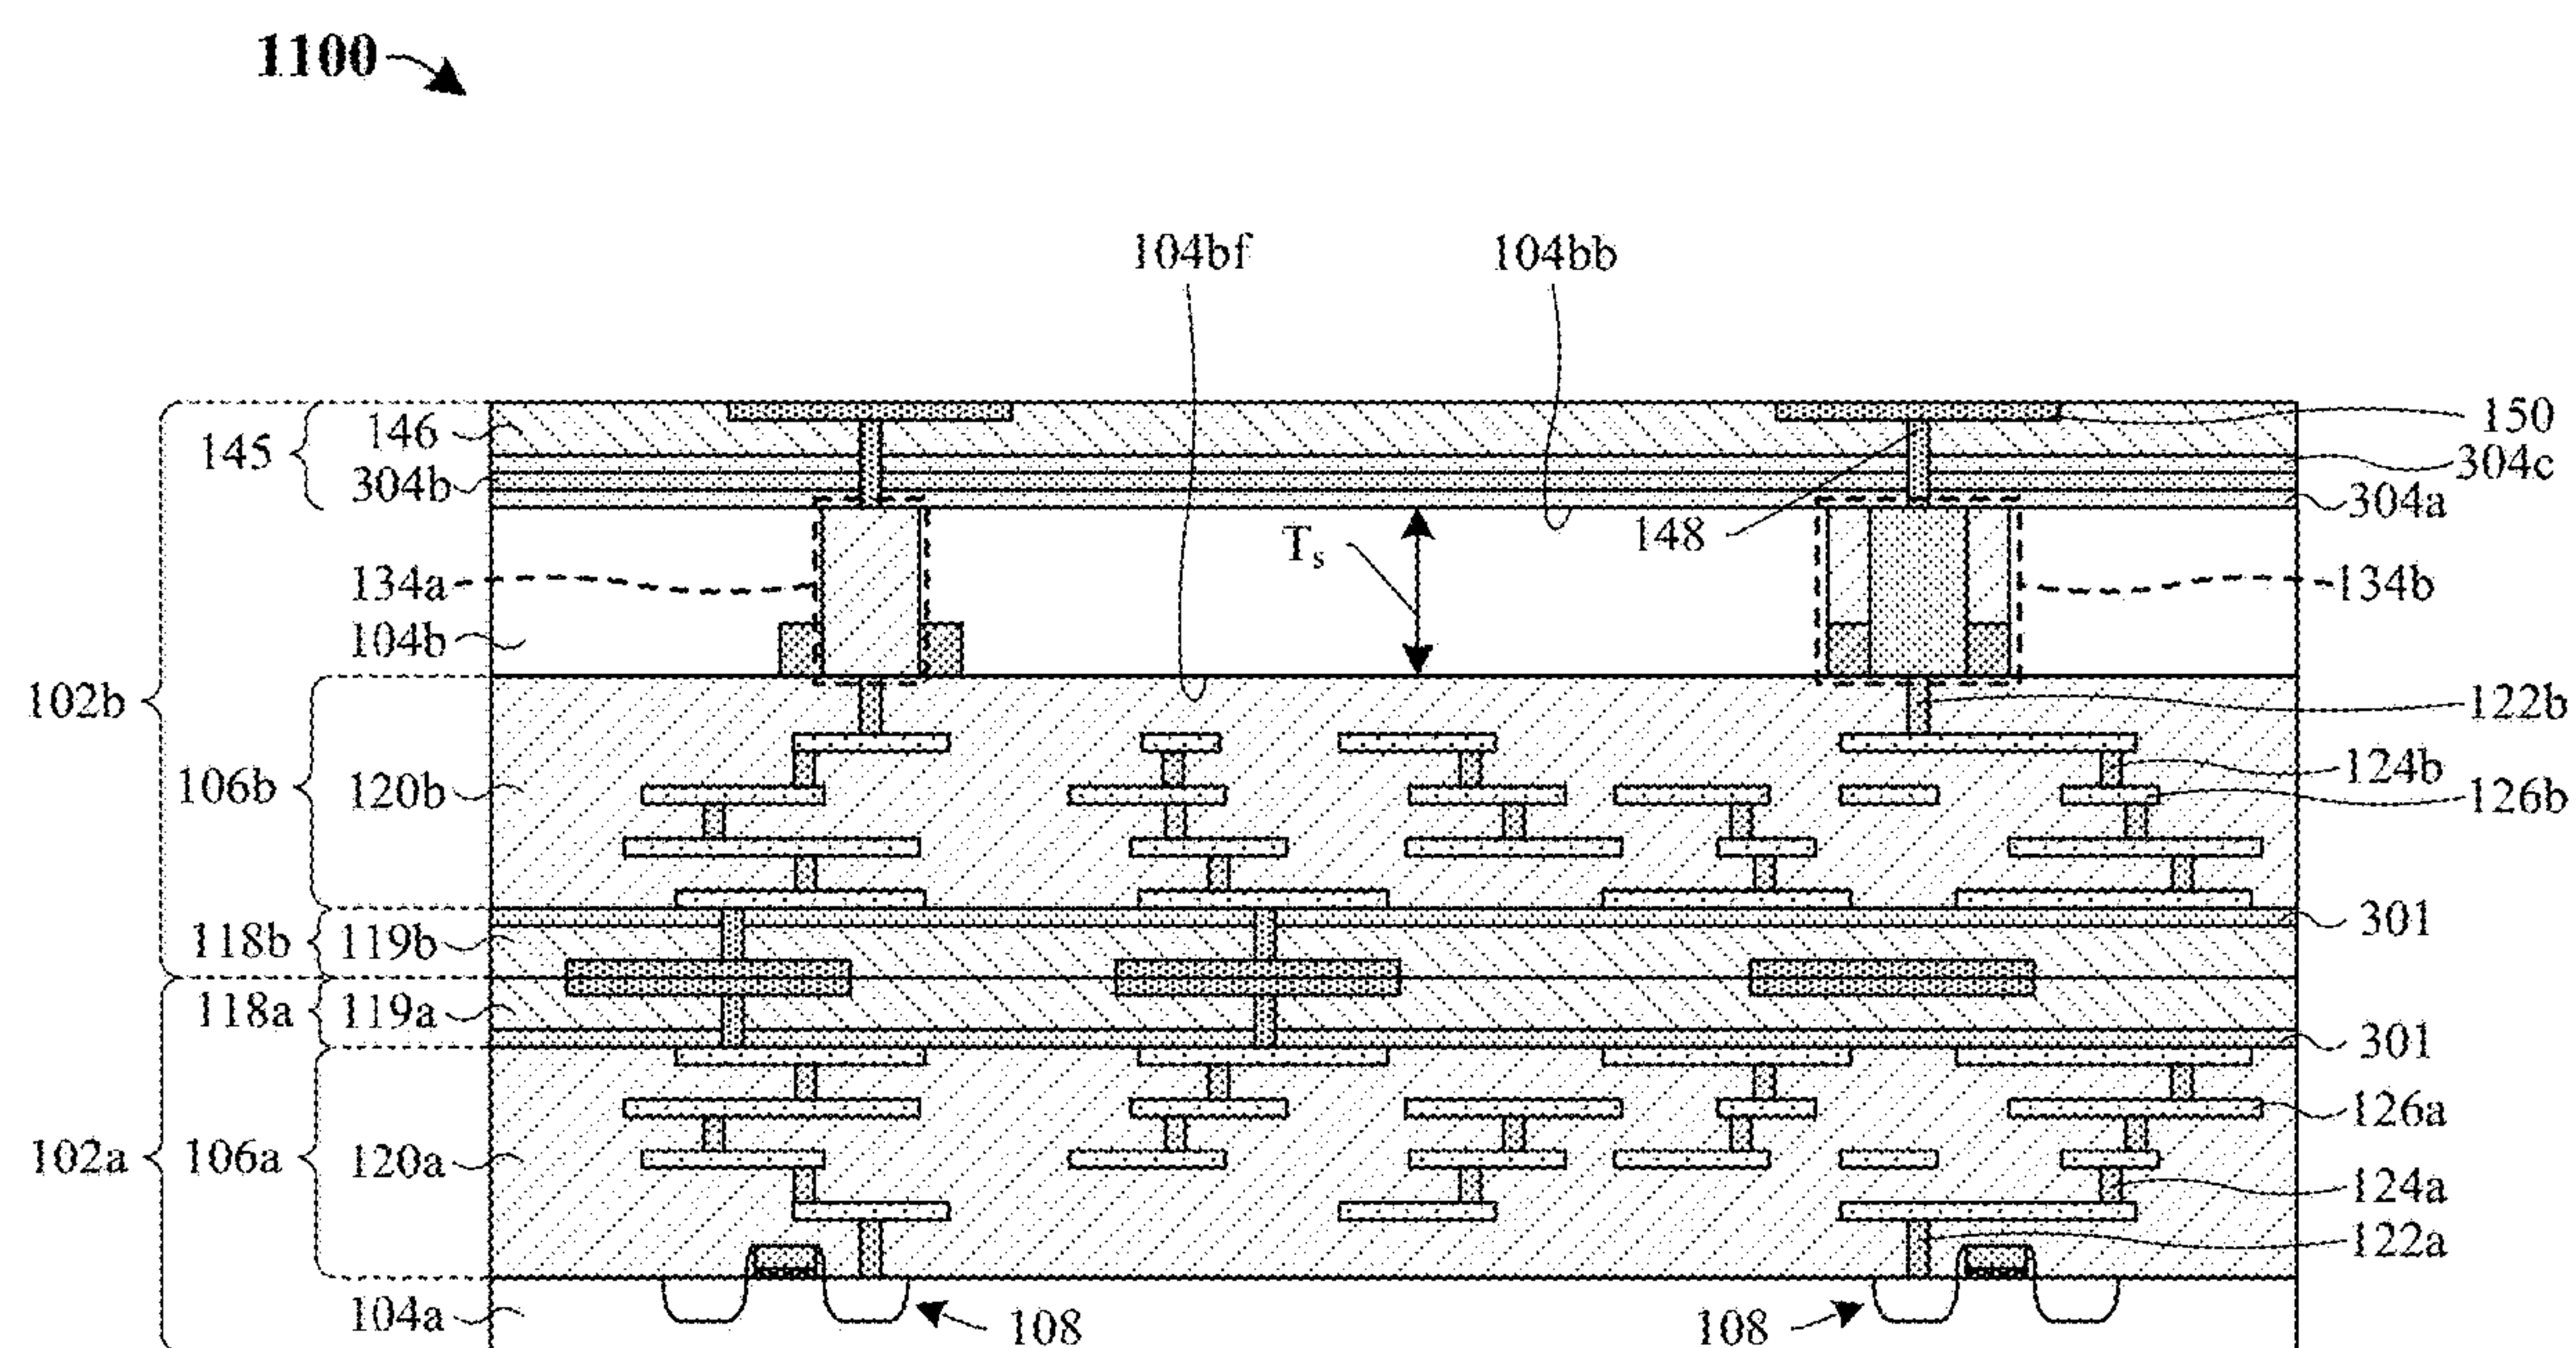


Fig. 11

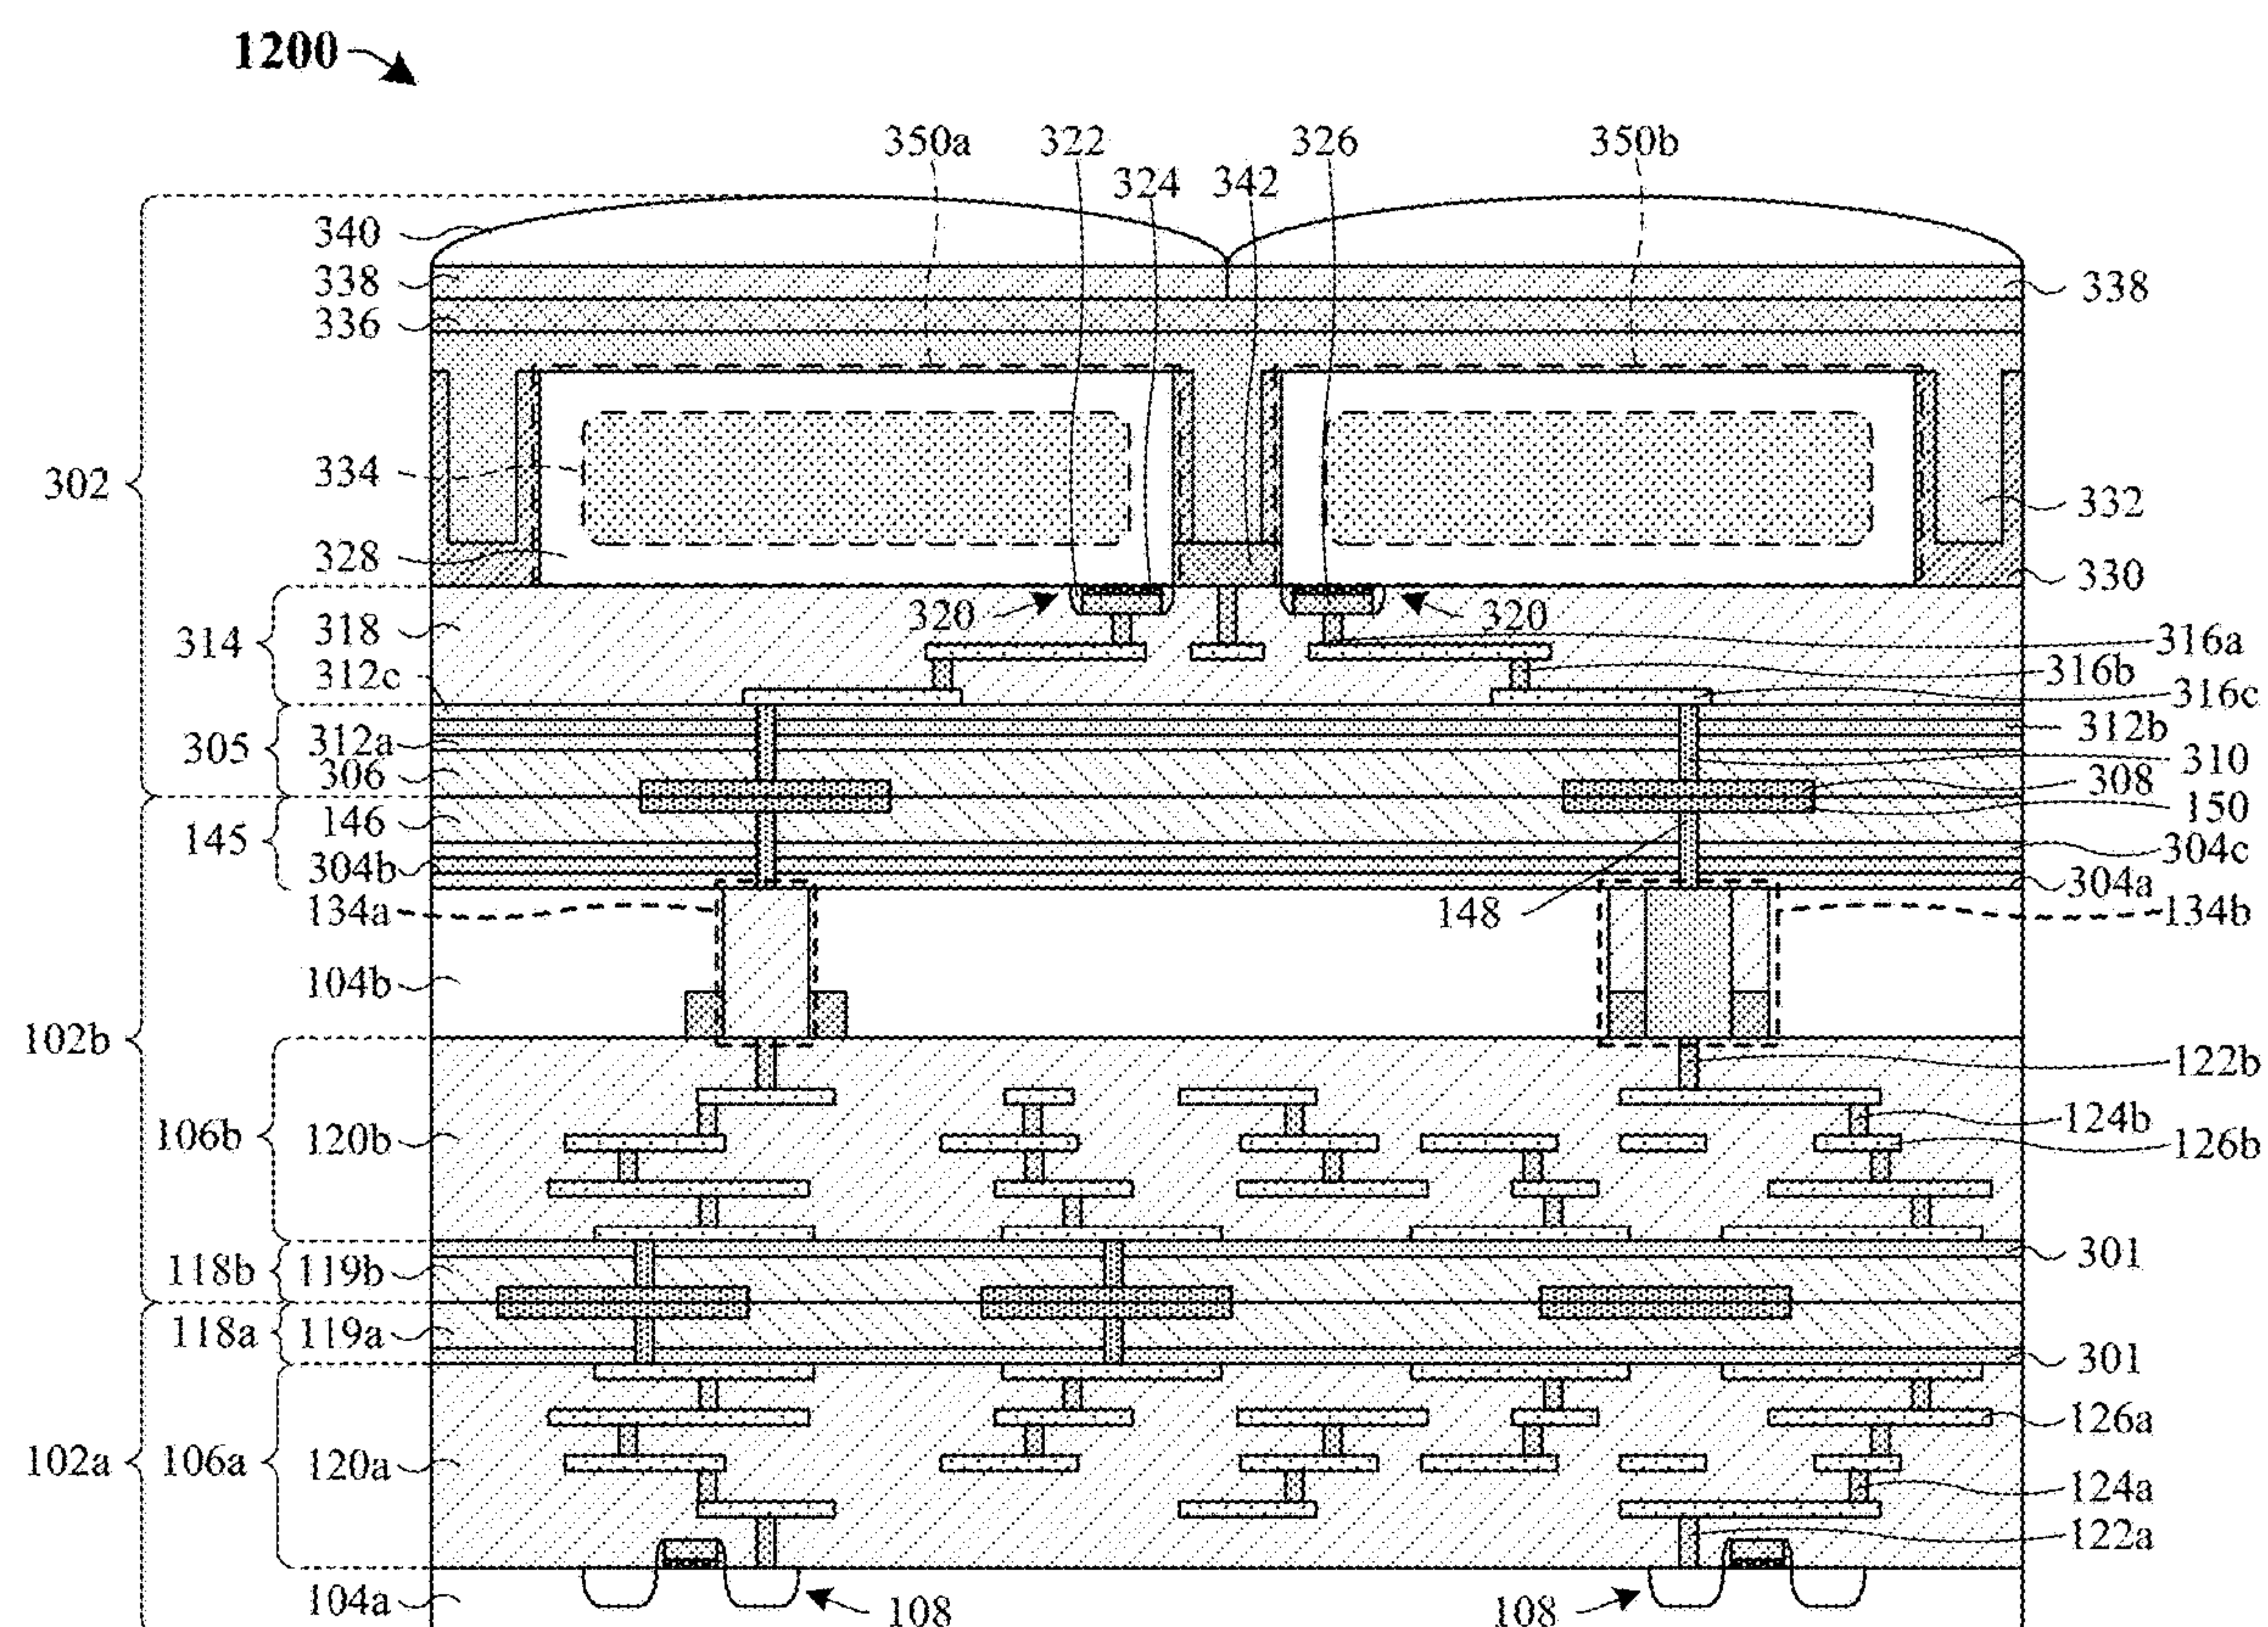


Fig. 12

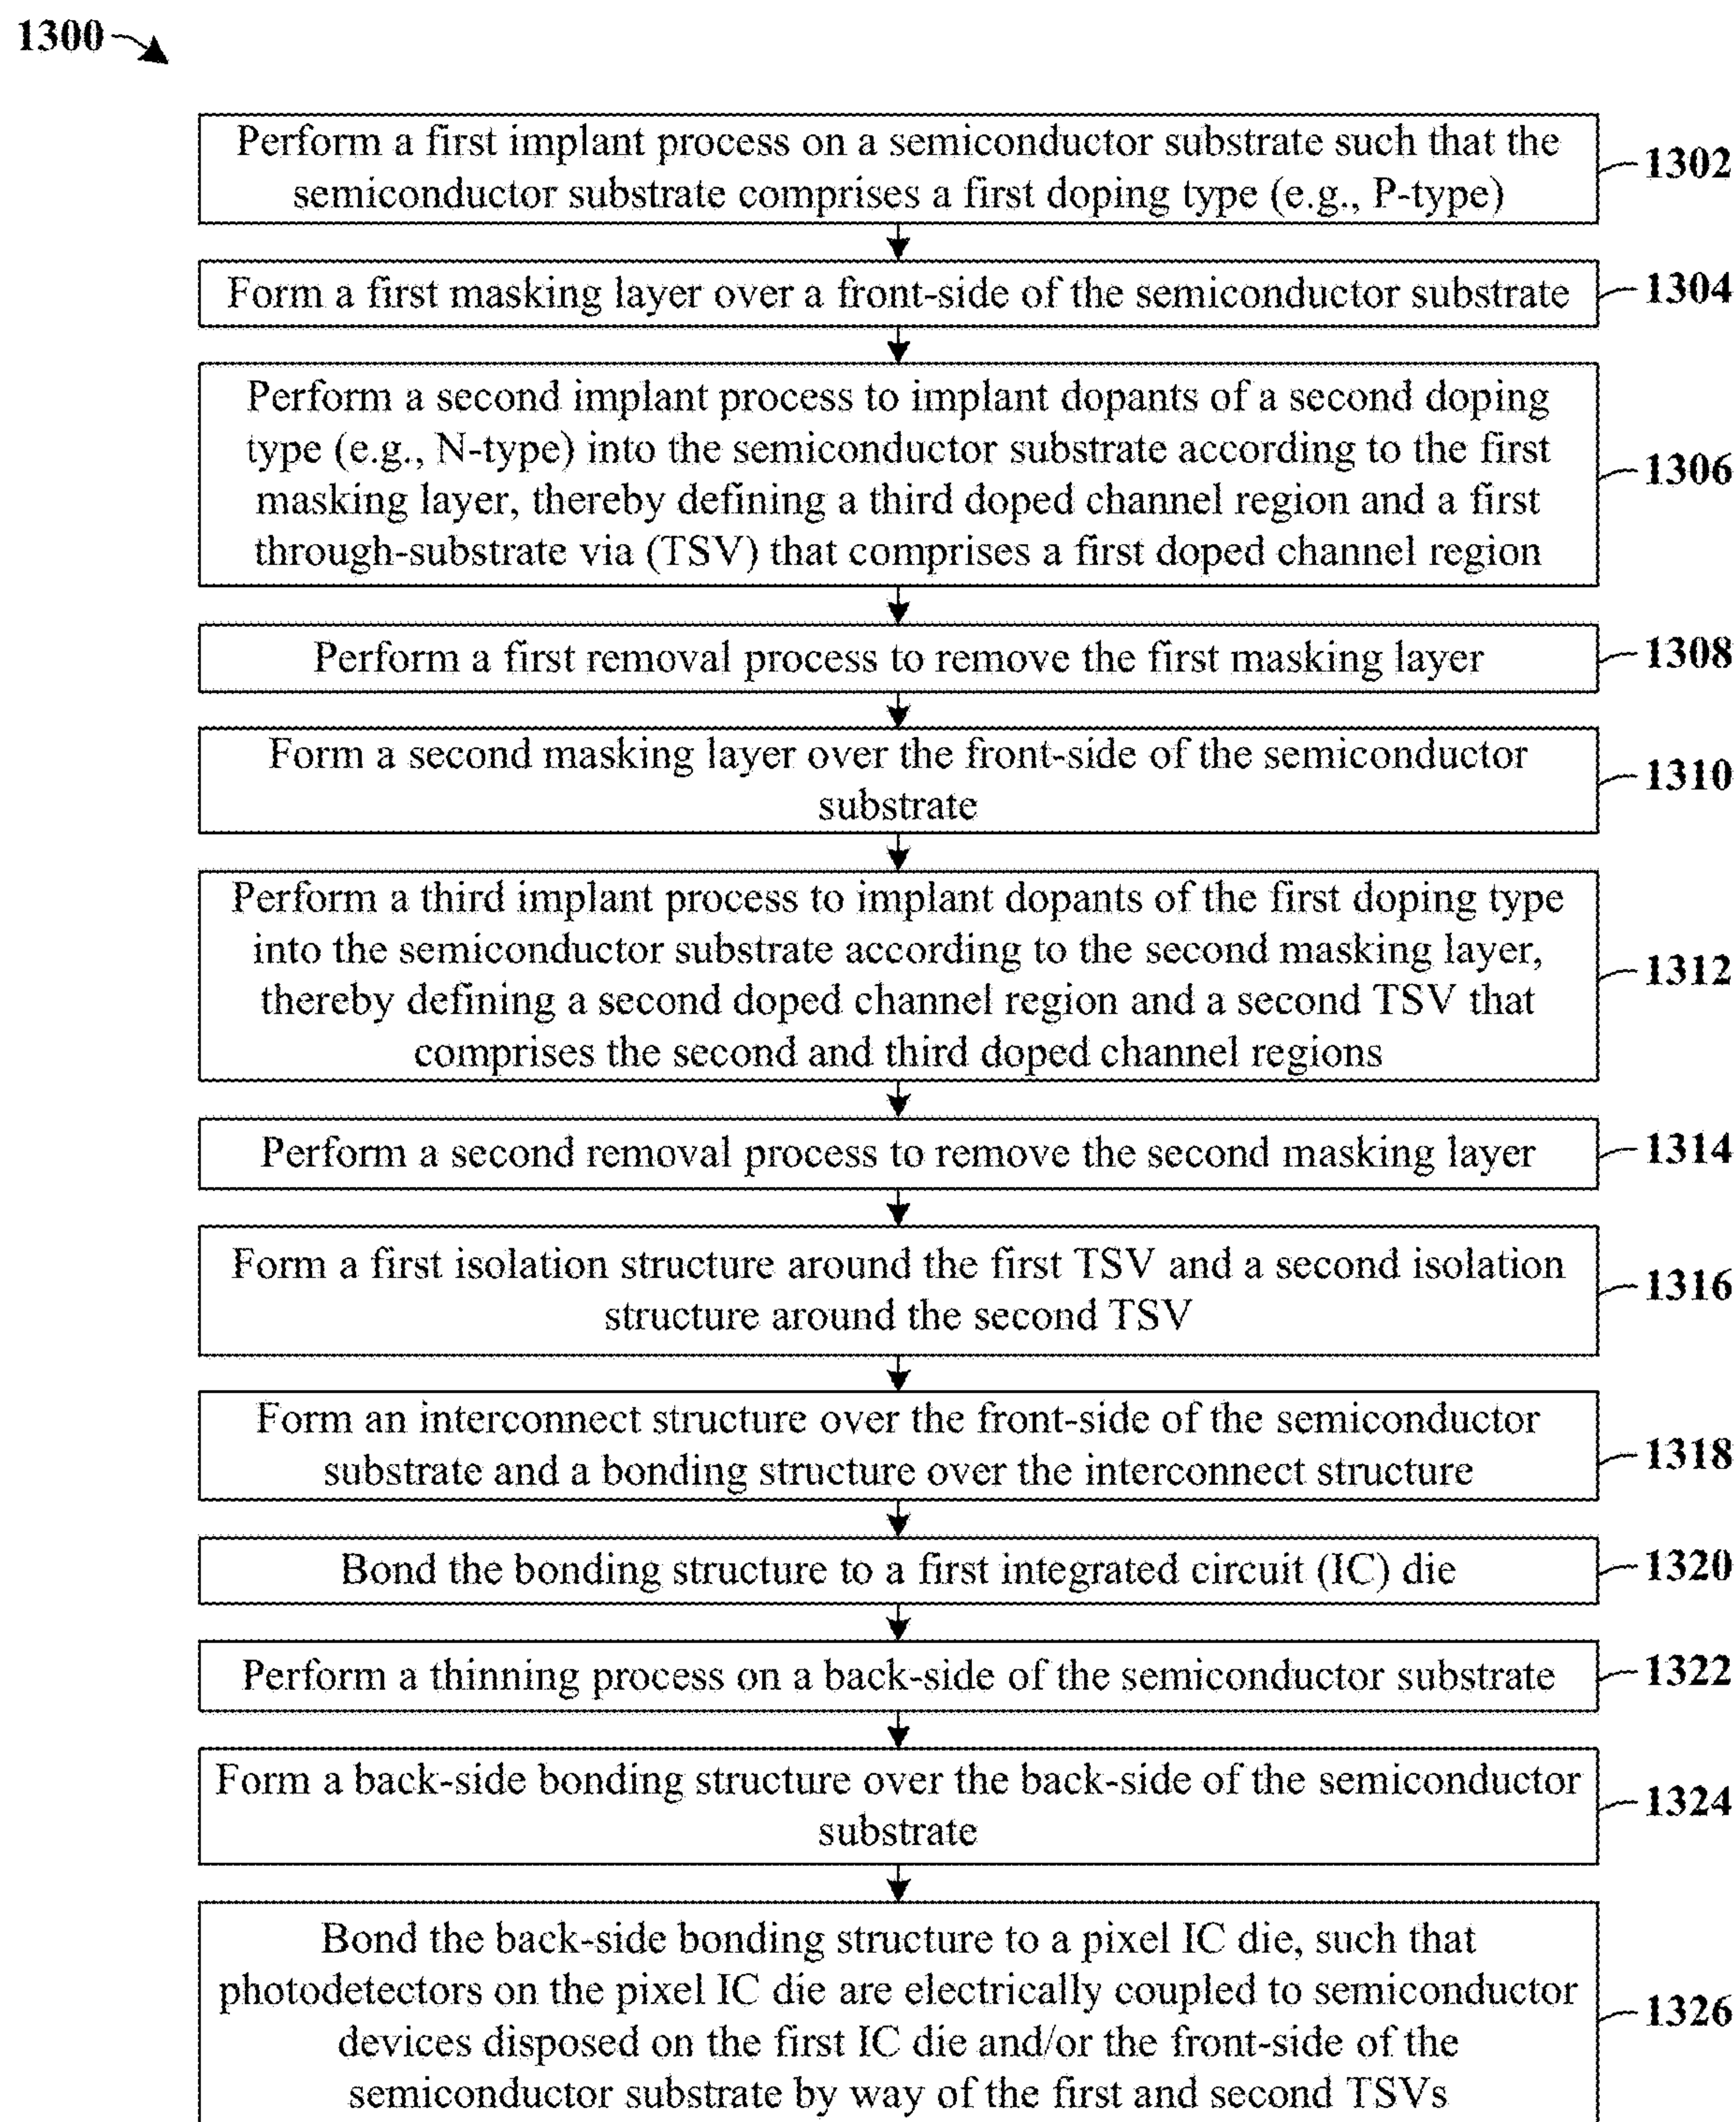


Fig. 13

ION THROUGH-SUBSTRATE VIA**REFERENCE TO RELATED APPLICATION**

[0001] This application claims the benefit of U.S. Provisional Application No. 62/749,752, filed on Oct. 24, 2018, the contents of which are incorporated by reference in their entirety.

BACKGROUND

[0002] The semiconductor industry has continually improved the processing capabilities and power consumption of integrated circuits (ICs) by shrinking the minimum feature size. However, in recent years, process limitations have made it difficult to continue shrinking the minimum feature size. The stacking of two-dimensional (2D) ICs into three-dimensional (3D) ICs has emerged as a potential approach to continue improving processing capabilities and power consumption of ICs. Commonly, through-substrate vias (TSVs) are used to electrically couple stacked 2D ICs together.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] Aspects of the present disclosure are best understood from the following detailed description when read with the accompanying figures. It is noted that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

[0004] FIG. 1A illustrates a cross-sectional view of some embodiments of a three-dimensional (3D) integrated circuit (IC) comprising a first IC die and a second IC die that respectively comprise first semiconductor devices and ion through-substrate vias (TSVs).

[0005] FIG. 1B illustrates a top view of some embodiments of the 3D IC of FIG. 1A according to the cut-line in FIG. 1A.

[0006] FIGS. 1C-1E illustrate cross-sectional views of various alternative embodiments of the 3D IC of FIG. 1A.

[0007] FIG. 2A illustrates a cross-sectional view of various alternative embodiments of the 3D IC of FIG. 1A in which the second IC die further comprises second semiconductor devices.

[0008] FIG. 2B illustrates a top view of some embodiments of the 3D IC of FIG. 2A according to the cut-line in FIG. 2A.

[0009] FIG. 3A illustrates a cross-sectional view of some embodiments of a pixel sensor device comprising a pixel sensor IC die and further comprising a 3D IC die underlying the pixel sensor IC die, where the 3D IC die comprises a first IC die and a second IC die that respectively comprise first semiconductor devices and ion TSVs.

[0010] FIG. 3B illustrates a top view of some embodiments of the pixel sensor device of FIG. 3A according to the cut-line in FIG. 3A.

[0011] FIG. 3C illustrates a cross-sectional view of various alternative embodiments of the pixel sensor device of FIG. 3A in which the second IC die further comprises second semiconductor devices.

[0012] FIGS. 4-12 illustrate a series of cross-sectional views of some embodiments of a method for forming a pixel sensor device that comprises a pixel sensor IC die and a 3D IC die, where the 3D IC die underlies the pixel sensor IC die

and comprises a first IC die and a second IC die that respectively comprise first semiconductor devices and ion TSVs

[0013] FIG. 13 illustrates a block diagram of some embodiments of the method of FIGS. 4-12.

DETAILED DESCRIPTION

[0014] The present disclosure provides many different embodiments, or examples, for implementing different features of this disclosure. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. For example, the formation of a first feature over or on a second feature in the description that follows may include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed between the first and second features, such that the first and second features may not be in direct contact. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

[0015] Further, spatially relative terms, such as “beneath,” “below,” “lower,” “above,” “upper” and the like, may be used herein for ease of description to describe one element or feature’s relationship to another element(s) or feature(s) as illustrated in the figures. The spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. The apparatus may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein may likewise be interpreted accordingly.

[0016] One type of three-dimensional (3D) integrated circuit (IC) comprises a first IC die and a second IC die over the first IC die. The first and second IC dies are two-dimensional (2D) IC dies, and comprise respective semiconductor substrates, respective interconnect structures, and respective bonding structures. The interconnect structures are between the semiconductor substrates, and the bonding structures are between the interconnect structures. The interconnect structures comprise alternating stacks of wiring layers (e.g., horizontal routing) and via layers (e.g., vertical routing). The bonding structures comprise respective bonding dielectric layers and respective bonding contacts. The bonding dielectric layers contact at a bonding interface between the first and second IC dies, and the bonding contacts contact at the bonding interface.

[0017] The 3D IC further comprises a plurality of metal (e.g., copper or aluminum) through-substrate vias (TSVs) extending through a semiconductor substrate of the second IC die, from a back-side of the second IC die to a front-side of the second IC die. The interconnect structure of the second IC is on the front-side of the second IC die, and one or more electrodes is/are disposed directly over the 3D IC on the back-side of the second IC die. The electrode(s) electrically couple correspondingly with the metal TSVs, and the metal TSVs electrically couple to wiring layers in the interconnect structure of the second IC die. A challenge is that the metal TSVs may cause a mechanical stress to neighboring semiconductor devices (e.g., transistors, photodetectors, etc.). This mechanical stress may, in turn, cause

failure (e.g., a short circuit) of the semiconductor devices. Therefore, a “keep-out-zone” may be established in the 3D IC to indicate a minimum lateral distance between the semiconductor devices and the metal TSVs. Semiconductor devices are disposed within a center device region of the 3D IC, and the metal TSVs are disposed in a peripheral region of the 3D IC that surrounds the center device region and is laterally separated from the center device region by the keep-out-zone. A challenge with the keep-out-zone is that a large amount of the 3D IC is devoted to the keep-out-zone, thereby limiting scaling down of the 3D IC and contributing to design and modeling complexity.

[0018] It has been appreciated that the above structure and/or material of the metal TSVs may present a number of practical difficulties. For example, widths of the metal TSVs and/or spacing of the metal TSVs may be too large (e.g., respectively greater than approximately 0.5 micrometers and 0.4 micrometers) and may limit the number of metal TSVs that may be disposed within the 3D IC. Further, reducing widths of the metal TSVs and/or spacing of the metal TSVs may be limited by the capabilities of tools used to form the metal TSVs. As another example, formation of the metal TSVs may be complex. For example, forming the metal TSVs may comprise: patterning a substrate to form an opening extending through an entire thickness of the substrate; depositing a dielectric layer covering the substrate and lining the opening; etching back the dielectric to localize the dielectric layer to sidewalls of the opening; depositing a conductive layer filling the opening and covering the substrate; and performing a planarization into the conductive layer until the substrate. Further, reducing the complexity for forming the metal TSVs may be impeded by the material (i.e., metal) of the metal TSVs.

[0019] Various embodiments of the present application are directed towards ion TSVs and/or a method for forming the ion TSVs. In some embodiments, an ion TSV is formed by forming a masking layer over a semiconductor substrate and implanting dopants (e.g., N-type and/or P-type) into the semiconductor substrate. The ion TSV extends and provides electrical coupling from a front-side surface of the semiconductor substrate to an opposing back-side surface of the semiconductor substrate. Ion TSVs mitigate mechanical stress to overlying, underlying, and/or adjacent semiconductor devices (e.g., transistors, photodetectors, etc.). This, in turn, removes the “keep-out-zone” in a 3D IC, such that at least some ion TSVs may, for example, directly underlie and/or overlie the semiconductor devices. Further, the aforementioned method may, for example, form ion TSVs: 1) with small lengths and/or small width (e.g., length and width may each be approximately between 0.3-0.5 micrometers); 2) with small spacing (e.g., spacing may be between approximately 0.2-0.4 micrometers); 3) at reduced complexity; or 4) or any combination of the foregoing.

[0020] FIG. 1A illustrates a cross-sectional view of some embodiments of a three-dimensional (3D) integrated circuit (IC) 100 having a first IC die 102a underlying a second IC die 102b.

[0021] In some embodiments, the first and second IC dies 102a, 102b may comprise respective semiconductor substrates 104a, 104b. The semiconductor substrates 104a, 104b are spaced from one another, respectively under and over respective interconnect structures 106a, 106b. In some embodiments, the semiconductor substrates 104a, 104b may, for example, be bulk substrates of monocrystalline

silicon or some other semiconductor, some other type of semiconductor substrate, or a combination of the foregoing.

[0022] In some embodiments, a plurality of semiconductor devices 108 is laterally spaced over a first semiconductor substrate 104a of the first IC die 102a. The semiconductor devices 108 may, for example, be metal-oxide-semiconductor field-effect transistor (MOSFETs), some other metal-oxide-semiconductor (MOS) devices, some other insulated-gate field-effect transistors (IGFETs), some other semiconductor devices, or any combination of the foregoing. In some embodiments, the semiconductor devices 108 are configured as transistors and comprise corresponding source/drain regions 110, corresponding gate dielectric layer 112, corresponding gate electrode 114, and corresponding sidewall spacers 116.

[0023] The interconnect structures 106a, 106b of the first and second IC dies 102a, 102b are between the semiconductor substrates 104a, 104b and are spaced from one another by bonding structures 118a, 118b (e.g., hybrid bonding layers). A first interconnect structure 106a of the first IC die 102a comprises a first interconnect dielectric structure 120a, first conductive contacts 122a, first conductive vias 124a, and first conductive wires 126a. Similarly, a second interconnect structure 106b of the second IC die 102b comprises a second interconnect dielectric structure 120b, second conductive contacts 122b, second conductive vias 124b, second conductive wires 126b, and a channel control contact 132. In some embodiments, the channel control contact 132 is configured to provide control of a conductive channel within a complementary metal-oxide-semiconductor (CMOS) device (such as adjacent transistors (not shown)). In some embodiments, the first and second interconnect dielectric structures 120a, 120b may comprise a plurality of dielectric layers, respectively. In further embodiments, the first and second interconnect dielectric structures 120a, 120b may, for example, be or comprise silicon dioxide, a low κ dielectric, some other dielectric, or a combination of the foregoing. As used herein, a low κ dielectric is a dielectric with a dielectric constant κ less than about 3.9. The first conductive wires 126a are alternately stacked with the first conductive vias 124a in the first interconnect dielectric structure 120a. The second conductive wires 126b are alternately stacked with the second conductive vias 124b in the second interconnect dielectric structure 120b.

[0024] The bonding structures 118a, 118b of the first and second IC dies 102a, 102b are between the first and second interconnect structures 106a, 106b. In some embodiments, a first bonding structure 118a is bonded to a second bonding structure 118b by way of a hybrid bond, or some other suitable bond. The first bonding structure 118a comprises a first bonding dielectric structure 119a, first redistribution vias 128a, and first redistribution wires 130a. Similarly, the second bonding structure 118b comprises a second bonding dielectric structure 119b, second redistribution vias 128b, and second redistribution wires 130b. First redistribution vias 128a and first redistribution wires 130a are disposed within the first bonding dielectric structure 119a. Second redistribution vias 128b and second redistribution wires 130b are disposed within the second bonding dielectric structure 119b. The first and second redistribution vias 128a, 128b and the first and second redistribution wires 130a,

130b facilitate electrical coupling between the first interconnect structure **106a** and the second interconnect structure **106b**.

[0025] A second semiconductor substrate **104b** overlies the second interconnect structure **106b**. The second semiconductor substrate **104b** comprises a first doping type (e.g., P-type). A first through-substrate via (TSV) **134a** and a second TSV **134b** overlie the second conductive contacts **122b** and are electrically coupled to the semiconductor devices **108** by way of the first and second interconnect structures **106a**, **106b**. In some embodiments, the first TSV **134a** comprises a first doped channel region **138** surrounded by a first isolation structure **136**. In some embodiments, outer sidewalls of the first doped channel region **138** adjoin inner sidewalls of the first isolation structure **136**. In further embodiments, the first doped channel region **138** is a doped region of the second semiconductor substrate **104b** comprising a second doping type (e.g., N-type) opposite the first doping type (e.g., P-type). Therefore, in some embodiments, the first TSV **134a** may, for example, comprise a semiconductor substrate material (e.g., silicon).

[0026] In some embodiments, the second TSV **134b** comprises a second doped channel region **140** surrounded by a third doped channel region **142**. Outer sidewalls of the second doped channel region **140** adjoin the inner sidewalls of the second isolation structure **144**. In some embodiments, the second doped channel region **140** comprises the first doping type (e.g., P-type) and the third doped channel region **142** comprises the second doping type (e.g., N-type). In further embodiments, the second and third doped channel regions **140**, **142** are respectively doped regions of the second semiconductor substrate **104b**. Therefore, in some embodiments, the second TSV **134b** may, for example, comprise the semiconductor substrate material (e.g., silicon).

[0027] A first back-side bonding structure **145** overlies a back-side **104bb** of the second semiconductor substrate **104b**. The first back-side bonding structure **145** comprises a first back-side bonding dielectric structure **146**, first back-side redistribution vias **148**, and first back-side redistribution wires **150**. First back-side redistribution vias **148** and first back-side redistribution wires **150** are within the first back-side bonding dielectric structure **146** and directly overlie the first and second TSVs **134a**, **134b**.

[0028] In some embodiments, a depletion region forms at outer regions of the first TSV **134a** (e.g., due to p-n junctions between the first doped channel region **138** and a doped region of the second semiconductor substrate **104b** that surrounds the first TSV **134a**). In further embodiments, a depletion region forms at outer regions of the second TSV **134b** (e.g., due to p-n junctions between the third doped channel region **142** and a doped region of the second semiconductor substrate **104b** that surrounds the second TSV **134b**) and a depletion region forms at an interface between the second and third doped channel regions **140**, **142** (e.g., due to p-n junctions between the second and third doped channel regions **140**, **142**). The first and second TSVs **134a**, **134b** provide electrical coupling between the semiconductor devices **108** and the first back-side redistribution vias and wires **148**, **150** by way of the first and second interconnect structures **106a**, **106b**. In yet further embodiments, the formation of depletion regions at the outer regions of the first and second TSVs **134a**, **134b** facilitates electrical isolation between the first and second TSVs **134a**,

134b and adjacent regions of the second semiconductor substrate **104b**. This, in part, is because under certain operating conditions, for example, the p-n junctions may act as diodes, such that current flows from a P-type region to an N-type region (but current may not flow from the N-type region to the P-type region).

[0029] By virtue of the first and second TSVs **134a**, **134b** comprising doped regions of the second semiconductor substrate **104b** (e.g., first, second, and third doped channel regions **138**, **140**, **142**), the first and second TSVs **134a**, **134b** may be laterally spaced above the semiconductor devices **108**. The semiconductor substrate material (e.g., silicon) of the first and second TSVs **134a**, **134b** mitigates mechanical stress induced upon the underlying semiconductor devices **108**, which in turn may prevent device breakdown (e.g., due to mechanical stress) of the semiconductor devices **108**. Therefore, the first and second TSVs **134a**, **134b** may facilitate electrical coupling between the back-side redistribution wires **150** and the semiconductor devices **108** while being laterally spaced above the semiconductor devices **108**. This, in turn, may eliminate a “keep-out zone” while designing the 3D IC **100**. Thus, the 3D IC **100** may be further shrunk, and the design and modeling complexity of the 3D IC **100** can be reduced.

[0030] The first and second conductive contacts **122a**, **122b**, the first and second conductive vias **124a**, **124b**, the first and second conductive wires **126a**, **126b**, the first and second redistribution vias **128a**, **128b**, the first and second redistribution wires **130a**, **130b**, and the first back-side redistribution vias and wires **148**, **150** are conductive and may, for example, be or comprise aluminum copper, aluminum, copper, tungsten, some other metal or conductive material, a combination of the foregoing, or the like. In some embodiments, the channel control contact **132** may, for example, be a conductive material comprising doped polysilicon and/or metal. In some embodiments, the first and second interconnect structures **106a**, **106b** comprise a conductive material different than a material the first and second TSVs **134a**, **134b** are comprised of. In some embodiments, the first and second isolation structures **136**, **144** may, for example, be or comprise a dielectric material (e.g., silicon dioxide), a shallow trench isolation (STI) structure, a deep trench isolation (DTI) structure, or some other suitable isolation structure. The first and second bonding dielectric structures **119a**, **119b** and the first back-side bonding dielectric structure **146** may, for example, be or comprise silicon dioxide, another dielectric, or a combination of the foregoing.

[0031] In some embodiments, the second semiconductor substrate **104b** comprises the first doping type (e.g., P-type) with a doping concentration of approximately 1×10^{15} atoms/cm³. In some embodiments, the P-type dopants of the first doping type may, for example be or comprise boron, difluoroboron (e.g., BF₂), indium, some other suitable P-type dopants, or any combination of the foregoing. In some embodiments, the first and third doped channel regions **138**, **142** comprise the second doping type (e.g., N-type) with a doping concentration within a range of approximately 1×10^{16} to 1×10^{20} atoms/cm³. In some embodiments, the N-type dopants of the second doping type may, for example be or comprise phosphorous, arsenic, antimony, some other suitable N-type dopants, or any combination of the foregoing. In some embodiments, the second doped channel region **140** may comprise the first doping type with a doping

concentration within a range of approximately 1×10^{16} to 1×10^{20} atoms/cm³. In some embodiments, a doping concentration of the second doped channel region **140** is greater than a doping concentration of the second semiconductor substrate **104b**.

[0032] With reference to FIG. 1B, a top view of some embodiments of the 3D IC **100** of FIG. 1A according to the cut-lines in FIGS. 1A and 1B is provided.

[0033] As illustrated in FIG. 1B, an edge of the first TSV **134a** is laterally spaced from an edge of the second TSV **134b** by a first lateral distance d_s . In some embodiments, the first lateral distance d_s is within a range of approximately 0.2 to 0.4 micrometers. In some embodiments, if the first lateral distance d_s is less than approximately 0.2 micrometers, then the first and second TSVs **134a**, **134b** may become electrically shorted together, rendering the 3D IC **100** inoperable. In further embodiments, if the first lateral distance d_s is greater than approximately 0.4 micrometers, then the first lateral distance d_s may mitigate the number of TSVs and/or semiconductor devices that may be formed on and/or under the second semiconductor substrate **104b**.

[0034] In some embodiments, the first TSV **134a** may have a first lateral width w_1 within a range of approximately 0.3 to 0.5 micrometers. In some embodiments, if the first lateral width w_1 is less than approximately 0.3 micrometers, then a conductivity of the first TSV **134a** may be too low, thus reducing the performance of the 3D IC **100**. In further embodiments, if the first lateral width w_1 is greater than approximately 0.5 micrometers, then the first TSV **134a** may use too much space on the second semiconductor substrate **104b**, thereby reducing the number of TSVs and/or semiconductor devices that may be formed on and/or under the second semiconductor substrate **104b**.

[0035] In some embodiments, the second TSV **134b** may have a second lateral width w_2 within a range of approximately 0.3 to 0.5 micrometers. In some embodiments, if the second lateral width w_2 is less than approximately 0.3 micrometers, then a conductivity of the second TSV **134b** may be too low, thus reducing the performance of the 3D IC **100**. In further embodiments, if the second lateral width w_2 is greater than approximately 0.5 micrometers, then the second TSV **134b** may use too much space on the second semiconductor substrate **104b**, thereby reducing the number of TSVs and/or semiconductor devices that may be formed on and/or under the second semiconductor substrate **104b**. In yet further embodiments, the second doped channel region **140** may have a third lateral width w_3 within a range of approximately 0.1 to 0.3 micrometers. In some embodiments, the second lateral width w_2 of the second TSV **134b** is greater than the first lateral width w_1 of the first TSV **134a**, or vice versa. In further embodiments, the first and second lateral widths w_1 , w_2 are approximately equal (not shown).

[0036] In some embodiment, the semiconductor substrate material (e.g., silicon) of the first and second TSVs **134a**, **134b** reduces a width and spacing (i.e., the first lateral distance d_s , the first lateral width w_1 , and the second lateral width w_2) of the first and second TSVs **134a**, **134b**. This, in part, is because tools (e.g., tools used to perform a doping process) used to form the first and second TSVs **134a**, **134b** facilitate the reduction of the width and spacing (i.e., the first lateral distance d_s , the first lateral width w_1 , and the second lateral width w_2) of the first and second TSVs **134a**, **134b**. Thus, capabilities of the tools (e.g., tools used to perform the

doping process) facilitating shrinking of the 3D IC **100** and/or increasing a number of TSVs disposed on the 3D IC **100**.

[0037] With reference to FIG. 1C, a cross-sectional view of a 3D IC **100c** according to some alternative embodiments of the 3D IC **100** of FIG. 1A is provided in which the first and second TSVs **134a**, **134b** respectively comprise a single doped channel region.

[0038] As illustrated in FIG. 1C, the second TSV **134b** comprises a second doped channel region **140** surrounded by the second isolation structure **144**. In some embodiments, outer sidewalls of the second doped channel region **140** adjoin inner sidewalls of the second isolation structure **144**. In further embodiments, the second doped channel region **140** is a doped region of the second semiconductor substrate **104b** comprising the second doping type (e.g., N-type) opposite the first doping type (e.g., P-type). Therefore, the second TSV **134b** is configured the same as the first TSV **134a**. In some embodiments, the first and second doped channel regions **138**, **140** comprise the second doping type with approximately the same doping concentration. In some embodiments, a first lateral width w_1 of the first TSV **134a** is approximately equal to a second lateral w_2 of the second TSV **134b**. In further embodiments, the second semiconductor substrate **104b** comprises N-type dopants and the first and second TSVs **134a**, **134b** comprise P-type dopants.

[0039] With reference to FIG. 1D, a cross-sectional view of a 3D IC **100d** according to some alternative embodiments of the 3D IC **100** of FIG. 1A is provided in which the first and second TSVs **134a**, **134b** each comprise two doped channel regions.

[0040] As illustrated in FIG. 1D, the first TSV **134a** comprises a first doped channel region **138** surrounded by a fourth doped channel region **152**. Outer sidewalls and inner sidewalls of the first isolation structure **136** adjoin outer sidewalls and inner sidewalls of the fourth doped channel region **152**, respectively. In some embodiments, the first doped channel region **138** comprises the first doping type (e.g., P-type) and the fourth doped channel region **152** comprises the second doping type (e.g., N-type). In further embodiments, the first and second doped channel regions **138**, **140** are respectively doped regions of the second semiconductor substrate **104b**. Therefore, for example, the first TSV **134a** is configured the same as the second TSV **134b**. In some embodiments, the first and second doped channel regions **138**, **140** comprise the first doping type with approximately the same doping concentration. In further embodiments, the third and fourth doped channel regions **142**, **152** comprise the second doping type with approximately the same doping concentration. In yet further embodiments, a first lateral width w_1 of the first TSV **134a** is approximately equal to a second lateral w_2 of the second TSV **134b**.

[0041] With reference to FIG. 1E, a cross-sectional view of a 3D IC **100e** according to some alternative embodiments of the 3D IC **100** of FIG. 1A is provided in which the first and second TSVs **134a**, **134b** each comprise a single doped channel region.

[0042] As illustrated in FIG. 1E, the first and second isolation structures **136**, **144** are configured as deep trench isolation (DTI) structures that extend from a front-side **104bf** of the second semiconductor substrate **104b** to the back-side **104bb** of the second semiconductor substrate **104b**. In some embodiments, the DTI structure configuration of the first

and second isolation structures **136**, **144** may enhance electrical isolation between the first and second TSVs **134a**, **134b** and any adjacent semiconductor devices (e.g., transistors) disposed on the front-side **104bf** of the second semiconductor substrate **104b** (not shown). This, in part, may increase a stability and performance of the 3D IC **100e**, thereby further increasing an ability to shrink the 3D IC **100e**. The second TSV **134b** comprises a second doped channel region **140** surrounded by the second isolation structure **144**. In some embodiments, outer sidewalls of the second doped channel region **140** adjoin inner sidewalls of the second isolation structure **144**. In further embodiments, the second doped channel region **140** is a doped region of the second semiconductor substrate **104b** comprising the first doping type (e.g., P-type). In yet further embodiments, the first and second TSVs **134a**, **134b** may both comprise the first doping type (e.g., P-type) or the first and second TSVs **134a**, **134b** may both comprise the second doping type (e.g., N-type).

[0043] With reference to FIG. 2A, a cross-sectional view of a 3D IC **200** according to some alternative embodiments of the 3D IC **100** of FIG. 1A is provided in which a second plurality of semiconductor devices **202** underlies the second semiconductor substrate **104b**.

[0044] As illustrated in FIG. 2A, the second plurality of semiconductor devices **202** is laterally adjacent to the first and second TSVs **134a**, **134b**. At least one semiconductor device of the second plurality of semiconductor devices **202** is disposed laterally between the first and second TSVs **134a**, **134b**. The second plurality of semiconductor devices **202** may, for example, be metal-oxide-semiconductor field-effect transistors (MOSFETs), some other metal-oxide-semiconductor (MOS) devices, some other insulated-gate field-effect transistors (IGFETs), some other semiconductor devices, or any combination of the foregoing. In some embodiments, the semiconductor devices **202** are configured as transistors and respectively comprise source/drain regions **204**, gate dielectric **206**, gate electrode **208**, and sidewall spacers **210**. The source/drain regions **204** are in the second semiconductor substrate **104b**. The source/drain regions **204** are respectively at ends of the gate electrode **208**. The source/drain regions **204** have the second doping type (e.g., N-type) and directly adjoin portions of the second semiconductor substrate **104b** having the first doping type (e.g., P-type).

[0045] The gate dielectrics **206** respectively underlie the second semiconductor substrate **104b**, and the gate electrodes **208** respectively underlie the gate dielectrics **206**. The gate dielectrics **206** may, for example, be or comprise silicon dioxide and/or some other dielectric material, and/or the gate electrodes **208** may be or comprise, for example, doped polysilicon, metal, some other conductive material, or any combination of the foregoing. The sidewall spacers **210** may, for example, be or comprise silicon dioxide, silicon nitride, silicon oxynitride, silicon carbide, some other dielectric, or any combination of the foregoing. In some embodiments, the second plurality of semiconductor devices **202** is electrically coupled to other semiconductor devices (e.g., photodetectors) by way of the second interconnect structure **106b** (not shown). In some embodiments, the channel control contact **132** is configured to apply a bias voltage to the gate electrode **208** of one of the semiconductor devices **202** to control a conductive channel within the second semiconductor substrate **104b**.

[0046] In some embodiments, if the first and second TSVs **134a**, **134b** comprised a metal material (e.g., aluminum, copper, tungsten, etc.), then the second plurality of semiconductor devices **202** may not be disposed on the second semiconductor substrate **104b** (not shown). In the aforementioned example, the metal material of the first and second TSVs **134a**, **134b** may cause mechanical strain to adjacent semiconductor devices (e.g., the second plurality of semiconductor devices **202**), thereby rendering the adjacent semiconductor devices inoperable and/or prone to failure. Therefore, according to some embodiments of the present disclosure, the semiconductor substrate material (e.g., silicon) of the first and second TSVs **134a**, **134b** in FIG. 2A mitigates mechanical strain on the second plurality of semiconductor devices **202**. Placing the second plurality of semiconductor devices **202** on a front-side **104bf** of the second semiconductor substrate **104b** may reduce an overall size of the 3D IC **200**, reduce a complexity in the design and/or formation of the 3D IC **200**, and/or facilitate the omission of an additional IC die (not shown) (e.g., that comprises the second plurality of semiconductor devices **202**).

[0047] Although the 3D IC **200** of FIG. 2A is illustrated with the first and second TSVs **134a**, **134b** of FIG. 1A, it may be appreciated, for example, that the first and second TSVs **134a**, **134b** from FIGS. 1C-1E may be used in FIG. 2A. Additionally, any combination of the first and second TSVs **134a**, **134b** from FIGS. 1A-1E may be used in FIG. 2A. Further, the first and second isolation structures **136**, **144** of FIG. 2A may be configured, for example, as DTI structures as illustrated and described in FIG. 1E.

[0048] With reference to FIG. 2B, a top view of some embodiments of the 3D IC **200** of FIG. 2A according to the cut-lines in FIGS. 2A and 2B is provided.

[0049] As illustrated in FIG. 2B, the first and second TSVs **134a**, **134b** are laterally spaced from adjacent semiconductor devices **202** by a first lateral distance d_s . In some embodiments, the first lateral distance d_s is approximately 60 nanometers or greater. In some embodiments, if the first lateral distance d_s is less than approximately 60 nanometers, then the first and second TSVs **134a**, **134b** and the adjacent semiconductor devices **202** may become electrically shorted together, rendering the 3D IC **200** inoperable. In further embodiments, if the first and second isolation structures (**136**, **144** of FIG. 2A) are configured as DTI structures, then electrical isolation between the first and second TSVs **134a**, **134b** and the adjacent semiconductor devices **202** may be enhanced, thereby reducing a possibility of rendering the 3D IC **200** inoperable.

[0050] With reference to FIG. 3A, a cross-sectional view of some embodiments of a pixel sensor device **300** including a pixel sensor IC die **302** overlying various embodiments of the 3D IC **100** of FIG. 1A.

[0051] As illustrated in FIG. 3A, the first and second IC dies **102a**, **102b** comprise bonding etch stop layers **301** disposed between the first and second bonding structures **118a**, **118b** and the first and second interconnect structures **106a**, **106b**, respectively. In some embodiments, the bonding etch stop layers **301** may, for example, be or comprise silicon nitride, silicon carbide, or the like. The first back-side bonding structure **145** further comprises passivation layers **304a-c**. In some embodiments, a first passivation layer **304a** and a third passivation layer **304c** may, for example, be or comprise an oxide, silicon dioxide, or the like. In further

embodiments, a second passivation layer **304b** may, for example, be or comprise silicon nitride, or the like. The pixel sensor IC die **302** overlies and is bonded (e.g., a hybrid bond) to the second IC die **102b**.

[0052] The pixel sensor IC die **302** comprises a second back-side bonding structure **305**, a third interconnect structure **314**, a third semiconductor substrate **328**, and a plurality of photodetectors **350a**, **350b**. In some embodiments, the second back-side bonding structure **305** comprises passivation layers **312a-c**, a second back-side bonding dielectric structure **306**, second back-side redistribution wires **308**, and second back-side redistribution vias **310**. The second back-side redistribution wires **308** directly overlie and contact the back-side redistribution wires **150**. Second back-side redistribution vias **310** overlie the second back-side redistribution wires **308** and extend through the second back-side bonding dielectric structure **306** and the passivation layers **312a-c**. In some embodiments, a first passivation layer **312a** and a third passivation layer **312c** may, for example, be or comprise an oxide, silicon dioxide, or the like. In further embodiments, a second passivation layer **312b** may, for example, be or comprise silicon nitride, or the like.

[0053] A third interconnect structure **314** of the pixel sensor IC die **302** comprises a third interconnect dielectric structure **318**, third conductive contacts **316a**, third conductive vias **316b**, and third conductive wires **316c**. In some embodiments, the third interconnect dielectric structure **318** may comprise a plurality of inter-layer dielectric (ILD) and/or a plurality of inter-metal dielectric (IMD) layers. The third interconnect dielectric structure **318** may, for example, be or comprise silicon dioxide, a low κ dielectric, some other dielectric, or a combination of the foregoing. The third conductive wires **316c** are alternately stacked with the third conductive vias **316b** in the third interconnect dielectric structure **318**.

[0054] The plurality of photodetectors **350a**, **350b** is disposed within the third semiconductor substrate **328**. In some embodiments, the third semiconductor substrate **328** may, for example, be a bulk substrate of monocrystalline silicon or some other semiconductor, some other type of semiconductor substrate, or a combination of the foregoing. The third semiconductor substrate **328** comprises the first doping type (e.g., P-type). The photodetectors **350a**, **350b** are configured to convert electromagnetic radiation (e.g., photons) into electric signals (i.e., to generate electron-hole pairs from the electromagnetic radiation). The photodetectors **350a**, **350b** respectively comprise photodetector collector regions **334**. The photodetector collector regions **334** are regions of the third semiconductor substrate **328** having the second doping type (e.g., N-type). A floating diffusion node **342** is disposed within the third semiconductor substrate **328** between the photodetectors **350a**, **350b**. The floating diffusion node **342** is a region of the third semiconductor substrate **328** having the second doping type (e.g., N-type).

[0055] A plurality of transfer transistors **320** directly underlie the third semiconductor substrate **328**. The transfer transistors **320** are disposed between the floating diffusion node **342** and a center of the photodetectors **350a**, **350b**. The plurality of transfer transistors **320** may, for example, be metal-oxide-semiconductor field-effect transistors (MOSFETs), some other metal-oxide-semiconductor (MOS) devices, some other insulated-gate field-effect transistors (IGFETs), some other semiconductor devices, or any combination of the foregoing. The transfer transistors **320** may

selectively form a conductive channel between the photodetectors **350a**, **350b** and the floating diffusion node **342** to transfer accumulated charge (e.g., via absorbing incident radiation) in the photodetectors **350a**, **350b** to the floating diffusion node **342**. In some embodiments, the transfer transistors **320** comprise corresponding transfer gate dielectric layer **324**, corresponding transfer gate electrode **326**, and corresponding transfer sidewall spacers **322**. In some embodiments, the transfer transistors **320** are electrically coupled to the semiconductor devices **108** by way of the first, second, and third interconnect structures **106a**, **106b**, **314** and the first and second TSVs **134a**, **134b**. The semiconductor substrate material (e.g., silicon) of the first and second TSVs **134a**, **134b** mitigates mechanical strain on the transfer transistors **320**, the semiconductor devices **108**, and the photodetectors **350a**, **350b**. Thus, the first and second TSVs **134a**, **134b** may be vertically spaced between the transfer transistors **320**, the semiconductor devices **108**, and the photodetectors **350a**, **350b**.

[0056] Back-side isolation structures **330**, **332** are disposed over and between the photodetectors **350a**, **350b**. An anti-reflection layer **336** directly overlies the back-side isolation structure **332**. The anti-reflection layer **336** is configured to mitigate reflection of electromagnetic radiation off of the back-side isolation structures **330**, **332** and the third semiconductor substrate **328**. A plurality of color filters **338** (e.g., a red color filter, a blue color filter, a green color filter, etc.) directly contacts or is otherwise on the anti-reflection layer **336**. The color filters **338** are respectively configured to transmit specific wavelengths of electromagnetic radiation. Further, a plurality of micro-lenses **340** is disposed over the color filters **338**. The micro-lenses **340** are configured to focus electromagnetic radiation (e.g., photons) towards the photodetectors **350a**, **350b**.

[0057] Although the pixel sensor device **300** of FIG. 3A is illustrated with the first and second TSVs **134a**, **134b** of FIG. 1A, it may be appreciated, for example, that the first and second TSVs **134a**, **134b** from FIGS. 1C-1E may be used in FIG. 3A. Additionally, any combination of the first and second TSVs **134a**, **134b** from FIGS. 1A-1E may be used in FIG. 3A. Further, the first and second isolation structures **136**, **144** of FIG. 3A may be configured, for example, as DTI structures as illustrated in FIG. 1E.

[0058] With reference to FIG. 3B, a top view of some embodiments of the pixel sensor device **300** of FIG. 3A according to the cut-lines in FIGS. 3A and 3B is provided.

[0059] As illustrated in FIG. 3B, a plurality of pixel cells **350** is arranged in an array comprising a plurality of rows (e.g., along an x-axis) and columns (e.g., along a y-axis) of similar pixel sensors. The plurality of pixel cells **350** is surrounded by an outer ring structure **352**. The outer ring structure **352** is surrounded by an edge region **354** of the pixel sensor device **300**. The first and second TSVs **134a**, **134b** repeat directly under each pixel cell **350** in the array.

[0060] In some embodiments, the first and second TSVs **134a**, **134b** are confined to a “keep-out-zone” laterally spaced from the back-side isolation structure **332** (e.g., within the outer ring structure **352**). This, in turn, may limit a number of pixel cells **350** and/or TSVs that may be formed on a single IC die. The “keep-out-zone” is established because the first and second TSVs **134a**, **134b** may cause stress on overlying, underlying, and/or adjacent semiconductor devices (e.g., transistors, photodetectors, etc.). However, because the first and second TSVs **134a**, **134b** com-

prise the semiconductor substrate material (e.g., silicon), stress on overlying, underlying, and/or adjacent semiconductor devices is mitigated. Therefore, the first and second TSVs **134a**, **134b** may be disposed directly beneath each pixel cell. Thus, elimination of the “keep-out-zone” increases available space on a chip (i.e., increasing the number of semiconductor devices (e.g., transistors, photodetectors, etc.) that may be disposed on the chip), facilitates chip shrinking ability, and decreases design/modeling complexity.

[0061] With reference to FIG. 3C, a cross-sectional view of a pixel sensor device **300c** according to some alternative embodiments of the pixel sensor device **300** of FIG. 3A is provided in which a second plurality of semiconductor devices **202a-c** is disposed on the front-side **104bf** of the second semiconductor substrate **104b**.

[0062] In some embodiments, the second plurality of semiconductor devices **202a-c** may, for example, be transistors, varactors, diodes, resistors, etc. In further embodiments, the semiconductor devices **202a-c** are configured as transistors and respectively comprise floating nodes **212**, gate dielectric **206**, gate electrode **208**, and sidewall spacers **210**. The floating nodes **212** are respectively at sides of the gate electrode **208**. The floating nodes **212** have the second doping type (e.g., N-type) and directly adjoin portions of the second semiconductor substrate **104b** having the first doping type (e.g., P-type). In yet further embodiments, at least one semiconductor device of the second plurality of semiconductor devices **202a-c** is electrically coupled to at least one TSV of the first and second TSVs **134a**, **134b** by way of the second interconnect structure **106b**.

[0063] In some embodiments, the second plurality of semiconductor devices **202a-c** is configured to control the plurality of photodetectors **350a**, **350b**. For example, a reset transistor **202a**, a source follower transistor **202b**, and a row select transistor **202c** may be electrically coupled to at least one photodetector **350a**, **350b** by way of the second interconnect structure **106b** and/or the first and second TSVs **134a**, **134b**. During operation of the pixel sensor device **300c**, the transfer gate electrode **326** controls charge transfer from the photodetector collector region **334** to the floating diffusion node **342**. If the charge level is sufficiently high within the floating diffusion node **342**, the source follower transistor **202b** is activated and charges are selectively output according to operation of the row select transistor **202c** used for addressing. The reset transistor **202a** can be used to reset the photodetector collector region **334** between exposure periods. In some embodiments, the photodetectors **350a**, **350b** within the pixel sensor IC die **302** may be implemented within an organic film layer.

[0064] FIGS. 4-12 illustrate cross-sectional views **400-1200** of some embodiments of a method of forming a pixel sensor device including a pixel sensor integrated circuit (IC) die overlying an IC die comprising through-substrate vias (TSVs) according to the present disclosure. Although the cross-sectional views **400-1200** shown in FIGS. 4-12 are described with reference to a method, it will be appreciated that the structures shown in FIGS. 4-12 are not limited to the method but rather may stand alone separate of the method. Although FIGS. 4-12 are described as a series of acts, it will be appreciated that these acts are not limiting in that the order of the acts can be altered in other embodiments, and the methods disclosed are also applicable to other structures. In other embodiments, some acts that are illustrated and/or

described may be omitted in whole or in part. In some embodiments, FIGS. 4-12 may, for example, be employed to form the pixel sensor device **300** of FIG. 3A.

[0065] As shown in cross-sectional view **400** of FIG. 4, a second semiconductor substrate **104b** is provided and a first masking layer **402** is formed over a front-side **104bf** of the second semiconductor substrate **104b**. In some embodiments, the second semiconductor substrate **104b** may be, for example, a bulk substrate (e.g., a bulk silicon substrate), a silicon-on-insulator (SOI) substrate, or some other suitable substrate. In some embodiments, before forming the first masking layer **402**, a first implant process is performed to dope the second semiconductor substrate **104b** with a first doping type (e.g., P-type) to a doping concentration of approximately 1×10^{15} atoms/cm³. In some embodiments, the first masking layer **402** may, for example, be or comprise an oxide, silicon dioxide, silicon nitride, or the like. In further embodiments, the first masking layer **402** may be a photoresist layer. In the aforementioned embodiment, an oxide layer may be formed between the first masking layer **402** and the second semiconductor substrate **104b** (not shown). The oxide layer may, for example, be configured to prevent channeling effect and/or protect a lattice structure of the second semiconductor substrate **104b**. The first masking layer **402** defines a plurality of openings **404** and has a plurality of sidewalls in the plurality of openings **404**. In some embodiments, the P-type dopants of the first doping type may, for example be or comprise boron, difluoroboron (e.g., BF₂), indium, some other suitable P-type dopants, or any combination of the foregoing.

[0066] Further, as seen in cross-sectional view **400** of FIG. 4, a second implant process is performed to form a first doped channel region **138** and a third doped channel region **142** within the second semiconductor substrate **104b**, where the first doped channel region **138** defines a first TSV **134a**. In some embodiments, the first and third doped channel regions **138**, **142** underlie the plurality of openings **404**. In some embodiments, the first and third doped channel regions **138**, **142** may have a second doping type (e.g., N-type) opposite the first doping type and may further have a doping concentration within a range of approximately 1×10^{16} to 1×10^{20} atoms/cm³. After the second implant process is performed, a first removal process may be performed to remove the first masking layer **402** (not shown). In some embodiments, the first removal process may include an etch process and/or a planarization process (e.g., a chemical mechanical planarization (CMP) process). In some embodiments, the N-type dopants of the second doping type may, for example be or comprise phosphorous, arsenic, antimony, some other suitable N-type dopants, or any combination of the foregoing.

[0067] As shown in cross-sectional view **500** of FIG. 5, a second masking layer **502** is formed over the front-side **104bf** of the second semiconductor substrate **104b**. The second masking layer **502** defines at least one opening **504** and has a plurality of sidewalls in the at least one opening **504**. In further embodiments, the second masking layer **502** may be a photoresist layer. In the aforementioned embodiment, an oxide layer may be formed between the second masking layer **502** and the second semiconductor substrate **104b** (not shown). The oxide layer may, for example, be configured to prevent channeling effect and/or protect a lattice structure of the second semiconductor substrate **104b**. In further embodiments, the oxide layer may remain over the

second semiconductor substrate **104b** for subsequent processing steps (not shown). A third implant process is performed to form a second doped channel region **140** within the second semiconductor substrate **104b**, where the second and third doped channel regions **142**, **140** define a second TSV **134b**. In some embodiments, the second doped channel region **140** has the first doping type and a doping concentration within a range of approximately 1×10^{16} to 1×10^{20} atoms/cm³. In some embodiments, a doping concentration of the second doped channel region **140** is greater than a doping concentration of the second semiconductor substrate **104b**. In further embodiments, the second doped channel region **140** may be formed by a counter-doping process.

[0068] In some embodiments, after forming the first and second TSVs **134a**, **134b**, a rapid thermal annealing (RTA) process is performed on the second semiconductor substrate **104b**, for example, to repair any damage to the second semiconductor substrate **104b** from forming the first and/or second TSVs **134a**, **134b**. In yet further embodiments, the RTA process may reach a temperature within a range of approximately 995 to 1010 degrees Celsius. After performing the RTA process, a second removal process may be performed to remove the second masking layer **502** (not shown). In some embodiments, the second removal process may include an etch process and/or a planarization process (e.g., a chemical mechanical planarization (CMP) process).

[0069] As shown in cross-sectional view **600** of FIG. 6, a first isolation structure **136** and a second isolation structure **144** are formed on the front-side **104bf** of the second semiconductor substrate **104b**. In some embodiments, formation of the first and second isolation structures **136**, **144** may include: forming a masking layer (not shown) over the second semiconductor substrate **104b**; performing an etch process according to the masking layer to define openings in the second semiconductor substrate **104b**; filling the openings in the second semiconductor substrate **104b** with a dielectric material; performing a removal process to remove the masking layer and/or excess dielectric material (not shown). In further embodiments, the first and second isolation structures **136**, **144** may, for example, be or comprise a dielectric material, silicon dioxide, or the like.

[0070] In some embodiments, a plurality of semiconductor devices (e.g., transistors) (not shown) may be formed on the front-side **104bf** of the second semiconductor substrate **104b** before and/or after forming the first and/or second TSVs **134a**, **134b** (not shown). In further embodiments, a bottom surface of first isolation structure **136** is aligned with or below a bottom surface of the first TSV **134a** and a top surface of the first isolation structure **136** is aligned with the front-side **104bf** of the second semiconductor substrate **104b**. In yet further embodiments, a bottom surface of the second isolation structure **144** is aligned with or below a bottom surface of the second TSV **134b** and a top surface of the second isolation structure **144** is aligned with the front-side **104bf** of the second semiconductor substrate **104b**.

[0071] As shown in cross-sectional view **700** of FIG. 7, a second interconnect structure **106b** is formed over the front-side **104bf** of the second semiconductor substrate **104b**. The second interconnect structure **106b** comprises a second interconnect dielectric structure **120b**, second conductive contacts **122b**, second conductive vias **124b**, and second conductive wires **126b**. The second conductive vias **124b** are within the second interconnect dielectric structure **120b** and

extend respectively from second conductive wires **126b** to the first and second TSVs **134a**, **134b**.

[0072] In some embodiments, a process for forming the second interconnect structure **106b** comprises forming the second conductive contacts **122b** by a single damascene process, and subsequently forming a bottommost layer of the second conductive wires **126b** by the single damascene process. Further, in some embodiments, the process comprises forming the second conductive vias **124b** and remaining layers of the second conductive wires **126b** by repeatedly performing a dual damascene process. In some embodiments, the single damascene process comprises depositing a dielectric layer, patterning the dielectric layer with openings for a single layer of conductive features (e.g., a layer of contacts, vias, or wires), and filling the openings with conductive materials to form the single layer of conductive features. In some embodiments, the dual damascene process comprises depositing a dielectric layer, patterning the dielectric layer with openings for two layers of conductive features (e.g., a layer of vias and a layer of wires), and filling the openings with conductive material to form the two layers of conductive features. In some embodiments, the second conductive contacts, vias, and wires **122b**, **124b**, **126b** may, for example, be or comprise aluminum copper, copper, aluminum, or the like.

[0073] As shown in cross-sectional view **800** of FIG. 8, a second bonding structure **118b** is formed over the second interconnect structure **106b**. In some embodiments, the second bonding structure **118b** comprises a bonding etch stop layer **301**, a second bonding dielectric structure **119b**, second redistribution vias **128b**, and second redistribution wires **130b**. The bonding etch stop layer **301** is formed over the second interconnect structure **106b** and the second bonding dielectric structure **119b** is formed over the bonding etch stop layer **301**. Second redistribution vias **128b** and second redistribution wires **130b** are formed over the interconnect structure **106b** such that the second redistribution vias and wires **128b**, **130b** are electrically coupled to conductive layers within the second interconnect structure **106b**. In some embodiments, a single and/or dual damascene process may be performed to form the second redistribution vias and/or wires **128b**, **130b**.

[0074] As shown in cross-sectional view **900** of FIG. 9, a first IC die **102a** is provided and the structure of FIG. 8 is flipped and subsequently bonded to the first IC die **102a**. The second bonding structure **118b** interfaces with a first bonding structure **118a** of the first IC die **102a** at a hybrid bond. In some embodiments, the first IC die **102a** is configured as the first IC die **102a** of FIG. 1A. The hybrid bond comprises a dielectric-to-dielectric bond between the first and second bonding dielectric structures **119a**, **119b**. Further, the hybrid bond comprises a conductor-to-conductor bond between the first and second redistribution wires **130a**, **130b**. The process of bonding the first and second bonding structures **118a**, **118b** may comprise, for example, fusion bonding processes and/or metallic bonding processes. In some embodiments, the second semiconductor substrate **104b** has a thickness T_s defined between the front-side **104bf** of the second semiconductor substrate **104b** and a back-side **104bb** of the second semiconductor substrate **104b**. In some embodiments, the thickness T_s is within a range of approximately 750 to 800 micrometers.

[0075] As shown in cross-sectional view **1000** of FIG. 10, a thinning process is performed on the back-side **104bb** of

the second semiconductor substrate **104b** to expose an upper surface the first and second TSVs **134a**, **134b**. In some embodiments, the thinning process reduces the thickness T_s of the second semiconductor substrate **104b** by approximately 795 to 799 micrometers, such that the thickness T_s is within a range of approximately 1 to 5 micrometers. In some embodiments, the thinning process includes a grinding process and/or an etching process.

[0076] As shown in cross-sectional view **1100** of FIG. **11**, a first back-side bonding structure **145** is formed over the second semiconductor substrate **104b**, thereby defining a second IC die **102b**. The first back-side bonding structure **145** comprises passivation layers **304a-c**, a first back-side bonding dielectric structure **146**, first back-side redistribution vias **148**, and first back-side redistribution wires **150**. The passivation layers **304a-c** are formed over the second semiconductor substrate **104b**. In some embodiments, a first passivation layer **304a** and a third passivation layer **304c** may, for example, be or comprise an oxide, silicon dioxide, or the like. In further embodiments, a second passivation layer **304b** may, for example, be or comprise silicon nitride, or the like. The first back-side bonding dielectric structure **146** is formed over the passivation layers **304a-c**. First back-side redistribution vias **148** and first back-side redistribution wires **150** are formed over the second semiconductor substrate **104b**. The first back-side redistribution vias and wires **148**, **150** are electrically coupled to conductive layers within the second interconnect structure **106b** by way of the first and second TSVs **134a**, **134b**.

[0077] As shown in cross-sectional view **1200** of FIG. **12**, a pixel sensor IC die **302** is provided and subsequently bonded to the second IC die **102b**, such that the second back-side bonding structure **305** and the first back-side bonding structure **145** interface to define a hybrid bond. In some embodiments, the pixel sensor IC die **302** is configured as the pixel sensor IC die **302** of FIG. **3A**. The hybrid bond comprises a dielectric-to-dielectric bond between the second back-side bonding dielectric structure **306** and the first back-side bonding dielectric structure **146**. Further, the hybrid bond comprises a conductor-to-conductor bond between the first back-side redistribution wires **150** and the second back-side redistribution wires **308**. The process of bonding the pixel sensor IC die **302** to the second IC die **102b** may comprise, for example, fusion bonding processes and/or metallic bonding processes.

[0078] In some embodiments, it may be appreciated that the method outlined in FIGS. **4-12** may be employed, for example, to form the 3D ICs of FIGS. **1A-1E**, the 3D IC **200** of FIG. **2A**, and/or the pixel sensor device **300C** of FIG. **3C**. In some embodiments, the first and second isolation structures **136**, **144** may be formed before forming the first and second TSVs **134a**, **134b** (such that the first and second isolation structures **136**, **144** may, for example, act as masking layers for the doping process). In further embodiments, the third doped channel region **142** may be formed, for example, as a doped well and the second doped channel region **140** may be formed by a counter-doping process in a center portion of the doped well.

[0079] FIG. **13** illustrates a block diagram of a method **1300** of forming a pixel sensor device in accordance with some embodiments. Although the method **1300** is illustrated and/or described as a series of acts or events, it will be appreciated that the method is not limited to the illustrated ordering or acts. Thus, in some embodiments, the acts may

be carried out in different orders than illustrated, and/or may be carried out concurrently. Further, in some embodiments, the illustrated acts or events may be subdivided into multiple acts or events, which may be carried out at separate times or concurrently with other acts or sub-acts. In some embodiments, some illustrated acts or events may be omitted, and other un-illustrated acts or events may be included.

[0080] At act **1302**, a first implant process is performed on a semiconductor substrate, such that the semiconductor substrate comprises a first doping type (e.g., P-type). FIG. **4** illustrates a cross-sectional view **400** corresponding to some embodiments of act **1302**.

[0081] At act **1304**, a first masking layer is formed over a front-side of the semiconductor substrate. FIG. **4** illustrates the cross-sectional view **400** corresponding to some embodiments of act **1304**.

[0082] At act **1306**, a second implant process is performed to implant dopants of a second doping type (e.g., N-type) into the semiconductor substrate according to the first masking layer. The second implant process defines a third doped channel region and a first through-substrate via (TSV) that comprises a first doped channel region.

[0083] At act **1308**, a first removal process is performed to remove the first masking layer. FIG. **4** illustrates the cross-sectional view **400** corresponding to some embodiments of act **1308**.

[0084] At act **1310**, a second masking layer is formed over the front-side of the semiconductor substrate. FIG. **5** illustrates a cross-sectional view **500** corresponding to some embodiments of act **1310**.

[0085] At act **1312**, a third implant process is performed according to the second masking layer to implant dopants of the first doping type into the semiconductor substrate. The third implant process defines a second doped channel region, thereby defining a second TSV that comprises the second and third doped channel regions. FIG. **5** illustrates the cross-sectional view **500** corresponding to some embodiments of act **1312**.

[0086] At act **1314**, a second removal process is performed to remove the second masking layer. FIG. **5** illustrates the cross-sectional view **500** corresponding to some embodiments of act **1314**.

[0087] At act **1316**, a first isolation structure is formed around the first TSV and a second isolation structure is formed around the second TSV. FIG. **6** illustrates a cross-sectional view **600** corresponding to some embodiments of act **1316**.

[0088] At act **1318**, an interconnect structure is formed over the front-side of the semiconductor substrate and a bonding structure is formed over the interconnect structure. FIGS. **7** and **8** illustrate cross-sectional views **700** and **800** corresponding to some embodiments of act **1318**.

[0089] At act **1320**, the bonding structure is bonded to a first integrated circuit (IC) die. FIG. **9** illustrates a cross-sectional view **900** corresponding to some embodiments of act **1320**.

[0090] At act **1322**, a thinning process is performed on a back-side of the semiconductor substrate. FIG. **10** illustrates a cross-sectional view **1000** corresponding to some embodiments of act **1322**.

[0091] At act **1324**, a back-side bonding structure is formed over the back-side of the semiconductor substrate. FIG. **11** illustrates a cross-sectional view **1100** corresponding to some embodiments of act **1324**.

[0092] At act 1326, the back-side bonding structure is bonded to a pixel IC die. Photodetectors on the pixel IC die are electrically coupled to semiconductor devices disposed in the first IC die and/or on the front-side of the semiconductor substrate by way of the first and second TSVs. FIG. 12 illustrates a cross-sectional view 1200 corresponding to some embodiments of act 1326.

[0093] Accordingly, in some embodiments, the present disclosure relates to a method of forming through-substrate vias (TSVs) with at least one implant process in a semiconductor substrate of a second integrate circuit (IC) die. The second IC die is bonded to a first IC die and a pixel IC die such that photodetectors within the pixel IC die are laterally aligned with the TSVs. Thus, a “keep-out-zone” is not established within the semiconductor substrate of the second IC die.

[0094] In some embodiments, the present application provides an integrated circuit (IC) including a first semiconductor substrate having a front-side surface and a back-side surface respectively on opposite sides of the first semiconductor substrate, wherein the first semiconductor substrate includes a first doped channel region extending from the front-side surface to the back-side surface; a first through substrate via (TSV) defined at least by the first doped channel region; and a first interconnect structure on the front-side surface of the first semiconductor substrate, wherein the first interconnect structure includes a plurality of first conductive wires and a plurality of first conductive vias, and wherein the first conductive wires and the first conductive vias define a conductive path to the first TSV.

[0095] In some embodiments, the present application provides an integrated circuit (IC) including a first IC die including a first semiconductor substrate and a first interconnect structure overlying the first semiconductor substrate; a second IC die over the first IC die, wherein the second IC die includes a second semiconductor substrate and a second interconnect structure underlying the second semiconductor substrate, and wherein the first and second IC dies contact at a bond interface between the first and second interconnect structures; a plurality of semiconductor devices on the first semiconductor substrate and/or the second semiconductor substrate; and a first through-substrate via (TSV) and a second TSV within the second semiconductor substrate and electrically coupled to the first interconnect structure through the second interconnect structure, and wherein the first and second TSVs and the second semiconductor substrate are comprised of a semiconductor material.

[0096] In some embodiments, the present application provides a method for forming an integrated circuit (IC), the method including performing an ion implant process into a front-side surface of a first semiconductor substrate to form a first doped channel region, the first doped channel region extends from the front-side surface to a position in the first semiconductor substrate; forming a first interconnect structure over the front-side surface of the first semiconductor substrate; performing a thinning process on a back-side surface of the first semiconductor substrate, the back-side surface of the first semiconductor substrate is opposite the front-side surface of the first semiconductor substrate, wherein the thinning process removes a material of the first semiconductor substrate between the back-side surface of the first semiconductor substrate and the position in the first semiconductor substrate; and forming a conductive pad

overlying and electrically coupled to the first doped channel region on the back-side surface of the first semiconductor substrate.

[0097] The foregoing outlines features of several embodiments so that those skilled in the art may better understand the aspects of the present disclosure. Those skilled in the art should appreciate that they may readily use the present disclosure as a basis for designing or modifying other processes and structures for carrying out the same purposes and/or achieving the same advantages of the embodiments introduced herein. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the present disclosure, and that they may make various changes, substitutions, and alterations herein without departing from the spirit and scope of the present disclosure.

What is claimed is:

1. An integrated circuit (IC) comprising:
 - a first semiconductor substrate having a front-side surface and a back-side surface respectively on opposite sides of the first semiconductor substrate, wherein the first semiconductor substrate comprises a first doped channel region extending from the front-side surface to the back-side surface;
 - a first through substrate via (TSV) defined at least by the first doped channel region; and
 - a first interconnect structure on the front-side surface of the first semiconductor substrate, wherein the first interconnect structure comprises a plurality of first conductive wires and a plurality of first conductive vias, and wherein the first conductive wires and the first conductive vias define a conductive path to the first TSV.
2. The IC of claim 1, wherein the first semiconductor substrate comprises a second doped channel region and a third doped channel region respectively extending from the front-side surface to the back-side surface, wherein the second doped channel region is surrounded by the third doped channel region, and wherein the IC further comprises:
 - a second TSV defined at least by the second and third doped channel regions, wherein the first and third doped channel regions comprise a first doping type and the second doped channel region comprises a second doping type opposite the first doping type.
3. The IC of claim 2, wherein the first TSV and the second TSV are comprised of silicon and the first conductive wires and vias are comprised of copper or aluminum.
4. The IC of claim 2, further comprising:
 - a first isolation structure extending into the front-side surface of the first semiconductor substrate, wherein an outer sidewall of the first doped channel region adjoins an inner sidewall of the first isolation structure; and
 - a second isolation structure extending into the front-side surface of the first semiconductor substrate to an isolation-structure surface facing the back-side surface of the first semiconductor substrate, wherein an outer sidewall of the second doped channel region adjoins an inner sidewall of the second isolation structure, and wherein the isolation-structure surface adjoins the third doped channel region.
5. The IC of claim 1, wherein the first semiconductor substrate, the first interconnect structure, and the first TSV partially define a first IC die, and wherein the IC further comprises:

a second IC die underlying and bonded to the first IC die, wherein the second IC die comprises a second semiconductor substrate, a semiconductor device, and a second interconnect structure, wherein the semiconductor device overlies and is on the second semiconductor substrate, between the second semiconductor substrate and the second interconnect structure, and wherein the first TSV is electrically coupled to the semiconductor device through the first and second interconnect structures.

6. The IC of claim 5, further comprising:

a third IC die overlying and bonded to the first IC die, wherein the third IC die comprises a third semiconductor substrate, a photodetector, and a third interconnect structure, wherein the photodetector is in the third semiconductor substrate and overlies the first TSV, wherein the third interconnect structure is between the third semiconductor substrate and the first IC die, and wherein the photodetector is electrically coupled to the semiconductor device through the first TSV and the first, second, and third interconnect structures.

7. The IC of claim 6, wherein the first, second, and third interconnect structure each comprise an alternating stack of wires and vias, wherein the wires and the vias are comprised of metal, and wherein the first TSV is comprised of silicon.

8. The IC of claim 6, wherein the first TSV overlies the semiconductor device.

9. An integrated circuit (IC) comprising:

a first IC die comprising a first semiconductor substrate and a first interconnect structure overlying the first semiconductor substrate;

a second IC die over the first IC die, wherein the second IC die comprises a second semiconductor substrate and a second interconnect structure underlying the second semiconductor substrate, and wherein the first and second IC dies contact at a bond interface between the first and second interconnect structures;

a plurality of semiconductor devices on the first semiconductor substrate and/or the second semiconductor substrate; and

a first through-substrate via (TSV) and a second TSV within the second semiconductor substrate and electrically coupled to the first interconnect structure through the second interconnect structure, and wherein the first and second TSVs and the second semiconductor substrate are comprised of a semiconductor material.

10. The IC according to claim 9, wherein the first and second interconnect structures are comprised of a conductive material different than the semiconductor material.

11. The IC according to claim 10, wherein the semiconductor material comprises silicon and the conductive material comprises copper.

12. The IC according to claim 9, wherein a maximum width of the first TSV is less than a minimum width of the second TSV.

13. The IC according to claim 9, wherein the second semiconductor substrate comprises a first doping type, wherein the first TSV comprises a second doping type opposite the first doping type, wherein the second TSV comprises a second doping type opposite the first doping type, wherein the second TSV comprises an inner region surrounded by an outer region, and wherein the inner region comprises the first doping type and the outer region comprises the second doping type.

14. The IC according to claim 13, wherein the inner region comprises a higher doping concentration of the first doping type than the second semiconductor substrate.

15. The IC according to claim 9, further comprising:

a first isolation structure extending from a front-side surface of the second semiconductor substrate to a position in the second semiconductor substrate, wherein an outer sidewall of the first TSV adjoins an inner sidewall of the first isolation structure; and

a second isolation structure extending from the front-side surface of the second semiconductor substrate to an isolation-structure surface of the second isolation structure, wherein the isolation-structure surface is at the position and adjoins the second TSV.

16. A method for forming an integrated circuit (IC), the method comprising:

performing an ion implant process into a front-side surface of a first semiconductor substrate to form a first doped channel region extending into the first semiconductor substrate from the front-side surface;

forming a first interconnect structure on the front-side surface of the first semiconductor substrate;

thinning the first semiconductor substrate from a back-side surface of the first semiconductor substrate until the first doped channel region is exposed, wherein the back-side surface is opposite the front-side surface of the first semiconductor substrate; and

forming a conductive pad overlying and electrically coupled to the first doped channel region on the back-side surface of the first semiconductor substrate.

17. The method according to claim 16, further comprising:

forming an isolation structure around the first doped channel region.

18. The method according to claim 16, wherein the ion implant process further comprises:

forming a second doped channel region in the first semiconductor substrate and laterally offset from the first doped channel region, wherein the first and second doped channel regions comprise a first doping type;

forming a third doped channel region in the first semiconductor substrate, wherein the third doped channel region comprises a second doping type opposite the first doping type and an outer sidewall of the third doped channel region adjoins an inner sidewall of the second doped channel region; and

performing a rapid thermal anneal (RTA) process.

19. The method according to claim 18, wherein the first doping type is n-type and the second doping type is p-type, and wherein the RTA process has a maximum temperature of approximately 1010 degrees Celsius.

20. The method according to claim 16, further comprising:

bonding the first interconnect structure to a second interconnect structure of a logic IC die, wherein the logic IC die comprises a second semiconductor substrate underlying the second interconnect structure, and wherein at least one semiconductor device is disposed on the second semiconductor substrate and underlies the first doped channel region.

* * * * *