



US008400018B2

(12) **United States Patent**
Joannopoulos et al.

(10) **Patent No.:** **US 8,400,018 B2**
(45) **Date of Patent:** ***Mar. 19, 2013**

(54) **WIRELESS ENERGY TRANSFER WITH
HIGH-Q AT HIGH EFFICIENCY**

(75) Inventors: **John D. Joannopoulos**, Belmont, MA
(US); **Aristeidis Karalis**, Boston, MA
(US); **Marin Soljacic**, Belmont, MA
(US)

(73) Assignee: **Massachusetts Institute of Technology**,
Cambridge, MA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 187 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **12/639,962**

(22) Filed: **Dec. 16, 2009**

(65) **Prior Publication Data**

US 2010/0127574 A1 May 27, 2010

Related U.S. Application Data

(63) Continuation of application No. 12/553,957, filed on
Sep. 3, 2009, which is a continuation of application
No. 11/481,077, filed on Jul. 5, 2006, now Pat. No.
7,741,734.

(60) Provisional application No. 60/698,442, filed on Jul.
12, 2005.

(51) **Int. Cl.**
H03H 9/00 (2006.01)

(52) **U.S. Cl.** **307/104**

(58) **Field of Classification Search** 307/104;
333/195; 320/108

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

645,576	A	3/1900	Telsa
649,621	A	5/1900	Tesla
787,412	A	4/1905	Tesla
1,119,732	A	12/1914	Tesla
2,133,494	A	10/1938	Waters
3,517,350	A	6/1970	Beaver
3,535,543	A	10/1970	Dailey
4,088,999	A	5/1978	Fletcher et al.
5,027,709	A	7/1991	Slagle
5,053,774	A	10/1991	Schuermann et al.
5,070,293	A	12/1991	Ishii et al.
5,118,997	A	6/1992	El-Hamamsy

(Continued)

FOREIGN PATENT DOCUMENTS

CA	142352	8/1912
DE	38 24 972	1/1989

(Continued)

OTHER PUBLICATIONS

Abe et al. "A Noncontact Charger Using a Resonant Converter with
Parallel Capacitor of the Secondary Coil". IEEE, 36(2):444-451,
Mar./Apr. 2000.

(Continued)


Primary Examiner — Fritz M Fleming

(74) *Attorney, Agent, or Firm* — Fish & Richardson P.C.

(57) **ABSTRACT**

Described herein are embodiments of a source high-Q reso-
nator optionally coupled to an energy source, and a second
high-Q resonator, optionally coupled to an energy drain that
may be located a distance from the source resonator. The
source resonator and the second resonator may be coupled to
provide $\kappa/\sqrt{\Gamma_1 \Gamma_2} > 0.2$ via near-field wireless energy
transfer among the source resonator and the second resonator.

38 Claims, 7 Drawing Sheets

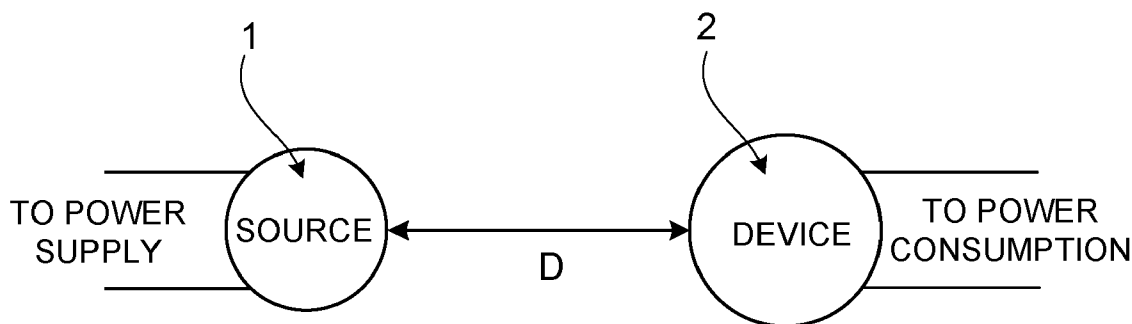

U.S. PATENT DOCUMENTS					
5,216,402 A	6/1993	Carosa	2003/0124050 A1	7/2003	Yadav et al.
5,287,112 A	2/1994	Schuermann	2003/0126948 A1	7/2003	Yadav et al.
5,341,083 A	8/1994	Klontz et al.	2003/0199778 A1	10/2003	Mickle et al.
5,367,242 A	11/1994	Hulman	2003/0214255 A1	11/2003	Baarman et al.
5,437,057 A	7/1995	Richley et al.	2004/0000974 A1	1/2004	Odenaal et al.
5,455,467 A	10/1995	Young et al.	2004/0100338 A1	5/2004	Clark
5,493,691 A	2/1996	Barrett	2004/0113847 A1	6/2004	Qi et al.
5,528,113 A	6/1996	Boys et al.	2004/0130915 A1	7/2004	Baarman
5,550,452 A	8/1996	Shirai et al.	2004/0130916 A1	7/2004	Baarman
5,898,579 A	4/1999	Boys et al.	2004/0150934 A1	8/2004	Baarman
5,986,895 A	11/1999	Stewart et al.	2004/0201361 A1	10/2004	Koh et al.
5,999,308 A	12/1999	Nelson et al.	2004/0222751 A1	11/2004	Mollema et al.
6,184,651 B1	2/2001	Fernandez et al.	2004/0232845 A1	11/2004	Baarman
6,436,299 B1	8/2002	Baarman et al.	2004/0233043 A1	11/2004	Yazawa et al.
6,450,946 B1	9/2002	Forsell	2004/0267501 A1	12/2004	Freed et al.
6,452,465 B1	9/2002	Brown et al.	2005/0007067 A1	1/2005	Baarman et al.
6,515,878 B1	2/2003	Meins et al.	2005/0085873 A1	4/2005	Gord et al.
6,597,076 B2	7/2003	Scheible et al.	2005/0093475 A1	5/2005	Kuennen et al.
6,664,770 B1	12/2003	Bartels	2005/0104064 A1	5/2005	Hegarty et al.
6,673,250 B2	1/2004	Kuennen et al.	2005/0116650 A1	6/2005	Baarman
6,731,071 B2	5/2004	Baarman	2005/0122058 A1	6/2005	Baarman et al.
6,749,119 B2	6/2004	Scheible et al.	2005/0122059 A1	6/2005	Baarman et al.
6,772,011 B2	8/2004	Dolgin	2005/0127849 A1	6/2005	Baarman et al.
6,798,716 B1	9/2004	Charych	2005/0127850 A1	6/2005	Baarman et al.
6,806,649 B2	10/2004	Mollema et al.	2005/0127866 A1	6/2005	Hamilton et al.
6,812,645 B2	11/2004	Baarman	2005/0151511 A1	7/2005	Chary
6,825,620 B2	11/2004	Kuennen et al.	2005/0156560 A1	7/2005	Shimaoka et al.
6,831,417 B2	12/2004	Baarman	2005/0288739 A1	12/2005	Hassler, Jr. et al.
6,844,702 B2	1/2005	Giannopoulos et al.	2005/0288740 A1	12/2005	Hassler, Jr. et al.
6,856,291 B2	2/2005	Mickle et al.	2005/0288741 A1	12/2005	Hassler, Jr. et al.
6,906,495 B2	6/2005	Cheng et al.	2006/0022636 A1	2/2006	Xian et al.
6,917,163 B2	7/2005	Baarman	2006/0061323 A1	3/2006	Cheng et al.
6,917,431 B2	7/2005	Soljagic et al.	2006/0132045 A1	6/2006	Baarman
6,937,130 B2	8/2005	Scheible et al.	2006/0181242 A1	8/2006	Freed et al.
6,960,968 B2	11/2005	Odendaal et al.	2006/0185809 A1	8/2006	Elfrink et al.
6,975,198 B2	12/2005	Baarman	2006/0202665 A1	9/2006	Hsu
7,042,196 B2	5/2006	Ka-Lai et al.	2006/0205381 A1	9/2006	Beart et al.
7,069,064 B2	6/2006	Gevorgian et al.	2006/0270440 A1	11/2006	Shearer et al.
7,116,200 B2	10/2006	Baarman et al.	2007/0021140 A1	1/2007	Keyes, IV et al.
7,118,240 B2	10/2006	Baarman et al.	2007/0064406 A1	3/2007	Beart
7,126,450 B2	10/2006	Baarman et al.	2007/0145830 A1	6/2007	Lee et al.
7,132,918 B2	11/2006	Baarman et al.	2007/0171681 A1	7/2007	Baarman
7,147,604 B1	12/2006	Allen et al.	2007/0178945 A1	8/2007	Cook et al.
7,180,248 B2	2/2007	Kuennen et al.	2007/0182367 A1	8/2007	Partovi
7,191,007 B2	3/2007	Desai et al.	2007/0222542 A1	9/2007	Joannopoulos et al.
7,212,414 B2	5/2007	Baarman	2007/0267918 A1	11/2007	Gyland
7,239,110 B2	7/2007	Cheng et al.	2007/0276538 A1	11/2007	Kjellsson et al.
7,248,017 B2	7/2007	Cheng et al.	2008/0012569 A1	1/2008	Hall et al.
7,375,492 B2	5/2008	Calhoon et al.	2008/0014897 A1	1/2008	Cook et al.
7,375,493 B2	5/2008	Calhoon et al.	2008/0030415 A1	2/2008	Homan et al.
7,378,817 B2	5/2008	Calhoon et al.	2008/0067874 A1	3/2008	Tseng
7,382,636 B2	6/2008	Baarman et al.	2008/0191638 A1	8/2008	Kuennen et al.
7,385,357 B2	6/2008	Kuennen et al.	2008/0197710 A1	8/2008	Kreitz et al.
7,462,951 B1	12/2008	Baarman	2008/0211320 A1	9/2008	Cook et al.
7,466,213 B2	12/2008	Lobl et al.	2008/0265684 A1	10/2008	Farkas
7,474,058 B2	1/2009	Baarman	2008/0266748 A1	10/2008	Lee
7,492,247 B2	2/2009	Schmidt et al.	2008/0278264 A1	11/2008	Karalis et al.
7,514,818 B2	4/2009	Abe et al.	2009/0010028 A1	1/2009	Baarman et al.
7,518,267 B2	4/2009	Baarman	2009/0015075 A1	1/2009	Cook et al.
7,525,283 B2	4/2009	Cheng et al.	2009/0033564 A1	2/2009	Cook et al.
7,599,743 B2	10/2009	Hassler, Jr. et al.	2009/0045772 A1	2/2009	Cook et al.
7,615,936 B2	11/2009	Baarman et al.	2009/0051224 A1	2/2009	Cook et al.
7,639,514 B2	12/2009	Baarman	2009/0058189 A1	3/2009	Cook et al.
7,741,734 B2	6/2010	Joannopoulos et al.	2009/0067198 A1	3/2009	Graham et al.
7,795,708 B2	9/2010	Katti	2009/0072627 A1	3/2009	Cook et al.
7,825,543 B2	11/2010	Karalis et al.	2009/0072628 A1	3/2009	Cook et al.
7,843,288 B2	11/2010	Lee et al.	2009/0072629 A1	3/2009	Cook et al.
8,022,576 B2	9/2011	Joannopoulos et al.	2009/0079268 A1	3/2009	Cook et al.
8,076,800 B2	12/2011	Joannopoulos et al.	2009/0085408 A1	4/2009	Bruhn
8,076,801 B2	12/2011	Karalis et al.	2009/0085706 A1	4/2009	Baarman et al.
8,084,889 B2	12/2011	Joannopoulos et al.	2009/0096413 A1	4/2009	Patovi et al.
8,097,983 B2	1/2012	Karalis et al.	2009/0102292 A1	4/2009	Cook et al.
2002/0032471 A1	3/2002	Loftin et al.	2009/0108679 A1	4/2009	Porwal
2002/0105343 A1	8/2002	Scheible et al.	2009/0108997 A1	4/2009	Petterson et al.
2002/0118004 A1	8/2002	Scheible et al.	2009/0127937 A1	5/2009	Widmer et al.
2003/0038641 A1	2/2003	Scheible	2009/0134712 A1	5/2009	Cook et al.
2003/0062794 A1	4/2003	Scheible et al.	2009/0146892 A1	6/2009	Shimizu et al.
2003/0062980 A1	4/2003	Scheible et al.	2009/0153273 A1	6/2009	Chen
			2009/0160261 A1	6/2009	Elo

2009/0167449	A1	7/2009	Cook et al.	2011/0162895	A1	7/2011	Karalis et al.
2009/0174263	A1	7/2009	Baarman et al.	2011/0169339	A1	7/2011	Karalis et al.
2009/0179502	A1	7/2009	Cook et al.	2011/0181122	A1	7/2011	Karalis et al.
2009/0189458	A1	7/2009	Kawasaki	2011/0193419	A1	8/2011	Karalis et al.
2009/0195332	A1	8/2009	Joannopoulos et al.	2011/0198939	A1	8/2011	Karalis et al.
2009/0195333	A1	8/2009	Joannopoulos et al.	2011/0221278	A1	9/2011	Karalis et al.
2009/0212636	A1	8/2009	Cook et al.	2011/0227528	A1	9/2011	Karalis et al.
2009/0213028	A1	8/2009	Cook et al.	2011/0227530	A1	9/2011	Karalis et al.
2009/0224608	A1	9/2009	Cook et al.	2011/0241618	A1	10/2011	Karalis et al.
2009/0224609	A1	9/2009	Cook et al.	2012/0068549	A1	3/2012	Karalis et al.
2009/0224856	A1	9/2009	Karalis et al.				
2009/0230777	A1	9/2009	Baarman et al.				
2009/0237194	A1	9/2009	Waffenschmidt et al.				
2009/0243394	A1	10/2009	Levine				
2009/0243397	A1	10/2009	Cook et al.				
2009/0251008	A1	10/2009	Sugaya				
2009/0267558	A1	10/2009	Jung				
2009/0267709	A1	10/2009	Joannopoulos et al.				
2009/0267710	A1	10/2009	Joannopoulos et al.				
2009/0271047	A1	10/2009	Wakamatsu				
2009/0271048	A1	10/2009	Wakamatsu				
2009/0273242	A1	11/2009	Cook				
2009/0281678	A1	11/2009	Wakamatsu				
2009/0284082	A1	11/2009	Mohammadian				
2009/0284083	A1	11/2009	Karalis et al.				
2009/0284218	A1	11/2009	Mohammadian et al.				
2009/0284220	A1	11/2009	Toncich et al.				
2009/0284227	A1	11/2009	Mohammadian et al.				
2009/0284245	A1	11/2009	Kirby et al.				
2009/0284369	A1	11/2009	Toncich et al.				
2009/0286470	A1	11/2009	Mohammadian et al.				
2009/0286475	A1	11/2009	Toncich et al.				
2009/0286476	A1	11/2009	Toncich et al.				
2009/0289595	A1	11/2009	Chen et al.				
2009/0299918	A1	12/2009	Cook et al.				
2010/0038970	A1	2/2010	Cook et al.				
2010/0096934	A1	4/2010	Joannopoulos et al.				
2010/0102639	A1	4/2010	Joannopoulos et al.				
2010/0102640	A1	4/2010	Joannopoulos et al.				
2010/0102641	A1	4/2010	Joannopoulos et al.				
2010/0117455	A1	5/2010	Joannopoulos et al.				
2010/0117456	A1	5/2010	Karalis et al.				
2010/0123353	A1	5/2010	Joannopoulos et al.				
2010/0123354	A1	5/2010	Joannopoulos et al.				
2010/0123355	A1	5/2010	Joannopoulos et al.				
2010/0127573	A1	5/2010	Joannopoulos et al.				
2010/0127575	A1	5/2010	Joannopoulos et al.				
2010/0133918	A1	6/2010	Joannopoulos et al.				
2010/0133919	A1	6/2010	Joannopoulos et al.				
2010/0133920	A1	6/2010	Joannopoulos et al.				
2010/0148589	A1	6/2010	Hamam et al.				
2010/0171370	A1	7/2010	Karalis et al.				
2010/0181844	A1	7/2010	Karalis et al.				
2010/0187911	A1	7/2010	Joannopoulos et al.				
2010/0201205	A1	8/2010	Karalis et al.				
2010/0207458	A1	8/2010	Joannopoulos et al.				
2010/0225175	A1	9/2010	Karalis et al.				
2010/0231053	A1	9/2010	Karalis et al.				
2010/0231163	A1	9/2010	Mashinsky				
2010/0237706	A1	9/2010	Karalis et al.				
2010/0237707	A1	9/2010	Karalis et al.				
2010/0237708	A1	9/2010	Karalis et al.				
2010/0253152	A1	10/2010	Karalis et al.				
2010/0264745	A1	10/2010	Karalis et al.				
2010/0277005	A1	11/2010	Karalis et al.				
2010/0289449	A1	11/2010	Elo				
2010/0327660	A1	12/2010	Karalis et al.				
2010/0327661	A1	12/2010	Karalis et al.				
2011/0012431	A1	1/2011	Karalis et al.				
2011/0018361	A1	1/2011	Karalis et al.				
2011/0025131	A1	2/2011	Karalis et al.				
2011/0043046	A1	2/2011	Joannopoulos et al.				
2011/0049996	A1	3/2011	Karalis et al.				
2011/0049998	A1	3/2011	Karalis et al.				
2011/0074218	A1	3/2011	Karalis et al.				
2011/0074347	A1	3/2011	Karalis et al.				
2011/0089895	A1	4/2011	Karalis et al.				
2011/0140544	A1	6/2011	Karalis et al.				
2011/0148219	A1	6/2011	Karalis et al.				

FOREIGN PATENT DOCUMENTS

DE	100 29147	12/2001
DE	200 16 655	2/2002
DE	102 21 484	11/2003
DE	103 04584	8/2004
DE	10 2005 036290	2/2007
DE	102006044057	4/2008
EP	1335477	8/2003
JP	02-097005	4/1990
JP	6-341410	12/1994
JP	11-188113	7/1999
JP	2006-074848	3/2006
KR	10-2007-0017804	2/2007
WO	WO 92/17929	10/1992
WO	WO 93/23908	11/1993
WO	WO 94/28560	12/1994
WO	WO 96/02970	2/1996
WO	WO 98/50993	11/1998
WO	WO 00/77910	12/2000
WO	WO 00/79910	12/2000
WO	WO 03/092329	11/2003
WO	WO 03/096361	11/2003
WO	WO 03/096512	11/2003
WO	WO 2004/038888	5/2004
WO	WO 2004/055654	7/2004
WO	WO 2004/073150	8/2004
WO	WO 2004/073166	8/2004
WO	WO 2004/073176	8/2004
WO	WO 2004/073177	8/2004
WO	WO 2004/112216	12/2004
WO	WO 2005/024865	3/2005
WO	WO 2005/060068	6/2005
WO	WO 2005/109597	11/2005
WO	WO 2005/109598	11/2005
WO	2006/011769	2/2006
WO	WO 2007/008646	1/2007
WO	WO 2007/020583	2/2007
WO	WO 2007/042952	4/2007
WO	WO 2007/084716	7/2007
WO	WO 2007/084717	7/2007
WO	WO 2008/109489	9/2008
WO	WO 2008/118178	10/2008
WO	WO 2009/009559	1/2009
WO	WO 2009/018568	2/2009
WO	WO 2009/023155	2/2009
WO	WO 2009/023646	2/2009
WO	WO 2009/033043	3/2009
WO	WO 2009/070730	6/2009
WO	WO 2009/126963	10/2009
WO	WO 2009/140506	11/2009
WO	WO 2009/149464	12/2009
WO	WO 2009/155000	12/2009
WO	WO 2010/039967	4/2010
WO	2011/062827	5/2011

OTHER PUBLICATIONS

Altchev et al. "Efficient Resonant Inductive Coupling Energy Transfer Using New Magnetic and Design Criteria". IEEE, pp. 1293-1298, 2005.

T. Aoki et al. Observation of strong coupling between one atom and a monolithic microresonator. Nature 443:671-674 (2006).

Apneseth et al. "Introducing wireless proximity switches" ABB Review Apr. 2002.

Baker et al., "Feedback Analysis and Design of RF Power Links for Low-Power Bionic Systems," IEEE Transactions on Biomedical Circuits and Systems, 1(1):28-38 (Mar. 2007).

- Balanis, C.A., "Antenna Theory: Analysis and Design," 3rd Edition, Sections 4.2, 4.3, 5.2, 5.3 (Wiley, New Jersey, 2005).
- Burri et al. "Invention Description" Feb. 5, 2008.
- Electricity Unplugged, Feature: Wireless Energy, *Physics World*, pp. 23-25 (Feb. 2009).
- Esser et al. "A New Approach to Power Supplies for Robots". IEEE, 27(5):872-875, Sep./Oct. 1991.
- Fenske et al. "Dielectric Materials at Microwave Frequencies". Applied Microwave & Wireless, pp. 92-100, 2000.
- C. Fernandez et al., "A simple dc-dc converter for the power supply of a cochlear implant", *IEEE*, pp. 1965-1970 (2003).
- D.H.Freedman "Power on a Chip". MIT Technology Review, Nov. 2004.
- Geyi, Wen. A Method for the Evaluation of Small Antenna Q. IEEE Transactions on Antennas and Propagation, vol. 51, No. 8, Aug. 2003.
- Haus, H.A., "Waves and Fields in Optoelectronics," Chapter 7 "Coupling of Modes—Resonators and Couplers" (Prentice-Hall, New Jersey, 1984).
- Heikkinen et al. "Performance and Efficiency of Planar Rectennas for Short-Range Wireless Power Transfer at 2.45 GHz". Microwave and Optical Technology Letters, 31(2):86-91, Oct. 20, 2001.
- Hirai et al. "Integral Motor with Driver and Wireless Transmission of Power and Information for Autonomous Subspindle Drive". IEEE, 15(1):13-20, Jan. 2000.
- Hirai et al. "Practical Study on Wireless Transmission of Power and Information for Autonomous Decentralized Manufacturing System". IEEE, 46(2):349-359, Apr. 1999.
- Hirai et al. "Study on Intelligent Battery Charging Using Inductive Transmission of Power and Information". IEEE, 15(2):335-345, Mar. 2000.
- Hirai et al. "Wireless Transmission of Power and Information and Information for Cableless Linear Motor Drive". IEEE 15(1):21-27, Jan. 2000.
- "Intel CTO Says Gap between Humans, Machines Will Close by 2050", *Intel News Release*, (See intel.com/.../20080821comp.htm?iid=S...) (Printed Nov. 6, 2009).
- M. V. Jacob et al. "Lithium Tantalate—A High Permittivity Dielectric Material for Microwave Communication Systems". Proceedings of IEEE TENCON—Poster Papers, pp. 1362-1366, 2003.
- Jackson, J.D., "Classical Electrodynamics," 3rd Edition, Sections 1.11, 5.5, 5.17, 6.9, 8.1, 8.8, 9.2, 9.3 (Wiley, New York, 1999).
- Aristeidis Karalis et al., "Efficient Wireless *non-radiative mid-range* energy transfer", *Annals of Physics*, vol. 323, pp. 34-48 (2008).
- Kawamura et al. "Wireless Transmission of Power and Information Through One High-Frequency Resonant AC Link Inverter for Robot Manipulator Applications". IEEE, 32(3):503-508, May/June 1996.
- Yoshihiro Konishi, *Microwave Electronic Circuit Technology*, Chapter 4, pp. 145-197 (Marcel Dekker, Inc., New York, NY 1998).
- Andre Kurs et al., "Wireless Power Transfer via Strongly Coupled Magnetic Resonances", *Science* vol. 317, pp. 83-86 (Jul. 6, 2007).
- Lee, "Antenna Circuit Design for RFID Applications," Microchip Technology Inc., AN710, 50 pages (2003).
- Lee, "RFID Coil Design," Microchip Technology Inc., AN678, 21 pages (1998).
- Liang et al., "Silicon waveguide two-photon absorption detector at 1.5 μm wavelength for autocorrelation measurements," *Applied Physics Letters*, 81(7):1323-1325 (Aug. 12, 2002).
- Microchip Technology Inc., "microID 13.56 MHz Design Guide—MCRF355/360 Reader Reference Design," 24 pages (2001).
- MIT Team Experimentally Demonstrates Wireless Power Transfer, Potentially Useful for Power Laptops, Cell-Phones Without Cords—Goodbye Wires . . . , by Franklin Hadley, Institute for Soldier Nanotechnologies, Massachusetts Institute of Technology (Jun. 7, 2007).
- O'Brien et al. "Analysis of Wireless Power Supplies for Industrial Automation Systems". IEEE, pp. 367-372, 2003.
- O'Brien et al. "Design of Large Air-Gap Transformers for Wireless Power Supplies". IEEE, pp. 1557-1562, 2003.
- J. B. Pendry. "A Chiral Route to Negative Refraction". *Science* 306:1353-1355 (2004).
- Gary Peterson, "MIT WiTricity Not So Original After All", *Feed Line No. 9*, (See <http://www.tfcbooks.com/articles/witricity.htm>) printed Nov. 12, 2009.
- "Physics Update, Unwired Energy", *Physics Today*, pp. 26, (Jan. 2007) (See <http://arxiv.org/abs/physics/0611063>).
- Powercast LLC. "White Paper" Powercast simply wire free, 2003.
- Sakamoto et al. "A Novel Circuit for Non-Contact Charging Through Electro-Magnetic Coupling". IEEE, pp. 168-174, 1992.
- Sekitani et al. "A large-area flexible wireless power transmission sheet using printed plastic MEMS switches and organic field-effect transistors". [Publication Unknown].
- Sekitani et al. "A large-area wireless power-transmission sheet using printed organic transistors and plastic MEMS switches" www.nature.com/naturematerials. Published online Apr. 29, 2007.
- S. Sensiper. Electromagnetic wave propagation on helical conductors. PhD Thesis, Massachusetts Institute of Technology, 1951.
- Soljacic. "Wireless Non-Radiative Energy Transfer—PowerPoint presentation". Massachusetts Institute of Technology, Oct. 6, 2005.
- Someya, Takao. "The world's first sheet-type wireless power transmission system". University of Tokyo, Dec. 12, 2006.
- Splashpower, "Splashpower—World Leaders in Wireless Power," PowerPoint presentation, 30 pages (Sep. 3, 2007).
- David H. Staelin et al., *Electromagnetic Waves*, Chapters 2, 3, 4, and 8, pp. 46-176 and 336-405 (Prentice Hall Upper Saddle River, New Jersey 1998).
- Nikola Tesla, "High Frequency Oscillators for Electro-Therapeutic and Other Purposes", *The Electrical Engineer*, vol. XXVI, No. 50 (Nov. 17, 1898).
- Nikola Tesla, "High Frequency Oscillators for Electro-Therapeutic and Other Purposes", *Proceedings of the IEEE*, vol. 87, No. 7, pp. 1282-1292 (Jul. 1999).
- Texas Instruments, "HF Antenna Design Notes—Technical Application Report," Literature No. 11-08-26-003, 47 pages (Sep. 2003).
- "The Big Story for CES 2007: The public debut of eCoupled Intelligent Wireless Power" Press Release, Fulton Innovation LLC, Las Vegas, NV, Dec. 27, 2006.
- "The world's first sheet-type wireless power transmission system: Will a socket be replaced by e-wall?" Press Release, Tokyo, Japan, Dec. 12, 2006.
- Thomsen et al., "Ultrahigh speed all-optical demultiplexing based on two-photon absorption in a laser diode," *Electronics Letters*, 34(19):1871-1872 (Sep. 17, 1998).
- "Unwired energy questions asked, answered", *Physics Today*, pp. 16-17 (Sep. 2007).
- Upm Rafsec, "Tutorial overview of inductively coupled RFID Systems," 7 pages (May 2003).
- Vandevoorde et al. "Wireless energy transfer for stand-alone systems: a comparison between low and high power applicability". Sensors and Actuators, A 92:305-311, 2001.
- David Vilkomerson et al., "Implantable Doppler System for Self-Monitoring Vascular Grafts", *IEEE Ultrasonics Symposium*, pp. 461-465 (2004).
- "Wireless Energy Transfer Can Potentially Recharge Laptops, Cell Phones Without Cords", by Marin Soljacic of Massachusetts Institute of Technology and Davide Castelvocchi of American Institute of Physics (Nov. 14, 2006).
- Clemens M. Zierhofer et al., "High-Efficiency Coupling-Insensitive Transcutaneous Power and Data Transmission Via an Inductive Link", *IEEE Transactions on Biomedical Engineering*, vol. 37, No. 7, pp. 716-722 (Jul. 1990).
- Examination Report for Australia Application No. 2006269374, dated Sep. 18, 2008.
- International Search Report and Written Opinion for International Application No. PCT/US2006/026480, dated Dec. 21, 2007.
- International Preliminary Report on Patentability for International Application No. PCT/US2006/026480, dated Jan. 29, 2008.
- International Search Report and Written Opinion for International Application No. PCT/US2007/070892, dated Mar. 3, 2008.
- International Search Report and Written Opinion for International Application No. PCT/US09/43970, dated Jul. 14, 2009.
- European Examination Report dated Jan. 15, 2009 in connection with Application No. 06 786 588.1-1242.
- International Preliminary Report on Patentability with regard to International Application No. PCT/US2007/070892 by Examiner Philippe Becamel dated Sep. 29, 2009.

- "Recharging, The Wireless Way—Even physicists forget to recharge their cell phones sometimes." by Angela Chang—PC Magazine, *ABC News Internet Ventures*, (2006).
- "Physics Promises Wireless Power" by Jonathan Fildes, Science and Technology Reporter, *BBC News*, (Nov. 15, 2006).
- "Wireless energy promise powers up" by Jonathan Fildes, *Science and Technology Report, BBC News*, (See <http://news.bbc.co.uk/2/hi/technology/6725955.stm>) (Jun. 7, 2007).
- "The technology with impact 2007", by Jonathan Fildes, *BBC News*, (Dec. 27, 2007).
- "In pictures: A year in technology", *BBC News*, (Dec. 28, 2007).
- "Man tries wirelessly boosting batteries", by Seth Borenstein, *AP Science Writer*, Boston.com, (See http://www.boston.com/business/technology/articles/2006/11/15/man_tries_wirelessly_b...) (Nov. 15, 2006).
- "The vision of an MIT physicist: Getting rid of pesky rechargers" by Gareth Cooks, *Globe Staff*, Boston.com, (Dec. 11, 2006).
- "MIT discovery could unplug your iPod forever", by Chris Reidy, *Globe staff*, Boston.com, (See http://www.boston.com/business/ticker/2007/06/mit_discovery_c.html) (Jun. 7, 2007).
- "Scientists light bulb with 'wireless electricity'", *www.Chinaview.cn*, (See http://news.xinhuanet.com/english/2007-06/08/content_6215681.htm) (Jun. 2007).
- "Look, Ma—no wires!—Electricity broadcast through the air may someday run your home", by Gregory M. Lamb, *Staff writer, The Christian Science Monitor*, (See <http://www.csmonitor.com/2006/1116/p14s01-stct.html>) (Nov. 15, 2006).
- "The end of the plug? Scientists invent wireless device that beams electricity through your home", by David Derbyshire, *Daily Mail*, (See http://www.dailymail.co.uk/pages/live/articles/technology/technology.html?in_article_id=4...) (Jun. 7, 2007).
- "Lab report: Pull the plug for a positive charge", by James Morgan, *The Herald*, Web Issue 2680 (Nov. 16, 2006).
- "Recharging gadgets without cables", *Infotech Online*, Printed from infotech.indiatimes.com (Nov. 17, 2006).
- "Electro-nirvana? Not so fast", by Alan Boyle, *MSNBC*, (Jun. 8, 2007).
- "'Evanescence coupling' could power gadgets wirelessly" by Celeste Biever, *NewScientistsTech.com*, (see <http://www.newscientisttech.com/article.ns?id=dn10575&print=true>) (Nov. 15, 2006).
- "Wireless Energy", by Clay Risen, *The New York Times*, (Dec. 9, 2007).
- "Wireless power transfer possible", *PressTV*, (See <http://www.presstv.ir/detail.aspx?id=12754§ionid=3510208>) (Jun. 11, 2007).
- "Outlets Are Out", by Phil Berardelli, *ScienceNOW Daily News, Science Now*, (See <http://sciencenow.sciencemag.org/cgi/content/full/2006/1114/2>) (Nov. 14, 2006).
- "The Power of Induction—Cutting the last cord could resonate with our increasingly gadget-dependent lives", by Davide Castelvecchi, *Science News Online*, vol. 172, No. 3, (Week of Jul. 21, 2007).
- "Wireless Energy Transfer May Power Devices at a Distance", *ScientificAmerican.com*, (Nov. 14, 2006).
- "Wireless Energy Lights Bulb from Seven Feet Away—Physicists vow to cut the cord between your laptop battery and the wall socket—with just a simple loop of wire", by JR Minkel, *ScientificAmerican.com*, (See <http://www.sciam.com/article.cfm?articleid=07511C52-E7F2-99DF-3FA6ED2D7DC9AA2...>) (Jun. 7, 2007).
- "Air Power—Wireless data connections are common—now scientists are working on wireless power", by Stephen Cass, *Sponsored by Spectrum*, (See <http://spectrum.ieee.org/computing/hardware/air-power>) (Nov. 2006).
- "Wireless revolution could spell end of plugs", by Roger Highfield, *Science Editor, Telegraph.co.uk*, (See <http://www.telegraph.co.uk/news/main.jhtml?xml=/news/2007/06/07/nwireless107.xml>) (Jun. 7, 2007).
- "Man tries wirelessly boosting batteries", by Seth Borenstein, *The Associated Press, USA Today*, (Nov. 16, 2006).
- "MIT's wireless electricity for mobile phones", by Miebi Sende, *Vanguard*, (See <http://www.vanguardngr.com/articles/2002/features/gsm/dsm211062007.htm>) (Jun. 11, 2007).
- "MIT Scientists Pave the Way for Wireless Battery Charging", by William M. Bulkeley, *The Wall Street Journal*, (See http://online.wsj.com/article/SB118123955549228045.html?mod=googlenews_wsj) (Jun. 8, 2007).
- Provisional Application, U.S. Appl. No. 60/908,383, filed Mar. 27, 2007.
- "Intel Moves to Free Gadgets of Their Recharging Cords", by John Markoff, *The New York Times*—nytimes.com, Aug. 21, 2008.
- G. Scheible et al., "Novel Wireless Power Supply System for Wireless Communication Devices in Industrial Automation Systems", *IEEE*, (2002).
- J. Schutz et al., "Load Adaptive Medium Frequency Resonant Power Supply", *IEEE*, (2002).
- Marin Soljacic et al., "Photonic-crystal slow-light enhancement of nonlinear phase sensitivity", *J. Opt. Soc. Am B*, vol. 19, No. 9, pp. 2052-2059 (Sep. 2002).
- Amnon Yariv et al., "Coupled-resonator optical waveguide: a proposal and analysis", *Optics Letters*, vol. 24, No. 11, pp. 711-713 (Jun. 1, 1999).
- International Search Report for International Application No. PCT/US09/58499 dated Dec. 10, 2009.
- PCT International Search Report and Written Opinion for PCT/US09/59244, Dec. 7, 2009, 12 pages.
- John C. Schuder et al., "An Inductively Coupled RF System for the Transmission of 1 kW of Power Through the Skin", *IEEE Transactions on Bio-Medical Engineering*, vol. BME-18, No. 4 (Jul. 1971).
- J. C. Schuder et al., "Energy Transport Into the Closed Chest From a Set of Very-Large Mutually Orthogonal Coils", *Communication Electronics*, vol. 64, pp. 527-534 (Jan. 1963).
- John C. Schuder "Powering an Artificial Heart: Birth of the Inductively Coupled-Radio Frequency System in 1960", *Artificial Organs*, vol. 26, No. 11, pp. 909-915 (2002).
- A. Mediano et al. "Design of class E amplifier with nonlinear and linear shunt capacitances for any duty cycle", *IEEE Trans. Microwave Theor. Tech.*, vol. 55, No. 3, pp. 484-492, (2007).
- H. Sekiya et al. "FM/PWM control scheme in class DE inverter", *IEEE Trans. Circuits Syst. I*, vol. 51, No. 7 (Jul. 2004).
- Andre Kurs et al., "Simultaneous mid-range power transfer to multiple devices", *Applied Physics Letters*, vol. 96, No. 044102 (2010).
- David Schneider, "A Critical Look at Wireless Power", *IEEE Spectrum*, (May 2010).
- Marin Soljacic, "Wireless nonradiative energy transfer", *Visions of Discovery New Light on Physics, Cosmology, and Consciousness*, Cambridge University Press, New York, NY pp. 530-542 (2011).
- Joseph C. Stark III, "Wireless Power Transmission Utilizing a Phased Array of Tesla Coils", *Master Thesis, Massachusetts Institute of Technology* (2004).
- International Search Report and Written Opinion of the International Searching Authority for International Application No. PCT/US2011/027868 dated Jul. 5, 2011.
- Non-Final Office Action for U.S. Appl. No. 13/036,177 dated May 15, 2012.
- Non-Final Office Action for U.S. Appl. No. 12/726,742 dated May 11, 2012.
- Non-Final Office Action for U.S. Appl. No. 13/030,395 dated May 17, 2012.
- Non-Final Office Action for U.S. Appl. No. 13/040,810 dated May 17, 2012.
- Non-Final Office Action for U.S. Appl. No. 12/648,604 dated Dec. 5, 2011.
- Non-Final Office Action for U.S. Appl. No. 13/078,511 dated May 15, 2012.
- Non-Final Office Action with regard to U.S. Appl. No. 12/639,958 dated Aug. 16, 2012 (21 pages).
- Non-Final Office Action with regard to U.S. Appl. No. 12/639,963 dated Aug. 31, 2012 (20 pages).
- Office Action with regard to U.S. Appl. No. 12/949,544 dated Sep. 5, 2012 (41 pages).
- Office Action with regard to U.S. Appl. No. 12/646,524 dated Oct. 1, 2012 (11 pages).
- Office Action with regard to U.S. Appl. No. 12/415,667 dated Oct. 5, 2012 (20 pages).

Office Action with regard to U.S. Appl. No. 12/639,967 dated Oct. 5, 2012 (21 pages).

Office Action with regard to U.S. Appl. No. 12/639,966 dated Oct. 9, 2012 (20 pages).

Office Action with regard to U.S. Appl. No. 12/868,852 dated Oct. 10, 2012 (26 pages).

Non-Final Office Action with regard to U.S. Appl. No. 12/649,635, dated Dec. 21, 2012 (41 pages).

Non-Final Office Action with regard to U.S. Appl. No. 12/649,777, dated Dec. 24, 2012 (43 pages).

Non-Final Office Action with regard to U.S. Appl. No. 12/649,813, dated Dec. 21, 2012 (40 pages).

Non-Final Office Action with regard to U.S. Appl. No. 12/649,852, dated Dec. 21, 2012 (41 pages).

Non-Final Office Action with regard to U.S. Appl. No. 12/649,904, dated Dec. 28, 2012 (43 pages).

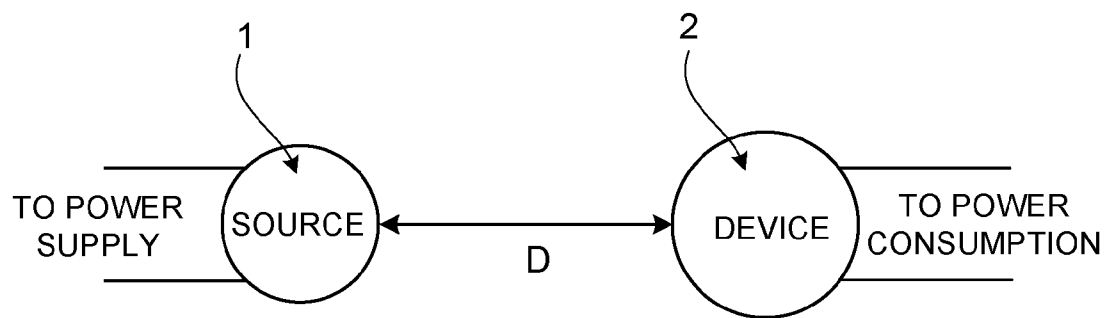


FIG. 1

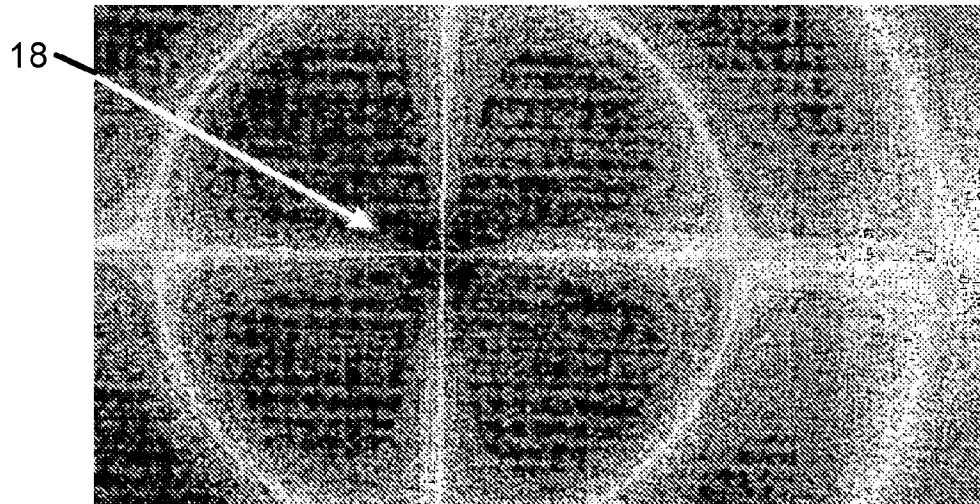


FIG. 2A

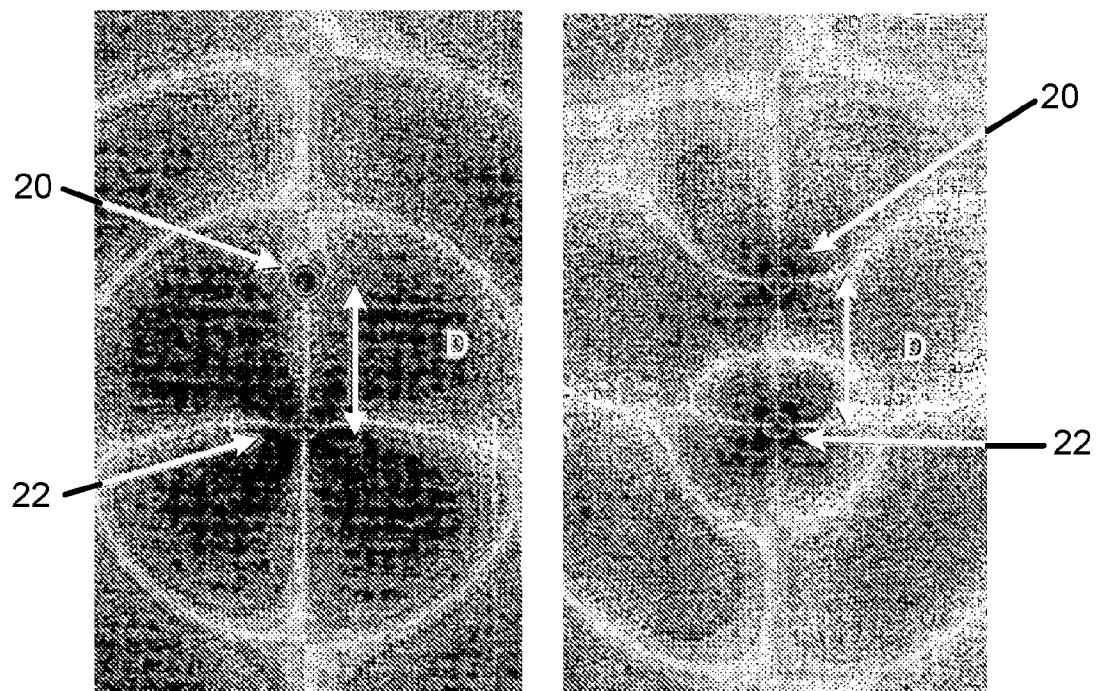


FIG. 2B

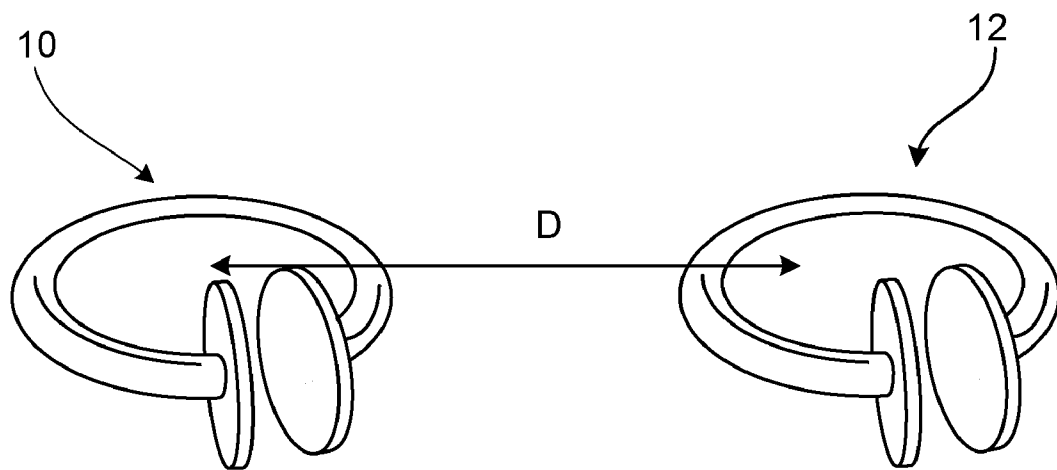


FIG. 3

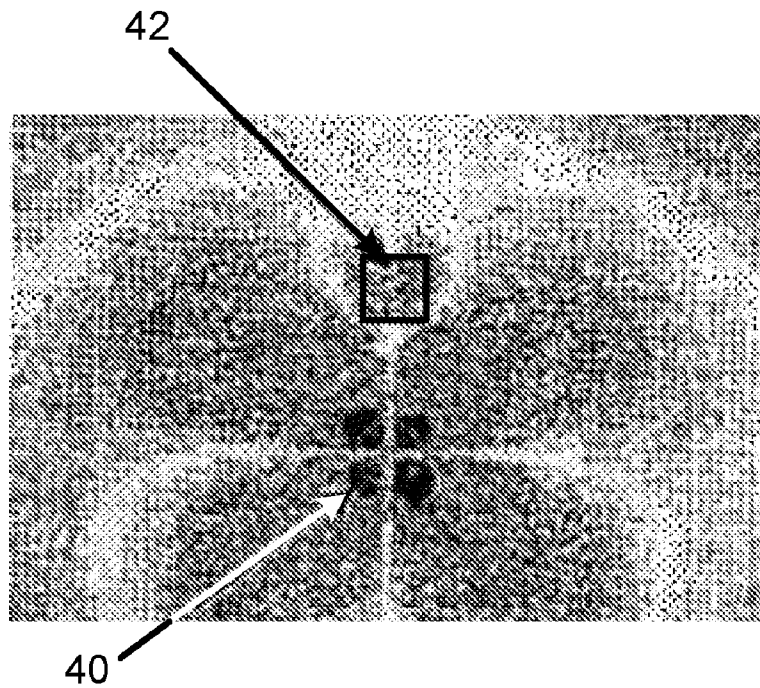


FIG. 4A

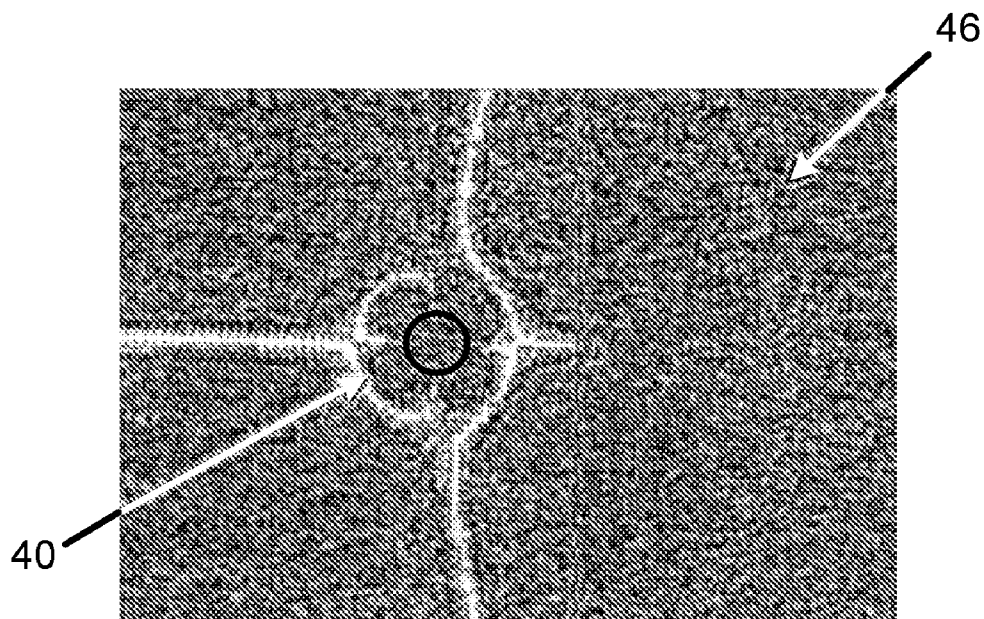


FIG. 4B

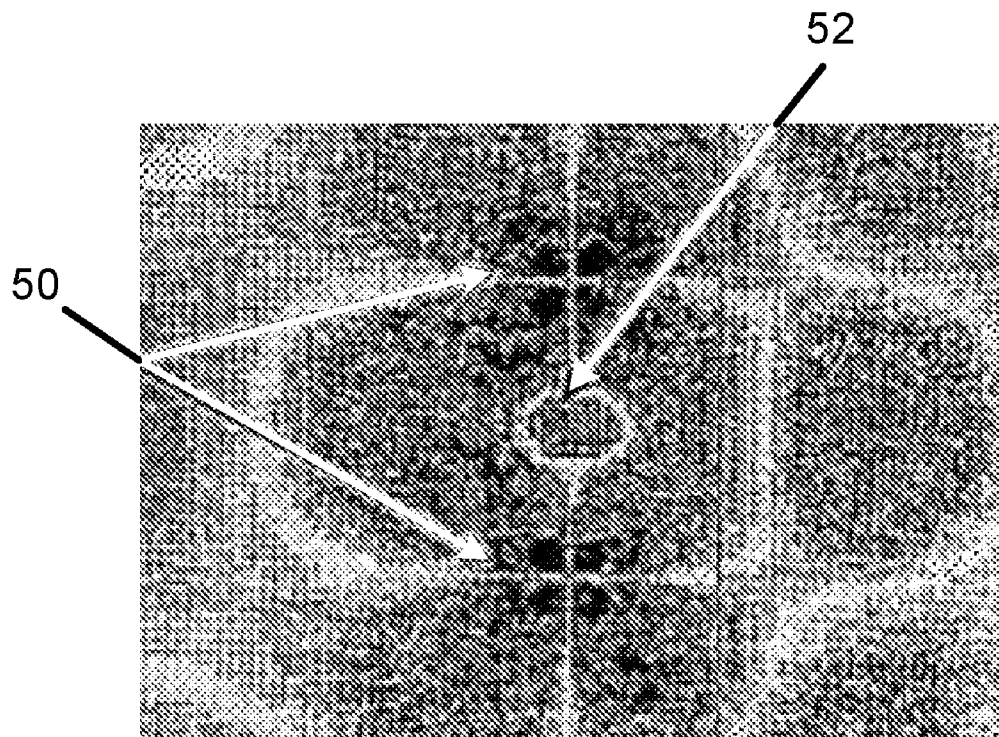


FIG. 5

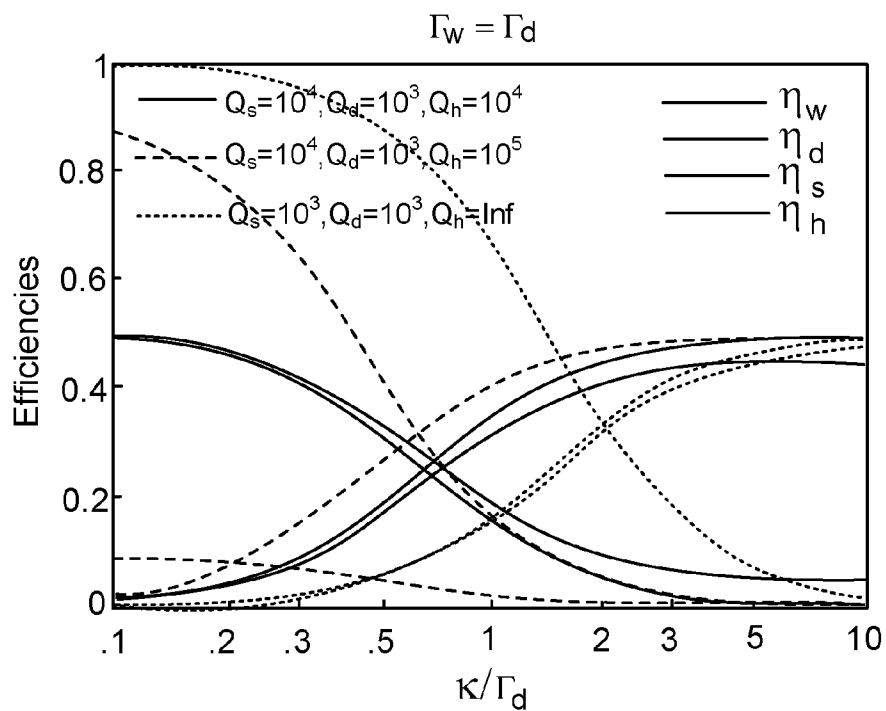


FIG. 6A

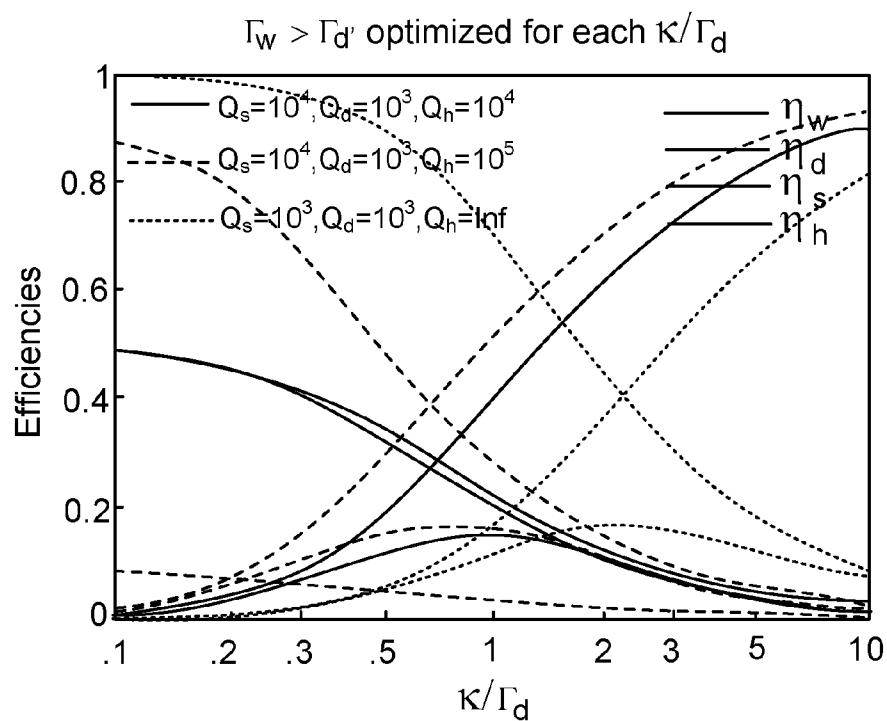


FIG. 6B

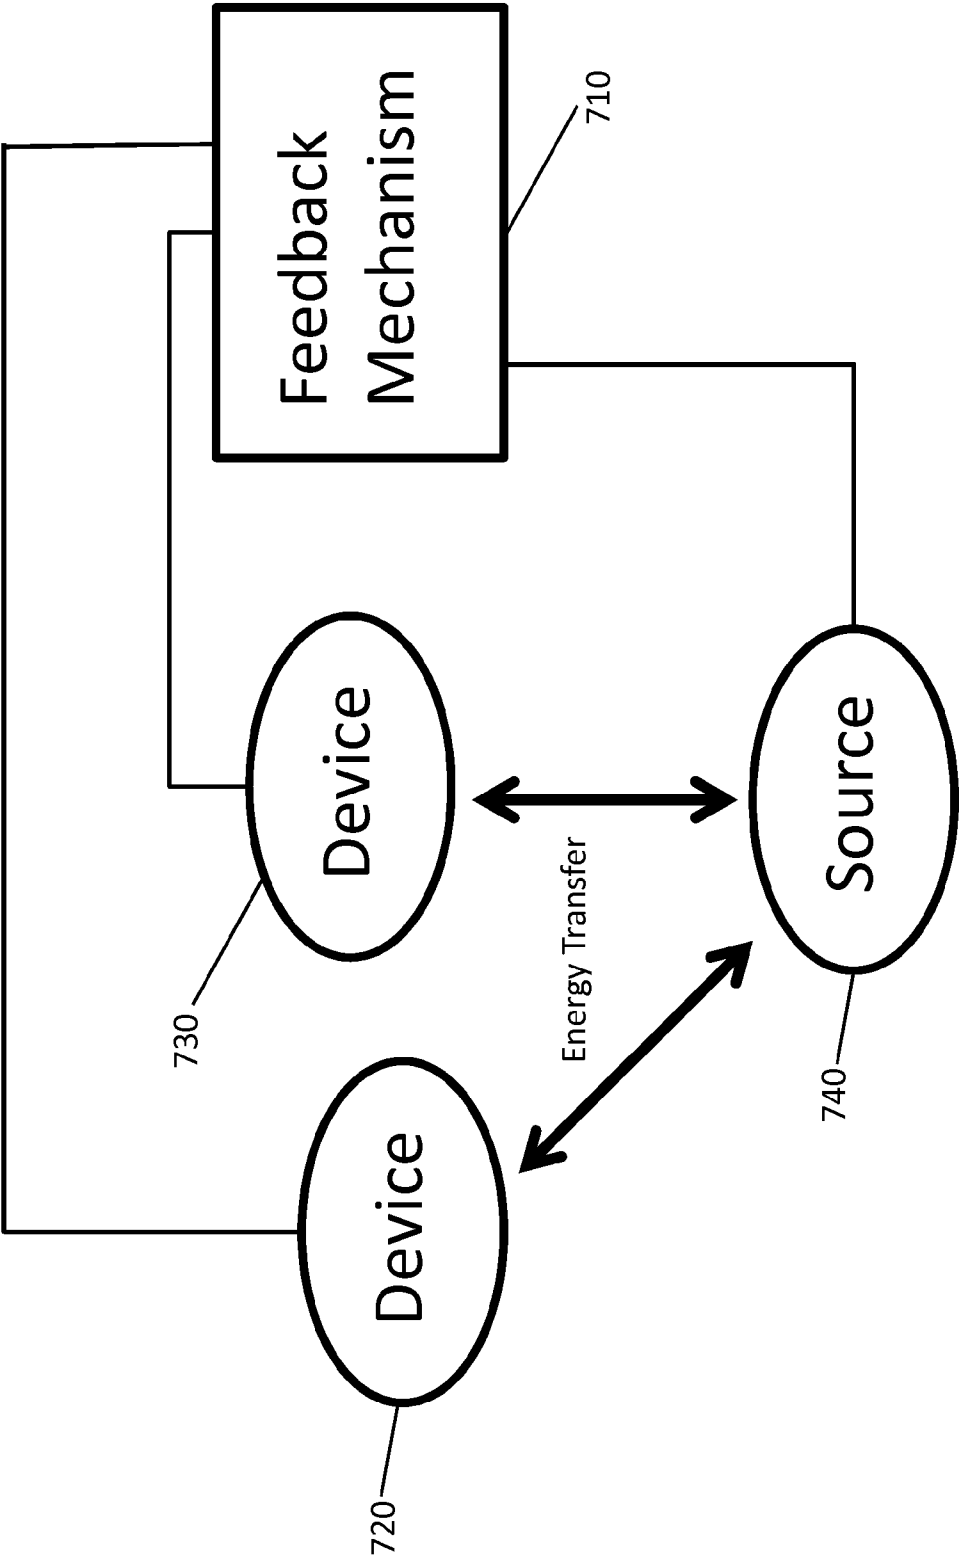


FIG. 7

1

WIRELESS ENERGY TRANSFER WITH HIGH-Q AT HIGH EFFICIENCY

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of co-pending U.S. Patent Application entitled WIRELESS NON-RADIATIVE ENERGY TRANSFER filed on Sep. 3, 2009 having Ser. No. 12/553,957 ('957 Application), the entirety of which is incorporated herein by reference. The '957 Application is a continuation of co-pending U.S. Patent Application entitled WIRELESS NON-RADIATIVE ENERGY TRANSFER filed on Jul. 5, 2006 and having Ser. No. 11/481,077 (077 Application), the entirety of which is incorporated herein by reference. The '077 Application claims the benefit of provisional application Ser. No. 60/698,442 filed Jul. 12, 2005 ('442 Application), the entirety of which is incorporated herein by reference.

This invention was made, in whole or in part by grant DMR-0213282 from the National Science Foundation. Accordingly, the Government may have certain rights in the invention.

BACKGROUND OF THE INVENTION

The invention relates to the field of oscillatory resonant electromagnetic modes, and in particular to oscillatory resonant electromagnetic modes, with localized slowly evanescent field patterns, for wireless non-radiative energy transfer.

In the early days of electromagnetism, before the electrical-wire grid was deployed, serious interest and effort was devoted towards the development of schemes to transport energy over long distances wirelessly, without any carrier medium. These efforts appear to have met with little, if any, success. Radiative modes of omni-directional antennas, which work very well for information transfer, are not suitable for such energy transfer, because a vast majority of energy is wasted into free space. Directed radiation modes, using lasers or highly-directional antennas, can be efficiently used for energy transfer, even for long distances (transfer distance $L_{TRANS} \gg L_{DEV}$, where L_{DEV} is the characteristic size of the device), but require existence of an uninteruptible line-of-sight and a complicated tracking system in the case of mobile objects.

Rapid development of autonomous electronics of recent years (e.g. laptops, cell-phones, house-hold robots, that all typically rely on chemical energy storage) justifies revisiting investigation of this issue. Today, the existing electrical-wire grid carries energy almost everywhere; even a medium-range wireless non-radiative energy transfer would be quite useful. One scheme currently used for some important applications relies on induction, but it is restricted to very close-range ($L_{TRANS} < L_{DEV}$) energy transfers.

SUMMARY OF THE INVENTION

According to one aspect of the invention, there is provided an electromagnetic energy transfer device. The electromagnetic energy transfer device includes a first resonator structure receiving energy from an external power supply. The first resonator structure has a first Q-factor. A second resonator structure is positioned distal from the first resonator structure, and supplies useful working power to an external load. The second resonator structure has a second Q-factor. The distance between the two resonators can be larger than the characteristic size of each resonator. Non-radiative energy trans-

2

fer between the first resonator structure and the second resonator structure is mediated through coupling of their resonant-field evanescent tails.

According to another aspect of the invention, there is provided a method of transferring electromagnetic energy. The method includes providing a first resonator structure receiving energy from an external power supply. The first resonator structure has a first Q-factor. Also, the method includes a second resonator structure being positioned distal from the first resonator structure, and supplying useful working power to an external load. The second resonator structure has a second Q-factor. The distance between the two resonators can be larger than the characteristic size of each resonator. Furthermore, the method includes transferring non-radiative energy between the first resonator structure and the second resonator structure through coupling of their resonant-field evanescent tails.

In another aspect, a method of transferring energy is disclosed including the steps of providing a first resonator structure receiving energy from an external power supply, said first resonator structure having a first resonant frequency ω_1 , and a first Q-factor Q_1 , and characteristic size L_1 . Providing a second resonator structure being positioned distal from said first resonator structure, at closest distance D , said second resonator structure having a second resonant frequency ω_2 , and a second Q-factor Q_2 , and characteristic size L_2 , where the two said frequencies ω_1 and ω_2 are close to within the narrower of the two resonance widths Γ_1 , and Γ_2 , and transferring energy non-radiatively between said first resonator structure and said second resonator structure, said energy transfer being mediated through coupling of their resonant-field evanescent tails, and the rate of energy transfer between said first resonator and said second resonator being denoted by κ , where non-radiative means D is smaller than each of the resonant wavelengths λ_1 and λ_2 , where c is the propagation speed of radiation in the surrounding medium.

Embodiments of the method may include any of the following features. In some embodiments, said resonators have $Q_1 > 100$ and $Q_2 > 100$, $Q_1 > 200$ and $Q_2 > 200$, $Q_1 > 500$ and $Q_2 > 500$, or even $Q_1 > 1000$ and $Q_2 > 1000$. In some such embodiments, $\kappa/\sqrt{\Gamma_1 \Gamma_2}$ may be greater than 0.2, greater than 0.5, greater than 1, greater than 2, or even greater than 5. In some such embodiments D/L_2 may be greater than 1, greater than 2, greater than 3, greater than 5.

In another aspect, an energy transfer device is disclosed which includes: a first resonator structure receiving energy from an external power supply, said first resonator structure having a first resonant frequency ω_1 , and a first Q-factor Q_1 , and characteristic size L_1 , and a second resonator structure being positioned distal from said first resonator structure, at closest distance D , said second resonator structure having a second resonant frequency ω_2 , and a second Q-factor Q_2 , and characteristic size L_2 .

The two said frequencies ω_1 and ω_2 are close to within the narrower of the two resonance widths Γ_1 , and Γ_2 . The non-radiative energy transfer between said first resonator structure and said second resonator structure is mediated through coupling of their resonant-field evanescent tails, and the rate of energy transfer between said first resonator and said second resonator is denoted by κ . The non-radiative means D is smaller than each of the resonant wavelengths λ_1 and λ_2 , where c is the propagation speed of radiation in the surrounding medium.

Embodiments of the device may include any of the following features. In some embodiments, said resonators have $Q_1 > 100$ and $Q_2 > 100$, $Q_1 > 200$ and $Q_2 > 200$, $Q_1 > 500$ and $Q_2 > 500$, or even $Q_1 > 1000$ and $Q_2 > 1000$. In some such

3

embodiments, $\kappa/\sqrt{\Gamma_1 \Gamma_2}$ may be greater than 0.2, greater than 0.5, greater than 1, greater than 2, or even greater than 5. In some such embodiments D/L_2 may be greater than 1, greater than 2, greater than 3, or even greater than 5.

In some embodiments, the resonant field in the device is electromagnetic.

In some embodiments, the first resonator structure includes a dielectric sphere, where the characteristic size L_1 is the radius of the sphere.

In some embodiments, the first resonator structure includes a metallic sphere, where the characteristic size L_1 is the radius of the sphere.

In some embodiments, the first resonator structure includes a metallodielectric sphere, where the characteristic size L_1 is the radius of the sphere.

In some embodiments, the first resonator structure includes a plasmonic sphere, where the characteristic size L_1 is the radius of the sphere.

In some embodiments, the first resonator structure includes a polaritonic sphere, where the characteristic size L_1 is the radius of the sphere.

In some embodiments, the first resonator structure includes a capacitively-loaded conducting-wire loop, where the characteristic size L_1 is the radius of the loop.

In some embodiments, the second resonator structure includes a dielectric sphere, where the characteristic size L_2 is the radius of the sphere.

In some embodiments, the second resonator structure includes a metallic sphere where the characteristic size L_2 is the radius of the sphere.

In some embodiments, the second resonator structure includes a metallodielectric sphere where the characteristic size L_2 is the radius of the sphere.

In some embodiments, the second resonator structure includes a plasmonic sphere where the characteristic size L_2 is the radius of the sphere.

In some embodiments, the second resonator structure includes a polaritonic sphere where the characteristic size L_2 is the radius of the sphere.

In some embodiments, the second resonator structure includes a capacitively-loaded conducting-wire loop where the characteristic size L_2 is the radius of the loop.

In some embodiments, the resonant field in the device is acoustic.

It is to be understood that embodiments of the above described methods and devices may include any of the above listed features, alone or in combination.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram illustrating an exemplary embodiment of the invention;

FIG. 2A is a numerical FDTD result for a high-index disk cavity of radius r along with the electric field; FIG. 2B is a numerical FDTD result for a medium-distance coupling between two resonant disk cavities: initially, all the energy is in one cavity (left panel); after some time both cavities are equally excited (right panel).

FIG. 3 is schematic diagram demonstrating two capacitively-loaded conducting-wire loops;

FIGS. 4A-4B are numerical FDTD results for reduction in radiation-Q of the resonant disk cavity due to scattering from extraneous objects;

FIG. 5 is a numerical FDTD result for medium-distance coupling between two resonant disk cavities in the presence of extraneous objects; and

4

FIGS. 6A-6B are graphs demonstrating efficiencies of converting the supplied power into useful work (η_w), radiation and ohmic loss at the device (η_d), and the source (η_s), and dissipation inside a human (η_h), as a function of the coupling-to-loss ratio κ/Γ_d ; in panel (a) Γ_w is chosen so as to minimize the energy stored in the device, while in panel (b) Γ_w is chosen so as to maximize the efficiency η_w for each κ/Γ_d .

FIG. 7 is a schematic diagram of a feedback mechanism to correct the resonators exchanging wireless energy for detuning because of the effect of an extraneous object.

DETAILED DESCRIPTION OF THE INVENTION

In contrast to the currently existing schemes, the invention provides the feasibility of using long-lived oscillatory resonant electromagnetic modes, with localized slowly evanescent field patterns, for wireless non-radiative energy transfer. The basis of this technique is that two same-frequency resonant objects tend to couple, while interacting weakly with other off-resonant environmental objects. The purpose of the invention is to quantify this mechanism using specific examples, namely quantitatively address the following questions: up to which distances can such a scheme be efficient and how sensitive is it to external perturbations. Detailed theoretical and numerical analysis show that a mid-range ($L_{\text{TRANS}} \approx \text{few} \times L_{\text{DEV}}$) wireless energy-exchange can actually be achieved, while suffering only modest transfer and dissipation of energy into other off-resonant objects.

The omnidirectional but stationary (non-lossy) nature of the near field makes this mechanism suitable for mobile wireless receivers. It could therefore have a variety of possible applications including for example, placing a source connected to the wired electricity network on the ceiling of a factory room, while devices, such as robots, vehicles, computers, or similar, are roaming freely within the room. Other possible applications include electric-engine buses, RFIDs, and perhaps even nano-robots.

The range and rate of the inventive wireless energy-transfer scheme are the first subjects of examination, without considering yet energy drainage from the system for use into work. An appropriate analytical framework for modeling the exchange of energy between resonant objects is a weak-coupling approach called "coupled-mode theory". FIG. 1 is a schematic diagram illustrating a general description of the invention. The invention uses a source and device to perform energy transferring. Both the source 1 and device 2 are resonator structures, and are separated a distance D from each other. In this arrangement, the electromagnetic field of the system of source 1 and device 2 is approximated by $F(r,t) \approx a_1(t)F_1(r) + a_2(t)F_2(r)$, where $F_{1,2}(r) = [E_{1,2}(r) H_{1,2}(r)]$ are the eigenmodes of source 1 and device 2 alone, and then the field amplitudes $a_1(t)$ and $a_2(t)$ can be shown to satisfy the "coupled-mode theory":

$$\begin{aligned} \frac{da_1}{dt} &= -i(\omega_1 - i\Gamma_1)a_1 + i\kappa_{11}a_1 + i\kappa_{12}a_2 \\ \frac{da_2}{dt} &= -i(\omega_2 - i\Gamma_2)a_2 + i\kappa_{22}a_2 + i\kappa_{21}a_1, \end{aligned} \quad (1)$$

where $\omega_{1,2}$ are the individual eigen-frequencies, $\Gamma_{1,2}$ are the resonance widths due to the objects' intrinsic (absorption, radiation etc.) losses, $\kappa_{12,21}$ are the coupling coefficients, and $\kappa_{11,22}$ model the shift in the complex frequency of each object due to the presence of the other.

The approach of Eq. 1 has been shown, on numerous occasions, to provide an excellent description of resonant phenomena for objects of similar complex eigen-frequencies (namely $|\omega_1 - \omega_2| \ll |\kappa_{12,21}|$ and $\Gamma_1 \approx \Gamma_2$), whose resonances are reasonably well defined (namely $\Gamma_{1,2} \ll \text{Im}\{\kappa_{11,22}\} \ll |\kappa_{12,21}|$) and in the weak coupling limiting (namely $|\kappa_{12,21}| \ll \omega_{1,2}$). Coincidentally, these requirements also enable optimal operation for energy transfer. Also, Eq. (1) show that the energy exchange can be nearly perfect at exact resonance ($\omega_1 = \omega_2$ and $\Gamma_1 = \Gamma_2$), and that the losses are minimal when the “coupling-time” is much shorter than all “loss-times”. Therefore, the invention requires resonant modes of high $Q = \omega/(2\Gamma)$ for low intrinsic-loss rates $\Gamma_{1,2}$, and with evanescent tails significantly longer than the characteristic sizes L_1 and L_2 of the two objects for strong coupling rate $|\kappa_{12,21}|$ over large distances D , where D is the closest distance between the two objects. This is a regime of operation that has not been studied extensively, since one usually prefers short tails, to minimize interference with nearby devices.

Objects of nearly infinite extent, such as dielectric waveguides, can support guided modes whose evanescent tails are decaying exponentially in the direction away from the object, slowly if tuned close to cutoff, and can have nearly infinite Q . To implement the inventive energy-transfer scheme, such geometries might be suitable for certain applications, but usually finite objects, namely ones that are topologically surrounded everywhere by air, are more appropriate.

Unfortunately, objects of finite extent cannot support electromagnetic states that are exponentially decaying in all directions in air, since in free space: $\vec{k}^2 = \omega^2/c^2$. Because of this, one can show that they cannot support states of infinite Q . However, very long-lived (so-called “high- Q ”) states can be found, whose tails display the needed exponential-like decay away from the resonant object over long enough distances before they turn oscillatory (radiative). The limiting surface, where this change in the field behavior happens, is called the “radiation caustic”, and, for the wireless energy-transfer scheme to be based on the near field rather than the far/radiation field, the distance between the coupled objects must be such that one lies within the radiation caustic of the other.

The invention is very general and any type of resonant structure satisfying the above requirements can be used for its implementation. As examples and for definiteness, one can choose to work with two well-known, but quite different electromagnetic resonant systems: dielectric disks and capacitively-loaded conducting-wire loops. Even without optimization, and despite their simplicity, both will be shown to exhibit fairly good performance. Their difference lies mostly in the frequency range of applicability due to practical considerations, for example, in the optical regime dielectrics prevail, since conductive materials are highly lossy.

Consider a 2D dielectric disk cavity of radius r and permittivity ϵ surrounded by air that supports high- Q whispering-gallery modes, as shown in FIG. 2A. Such a cavity is studied using both analytical modeling, such as separation of variables in cylindrical coordinates and application of boundary conditions, and detailed numerical finite-difference-time-domain (FDTD) simulations with a resolution of 30 pts/ r . Note that the physics of the 3D case should not be significantly different, while the analytical complexity and numerical requirements would be immensely increased. The results of the two methods for the complex eigen-frequencies and the field patterns of the so-called “leaky” eigenmodes are in an excellent agreement with each other for a variety of geometries and parameters of interest.

The radial modal decay length, which determines the coupling strength $\kappa = |\kappa_{21}| = |\kappa_{12}|$, is on the order of the wavelength, therefore, for near-field coupling to take place between cavities whose distance is much larger than their size, one needs subwavelength-sized resonant objects ($t \ll \lambda$). High-radiation- Q and long-tailed subwavelength resonances can be achieved, when the dielectric permittivity ϵ is as large as practically possible and the azimuthal field variations (of principal number m) are slow (namely m is small).

One such TE-polarized dielectric-cavity mode, which has the favorable characteristics $Q_{rad} = 1992$ and $\lambda/r = 20$ using $\epsilon = 147.7$ and $m = 2$, is shown in FIG. 2A, and will be the “test” cavity **18** for all subsequent calculations for this class of resonant objects. Another example of a suitable cavity has $Q_{rad} = 9100$ and $\lambda/r = 10$ using $\epsilon = 65.61$ and $m = 3$. These values of c might at first seem unrealistically large. However, not only are there in the microwave regime (appropriate for meter-range coupling applications) many materials that have both reasonably high enough dielectric constants and low losses, for example, Titania: $\epsilon \approx 96$, $\text{Im}\{\epsilon\}/\epsilon \approx 10^{-3}$; Barium tetratitanate: $\epsilon \approx 37$, $\text{Im}\{\epsilon\}/\epsilon \approx 10^{-4}$; Lithium tantalite: $\epsilon \approx 40$, $\text{Im}\{\epsilon\}/\epsilon \approx 10^{-4}$; etc.), but also ϵ could instead signify the effective index of other known subwavelength ($\lambda/r \gg 1$) surface-wave systems, such as surface-plasmon modes on surfaces of metal-like (negative- ϵ) materials or metallodielectric photonic crystals.

With regards to material absorption, typical loss tangents in the microwave (e.g. those listed for the materials above) suggest that $Q_{abs} \sim \epsilon/\text{Im}\{\epsilon\} \sim 10000$. Combining the effects of radiation and absorption, the above analysis implies that for a properly designed resonant device-object d a value of $Q_d \sim 2000$ should be achievable. Note though, that the resonant source s will in practice often be immobile, and the restrictions on its allowed geometry and size will typically be much less stringent than the restrictions on the design of the device; therefore, it is reasonable to assume that the radiative losses can be designed to be negligible allowing for $Q_s \sim 10000$, limited only by absorption.

To calculate now the achievable rate of energy transfer, one can place two of the cavities **20**, **22** at distance D between their centers, as shown in FIG. 2B. The normal modes of the combined system are then an even and an odd superposition of the initial modes and their frequencies are split by the coupling coefficient κ , which we want to calculate. Analytically, coupled-mode theory gives for dielectric objects $\kappa_{12} \cong \omega_2/2 \cdot \int d^3r \mathbf{E}_1^*(r) \mathbf{E}_2(r) \epsilon_1(r) / \int d^3r |\mathbf{E}_1(r)|^2 \epsilon(r)$, where $\epsilon_{1,2}(r)$ denote the dielectric functions of only object **1** alone or **2** alone excluding the background dielectric (free space) and $\epsilon(r)$ the dielectric function of the entire space with both objects present. Numerically, one can find κ using FDTD simulations either by exciting one of the cavities and calculating the energy-transfer time to the other or by determining the split normal-mode frequencies. For the “test” disk cavity the radius r_c of the radiation caustic is $r_c = 11r$, and for non-radiative coupling $D < r_c$, therefore here one can choose $D/r = 10, 7, 5, 3$. Then, for the mode of FIG. 3, which is odd with respect to the line that connects the two cavities, the analytical predictions are $\omega/2\kappa = 1602, 771, 298, 48$, while the numerical predictions are $\omega/2\kappa = 1717, 770, 298, 47$ respectively, so the two methods agree well. The radiation fields of the two initial cavity modes interfere constructively or destructively depending on their relative phases and amplitudes, leading to increased or decreased net radiation loss respectively, therefore for any cavity distance the even and odd normal modes have Q s that are one larger and one smaller than the initial single-cavity $Q = 1992$ (a phenomenon not captured by coupled-mode theory), but in a way that the

average Γ is always approximately $\Gamma \approx \omega/2Q$. Therefore, the corresponding coupling-to-loss ratios are $\kappa/T=1.16, 2.59, 6.68, 42.49$, and although they do not fall in the ideal operating regime $\kappa/T \gg 1$, the achieved values are still large enough to be useful for applications.

Consider a loop **10** or **12** of N coils of radius r of conducting wire with circular cross-section of radius a surrounded by air, as shown in FIG. **3**. This wire has inductance $L = \mu_o N^2 r [\ln(8r/a) - 2]$, where μ_o is the magnetic permeability of free space, so connecting it to a capacitance C will make the loop resonant at frequency $\omega = 1/\sqrt{LC}$. The nature of the resonance lies in the periodic exchange of energy from the electric field inside the capacitor due to the voltage across it to the magnetic field in free space due to the current in the wire. Losses in this resonant system consist of ohmic loss inside the wire and radiative loss into free space.

For non-radiative coupling one should use the near-field region, whose extent is set roughly by the wavelength λ , therefore the preferable operating regime is that where the loop is small ($r \ll \lambda$). In this limit, the resistances associated with the two loss channels are respectively $R_{ohm} = \sqrt{\mu_o \rho \omega / 2} N r / a$ and $R_{rad} = \pi / 6 \eta_o N^2 (\omega r / c)^4$, where ρ is the resistivity of the wire material and $\eta_o \approx 120\pi \Omega$ is the impedance of free space. The quality factor of such a resonance is then $Q = \omega L / (R_{ohm} + R_{rad})$ and is highest for some frequency determined by the system parameters: at lower frequencies it is dominated by ohmic loss and at higher frequencies by radiation.

To get a rough estimate in the microwave, one can use one coil ($N=1$) of copper ($\rho = 1.69 \cdot 10^{-8} \Omega m$) wire and then for $r=1$ cm and $a=1$ mm, appropriate for example for a cell phone, the quality factor peaks to $Q=1225$ at $f=380$ MHz, for $r=30$ cm and $a=2$ mm for a laptop or a household robot $Q=1103$ at $f=17$ MHz, while for $r=1$ m and $a=4$ mm (that could be a source loop on a room ceiling) $Q=1315$ at $f=5$ MHz. So in general, expected quality factors are $Q \approx 1000-1500$ at $\lambda/r \approx 50-80$, namely suitable for near-field coupling.

The rate for energy transfer between two loops **10** and **12** at distance D between their centers, as shown in FIG. **3**, is given by $\kappa_{12} = \omega M / 2\sqrt{L_1 L_2}$, where M is the mutual inductance of the two loops **10** and **12**. In the limit $r \ll D \ll \lambda$ one can use the quasi-static result $M = \pi / 4 \mu_o N_1 N_2 (r_1 r_2)^2 / D^3$, which means that $\omega / 2\kappa \sim (D/\sqrt{r_1 r_2})^3$. For example, by choosing again $D/r=10, 8, 6$ one can get for two loops of $r=1$ cm, same as used before, that $\omega / 2\kappa = 3033, 1553, 655$ respectively, for the $r=30$ cm that $\omega / 2\kappa = 7131, 3651, 1540$, and for the $r=1$ m that $\omega / 2\kappa = 6481, 3318, 1400$. The corresponding coupling-to-loss ratios peak at the frequency where peaks the single-loop Q and are $\kappa/T = 0.4, 0.79, 1.97$ and $0.15, 0.3, 0.72$ and $0.2, 0.4, 0.94$ for the three loop-kinds and distances. An example of dissimilar loops is that of a $r=1$ m (source on the ceiling) loop and a $r=30$ cm (household robot on the floor) loop at a distance $D=3$ m (room height) apart, for which $\kappa/\sqrt{L_1 L_2} = 0.88$ peaks at $f=6.4$ MHz, in between the peaks of the individual Q 's. Again, these values are not in the optimal regime $\kappa/T \gg 1$, but will be shown to be sufficient.

It is important to appreciate the difference between this inductive scheme and the already used close-range inductive schemes for energy transfer in that those schemes are non-resonant. Using coupled-mode theory it is easy to show that, keeping the geometry and the energy stored at the source fixed, the presently proposed resonant-coupling inductive mechanism allows for Q approximately 1000 times more power delivered for work at the device than the traditional non-resonant mechanism, and this is why mid-range energy transfer is now possible. Capacitively-loaded conductive

loops are actually being widely used as resonant antennas (for example in cell phones), but those operate in the far-field regime with $r/\lambda \sim 1$, and the radiation Q 's are intentionally designed to be small to make the antenna efficient, so they are not appropriate for energy transfer.

Clearly, the success of the inventive resonance-based wireless energy-transfer scheme depends strongly on the robustness of the objects' resonances. Therefore, their sensitivity to the near presence of random non-resonant extraneous objects is another aspect of the proposed scheme that requires analysis. The interaction of an extraneous object with a resonant object can be obtained by a modification of the coupled-mode-theory model in Eq. (1), since the extraneous object either does not have a well-defined resonance or is far-off-resonance, the energy exchange between the resonant and extraneous objects is minimal, so the term κ_{12} in Eq. (1) can be dropped. The appropriate analytical model for the field amplitude in the resonant object $a_1(t)$ becomes:

$$\frac{da_1}{dt} = -i(\omega_1 - i\Gamma_1)a_1 + i\kappa_{11}a_1 \quad (2)$$

Namely, the effect of the extraneous object is just a perturbation on the resonance of the resonant object and it is two-fold: First, it shifts its resonant frequency through the real part of κ_{11} , thus detuning it from other resonant objects. As shown in FIG. **7**, this is a problem that can be fixed rather easily by applying a feedback mechanism **710** to every device (e.g., device resonators **720** and **730**) that corrects its frequency, such as through small changes in geometry, and matches it to that of the source resonator **740**. Second, it forces the resonant object to lose modal energy due to scattering into radiation from the extraneous object through the induced polarization or currents in it, and due to material absorption in the extraneous object through the imaginary part of κ_{11} . This reduction in Q can be a detrimental effect to the functionality of the energy-transfer scheme, because it cannot be remedied, so its magnitude must be quantified.

In the first example of resonant objects that have been considered, the class of dielectric disks, small, low-index, low-material-loss or far-away stray objects will induce small scattering and absorption. To examine realistic cases that are more dangerous for reduction in Q , one can therefore place the "test" dielectric disk cavity **40** close to: a) another off-resonance object **42**, such as a human being, of large $\text{Re}\{\epsilon\}=49$ and $\text{Im}\{\epsilon\}=16$ and of same size but different shape, as shown in FIG. **4A**; and b) a roughened surface **46**, such as a wall, of large extent but of small $\text{Re}\{\epsilon\}=2.5$ and $\text{Im}\{\epsilon\}=0.05$, as shown in FIG. **4B**.

Analytically, for objects that interact with a small perturbation the reduced value of radiation- Q due to scattering could be estimated using the polarization $\int d^3r |E_1(r) \cdot \text{Re}\{\epsilon_X(r)\}|^2$ induced by the resonant cavity **1** inside the extraneous object $X=42$ or roughened surface $X=46$. Since in the examined cases either the refractive index or the size of the extraneous objects is large, these first-order perturbation-theory results would not be accurate enough, thus one can only rely on numerical FDTD simulations. The absorption- Q inside these objects can be estimated through $\text{Im}\{\kappa_{11}\} = \omega_1 / 2 \cdot \int d^3r |E_1(r)|^2 \text{Im}\{\epsilon_X(r)\} / \int d^3r |E_1(r)|^2 \epsilon(r)$.

Using these methods, for distances $D/r=10, 7, 5, 3$ between the cavity and extraneous-object centers one can find that $Q_{rad}=1992$ is respectively reduced to $Q_{rad}=1988, 1258, 702, 226$, and that the absorption rate inside the object is $Q_{abs}=312530, 86980, 21864, 1662$, namely the resonance of

the cavity is not detrimentally disturbed from high-index and/or high-loss extraneous objects, unless the (possibly mobile) object comes very close to the cavity. For distances $D/r=10, 7, 5, 3, 0$ of the cavity to the roughened surface we find respectively $Q_{rad}=2101, 2257, 1760, 1110, 572$, and $Q_{abs}>4000$, namely the influence on the initial resonant mode is acceptably low, even in the extreme case when the cavity is embedded on the surface. Note that a close proximity of metallic objects could also significantly scatter the resonant field, but one can assume for simplicity that such objects are not present.

Imagine now a combined system where a resonant source-object s is used to wirelessly transfer energy to a resonant device-object d but there is an off-resonance extraneous-object e present. One can see that the strength of all extrinsic loss mechanisms from e is determined by $|E_s(r_e)|^2$, by the square of the small amplitude of the tails of the resonant source, evaluated at the position r_e of the extraneous object. In contrast, the coefficient of resonant coupling of energy from the source to the device is determined by the same-order tail amplitude $|E_s(r_d)|$, evaluated at the position r_d of the device, but this time it is not squared! Therefore, for equal distances of the source to the device and to the extraneous object, the coupling time for energy exchange with the device is much shorter than the time needed for the losses inside the extraneous object to accumulate, especially if the amplitude of the resonant field has an exponential-like decay away from the source. One could actually optimize the performance by designing the system so that the desired coupling is achieved with smaller tails at the source and longer at the device, so that interference to the source from the other objects is minimal.

The above concepts can be verified in the case of dielectric disk cavities by a simulation that combines FIGS. 2A-2B and 4A-4B, namely that of two (source-device) "test" cavities **50** placed $10r$ apart, in the presence of a same-size extraneous object **52** of $\epsilon=49$ between them, and at a distance $5r$ from a large roughened surface **56** of $\epsilon=2.5$, as shown in FIG. 5. Then, the original values of $Q=1992$, $\omega/2\kappa=1717$ (and thus $\kappa/T=1.16$) deteriorate to $Q=765$, $\omega/2\kappa=965$ (and thus $\kappa/T=0.79$). This change is acceptably small, considering the extent of the considered external perturbation, and, since the system design has not been optimized, the final value of coupling-to-loss ratio is promising that this scheme can be useful for energy transfer.

In the second example of resonant objects being considered, the conducting-wire loops, the influence of extraneous objects on the resonances is nearly absent. The reason for this is that, in the quasi-static regime of operation ($r \ll \lambda$) that is being considered, the near field in the air region surrounding the loop is predominantly magnetic, since the electric field is localized inside the capacitor. Therefore, extraneous objects that could interact with this field and act as a perturbation to the resonance are those having significant magnetic properties (magnetic permeability $\text{Re}\{\mu\}>1$ or magnetic loss $\text{Im}\{\mu\}>0$). Since almost all common materials are non-magnetic, they respond to magnetic fields in the same way as free space, and thus will not disturb the resonance of a conducting-wire loop. The only perturbation that is expected to affect these resonances is a close proximity of large metallic structures.

An extremely important implication of the above fact relates to safety considerations for human beings. Humans are also non-magnetic and can sustain strong magnetic fields without undergoing any risk. This is clearly an advantage of this class of resonant systems for many real-world applications. On the other hand, dielectric systems of high (effective) index have the advantages that their efficiencies seem to be

higher, judging from the larger achieved values of κ/T , and that they are also applicable to much smaller length-scales, as mentioned before.

Consider now again the combined system of resonant source s and device d in the presence of a human h and a wall, and now let us study the efficiency of this resonance-based energy-transfer scheme, when energy is being drained from the device for use into operational work. One can use the parameters found before: for dielectric disks, absorption-dominated loss at the source $Q_s \sim 10^4$, radiation-dominated loss at the device $Q_d \sim 10^3$ (which includes scattering from the human and the wall), absorption of the source- and device-energy at the human $Q_{s-h}, Q_{d-h} \sim 10^4 \cdot 10^5$ depending on his/her not-very-close distance from the objects, and negligible absorption loss in the wall; for conducting-wire loops, $Q_s \sim Q_d \sim 10^3$, and perturbations from the human and the wall are negligible. With corresponding loss-rates $\Gamma = \omega/2Q$, distance-dependent coupling κ , and the rate at which working power is extracted Γ_w , the coupled-mode-theory equation for the device field-amplitude is

$$\frac{da_d}{dt} = -i(\omega - i\Gamma_d)a_d + i\kappa a_s - \Gamma_{d-h}a_d - \Gamma_w a_d. \quad (3)$$

Different temporal schemes can be used to extract power from the device and their efficiencies exhibit different dependence on the combined system parameters. Here, one can assume steady state, such that the field amplitude inside the source is maintained constant, namely $a_s(t) = A_s e^{-i\omega t}$, so then the field amplitude inside the device is $a_d(t) = A_d e^{-i\omega t}$ with $A_d = i\kappa / (\Gamma_d + \Gamma_{d-h} + \Gamma_w) A_s$. Therefore, the power lost at the source is $P_s = 2\Gamma_s |A_s|^2$, at the device it is $P_d = 2\Gamma_d |A_d|^2$, the power absorbed at the human is $P_h = 2\Gamma_{s-h} |A_s|^2 + 2\Gamma_{d-h} |A_d|^2$, and the useful extracted power is $P_w = 2\Gamma_w |A_d|^2$. From energy conservation, the total power entering the system is $P_{total} = P_s + P_d + P_h + P_w$. Denote the total loss-rates $\Gamma_s^{tot} = \Gamma_s + \Gamma_{s-h}$ and $\Gamma_d^{tot} = \Gamma_d + \Gamma_{d-h}$. Depending on the targeted application, the work-drainage rate should be chosen either $\Gamma_w = \Gamma_d^{tot}$ to minimize the required energy stored in the resonant objects or $\Gamma_w = \Gamma_d^{tot} \sqrt{1 + \kappa^2 / \Gamma_s^{tot} \Gamma_d^{tot}} \geq \Gamma_d^{tot}$ such that the ratio of useful-to-lost powers, namely the efficiency $\eta_w = P_w / P_{total}$, is maximized for some value of κ . The efficiencies η for the two different choices are shown in FIGS. 6A and 6B respectively, as a function of the κ/T_d figure-of-merit which in turn depends on the source-device distance.

FIGS. 6A-6B show that for the system of dielectric disks and the choice of optimized efficiency, the efficiency can be large, e.g., at least 40%. The dissipation of energy inside the human is small enough, less than 5%, for values $\kappa/T_d > 1$ and $Q_h > 10^5$, namely for medium-range source-device distances ($D_d/r < 10$) and most human-source/device distances ($D_h/r > 8$). For example, for $D_d/r=10$ and $D_h/r=8$, if 10 W must be delivered to the load, then, from FIG. 6B, ~ 0.4 W will be dissipated inside the human, ~ 4 W will be absorbed inside the source, and ~ 2.6 W will be radiated to free space. For the system of conducting-wire loops, the achieved efficiency is smaller, $\sim 20\%$ for $\kappa/T \neq 1$, but the significant advantage is that there is no dissipation of energy inside the human, as explained earlier.

Even better performance should be achievable through optimization of the resonant object designs. Also, by exploiting the earlier mentioned interference effects between the radiation fields of the coupled objects, such as continuous-wave operation at the frequency of the normal mode that has the larger radiation- Q , one could further improve the overall

11

system functionality. Thus the inventive wireless energy-transfer scheme is promising for many modern applications. Although all considerations have been for a static geometry, all the results can be applied directly for the dynamic geometries of mobile objects, since the energy-transfer time $\kappa^{-1} \sim 1$ μ s, which is much shorter than any timescale associated with motions of macroscopic objects.

The invention provides a resonance-based scheme for mid-range wireless non-radiative energy transfer. Analyses of very simple implementation geometries provide encouraging performance characteristics for the potential applicability of the proposed mechanism. For example, in the macroscopic world, this scheme could be used to deliver power to robots and/or computers in a factory room, or electric buses on a highway (source-cavity would in this case be a “pipe” running above the highway). In the microscopic world, where much smaller wavelengths would be used and smaller powers are needed, one could use it to implement optical inter-connects for CMOS electronics or else to transfer energy to autonomous nano-objects, without worrying much about the relative alignment between the sources and the devices; energy-transfer distance could be even longer compared to the objects’ size, since $\text{Im}\{\epsilon(\omega)\}$ of dielectric materials can be much lower at the required optical frequencies than it is at microwave frequencies.

As a venue of future scientific research, different material systems should be investigated for enhanced performance or different range of applicability. For example, it might be possible to significantly improve performance by exploring plasmonic systems. These systems can often have spatial variations of fields on their surface that are much shorter than the free-space wavelength, and it is precisely this feature that enables the required decoupling of the scales: the resonant object can be significantly smaller than the exponential-like tails of its field. Furthermore, one should also investigate using acoustic resonances for applications in which source and device are connected via a common condensed-matter object.

Although the present invention has been shown and described with respect to several preferred embodiments thereof, various changes, omissions and additions to the form and detail thereof, may be made therein, without departing from the spirit and scope of the invention.

What is claimed is:

1. A system, comprising:
a source high-Q resonator coupled to an energy source; and
a second high-Q resonator, coupled to an energy drain,
located a distance from the source resonator,
wherein the source resonator and the second resonator are
coupled to provide $\kappa/\sqrt{\Gamma_1\Gamma_2} > 0.2$ via near-field wireless
energy transfer among the source resonator and the second
resonator over a range of distances between the
source resonator and the second resonator, wherein κ is
the wireless energy transfer rate, Γ_1 is the intrinsic loss
rate of the source resonator, and Γ_2 is the intrinsic loss
rate of the second resonator.
2. The system of claim 1, wherein the energy drain comprises a robot, vehicle, computer, cell phone, or a portable electronic device.
3. The system of claim 1, wherein at least one of the resonators has a Q-factor $Q_i > 100$.
4. The system of claim 1, wherein at least one of the resonators is tunable.
5. The system of claim 1, wherein at least 10 Watts of power is transferred over the range of distances.

12

6. The system of claim 1, wherein $\kappa/\sqrt{\Gamma_1\Gamma_2} > 0.5$ over the range of distances.

7. The system of claim 1, wherein $\kappa/\sqrt{\Gamma_1\Gamma_2} > 1$ over the range of distances.

8. The system of claim 1, wherein each resonator comprises an inductive element and a capacitive element.

9. The system of claim 1, wherein the range of distances includes 5 cm.

10. The system of claim 1, wherein the range of distances includes 10 cm.

11. The system of claim 1, wherein the range of distances includes 30 cm.

12. The system of claim 1, wherein the resonators are movable relative to one another.

13. The system of claim 1, wherein the resonators have respective resonant frequencies $f_1 = \omega_1/2\pi$ and $f_2 = \omega_2/2\pi$ which are each at least 5 MHz.

14. The system of claim 1, further comprising a feedback mechanism coupled to at least one of the resonators to correct for detuning.

15. The system of claim 1, wherein the energy source is coupled to the source resonator and the energy drain is coupled to the second resonator, and wherein the energy source and energy drain are configured to be driven to increase a ratio of useful-to-lost power for varying wireless energy transfer rates κ .

16. The system of claim 1, wherein the source resonator and second resonator are configured to be adjustably tuned to increase a ratio of useful-to-lost power for the wireless energy transfer rate κ over the distances.

17. The system of claim 1, wherein the source resonator has a Q-factor Q_1 and the second resonator has a Q-factor Q_2 , and wherein $\sqrt{Q_1Q_2} > 100$.

18. The system of claim 1, wherein the source resonator has a Q-factor $Q_1 > 100$ and the second resonator has a Q-factor $Q_2 > 100$.

19. The system of claim 1, wherein the source resonator and the second resonator have different characteristic sizes.

20. A method, comprising:

providing a source high-Q resonator coupled to an energy source and a second high-Q resonator, wherein the second high-Q resonator is coupled to an energy drain and located a distance from the source resonator,

wherein the source resonator and the second resonator are coupled to provide $\kappa/\sqrt{\Gamma_1\Gamma_2} > 0.2$ via near-field wireless energy transfer among the source resonator and the second resonator over a range of distances between the source resonator and the second resonator, wherein κ is the wireless energy transfer rate, Γ_1 is the intrinsic loss rate of the source resonator, and Γ_2 is the intrinsic loss rate of the second resonator.

21. The method of claim 20, wherein the energy drain comprises a robot, vehicle, computer, cell phone, or a portable electronic device.

22. The method of claim 20, wherein at least one of the resonators has a Q-factor $Q_i > 100$.

23. The method of claim 20, wherein at least one of the resonators is tunable.

24. The method of claim 20, wherein at least 10 Watts of power is transferred over the range of distances.

25. The method of claim 20, wherein $\kappa/\sqrt{\Gamma_1\Gamma_2} > 0.5$ over the range of distances.

26. The method of claim 20, wherein $\kappa/\sqrt{\Gamma_1\Gamma_2} > 1$ over the range of distances.

27. The method of claim 20, wherein each resonator comprises an inductive element and a capacitive element.

13

28. The method of claim 20, wherein the range of distances includes 5 cm.

29. The method of claim 20, wherein the range of distances includes 10 cm.

30. The method of claim 20, wherein the range of distances includes 30 cm.

31. The method of claim 20, wherein the resonators are movable relative to one another.

32. The method of claim 20, wherein the resonators have respective resonant frequencies $f_1=\omega_1/2\pi$ and $f_2=\omega_2/2\pi$ which are each at least 5 MHz.

33. The method of claim 20, wherein a feedback mechanism is coupled to at least one of the resonators to correct for detuning.

34. The method of claim 20, wherein the energy source is coupled to the source resonator and the energy drain is

14

coupled to the second resonator, and wherein the energy source and energy drain are driven to increase a ratio of useful-to-lost power for varying wireless energy transfer rates κ .

35. The method of claim 20, wherein the source resonator and second resonator are adjustably tuned to increase a ratio of useful-to-lost power for varying wireless energy transfer rates κ over the distances.

36. The method of claim 20, wherein the source resonator has a Q-factor Q_1 and the second resonator has a Q-factor Q_2 , and wherein $\sqrt{Q_1 Q_2} > 100$.

37. The method of claim 20, wherein the source resonator has a Q-factor $Q_1 > 100$ and the second resonator has a Q-factor $Q_2 > 100$.

38. The method of claim 20, wherein the source resonator and the second resonator have different characteristic sizes.

* * * * *