



US 20180076732A1

(19) **United States**(12) **Patent Application Publication**
Yoscovich et al.(10) **Pub. No.: US 2018/0076732 A1**(43) **Pub. Date: Mar. 15, 2018**(54) **MAXIMIZING POWER IN A
PHOTOVOLTAIC DISTRIBUTED POWER
SYSTEM**(71) Applicant: **Solaredge Technologies Ltd., Herzeliya
(IL)**(72) Inventors: **Ilan Yoscovich, Ramat-Gan (IL); Ofir
Bieber, Raanana (IL); Tzachi
Glovinsky, Petah Tikva (IL)**(21) Appl. No.: **15/819,720**(22) Filed: **Nov. 21, 2017****Related U.S. Application Data**(63) Continuation of application No. 15/149,353, filed on
May 9, 2016, now Pat. No. 9,853,565, which is a
continuation-in-part of application No. 13/754,059,
filed on Jan. 30, 2013, now Pat. No. 9,812,984.(30) **Foreign Application Priority Data**


Jan. 30, 2012 (GB) 1201499.9

Publication Classification(51) **Int. Cl.****H02M 7/44** (2006.01)**H02M 3/04** (2006.01)**H02J 3/38** (2006.01)(52) **U.S. Cl.**CPC **H02M 7/44** (2013.01); **Y10T 307/675**
(2015.04); **Y10T 307/685** (2015.04); **H02J**
3/385 (2013.01); **Y02E 10/58** (2013.01);
H02M 3/04 (2013.01)

(57)

ABSTRACT

A power harvesting system including multiple parallel-connected photovoltaic strings, each photovoltaic string includes a series-connection of photovoltaic panels. Multiple voltage-compensation circuits may be connected in series respectively with the photovoltaic strings. The voltage-compensation circuits may be configured to provide respective compensation voltages to the photovoltaic strings to maximize power harvested from the photovoltaic strings. The voltage-compensation circuits may include respective inputs which may be connected to a source of power and respective outputs which may be connected in series with the photovoltaic strings.

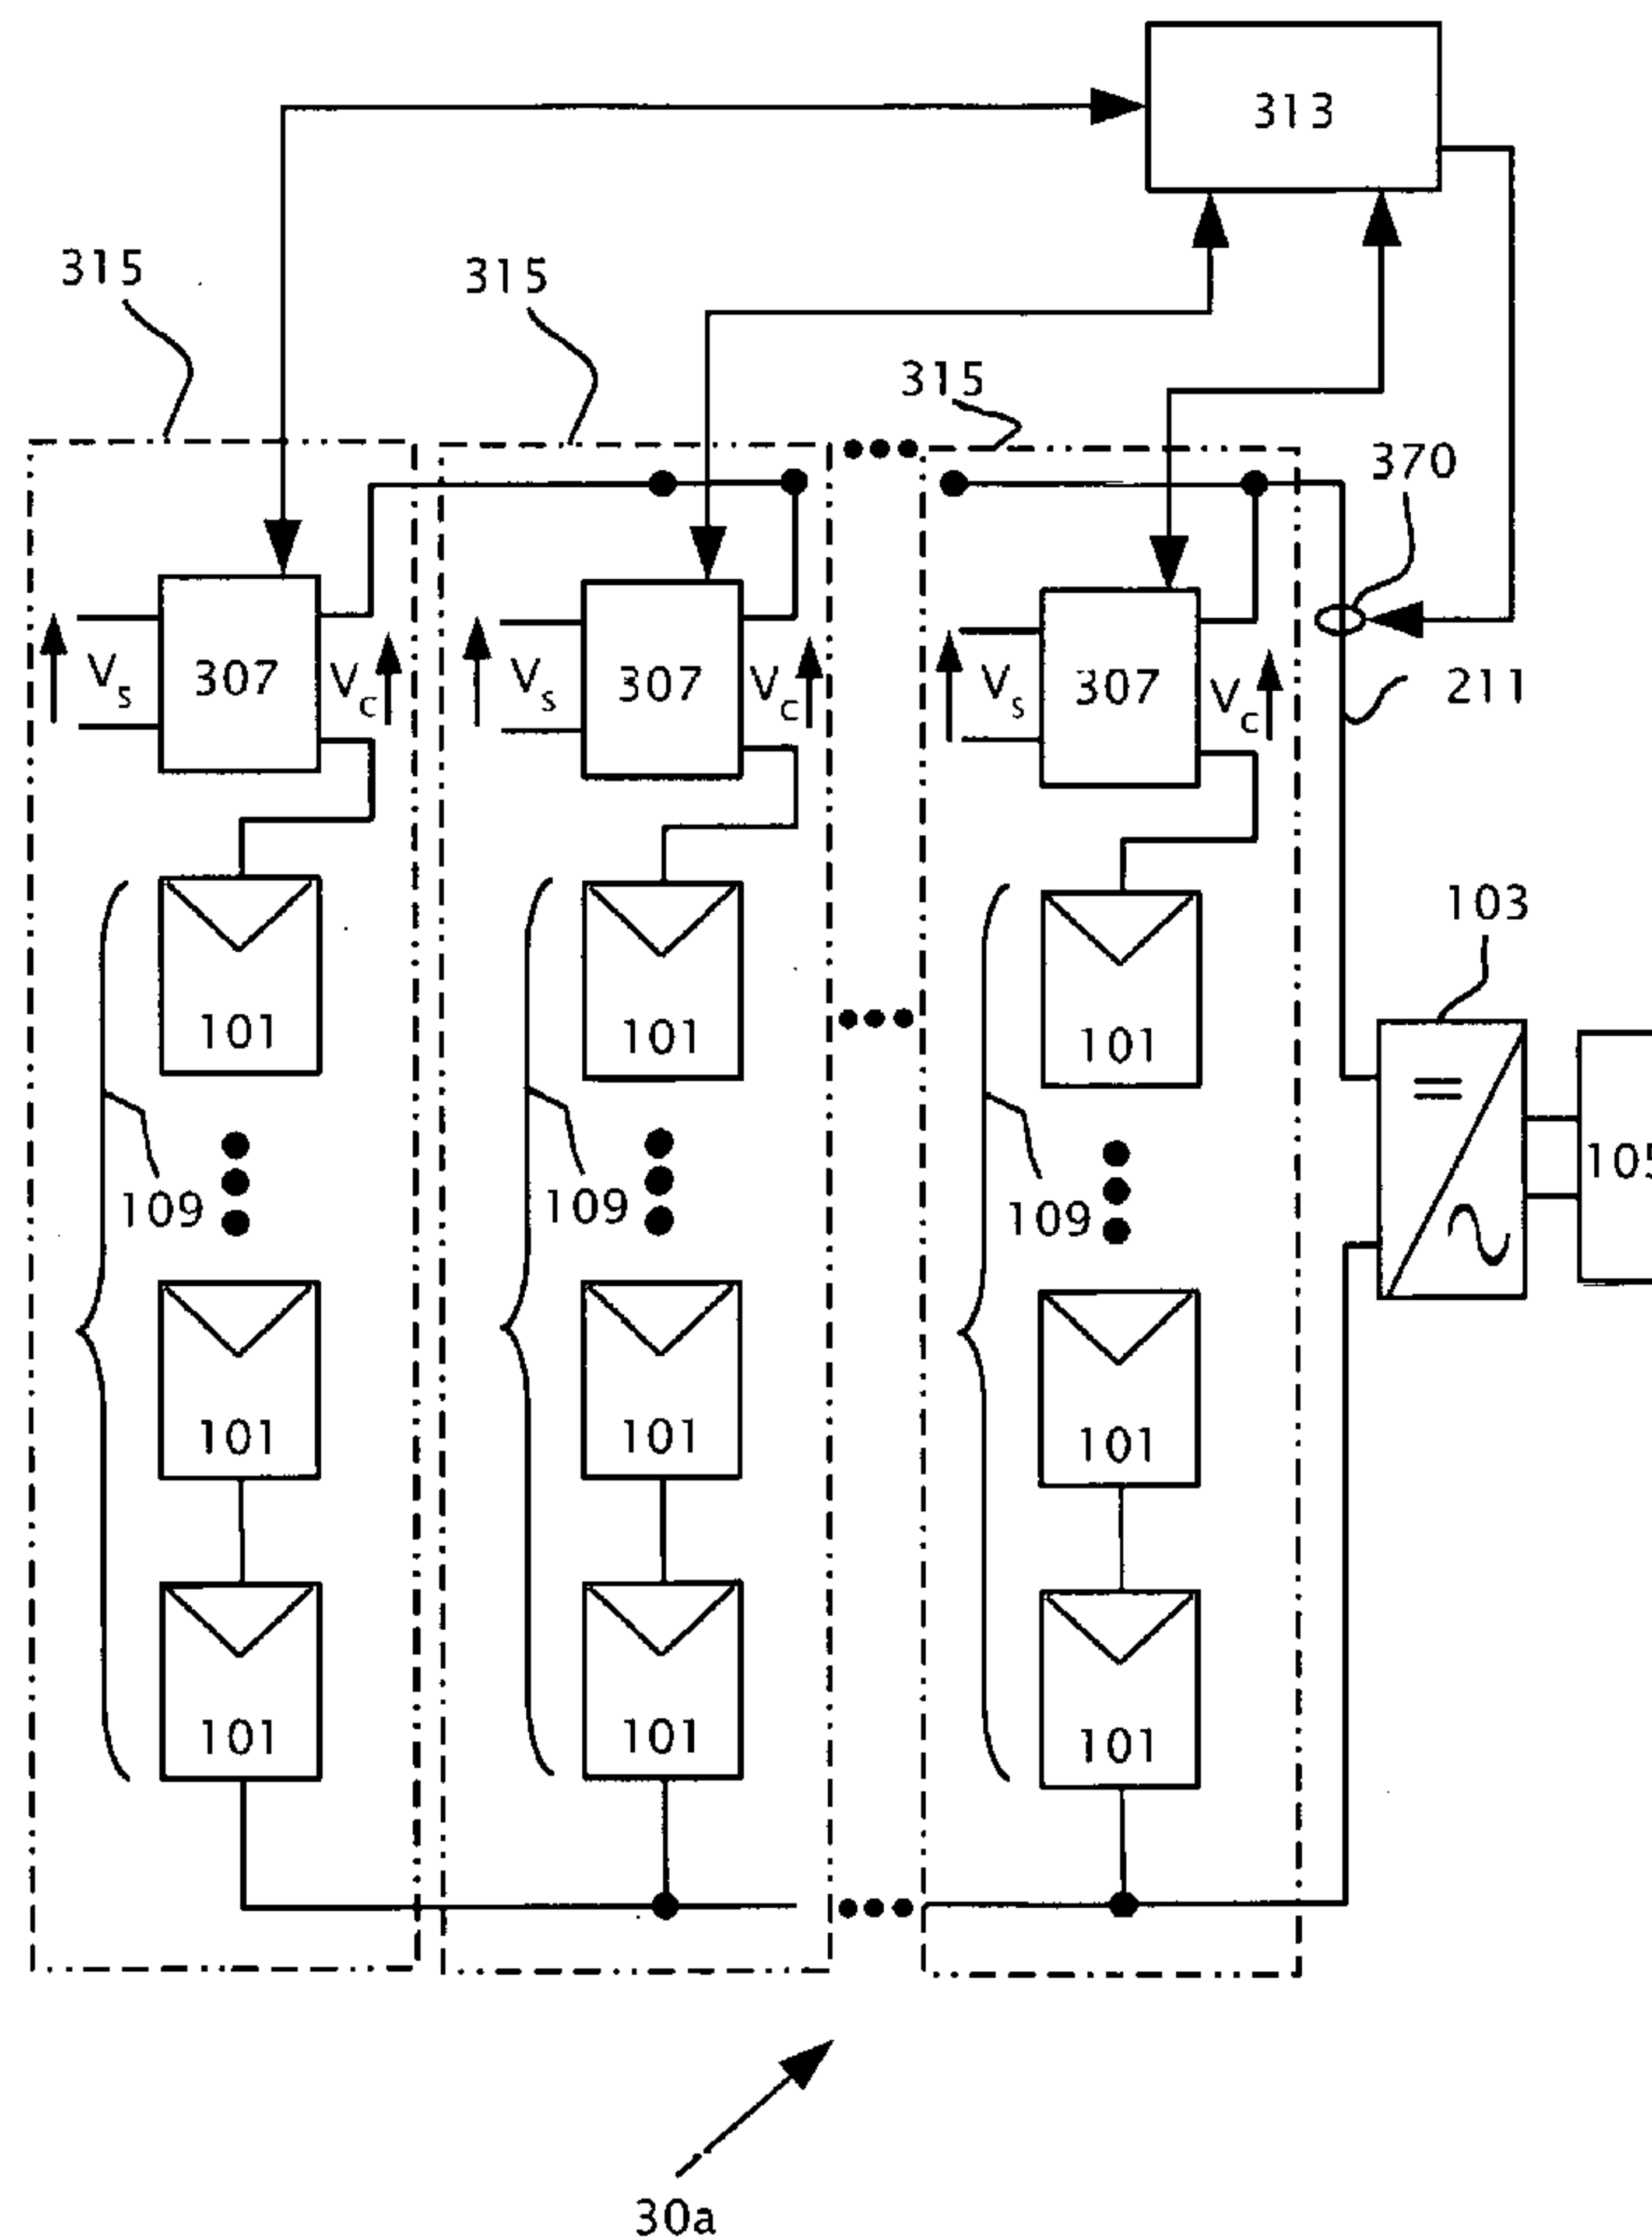

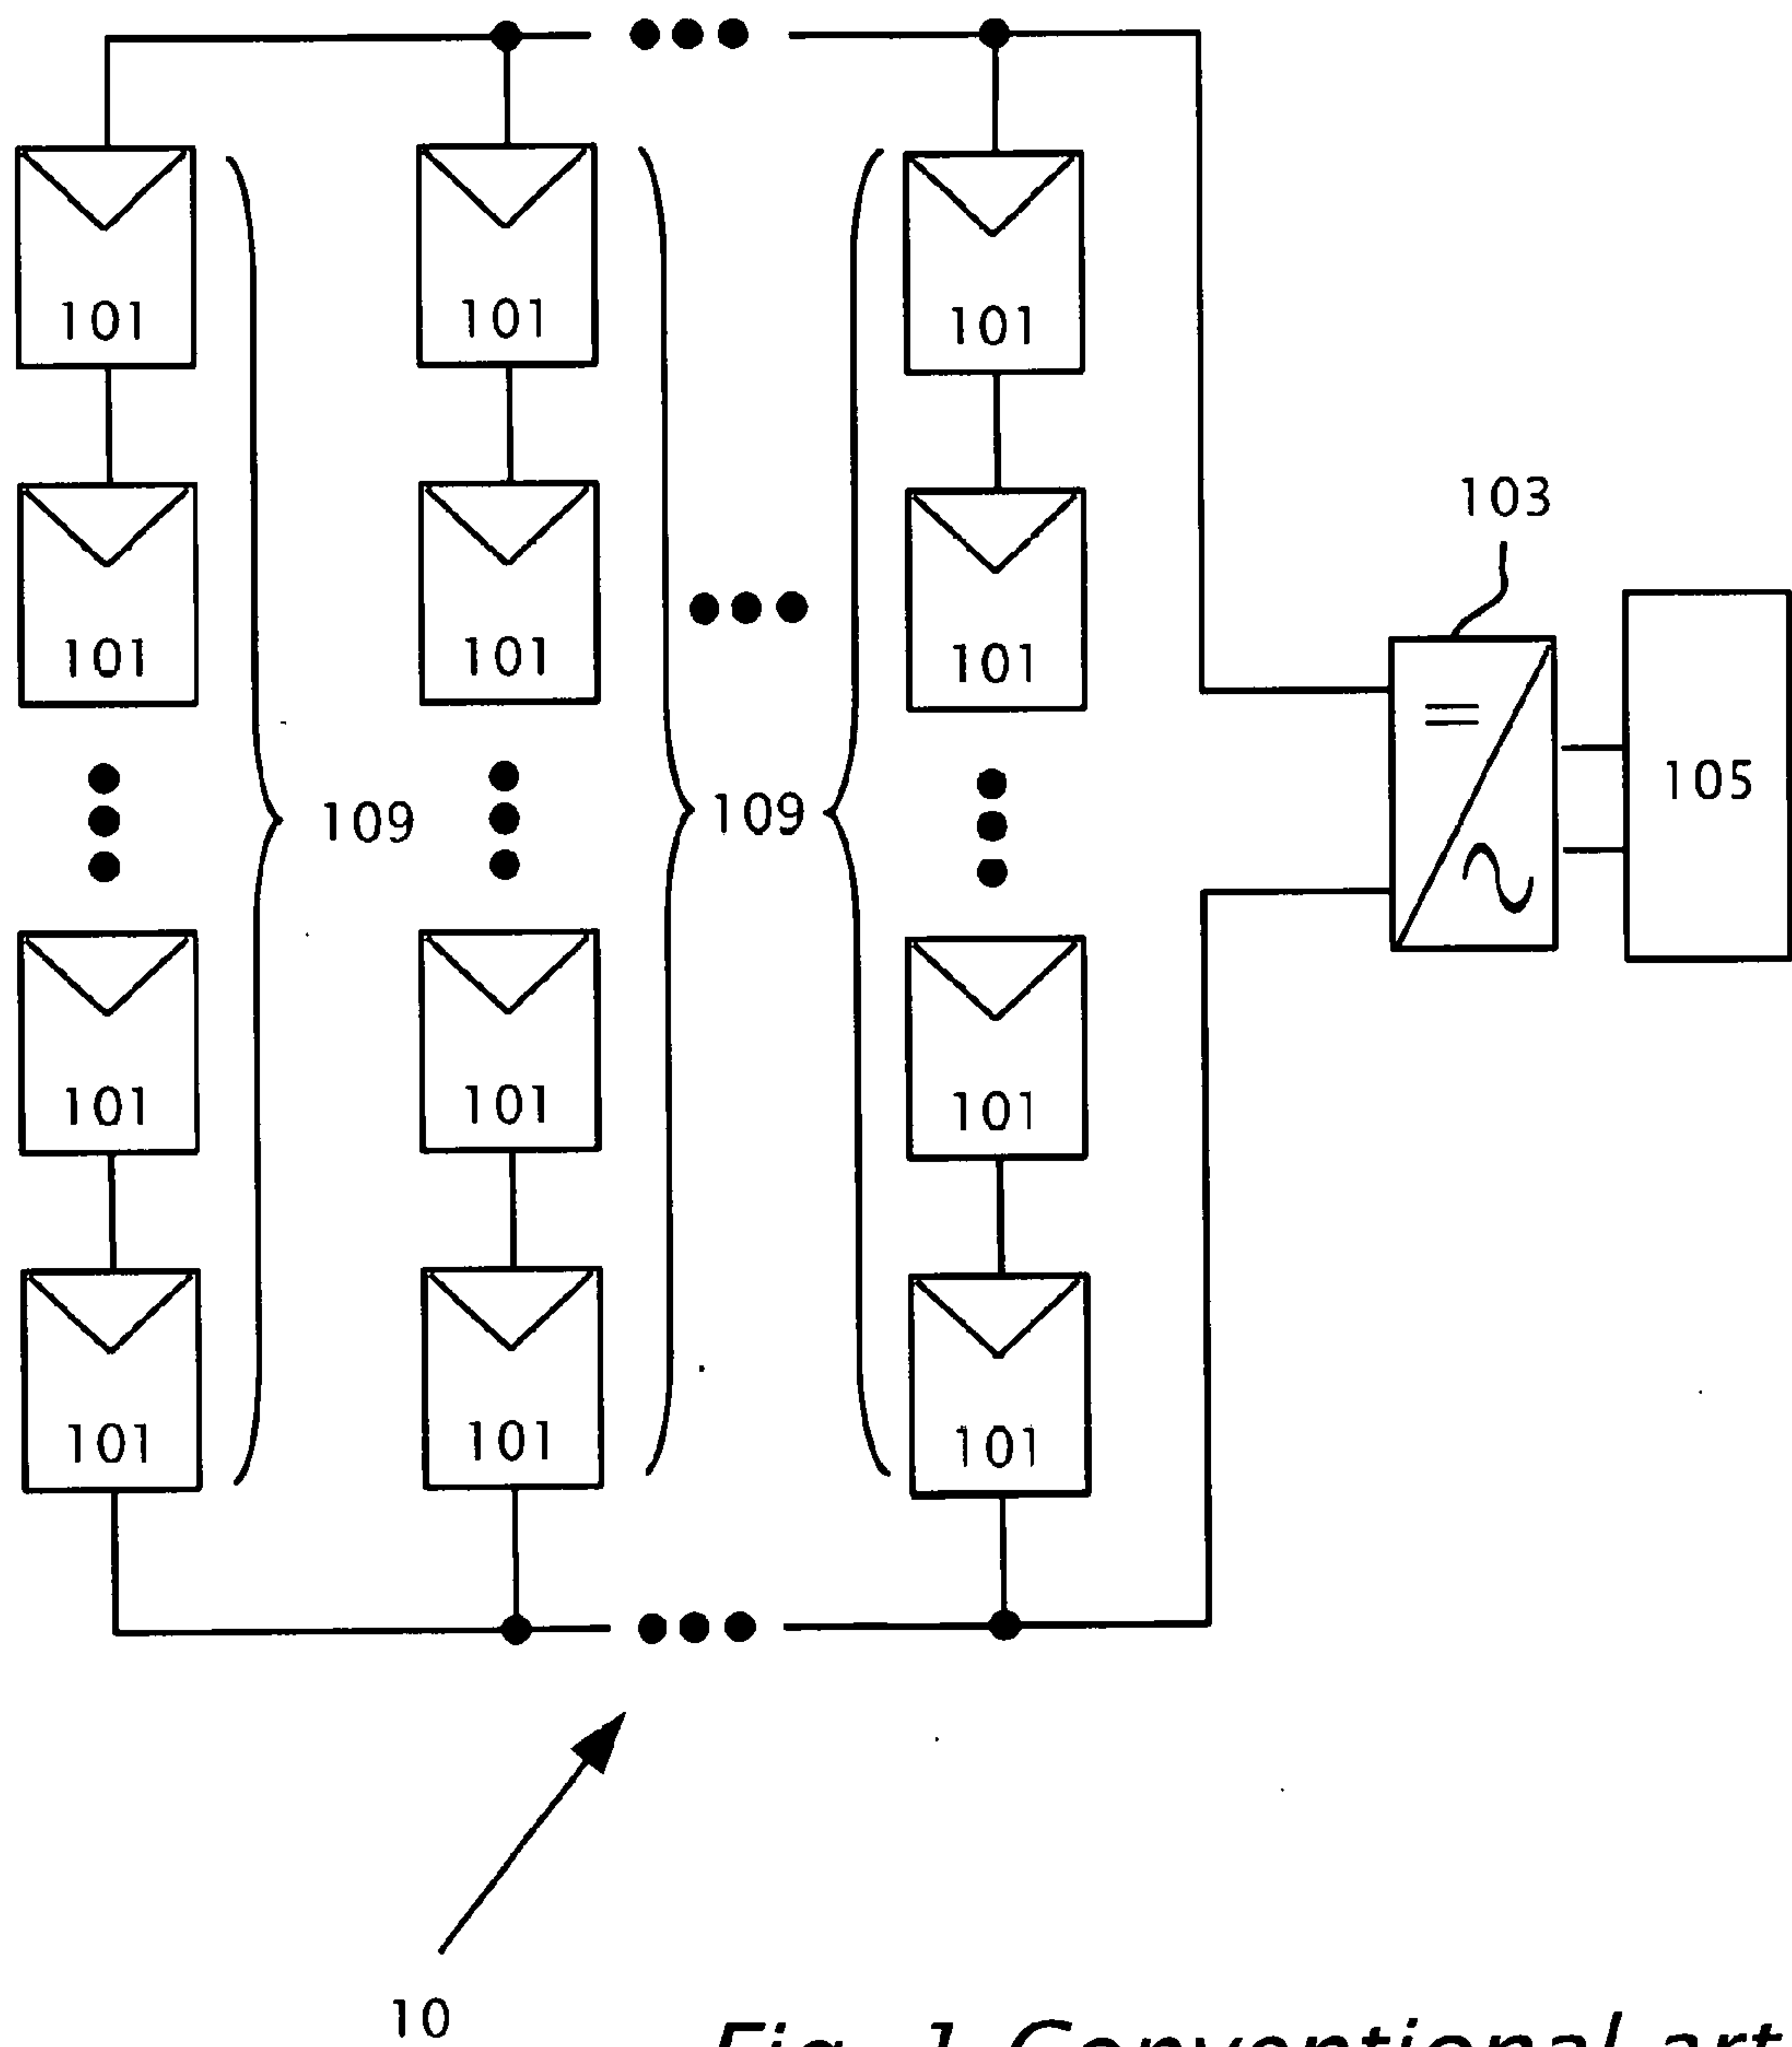


Fig. 1 Conventional art

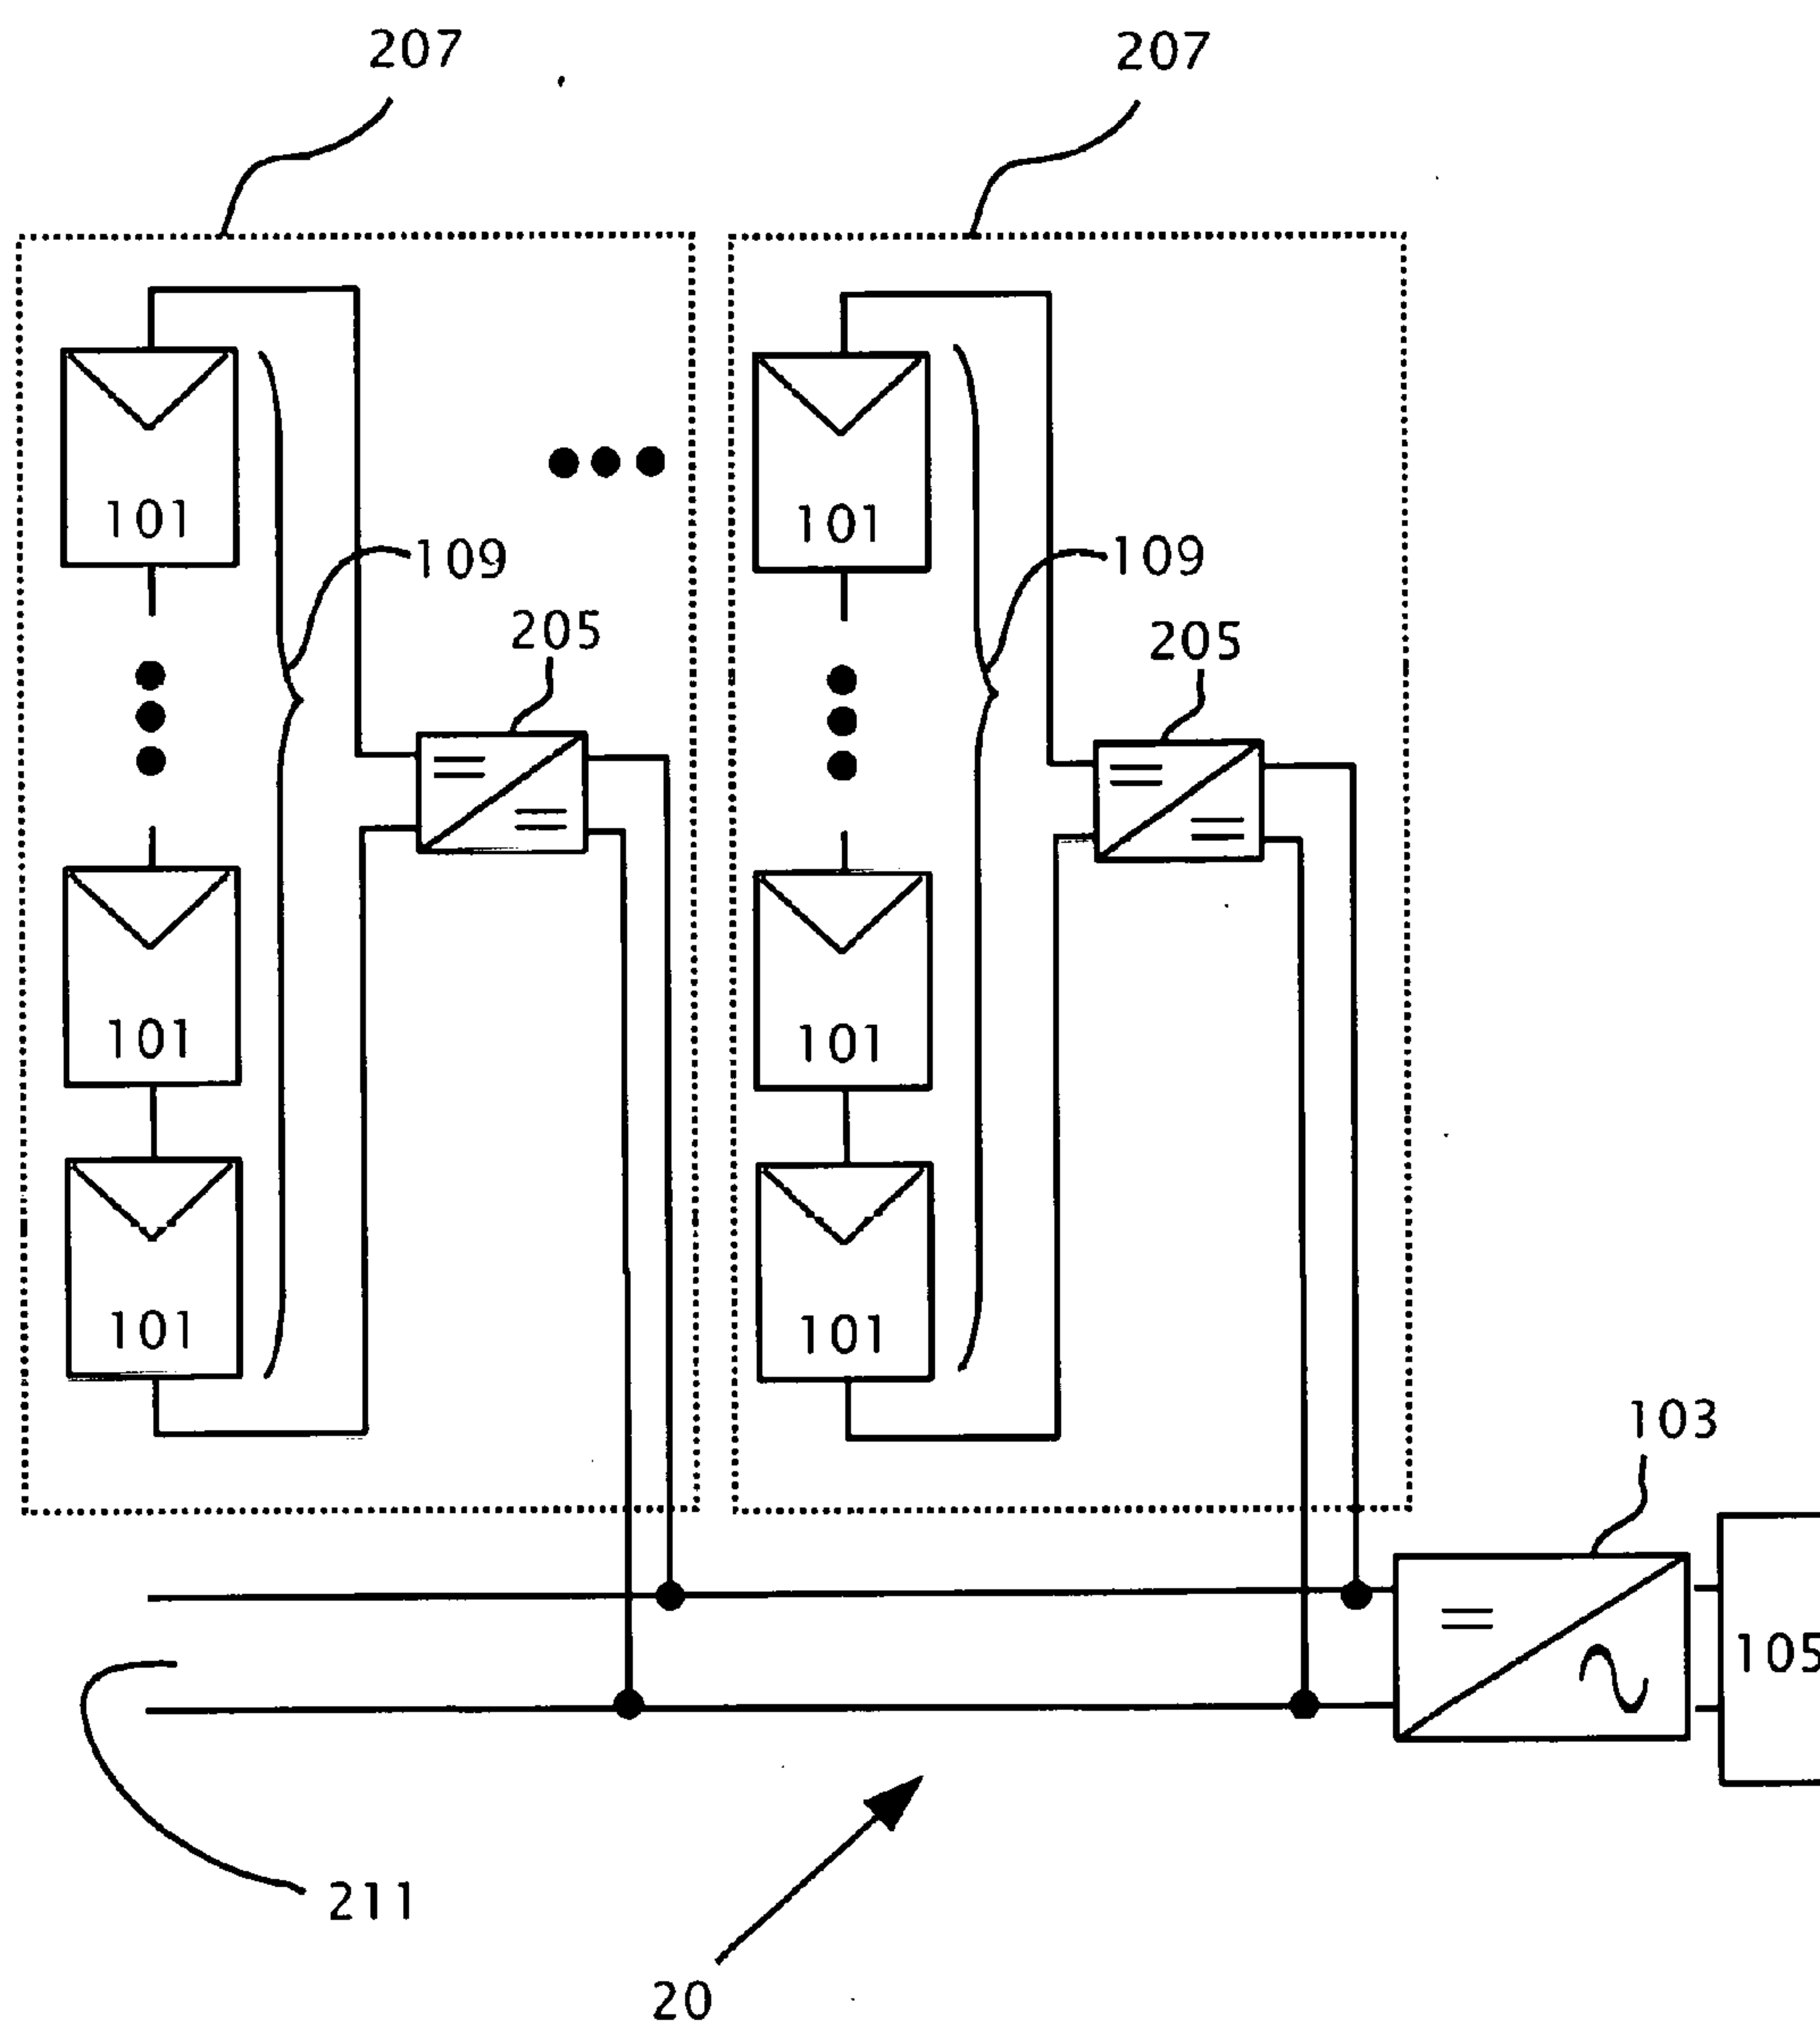


Fig. 2
Conventional art

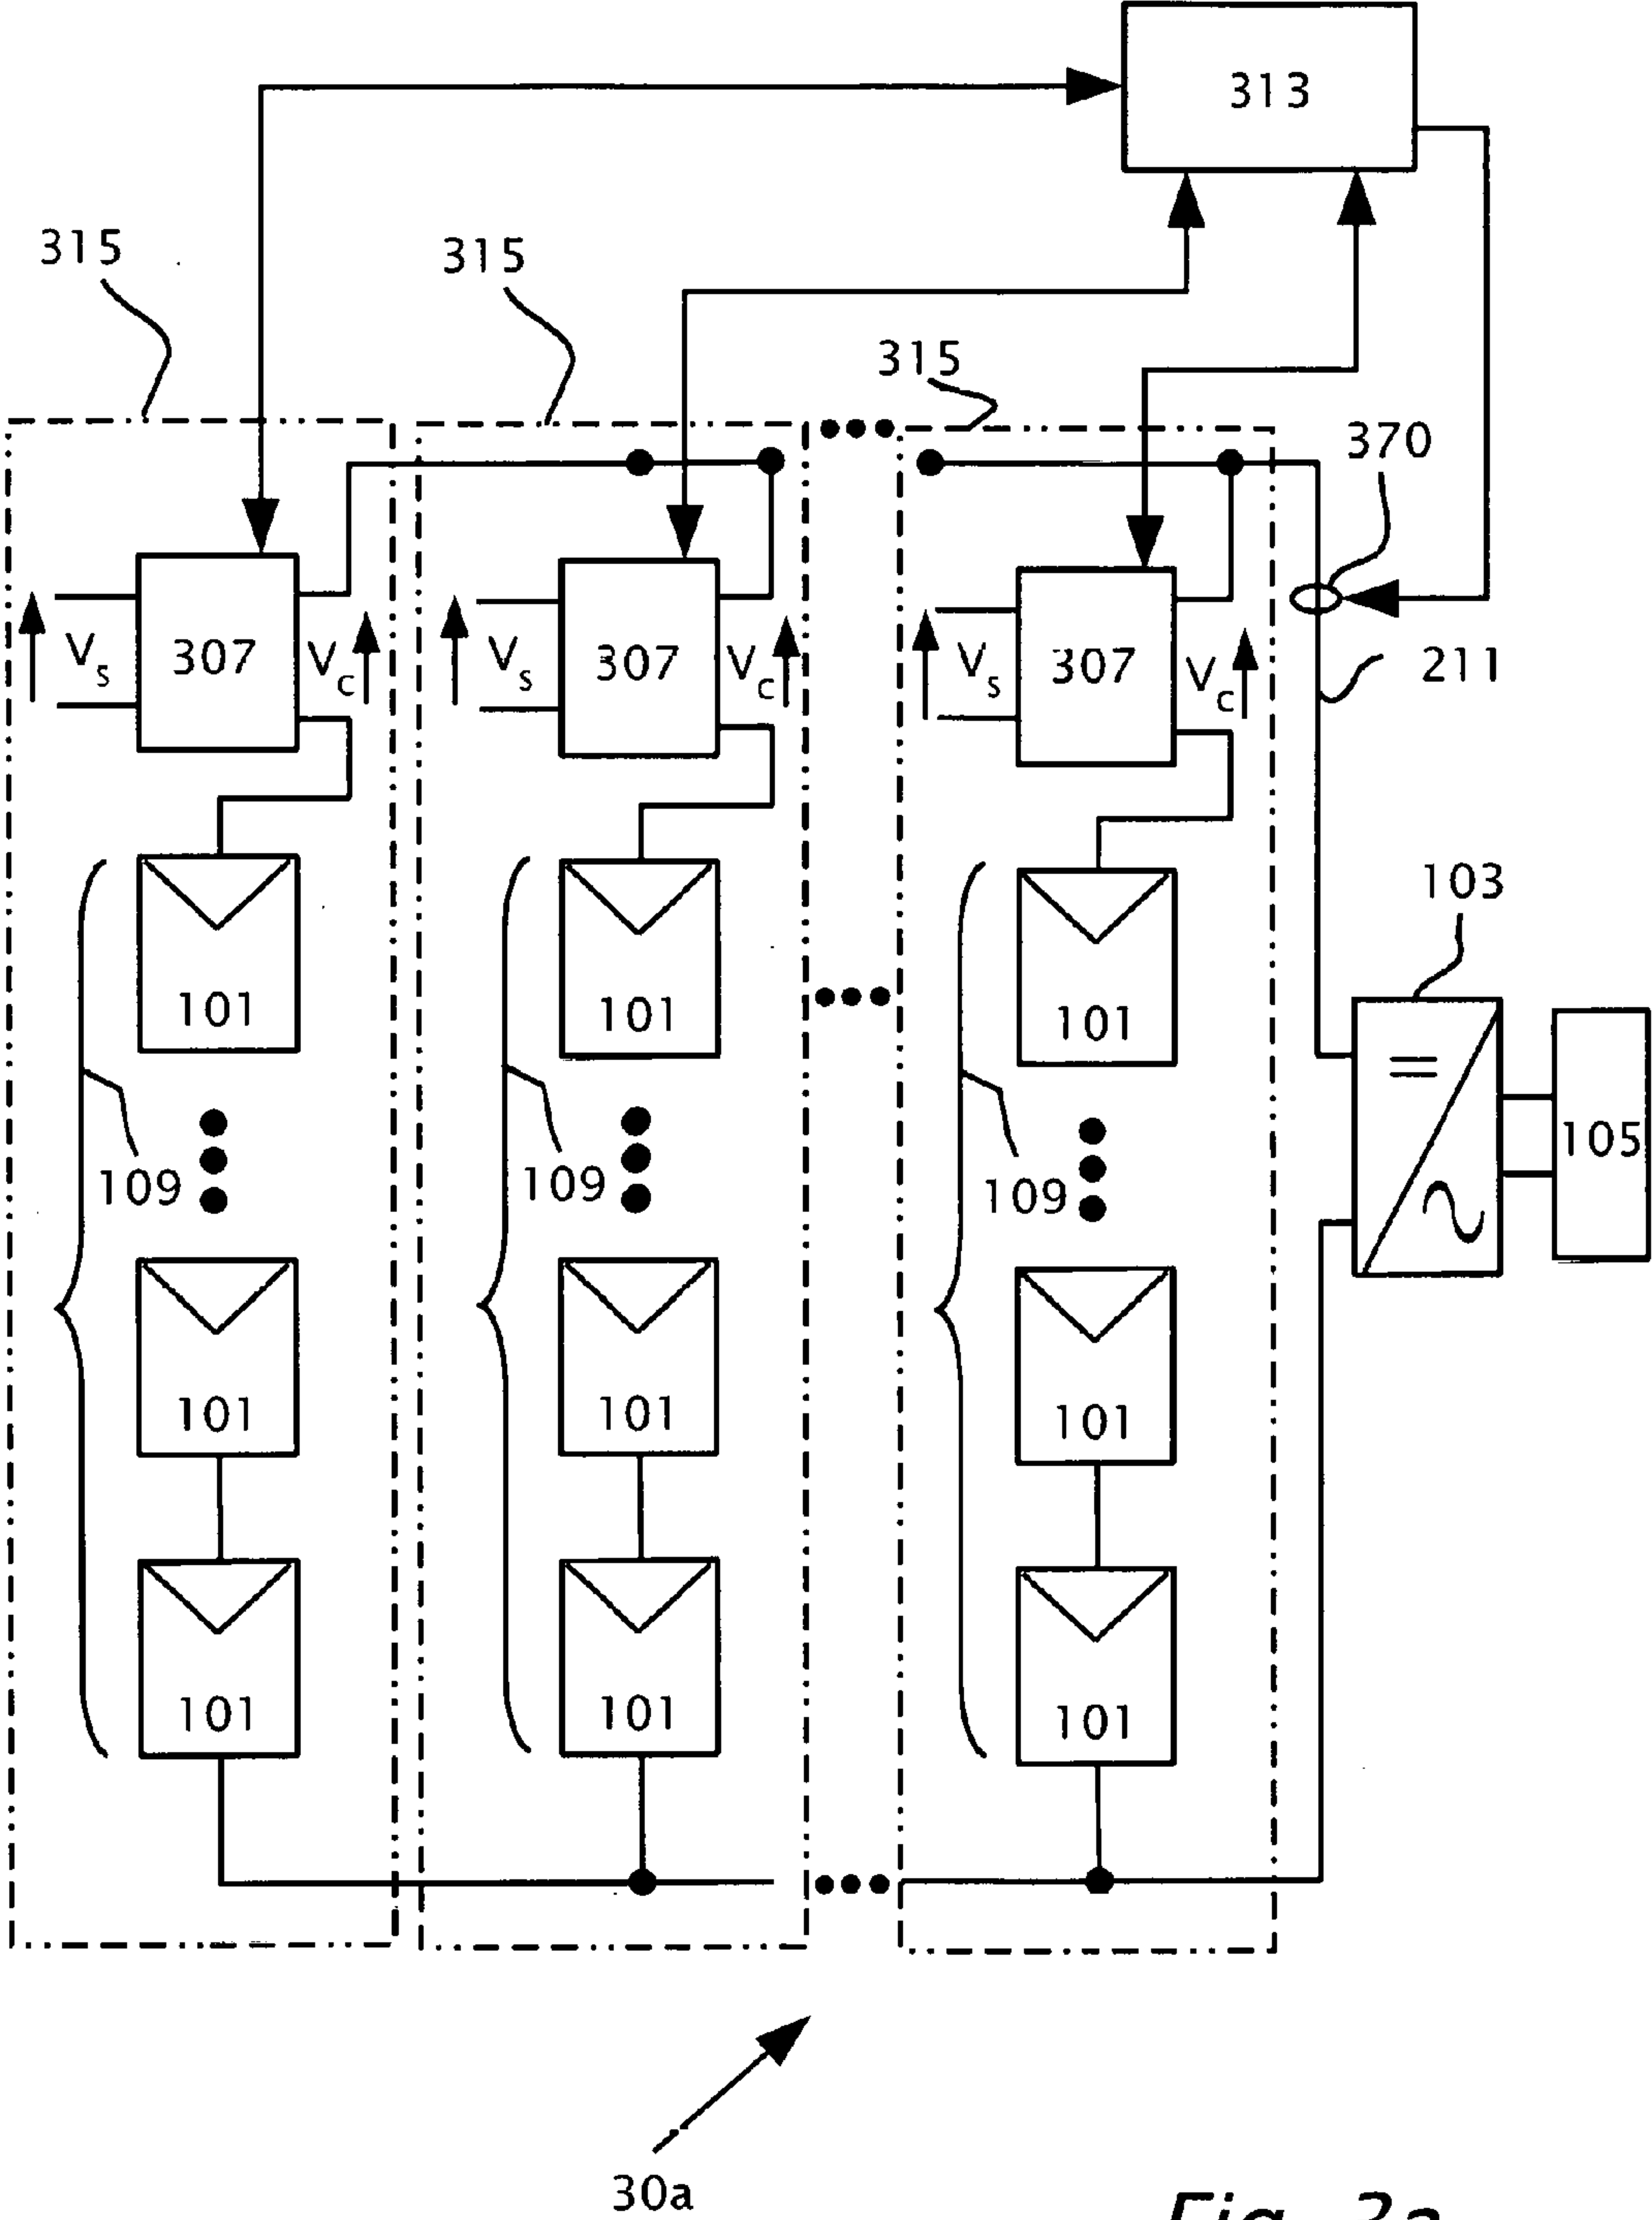


Fig. 3a

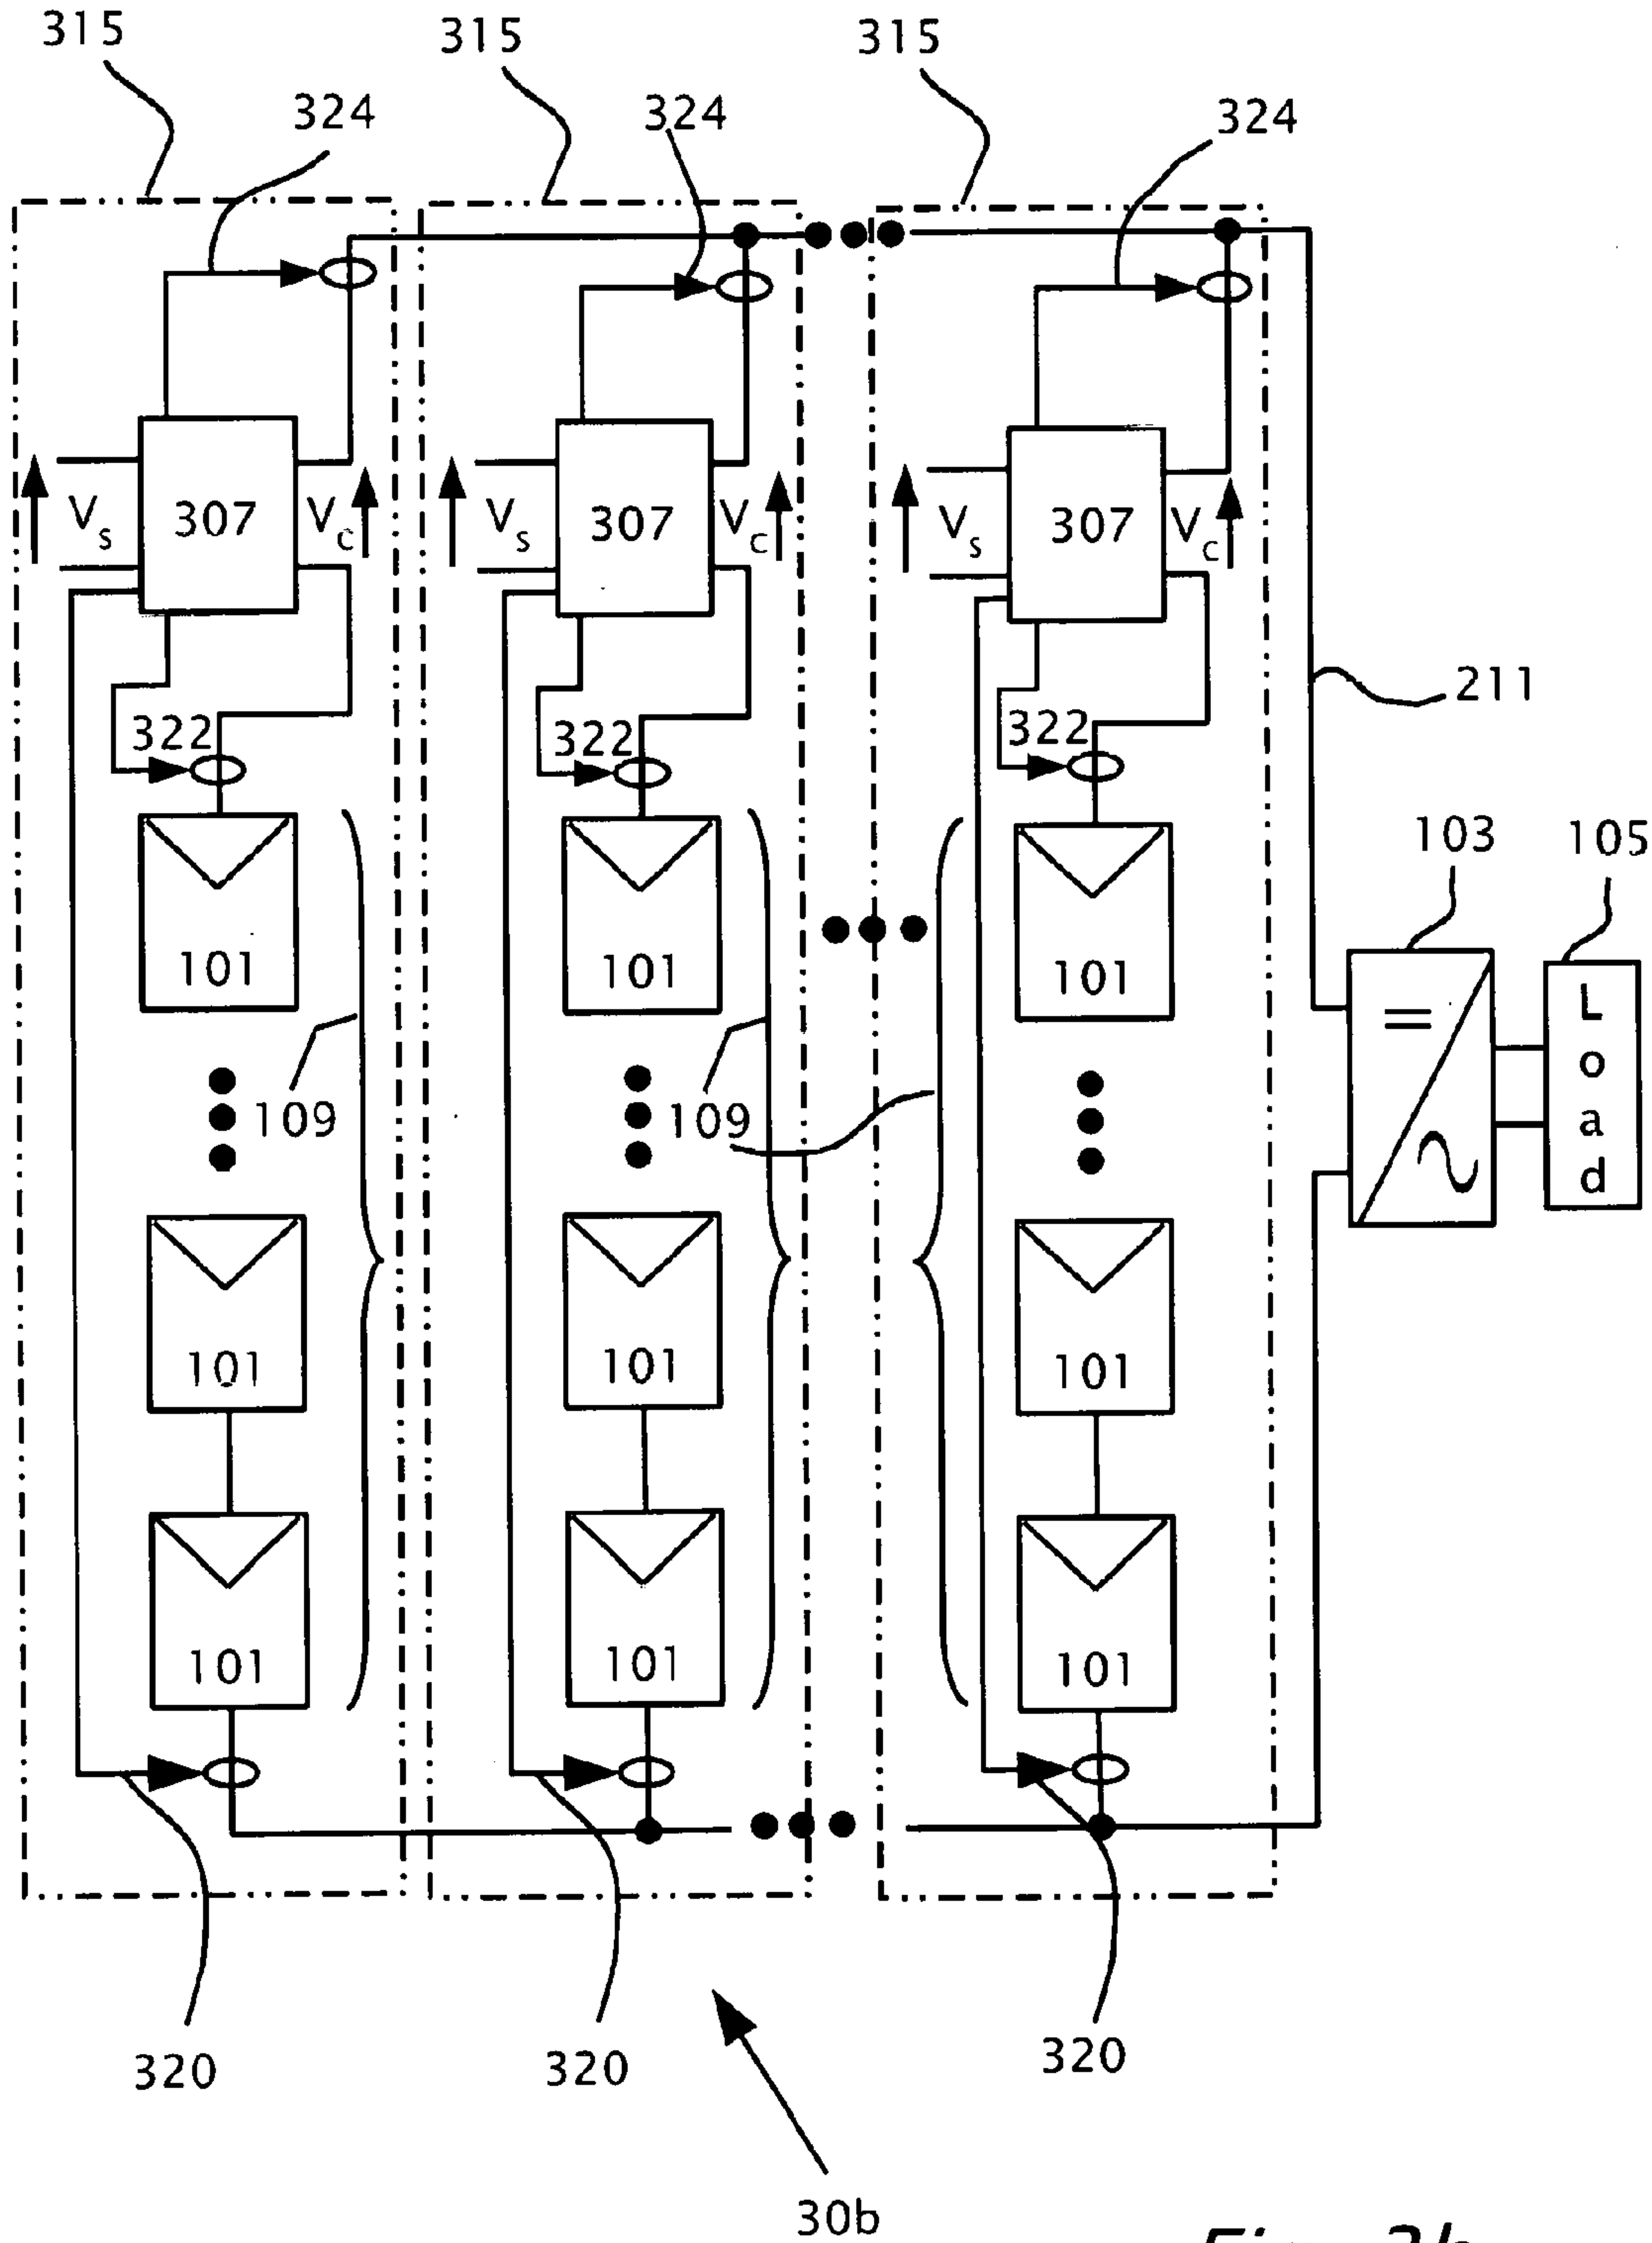


Fig. 3b

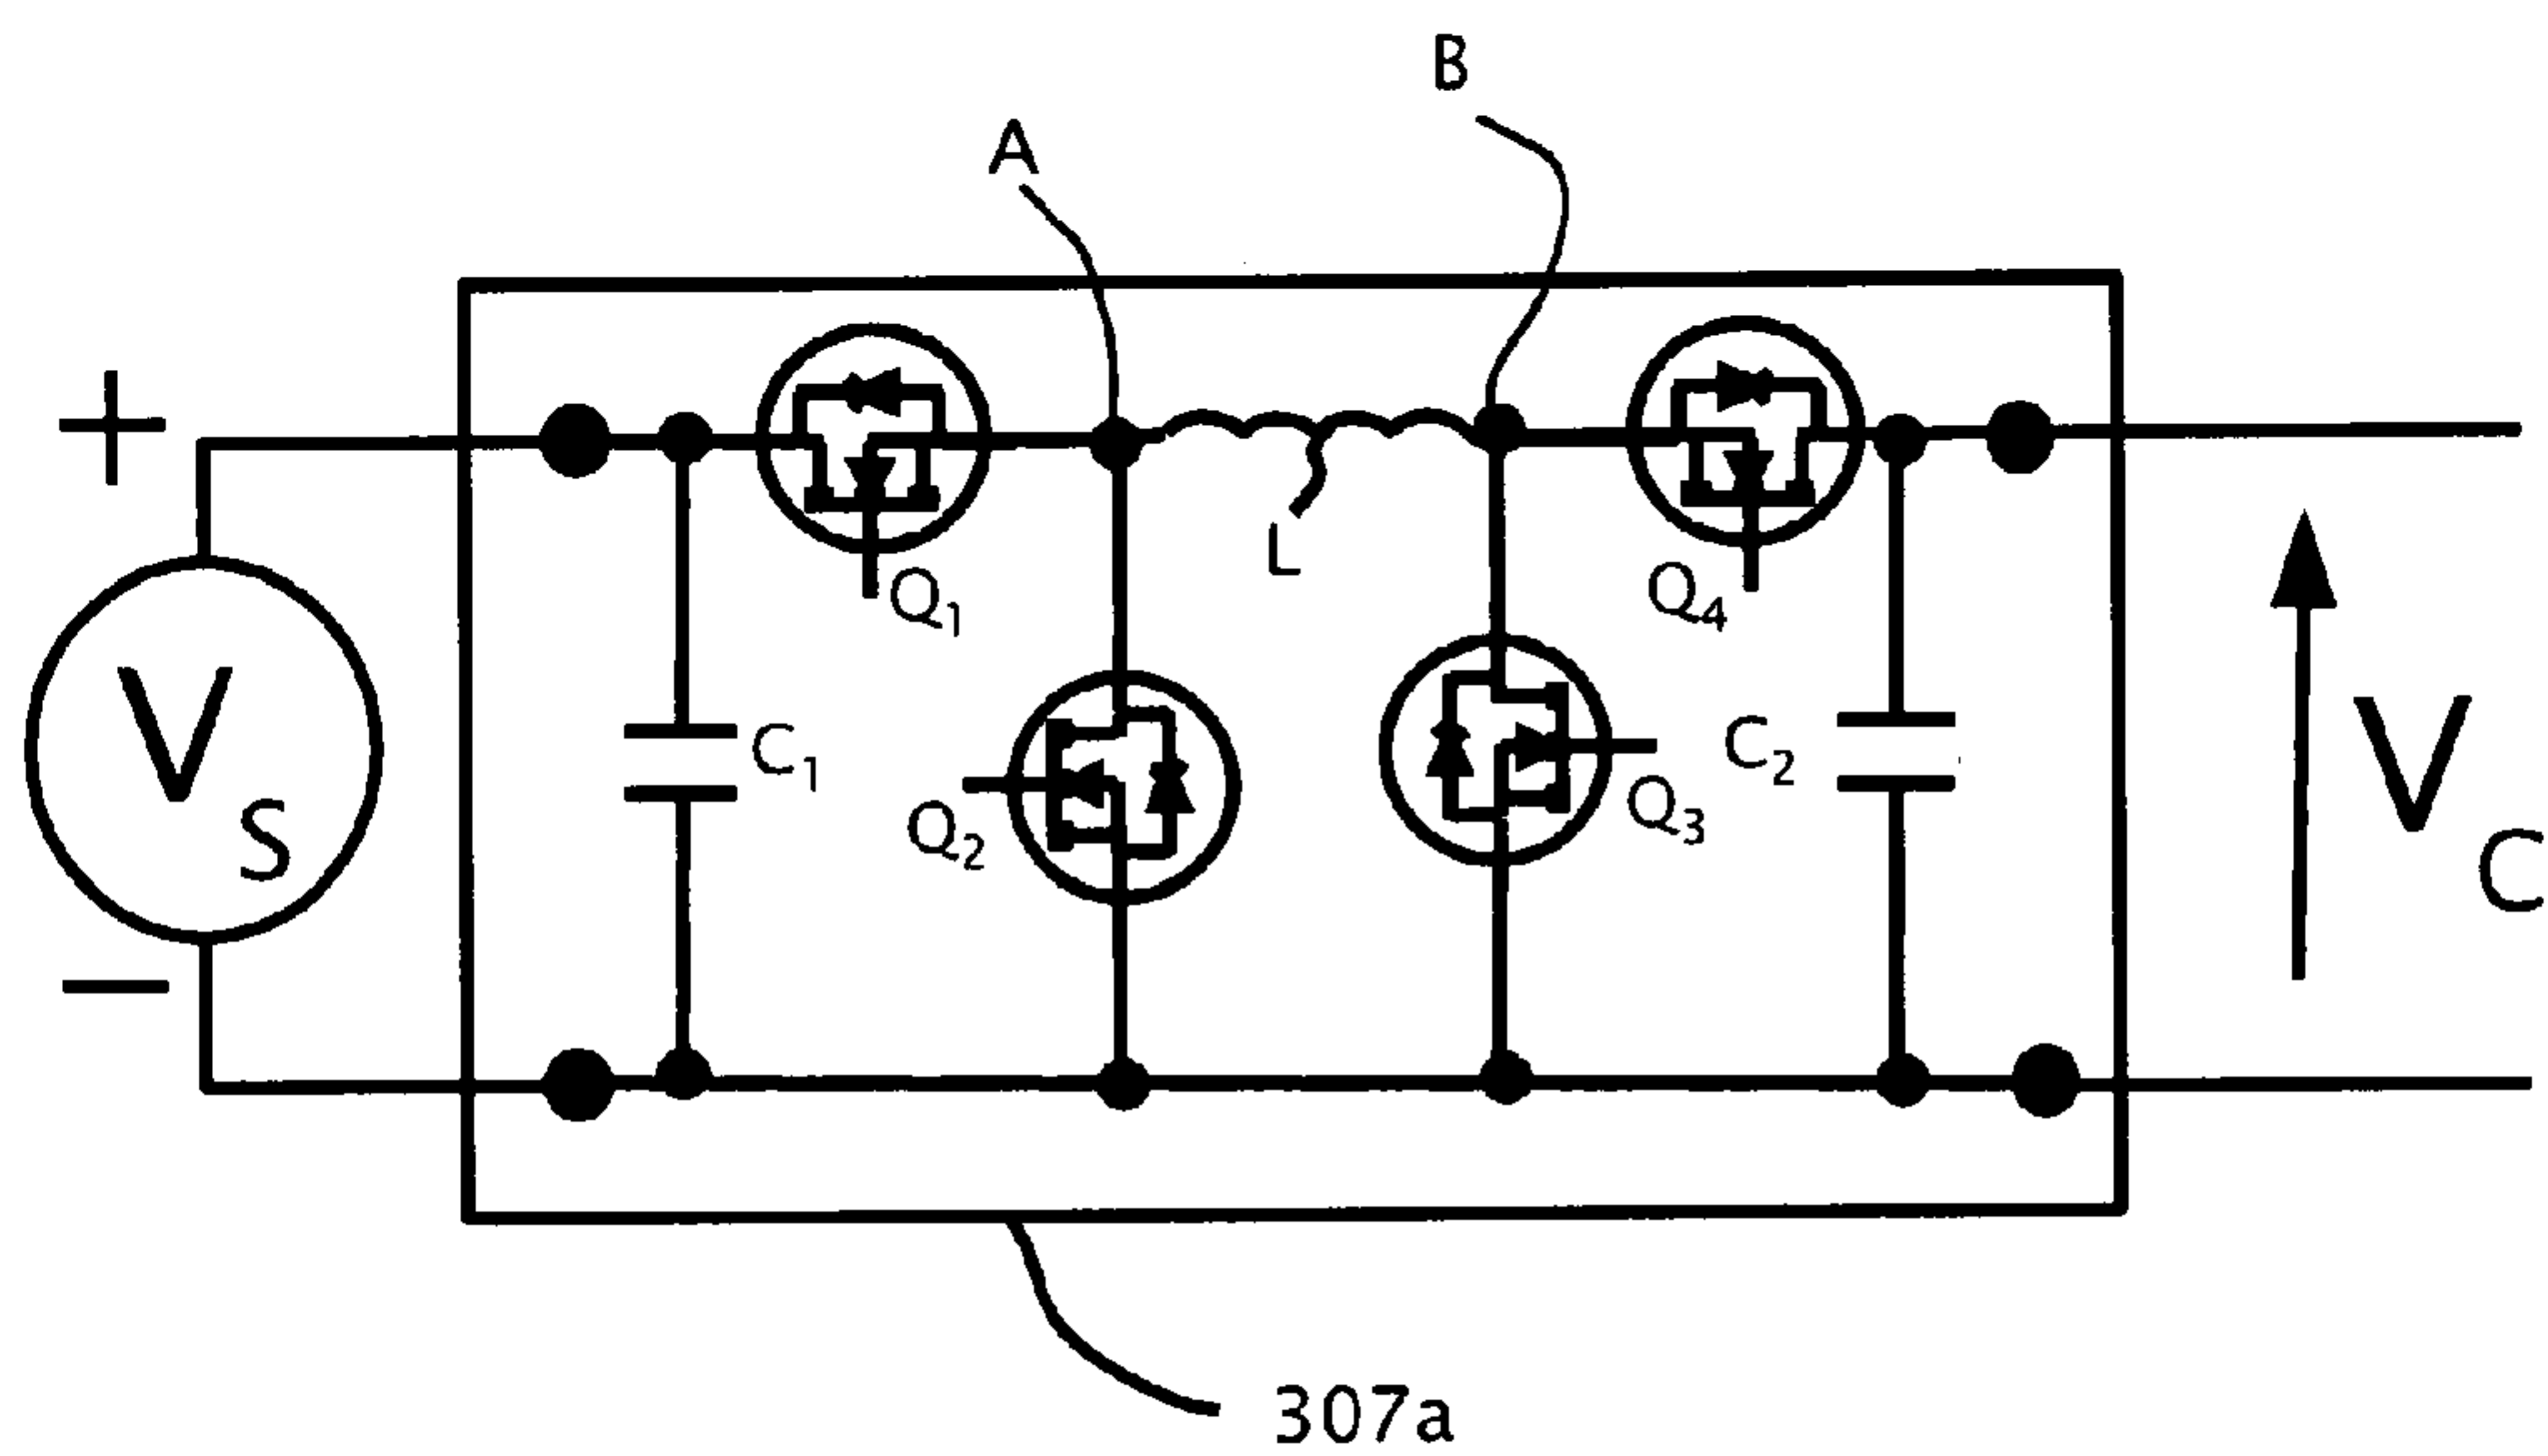


Fig. 3c


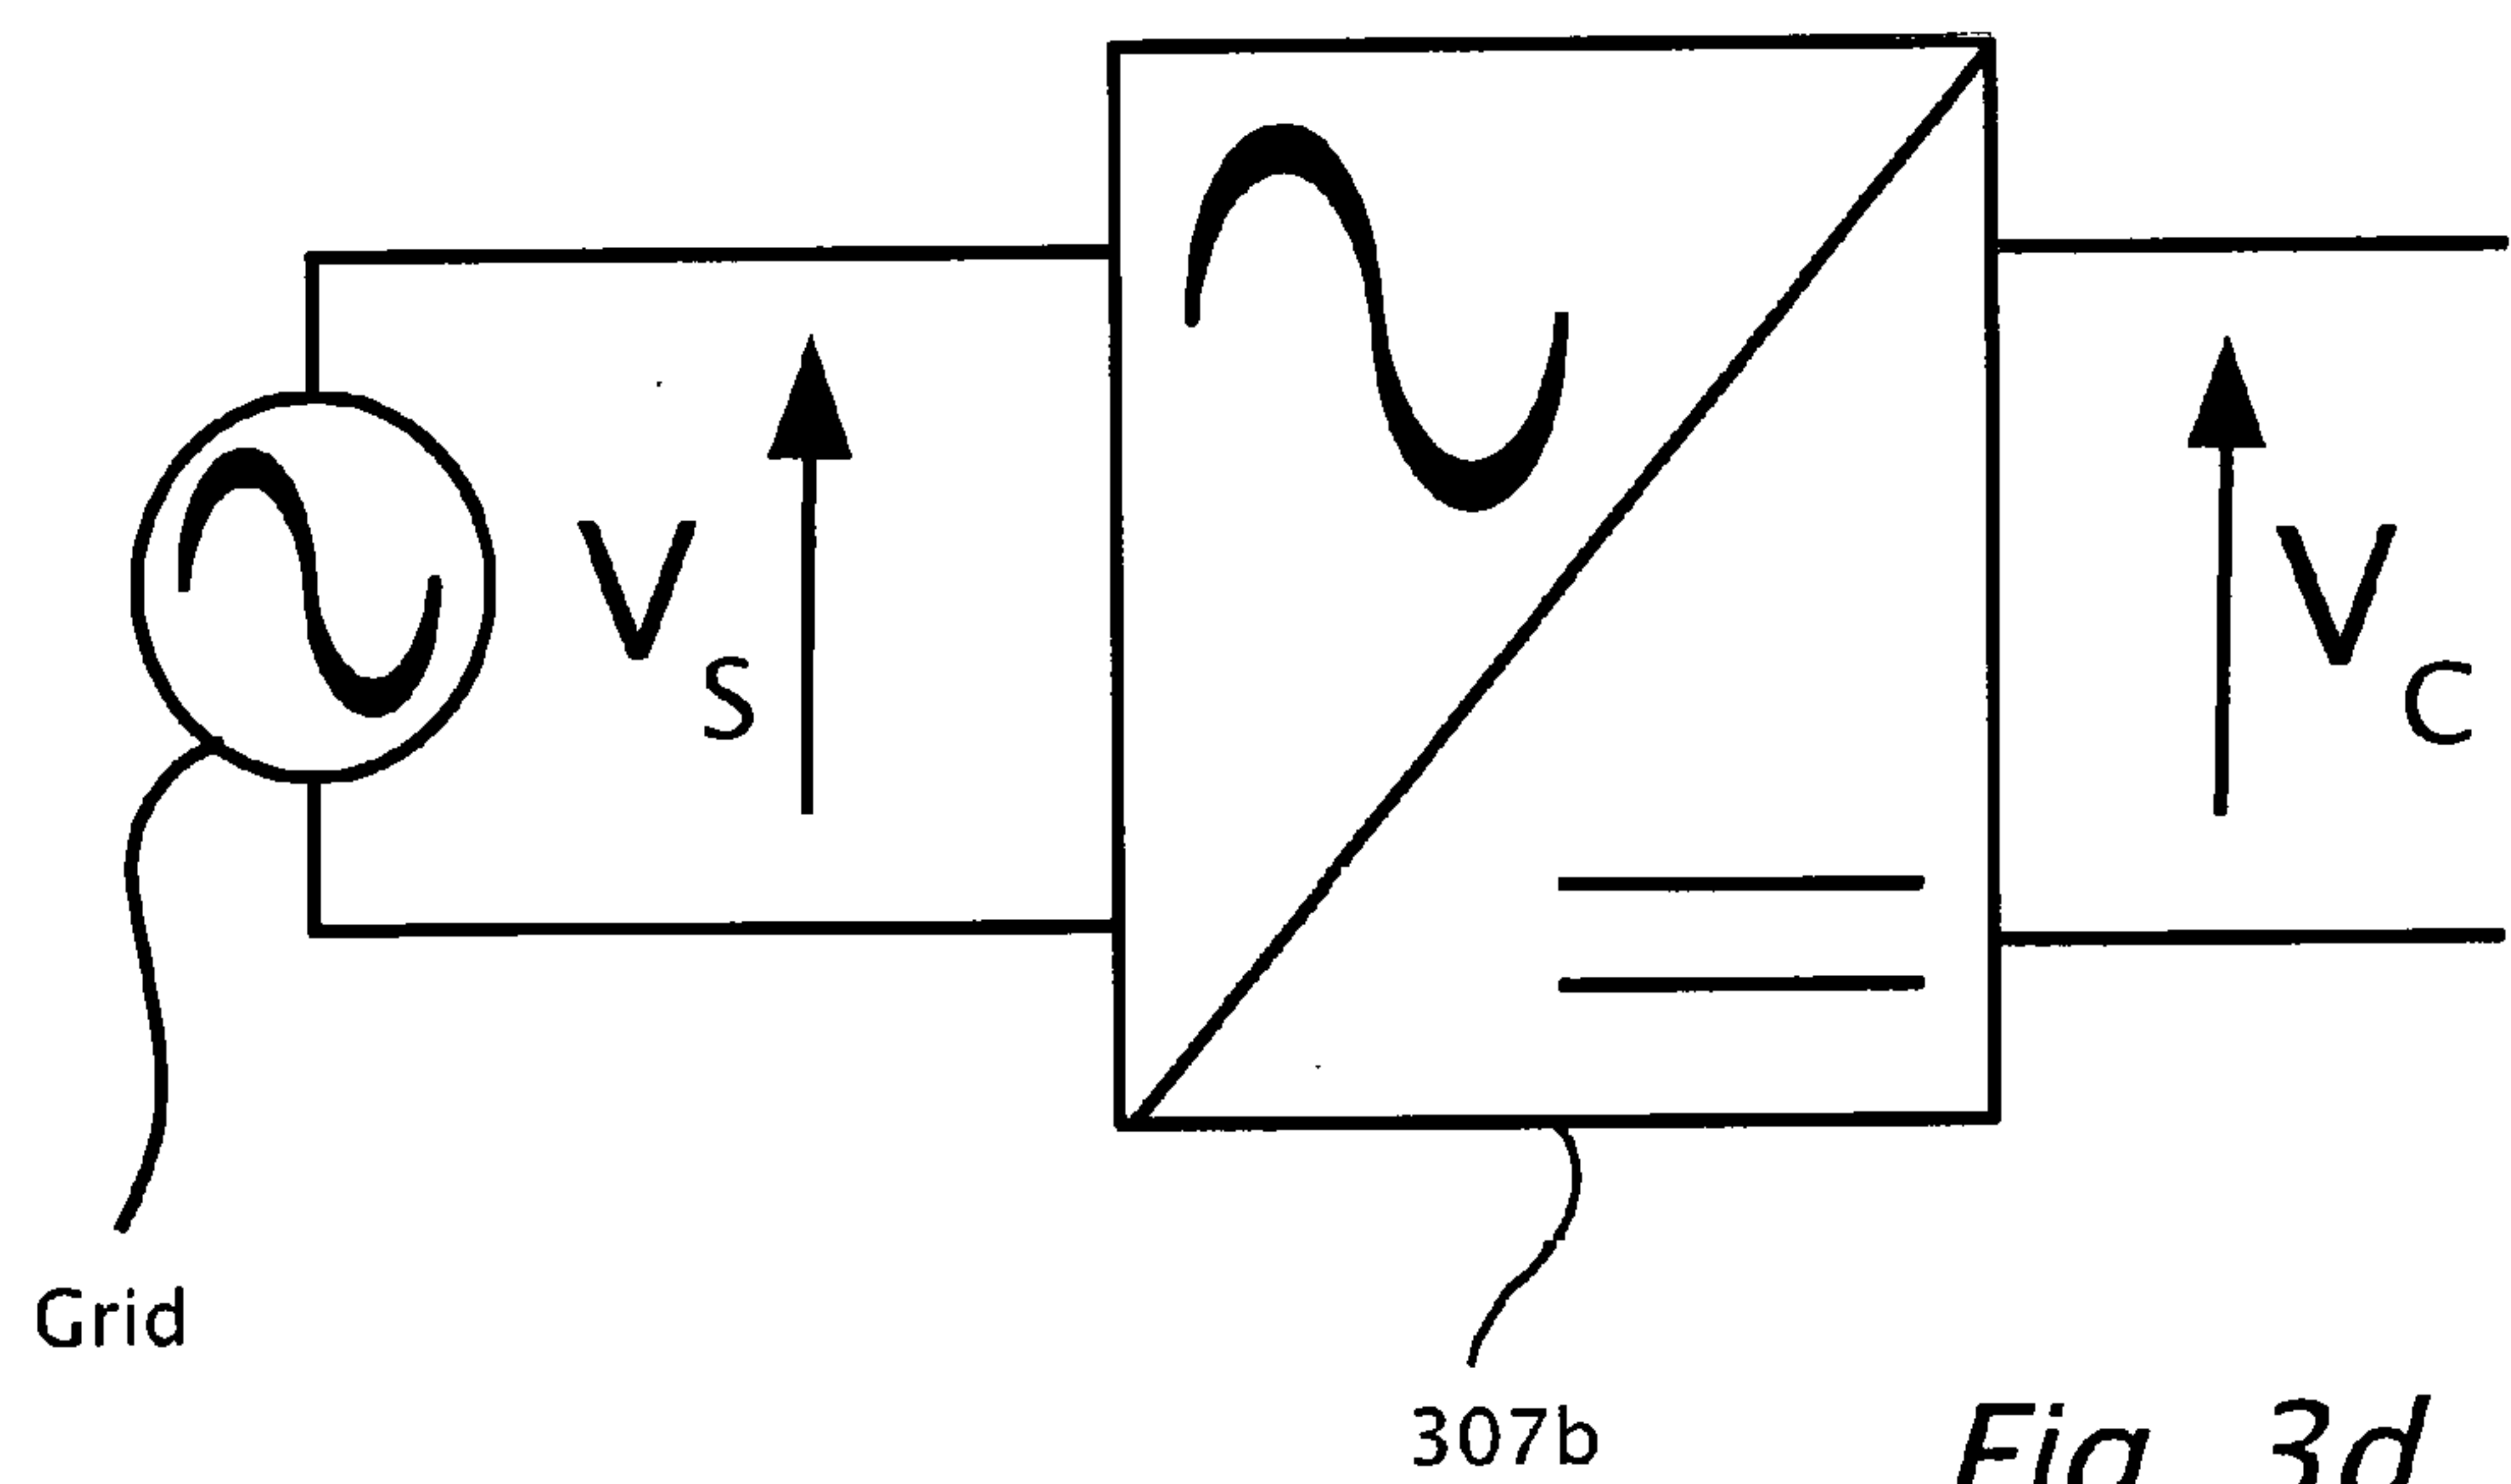


Fig. 3d

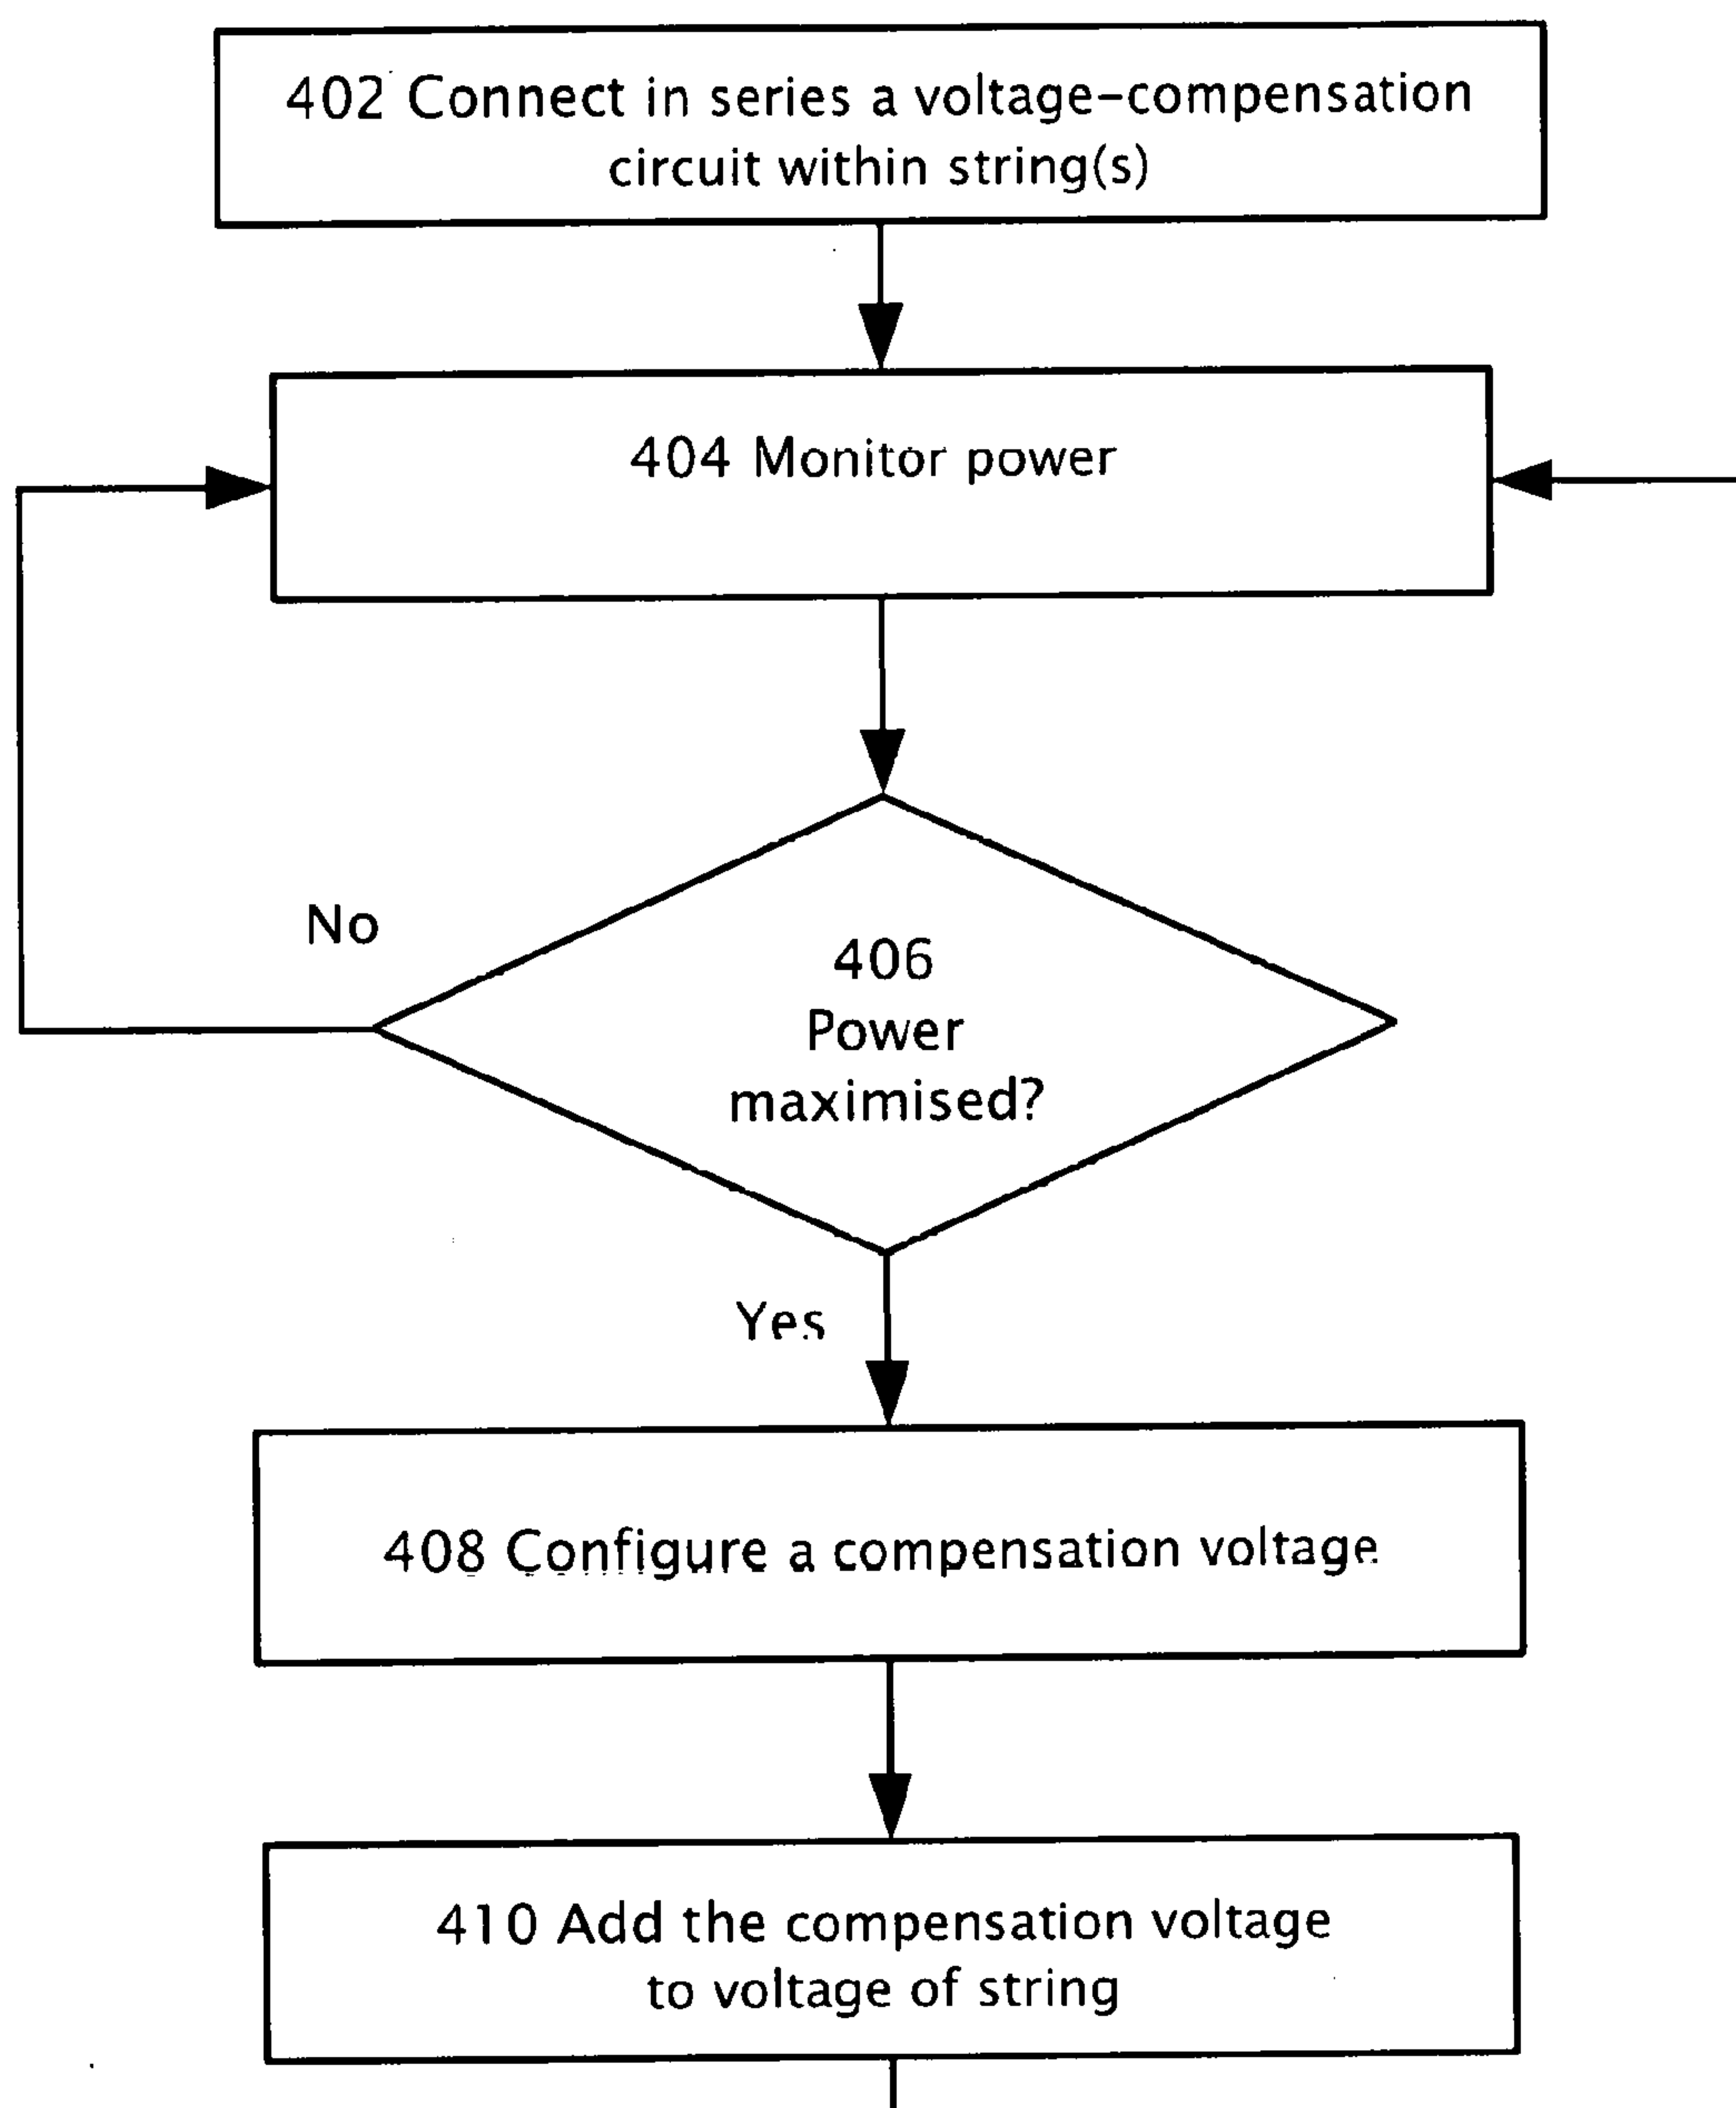

400

Fig. 4

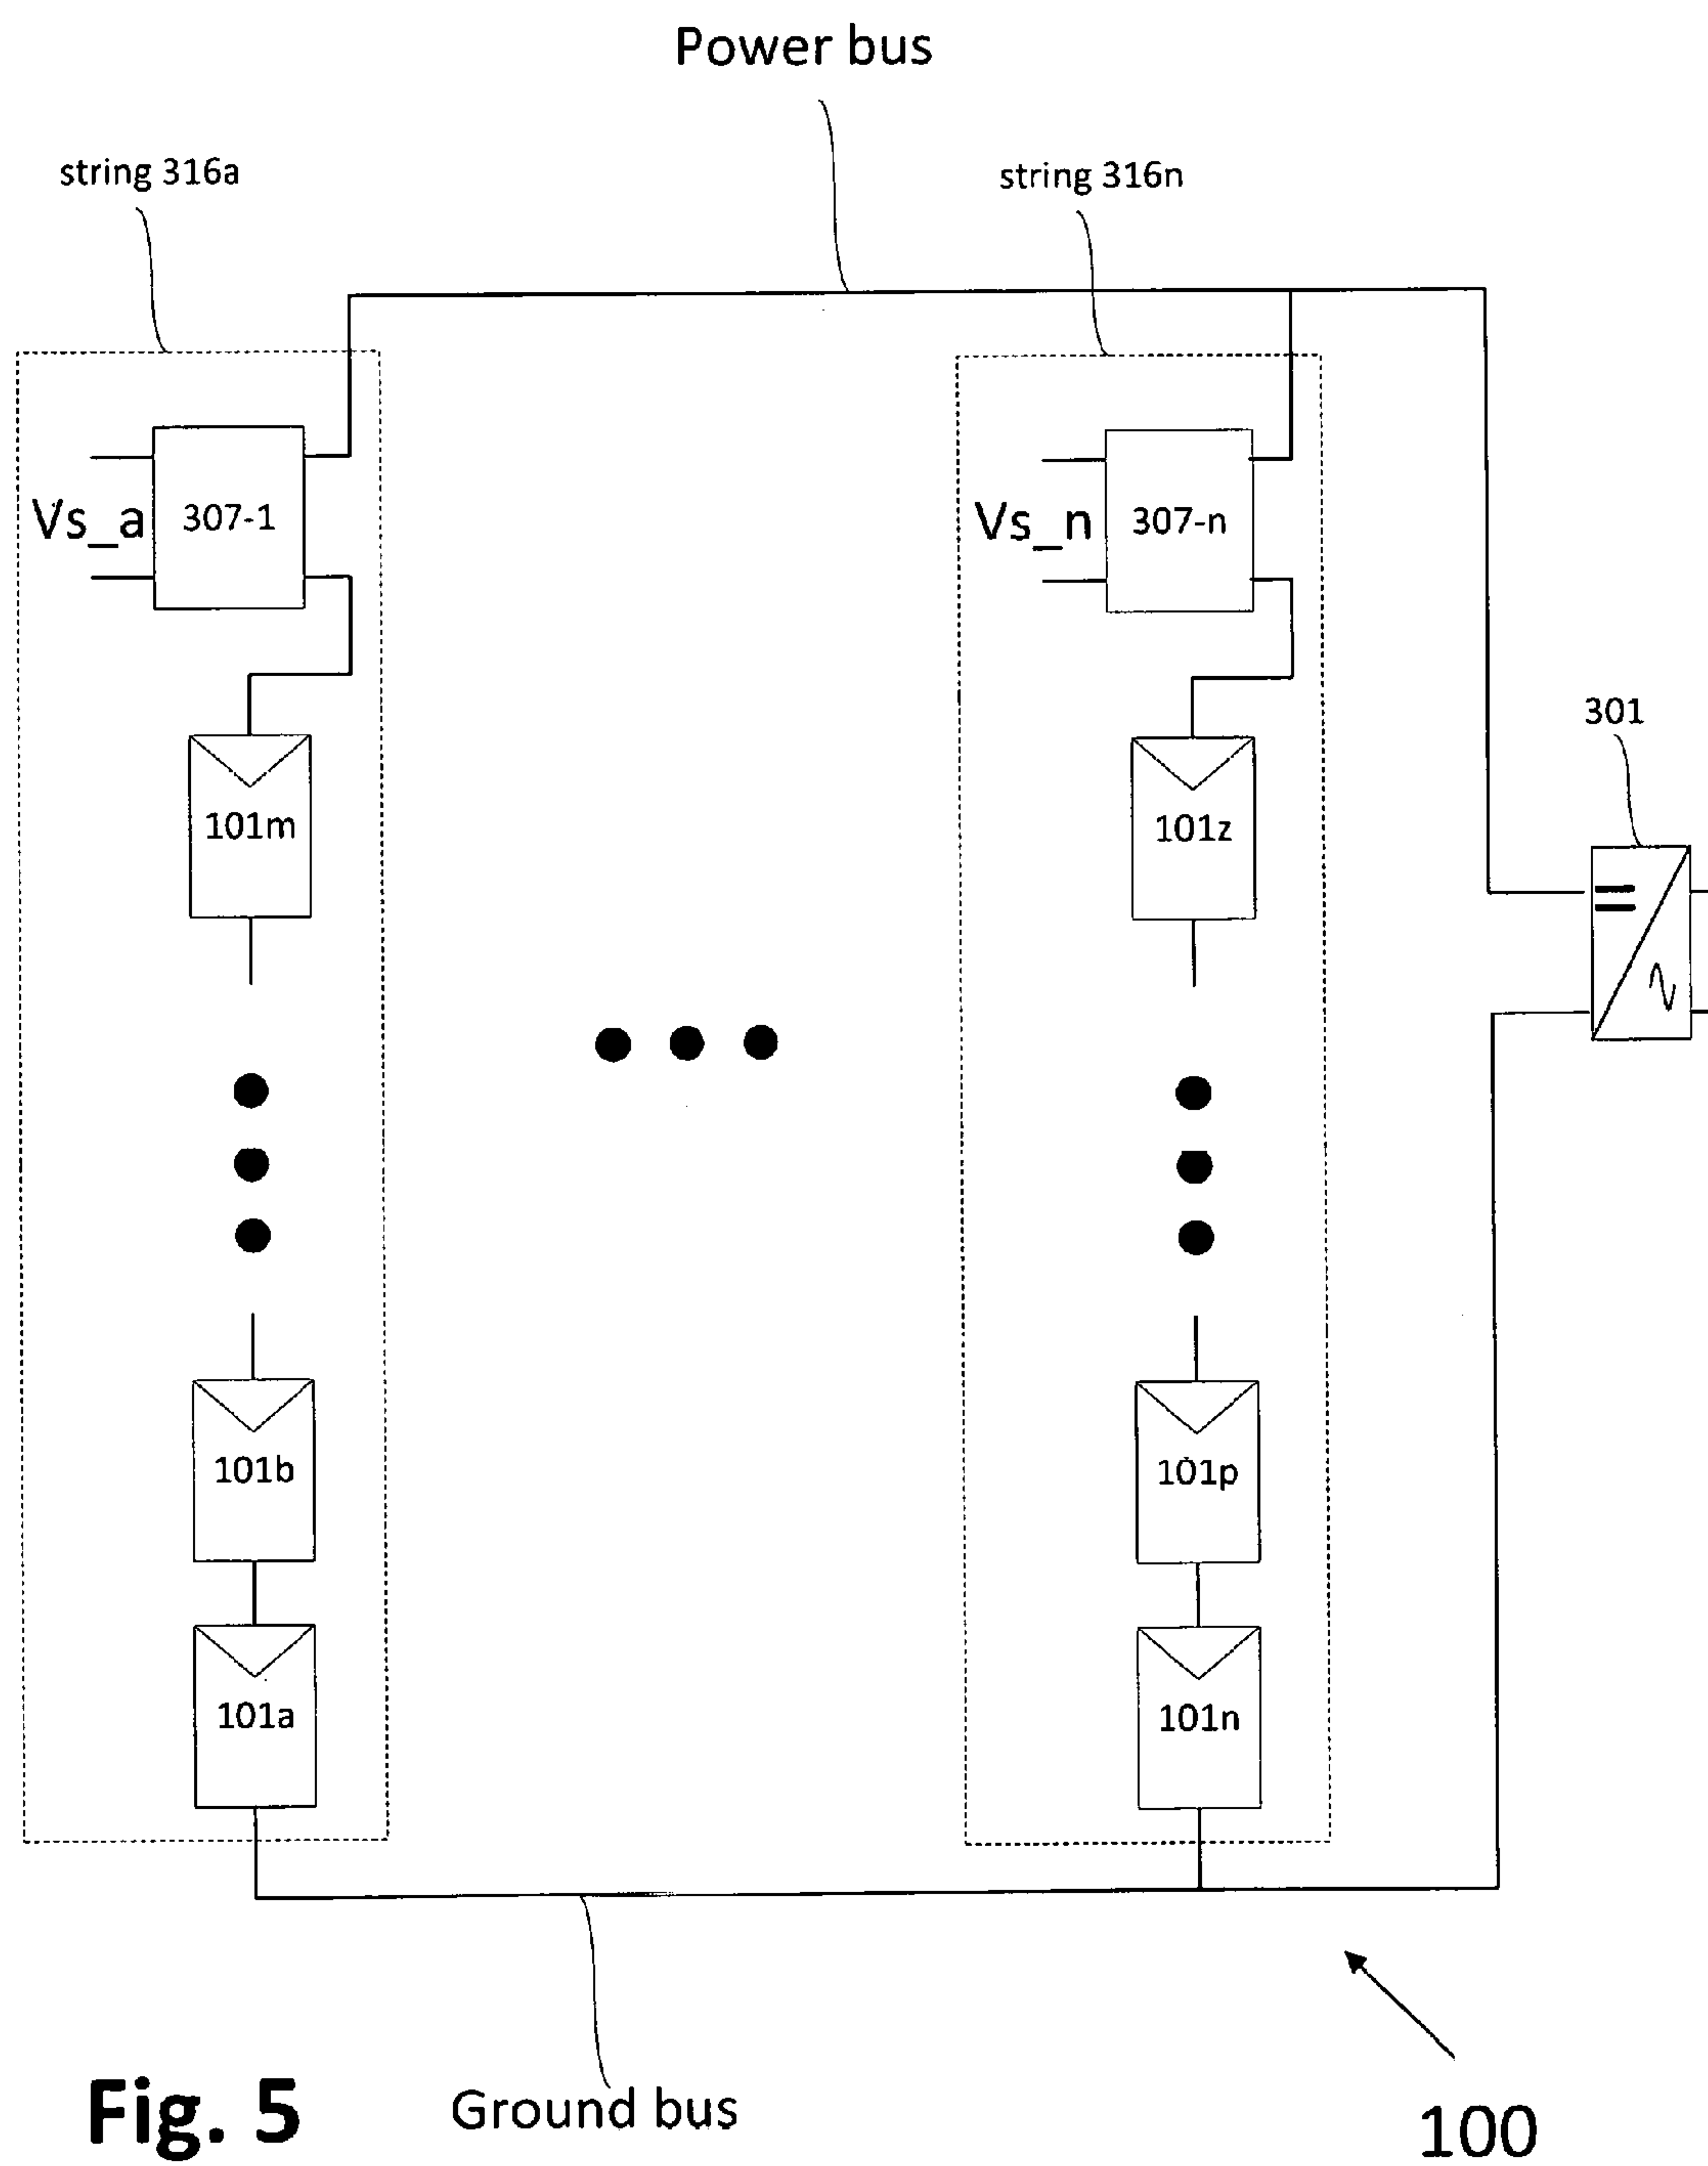
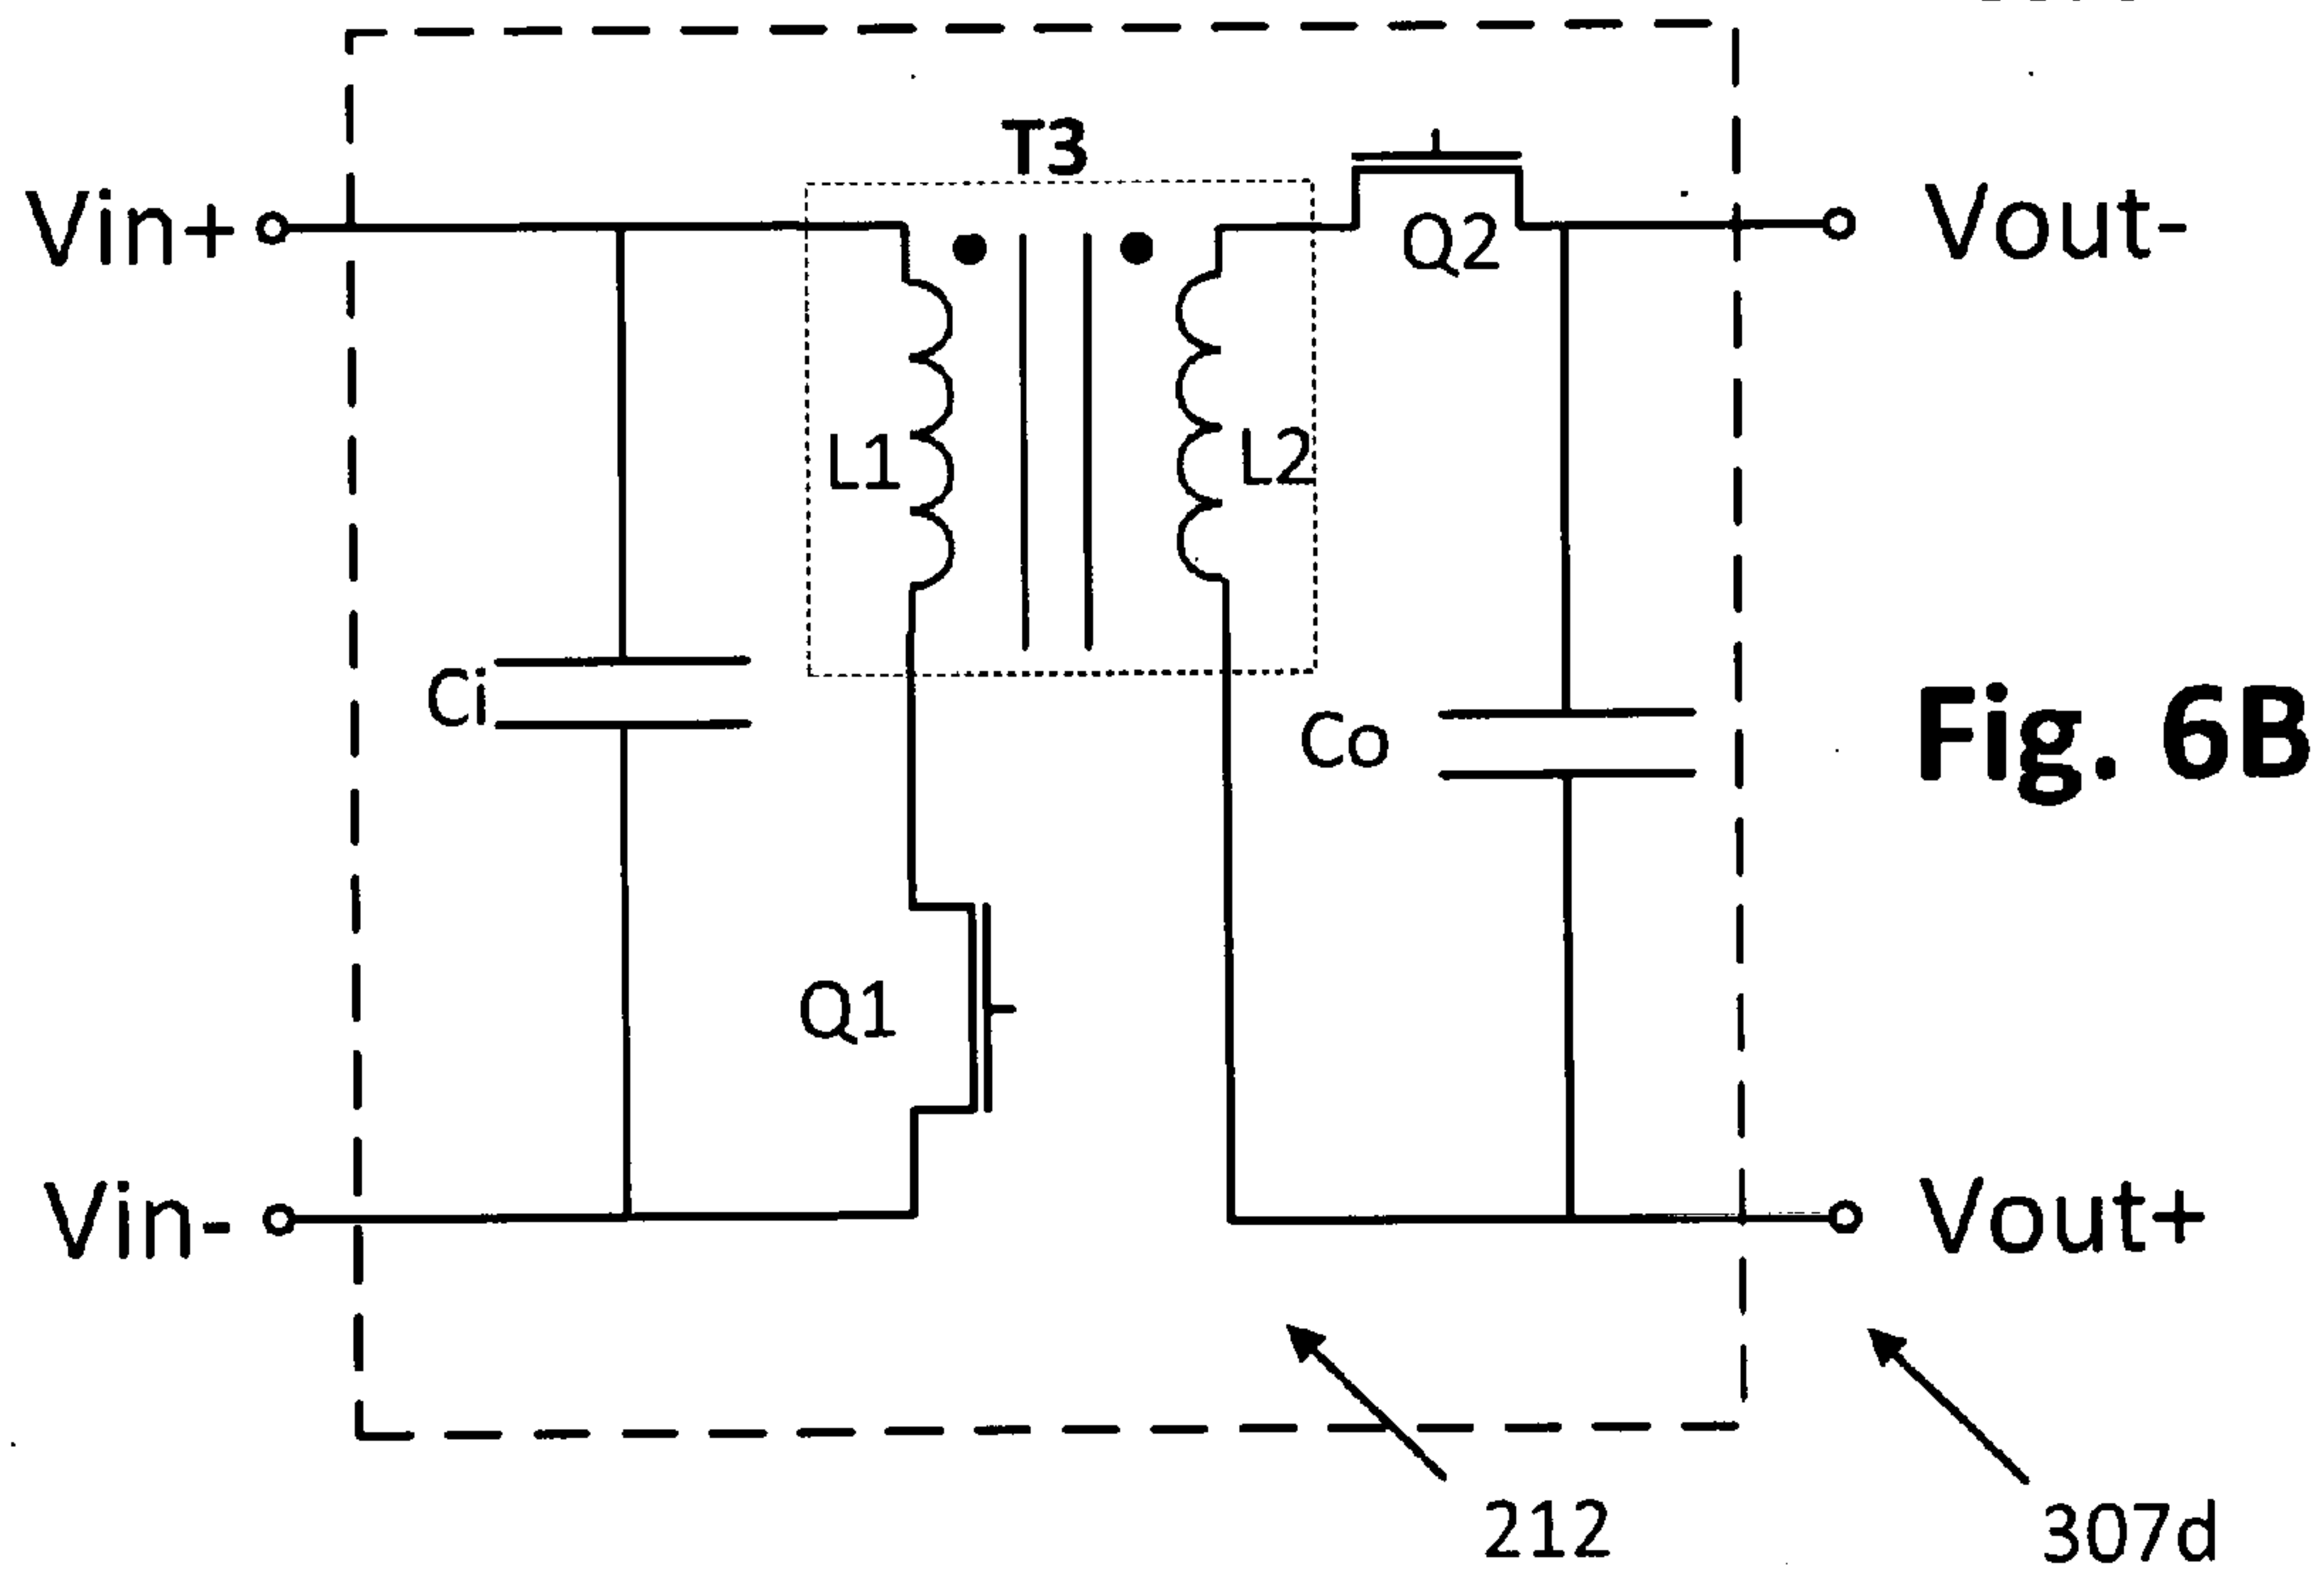
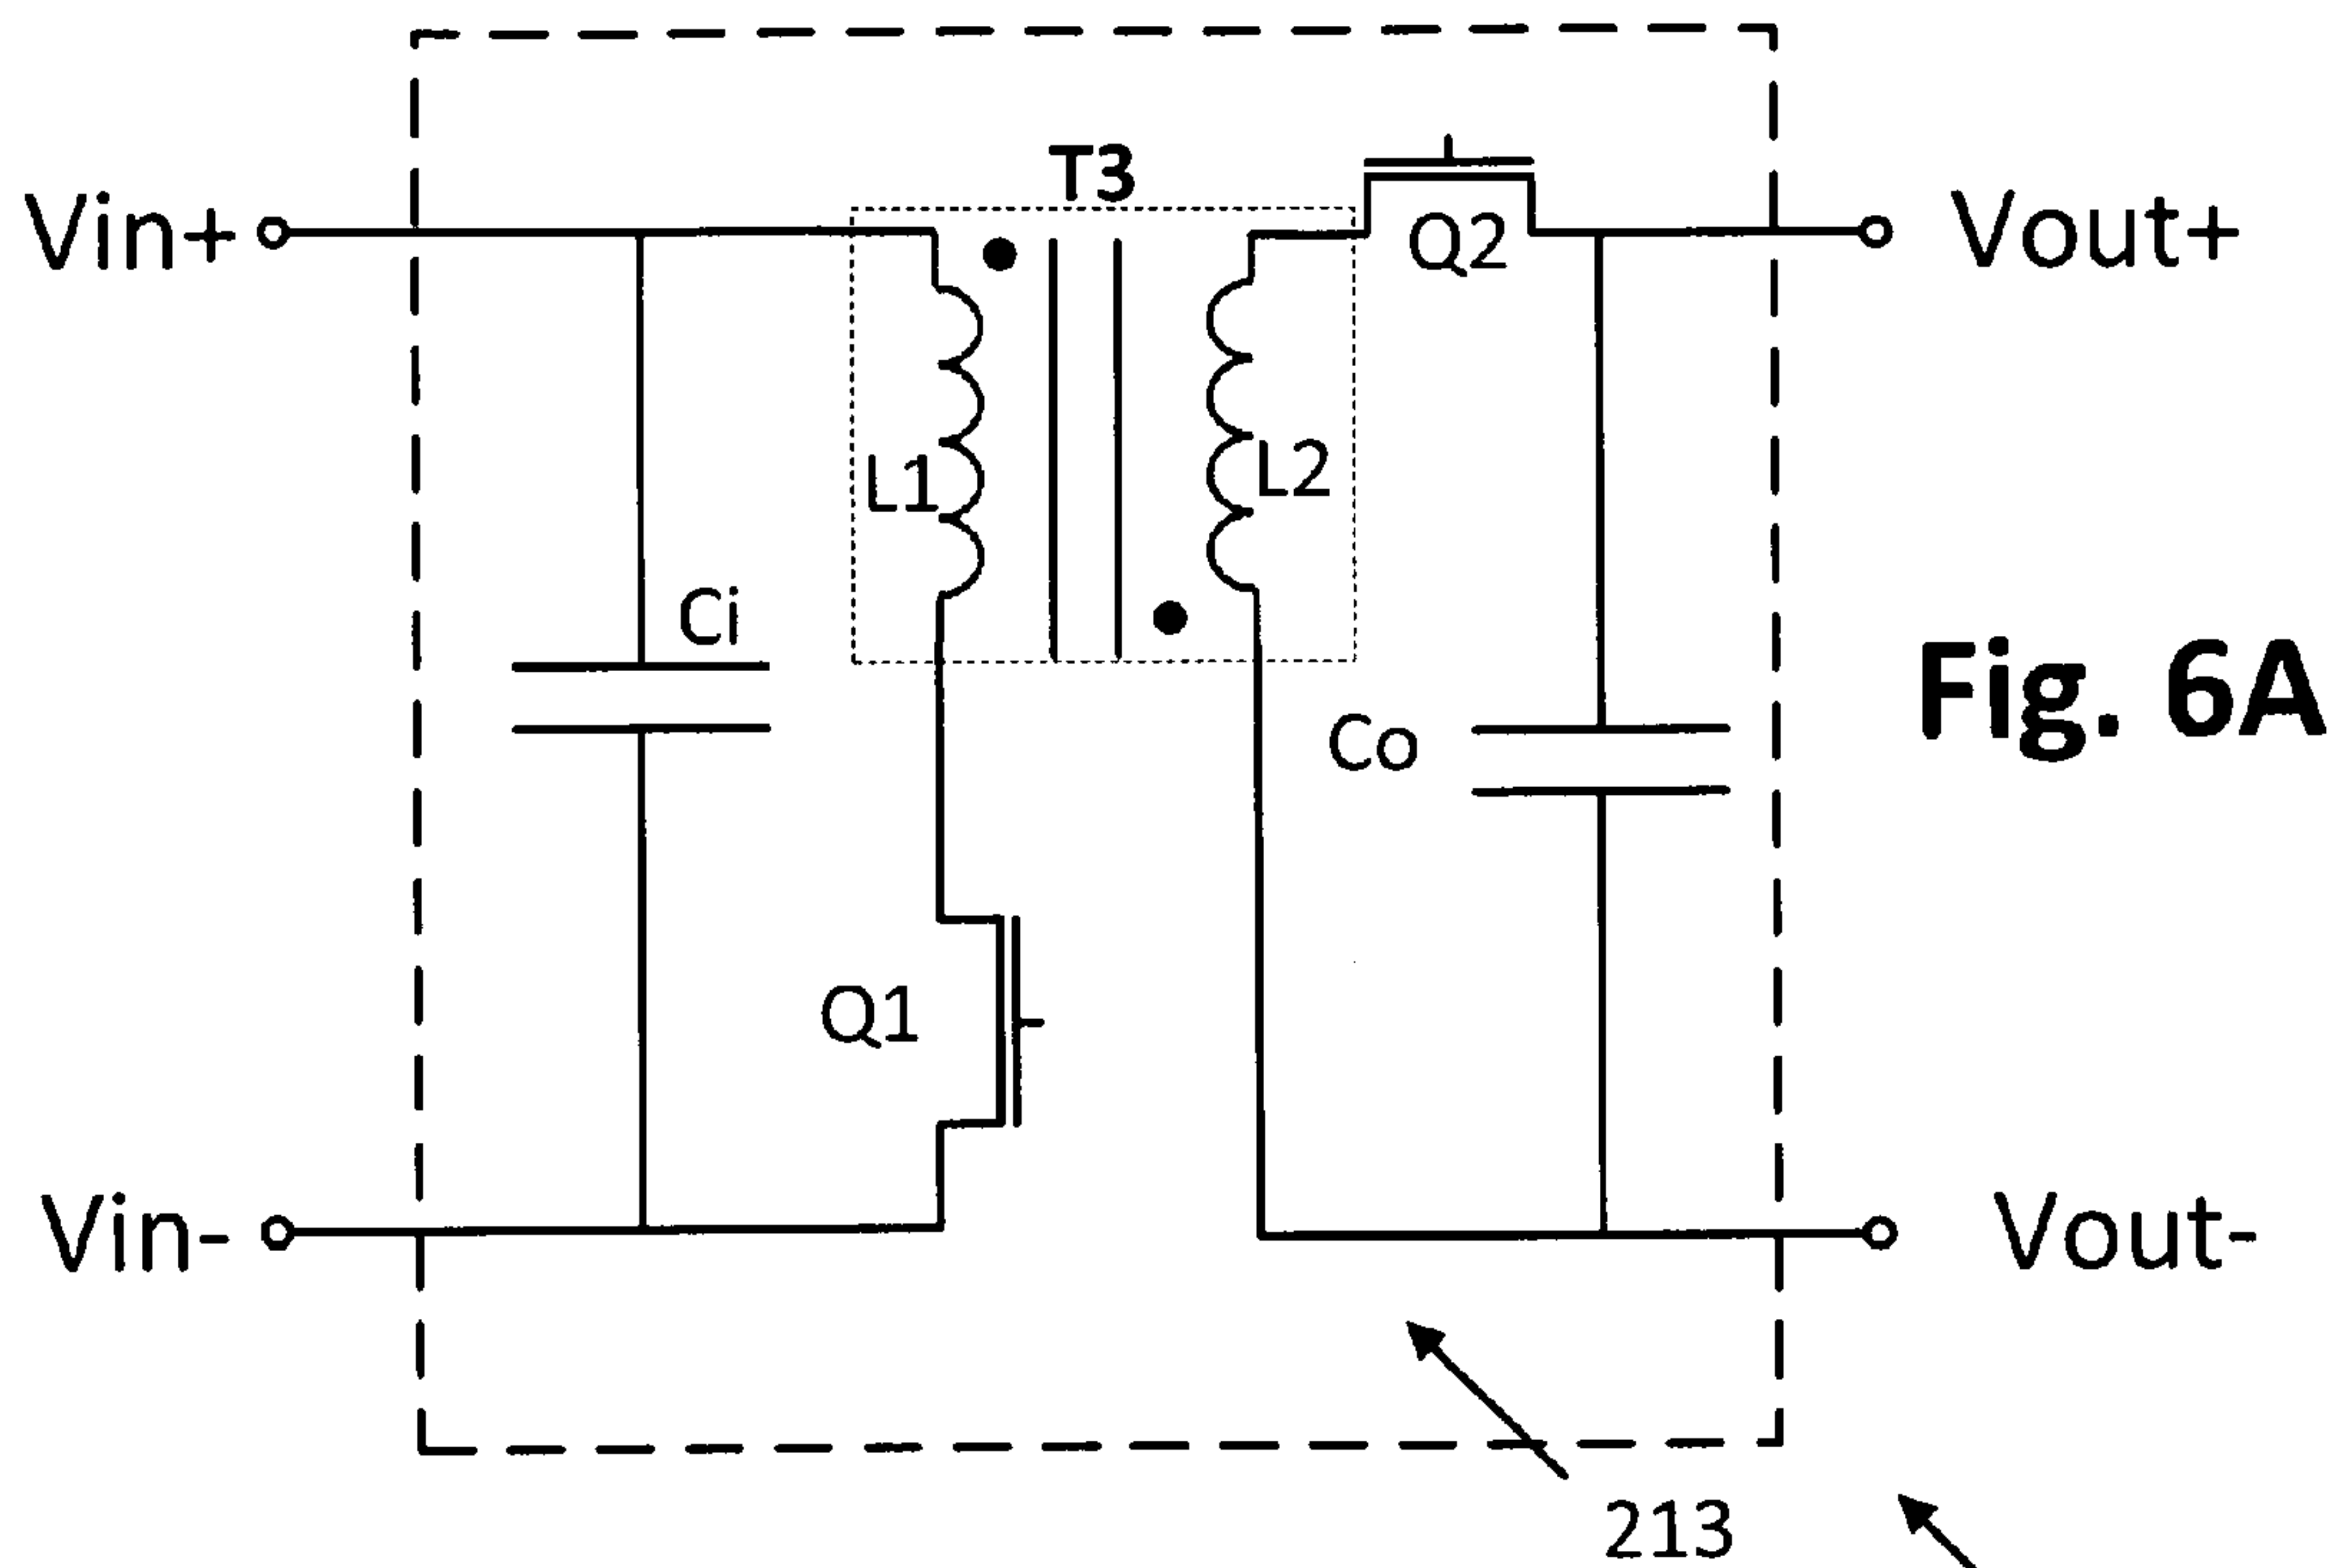
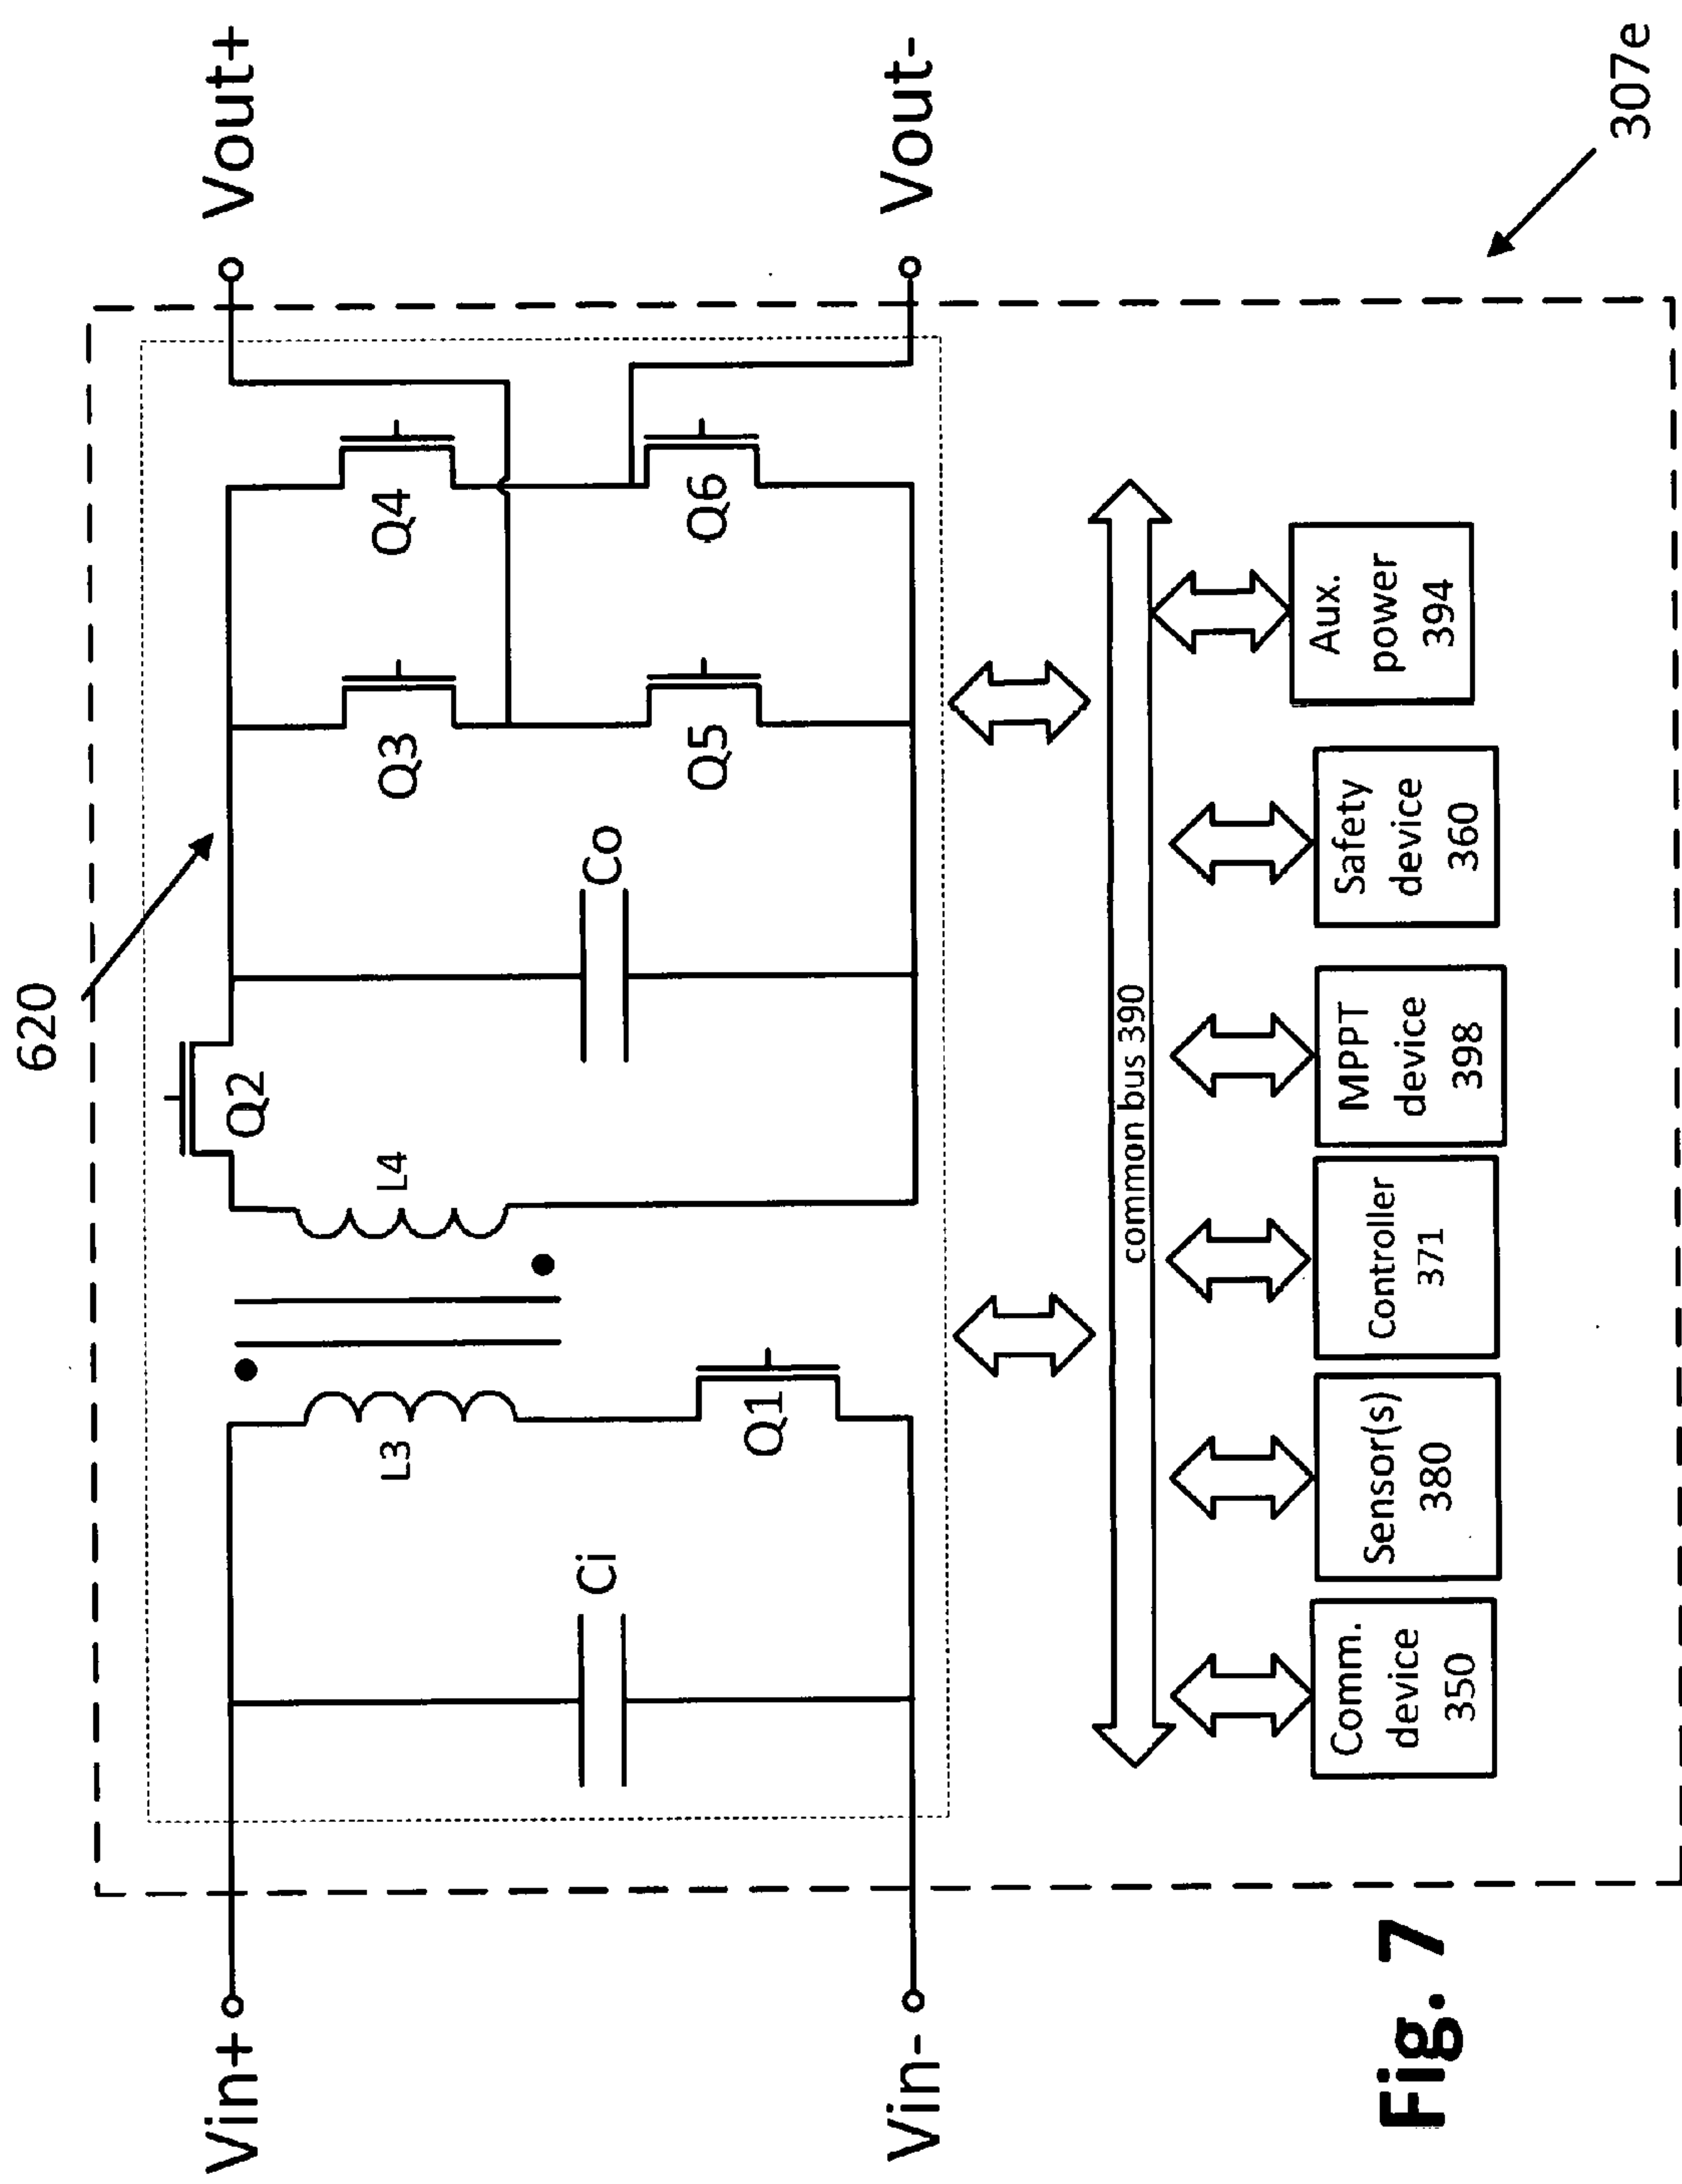


Fig. 5





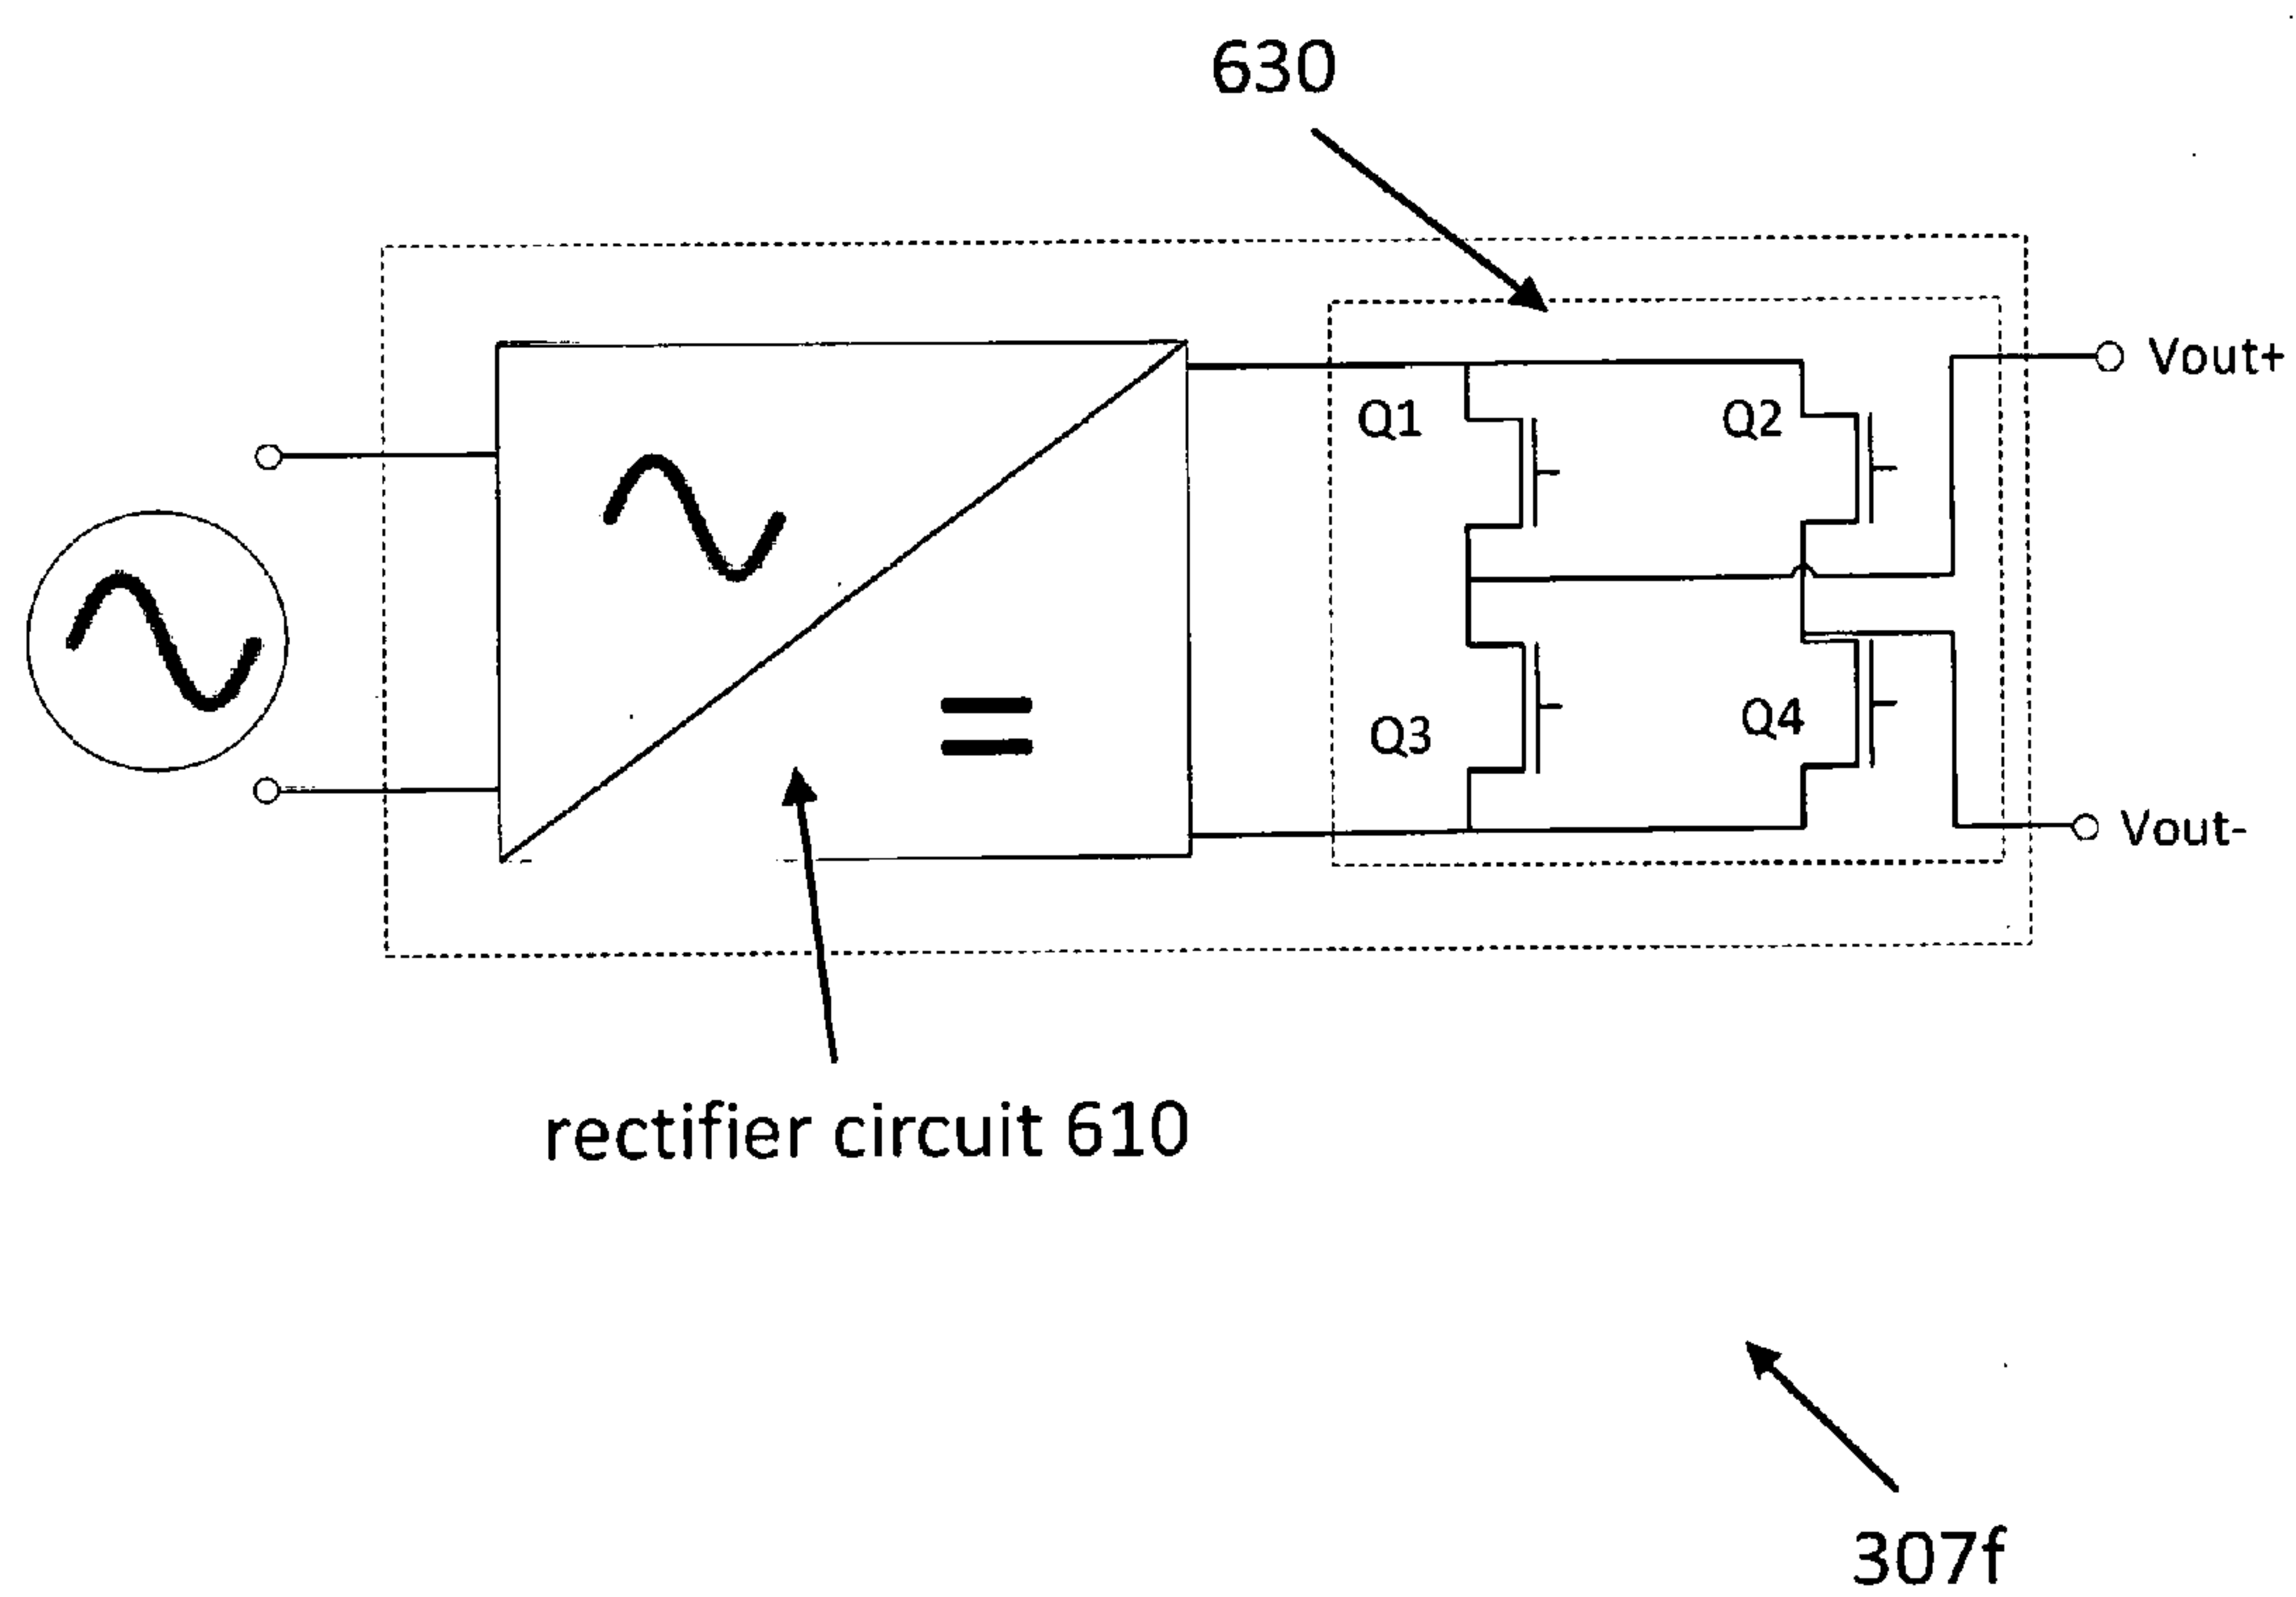


Fig. 8

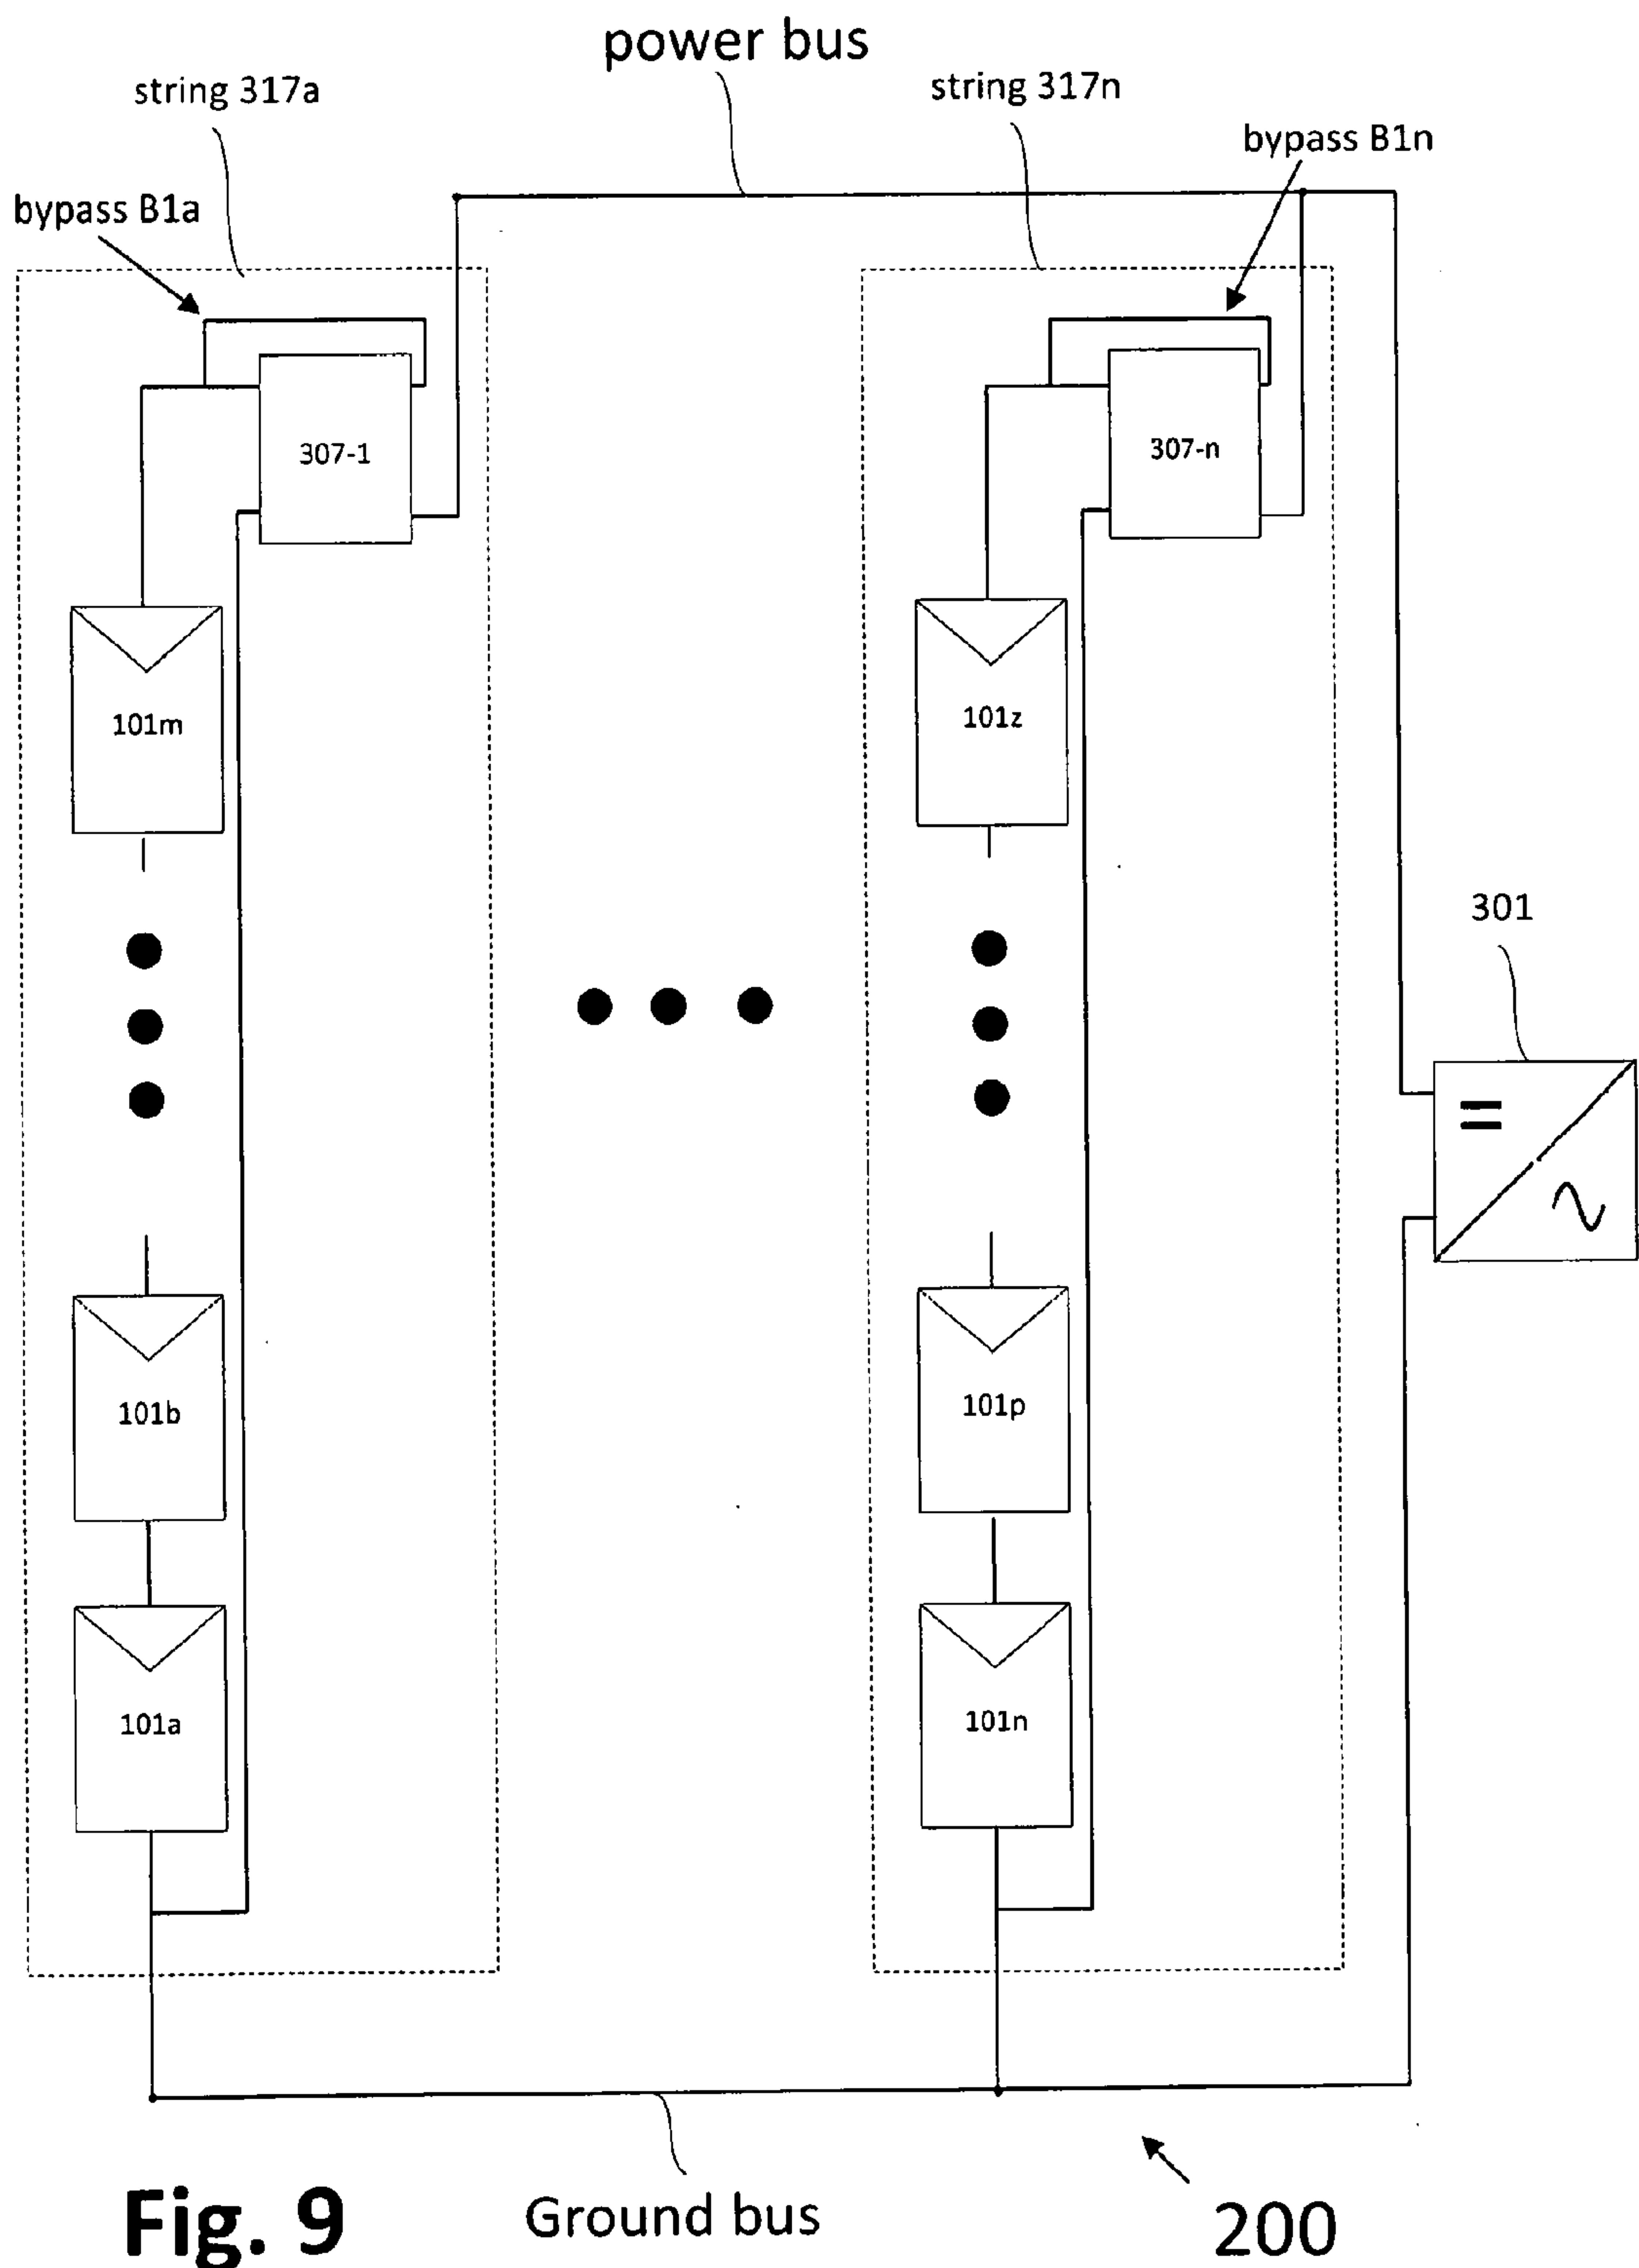
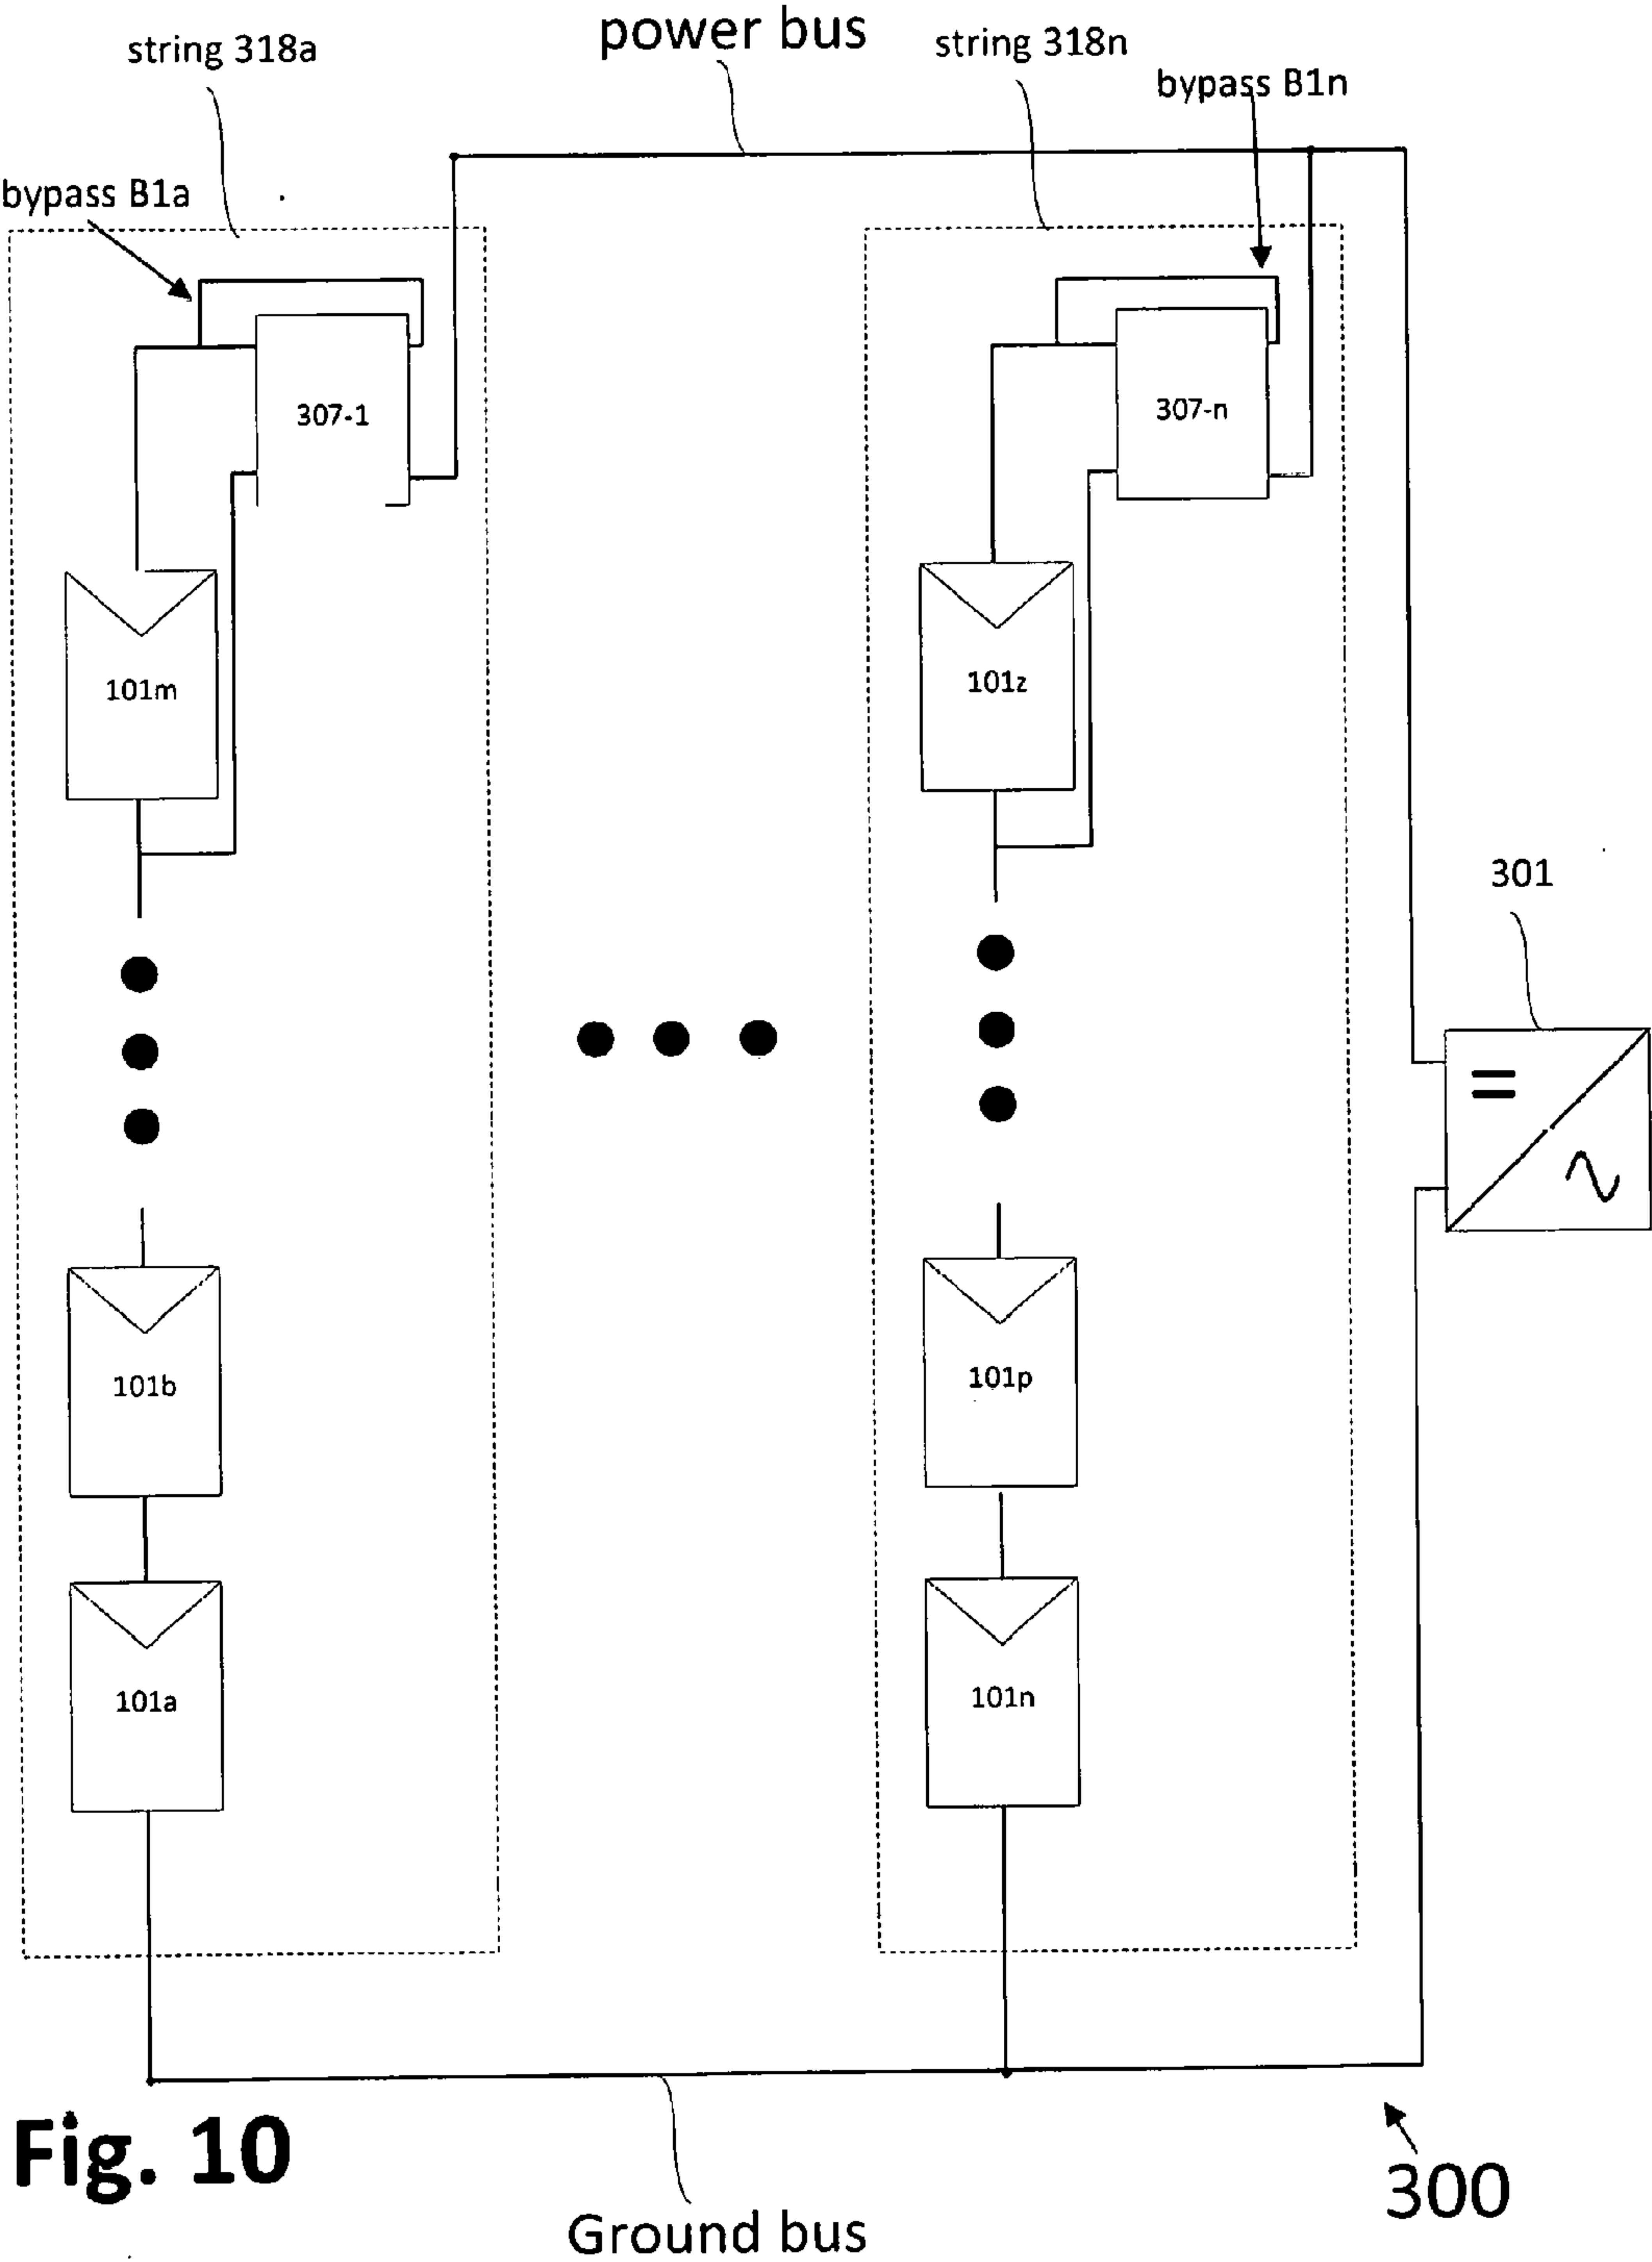


Fig. 9



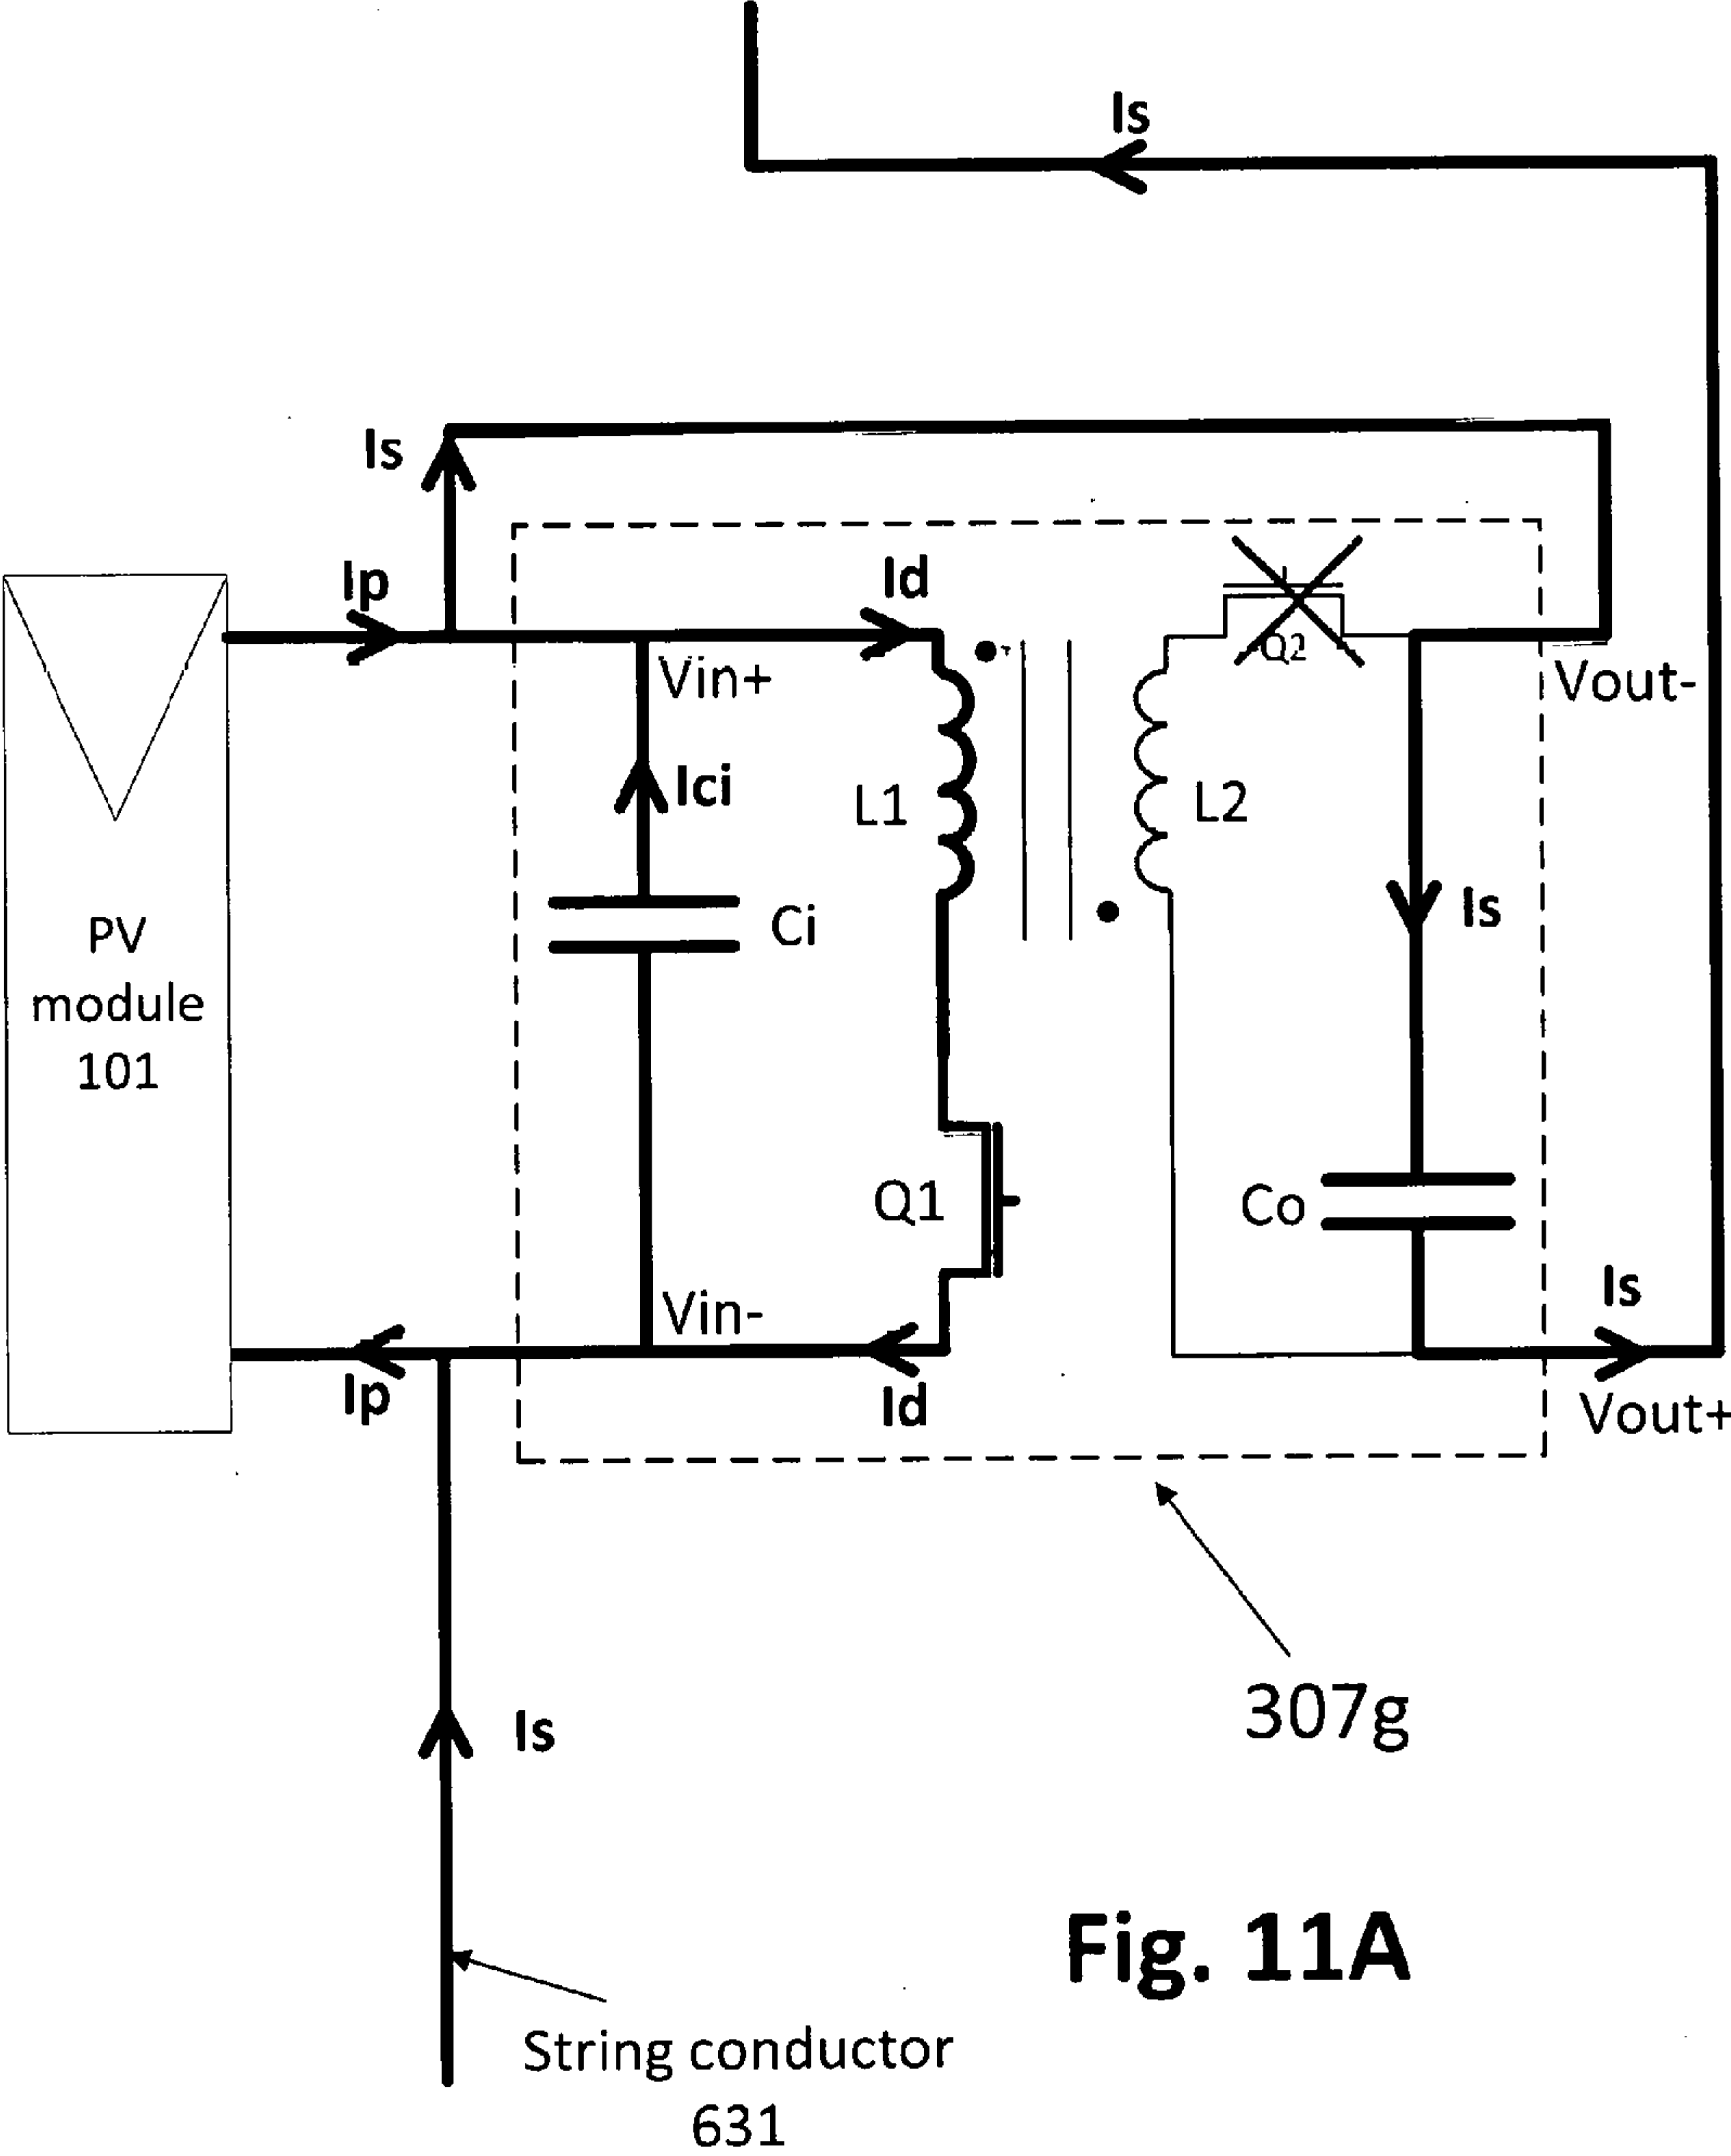
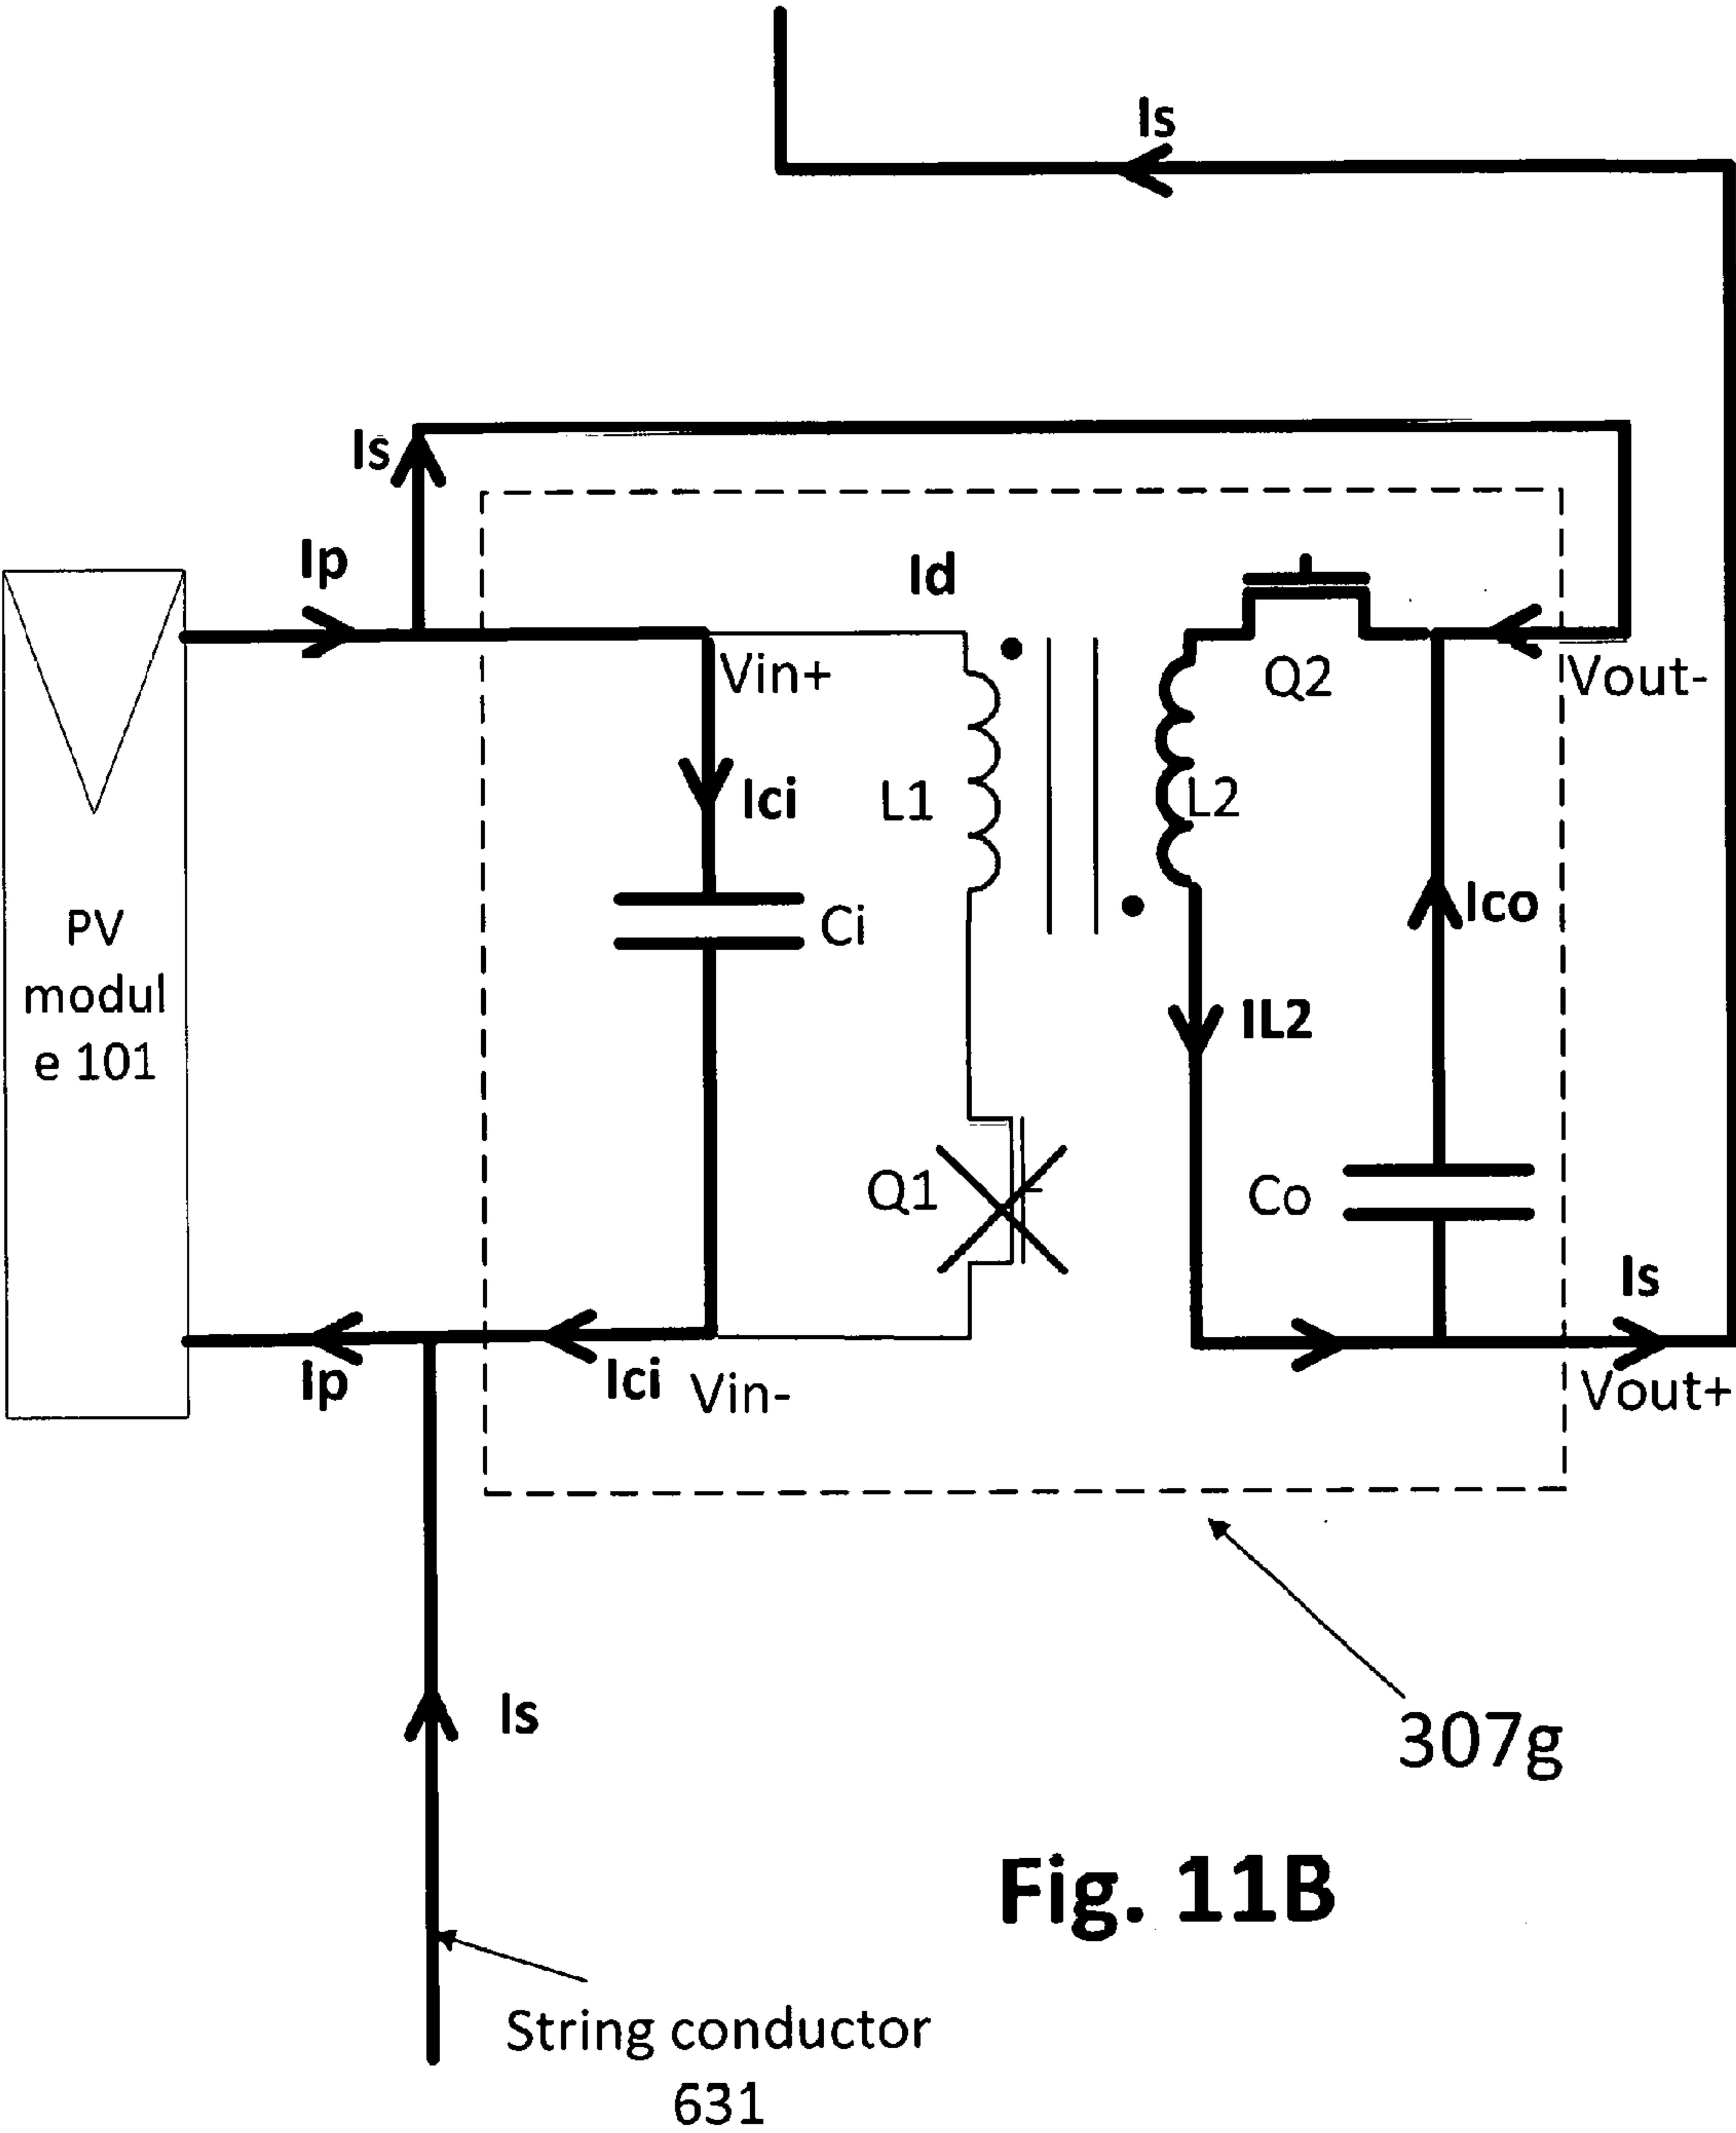


Fig. 11A



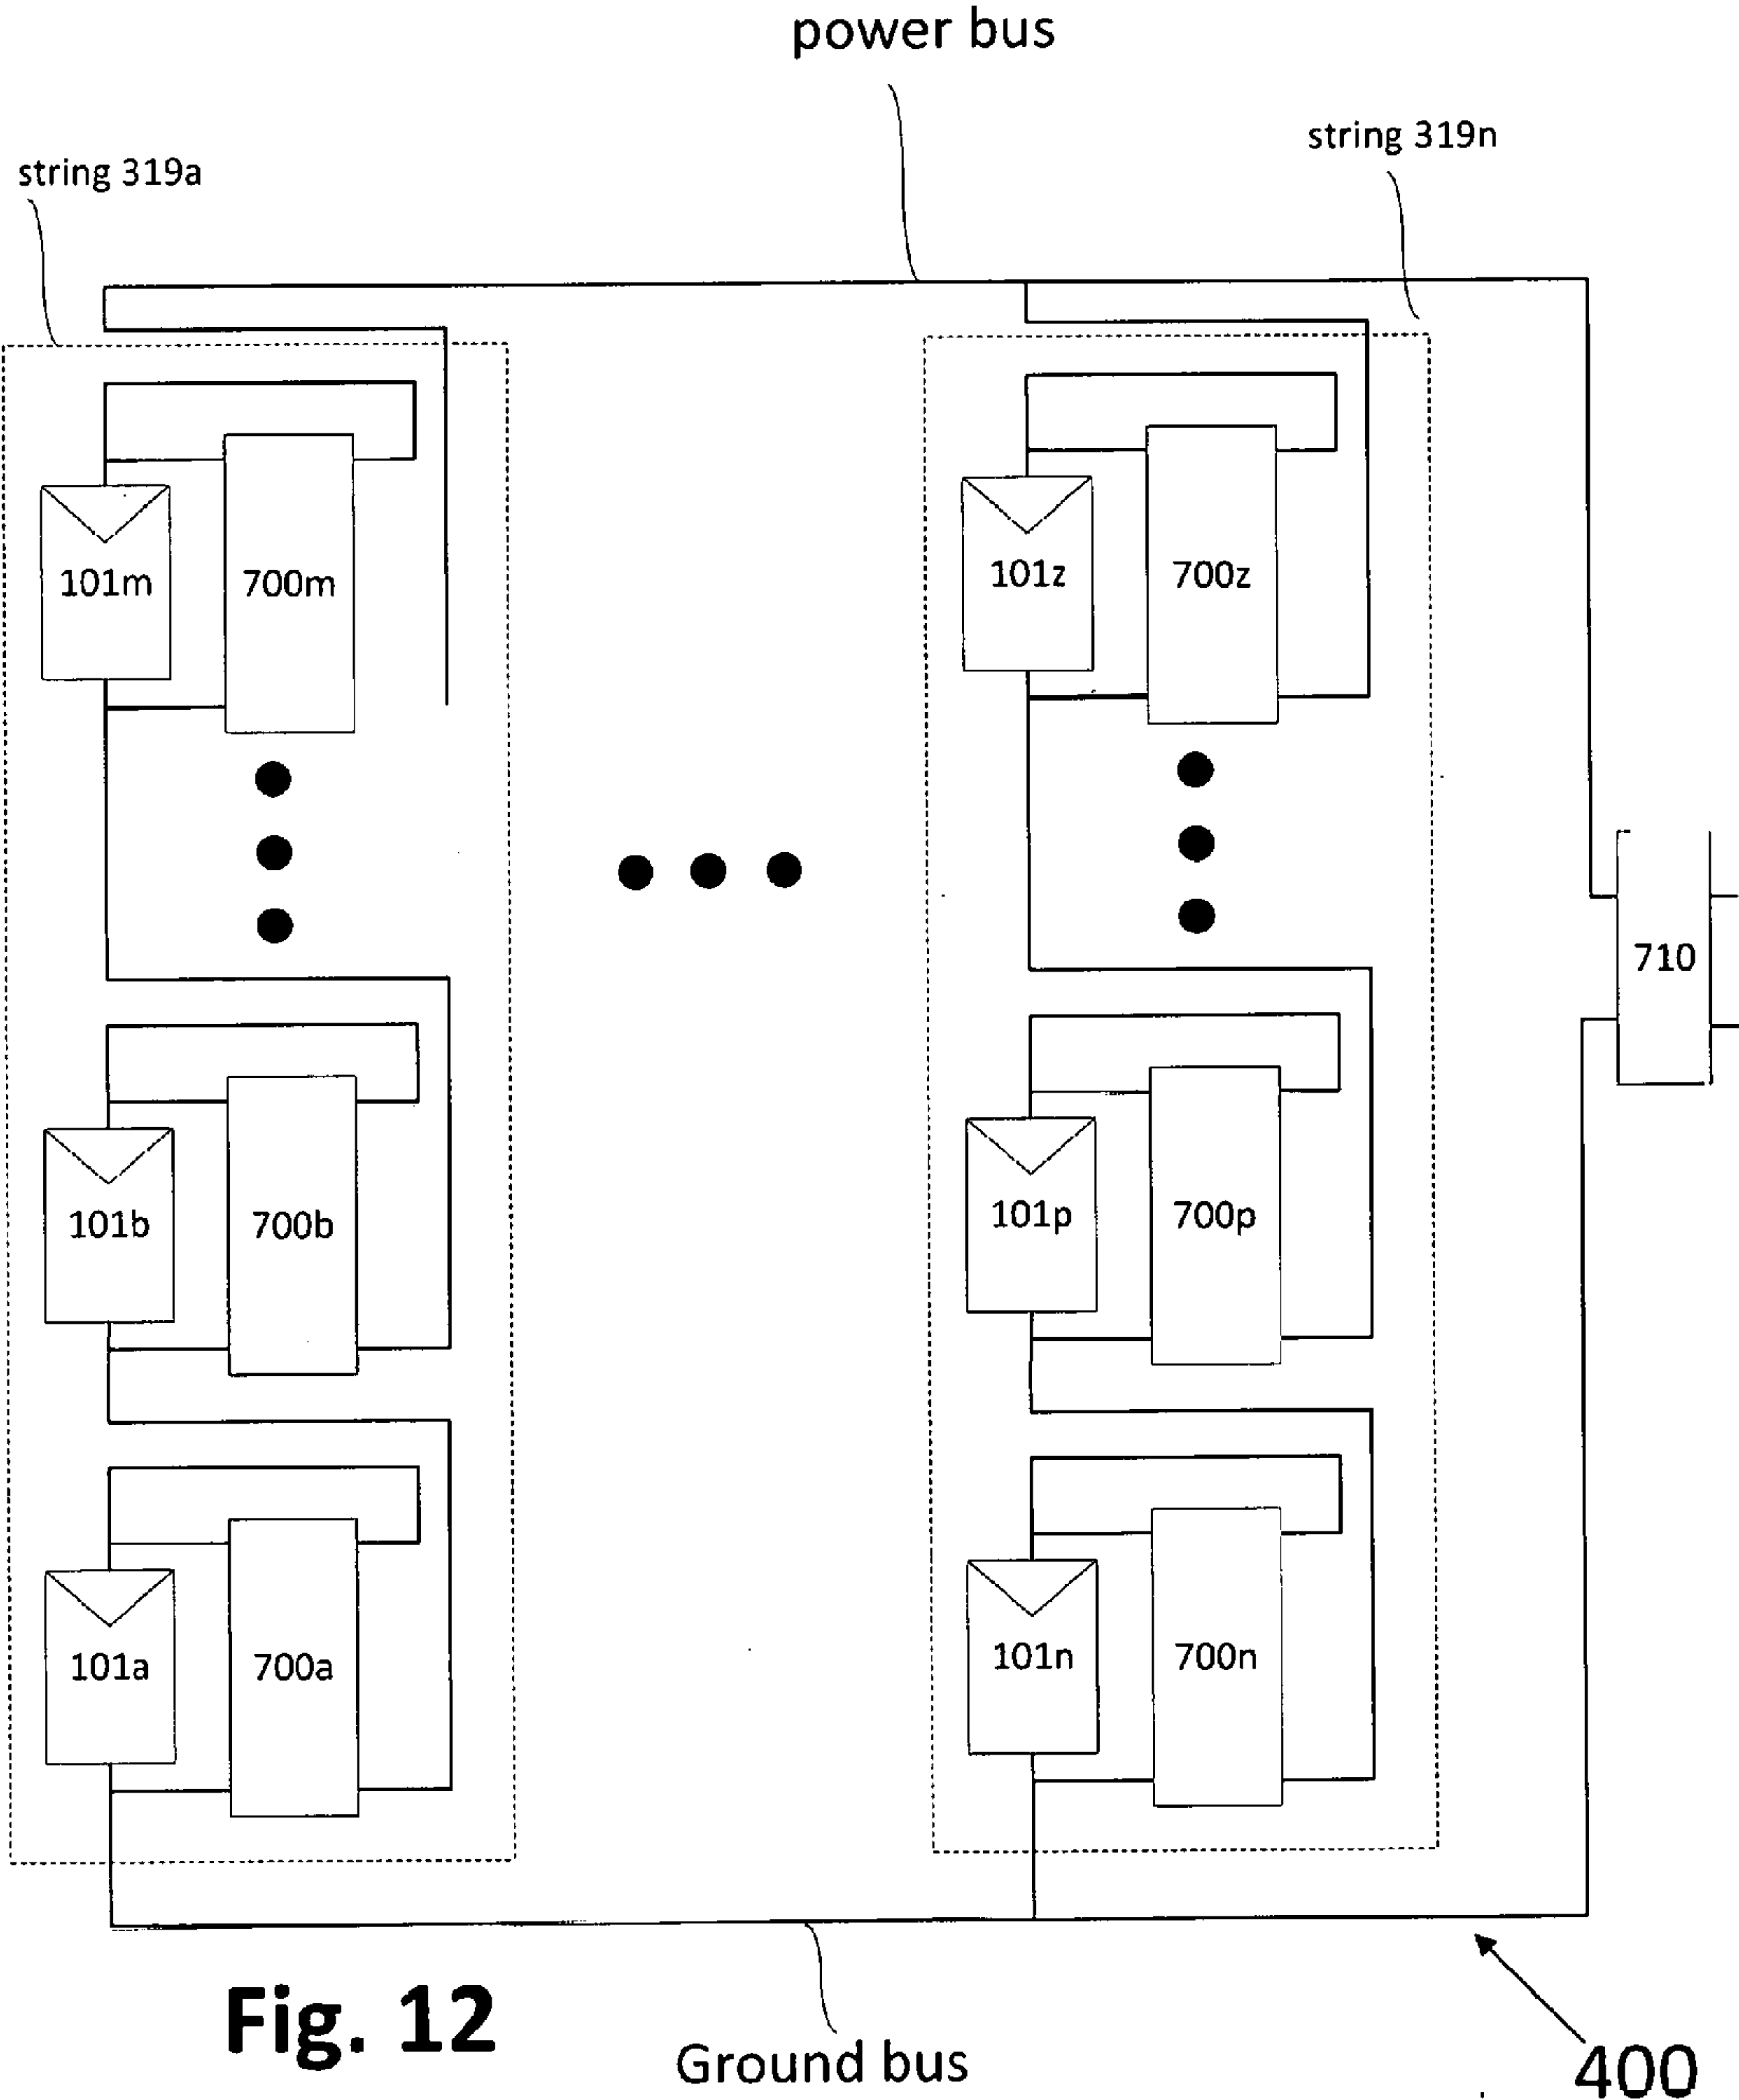


Fig. 12

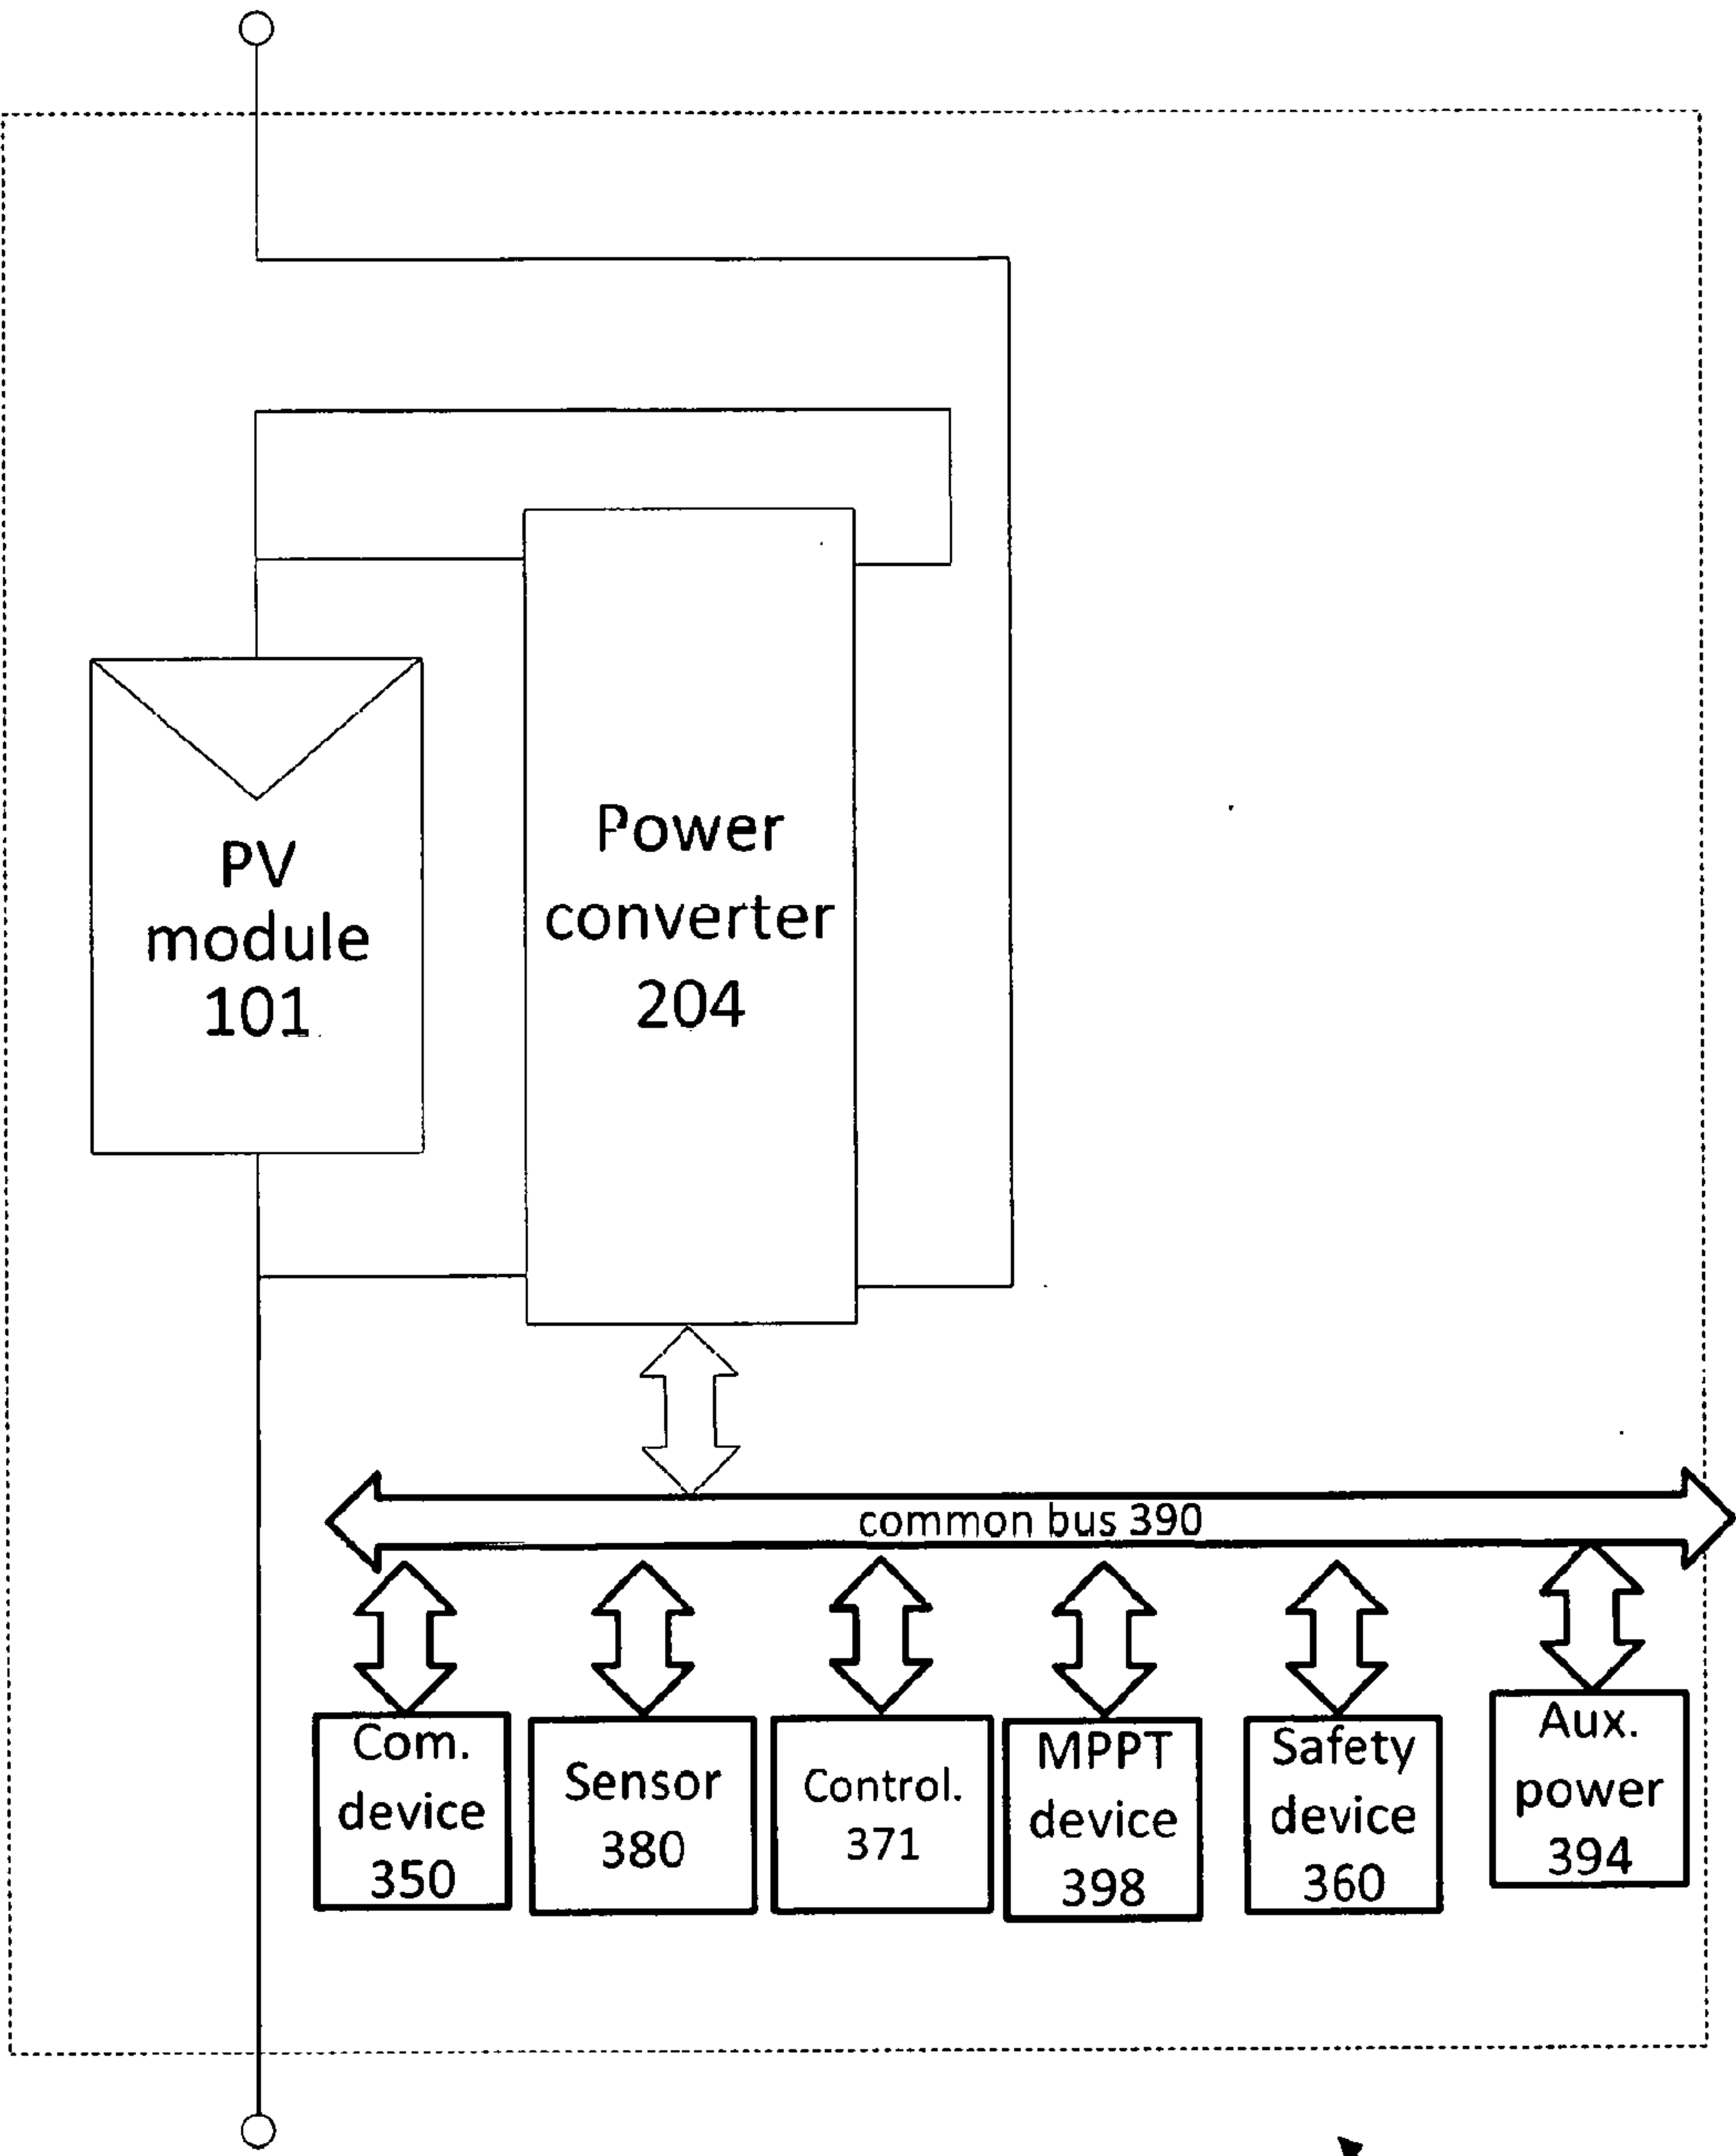
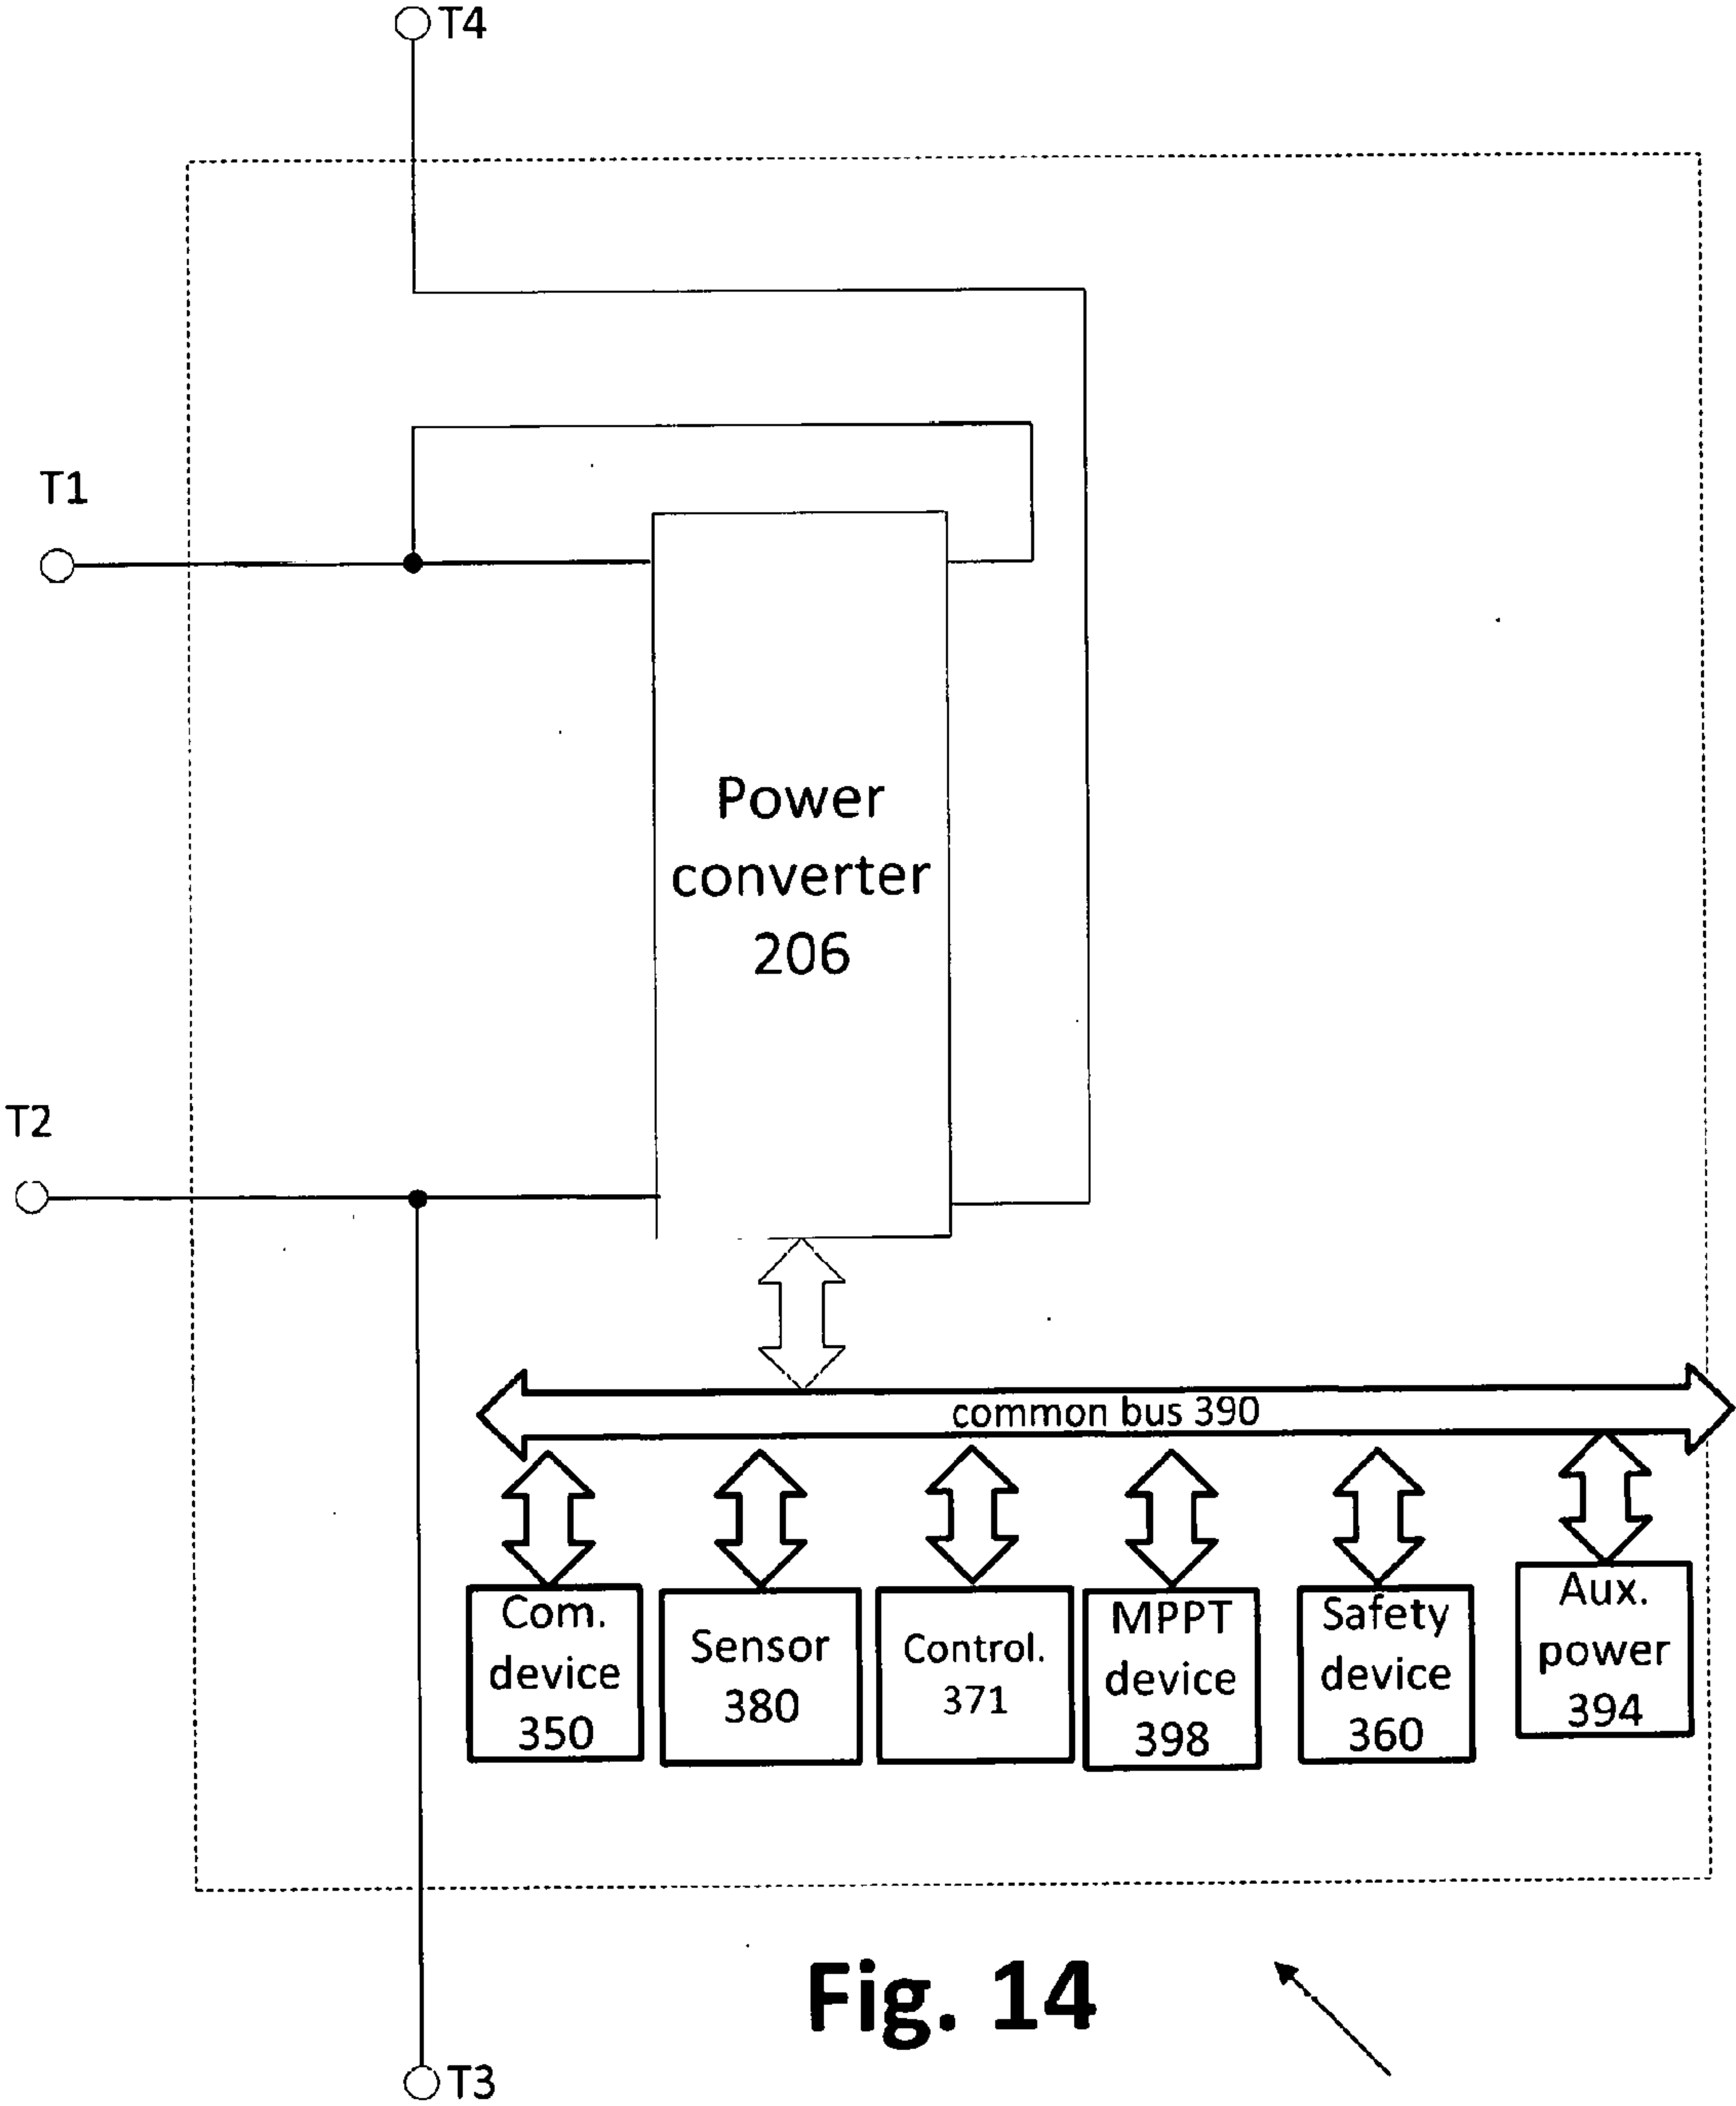


Fig. 13

50




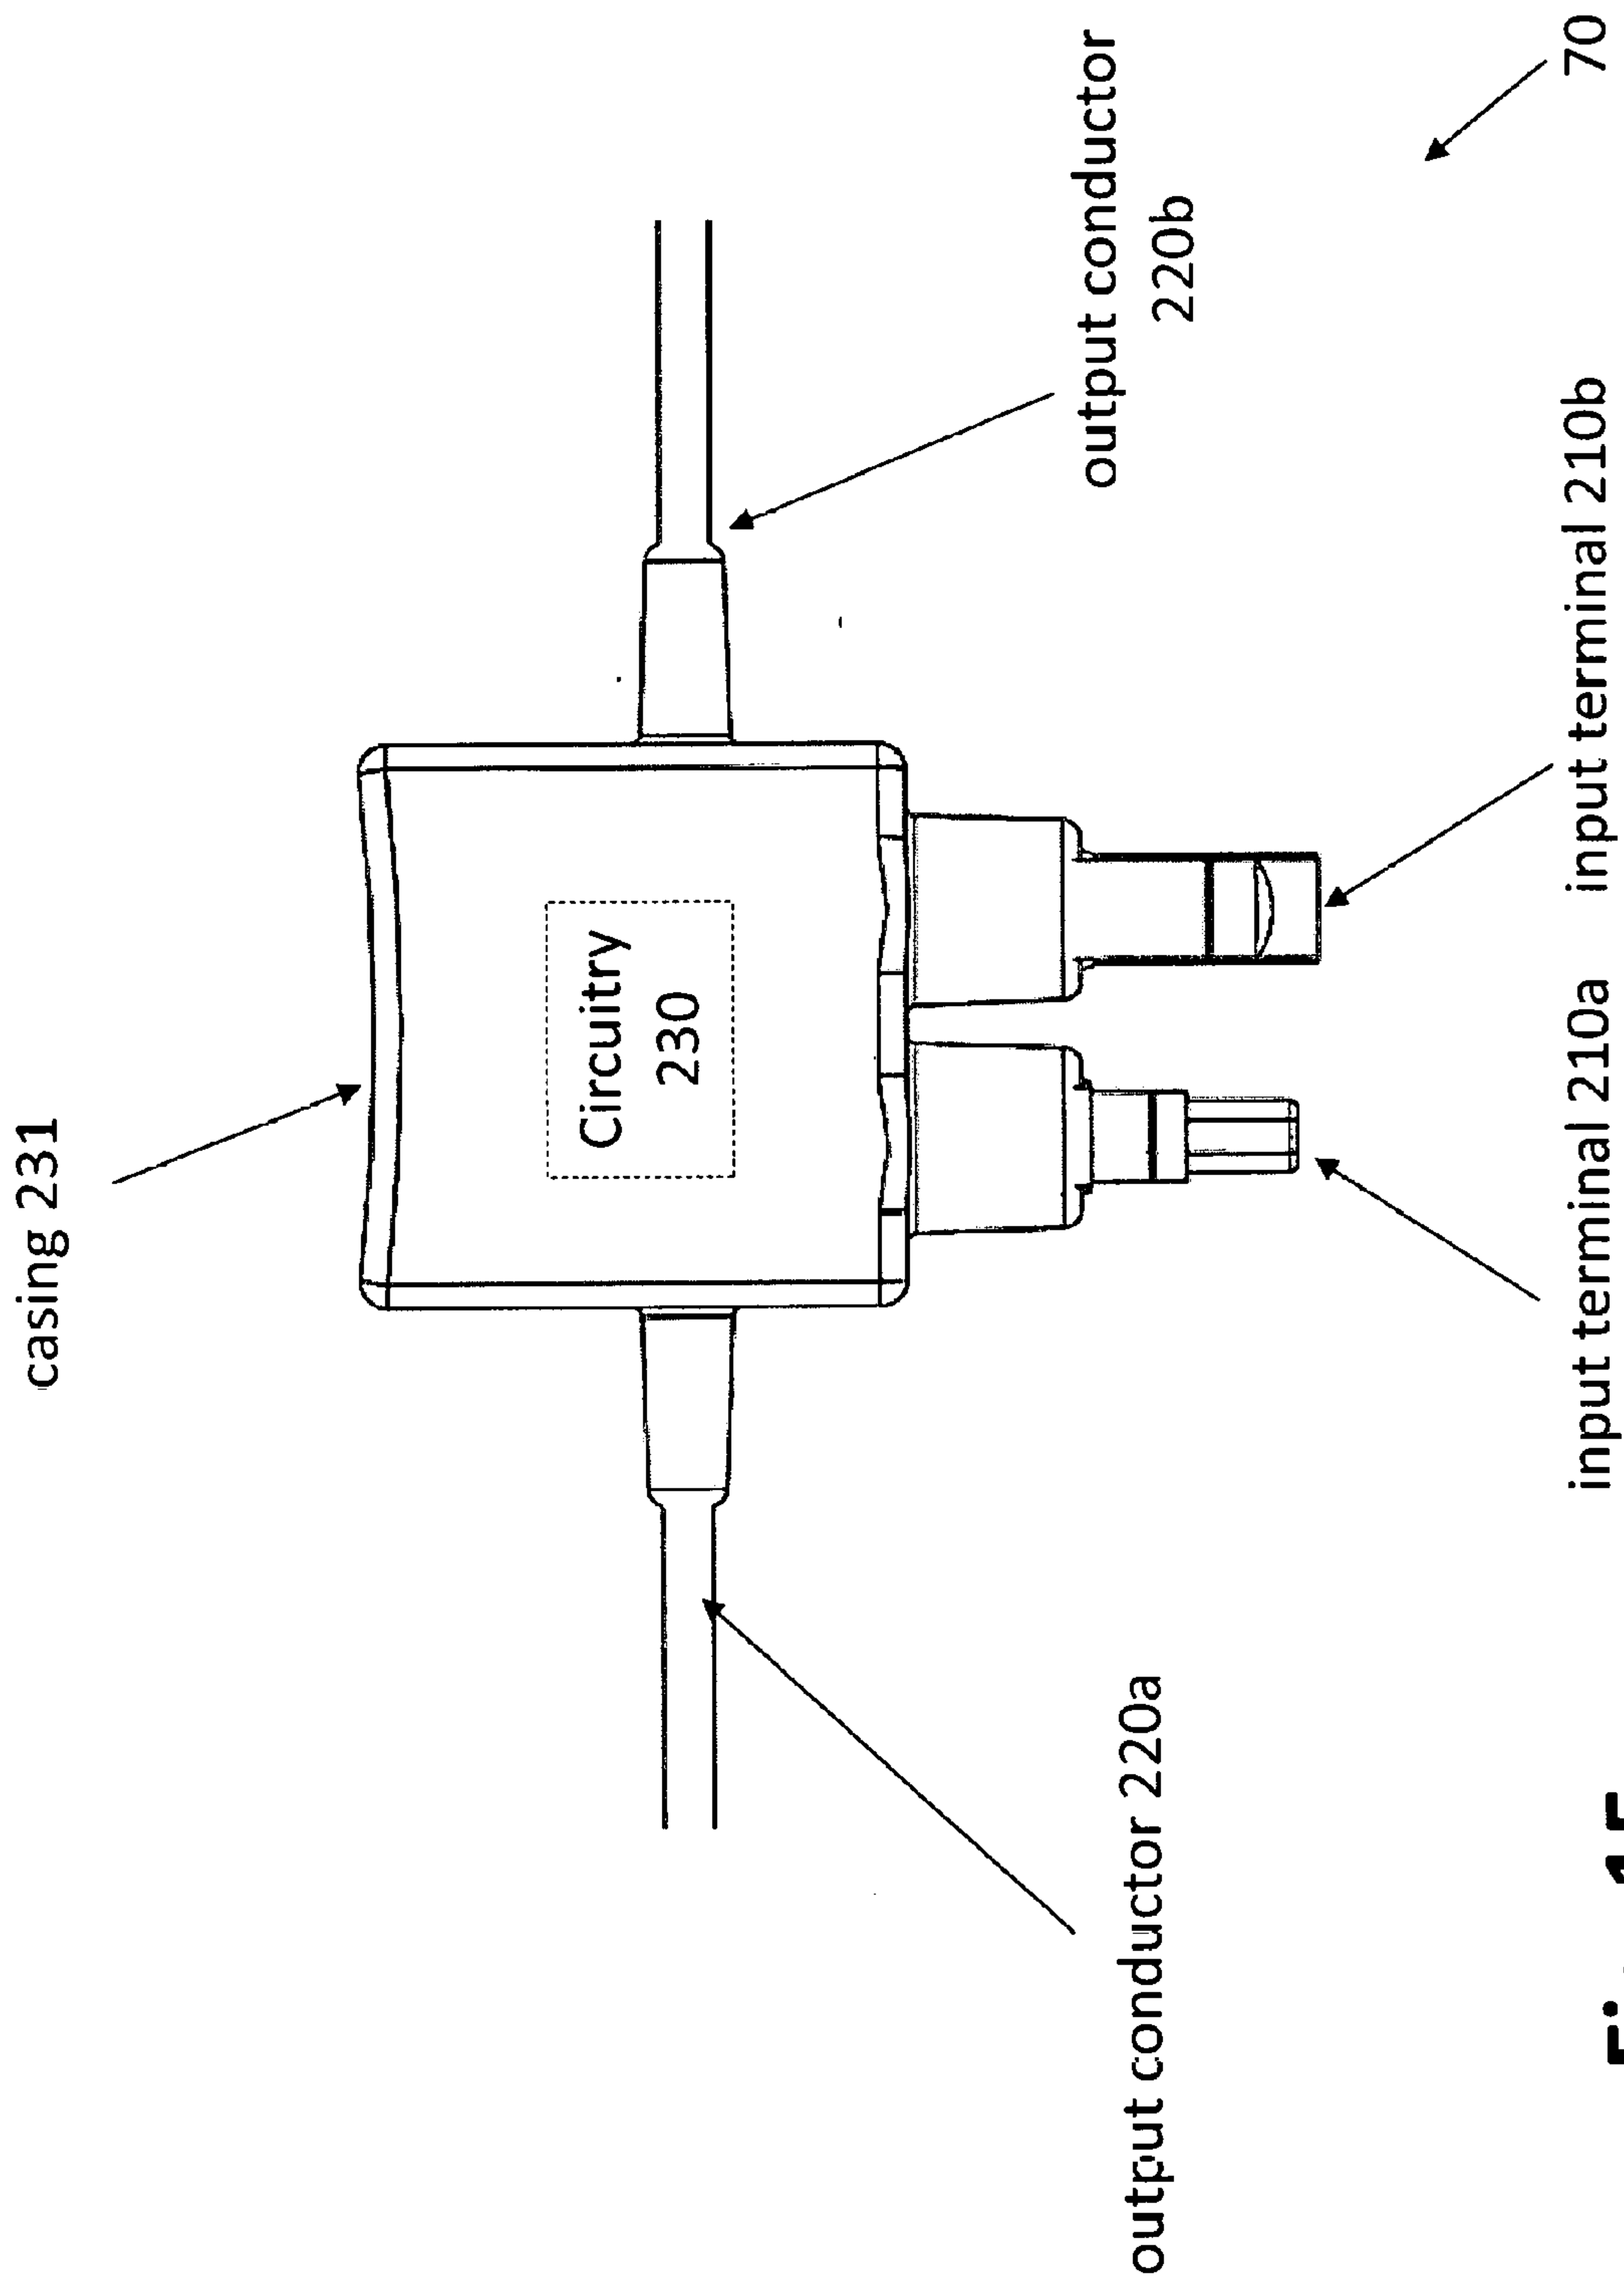


Fig. 15

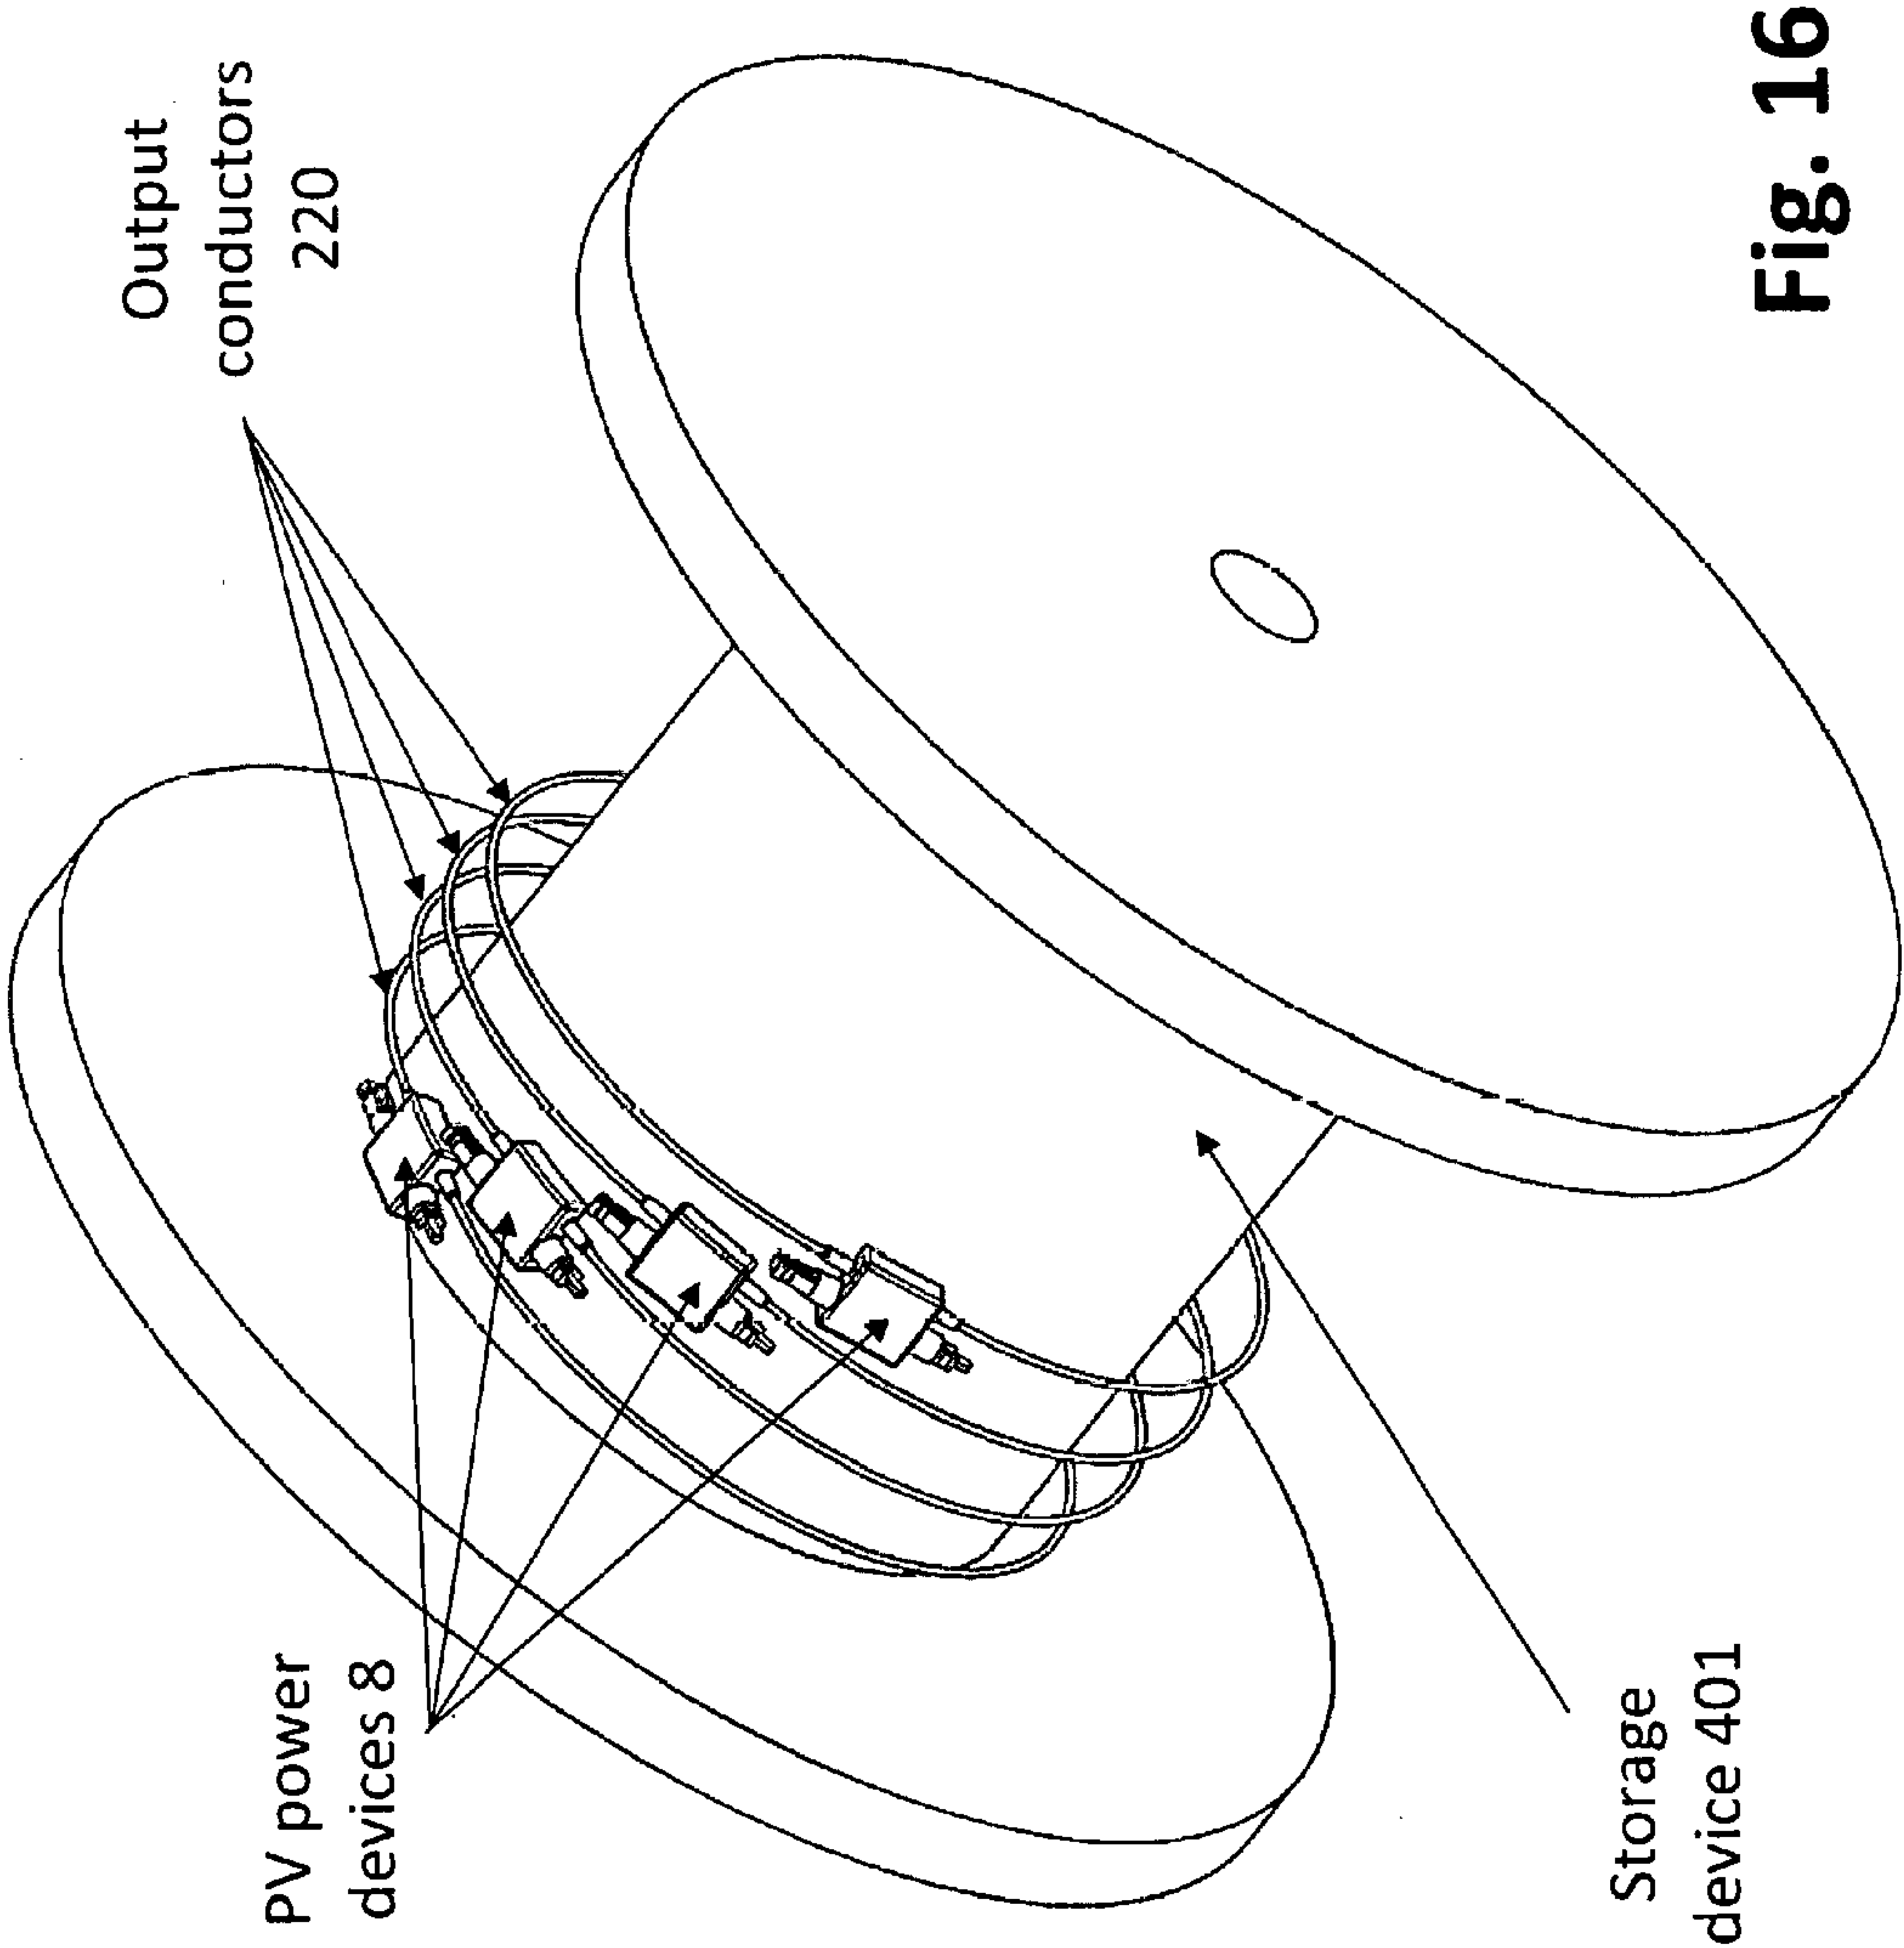

MAXIMIZING POWER IN A PHOTOVOLTAIC DISTRIBUTED POWER SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. application Ser. No. 15/149,353 filed May 9, 2016, which a Continuation-in-Part (CIP) Application of U.S. application Ser. No. 13/754,059 filed Jan. 30, 2013, now issued as U.S. Pat. No. 9,812,984 on Nov. 7, 2017, which claims priority to United Kingdom Application GB1201499.9, filed Jan. 30, 2012, all of which are incorporated herein by reference in their entirety.

BACKGROUND

[0002] Photovoltaic (PV) power devices can be used to improve the performance and to reduce the cost of power generation systems including photovoltaic panels. Photovoltaic power devices can be variously configured. The cost of some power devices may be proportional to the amount of electrical power they process. Thus, significant savings can be realized by designing systems to optimize output power while processing a small portion of the system power.

[0003] Accordingly, there is a need for designing power device system with increased efficiency while decreasing the operating costs associated with such as system.

1. Technical Field

[0004] The exemplary features presented relate to a photovoltaic power harvesting system including multiple photovoltaic strings and, more particularly to system and method for maximizing power in each photovoltaic string.

2. Description of Related Art

[0005] Reference is made to FIG. 1 which shows a photovoltaic power harvesting system 10 according to conventional art. A photovoltaic string 109 includes a series connection of photovoltaic panels 101. Photovoltaic strings 109 may be connected in parallel to give a parallel direct current (DC) power output. The parallel DC power output connects to the input of a direct current (DC) to alternating current (AC) inverter 103. The AC power output of inverter 103 connects across an AC load 105. AC load 105 may be an AC load such as an AC motor or may be an electrical power grid.

[0006] By way of a simplified numerical example, three strings 109 may be used with an inverter 103. If two strings 109 are equally irradiated such that each string operates with a string voltage of 600 volts (V) and string current of 10 amperes (A); each of the two strings generates (10 A·600 V) 6 kilowatts (kW). It is also assumed that the two equally irradiated strings 109 may be operating at maximum power.

[0007] If however, one string 109 is partially shaded or if one or more panels 101 is under performing, there may still be a string voltage of 600V as set by the other two equally irradiated strings 109, however, the string current in the one under performing string 109 may only be only 6 amperes. The under performing string 109 is not operating at maximum power point. For instance, it may be that the under performing string 109 has a maximum power point of 550 volts for a current of 10 amperes. In this situation, the power lost by the under performing string 109 is 1.9 kW (550V·10 A-600V·6 A). The under performing string 109, therefore,

produces 3.6 kW (600V·6 A). Overall power harvested from system 10 is, therefore 15.6 kW (3.6 kW+2·6 kW).

[0008] Reference is now made to FIG. 2 which shows another power harvesting system 20 according to conventional art, according to international patent application publication WO2010002960. System 20 is directed to reduce power losses compared to the losses of system 10. Each photovoltaic string 109 includes a series connection of photovoltaic panels 101. Each photovoltaic string 109 is connected in parallel to an input of a DC-to-DC converter 205. The output of converter 205 connects to a DC bus 211. The DC voltage generated by photovoltaic string 109 is converted by converter 205 to the voltage of DC bus 211. Each photovoltaic string 109 together with the respective DC-DC converter 205 forms a photovoltaic string module 207. A number of modules 207 with outputs from respective DC-to-DC converters 205 may be connected in parallel to DC bus 211. The parallel combined outputs of modules 207 may be also connected to an input of a direct current (DC) to alternating current (AC) inverter 103 via DC bus 211. Inverter 103 converts the combined DC power outputs of modules 207 to an alternating current power at an output of inverter 103. The output of inverter 103 connects to AC load 105.

[0009] Still referring to FIG. 2, using the same numerical example as in system 10 (FIG. 1), three modules 207 may be used with inverter 103. Two strings 109 may be equally irradiated such that each string of the two strings operates with a string voltage of 600 volts and string current of 10 amperes. Each of the two strings generates (10 amperes·600 volts) or 6 kilowatts. If the one remaining string 109 is under performing, there may be maximum power point for the under performing string 109 of 550 volts and current of 10 amperes. Each DC-to-DC converter 205 may be configured to maximize power on each respective output to give 600 volts on DC bus 211. The two equally irradiated modules 207 each produce 6 kW (10 amperes·600 volts) and the under performing unit 207 produces 5.5 kW (10 amperes·550 volts). Giving an overall power harvested from system 20 of 17.5 kW. It can be seen that system 20 offers an improvement of 1.9 kW over system 10 in terms of minimized losses and increased power harvested. The improvement has been achieved through multiple DC-DC converters 205 which operate at wattage levels of around 6 kW. The high power DC-DC converters 205 in a power harvesting system may add to the cost of installation and maintenance of the power harvesting system and may present an overall decreased level of reliability for the power harvesting system because DC-DC converters 205 operate at high wattage levels.

[0010] The terms “monitoring”, “sensing” and “measuring” are used herein interchangeably.

[0011] The terms “power grid” and “mains grid” are used herein interchangeably and refer to a source of alternating current (AC) power provided by a power supply company.

[0012] The term “converter” as used herein applies to DC-to-DC converters, AC-to-DC converters, DC-to-AC inverters, buck converters, boost converters, buck-boost converters, full-bridge converters and half-bridge converters or any other circuit for electrical power conversion/inversion known in the art.

[0013] The term “DC load” as used herein applies to the DC inputs of converters, batteries, DC motors or DC generators.

[0014] The term “AC load” as used herein applies to the AC inputs of converters, transformers, AC motors or AC generators.

SUMMARY

[0015] The following summary is a short summary of some of the inventive concepts for illustrative purposes only, and is not intended to limit or constrain the concepts and examples in the detailed description. One skilled in the art will recognize other novel combinations and features from the detailed description.

[0016] Various power harvesting systems may be provided including multiple parallel-connected photovoltaic strings, each photovoltaic string includes a series-connection of photovoltaic panels. Multiple voltage-compensation circuits may be connected in series respectively with the photovoltaic strings. The voltage-compensation circuits may be configured to provide respective compensation voltages to the photovoltaic strings to maximize power harvested from the photovoltaic strings. The voltage-compensation circuits may include respective inputs which may be connected to a source of power and respective outputs which may be connected in series with the photovoltaic strings. The voltage-compensation circuits may be an alternating current (AC) to direct current (DC) converter where the source of power is a source of AC power, or a DC-of-DC converter where the source of power is a source of DC power. The source of power may be provided by the power grid.

[0017] The power harvesting system may include further, a direct current power output attached to the parallel-connected photovoltaic strings. The voltage-compensation circuits may include source power inputs connected to the direct current power output.

[0018] The power harvesting system may also include a direct current power output attached to the parallel-connected photovoltaic strings and an inverter including a DC power input attached to the direct current power output. The inverter preferably includes an AC power output. The inverter may be configured to invert direct current power generated by the parallel-connected photovoltaic strings to alternating current power at the AC power output. The voltage-compensation circuits may include source power inputs from the AC power output.

[0019] The power harvesting system may include a central controller operatively attached to the voltage-compensation circuits. The central controller may be adapted to control the compensation voltages by tracking maximum power produced from all the parallel-connected photovoltaic strings. A power sensor may be connected to the direct current power output and the central controller. The power sensor may be adapted to sense power in the direct current power output and report a sensed power to the central controller. The central controller may control the compensation voltages to maximize power from all the parallel-connected photovoltaic strings based on the sensed power.

[0020] The voltage-compensation circuits may be optionally configured to provide the compensation voltages in the photovoltaic strings additional to the voltages provided by the series connected photovoltaic panels.

[0021] The power harvesting system may also include, multiple sensors operatively connected respectively to the voltage-compensation circuits. The sensors may be adapted to measure a circuit parameter of the photovoltaic strings. The voltage-compensation circuits may be adapted to pro-

vide the compensation voltages based on the at least one circuit parameter to maximize power in the photovoltaic strings. The circuit parameter may include respective currents flowing in the photovoltaic strings. The at least one circuit parameter may include respective voltages of the photovoltaic strings.

[0022] According to features presented there is provided a power harvesting system which includes a photovoltaic string including a series connection of photovoltaic panels and a voltage-compensation circuit connected in series with the photovoltaic string. The voltage-compensation circuit may be configured to provide a compensation voltage to the string to maximize power harvested from the photovoltaic string. The voltage-compensation circuit may include an input connectible to a source of power and an output connectible in series with the photovoltaic string.

[0023] The power harvesting system may further include a direct current power output attached to the photovoltaic string. The voltage-compensation circuit includes a DC-to-DC converter having a source power input connected to the direct current power output. The voltage-compensation circuit may have an AC-to-DC converter with an alternating current (AC) source input provided from an AC power source. The AC-to-DC converter also includes a DC output which connects in series with the photovoltaic string. A direct current power output attached to the photovoltaic string and an inverter having a DC inverter input connected to the direct current power output. The AC-to-DC converter may be connectible at the AC source input to either a power grid, or an AC output of the inverter.

[0024] According to features presented there is provided a method in a power harvesting system which includes a photovoltaic string. The photovoltaic string may include a series-connection of photovoltaic panels. The method connects in series a voltage-compensation circuit within the photovoltaic string. A circuit parameter may be monitored within the photovoltaic string. A compensation voltage of the voltage-compensation circuit may be configured based on the monitoring. The compensation voltage may be added serially within the photovoltaic string, thereby maximizing the power harvested from the photovoltaic string. A DC load may be attached to the photovoltaic string. An input of the voltage-compensation circuit may be connected to either a source of AC power or a source of DC power. The circuit parameter may include a current produced by the photovoltaic string, a voltage across the photovoltaic string or the power produced by the photovoltaic string.

[0025] Embodiments herein may employ photovoltaic power systems including power voltage-compensation devices, which may be referred to as power balancing devices, to allow efficient power optimization for the systems without incurring excessive costs.

[0026] In some embodiments, PV power devices may be included in photovoltaic system design to increase the system power output.

[0027] In some embodiments, a single device can be used to maximize the output of a single photovoltaic panel. In some embodiments a single device can be used to optimize the joint output of two or more photovoltaic panels or the output of an entire photovoltaic string.

[0028] In exemplary systems, a power device including a voltage-compensation circuit may be utilized to reduce the cost and to improve the output of the system. For example, in the event of a system comprising parallel-connected

photovoltaic strings, a power voltage-compensation circuit may be included in each string to obtain a common output voltage level. This may allow a photovoltaic string to increase the power drawn from the string's photovoltaic modules by operating the modules at or close to a maximum-power string voltage, while the compensation circuit corrects inter-string voltage mismatch, allowing parallel coupling of strings. The power device may receive input power from an external source (e.g. AC power generator, DC power generator, wind turbine, battery, fuel cell, etc.) and/or from the photovoltaic system being optimized, and in some embodiments the power device may output a positive or negative voltage level. It might not be necessary to process the entire string voltage or power to match strings; a small portion of the string voltage or power may be converted by the compensation circuit to match string voltages.

[0029] In some embodiments, multiple power devices may be featured in one or more or all of the photovoltaic string(s), each power device optimizing the joint output of more or more photovoltaic modules (e.g. PV cells, PV panels). The output power of an optimized photovoltaic string may be substantially higher than that of an unoptimized string. In some embodiments, the power device may include a suitable circuit, such as a direct current to direct current (DC/DC) converter, an alternating current to direct current (AC/DC) converter, a direct current to alternating current (DC/AC) converter, and/or a polarity adjustment circuit such as a full bridge including switches (e.g. MOSFET switches). In some embodiments, one or more of these circuits may be variously configured in operation. In exemplary embodiments where the circuit includes a power converter, the power converter topology may galvanically isolate the input from the output. The power device may be or may include an optimization circuit that may include a controller configured for and/or based on Maximum Power Point Tracking (MPPT).

[0030] In exemplary photovoltaic systems, the optimization circuits may measure and/or monitor various system and/or circuit parameters. In some embodiments, these measurements may serve for detecting faults or suboptimal system operation, so that corrective safety or operational steps may be taken. In other embodiments, a user interface may be updated to reflect the current state of operation. In some embodiments, the data may be transmitted to computational systems where the data may be collected and processed for further analysis.

[0031] In some embodiments, because the cost and size of optimization circuits may be proportional to the power they process, it may be desirable to limit the power input to a power device. For example, in some embodiments a portion of the power of a photovoltaic string might be input to a device. In other embodiments, power may be input to an optimization circuit from an external, limited, power source. In some of these embodiments, the external power source may be an alternating current (AC) power source, and in other embodiments the external power source may be a direct current (DC) power source.

[0032] In additional embodiments, the power devices may be embedded directly in photovoltaic modules. Photovoltaic modules may include integrated electronics configured to process at least a portion of the photovoltaic power to allow serial and/or parallel coupling of the modules, allowing for maximum power extraction while matching the current and/or voltage outputs.

[0033] In some embodiments, conductors may be used to couple power devices to one another during manufacturing to form a chain of power devices, which may then be packaged and sold as a single unit. The chain may be deployed by coupling the power devices in the chain to photovoltaic panels. The coupling of power devices at the time of manufacturing may reduce costs and enable compact storage of the devices, and the easy deployment may reduce installation time.

[0034] In the exemplary embodiments disclosed herein, photovoltaic modules are used to exemplify energy sources which may make use of the novel features disclosed. In some embodiments, the energy sources may include batteries, wind or hydroelectric turbines, fuel cells or other energy sources in addition to or instead of photovoltaic modules. The power processing methods and other techniques disclosed herein may be applied to alternative energy sources such as those listed above, and the nearly exclusive mentioning of photovoltaic modules as energy sources is for exemplary purposes only and not intended to be limiting in this respect.

[0035] As such, one or more aspects of the disclosure provide for a system that may include one or more photovoltaic strings, each string comprising: a plurality of serially-connected photovoltaic modules; and a voltage compensation device coupled in series with the plurality of photovoltaic modules and configured to convert input power to a direct-current output. The system may also include a controller configured to control power output by the one or more photovoltaic strings by controlling a voltage output by the voltage compensation device.

[0036] One or more aspects of the disclosure provide for a method that may include monitoring one or more parameters associated with a photovoltaic string of photovoltaic modules; receiving, by a power device, an input voltage and an input current from one or more of the photovoltaic modules; coupling, in series, outputs of the power device to the photovoltaic string; and configuring, based on the monitored one or more parameters, the power device to output an output voltage to operate the photovoltaic string at a desired operating point.

[0037] One or more aspects of the disclosure provide for a system that may include a plurality of photovoltaic modules; and a plurality of photovoltaic power devices, wherein one or more of the plurality of photovoltaic power devices is configured to receive input power at an input from at least one of the photovoltaic modules and is configured to output power from an output based on predetermined criteria, and wherein the input is directly connected to the output.

[0038] One or more aspects of the disclosure provide for a method that may include coupling inputs of a power converter to a photovoltaic module; connecting a first input of the inputs of the power converter to an output of the power converter via a conductor; and dividing a current output by the photovoltaic module into: a first portion that flows into the first input, and a second portion that flows directly from the first input to the output via the conductor.

[0039] As noted above, this summary is merely a summary of some of the features described herein. It is not exhaustive, and it is not to be a limitation on the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] These and other features, aspects, and advantages of the present disclosure will become better understood with

regard to the following description, claims, and drawings. The present disclosure is illustrated by way of example, and not limited by, the accompanying figures. A more complete understanding of the present disclosure and the advantages thereof may be acquired by referring to the following description in consideration of the accompanying drawings, in which like reference numbers indicate like features.

[0041] FIG. 1 shows a photovoltaic power harvesting system according to conventional art.

[0042] FIG. 2 shows another photovoltaic power harvesting system according to conventional art.

[0043] FIG. 3a shows a power harvesting system according to a feature of the present invention.

[0044] FIG. 3b shows a power harvesting system according to another feature of the present invention.

[0045] FIG. 3c shows more details of a voltage-compensation circuit shown in FIGS. 3a and 3b, according to a feature of the present invention.

[0046] FIG. 3d shows an implementation of a voltage-compensation circuit shown in FIGS. 3a and 3b, according to another feature of the present invention.

[0047] FIG. 4 shows a method applied to the power harvesting systems shown in FIGS. 3a and 3b, according to a feature of the present invention.

[0048] FIG. 5 depicts a part schematic, part block-diagram of an exemplary power system according to some exemplary embodiments.

[0049] FIGS. 6A-6B depict schematic diagrams of exemplary isolated power converters featured in some exemplary embodiments.

[0050] FIG. 7 depicts a part schematic, part block-diagram of a compensation circuit according to an exemplary embodiment.

[0051] FIG. 8 depicts a part schematic, part block-diagram of a compensation circuit according to an exemplary embodiment.

[0052] FIG. 9 depicts a part schematic, part block-diagram of an exemplary power system according to exemplary embodiments.

[0053] FIG. 10 depicts a part schematic, part block-diagram of an exemplary power system according to exemplary embodiments.

[0054] FIGS. 11A-11B depict part schematic, part block-diagram illustrations of current flow through an exemplary compensation circuit according to exemplary embodiments.

[0055] FIG. 12 depicts a part schematic, part block-diagram of an exemplary power system according to some exemplary embodiments.

[0056] FIG. 13 depicts a part schematic, part block-diagram of an integrated solar block according to some exemplary embodiments.

[0057] FIG. 14 depicts a part schematic, part block-diagram of an exemplary power device according to exemplary embodiments.

[0058] FIG. 15 depicts a part schematic, part block-diagram of an exemplary power device according to exemplary embodiments.

[0059] FIG. 16 depicts an illustrative diagram showing storage of exemplary power devices according to exemplary embodiments.

DETAILED DESCRIPTION

[0060] In the following description of various illustrative embodiments, reference is made to the accompanying draw-

ings, which form a part hereof, and in which is shown, by way of illustration, various embodiments in which aspects of the disclosure may be practiced. It is to be understood that other embodiments may be utilized and structural and functional modifications may be made, without departing from the scope of the present disclosure.

[0061] It should be noted, that although the discussion herein relates primarily to photovoltaic systems, the present invention may, by non-limiting example, alternatively be configured using other distributed power systems including (but not limited to) wind turbines, hydro turbines, fuel cells, storage systems such as battery, super-conducting flywheel, and capacitors, and mechanical devices including conventional and variable speed diesel engines, Stirling engines, gas turbines, and micro-turbines.

[0062] By way of introduction, features of the present invention are directed towards maximizing output power from under-performing or partially shaded photovoltaic strings in a power harvesting system of parallel connected photovoltaic strings. The features may provide maximal overall power output of the system and reduced installation and maintenance cost of the system. The features may also provide increased reliability of the system, owing to lower power operating levels of switching converters added to each of the photovoltaic string compared with DC-DC converters 205 used in conventional system 20.

[0063] Reference is now made to FIG. 3a which shows a power harvesting system 30a according to a feature of the present invention. A number of photovoltaic panels 101 are connected in series to form a photovoltaic string 109. String 109 is connected in series with a voltage-compensation circuit 307 to provide a compensated string 315. A source voltage (V_s) may be input to voltage-compensation circuit 307. A number of compensated strings 315 may be connected together in parallel to give direct current (DC) power output 211. A power sensor 370 operatively connected to central controller 313 measures the power on DC output 211. DC power output 211 is connected to an input of a DC to alternating current (AC) inverter 103. Inverter 103 converts the combined DC power output 211 of strings 315 to an alternating current power at an output of inverter 103. The output of inverter 103 connects to AC load 105. A central controller 313 may be operatively attached to each voltage-compensation circuit 307 by bi-directional control and communication lines as shown, by wireless communication or by power line communications in DC bus 211. Central controller 313 may include a microprocessor with on-board memory and an interface which may include analogue to digital converters (ADCs) and digital to analogue converters (DACs).

[0064] Reference is now made to FIG. 3b which shows a power harvesting system 30b according to another feature of the present invention. String 109 is connected in series with voltage-compensation circuit 307 to provide a compensated string 315. A source voltage (V_s) may be input to voltage-compensation circuit 307. A number of compensated strings 315 may be connected together in parallel to give direct current (DC) power output 211. DC power output 211 is connected to an input of a DC to alternating current (AC) inverter 103. Inverter 103 converts the combined DC power output 211 of strings 315 to an alternating current power at an output of inverter 103. The output of inverter 103 connects to AC load 105. System 30a is the same as system 30b except that system 30b does not have central controller

313. Instead, monitoring and control in system **30b** is performed by each circuit **307**, which may include a micro-processor with on-board memory and an interface which may include analogue to digital converters (ADCs) and digital to analogue converters (DACs). Each circuit **307** is operatively attached to sensors **320**, **322** and **324**. Sensors **320** and **322** may be adapted to sense the voltage across photovoltaic string **109** as well as current in string **109**. Alternatively, sensors **320** and **324** may be adapted to sense the voltage across a compensated string **315** and current in string **315**. Alternatively, sensors **324** and **322** may be adapted to sense the voltage (V_C) across a circuit **307** as well as current through the circuit **307**.

[0065] Reference is now made to FIG. **3c** which shows more details of voltage-compensation circuit **307** shown in FIGS. **3a** and **3b**, according to a feature of the present invention. Voltage-compensation circuit **307** may be implemented using a direct current (DC) to DC converter **307a**. DC-to-DC converter **307a** may be a buck circuit, a boost circuit, a buck+boost circuit or switched-mode power supply (SMPS). The output of DC-to-DC converter **307** is connected in series within string **315** to add compensation voltage (V_C) to string **315**. The DC source voltage input (V_S) to DC-to DC converter **307** may be provided from the combined DC output of strings **315**, or strings **109**. Alternatively, DC source voltage input (V_S) may be provided by a micro-inverter converting AC from the mains grid or another independent source of DC power such as a battery or DC generator. Circuit **307** as shown in FIG. **3c**, is a conventional buck-boost DC-to-DC converter circuit which has an input voltage V_S with an input capacitor C_1 connected in parallel across V_S . Two switches may be implemented as field effect transistors (FET) with integral diodes: a high side buck switch Q_1 and a low side buck switch Q_2 connected in series by connecting the source of Q_1 to the drain of Q_2 . The drain of Q_1 and the source of Q_2 may be connected parallel across the input capacitor C_1 . A node A is formed between switches Q_1 and Q_2 to which one end of an inductor L is connected. The other end of inductor L is connected to the boost circuit of buck-boost DC-to-DC converter **307** at a node B. Node B connects two switches implemented as field effect transistors (FET): a high side boost switch Q_4 and a low side boost switch Q_3 together in series where the source of Q_4 connects to the drain of Q_3 to form node B. The drain of Q_4 and the source of Q_3 connect across an output capacitor C_2 to produce the output voltage V_C of buck-boost DC-to-DC converter **307**.

[0066] Reference is now made to FIG. **3d** which shows an implementation of circuit **307** shown in FIGS. **3a** and **3b**, according to another feature of the present invention. Voltage compensation circuit **307** may be implemented using an alternating current (AC) to DC inverter. The AC to DC inverter **307b** may be a type of switched mode power supply (SMPS). When voltage-compensation circuit **307** is an AC to DC converter **307b**, the DC output of the AC to DC converter is connected in series within a string **315**. The AC input (V_S) to the AC to DC converter may be provided from the mains grid, from the AC output of inverter **103** or by another independent source of AC power.

[0067] Reference is now made to FIG. **4** which shows a method **400** which may be applied to power harvesting system **30b** shown in FIG. **3b**, according to a feature of the present invention. In step **402**, an output voltage (V_C) of circuit **307** is wired in series with a series-connection of

panels **101** to form compensated string **315**. The input voltage (V_S) to circuit **307** may be from direct current (DC) output **211**, the alternating current (AC) output of inverter **103** or a separate independent AC or DC electric supply. Several compensated strings **315** outputs may then be connected in parallel and further connected to the input of an inverter **103** as shown in FIG. **3b**.

[0068] In step **404**, a circuit parameter of each parallel connected string **315** is monitored in the case of system **30b**. The circuit parameter may be the current flowing in a string **315**, the voltage across a string **315**, the voltage of a photovoltaic string **109** and/or the voltage (V_C) across a circuit **307**. The current and voltages in a string **315** may be used to determine the power (P) in a string **315** or a photovoltaic string **109** by virtue of power being equal to voltage (V) multiplied by current (I).

[0069] In decision block **406**, a control algorithm stored in a circuit **307** adjusts compensation voltage V_C to maximize output power of string **315**. In step **408**, a compensation voltage V_C for strings **315** is configured based on the result of the control algorithm performed in steps **404** and **406**. The compensation voltage V_C for strings **315** in step **408** may be a positive or a negative voltage polarity with respect to the voltage polarity of a string **109**. In step **410**, the compensation voltage V_C is added to string **315**. In the case of the positive voltage for V_C , the voltage of a string **315** may be increased in step **408**. In the case of the negative voltage for V_C , the voltage of string **315** may be decreased in step **408**.

[0070] Reference is still being made to FIG. **4**. Method **400** may also be applied to system **30a** (FIG. **3a**) which uses central controller **313**. In the case of system **30a**, in step **404** central controller monitors or calculates a net total power from system **30a**. The net total power from system **30a** is equal to the power produced by strings **109** subtracted from the power added by compensation circuits **307**.

[0071] When the voltage (V_S) and hence power to the input of circuit **307** is derived from DC bus **211** or the output of inverter **103** to give compensated voltage (V_C). The net total power from system **30a** may be derived directly by monitoring (step **404**) power on DC bus **211**.

[0072] When the voltage (V_S) and hence power to the input of circuit **307** is derived from an independent DC source or AC source such as a mains supply to give compensated voltage (V_C). The net total power from system **30a** may be derived by subtracting power monitored on DC Bus **211** (step **404**) from the power added by compensation circuits **307**.

[0073] In decision block **406**, compensation voltages V_C of all strings **315** may be adjusted to maximize the net total power from system **30a**. In step **408**, a compensation voltage V_C for a string **315** is configured based on the result of the control algorithm performed in steps **404** and **406**. In step **410**, the compensation voltage V_C is added to a string **315**.

[0074] During a sustained use of systems **30a** or **30b** over a period of time, the number and type of serial connected panels **101** in a string **315** may change, some panels may become faulty and/or operate in a current bypass mode or panels may be replaced with ones that have different electrical characteristics. Under these circumstances, the control algorithm maintains strings **315** at their maximum power point (MPP) by adding compensation voltage to each string **315** to maintain maximum power from each string **315**. When all strings **109** are found to be operating at maximum power output level and maximum power point, no voltage

compensation V_c may be required and voltage compensation V_c added to string **315** is at or near zero volts.

[0075] With respect to both systems **30a** and **30b**. In each iteration of the control algorithm performed in steps **404** and **406**, it may be possible to subtract from all the compensation voltages (V_c) in each string **315**, the minimum compensation voltage V_c . Subtracting the minimum compensation voltage V_c , may prevent a drift in the compensation voltages (V_c) going too high for no reason. Alternatively, it may be possible to tie the compensation voltages (V_c) to a level that will optimize the overall voltage of strings **315** to be optimal for the input of inverter **103**, thereby increasing the conversion efficiency of inverter **103**.

[0076] The present features with respect to method **400** and systems **30a** or **30b**, may be compared to conventional system **20** (FIG. **2**) by way of the same numerical example, where three compensated strings **315** are used. It may be assumed just for the purpose of the numerical example that the three compensated strings **315** are compensated by circuit **307** which may be an AC to DC converter powered from the grid. Therefore, circuit **307** receives and converts voltage (V_s) and hence power from the electrical grid. If two strings **109** are equally irradiated such that each string operates with a string **109** voltage of 600 volts and string current of 10 amperes, each of the two strings generates (10 amperes·600 volts) 6 kilowatts. If one under-performing string **109** is partially shaded or if a panel **101** is removed or bypassed, there may be a string voltage of 550 Volts and current of 10 amperes, which means (10 amperes·550 volts) 5.5 kilowatts may be generated by the under-performing string **109**. The maximum power 5.5 kilowatts may be generated by the under-performing string **109** only if the under-performing string **109** can be operated at maximum power point (MPP).

[0077] Voltage-compensation circuit **307** of the under-performing string **109** may be configured (step **408**) by controller **313** to add 50 volts (V_c) in series with under-performing string **109** while maintaining the current of 10 amperes (step **410**). Adding 50 volts by use of voltage-compensation circuit **307**, maintains string **315** voltage at 600 volts also for under-performing string **109**. Increasing the voltage of the string **315**, allows the one under-performing string **109** to operate at MPP and also requires an extra (10 amperes·50 volts) 500 Watts when compared to the 6 kilowatts in each of the other two strings **315**. The overall power output of system **30a** or **30b** is 18 kilowatts, from two strings **109** providing 12 kilowatts (2·6 kilowatts), the under-performing compensated string **109** providing 5.5 kilowatts and the grid providing 500 watts (50 volts·10 amperes) via circuit **307**. The power provided from the 3 strings **315** may be therefore, the same as system **20** at 17.5 kilowatts (2·6 kilowatts+5.5 kilowatts).

[0078] The benefit of systems **30** compared with system **20** is that 500 W-1 kW switching converters **307** may be required compared with 6-10 kW switching converters used in system **20**. The difference in power rating may represent a huge improvement in cost and reliability of systems **30** compared with system **20**.

[0079] Referring still to FIG. **4**, the method **400** and/or one or more steps set forth in the method **400** may be performed by and/or for any of the systems devices, and/or components discussed herein, such as described in relation to FIGS. **1-3** and to FIGS. **5-16**, which are described below in greater detail.

[0080] Reference is now made to FIG. **5**, which depicts a photovoltaic installation according to exemplary embodiments. Optimized photovoltaic power system **100** may be variously configured. In one embodiment, the photovoltaic power system may comprise a plurality of parallel-connected photovoltaic strings **316** (e.g. **316a**, **316n** etc.). A photovoltaic string **316** may include a plurality of series-connected photovoltaic panels **101** (e.g. solar cells, solar panels), which may be referred to as photovoltaic (PV) modules **101**. According to some aspects, other types of power sources may be used, such as batteries, storage devices, power producing device, and the like. According to some aspects, a string **316** may be or may be similar to the string **315**. According to some embodiments, due to the strings having different locations, each string (and the modules within a string) may receive a different amount of sunlight, which may cause one string to produce a different amount of power from another string. Furthermore, the serial connection between the modules within each string may lead to each string having a different voltage between the two ends of the string.

[0081] For different strings to be coupled in parallel, one or more or all of the strings in system **100** may be coupled to a string compensation circuit, configured to adapt the string voltage to allow parallel coupling. The input of a compensation circuit **307** (e.g. **307-1**, **307-n** etc.), sometimes referred to herein as a compensation device **307** or compensator **307**, may be coupled to an external power source V_s (e.g. V_{s_a} , V_{s_b} etc.). In some embodiments, the external power source may be implemented in various ways. For example, the external power source may be an alternating-current (AC) source or a direct-current (DC) source. In some embodiments, power source V_s may supply power produced by one or more PV modules in system **100**.

[0082] Compensator **307** may be configured in various ways. For example, if power source V_s outputs AC voltage, compensator **307** may include an AC-to-DC converter. In another example, if power source V_s outputs DC voltage, compensator **307** may include a DC-to-DC converter. In some embodiments, compensator **307** may output a positive voltage, allowing the strings comprising system **100** to feature a common voltage equal to or higher than the highest string voltage without use of compensator units. In some embodiments, compensator **307** may include a polarity adjustment circuit, configured to output a DC voltage of either positive or negative polarity, which may allow system **100** to feature a common string voltage of arbitrary magnitude. In this manner, each string **316** may be configured to operate at a voltage level optimal for generating maximum power, with one or more compensators **307** (e.g. **307-1**, **307-n**) configured to adjust the voltage between the ground bus (or other bus not necessarily at ground) and the DC bus to a uniform value for one or more or all strings in the power system. For example, in string **316a**, the combined voltage of the photovoltaic modules comprising the string (**101a**, **101b** . . . **101m**) may be configured to maximize the power output by the modules, with compensator **307-1** increasing or decreasing the total string voltage to match the system common voltage level. Compensator **307** may output a voltage configured to bring the total voltage between the ground and power buses to a desirable operating point, and compensator **307** may output a current which is equal to the string current at the desirable operating point. In some embodiments, the power processed by each compensation

circuit may be small compared to the power produced by each string, which may result in a cheap and efficient method of producing maximum power by allowing a string to operate at the string's optimal voltage without requiring electronics rated to process the full-string power. A ground bus (or other bus not necessarily at ground) and DC bus may be coupled to the ends of each PV string, and the ground bus (or other bus not necessarily at ground) and DC bus may be input to inverter **301** or some other device (e.g., storage device, DC/DC power converter, etc.), which may be configured to output AC power to a load, such as a grid, a home, or energy storage devices.

[0083] Reference is now made to FIG. 6A, which shows one exemplary implementation of a string compensation circuit/device **307c**, according to some embodiments. A compensation device **307** may include an isolated power converter, such as a Flyback DC-DC converter or a Forward DC/DC converter. For the purpose of this example, a Flyback converter is considered and described, while other types of isolated converters may be used in exemplary embodiments. Flyback converter **213** may feature positive and negative input terminals (V_{in+} and V_{in-} , respectively), and positive and negative output terminals (V_{out+} and V_{out-} , respectively). The inputs may be electrically isolated from the outputs by use of transformer **T3** formed by magnetically coupling windings **L1** and **L2**. For this reason, a Flyback converter can be considered an “isolated converter”, i.e. a converter in which the input terminals are electrically isolated from the output terminals. The polarity of the Flyback output voltage may be configured by the polarity of winding **L2**. If **L1** and **L2** are wound with the same polarity, the voltage output by the converter will be inverted (i.e. of opposite polarity than the input voltage). If the polarity of winding **L1** and the polarity of the winding **L2** are different, the output voltage will be non-inverted (i.e. of the same polarity as the input). In converter **213**, the windings **L1** and **L2** have opposite polarities, so converter **213** might not be inverting. Switches **Q1** and **Q2** (e.g. MOSFETs, etc.) may be switched in a complementary manner (i.e. when **Q1** is ON, **Q2** is OFF, and vice-versa), and may be used to regulate the output DC voltage. In some embodiments, switch **Q2** may be replaced by a diode. The magnitude of the output voltage may depend on the windings ratio between windings **L1** and **L2**, and on the duty cycle of switch **Q1**. The output voltage magnitude may be higher or lower than the input voltage magnitude. The switching may be controlled by a control unit such as a microprocessor, ASIC, FPGA or similar suitable control device (not explicitly depicted). Capacitors C_i and C_o may stabilize the input and output voltages, respectively. Use of an isolated converter may be advantageous because the output voltage may be “floating” with regard to the input voltage, and by coupling the outputs serially with a photovoltaic string, the string voltage can be modified by the converter output without regard for the relative voltage input to the compensation circuit.

[0084] Reference is now made to FIG. 6B, which shows an exemplary implementation of a string compensation circuit **307d**/string compensation device **307d**, according to some embodiments. A compensation circuit **307** may include an inverting Flyback converter, such as converter **212**. Converter **212** may include the same functional components as those shown in converter **213**, operating in the same way, with the difference between converter **213** and

212 being in the polarity of the windings. In converter **212**, windings **L1** and **L2** are of the same polarity, resulting in a reversal of the polarity of the output voltage; the “upper” output terminal is the negative terminal V_{out-} , and the “lower” output terminal is the positive terminal V_{out+} .

[0085] Reference is now made to FIG. 7, which depicts one example of a compensation circuit **307**, which may be shown as bipolar compensation circuit **307e**, according to an exemplary embodiment. While various examples of compensation circuits **307** may be described and/or referred to herein with respect to a figure or embodiment, any disclosed compensation circuit **307** may be implemented in any disclosed or described example or embodiment. Bipolar compensator **307e** may include an isolated DC/DC converter **620** such as the Flyback converter discussed herein. The bipolar compensator may further include a polarity adjustment circuit such as a plurality of switches **Q3**, **Q4**, **Q5**, **Q6** configured in a “full-bridge” topology, and coupled in parallel with the DC/DC converter **620** output. When **Q3** and **Q6** are ON and **Q4**, **Q5** are OFF, the compensator output voltage may have the magnitude of the DC/DC converter output stage, with the opposite polarity. Switches **Q3**, **Q4**, **Q5** and **Q6** may be controlled by the same controller that controls switches **Q1** and **Q2**, or by a different controller. By enabling a positive or negative output DC voltage, any common DC string voltage may be applied to a plurality of parallel-coupled photovoltaic strings. A bipolar compensation unit can increase a string voltage by outputting a positive DC voltage, or can decrease the string voltage by outputting a negative DC voltage. Compensation circuit **307e** may be coupled to communication devices configured to communicate with one another and/or one or more system management units, such as a master system control device. Communication with other compensators and/or system management units may be useful in some embodiments to synchronize a common string voltage. In some embodiments synchronization might not be necessary, such as where, for example, a common voltage is imposed by an external device or system. In some embodiments, compensator **307e** may include Maximum Power Point Tracking (MPPT) device **398**, which may be configured to extract maximum power from a PV module that may be coupled to the power device. In some embodiments, the DC/DC conversion controller may include MPPT functionality. Compensator **307e** may further comprise control device **371**, which may be a microprocessor, Digital Signal Processor (DSP), ASIC and/or an FPGA. Control device **371** may control and/or communicate with other elements of compensator **307e** over common bus **390** (or one or more other bus components). In some embodiments, compensator **307e** may include circuitry and/or sensors **380** configured to measure parameters on or near a photovoltaic module and/or compensator components. These parameters may include the voltage and/or current output by the module, the power output by the module, the irradiance received by the module, and/or the temperature on or near the module. In some embodiments, compensator **307e** may include communication device **350**, which may be configured to transmit and/or receive data and/or commands from other devices. Communication device **350** may communicate using Power Line Communication (PLC) technology, or wireless technologies such as ZigBee, Wi-Fi, Bluetooth, cellular communication or other wireless methods. In some embodiments, compensator **307e** may include safety devices **360** (e.g., fuses, circuit breakers,

and/or Residual Current Detectors). Compensator **307e** may further include an auxiliary power circuit **394**, which may be configured to supply various voltage and/or current levels to power the various compensator components. The various components of compensator **307e** may communicate and/or share data over common bus **390** (or one or more other bus components).

[0086] Reference is now made to FIG. 8, which depicts a bipolar compensation circuit **307f** according to an exemplary embodiment. Bipolar compensator **307f** may include a rectifier circuit **610** coupled (e.g., in parallel) to a polarity adjustment circuit **630**. The polarity adjustment circuit **630** may be composed of switches **Q1**, **Q2**, **Q3** and **Q4** configured in a “full-bridge” arrangement. Rectifier circuit **610** may be configured to convert an AC input to a DC output, and may be implemented using, for example, four diodes in a “rectifying full bridge” arrangement. Bipolar compensator **307f** may receive an AC output from an external power source (e.g., from the power grid or from a DC/AC inverter). Rectifier circuit **610** may further include a DC/DC conversion stage, and may be controlled to output a DC voltage of any magnitude. Switches **Q1**, **Q2**, **Q3**, and **Q4** may be configured to control to polarity of the output DC voltage. When **Q1** and **Q4** are ON and **Q2**, **Q3** are OFF, the compensator DC output may be positive, and when **Q1** and **Q4** are OFF and **Q2**, **Q3** are ON, the compensator DC output may be negative. Compensator **307f** may include communication, safety, sensor, MPPT and/or auxiliary power devices similar to the circuits discussed with regard to compensator **307e**, but not explicitly depicted in FIG. 8 for the sake of brevity.

[0087] Reference is now made to FIG. 9, which depicts a photovoltaic installation according to exemplary embodiments. Optimized photovoltaic power system **200** may be variously configured. In one embodiment, the photovoltaic power system may comprise a plurality of parallel-connected photovoltaic strings **317** (e.g. **317a**, **317n** etc.). A photovoltaic string **317** may include a plurality of series-connected photovoltaic modules **101** (e.g. solar cells, solar panels). According to some aspects, a string **317** may be or may be similar to the string **315**. The parallel string may be coupled between a ground bus (or other bus not necessarily at ground) and a DC bus, with the input of each bus connected to inverter **301**, which may be configured to output AC power to the grid, home, or energy storage devices. Due to the strings **317** having different locations, each string **317** (and the modules within a string **317**) may receive a different amount of sunlight and produce a different amount of power. Furthermore, the serial connection between the modules within each string **317** may lead to each string having a different voltage between its two ends. For different strings to be coupled in parallel, one or more or all of the strings in system **200** may be coupled to a string compensation circuit, which may be configured to adapt the string voltage to allow parallel coupling. A compensation circuit **307** (e.g. **307-1**, **307-n** etc.) may receive a DC input from one or more PV modules comprising a PV string. As shown in FIG. 9, each compensator **307** may be coupled to an entire PV string. For example, the negative input (V_{in-}) of compensator **307-1** may be coupled to the ground bus (or other bus not necessarily at ground), and the positive input (V_{in+}) may be coupled to the positive output terminal of PV module **101m**, which may be the last module in the serially connected string of modules **101a** . . . **101m**. Compensator

307 may include an isolated DC/DC converter such as one of the Flyback converters depicted in FIGS. 6A and 6B. By connecting the positive compensator input V_{in+} to one of the outputs via bypass **B1a**, two current paths between the compensator input terminal (s) and output terminal(s) may be formed. For example, current may be able to flow from the compensator input directly to the output via bypass **B1a**, and current may flow into the compensator at the input terminals, and flow out of the compensator at the outputs after being processed by the compensator. By dividing the string current into multiple portions, the power injected into the inputs of the compensator **307-1** may be significantly reduced, and the cost of implementing may be reduced as well. For instance, if a large voltage (e.g. a full-string voltage) is input to a compensator **307**, by directing a small portion of the current to the compensator inputs and a larger portion directly to the output (via a bypass path), the compensator may process a reduced amount of power, and the components needed for realization of the compensator may be correspondingly smaller and cheaper.

[0088] Reference is now made to FIG. 10, which depicts a photovoltaic installation according to exemplary embodiments. Optimized photovoltaic power system **300** may comprise a plurality of photovoltaic strings **318** (e.g. **318a**, **318n** etc.) coupled in parallel between ground and DC buses. A ground bus (or other bus not necessarily at ground) and DC bus may be coupled to the ends of each PV string **318**, and the ground bus (or other bus not necessarily at ground) and DC bus may be input to inverter **301**, which may be configured to output AC power to a load, such as a grid, a home, and/or energy storage devices. One or more of the strings **318** may feature a plurality of serially-connected photovoltaic modules **101** (e.g. **101**, **101b** etc.) and a string compensation circuit **307** (e.g. compensator **307-1**, **307-n** etc.). According to some aspects, a string **318** may be or may be similar to the string **315**. The two inputs of a string compensation circuit (e.g. **403-1**) may be coupled in parallel to a photovoltaic module (e.g. **101m**), and a portion of the power produced by PV module may be input to the compensator **307**. The rest of the power may be transferred directly to the compensator **307** output via a bypass path. The compensation circuit **307** may process the input power and output a voltage to bring to the total string voltage to the desired common voltage between the ground and power buses, while allowing the plurality of series-connected PV modules in the string to operate at a voltage yielding maximum power output. Similarly to other embodiments disclosed herein, processing a portion of the string power may allow components to be smaller and cheaper, and may result in enhanced system efficiency.

[0089] Reference is now made to FIG. 11A, which illustrates the current flowing in different branches of a photovoltaic module **101** coupled to a compensator **307g** according to exemplary embodiments. According to some aspects, the module **101** may be part of a string of panels **101**, such as shown in other figures discussed herein. In the illustrative exemplary embodiment depicted in FIG. 11A, a unipolar compensator (e.g., might not include a polarity adjustment circuit) featuring a non-inverting Flyback converter is used. The current-flow analysis is similar for a bipolar compensator such as compensator **307e**, and either a unipolar compensator or a bipolar compensator may be used in exemplary systems and scenarios, such as the systems and scenarios described herein. Unipolar compensator **307g** may

include a Flyback converter featuring a pair of input terminals, V_{in+} and V_{in-} , and a pair of output terminals, V_{out+} and V_{out-} . For brevity's sake, additional components that may be featured in the compensator (e.g. communication, safety, control and/or monitoring devices etc. as depicted with regard to compensator 307e) are not explicitly depicted.

[0090] The compensator may include capacitor C_i coupled between the inputs, and capacitor C_o coupled between the outputs. Switches Q1 and Q2 (e.g. MOSFETs) may be switched in a complementary manner. Q1 may be coupled between the negative input terminal V_{in-} and winding L1, while Q2 may be coupled between the negative output terminal V_{out-} and winding L2. The windings may be magnetically coupled to one another by a magnetic core. PV module 101 may be coupled to the inputs, and may input photovoltaic power to the compensation circuit. When Q1 is ON and Q2 is OFF (illustrated in FIG. 11A with an "X"), winding L1 may draw current from PV module 101 and the discharging capacitor C_i . The module current I_p may be divided into current portion I_d which may be input to the compensator may charge L1, and into current portion I_s which may bypass the compensator input and may flow through the output terminals, charging capacitor C_o while flowing from V_{out-} to V_{out+} . Current I_s may be the effective string (e.g., string 317a depicted in FIG. 9) current, and may flow into compensation circuit 307g via string conductor 631, and may continue to flow from V_{out+} via string conductor 631. The power drawn by compensator 307g during this time is given by $V_{ci} \cdot (I_p - I_s)$, which may be significantly lower than the power output by module 101, which is given by $V_{ci} \cdot I_p$. Since V_{out-} is coupled to V_{in+} , the output voltage is given by $V_{out+} = V_{in+} + V_{co}$. In other words, if V_{co} is positive, the output voltage may be higher than the input voltage. If an inverting Flyback is used, the output voltage may be $V_{out+} = V_{in+} - V_{co}$, and the output voltage will be lower than the input voltage.

[0091] Reference is now made to FIG. 11B, which illustrates the current flowing in different branches of a compensator 307g when Q1 is OFF (illustrated in FIG. 11B with an "X") and Q2 is ON. Photovoltaic module 101 may output a current I_p , which is divided into two portions. One portion, I_s , bypasses the compensator inputs and flows directly to the negative output terminal V_{out-} via a bypass path. A second portion, I_{ci} flows into the compensator to charge capacitor C_i . Winding L1 transfers stored energy via a shared magnetic core to winding L2, which discharges the energy by generating current I_{L2} which flows towards output V_{out+} . Capacitor C_o discharges, adding the capacitor C_o 's discharge current I_{co} to I_{L2} form the string current I_s . Similarly to when Q1 is ON and Q2 is OFF, the power input to compensator 307g may be significantly lower than the power generated by the panel. By using a suitable windings ratio for L1 and L2 and operating switches Q1 and Q2 at an appropriate duty cycle, the charging and discharging of capacitors C_i and C_o may be configured to adjust output voltage V_{out+} to a value which brings a photovoltaic string voltage to a desired common voltage. For example, if L1 contains n_1 windings and L2 contains n_2 windings, the output voltage V_{out+} can be calculated as:

$$V_{out+} = V_{in+} + (V_{in+} - V_{in-}) \cdot \frac{n_2}{n_1} \cdot \frac{D}{1-D}$$

where D is the duty cycle of switch Q1 and (1-D) is the duty cycle of switch Q2. If an inverting Flyback is used, the output voltage V_{out+} can be calculated as:

$$V_{out+} = V_{in+} - (V_{in+} - V_{in-}) \cdot \frac{n_2}{n_1} \cdot \frac{D}{1-D}$$

If the compensator includes a polarity adjustment circuit (e.g., a full-bridge of switches), either output value may be obtained, according to how the polarity adjustment circuit is operated. Appropriate choice of windings ratio and duty-cycle may allow flexible and robust system management, while obtaining high efficiency and low-cost by the compensator processing a portion of the string or PV module output power.

[0092] Reference is now made to FIG. 12, which shows an additional exemplary embodiment. Photovoltaic power system 400 may comprise a plurality of photovoltaic strings 319 (e.g. 319a, 319n etc.) coupled in parallel between a ground bus (or other bus not necessarily at ground) and a power bus. A photovoltaic string 319 may include a plurality of photovoltaic modules 101 (e.g. 101a, 101b, etc.) such as solar cells and/or solar panels. According to some aspects, a string 319 may be or may be similar to the string 315. A plurality of power devices 700 (e.g. 700a, 700b, etc.) may be coupled to modules 101 such that each power device 700 may be coupled to one or more modules. A power device 700 may be the compensation circuit 307 discussed herein, may be similar to the compensation circuit 307 discussed herein, and/or may include one or more or all of the compensation circuit 307's components. For example, the power device 700 may be similar to unipolar compensation circuit 307g or to bipolar compensation circuit 307e, featuring a Flyback DC/DC converter. In some embodiments, a DC/AC micro-inverter may be utilized to output an AC voltage, with each microinverter's output coupled in series to generate an AC string voltage of comparable magnitude to grid voltage. In exemplary system 400, the inputs of each power device may be coupled to the outputs of a PV module 101. In some embodiments, multiple modules may be coupled in series and the resultant series coupled to an input of a power device 700. In some embodiments, power devices may be coupled to some or to all of the modules in a string or a system.

[0093] Each power device 700 may comprise a power conversion circuit configured to regulate the power drawn from its corresponding PV modules(s), by using techniques such as MPPT, "perturb and observe", impedance matching, and/or other methods of determining and tracking a maximum power point or a power point close to the maximum power point. The positive input terminal of one or more power device(s) 700 may be coupled to one of the output terminals, allowing current to flow directly to the device output without being processed by the power device, which may potentially result in efficiency advantages as explained herein. For example, if each module 101 in the system is coupled to a power device 700, the majority of each string's current may flow directly from power device inputs to the output with being processed by the device. The device 700 may still process a small portion of the system power, employing power conversion to ensure that each module is working near or at its maximum power point. Each power device 700 may receive a DC power input, and output an appropriate output. In some embodiments, the output may be

a DC voltage. Depending on the particular power device used and the control applied to the device, a DC signal greater or smaller than the input voltage may be obtained. In some embodiments (e.g. if power device **700** includes a polarity adjustment circuit allowing the power device **700** to function as a microinverter), each power device **700** may be configured to output an AC signal. In some embodiments, each power device **700** may output a time-varying DC signal such as a rectified sine wave, rectangular, or square wave. Each power device **700** may have one output coupled to the device **700**'s positive input terminal, and the device **700**'s other output coupled in series to the photovoltaic string A system power device **710** may be coupled between the ground and power buses. In one example, when one or more power devices **700** output DC power, system power device **710** may include or be an inverter configured to convert a DC input (e.g., input from the one or more power devices **700**) to an AC output to a load, such as a home or a grid. In one example, the system power device **710** may be a storage device, such as a battery or capacitor. In one example, the system power device **710** may be a DC/DC converter. In some embodiments, device **710** may include safety, control, communication, monitoring and/or management devices, which may be coupled to one or more of the other components of system **400**, such as a power device **700**.

[0094] While FIG. **12** may depict a system of serially connected PV devices power **700**, embodiments may include other connection methods. For example, in some embodiments, a plurality of PV power devices may be coupled in parallel. According to some aspects, this configuration may be functionally and/or electrically equivalent to a system such as system **400**, wherein each string is of length one (i.e., each string contains one PV module coupled in parallel to one PV power device, with the power device inputs and outputs configured as in system **400**). Some embodiments may be of hybrid serial-parallel nature. For example, an exemplary photovoltaic string may include a plurality of pairs of PV modules, wherein each module in each pair is coupled to a power device in the manner disclosed herein (e.g., each power device may include an isolated converter with one of the converter's inputs coupled to one of the converter's outputs) the power devices are coupled in parallel, and a plurality of such pairs are coupled in series, forming a serial string coupled between the ground and power buses. In some embodiments, additional power sources may be featured, such as batteries, wind turbines, fuel cells, etc. Many additional layouts, which make use of the novel features disclosed herein, may be implemented and are included in one or more exemplary embodiments.

[0095] Reference is now made to FIG. **13**, which illustrates an integrated block **50**, which may be part of a PV system, according to exemplary embodiments. Integrated block **50** may include PV module **101**, which may be coupled to power converter **204**. In some embodiments, the converter **204** may be and/or include one or more components or devices described herein. For example, the converter **204** may be a DC/DC or DC/AC converter, configured to receive a DC input from module **101** and output a DC, time-varying-DC, or AC signal. Power converter **204** may include an isolated converter such as a Flyback or Forward converter (such as described herein), and in some embodiments may include a polarity adjustment circuit (such as described herein). Integrated block **50** may include circuits and devices discussed herein (e.g. bipolar compensator

307e), such as communication device **350**, sensor(s) **380**, controller **371**, MPPT device **398**, safety device(s) **360**, auxiliary power circuit **394**, and/or common bus **390** (or one or more other bus components). Integrated block **50** may be packaged and deployed as a single unit. In some embodiments, a single integrated block **50** may be deployed in one or more of the PV strings to supply voltage-compensation functionality. In some embodiments, entire PV strings may comprise serially coupled integrated blocks. In some embodiments, integrated block **50** may feature a few terminals (e.g., two terminals), which may allow for fast and simple system installation, while obtaining the benefits of a sophisticated electronic system with minimal installation complexity. In some embodiments, integrated block **50** may be embedded onto a roof shingle, with electrical contacts placed to create serial electric connection between integrated blocks when shingles are placed next to one another.

[0096] Reference is now made to FIG. **14**, which depicts an exemplary embodiment of a power device **700**. PV power device **700a** may include some or all of the components of integrated block **50**, and may be similarly arranged, with the exclusion of a power-generating PV module. Power device **700a** may include power converter **206**. In some embodiments, the converter **206** may be and/or include one or more components or devices described herein. For example, the converter **206** may be a DC/DC or DC/AC converter, configured to receive a DC input from module **101** and output a DC, time-varying-DC, or AC signal. Power converter **206** may include an isolated converter such as a Flyback or Forward converter (such as described herein), and in some embodiments may include a polarity adjustment circuit (such as described herein).

[0097] According to some aspects, the power converter **204** and/or the power converter **206** may be the same as or may be similar to one another. According to some aspects, the power converter **204** and/or the power converter **206** may be the same as or similar to the compensation device **307** and/or to the power device **700**. According to some aspects, the compensation device **307** and/or the power device **700** may be the same as or similar to the power converter **204** and/or the power converter **206**.

[0098] Referring back to FIG. **14**, power device **700a** may include circuits and devices discussed herein, such as circuits and devices discussed with regard to other embodiments and figures (e.g. bipolar compensator **307e** and/or integrated block **50**) such as communication device **350**, sensor(s) **380**, controller **371**, MPPT device **398**, safety device(s) **360**, auxiliary power circuit **394**, and/or common bus **390** (or one or more other bus components). PV power device **700a** may include a pair of input terminals T1 and T2 configured to receive DC power from, for example, a photovoltaic module and/or another power source. In some embodiments, the power device may include terminals T3 and T4, configured to be serially coupled to similar power devices. In some embodiments, T3 and T4 are coupled at the time of manufacturing to conductors leading to similar power devices. By coupling a plurality of power devices at the time of manufacturing, using conductors of appropriate length to allow adjacently-coupled power devices to be coupled to adjacent PV modules when deployed in a solar installation, the plurality of power devices **6** can be quickly and efficiently deployed during installation. For example, if two adjacent photovoltaic modules are placed such that their junction boxes are 1.5 meters apart, each pair of PV power

devices **6** may be coupled by a conductor approximately 1.5 meters long, with a plurality of such coupled devices forming a “chain” that can be rapidly coupled to all the PV modules in the string.

[0099] Reference is now made to FIG. **15**, which shows an external view of an exemplary photovoltaic power device **70**, which may be similar to the power devices described herein. PV power device **70** may comprise casing **231**. Circuitry **230** (e.g., which may be any of the circuitry described or referred to herein, such as device **307**, device **700**, device **50**, power converters, etc.) may be enclosed in casing **231** and may include all or some of the power devices described with regard to compensation circuits and/or PV power devices, such as a DC/DC and/or DC/AC converter, communication device(s), sensor(s), controller(s), MPPT device(s), safety device(s), auxiliary power circuit(s) and/or common bus(es). In some embodiments, casing **231** might not comprise a full enclosure. For example, casing **231** may comprise a lid-like surface designed to be placed on a PV module junction box and mechanically connected to the junction box, such that circuitry **230** mounted on the lid is electronically coupled to the PV module when the lid is fastened to the junction box. PV power device **70** may include input terminals **210a** and **210b** configured to receive power from one or more photovoltaic modules and transfer it to circuitry **230**, and a pair of output conductors **220a** and **220b** configured to output power to the photovoltaic string. In accordance with exemplary embodiments disclosed herein, one of the input terminals may be internally (i.e. within casing **231**) coupled to one of the output conductors, allowing current to flow directly from an input terminal to an output conductor while bypassing the power-processing devices of circuitry **230**. The output conductors may be coupled to additional PV power devices similar to device **70**, forming a chain of power devices, and may be of appropriate length to allow adjacent devices in the device chain to be coupled to adjacent modules in a photovoltaic installation.

[0100] Reference is now made to FIG. **16**, which illustrates an aspect of an exemplary embodiment. A plurality of photovoltaic devices **8** may be coupled by output conductors **220**, forming a chain of devices **8**. Each PV device **8** may be any of, of similar function of, and/or of similar structure of one or more of the devices disclosed herein, such as device **307**, device **700**, device **50**, power converters, etc. Output conductors **220** may each be of appropriate length to allow adjacent devices **8** in the device to be coupled to adjacent modules in a photovoltaic installation. The chain of devices may be efficiently and effectively stored. For example, the chain of devices **8** and output conductors **220** may be wound around storage device **401**, which may resemble a cabling reel, allowing the storage device to be rolled along a plurality of PV modules while coupling devices from the chain to the modules.

[0101] The indefinite articles “a”, “an” is used herein, such as “a string”, “a voltage-compensation circuit” have the meaning of “one or more” that is “one or more strings” or “one or more voltage-compensation circuits”.

[0102] It is noted that various connections are set forth between elements herein. These connections are described in general and, unless specified otherwise, may be direct or indirect; this specification is not intended to be limiting in this respect. Further, elements of one embodiment may be combined with elements from other embodiments in appropriate combinations or subcombinations.

[0103] Although selected features of the present invention have been shown and described, it is to be understood the present invention is not limited to the described features. Instead, it is to be appreciated that changes may be made to these features without departing from the principles and spirit of the invention, the scope of which is defined by the claims and the equivalents thereof.

What is claimed is:

1. A method comprising:

coupling inputs of a power converter to a power source; coupling at least one input of the power converter to a string of photovoltaic modules, directly connecting a first input of the inputs of the power converter to an output of the power converter via a direct bypass link; and dividing a current output by the string of photovoltaic modules into:

- a first current that flows from the first input of the power converter to the output of the power converter via the power converter; and
- a second current that flows directly from the first input of the power converter to the output of the power converter via the direct bypass link, wherein the second current is greater than the first current.

2. The method of claim 1, further comprising configuring the power converter to draw power output by the power source and to output a voltage to control an operating point of the string of photovoltaic modules.

3. The method of claim 1, wherein the power source comprises one or more photovoltaic modules.

4. The method of claim 1, wherein the power converter is configured to adjust a polarity of a voltage output from the power converter.

5. The method of claim 1, further comprising:

adding to or subtracting from a voltage of the string of photovoltaic modules by switching a polarity of the output of the power converter.

6. A system comprising:

a plurality of parallel-connected photovoltaic strings, a first photovoltaic string of the plurality of parallel-connected photovoltaic strings comprising:

- a series-connection of photovoltaic cells; and
- a voltage-compensation circuit comprising output terminals and input terminals, the output terminals connected in series with the series-connection of photovoltaic cells, and the input terminals connected to a power source, wherein the voltage-compensation circuit is configured to output an adjustable compensation voltage, and wherein a first current from the first photovoltaic string flows from a first input terminal of the of the voltage-compensation circuit to a first output terminal of the of the voltage-compensation circuit via the voltage-compensation circuit; and

a direct bypass link directly connecting the first input terminal of the voltage-compensation circuit and the first output terminal of the voltage-compensation circuit, wherein a second current from the first photovoltaic string flows from the first input terminal of the voltage-compensation circuit to the first output terminal of the voltage-compensation circuit via the direct bypass link, the second current greater than the first current.

7. The system of claim 6, wherein the voltage-compensation circuit is configured to convert the first current into the adjustable compensation voltage at the output terminals.

8. The system of claim 7, wherein the voltage-compensation circuit is configured add the adjustable compensation voltage to or subtract the adjustable compensation voltage from a voltage of the first photovoltaic string connected to the voltage-compensation circuit.

9. The system of claim 7, further comprising a power device connected to the plurality of parallel-connected photovoltaic strings, wherein the power device is configured to determine an optimal power level, and wherein each of the plurality of parallel-connected photovoltaic strings is configurable to supply power at different levels based on the optimal power level.

10. The system of claim 9, wherein the voltage-compensation circuit is configured to adjust the adjustable compensation voltage based on the optimal power level.

11. The system of claim 10, the plurality of parallel-connected photovoltaic strings comprising a second photovoltaic string, the second photovoltaic string comprising:

- a second series-connection of photovoltaic cells; and
- a second voltage-compensation circuit comprising second output terminals and second input terminals and configured to output a second adjustable compensation voltage, the second output terminals connected in series with the second series-connection of photovoltaic cells, and the second input terminals connected to a second power source.

12. The system of claim 11, wherein the second voltage-compensation circuit is configured to adjust the second adjustable compensation voltage based on the optimal power level.

13. The system of claim 12, wherein the adjustable compensation voltage is at a different level from the second adjustable compensation voltage.

14. The system of claim 6, wherein the input terminals are connected across a source of power separate from a power provided by the system.

15. A system comprising:

- a photovoltaic string comprising:
 - a series-connection of photovoltaic cells;
 - a power device comprising output terminals and input terminals and configured to regulate a voltage drawn from the photovoltaic string, the output terminals connected to the series-connection of photovoltaic cells, and the input terminals connected to a power source, wherein the power device is configured to

direct a first current flow from a first input terminal of the input terminals to a first output terminal of the output terminals via the power device; and

- a direct bypass link directly connecting the first input terminal and the first output terminal, wherein the power device is configured to direct a second current flow from the first input terminal to the first output terminal via the direct bypass link, the second current flow being greater than the first current flow.

16. The system of claim 15, further comprising:

a second photovoltaic string connected in parallel with the photovoltaic string, the second photovoltaic string comprising:

- a second series-connection of photovoltaic cells;
- a second power device comprising second output terminals and second input terminals and configured to regulate a second voltage drawn from the second photovoltaic string, the second output terminals connected to the second series-connection of photovoltaic cells, and the second input terminals connected to a second power source, wherein the second power device is configured to direct a third current flow from a second input terminal of the second input terminals to a second output terminal of the second output terminals via the second power device; and
- a second direct bypass link directly connecting the second input terminal and the second output terminal, wherein the second power device is configured to direct a fourth current flow from the second input terminal to the second output terminal via the second direct bypass link, the fourth current flow being greater than the third current flow.

17. The system of claim 16, further comprising:

a system power device connected to the power device and the second power device.

18. The system of claim 15, wherein the power source comprises one or more photovoltaic modules.

19. The system of claim 17, the power device comprising a polarity adjustment circuit configured to convert a DC input to an AC output.

20. The system of claim 16, the power device comprising:

- a converter configured to convert power received at the input terminals to an output DC voltage; and
- a polarity adjustment circuit connected between the converter and the output terminals, the polarity adjustment circuit configured to adjust a polarity of the output DC voltage.

* * * * *