



US010050444B2

(12) **United States Patent**  
**Neyhart**

(10) **Patent No.:** **US 10,050,444 B2**  
(45) **Date of Patent:** **\*Aug. 14, 2018**

(54) **NETWORK ACCESS COORDINATION OF  
LOAD CONTROL DEVICES**

(71) Applicant: **LUTRON ELECTRONICS CO.,  
INC.**, Coopersburg, PA (US)

(72) Inventor: **Jeremy Thomas Neyhart**, Bethlehem,  
PA (US)

(73) Assignee: **LUTRON ELECTRONICS CO.,  
INC.**, Coopersburg, PA (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 155 days.

This patent is subject to a terminal dis-  
claimer.

(21) Appl. No.: **15/011,257**

(22) Filed: **Jan. 29, 2016**

(65) **Prior Publication Data**

US 2016/0149411 A1 May 26, 2016

**Related U.S. Application Data**

(63) Continuation of application No. 13/796,486, filed on  
Mar. 12, 2013, now Pat. No. 9,413,171.

(Continued)

(51) **Int. Cl.**

**H04L 12/28** (2006.01)

**H02J 3/14** (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC ..... **H02J 3/14** (2013.01); **G05B 15/02**  
(2013.01); **G08C 17/02** (2013.01);

(Continued)

(58) **Field of Classification Search**

None

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,864,588 A 9/1989 Simpson et al.

4,932,037 A 6/1990 Simpson et al.

(Continued)

**FOREIGN PATENT DOCUMENTS**

CA 2892464 A1 11/2015

CN 101789978 A 7/2010

(Continued)

**OTHER PUBLICATIONS**

“CEDIA 2012: Crestron Demos Home Technology Control Solution  
with NFC-Enabled Mobile Device”, Available at <http://www.youtube.com/watch?v=qXwoTJX14BE>, retrieved on Aug. 13,  
2013, Video Provided on CD Media, Sep. 8, 2012, pp. 1-2.

(Continued)


*Primary Examiner* — Michael J Moore, Jr.

(74) *Attorney, Agent, or Firm* — Glen Farbanish; Amy  
Yanek; Philip Smith

(57) **ABSTRACT**

An apparatus may control the power delivered from an AC  
power source to an electrical load, and may comprise a  
controllably conductive device. The apparatus may also  
comprise a controller that may be operatively coupled to a  
control input of the controllably conductive device. The  
apparatus may also include a first wireless communication  
circuit operable to communicate via a first protocol and to  
join a first wireless communication network operable to  
communicate via the first protocol. The first wireless com-  
munication circuit may be in communication with the con-  
troller. The controller may be operative to determine a first  
condition for communicating via the first protocol. The  
controller may also be operable to control the first wireless  
communication circuit to join the first wireless communi-  
cation network upon the first condition being satisfied.

**31 Claims, 15 Drawing Sheets**

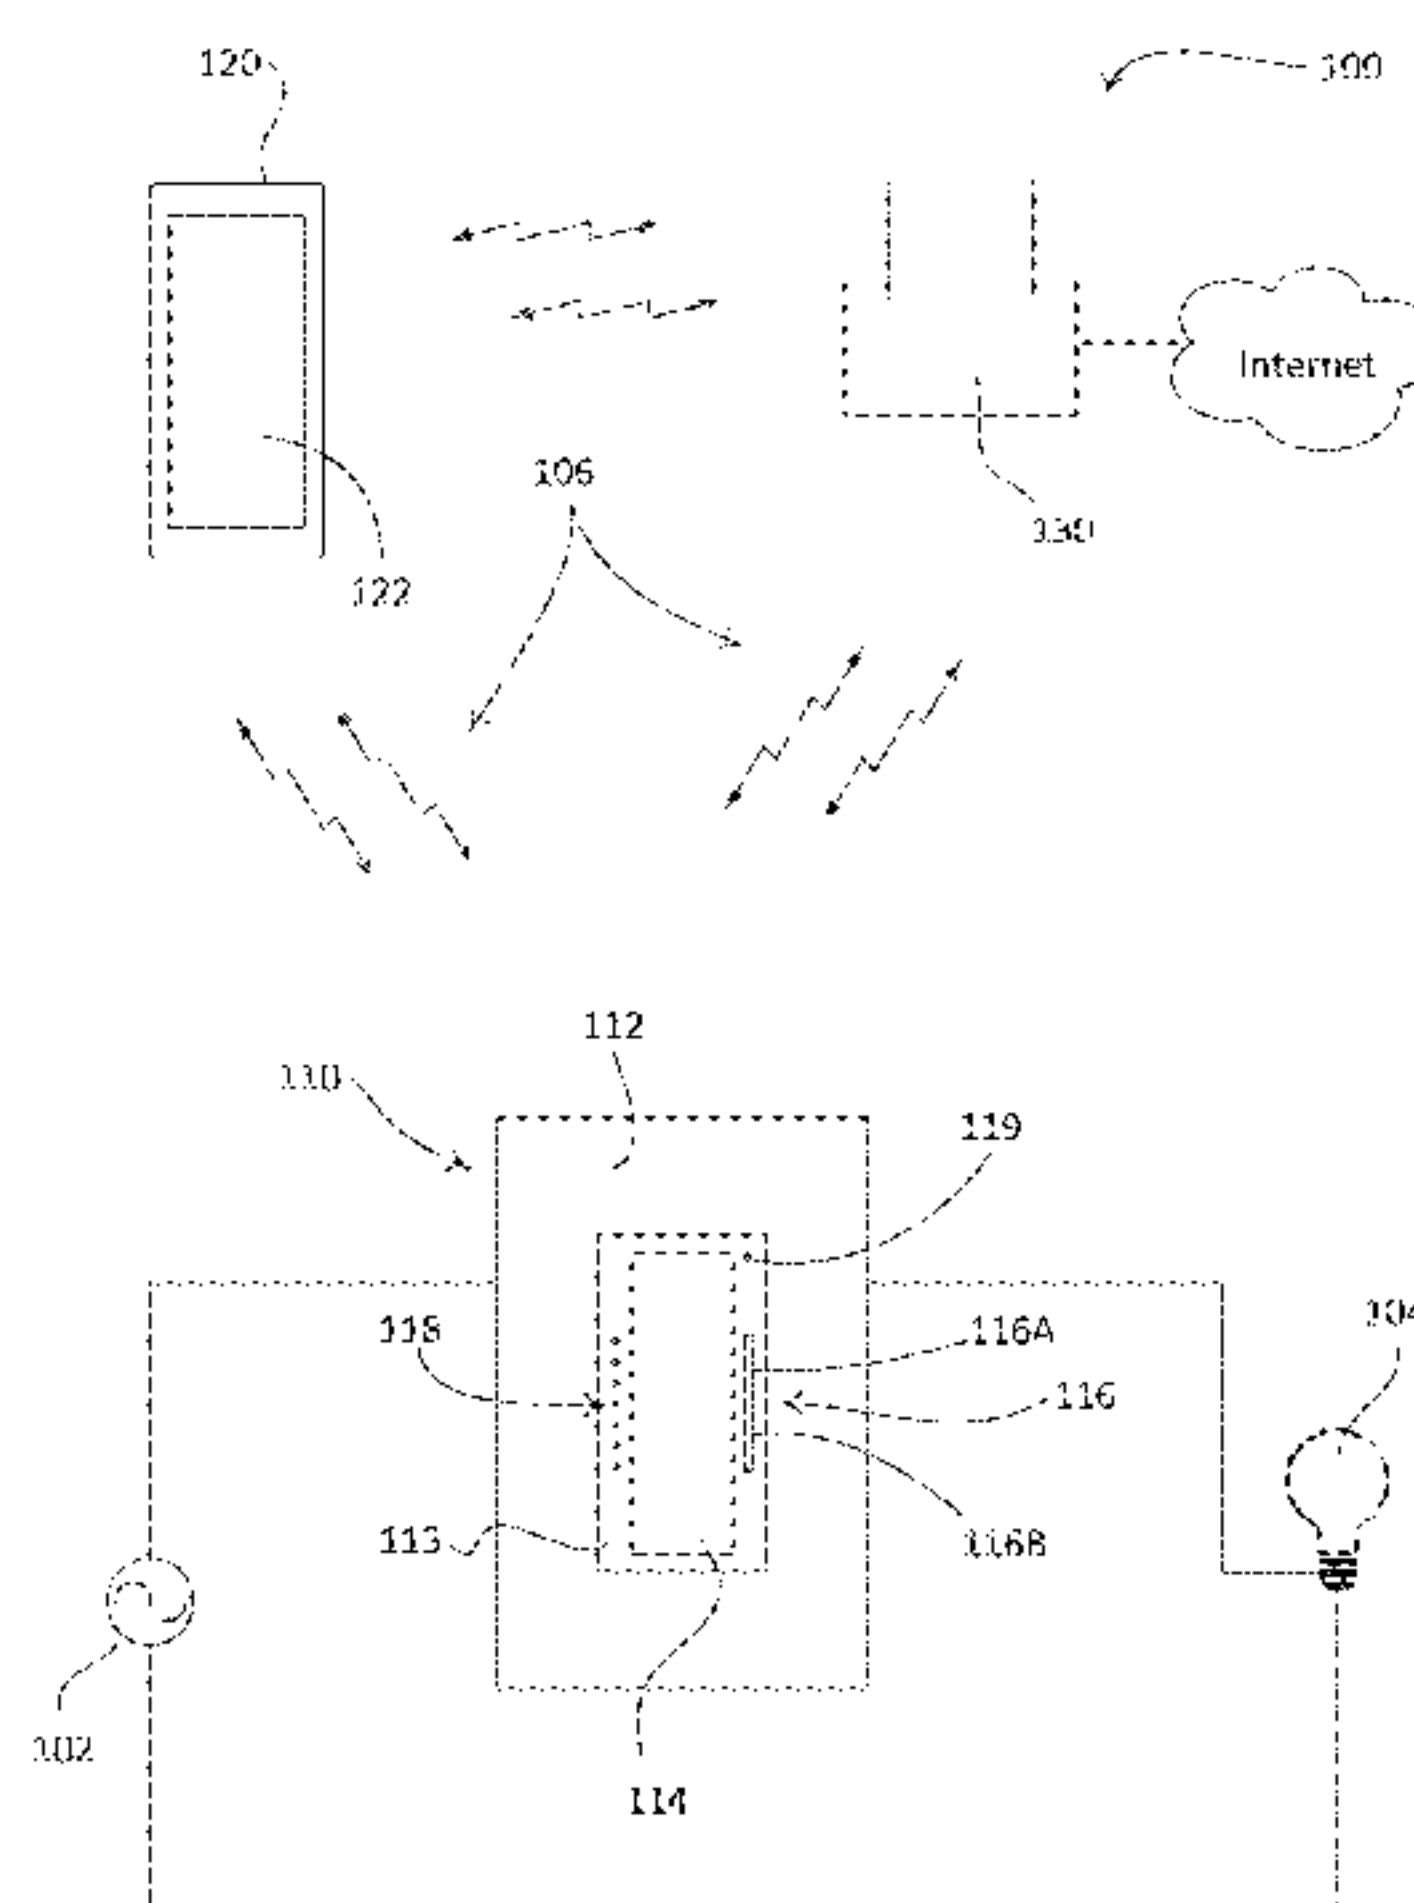

(60) Provisional application No. 61/745,419, filed on Dec. 21, 2012.

(52) **U.S. Cl.**  
CPC ..... *H04L 12/2807* (2013.01); *H04L 12/2823*  
(2013.01); *H04W 76/20* (2018.02); *H04L*  
*2012/2841* (2013.01); *H04W 74/00* (2013.01)

## U.S. PATENT DOCUMENTS

7,525,928	B2	4/2009	Cutler	
7,548,216	B2	6/2009	Webb et al.	
7,573,208	B2	8/2009	Newman, Jr.	
7,573,436	B2	8/2009	Webb et al.	
7,598,684	B2	10/2009	Lys et al.	
7,687,744	B2	3/2010	Walter et al.	
7,697,492	B2	4/2010	Petite	
7,714,790	B1	5/2010	Feldstein et al.	
7,755,505	B2	7/2010	Johnson et al.	
7,756,086	B2	7/2010	Petite et al.	
7,756,097	B2	7/2010	Uehara et al.	
7,756,556	B2	7/2010	Patel et al.	
7,805,134	B2	9/2010	Mirza-Baig	
7,821,160	B1	10/2010	Roosli et al.	
7,852,765	B2	12/2010	Neuman et al.	
7,853,221	B2	12/2010	Rodriguez et al.	
7,889,051	B1	2/2011	Billig et al.	
8,013,732	B2	9/2011	Petite et al.	
8,031,650	B2	10/2011	Petite et al.	
8,035,255	B2	10/2011	Kurs et al.	
8,146,074	B2	3/2012	Ito et al.	
8,173,920	B2	5/2012	Altonen et al.	
8,228,163	B2	7/2012	Cash et al.	
8,254,838	B2	8/2012	Feldstein	
8,339,247	B2	12/2012	Adamson et al.	
8,364,319	B2	1/2013	Roosli	
8,368,310	B1	2/2013	Roosli	
8,379,564	B2	2/2013	Petite et al.	
8,396,007	B2	3/2013	Gonia et al.	
8,416,074	B2	4/2013	Sadwick	
8,525,372	B2	9/2013	Huang	
8,548,607	B1 *	10/2013	Belz .....	G05B 15/02 700/11
8,598,978	B2	12/2013	Knode	
8,742,686	B2	6/2014	Zampini, II et al.	
8,792,401	B2	7/2014	Banks et al.	
8,892,261	B2	11/2014	Hoonhout et al.	
9,066,381	B2	6/2015	Valois et al.	
9,445,482	B2	9/2016	Brochu et al.	
9,548,797	B1	1/2017	Green et al.	
9,641,959	B2	5/2017	Brochu et al.	
9,766,645	B2 *	9/2017	Imes .....	G05F 1/66
9,767,249	B1 *	9/2017	Belz .....	G06F 19/00
2001/0024164	A1	9/2001	Kawamura et al.	
2002/0043938	A1	4/2002	Lys	
2002/0060530	A1	5/2002	Sembhi et al.	
2002/0073183	A1	6/2002	Yoon et al.	
2002/0087436	A1	7/2002	Guthrie et al.	
2002/0113909	A1	8/2002	Sherwood	
2002/0154025	A1	10/2002	Ling	
2003/0034898	A1	2/2003	Shamoon et al.	
2003/0040813	A1	2/2003	Gonzales et al.	
2003/0109270	A1	6/2003	Shorty	
2003/0151493	A1	8/2003	Straumann et al.	
2003/0197993	A1	10/2003	Mirowski et al.	
2004/0036624	A1	2/2004	Ballew et al.	
2004/0052076	A1	3/2004	Mueller et al.	
2004/0058706	A1	3/2004	Williamson et al.	
2004/0059840	A1	3/2004	Perego et al.	
2004/0193998	A1	9/2004	Blackburn et al.	
2004/0217718	A1	11/2004	Kumar et al.	
2005/0030153	A1	2/2005	Mullet et al.	
2005/0045429	A1	3/2005	Baker	
2005/0048944	A1	3/2005	Wu	
2005/0156708	A1	7/2005	Puranik et al.	
2005/0253538	A1	11/2005	Shah et al.	
2005/0285547	A1	12/2005	Piepgas et al.	
2006/0027081	A1	2/2006	Chang et al.	
2006/0044152	A1	3/2006	Wang	
2006/0109203	A1	5/2006	Huber et al.	
2006/0154598	A1	7/2006	Rudland et al.	
2006/0171332	A1	8/2006	Barnum	
2006/0174102	A1	8/2006	Smith et al.	
2006/0192697	A1	8/2006	Quick et al.	
2006/0202851	A1	9/2006	Cash et al.	
2006/0251059	A1	11/2006	Otsu et al.	
2006/0256798	A1	11/2006	Quick et al.	
2006/0273970	A1	12/2006	Mosebrook et al.	
2006/0284734	A1	12/2006	Newman	



(56)

**References Cited****U.S. PATENT DOCUMENTS**

2006/0285150 A1 12/2006 Jung et al.  
 2007/0051529 A1 3/2007 Soccoli et al.  
 2007/0083294 A1 4/2007 Bruno  
 2007/0085699 A1 4/2007 Walters et al.  
 2007/0085700 A1 4/2007 Walters et al.  
 2007/0085701 A1 4/2007 Walters et al.  
 2007/0085702 A1 4/2007 Walters et al.  
 2007/0097993 A1 5/2007 Bojakra et al.  
 2007/0110192 A1 5/2007 Steiner  
 2007/0112939 A1 5/2007 Wilson et al.  
 2007/0121323 A1 5/2007 Pawlik et al.  
 2007/0165997 A1 7/2007 Suzuki et al.  
 2007/0176788 A1 8/2007 Mor et al.  
 2007/0229300 A1 10/2007 Masato et al.  
 2008/0055073 A1 3/2008 Raneri et al.  
 2008/0068126 A1 3/2008 Johnson et al.  
 2008/0068204 A1 3/2008 Carmen et al.  
 2008/0089266 A1 4/2008 Orsat  
 2008/0111491 A1 5/2008 Spira  
 2008/0136261 A1 6/2008 Mierta  
 2008/0136356 A1 6/2008 Zampini et al.  
 2008/0136663 A1 6/2008 Courtney et al.  
 2008/0147337 A1 6/2008 Walters et al.  
 2008/0148359 A1 6/2008 Kezys et al.  
 2008/0183316 A1 7/2008 Clayton  
 2008/0192767 A1 8/2008 Howe et al.  
 2008/0218099 A1 9/2008 Newman  
 2008/0258650 A1 10/2008 Steiner et al.  
 2008/0278297 A1 11/2008 Steiner et al.  
 2008/0284327 A1 11/2008 Kang et al.  
 2009/0079268 A1 3/2009 Cook et al.  
 2009/0085408 A1 4/2009 Bruhn  
 2009/0113229 A1 4/2009 Cataldo et al.  
 2009/0150004 A1 6/2009 Wang et al.  
 2009/0167484 A1 7/2009 Burr  
 2009/0206983 A1 8/2009 Knode et al.  
 2009/0251352 A1 10/2009 Altonen et al.  
 2009/0302782 A1\* 12/2009 Smith ..... H05B 37/0245  
 315/297  
 2009/0315672 A1 12/2009 Nantz et al.  
 2009/0322251 A1 12/2009 Hilgers  
 2010/0012738 A1 1/2010 Park  
 2010/0031076 A1 2/2010 Wan et al.  
 2010/0052574 A1 3/2010 Blakeley et al.  
 2010/0052576 A1 3/2010 Steiner et al.  
 2010/0081375 A1 4/2010 Rosenblatt et al.  
 2010/0104255 A1 4/2010 Yun et al.  
 2010/0114242 A1 5/2010 Doerr et al.  
 2010/0134341 A1 6/2010 Priest  
 2010/0141153 A1 6/2010 Recker et al.  
 2010/0207532 A1 8/2010 Mans  
 2010/0207759 A1 8/2010 Sloan et al.  
 2010/0235008 A1 9/2010 Forbes, Jr. et al.  
 2010/0238001 A1 9/2010 Veskovic  
 2010/0238003 A1 9/2010 Chan et al.  
 2010/0244706 A1 9/2010 Steiner et al.  
 2010/0262296 A1 10/2010 Davis et al.  
 2010/0289430 A1 11/2010 Stelzer et al.  
 2010/0303099 A1 12/2010 Rieken  
 2011/0006908 A1 1/2011 Frantz  
 2011/0012738 A1 1/2011 Nakamura et al.  
 2011/0043163 A1 2/2011 Baarman  
 2011/0046792 A1\* 2/2011 Imes ..... F24F 11/006  
 700/278  
 2011/0095622 A1 4/2011 Feldstein et al.  
 2011/0121654 A1 5/2011 Recker et al.  
 2011/0202910 A1\* 8/2011 Venkatakrishnan ... G06Q 10/06  
 717/171  
 2011/0208369 A1 8/2011 Yang et al.  
 2011/0244798 A1 10/2011 Daigle et al.  
 2011/0244897 A1 10/2011 Shibuya  
 2011/0282495 A1 11/2011 Fischer et al.  
 2011/0305200 A1 12/2011 Schoofs et al.  
 2012/0018578 A1 1/2012 Polcuch  
 2012/0039400 A1 2/2012 Rieken

2012/0086561 A1 4/2012 Ilyes et al.  
 2012/0086562 A1 4/2012 Steinberg  
 2012/0091910 A1 4/2012 Zhang et al.  
 2012/0093039 A1 4/2012 Rofougaran et al.  
 2012/0094658 A1 4/2012 Macias et al.  
 2012/0108230 A1 5/2012 Stepanian et al.  
 2012/0158203 A1 6/2012 Feldstein  
 2012/0235504 A1 9/2012 Kesler et al.  
 2012/0235579 A1 9/2012 Chemel et al.  
 2012/0254961 A1 10/2012 Kim et al.  
 2012/0257543 A1 10/2012 Baum et al.  
 2012/0274670 A1 11/2012 Lee et al.  
 2012/0275391 A1 11/2012 Cui et al.  
 2012/0303768 A1 11/2012 Fiennes  
 2012/0306621 A1 12/2012 Muthu  
 2012/0315848 A1 12/2012 Smith et al.  
 2012/0328302 A1 12/2012 Iizuka et al.  
 2013/0010018 A1 1/2013 Economy  
 2013/0014224 A1 1/2013 Graves et al.  
 2013/0026947 A1 1/2013 Economy et al.  
 2013/0030589 A1 1/2013 Pessina et al.  
 2013/0051375 A1 2/2013 Chemishkian et al.  
 2013/0073431 A1 3/2013 Suro et al.  
 2013/0100855 A1 4/2013 Jung et al.  
 2013/0134783 A1 5/2013 Mohammadiyan et al.  
 2013/0187563 A1 7/2013 Sasai et al.  
 2013/0211844 A1 8/2013 Sadwick  
 2013/0223279 A1 8/2013 Tinnakornsriruphap et al.  
 2013/0261821 A1\* 10/2013 Lu ..... H04L 12/2807  
 700/289  
 2013/0322281 A1 12/2013 Ludlow et al.  
 2014/0070919 A1 3/2014 Jackson et al.  
 2014/0106735 A1 4/2014 Jackson et al.  
 2014/0163751 A1 6/2014 Davis et al.  
 2015/0097666 A1 4/2015 Boyd et al.  
 2015/0259078 A1 9/2015 Filipovic et al.  
 2015/0342011 A1 11/2015 Brochu et al.

**FOREIGN PATENT DOCUMENTS**

DE 102006046489 A1 4/2008  
 DE 102009056152 A1 6/2011  
 EP 0767551 B1 8/2002  
 EP 1727399 A2 11/2006  
 EP 1693991 B1 7/2009  
 JP 2011-023819 A 2/2011  
 WO WO 1999/046921 A2 9/1999  
 WO WO 2001/052515 A1 7/2001  
 WO WO 2001/074045 A1 10/2001  
 WO WO 2002/071689 A2 9/2002  
 WO WO 2001/052515 A9 10/2002  
 WO WO 2002/071689 A3 11/2002  
 WO WO 2003/007665 A1 1/2003  
 WO WO 2004/023849 A1 3/2004  
 WO 2004/056157 A1 7/2004  
 WO 2006/133172 A2 12/2006  
 WO WO 2007/069129 A2 6/2007  
 WO WO 2008/040454 A2 4/2008  
 WO WO 2008/092082 A2 7/2008  
 WO WO 2008/095250 A1 8/2008  
 WO WO 2009/010916 A2 1/2009  
 WO 2010/027412 A1 3/2010  
 WO WO 2010/143130 A1 12/2010

**OTHER PUBLICATIONS**

“Creston NFC Demo at CEDIA Expo 2012”, Available at <http://www.youtube.com/watch?v=FQ1f5vxwgnl>, Retrieved on Aug. 13, 2013, Transcript of Video provided on CD Media, Sep. 10, 2012, pp. 1-2.  
 “SimpleLink™ CC3000 Boosterpack Jump-Starts the Internet of Things”, Available at <http://www.youtube.com/watch?v=6kh0gKMIQc>, retrieved on Aug. 13, 2013, Transcript of Video provided on CD Media, Jun. 6, 2013, 1 page.  
 Black, Rich, “Clear Connect RF Technology”, Lutron Electronics Company, Inc., Aug. 2009, 16 pages.

(56)

**References Cited**

## OTHER PUBLICATIONS

Gade, Lisa "PalmOne Treo 600 Palm OS Smartphone from Sprint PCS", Oct. 28, 2013, Mobile Tech Review, Document Available at: <[http://www.mobiletechreview.com/treo\\_600.htm](http://www.mobiletechreview.com/treo_600.htm)>, Retrieved on May 21, 2013, 4 Pages.

Gade, Lisa "PalmOne Treo 650 Palm OS Smartphone: CDMA (Sprint) and GSM Versions", Dec. 10, 2004, Mobile Tech Review, Document Available at: <[http://web.archive.org/web/20050404004524/http://www.mobiletechreview.com/Treo\\_650.htm](http://web.archive.org/web/20050404004524/http://www.mobiletechreview.com/Treo_650.htm)>, Retrieved on May 21, 2013, 6 Pages.

JSJSDesigns PLC, "JS JS Products", Available at: <<http://web.archive.org/web/20101111085355/http://www.jsjsdesigns.com/product.html>>, Nov. 11, 2010, 4 pages.

Myers, Dana, "SimpleLink™ Wi-Fi® CC3000-First Time Config Using PC", Available at <http://www.youtube.com/watch?v=10U4NTgkJs>, retrieved on Aug. 13, 2013, Transcript of Video provided on CD Media, Dec. 18, 2012, pp. 1-2.


Myers, Dana, "SimpleLink™ Wi-Fi® CC3000-First Time Config with Smartphone", Available at <http://www.youtube.com/watch?v=fxP9hnZysgo>, Retrieved on Aug. 13, 2013, Transcript of Video provided on CD Media, Sep. 19, 2012, pp. 1-2.

Rustybrick, Inc., "iPhone 4 Morse Code Transmission App", Available at <<http://www.rustybrick.com/iphone-morse-code.php>>, Jan. 4, 2011, 3 pages.

Texas Instruments, "CC3000 Smart Config", Available at [http://processors.wiki.ti.com/index.php/CC3000\\_Smart\\_Config](http://processors.wiki.ti.com/index.php/CC3000_Smart_Config), retrieved in Feb. 2, 2016, pp. 1-5.

\* cited by examiner



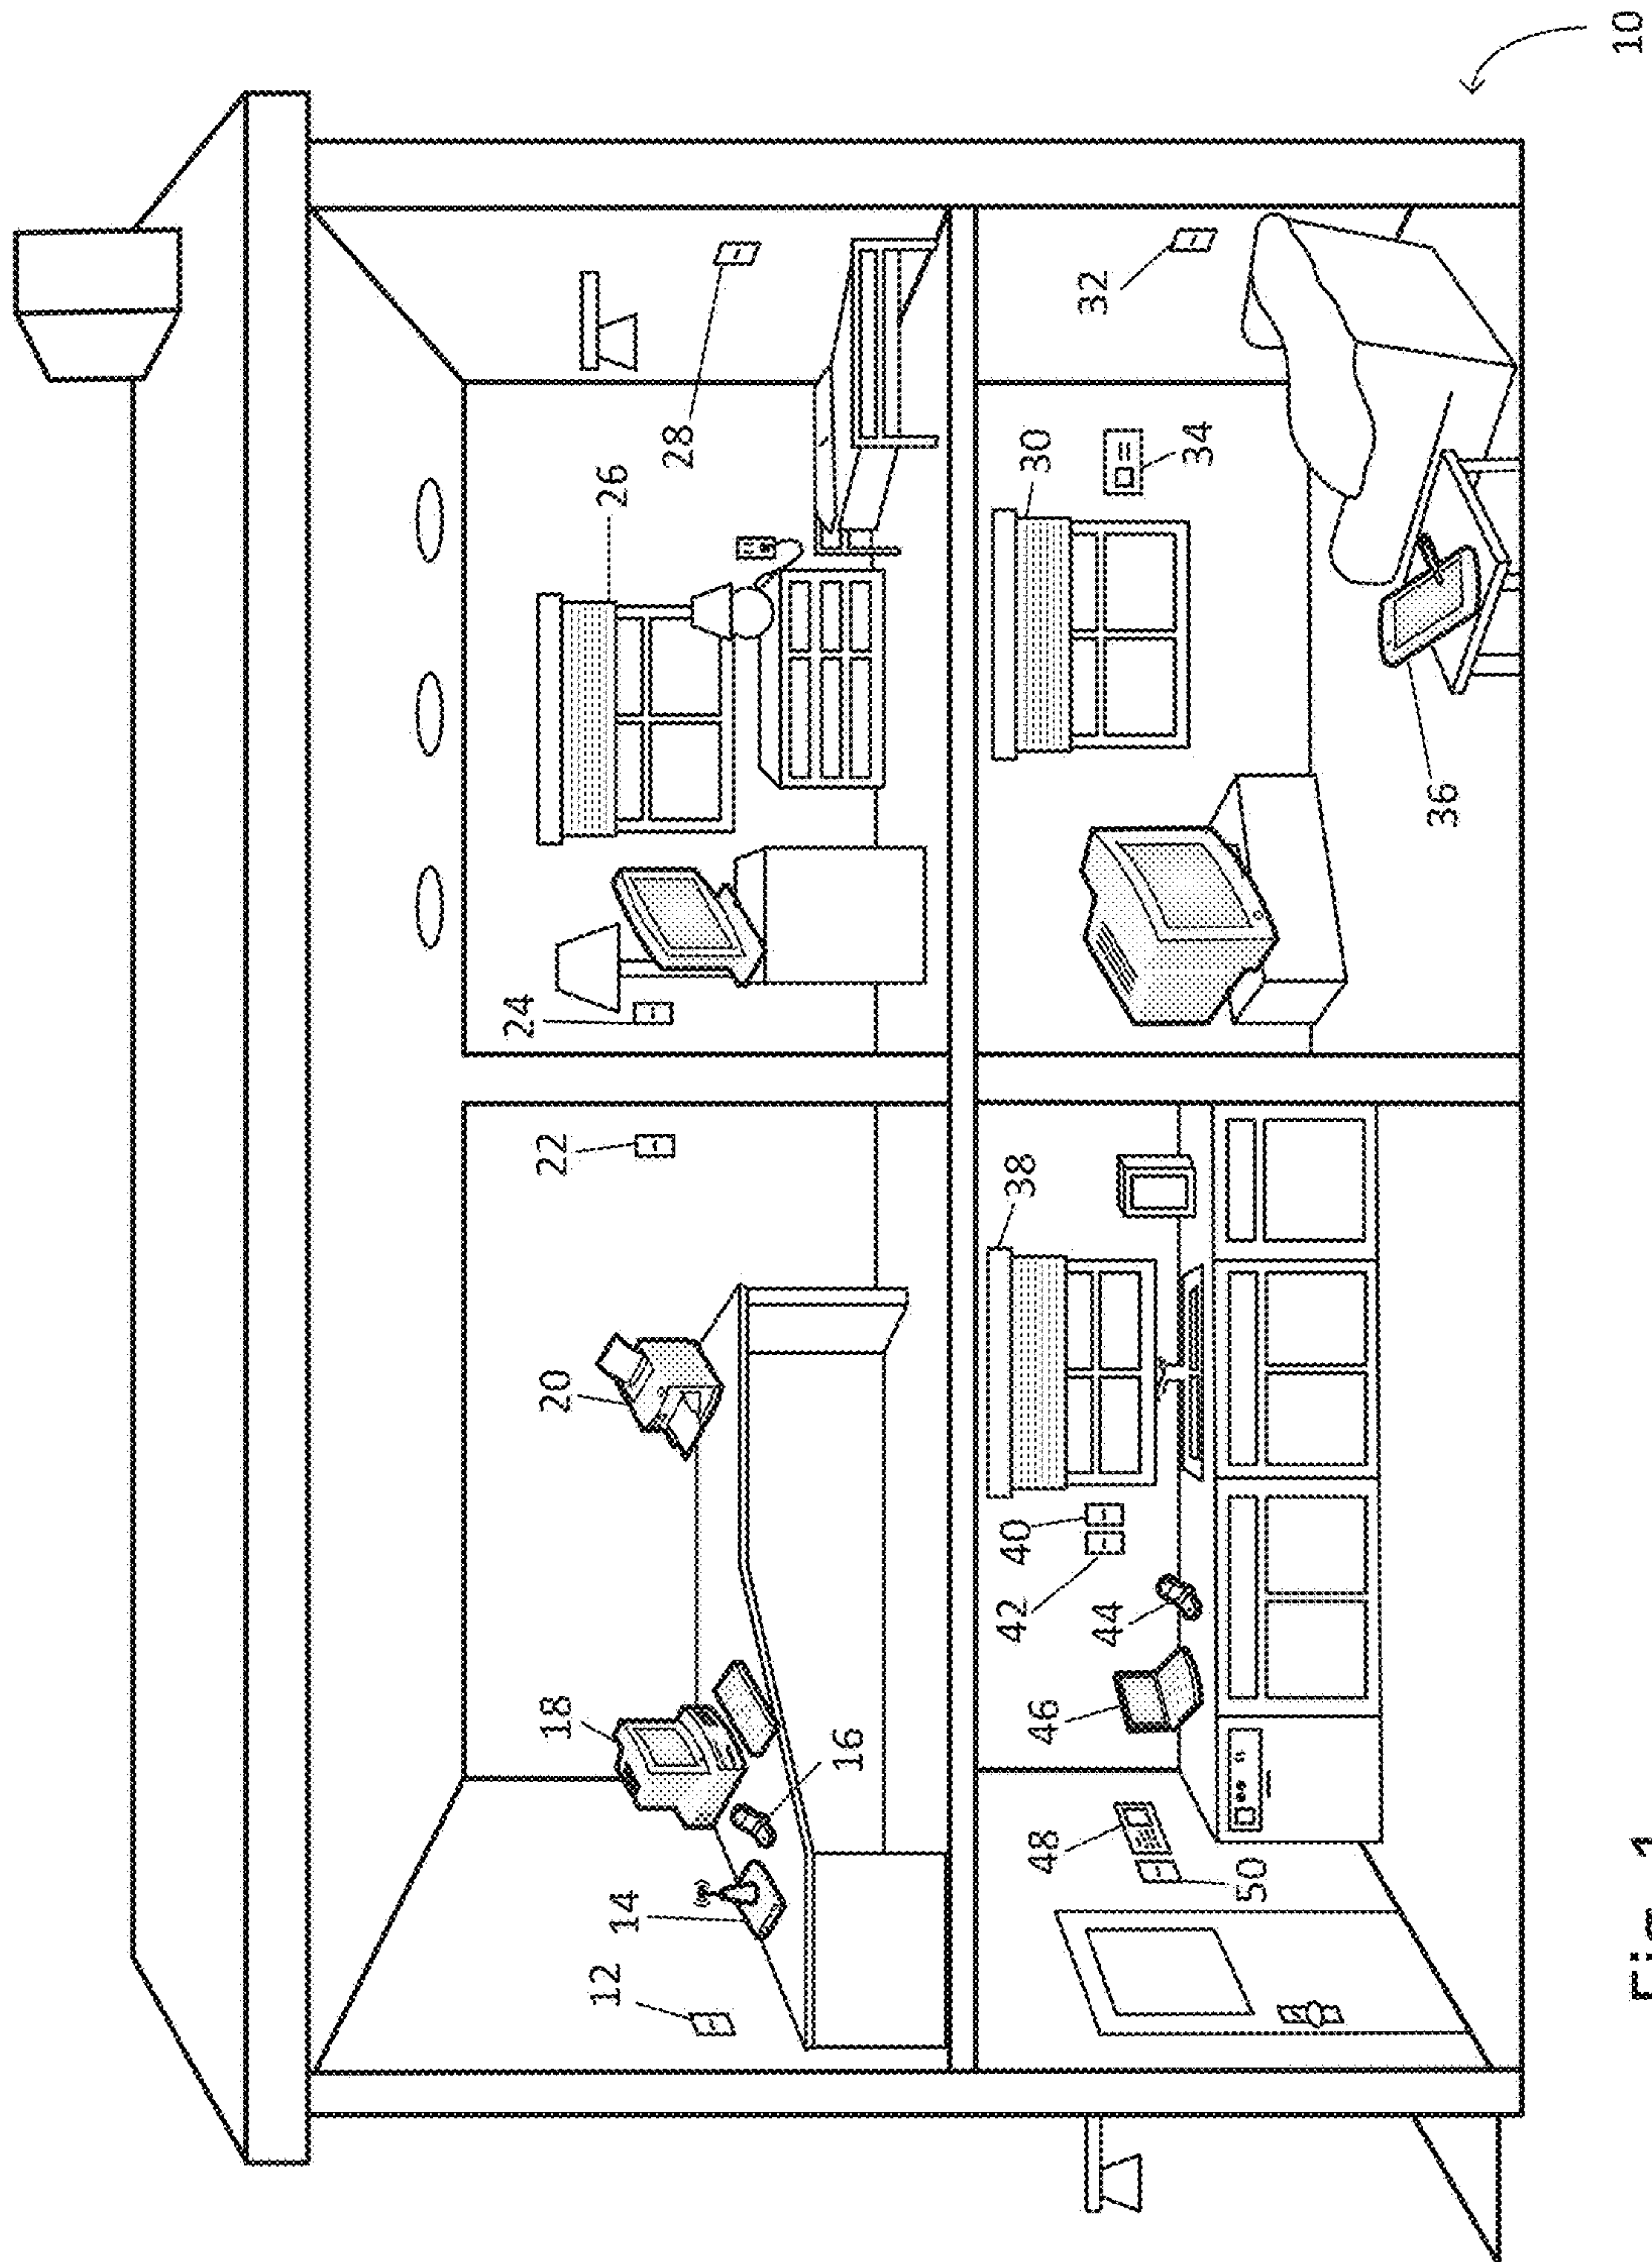

١٠٠

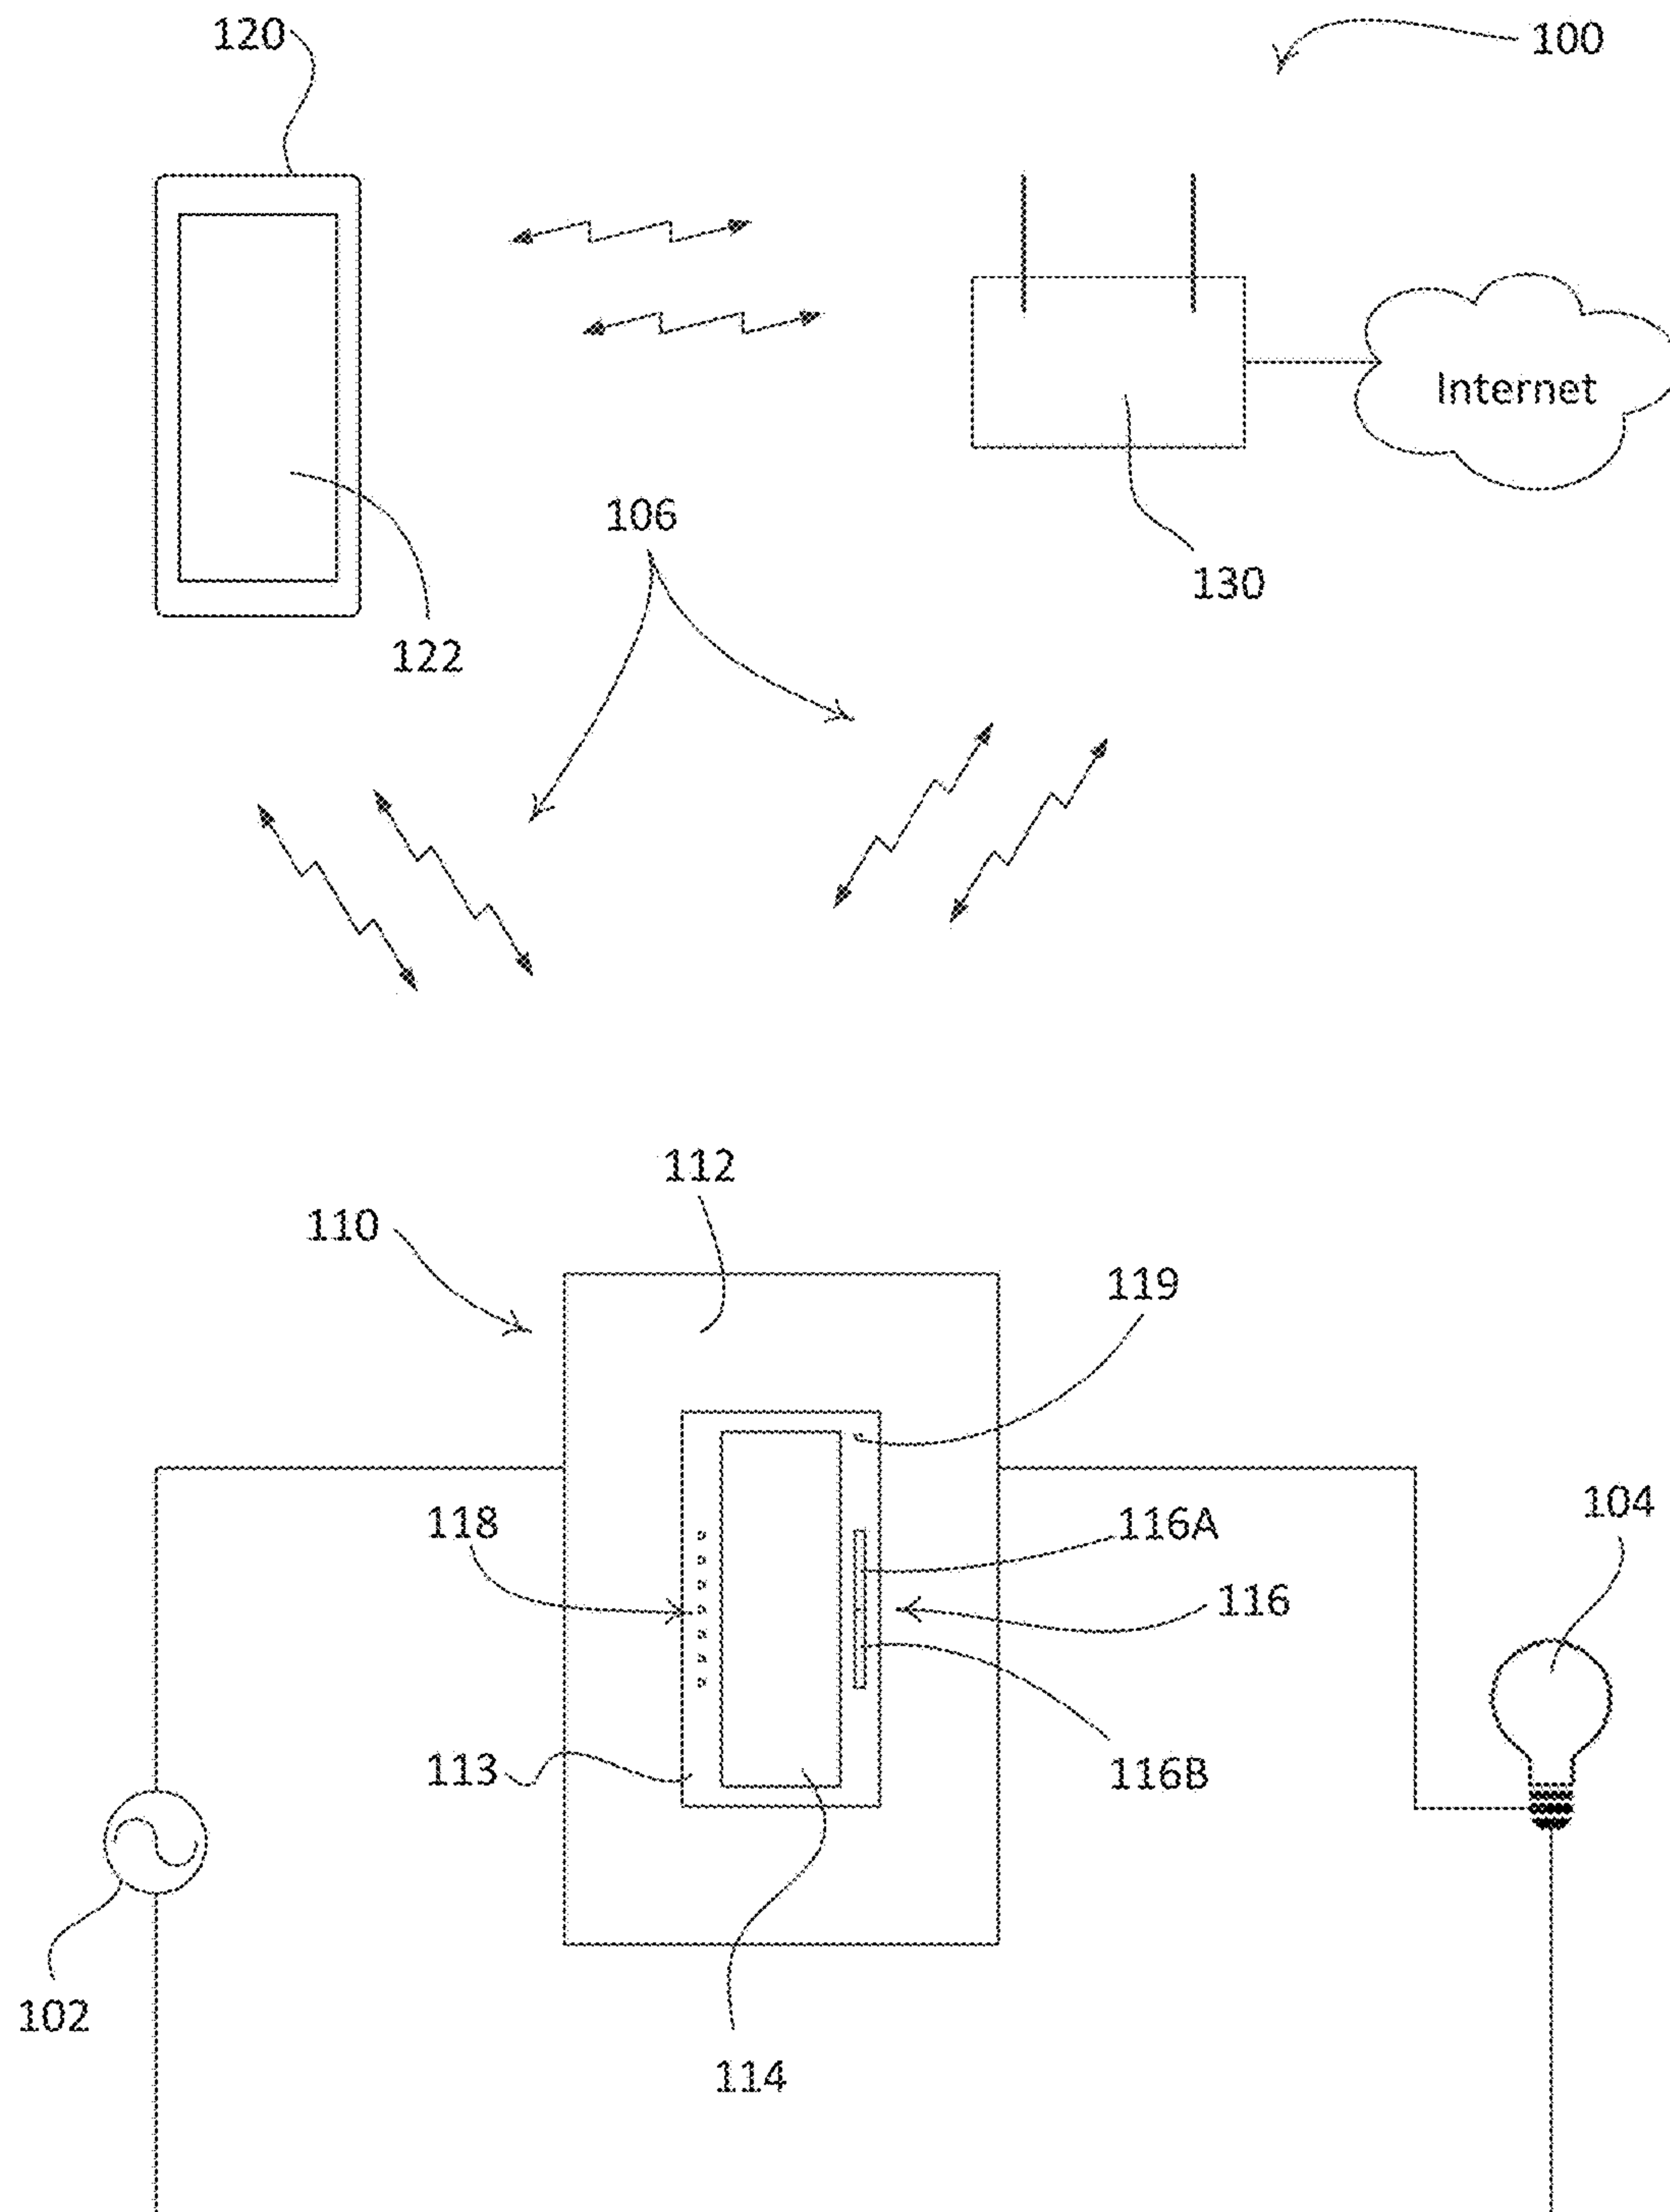


Fig 2

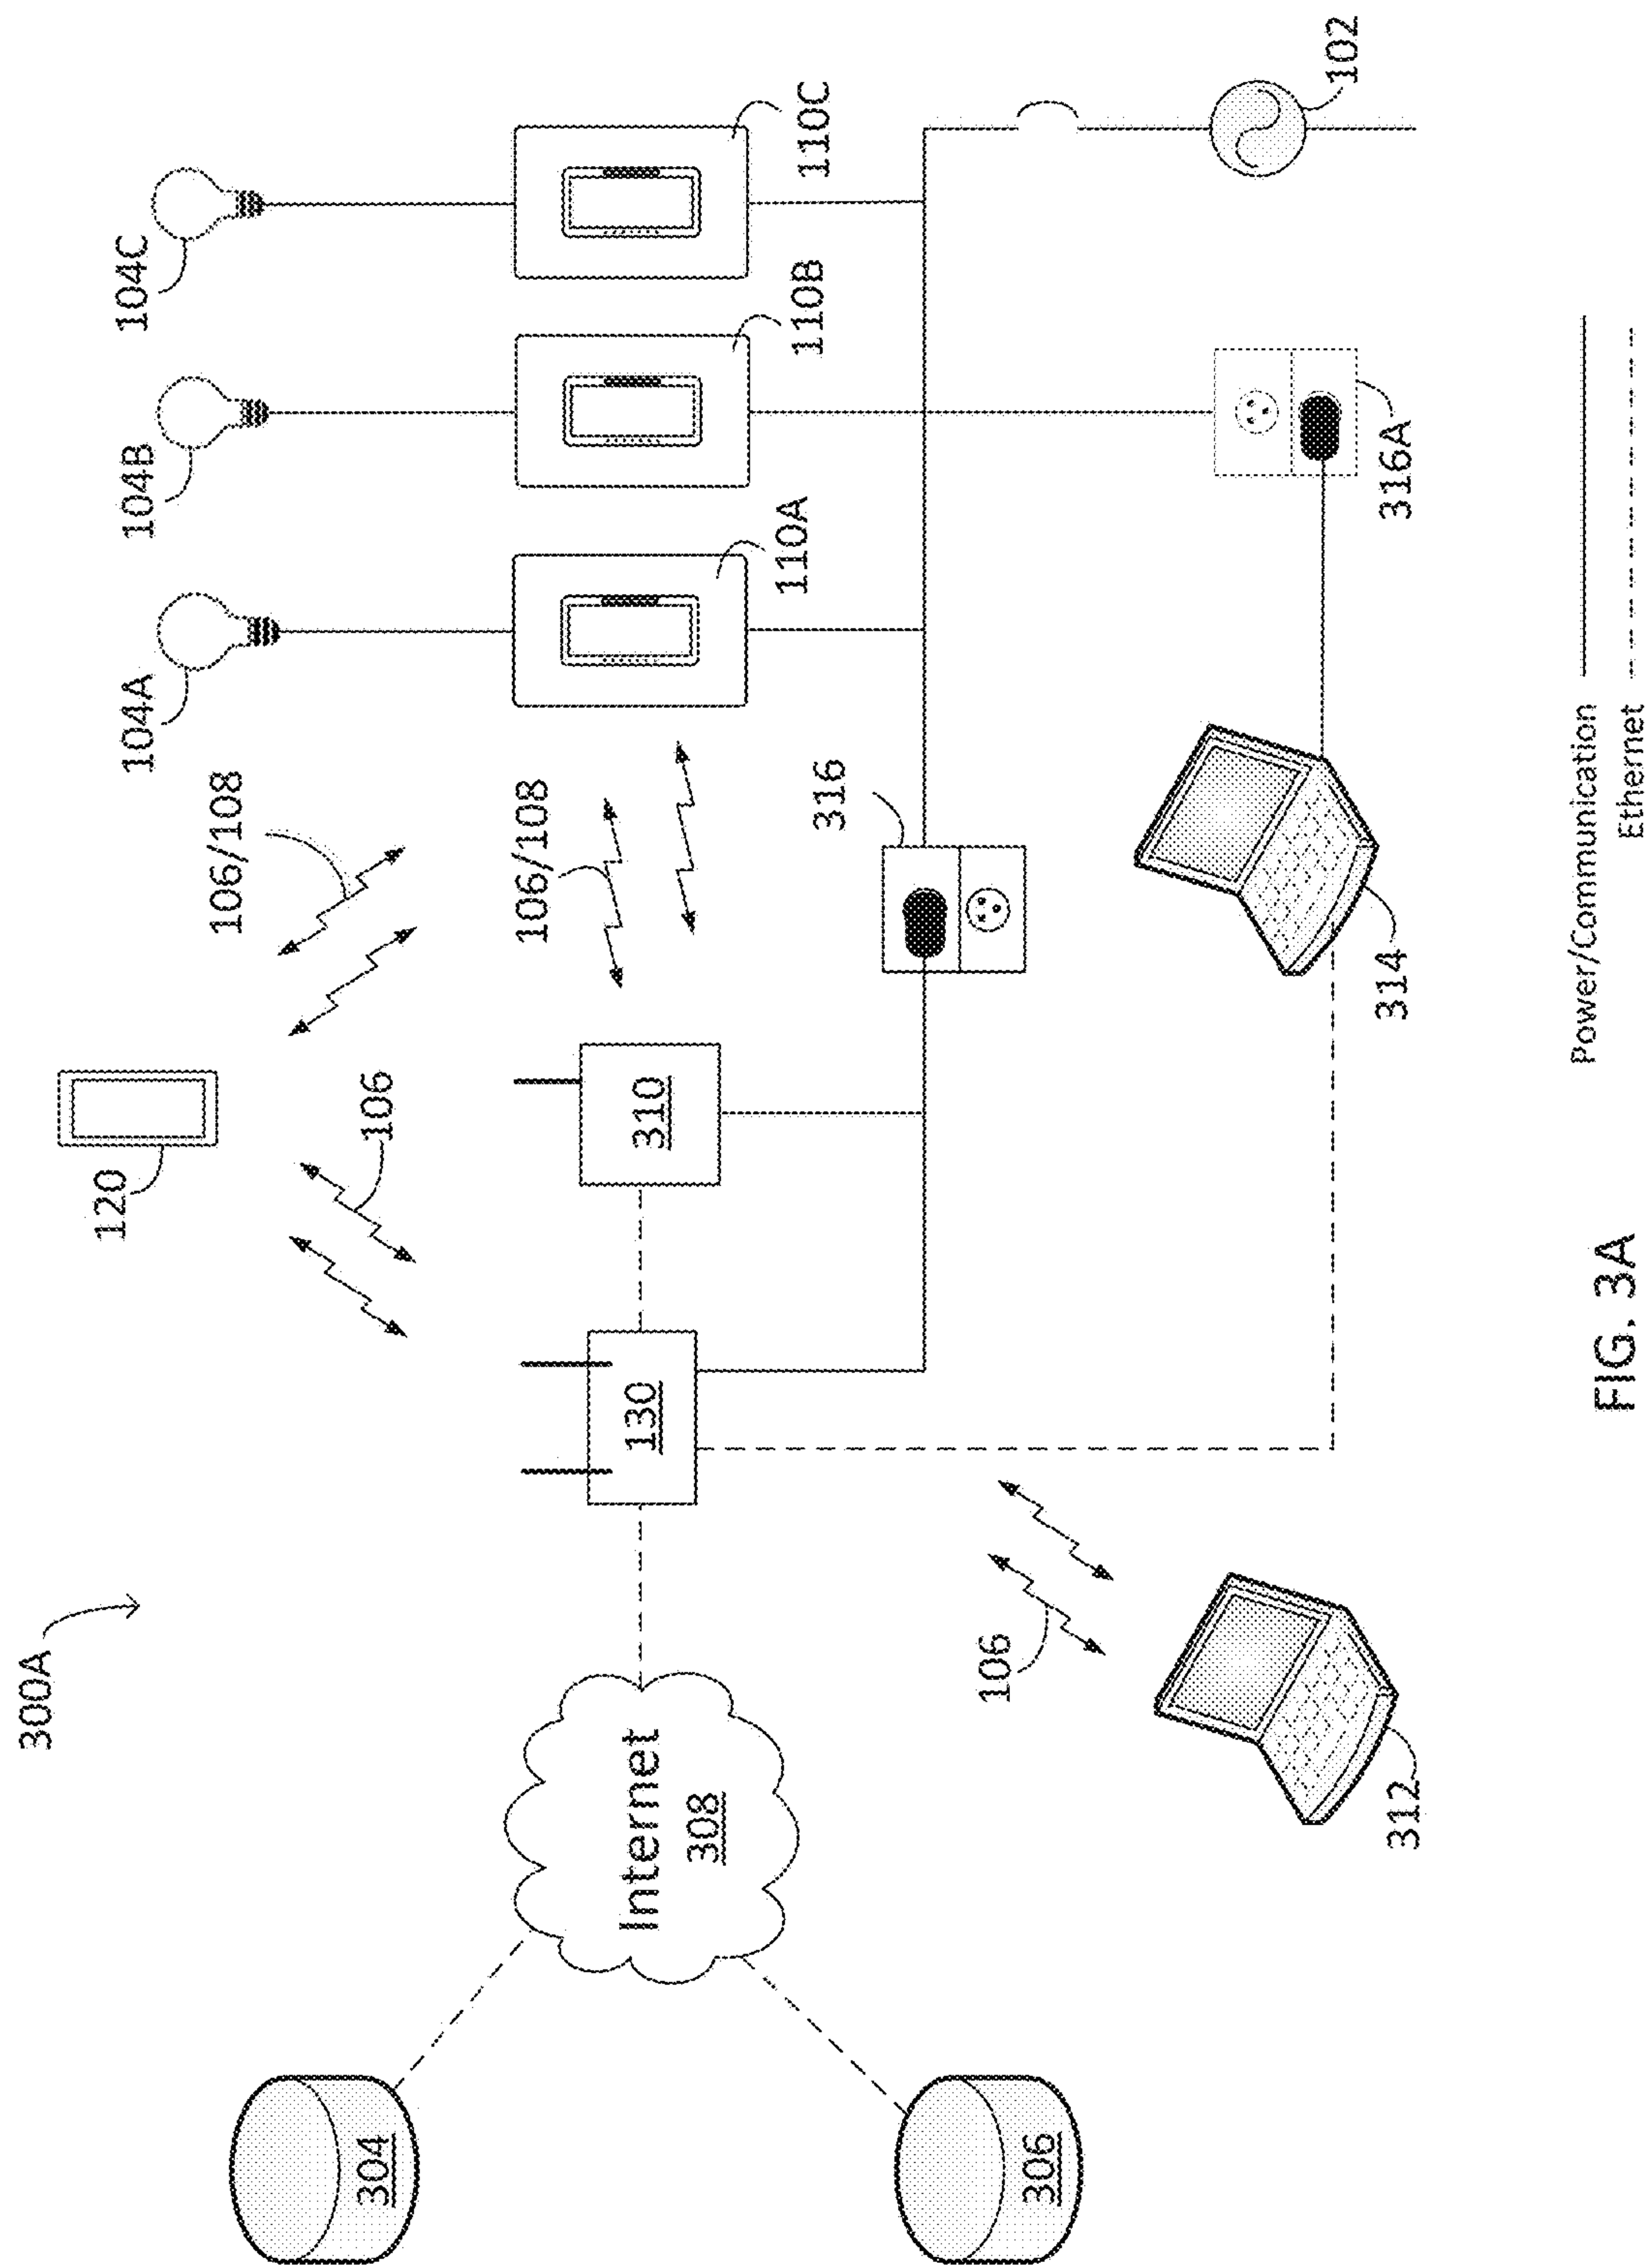
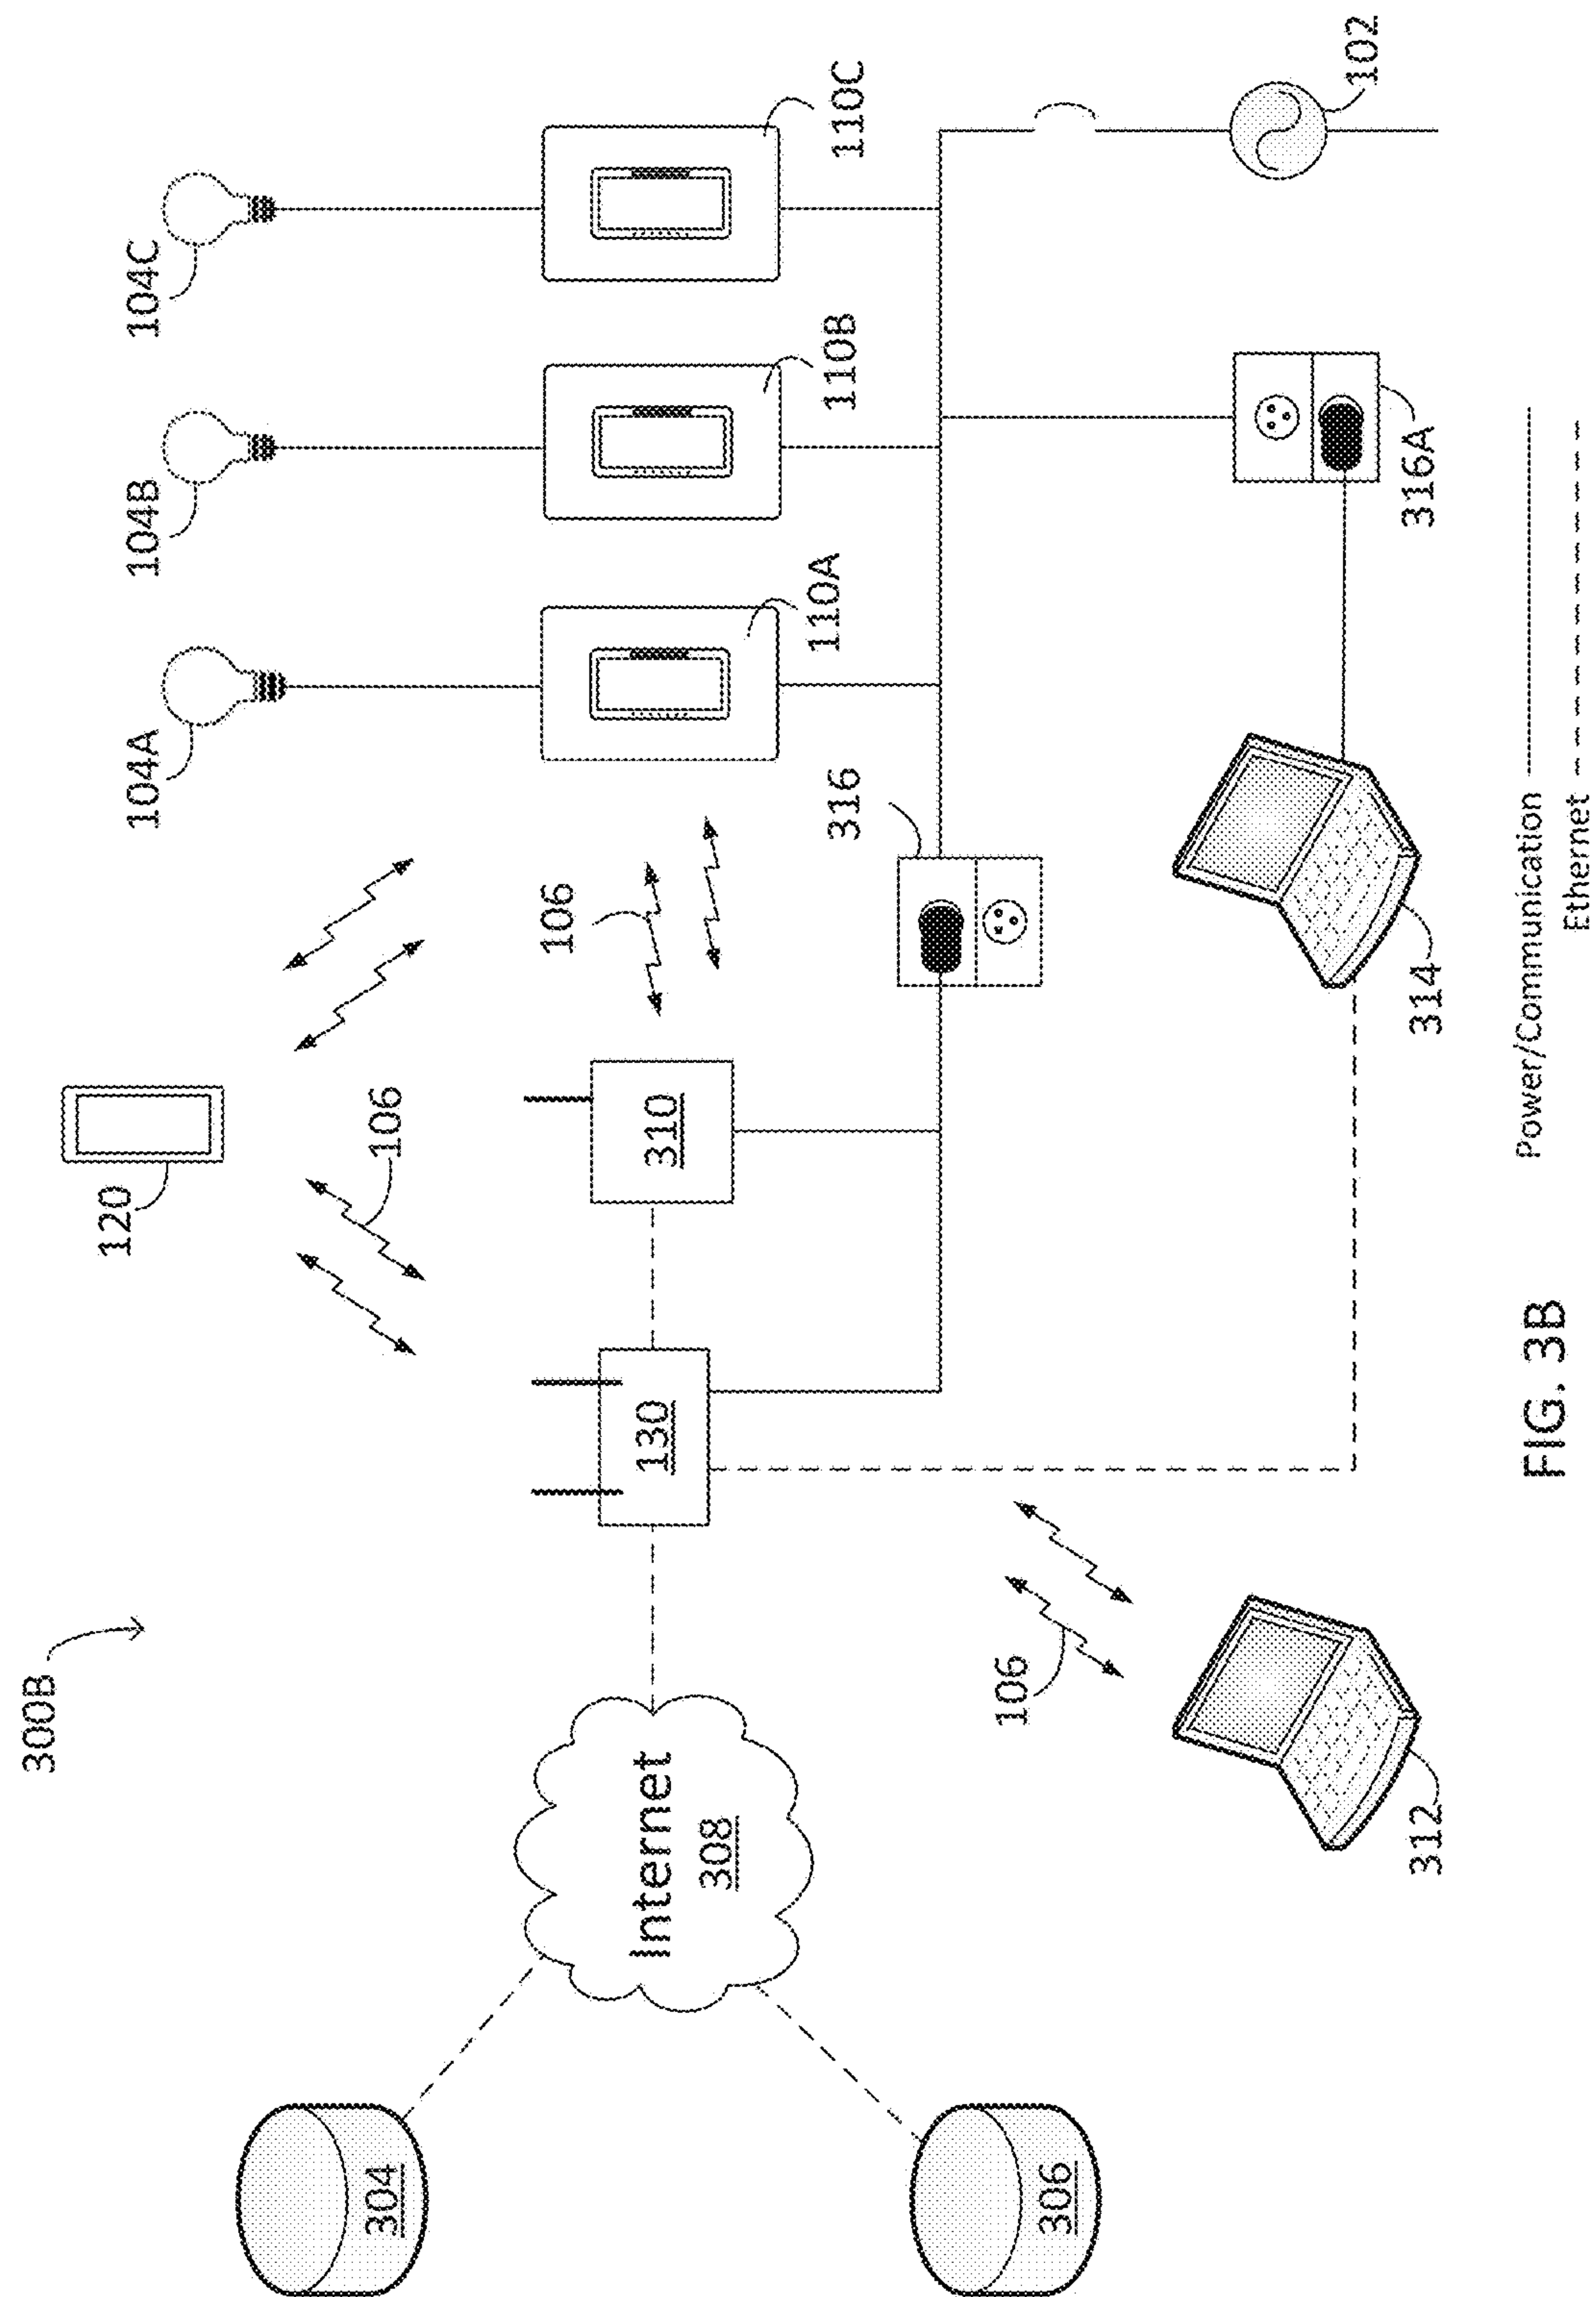
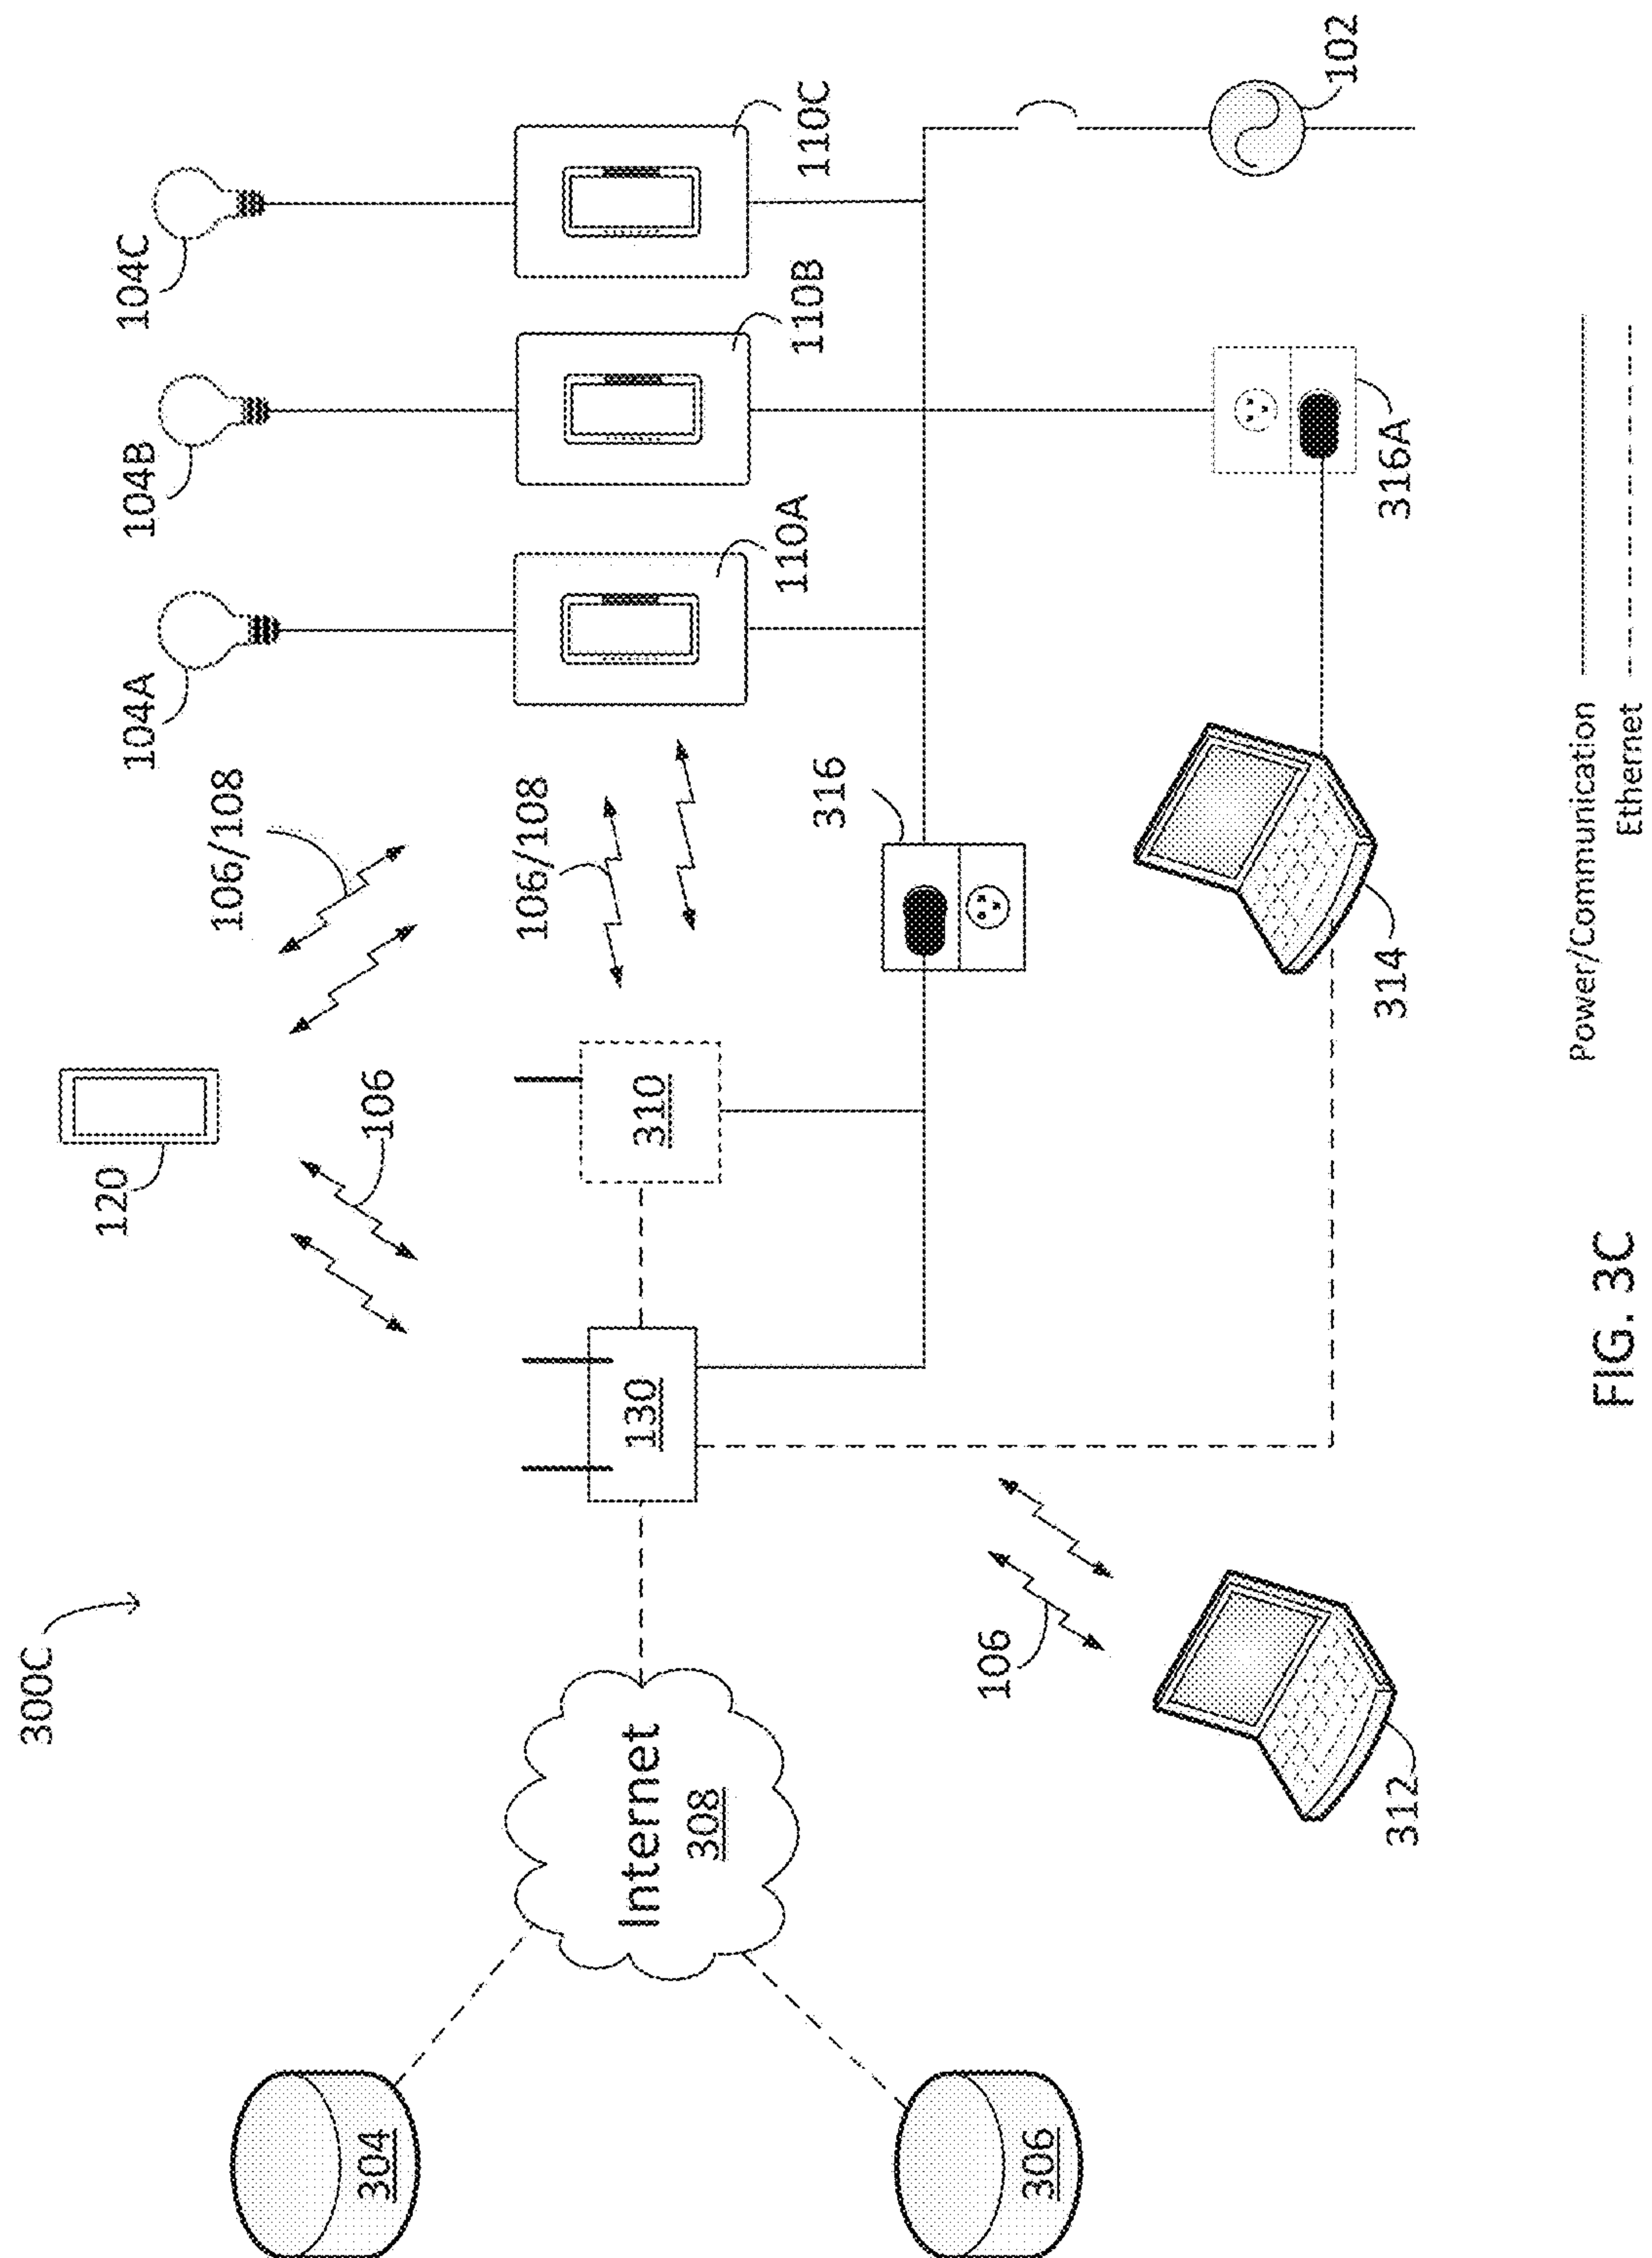


FIG. 3A







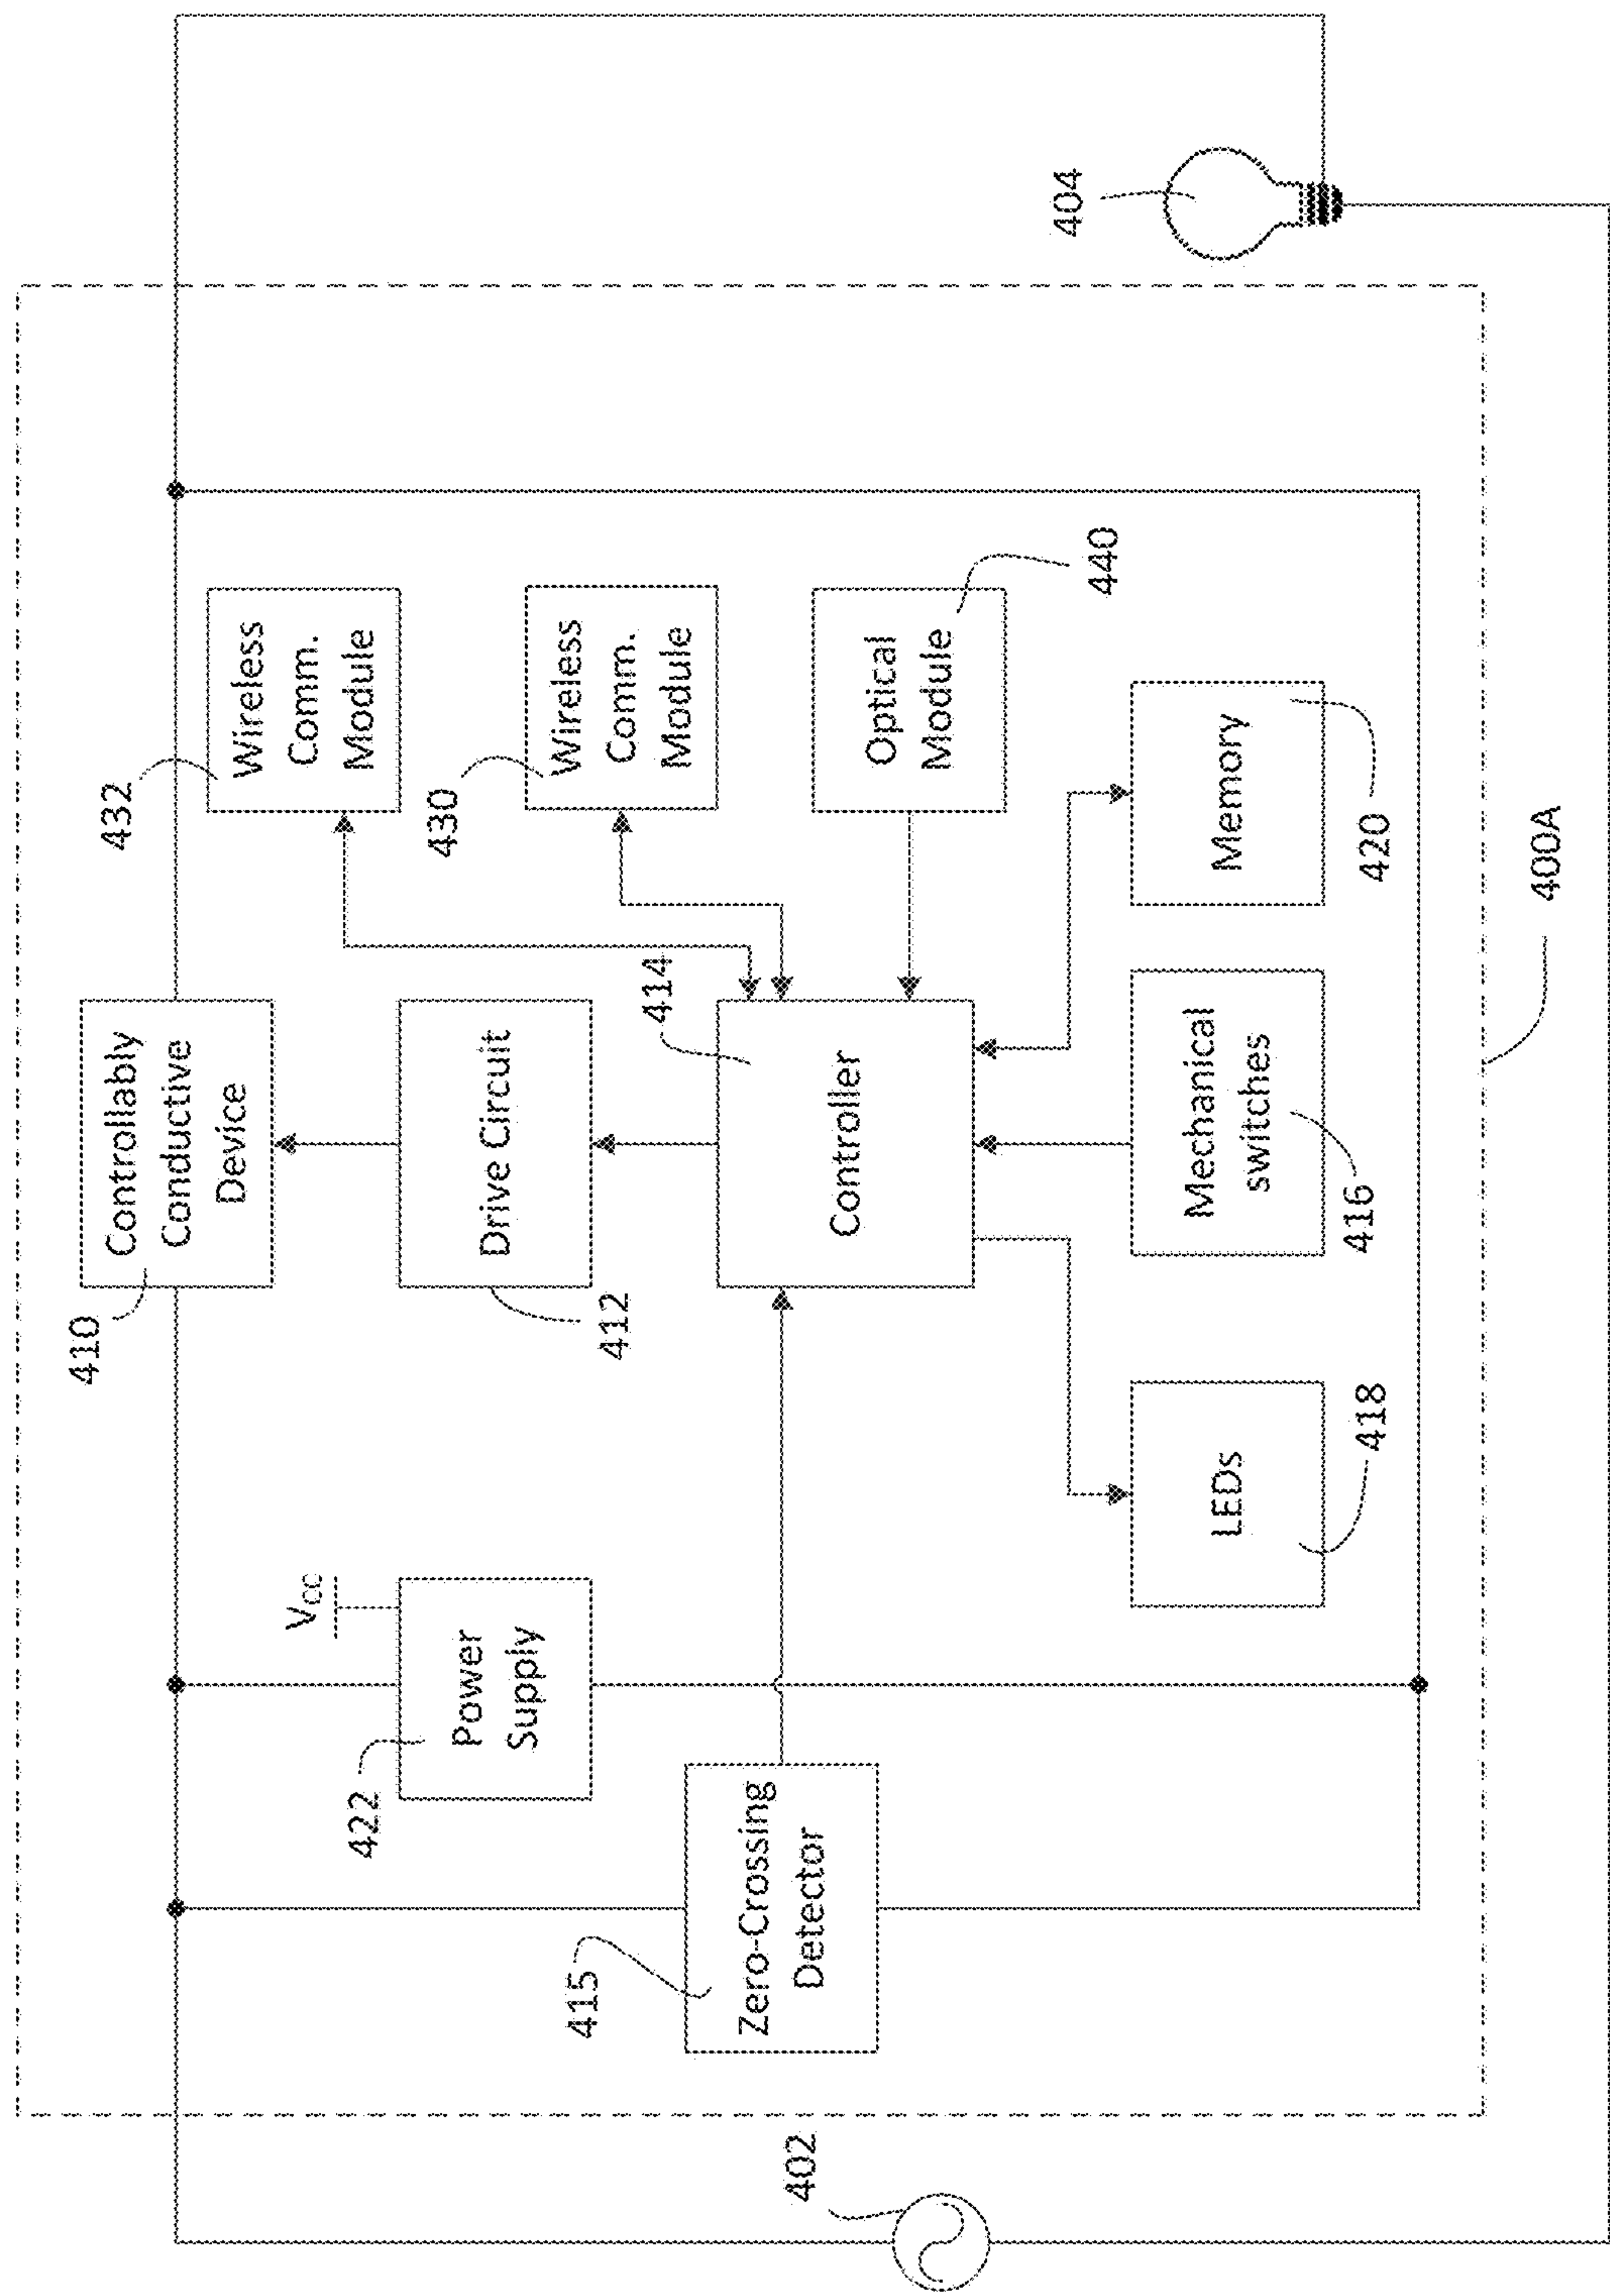


FIG. 4A



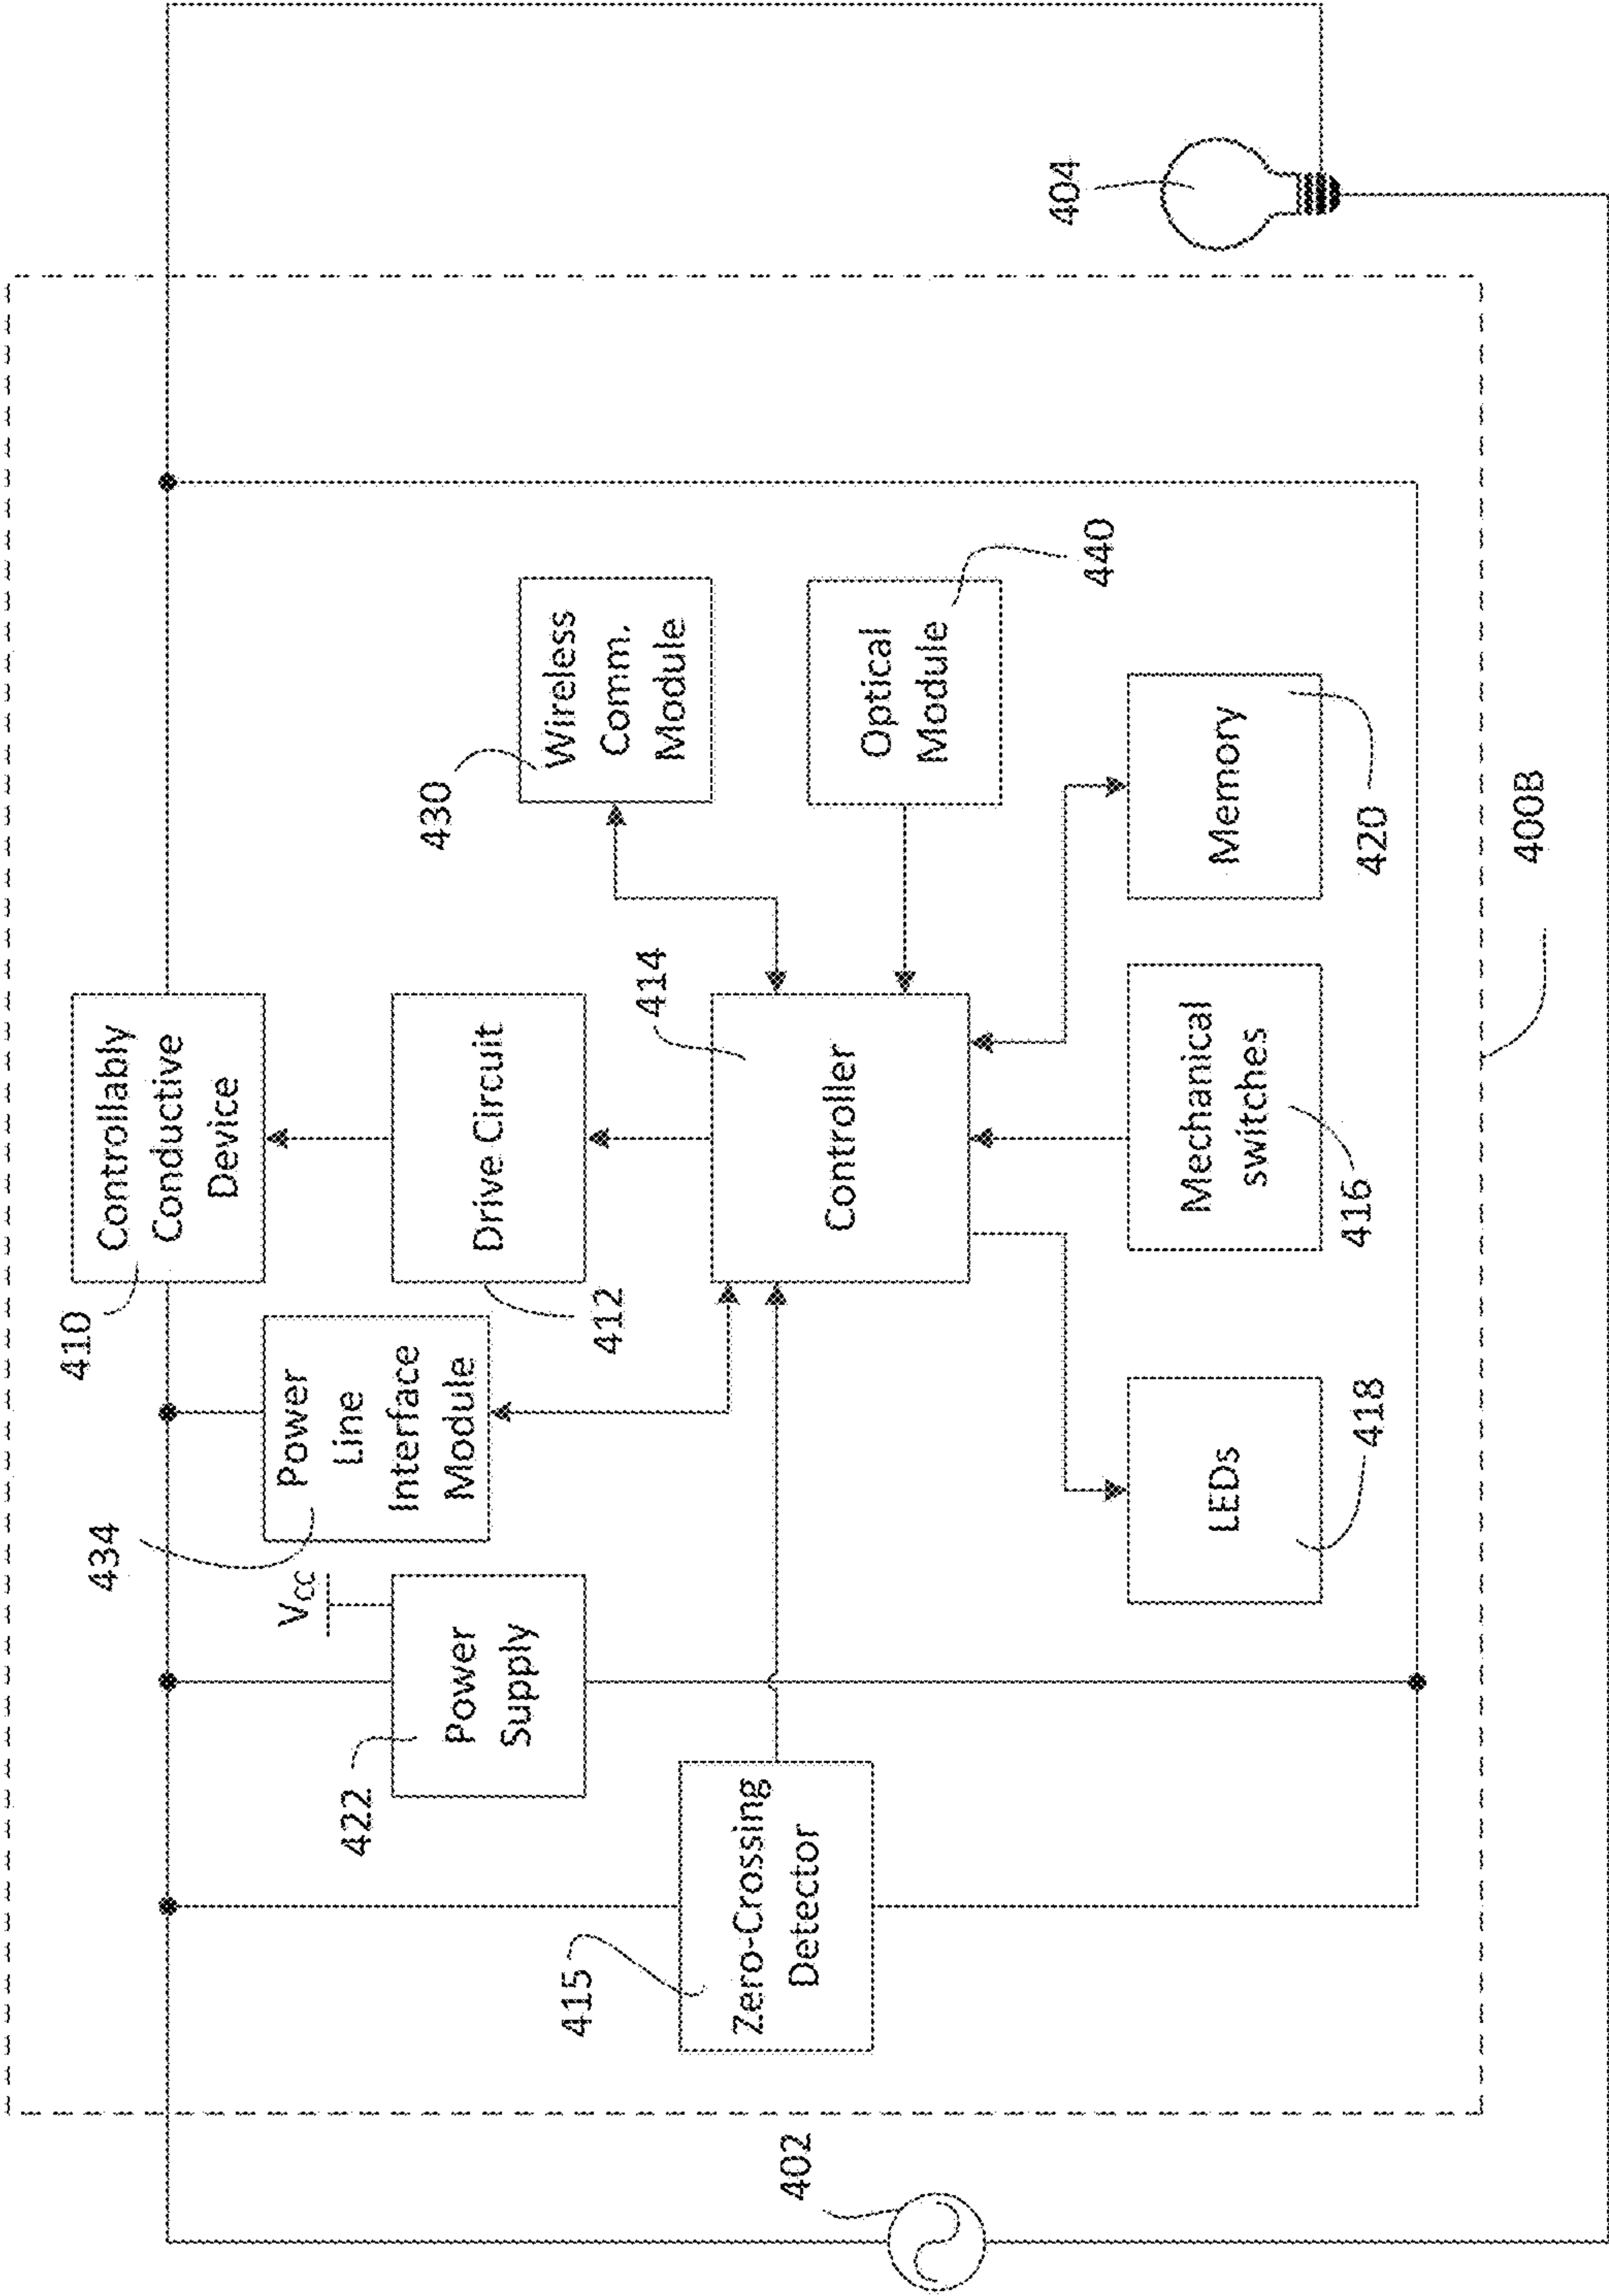


FIG. 4B

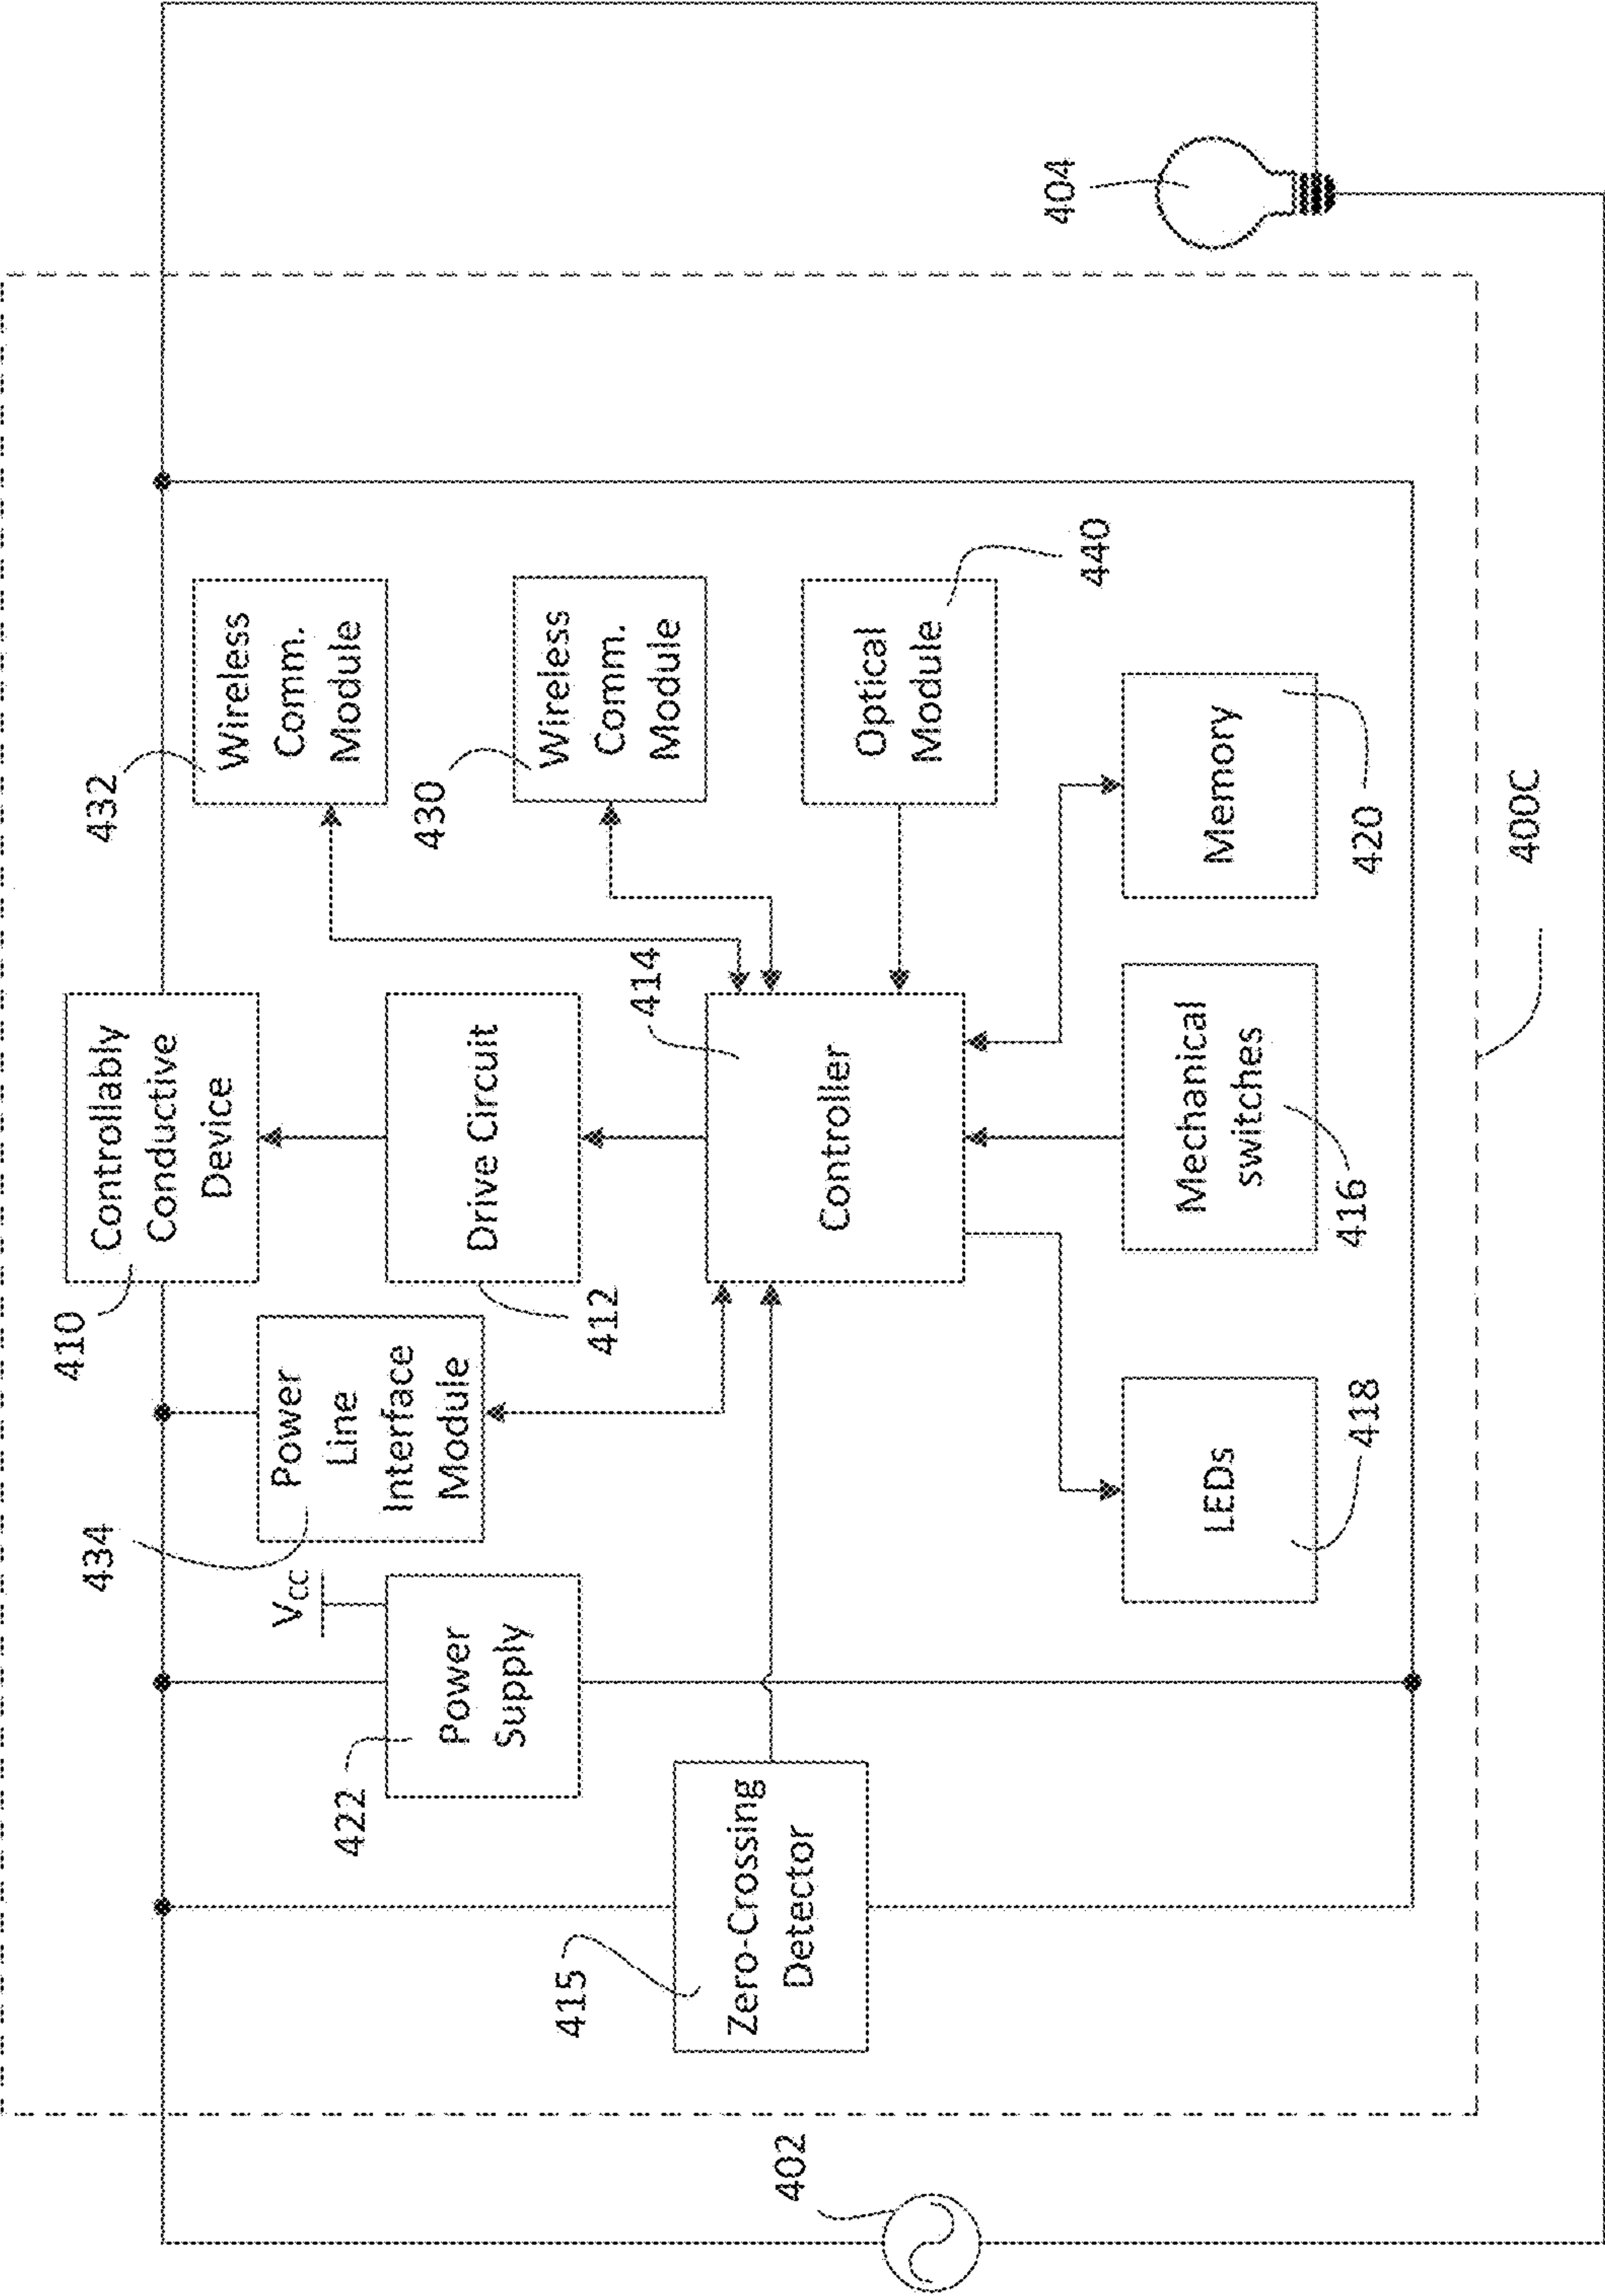


FIG. 4C



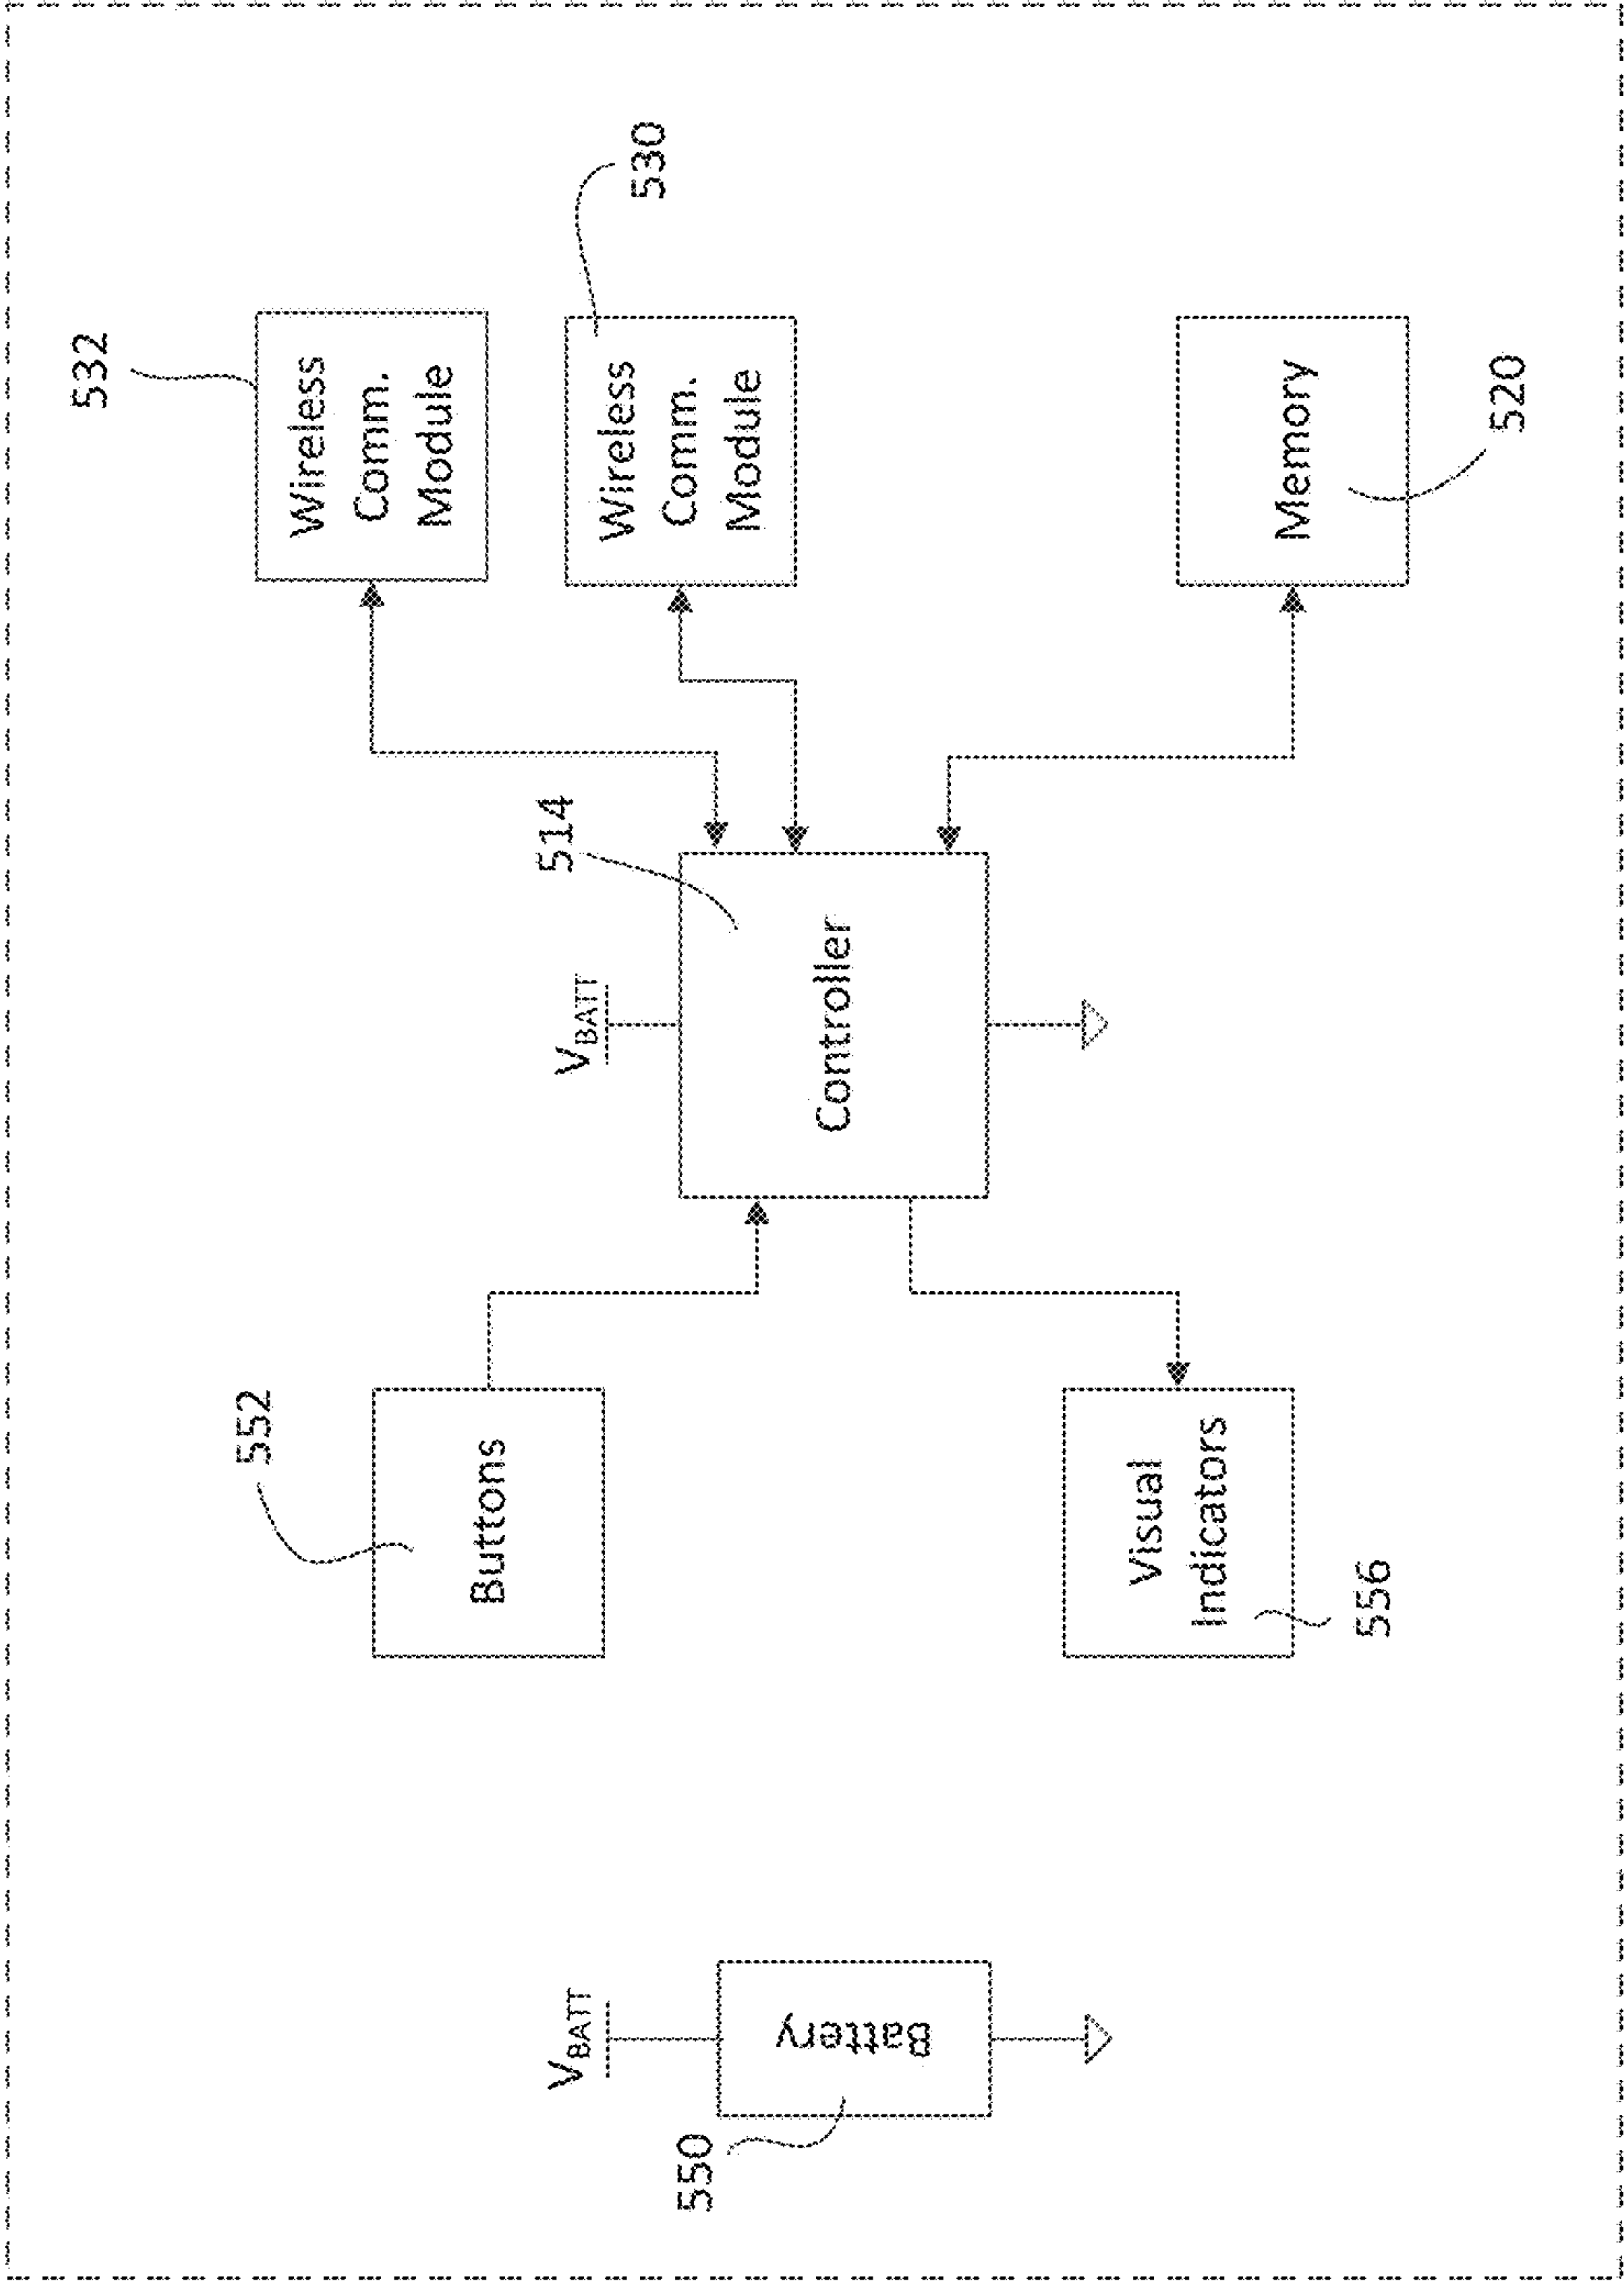


FIG. 5A

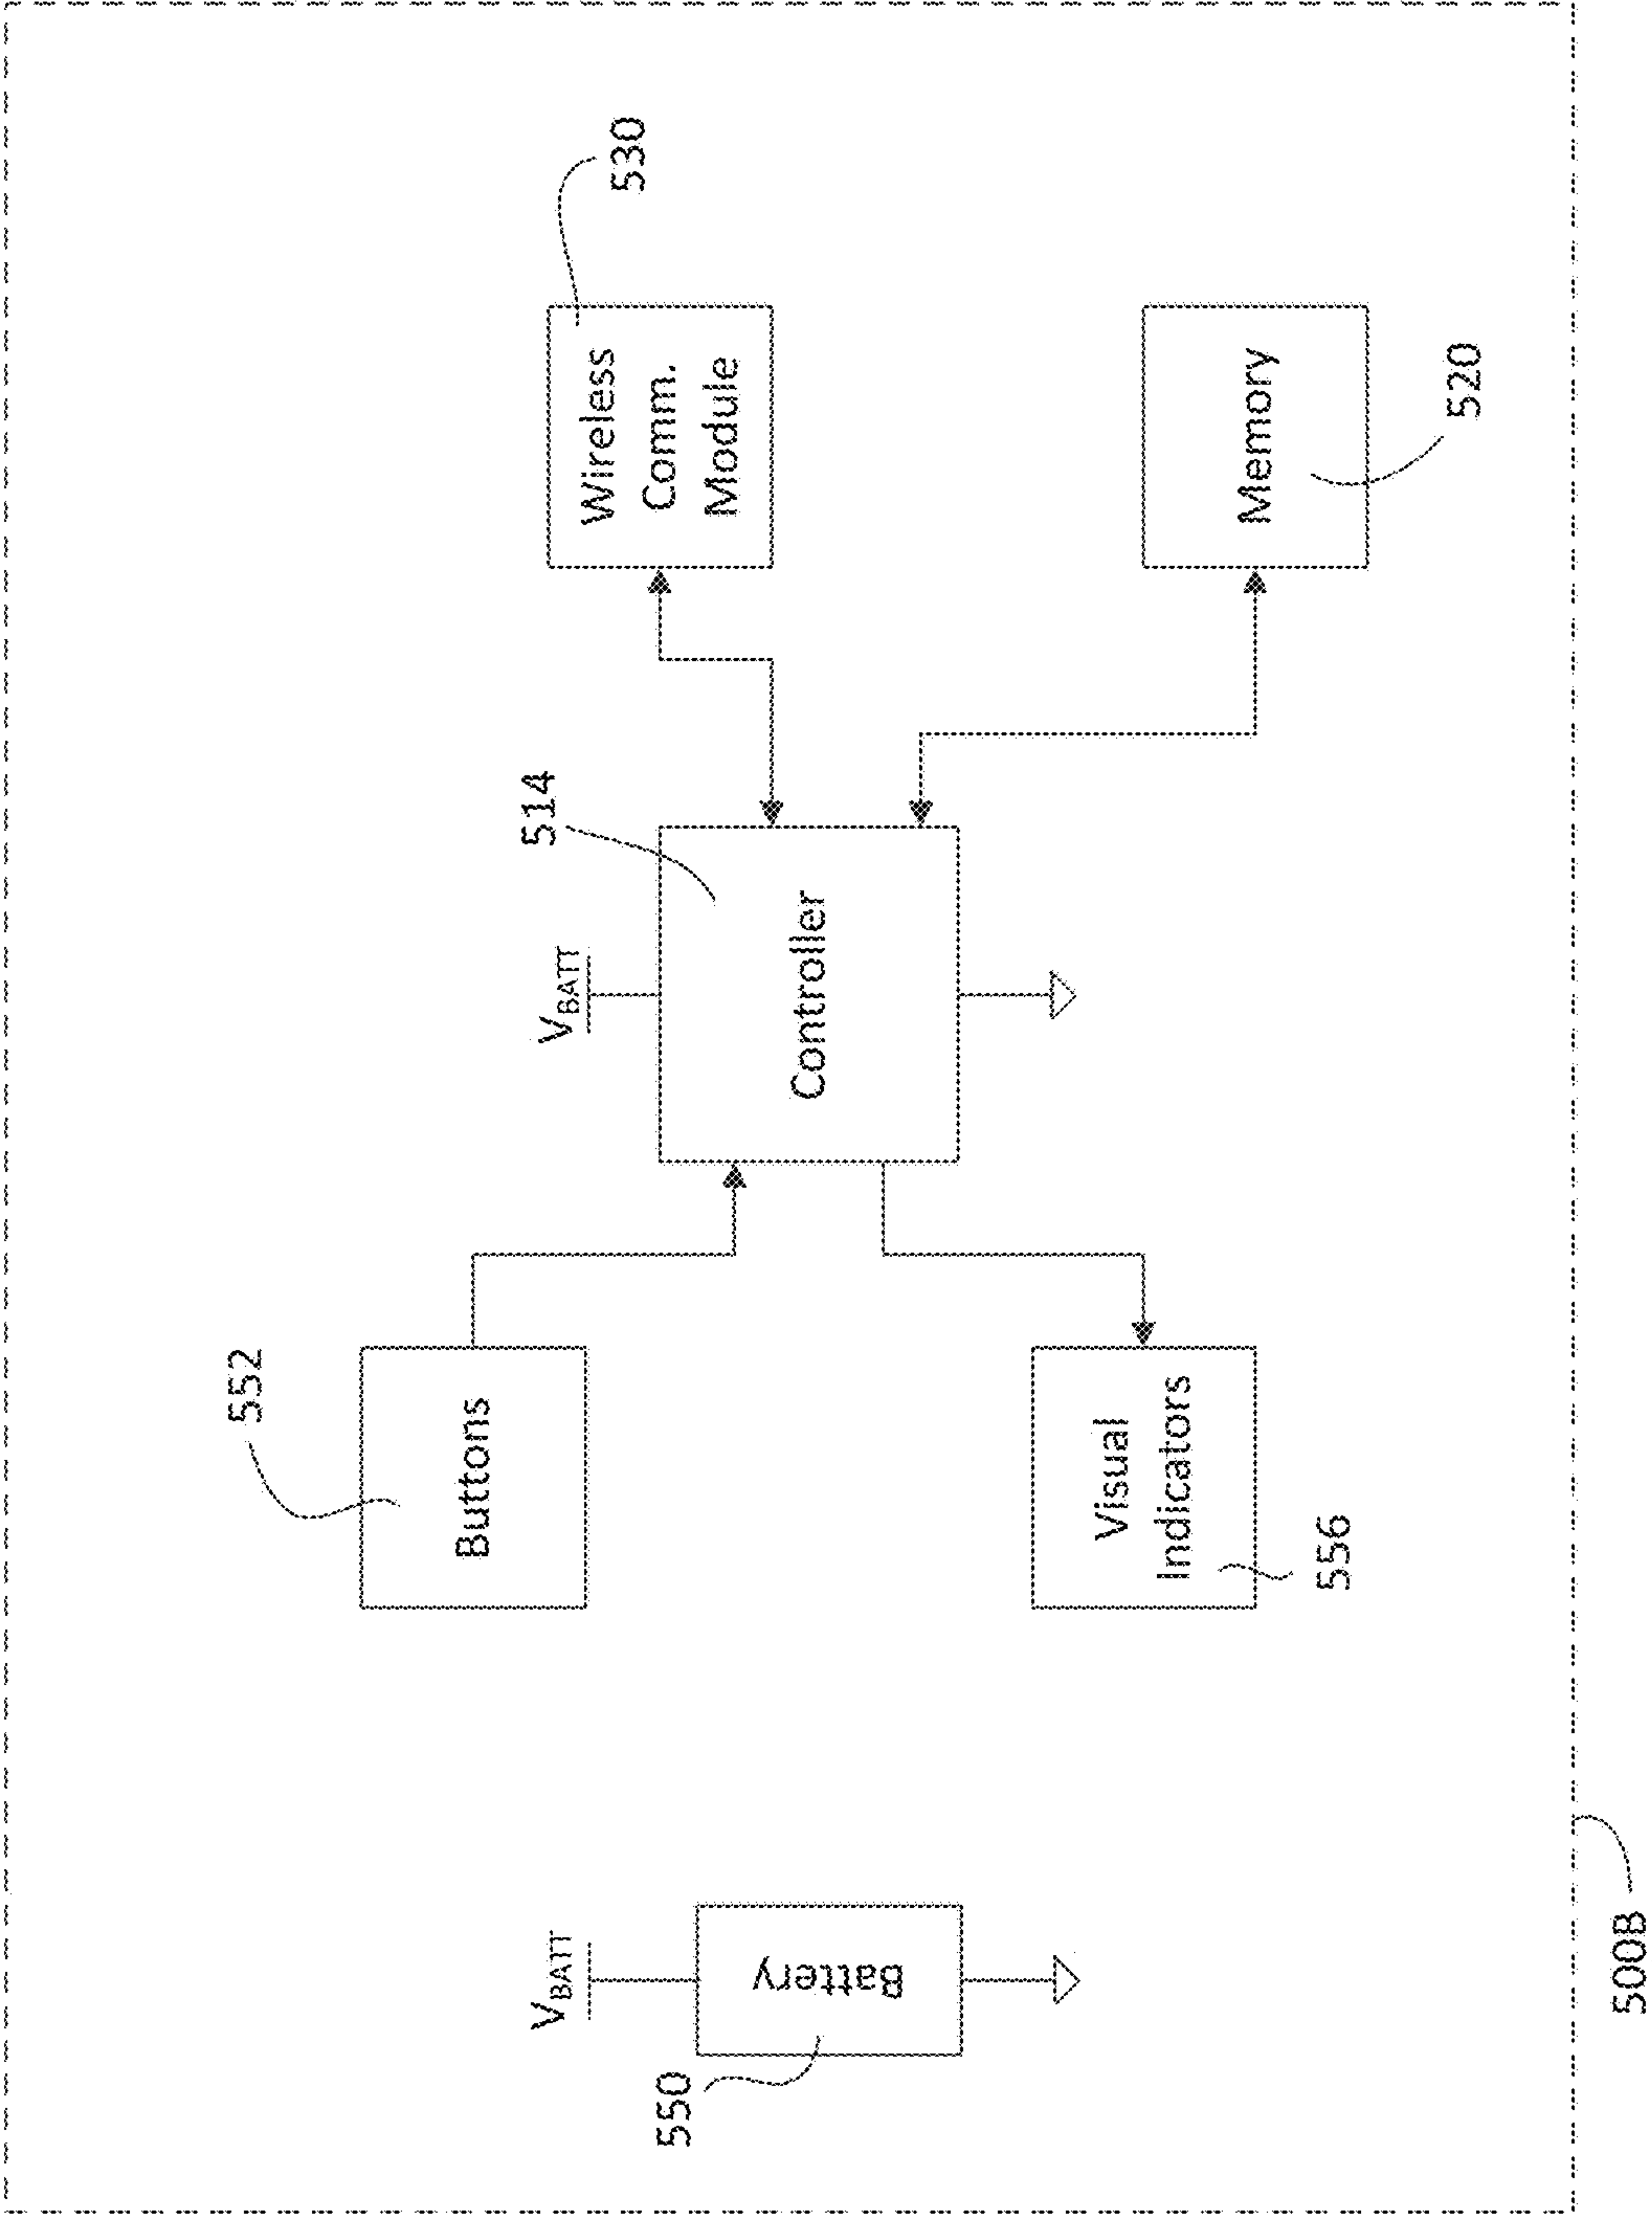


FIG. 5B



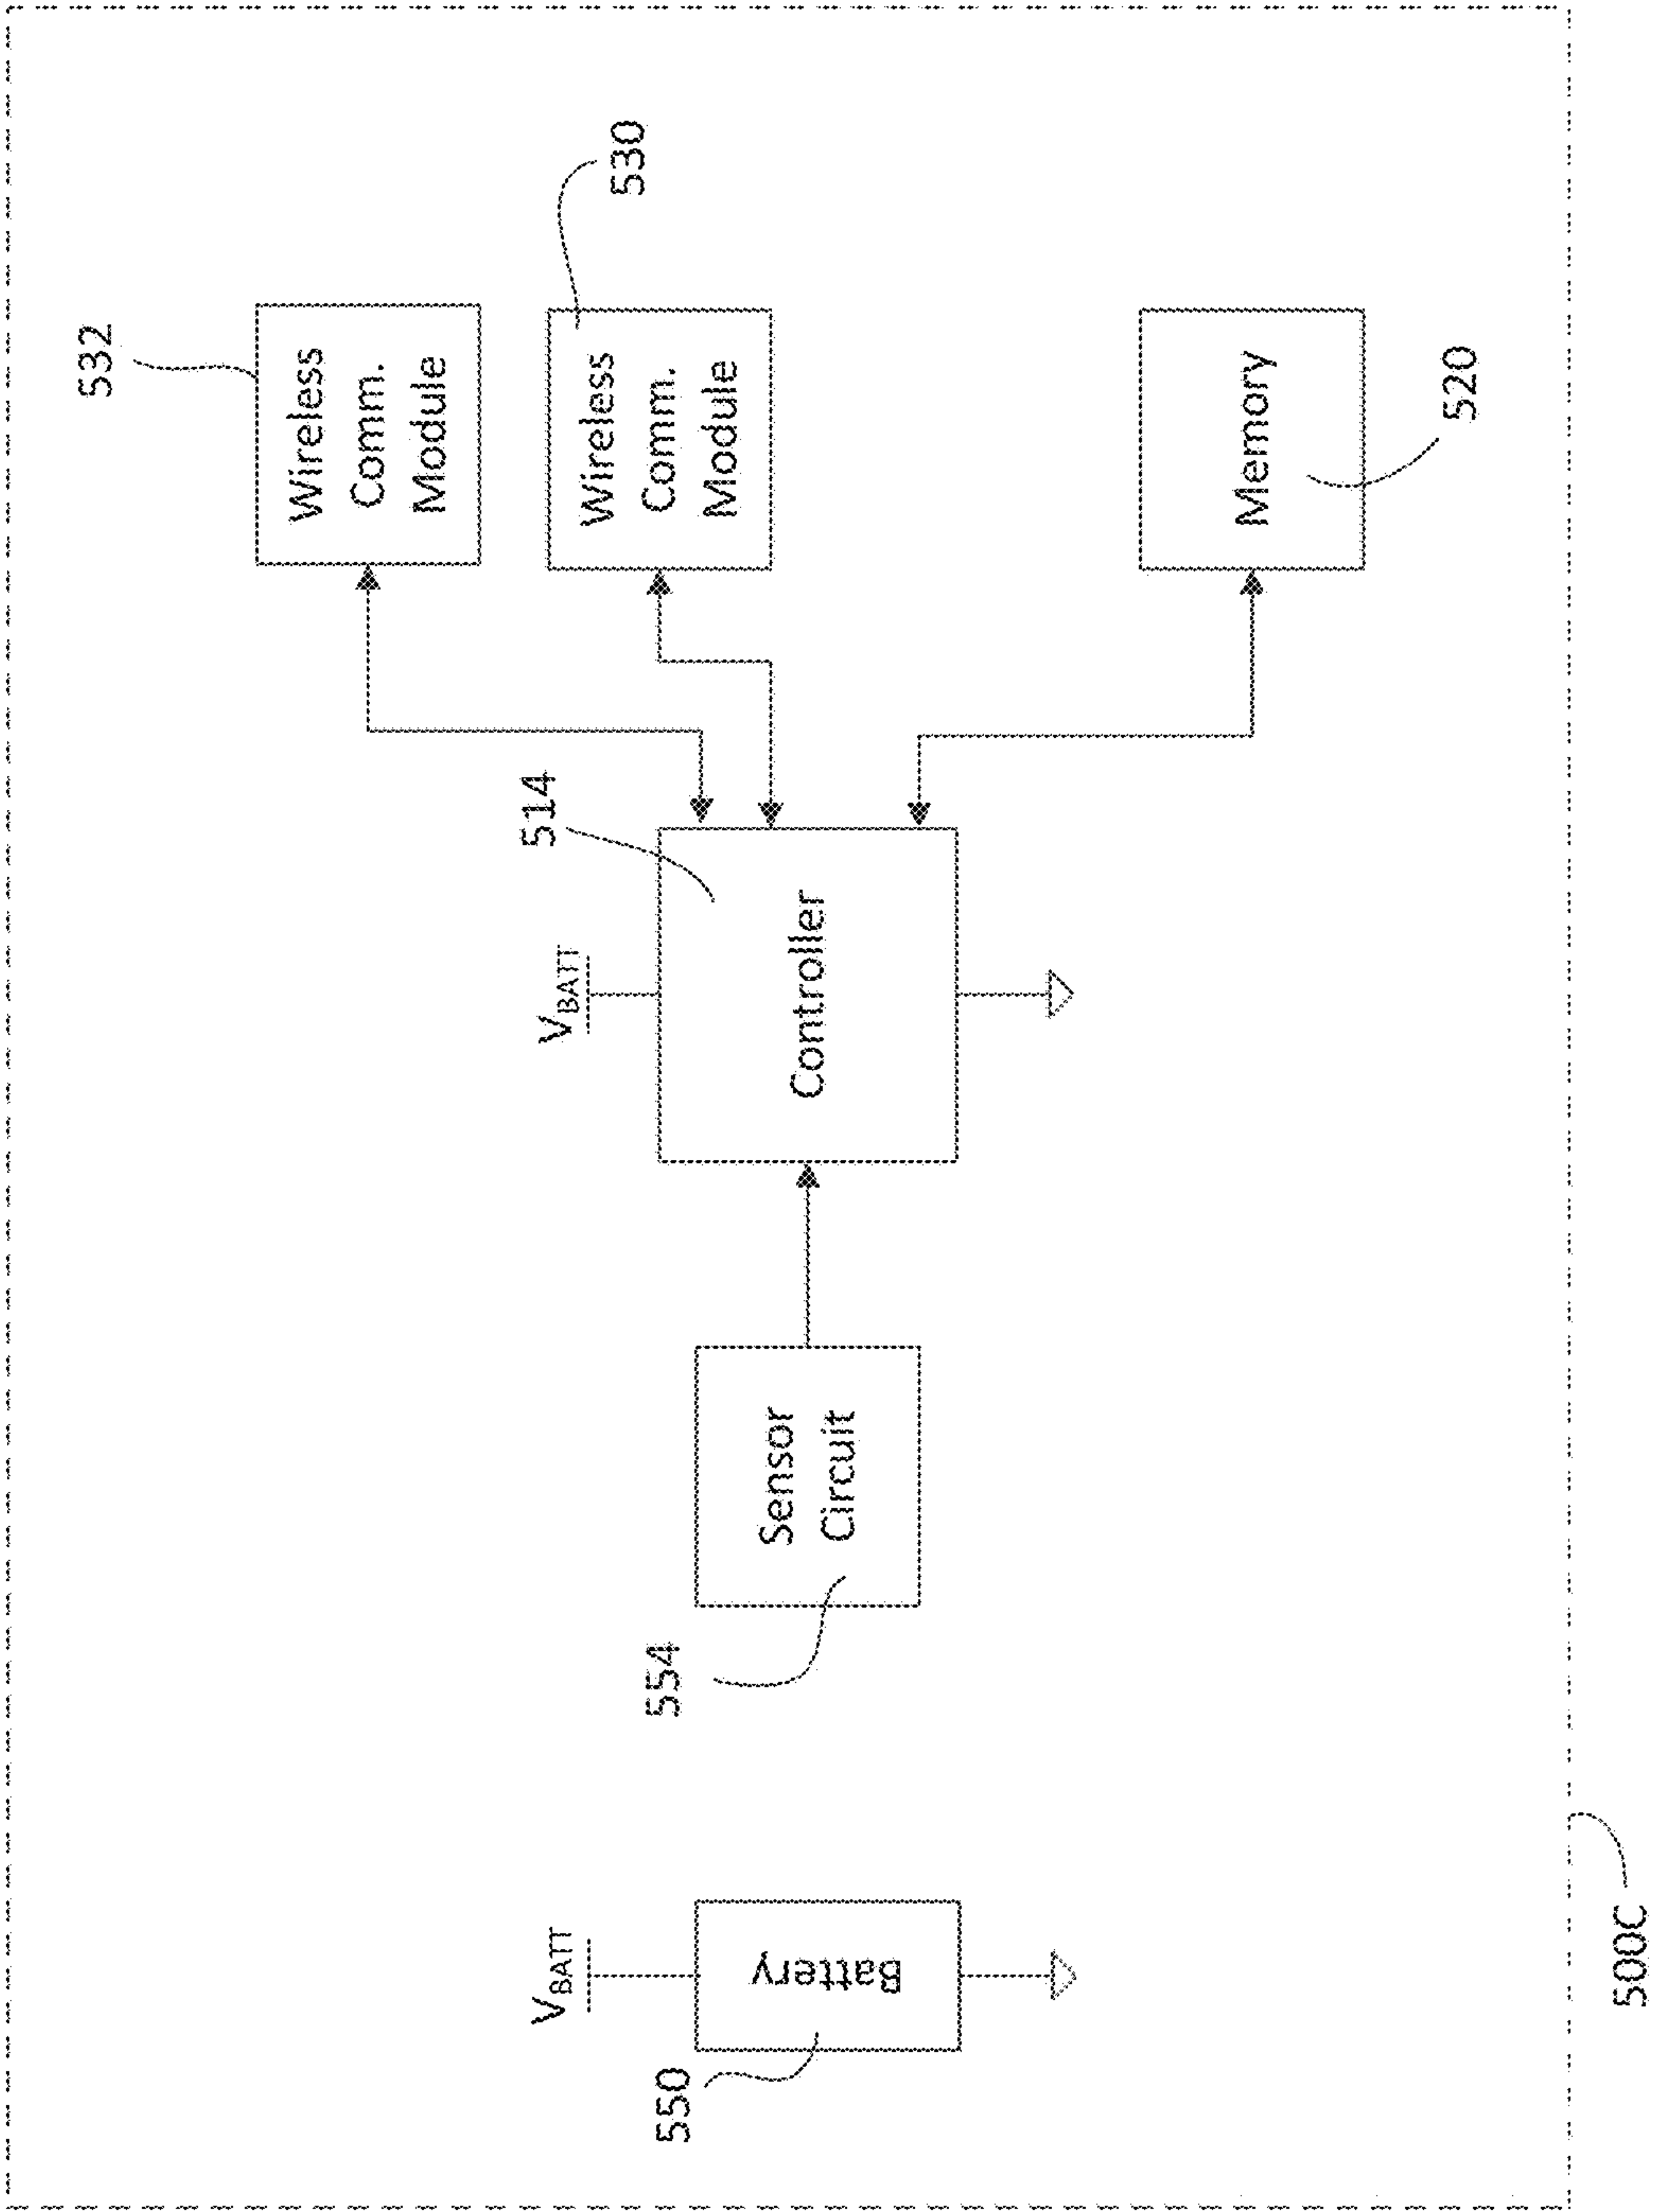


FIG. 5C

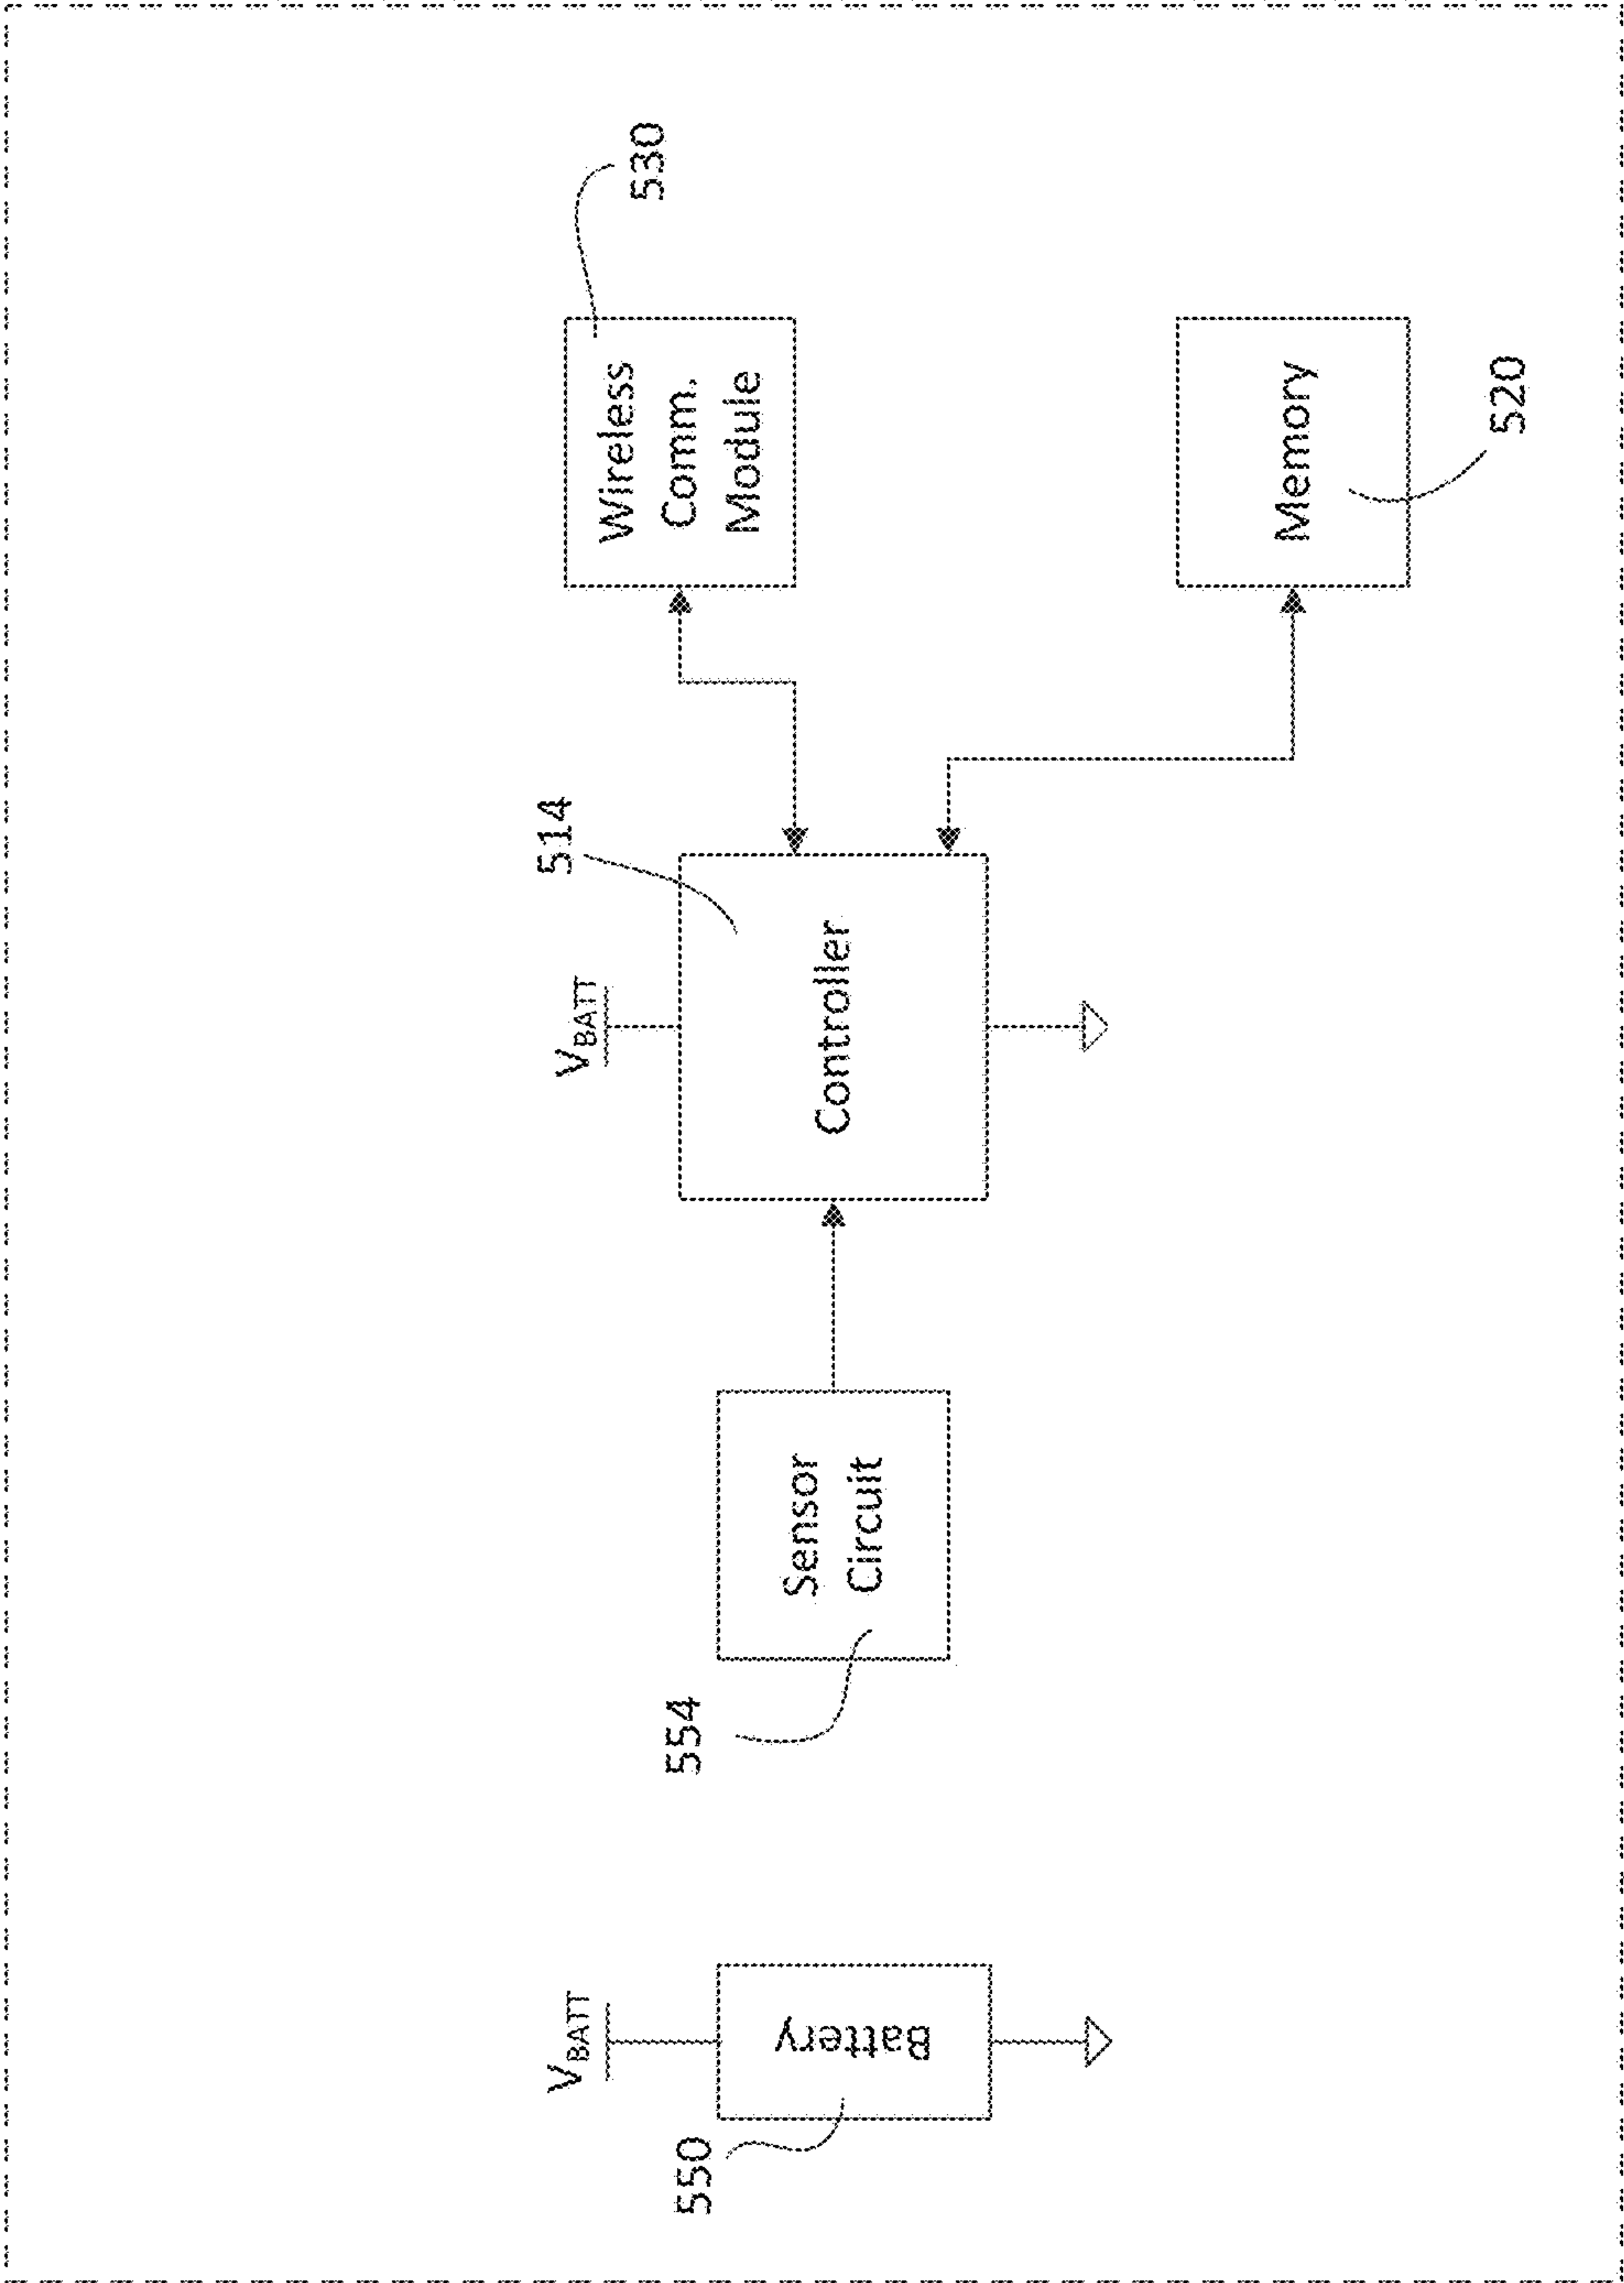


FIG. 5D



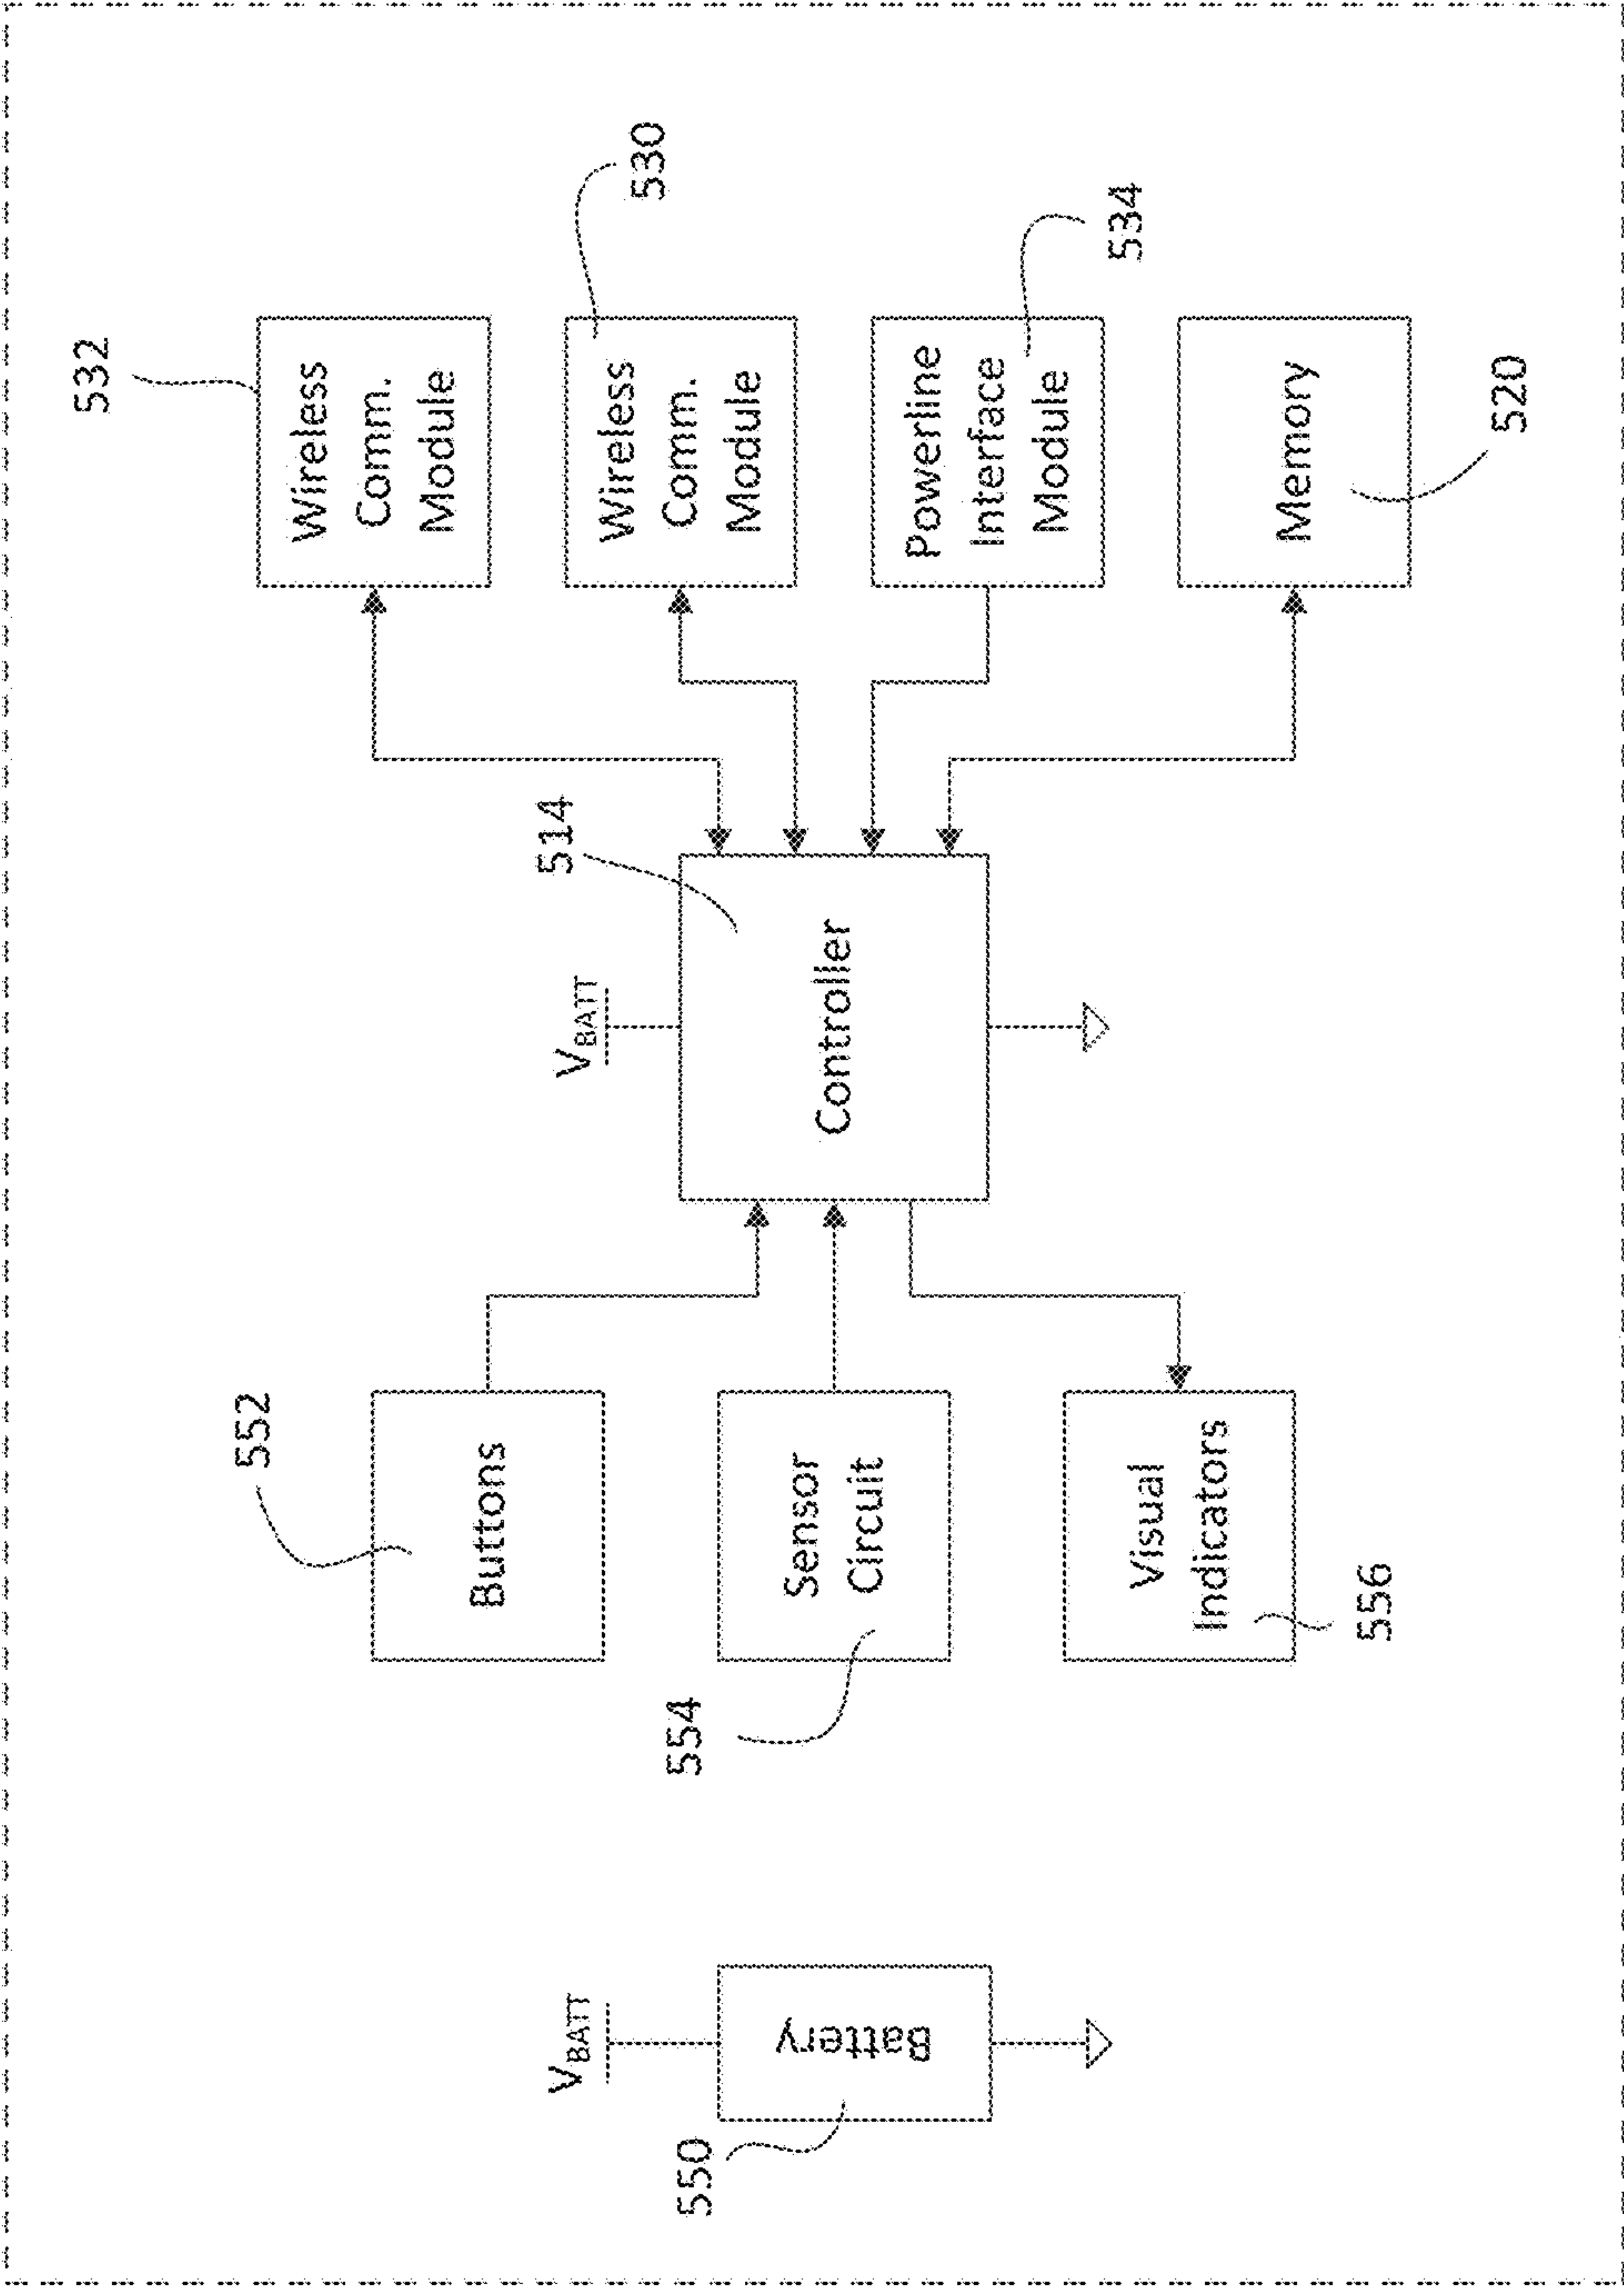


FIG. 5E

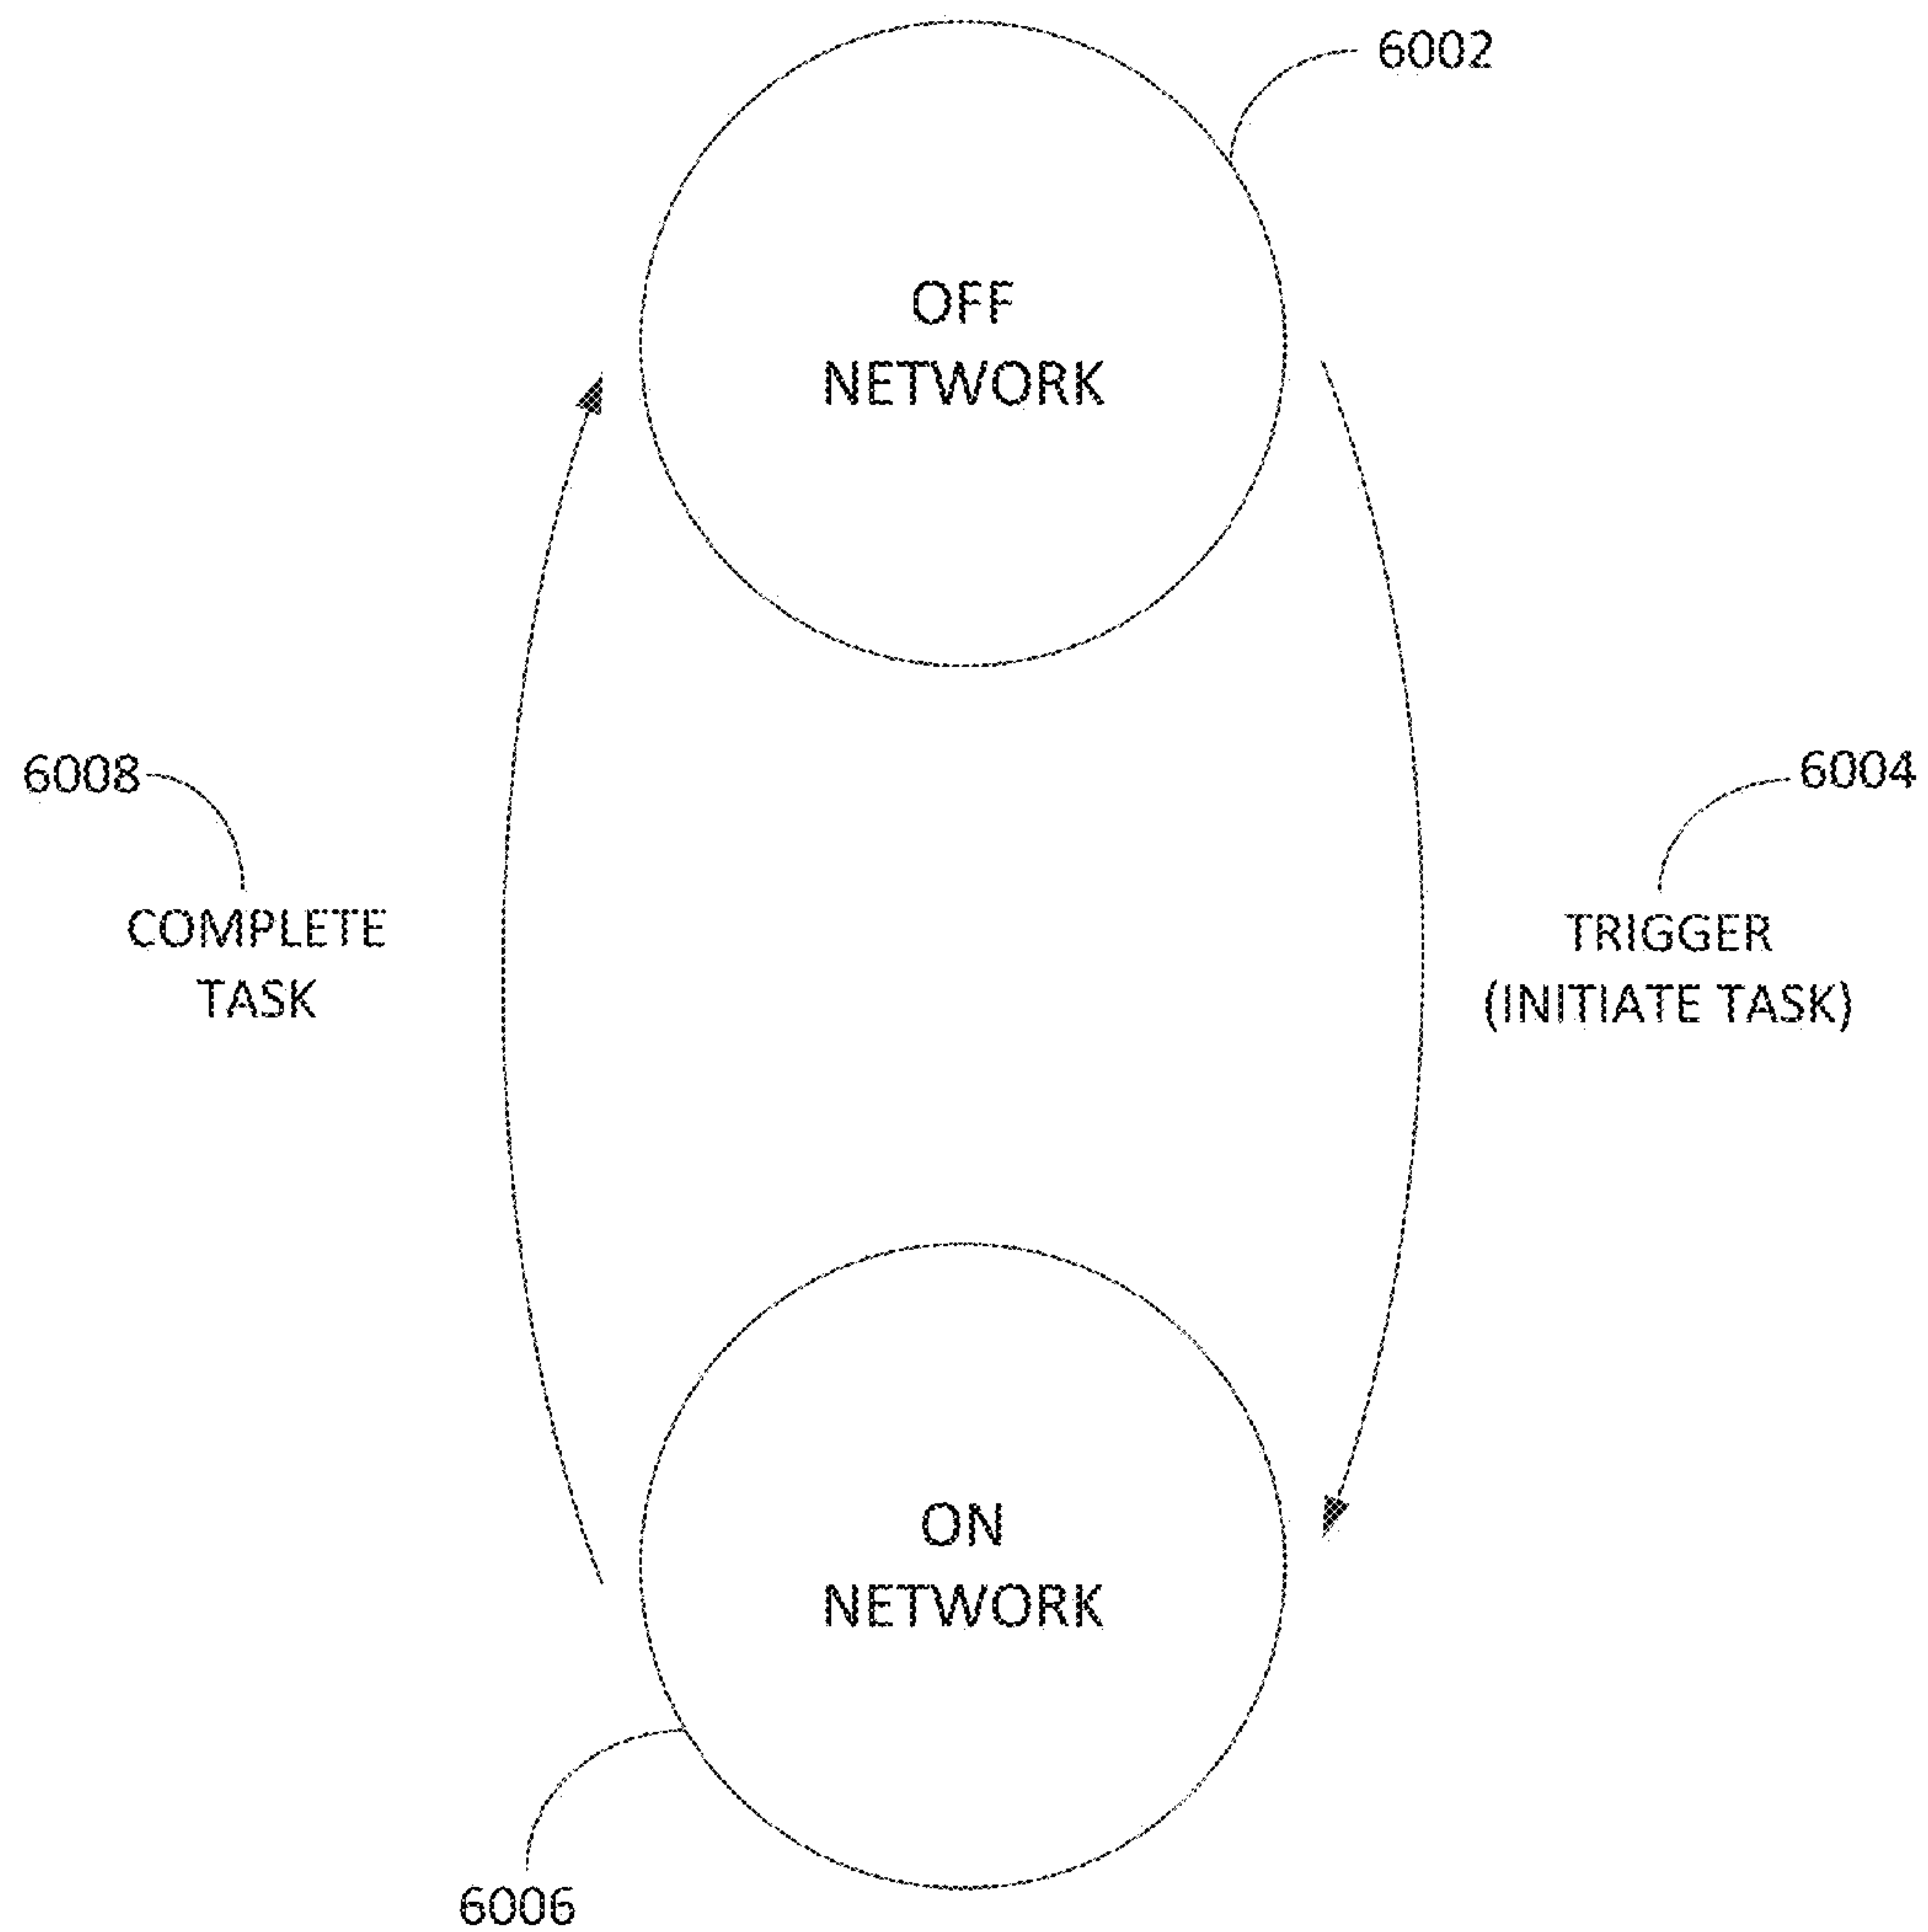


FIG. 6

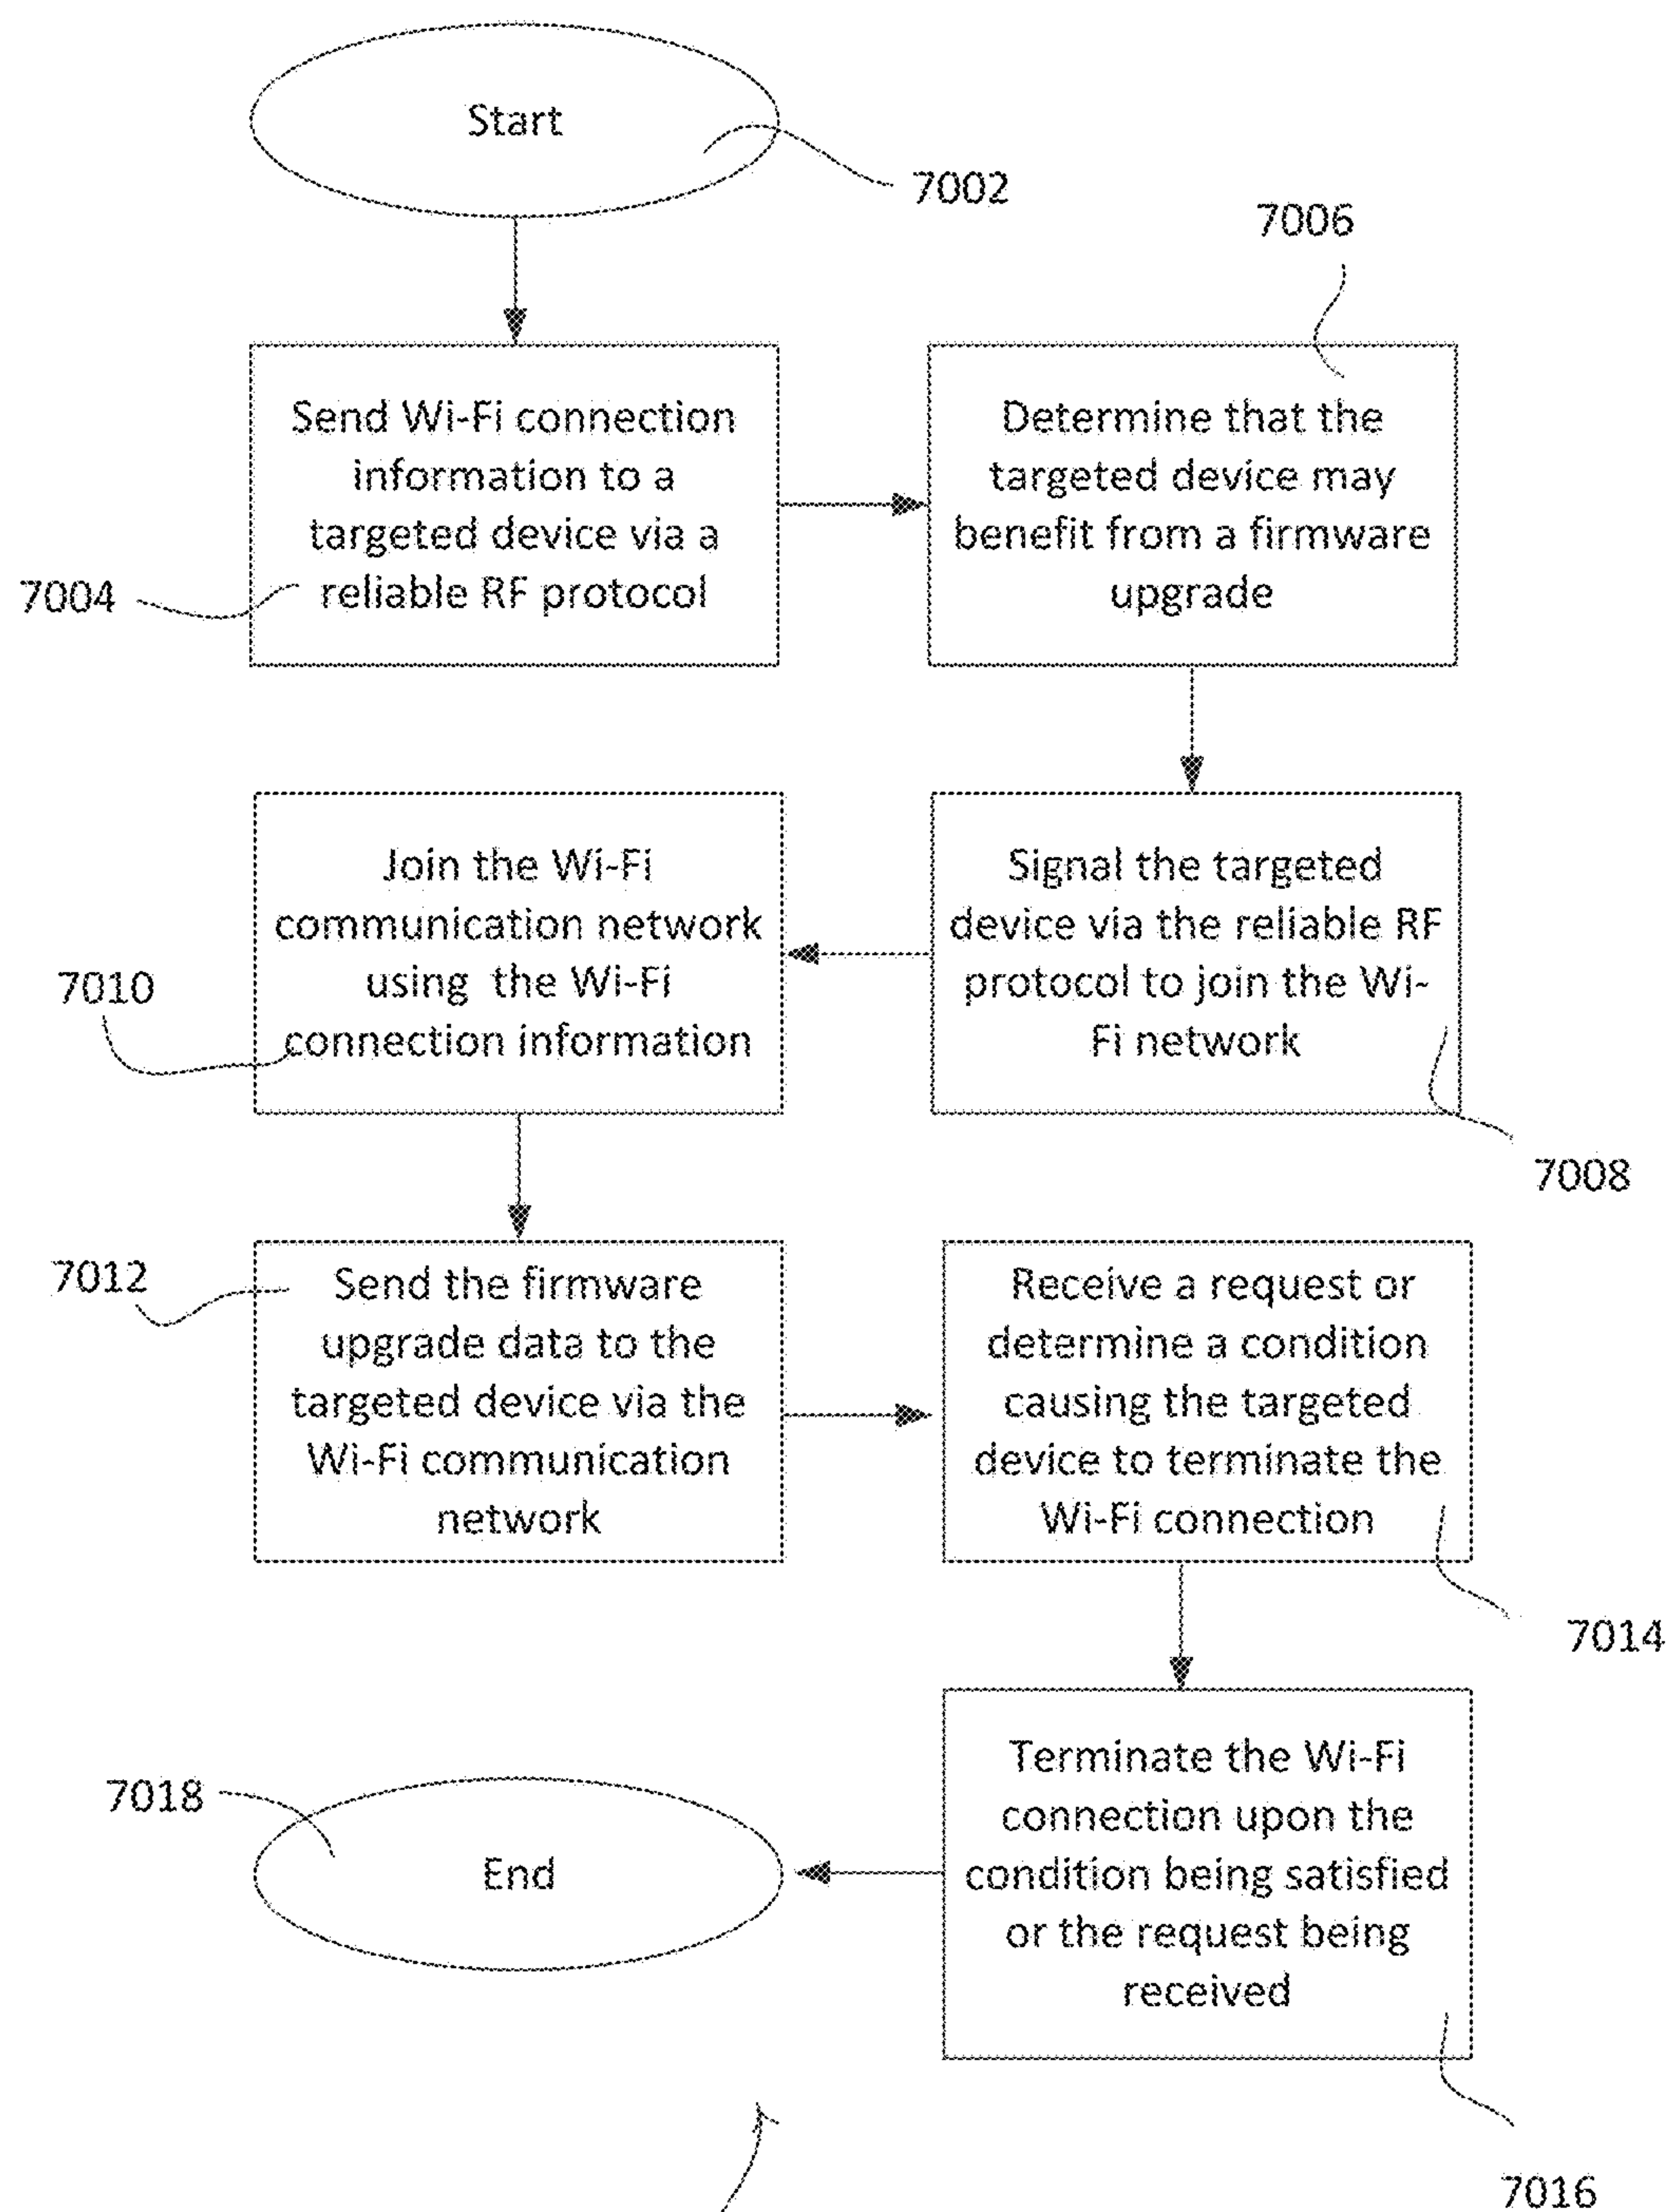


FIG. 7



## NETWORK ACCESS COORDINATION OF LOAD CONTROL DEVICES

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 13/796,486 filed on Mar. 12, 2013, which claims the benefit of commonly assigned U.S. Provisional Patent Application No. 61/745,419, filed on Dec. 21, 2012, and titled NETWORK ACCESS COORDINATION OF LOAD CONTROL DEVICES, the entire contents of all of which being hereby incorporated by reference as if fully set-forth herein, for all purposes.

### BACKGROUND

A load control device may control the amount of power delivered to an electrical load. Load control devices include, for example, lighting control devices (such as wall-mounted dimmer switches and plug-in lamp dimmers), motor control devices (for motor loads), temperature control devices, motorized window treatments, and remote controls. Typically, a load control device may be coupled in a series electrical connection between an alternating-current (AC) power source and the electrical load to control the power delivered from the AC power source to the electrical load.

In some applications, the load control device may connect to a wireless network, such as a Wi-Fi network for example. Examples of Wi-Fi-enabled load control devices include those described in commonly-assigned U.S. application Ser. No. 13/538,555, filed Jun. 29, 2012, titled LOAD CONTROL DEVICE HAVING INTERNET CONNECTIVITY, the contents of which is hereby incorporated by reference herein in its entirety, for all purposes. In practice, such devices may connect to wireless network provided by a wireless network access point (AP), such as an AP provided by a home Wi-Fi router.

APs, and particularly home Wi-Fi routers, often have practical capacity limitations well below the theoretical protocol maximums. For example, a typical IP subnet might theoretically support 254 addressable devices. However, a home Wi-Fi router may only have internal memory sized to support 30 addressable devices. These practical limitations are often unnoticed, even by the most voracious Internet households. Having more than 30 Wi-Fi devices, computers, tablets, cell phones, on a household network at one time is uncommon. And, even in a commercial setting, wireless networks are routinely engineered with 10-30 users per router. The traffic generated by 10-30 commercial users often reaches the practical traffic capacity for the router.

But, it is not uncommon for a residential or commercial installation to have well over 30 load control devices. FIG. 1 offers a partial illustration of the modern residential technological environment 10. In FIG. 1, traditional network devices such as computers 18 and 46, tablets 36, smart phones 16 and 44, and printer 20, when few in number may be well served by a home Wi-Fi router 14. However, a home using Wi-Fi-enabled load control devices such as lighting load controls 12, 22, 24, 28, 32, 40, 42, and 50, motorized window treatments 26, 30, and 38, smart thermostats 34 and 48, and the like, may have a total number of devices vying for network access from the home Wi-Fi router 14 that may well exceed the router's capacity.

### SUMMARY

An apparatus, such as a dimmer switch, may control the power delivered from an AC power source to at least one

electrical load, such as one or more lights. The apparatus may comprise a controllably conductive device adapted to be coupled in series electrical connection between the source and the one or more lights. The apparatus may also comprise a controller that may be operatively coupled to a control input of the controllably conductive device. The apparatus may also include a first wireless communication circuit that may communicate via a first protocol and may be used to join a first wireless communication network. The first wireless communication network may communicate via the first protocol. The first wireless communication circuit may be in communication with the controller. The controller may control the controllably conductive device for rendering the controllably conductive device conductive and non-conductive, perhaps to increase and/or decrease the intensity of the one or more lights. The controller may also determine a first condition for communicating via the first protocol. The controller may control the first wireless communication circuit to join the first wireless communication network when the first condition being is.

An apparatus, such as a remote control device or an occupancy sensor, may be configured to provide information for the control of power delivered to at least one electrical load, such as sending commands to dimmer switches. The apparatus may comprise a controller and a sensor (e.g. for the occupancy sensor) or a manual operator (e.g., for the remote control device). Either the sensor and/or the manual operator may be in communication with the controller. The apparatus may further comprise a first wireless communication circuit that may communicate via a first protocol and may join a first wireless communication network. The first wireless communication network may be operable for communication via the first protocol. And the first wireless communication circuit may communicate with the controller. The controller may determine the information based at least in part on a signal received from either the sensor and/or the manual operator. The controller may also determine a first condition for communicating via the first protocol. And the controller may also control the first wireless communication circuit to join the first wireless communication network when the first condition is satisfied.

An apparatus may control the power delivered to at least one electrical load. The apparatus may comprise a controller and a first wireless communication circuit that may be operable to communicate via a first protocol and to join a first wireless communication network that may be operable to communicate via the first protocol. The first communication circuit may be in communication with the controller. The apparatus may also comprise a second communication circuit operable to communicate via a second protocol. The second communication circuit may be in communication with the controller. The controller may be operable to determine a first condition for communicating via the first protocol. The first condition may include a receipt of a signal via the second communication circuit and via the second protocol to join the first wireless communication network. The controller may also be operable to control the first wireless communication circuit to join the first wireless communication network upon the first condition being satisfied.

A network node may be in communication with a load control device. The load control device may control the power delivered to at least one electrical load. The load control device may comprise a first controller. The load control device may also comprise a first wireless communication circuit that may be operable to communicate via first protocol and may be operable to join a first wireless



## 3

communication network. The load control device may also comprise a second communication circuit that may be operable to communicate via a second protocol. The network node may comprise a second controller and a third communication circuit that may be operable to communicate via the second protocol. The third communication circuit may be in communication with the second controller. The second controller may be operable to determine a first condition for the load control device to communicate via the first protocol. The second controller may also be operable to send a first signal via the third communication circuit and via the second protocol to the load control device upon the first condition being satisfied. The first signal may cause the load control device to control the first wireless communication circuit to join the first wireless communication network.

A wireless control device may be used in a load control system to control power delivered from a power source to an electrical load. The wireless control device may comprise a first wireless communication circuit that may be configured to communicate digital messages via a first wireless communication network. The wireless device may comprise a control circuit that may be in communication with the first wireless communication circuit. The control circuit may be configured to join the first wireless communication network. The control circuit may be configured to communicate digital messages via the first wireless communication network using a first protocol. The control circuit may be configured to determine an occurrence of a first condition. The control circuit may be configured to join the first wireless communication network upon the first condition being satisfied. The control circuit may be configured to determine an occurrence of a second condition. The control circuit may be configured to disconnect from the first wireless communication network upon the second condition being satisfied.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an example environment that may utilize a number of contemplated load control devices, sensors, and/or remote control devices.

FIG. 2 is a simple diagram of a radio-frequency (RF) lighting control system comprising a dimmer switch and a wireless control device, such as a smart phone.

FIG. 3A is a diagram of a first example network in which one or more contemplated devices and techniques may be employed.

FIG. 3B is a diagram of a second example network in which one or more contemplated devices and techniques may be employed.

FIG. 3C is a diagram of a third example network in which one or more contemplated devices and techniques may be employed.

FIG. 4A is a first simplified example block diagram of the dimmer switch of the RF lighting control system of FIG. 2.

FIG. 4B is a second simplified example block diagram of the dimmer switch of the RF lighting control system of FIG. 2.

FIG. 4C is a third simplified example block diagram of the dimmer switch of the RF lighting control system of FIG. 2.

FIG. 5A is a first simplified example block diagram of an input device like the remote control devices of FIGS. 3A-3C.

FIG. 5B is a second simplified example block diagram of an input device like the remote control device of FIGS. 3A-3C.

## 4

FIG. 5C is a first simplified example block diagram of a sensor device like the occupancy sensor of FIGS. 3A-3C.

FIG. 5D is a second simplified example block diagram of a sensor device like the occupancy sensor of FIGS. 3A-3C.

FIG. 5E is a simplified example block diagram of a contemplated combination input and sensor device which may be employed in the environments of FIGS. 3A-3C.

FIG. 6 is a diagram that illustrates network access activity for one or more contemplated devices and techniques.

FIG. 7 is an exemplary flow chart for Internet Protocol address assignments for load control devices.

## DETAILED DESCRIPTION

FIG. 2 is a simple diagram of a radio-frequency (RF) lighting control system 100 that may include a dimmer switch 110 and a wireless control device 120. The wireless control device 120 may be any device capable of performing wireless communications, such as, a smart phone (e.g., an iPhone® smart phone, an Android® smart phone, or a Blackberry® smart phone), a personal computer, a laptop, a wireless-capable media device (e.g., MP3 player, gaming device, or television), or a tablet device, (for example, an iPad® hand-held computing device), a Wi-Fi or wireless-communication-capable television, or any other suitable Internet-Protocol-enabled device.

The wireless control device 120 may be operable to transmit digital messages to the dimmer switch 110 in one or more Internet Protocol (IP) packets. The Internet Protocol layer is responsible for addressing hosts and routing datagrams (i.e., packets) from a source host to a destination host across one or more IP networks. For this purpose, the Internet Protocol layer defines an addressing system that has two functions: identifying hosts and providing a logical location service. This is accomplished by defining standard datagrams and a standard addressing system.

Each datagram has two components, a header and a payload. The IP header includes the source IP address, destination IP address, and other meta-data needed to route and deliver the datagram. The payload is the data that is transported.

The wireless control device 120 may transmit the digital messages (e.g., IP packets) via RF signals 106 either directly or via a wireless network that includes a standard wireless router 130. For example, the wireless control device 120 may transmit the RF signals 106 directly to the dimmer switch 110 via a point-to-point communication link, e.g., a Wi-Fi communication link, such as an 802.11 wireless local area network (LAN), or other direct wireless communication link, such as a Wi-MAX communication link or a Bluetooth® communication link. This point-to-point communication may be performed using a standardized communication, e.g., Wi-Fi Direct communication, or any non-standardized communication that allows a wireless device to connect to another wireless device without the use of a wireless access point. For example, the wireless control device 120 and/or the dimmer switch 110 may download a software access point (AP) that provides a protected wireless communication between the devices.

The wireless control device 120 may also transmit RF signals 106 to the dimmer switch 110 via the wireless network (i.e., via the wireless router 130). The wireless network may enable wireless communications via one or more wireless communications links, e.g., a Wi-Fi communications link, a Wi-MAX communications link, a Bluetooth® communications link, a cellular communications link, a television white space (TVWS) communication link,



or any combination thereof. For example, the wireless control device **120** may communicate with a network server via a first wireless communications link (e.g., a cellular communications link), while the dimmer switch **110** communicates with the network server via a second communications link (e.g., a Wi-Fi communications link). Alternatively or additionally, the wireless control device **120** and the dimmer switch **110** may communicate with the network via the same type of communication link. The lighting control system **100** may also include a femtocell, a Home Node B, and/or other network entity for facilitating the configuration and operation of the lighting control system and for allowing wireless communications and connection to the Internet.

The dimmer switch **110** may be coupled in series electrical connection between an AC power source **102** and a lighting load **104** for controlling the amount of power delivered to the lighting load. The dimmer switch **110** may be wall-mounted in a standard electrical wallbox, or alternatively implemented as a table-top load control device. The dimmer switch **110** comprises a faceplate **112** and a bezel **113** received in an opening of the faceplate. The dimmer switch **110** further comprises a toggle actuator **114** and an intensity adjustment actuator **116**. Actuations of the toggle actuator **114** toggle, e.g., alternately turn off and on, the lighting load **104**. Actuations of an upper portion **116A** or a lower portion **116B** of the intensity adjustment actuator **116** may respectively increase or decrease the amount of power delivered to the lighting load **104** and thus increase or decrease the intensity of the lighting load **104** from a minimum (i.e., low-end) intensity (e.g., approximately 1-10%) to a maximum (i.e., high-end) intensity (e.g., approximately 100%). A plurality of visual indicators **118**, e.g., light-emitting diodes (LEDs), may be arranged in a linear array on the left side of the bezel **113**. The visual indicators **118** are illuminated to provide visual feedback of the intensity of the lighting load **104**. An example of a dimmer switch having a toggle actuator and an intensity adjustment actuator is described in greater detail in U.S. Pat. No. 5,248,919 ("the 919 patent"), issued Sep. 28, 1993, entitled LIGHTING CONTROL DEVICE, the entire disclosure of which is hereby incorporated by reference. Alternatively, the dimmer switch **110** could be replaced by an electronic switch for simply turning the lighting load **104** on and off. The electronic switch may include a single visual indicator, e.g., the middle indicator of the visual indicators **118** of the dimmer switch **110**.

The dimmer switch **110** may include an optical receiver **119**. The optical receiver **119** may be used to receive optical signals from the wireless control device **120**. Optical signals may be free-space optical communications or communications via physical connections. For example, free space optical communications may include communications via air, while physical optical communications may include communications via optical fiber cable or an optical transmission pipe. The optical signals may also be included in visible light, e.g., a flashing light, or non-visible light, e.g., infrared, spectrums.

The optical signals may provide instructions for programming and/or adjusting the operating parameters (e.g., the low-end intensity and the high-end intensity) of the dimmer switch **110**. For example, the optical signals may be used to configure the dimmer switch such that the dimmer switch **110** is operable to receive the RF signals **106** from the wireless control device **120** as will be described in greater detail below. The optical signals may also be used to control or program the lighting configurations of the dimmer switch **110**. And, though devices and techniques described herein

may be described with respect to using optical signals or other signals to program or control a dimmer switch from a wireless control device, such signals may be used to program or control any device that is capable of receiving instructions via such optical or other signals, such as shades, thermostats, plug-in devices, or the like. Examples of methods of communicating optical signals between the dimmer switch **110** and the wireless control device **120** are described in greater detail in commonly assigned U.S. patent application Ser. No. 13/538,665, filed on Jun. 29, 2012, titled METHOD OF OPTICALLY TRANSMITTING DIGITAL INFORMATION FROM A SMART PHONE TO A CONTROL DEVICE, the entire disclosure of which is hereby incorporated by reference.

Wireless load control devices are described in greater detail in commonly-assigned U.S. Pat. No. 5,838,226, issued Nov. 17, 1998, entitled COMMUNICATION PROTOCOL FOR TRANSMISSION SYSTEM FOR CONTROLLING AND DETERMINING THE STATUS OF ELECTRICAL DEVICES FROM REMOTE LOCATIONS; U.S. Pat. No. 6,803,728, issued Oct. 12, 2004, entitled SYSTEM FOR CONTROL OF DEVICES; U.S. patent application Ser. No. 12/033,223, filed Feb. 19, 2008, entitled COMMUNICATION PROTOCOL FOR A RADIO-FREQUENCY LOAD CONTROL SYSTEM; and U.S. patent application Ser. No. 13/234,573, filed Sep. 16, 2011, entitled DYNAMIC KEYPAD FOR CONTROLLING ENERGY-SAVINGS SETTINGS OF A LOAD CONTROL SYSTEM; the entire disclosures of which are hereby incorporated by reference.

The wireless control device **120** has a visual display **122**, which may comprise a touch screen having, for example, a capacitive touch pad displaced overtop the visual display, such that the visual display may display soft buttons that may be actuated by a user. Alternatively, the wireless control device **120** may comprise a plurality of hard buttons (e.g., physical buttons or manual operators) in addition to the visual display **122**. The wireless control device **120** may download a product control application for allowing the user to control the lighting load **104**. In response to actuations of the displayed soft buttons or hard buttons, the wireless control device **120** transmits digital messages to the dimmer switch **110** directly or through other wireless communications described herein. For example, the digital messages may be transmitted via Wi-Fi communication using the wireless router **130**. The dimmer switch **110** may adjust the intensity of the lighting load **104** in response to commands included in the digital messages, such that the dimmer switch controls the lighting load in response to actuations of the soft buttons or hard buttons of the wireless control device **120**.

In addition, the wireless control device **120** may be controlled to transmit optical signals, near field communication (NFC) signals, or RF signals according to a proprietary RF communication protocol (such as, for example, the Clear Connect™ protocol) as described herein. For example, the visual display **122** may be controlled to transmit optical signals to the optical receiver **119** of the dimmer switch **110** (as will be described in greater detail below).

The dimmer switch **110** and the wireless control device **120** may both be assigned a unique address for wireless communications via the wireless network (i.e., via the wireless router **130**) as described herein. For example, where wireless communications are performed using a Wi-Fi communication link, a Media Access Control (MAC) address may be assigned (e.g., during manufacture). The wireless control device **120** may connect to the wireless LAN via the wireless router **130** using standard procedures. The wireless



control device **120** is assigned an Internet Protocol (IP) address upon connecting to the wireless LAN. The wireless control device **120** may store the service set identifier (SSID) and the SSID password of the wireless LAN. After obtaining the IP address, the wireless control device **120** is able to assign an IP address (e.g., different from the IP address of the wireless control device **120**) to the dimmer switch **110**. Alternatively, the dimmer switch **110** may be operable to obtain the IP address from the wireless router **130** using, for example, procedures defined by the Wi-Fi Protected Setup standard.

The dimmer switch **110** may be associated with (e.g., assigned to) the wireless control device **120**, such that the wireless control device may transmit commands for controlling the intensity of the lighting load **104** or programming the dimmer switch **110**. Such commands may be transmitted to the dimmer switch **110** via the RF signals **106**. Digital messages transmitted to and from the dimmer switch **110** may include, for example, the MAC address and the IP address of the dimmer switch **110**. The dimmer switch **110** is operable to turn the lighting load **104** on and off. The dimmer switch **110** is also operable to adjust the intensity of the lighting load in response to received digital messages, including the MAC address and the IP address of the dimmer switch, for example. In addition, the wireless router **130** may be operable to receive commands for controlling the lighting load **104** from the Internet, and may wirelessly transmit corresponding digital messages to the dimmer switch **110**.

The dimmer switch **110** may be assigned an IP address, an SSID, an SSID password, and/or a software AP at manufacture, such that the dimmer switch **110** may act as an AP for other communication devices in a LAN. The wireless control device **120** may recognize the dimmer switch **110** as an AP and may connect to the LAN via the dimmer switch **110**. For example, the dimmer switch **110** may connect to router **130** or may perform the functions of the router **130** itself.

The dimmer switch **110** may also connect to the wireless LAN to discover other dimmer switches (not shown). The dimmer switch **110** may discover the other dimmer switches using any discovery protocol, such as Bonjour, Simple Service Discovery Protocol (SSDP), Bluetooth® Service Discovery Protocol (SDP), DNS service discovery (DNS-SD), Dynamic Host Configuration Protocol (DHCP), Internet Storage Name Service (iSNS), Jini for Java objects, Service Location Protocol (SLP), Session Announcement Protocol (SAP) for RTP sessions, Simple Service Discovery Protocol (SSDP) for Universal Plug and Play (UPnP), Universal Description Discovery and Integration (UDDI) for web services, Web Proxy Autodiscovery protocol (WPAD), Web Services Dynamic Discovery (WS-Discovery), XMPP Service Discovery (XEP-0030), and/or XRDS for XRI, OpenID, OAuth, etc. Upon the dimmer switch **110** discovering one or more other dimmer switches, the dimmer switch may create a peer-to-peer network of dimmer switches capable of communicating with one another. For example, the dimmer switches may communicate programming and/or control instructions received from the wireless control device **120**.

The wireless control device **120** may control the lighting load **104** by communicating instructions to the dimmer switch **110** via the RF signals **106** that cause the dimmer switch **110** to execute control instructions that have been pre-programmed on the dimmer switch **110**. For example, the dimmer switch **110** may be pre-programmed at manufacture or via an update to execute the control instructions. The control instructions may include pre-configured settings

(e.g., protected or locked lighting presets), instructions for raising/lowering lighting level, instructions for fading, instructions for scheduling, instructions for turning lights on/off, or any other pre-programmed instruction, for example.

The wireless control device **120** may also program the settings (i.e., the operating parameters) of the dimmer switch **110** (e.g., when the dimmer switch is in a programming mode). For example, the dimmer switch **110** may be a dimmer switch that may have a limited user interface (UI) or may not have any user interface. As such, the user interface of the wireless control device **120** may be used to program the dimmer switch **110**. For example, various wireless communication links described herein, e.g., Wi-Fi signals, optical signals, near field communication (NFC) signals, or proprietary-protocol RF signals, may be used to program any of a number of programmable features provided by the dimmer switch **110**. Such features may be selected via the wireless control device **120**. For example, the wireless control device **120** may program the dimmer switch **110** with such features as protected or locked presets, high-end trim, low-end trim, adjustable delay, fade time, load type, performing communications via wireless communication modes (e.g., as described herein), or being compatible with different lamps. In addition, the wireless control device **120** may be operable to program the dimmer switch **110** to change between modes of operation, for example, between a switching mode, a dimming mode, and/or an electronic timer mode (i.e., a countdown timer mode). The programming signal may be a one-way or two-way serial communication with the dimmer switch **110**. Examples of method of programming the dimmer switch **110** using the wireless control device **120** are described in greater detail in commonly assigned U.S. patent application Ser. No. 13/538,615, filed Jun. 29, 2012, titled METHOD OF PROGRAMMING A LOAD CONTROL DEVICE USING A SMART PHONE, the entire disclosure of which is hereby incorporated by reference.

FIG. 3A is a diagram of an exemplary network environment **300A**. In FIG. 3A, the router **130** may communicate with one or more servers **304**, **306** via the Internet **308**, perhaps as accessed through the “cloud.” For example, router **130** may establish at least one Internet Protocol (IP) connection with either server **304** and/or **306**. The at least one IP connection between the router **130** and either server **304** and/or **306** may be made via a router’s **130** public IP address (and the respective public IP addresses of server **304** and/or server **306**). In some configurations, a gateway device **310** may communicate with the router **130** via a wired or wireless connection. Any number of devices in FIG. 3A, such as, for example, the router **130**, the gateway device **310**, laptop **314**, dimmer switch **110A**, dimmer switch **110B**, and/or dimmer switch **110C**, among other devices, may be connected to the AC power supply **102**, perhaps via a hardwired connection or via electrical outlets **316** and **316A**, for example. Dimmer switch **110A**, dimmer switch **110B**, and/or dimmer switch **110C** may operate lighting load **104A**, lighting load **104B**, and/or lighting load **104C**, respectively, as described previously herein. Occupancy sensor **180** may communicate with the router **130** and/or dimmer switches **110A**, **110B**, and/or **110C**, perhaps to adjust the intensity of one or more of the dimmer switches **110A**, **110B**, and/or **110C** based on a detected occupancy of the environment **300A**. A user may activate one or more of the buttons (soft buttons or hard buttons (e.g. physical buttons or manual operators)) on a remote control device **184**, which may communicate with the router **130** and/or dimmer switches



110A, 110B, and/or 110C to adjust the intensity of one or more of the dimmer switches 110A, 110B, and/or 110C. And a user may override the occupancy sensor's 180 control of the dimmer switches 110A, 110B, and/or 110C, for example.

The router 130 may establish a non-public (or private) IP address for the router 130 and may establish an IP connection and corresponding respective private IP addresses with the dimmer switch 110A, 110B, and/or 110C, the gateway device 310, and the laptops 312 and/or 314. The router 130 may coordinate one or more of the respective private IP addresses with one or more IP connections (e.g., multimedia or data streams) that are received via the router's 130 public IP address (e.g., from the server 304 and/or 306). The router 130 may coordinate one or more of the respective public IP addresses (e.g., of the server 304 and/or server 306) with one or more IP connections (e.g., multimedia or data streams) that are sent to the router's 130 private IP address (e.g., from the gateway device 310, laptop 312, and/or laptop 314). The router 130 may perform such coordination via a Network Address Table (NAT) (not shown), or the like, for example.

The wireless control device 120, the occupancy sensor 180, and/or the remote control device 184 may be operable to transmit and receive RF signals 106 including Internet Protocol packets directly to dimmer switches 110A, 110B, and/or 110C, or to dimmer switches 110A, 110B, and/or 110C via the wireless router 130 (and perhaps also via the gateway device 310). The router 130 (and perhaps the gateway device 310) may be operable to transmit one or more digital messages via RF signals 106 that may correspond to the RF signals 106 received from the wireless control device 120, the occupancy sensor 180, and/or the remote control device 184. The one or more digital messages may be transmitted according to a proprietary RF communication protocol (such as, for example, the Clear Connect™ protocol) to the dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C via RF signals 108. The dimmer switch 110A, dimmer switch 110B and/or dimmer switch 110C may include a wireless communication module (e.g. circuit) operable to receive digital messages according to the proprietary RF communication protocol via the RF signals 108. For example, the wireless control device 120, the occupancy sensor 106, the remote control device 184, the router 130, the laptop 312, and/or the laptop 314 may transmit the RF signals 106 directly to the dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C via a point-to-point communication, such as a Wi-Fi communication link, e.g., an 802.11 wireless local area network (LAN), or other direct wireless communication link, e.g., a Wi-MAX communication link or a Bluetooth® communication link.

In FIG. 3A, a communication dongle (not shown) could be connected to the wireless control device 120 that may allow for direct communication between the wireless control device 120 and the dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C using the proprietary RF communication protocol via RF signals 108. For example, the communication dongle could be plugged into a headphone jack on the wireless control device 120, or a USB port on 120. The occupancy sensor 180 and/or the remote control device 184 may communicate with the dimmer switches 110A, 110B, and/or 110C using the proprietary RF communication protocol via RF signals 108.

FIG. 3B is a diagram of an exemplary network environment 300B. In FIG. 3B, the router 130 may communicate with one or more servers 304, 306 via the Internet 308, perhaps as accessed through the "cloud." For example, router 130 may establish at least one Internet Protocol (IP)

connection with either server 304 and/or 306. The at least one IP connection between the router 130 and either server 304 and/or 306 may be made via a router's 130 public IP address (and the respective public IP addresses of server 304 and/or server 306). A gateway device 310 may communicate with the router 130 via a wired or wireless connection. Any number of devices in FIG. 3B, such as, for example, the router 130, the gateway device 310, laptop 314, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C, among other devices, may be connected to the AC power supply 102, perhaps via a hardwired connection or via electrical outlets 316 and 316A, for example. Dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C may operate lighting load 104A lighting load 104B, and/or lighting load 104C as described previously herein. Occupancy sensor 180 may communicate with the router 130 and/or dimmer switches 110A, 110B, and/or 110C, perhaps to adjust the intensity of one or more of the dimmer switches 110A, 110B, and/or 110C based on a detected occupancy of the environment 300B. A user may activate one or more of the buttons (soft buttons or hard buttons (e.g. physical buttons or manual operators)) on the remote control device 184, which may communicate with the router 130 and/or dimmer switches 110A, 110B, and/or 110C to adjust the intensity of one or more of the dimmer switches 110A, 110B, and/or 110C. And a user may override the occupancy sensor's 180 control of the dimmer switches 110A, 110B, and/or 110C, for example.

The router 130 may establish a non-public (or private) IP address for the router 130 and may establish an IP connection and corresponding respective private IP addresses with the dimmer switches 110A, 110B, and/or 110C, the gateway device 310, and the laptop 312 and/or the laptop 314. The router 130 may coordinate one or more of the respective private IP addresses with one or more IP connections (e.g., multimedia or data streams) that are received via the router's 130 public IP address (e.g., from the server 304 and/or 306). The router 130 may coordinate one or more of the respective public IP addresses (e.g., of the server 304 and/or server 306) with one or more IP connections (e.g., multimedia or data streams) that are sent to the router's 130 private IP address (e.g., from the gateway device 310, laptop 312, and/or laptop 314). The router 130 may perform such coordination via a Network Address Table (NAT) (not shown), or the like, for example.

The wireless control device 120, the occupancy sensor 180, and/or the remote control device 184 may be operable to transmit and receive RF signals 106 including Internet Protocol packets directly to and from dimmer switches 110A, 110B, and/or 110C, or to and from the dimmer switches 110A, 110B, and/or 110C via the wireless router 130 (and perhaps also via the gateway device 310). The router 130 (and perhaps the gateway device 310) may be operable to transmit one or more digital messages via RF signals 106 that may correspond to the RF signals 106 received from the wireless control device 120, the occupancy sensor 180, and/or the remote control device 184. For example, the wireless control device 120, the occupancy sensor 106, the remote control device 184, the router 130, the laptop 312, and/or the laptop 314 may transmit the RF signals 106 directly to the dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C via a point-to-point communication, such as a Wi-Fi communication link, e.g., an 802.11 wireless local area network (LAN), or other direct wireless communication link, e.g., a Wi-MAX communication link or a Bluetooth® communication link.



## 11

The wireless control device 120, the wireless router 130, and the gateway device 310, the occupancy sensor 180, and/or the remote control device 184 may communicate with the laptop 314, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C via one or more devices that have a private IP address and are connected to the AC power source 102 via an Ethernet IP based protocol (e.g., the TCP/IP and/or "HomePlug" protocols) that may be carried via the conductors that deliver electrical energy from the AC power source 102 to the various devices (e.g., router 130, gateway device 310, dimmer switch 110A, dimmer switch 110B, dimmer switch 110C, and/or laptop 314). The gateway device 310, the occupancy sensor 180, the remote control device 184, and the dimmer switches 110A, 110B, and/or 110C (and perhaps the occupancy sensor 180 and the remote control device 184) may also transmit, receive, and/or interpret energy pulses that may be used to convey signals and/or information via the conductors may deliver electrical energy from the AC power source 102 to the gateway device 310 and the dimmer switches 110A, 110B, and/or 110C (and perhaps the occupancy sensor 180 and the remote control device 184).

FIG. 3C is a diagram of an exemplary network environment 300C. In FIG. 3C, the router 130 may communicate with one or more servers 304, 306 via the Internet 308, perhaps as accessed through the "cloud." For example, router 130 may establish at least one Internet Protocol (IP) connection with either server 304 and/or 306. The at least one IP connection between the router 130 and either server 304 and/or 306 may be made via a router's 130 public IP address (and the respective public IP addresses of server 304 and/or server 306). A gateway device 310 may communicate with the router 130 via a wired or wireless connection. Any number of devices in FIG. 3C, such as, for example, the router 130, the gateway device 310, laptop 314, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C, among other devices, may be connected to the AC power supply 102, perhaps via a hardwired connection or via electrical outlets 316 and 316A, for example. Dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C may operate lighting load 104A lighting load 104B, and/or lighting load 104C as described previously herein. Occupancy sensor 180 may communicate with the router 130 and/or dimmer switches 110A, 110B, and/or 110C, perhaps to adjust the intensity of one or more of the dimmer switches 110A, 110B, and/or 110C based on a detected occupancy of the environment 300C. A user may activate one or more of the buttons (soft buttons or hard buttons (e.g., physical buttons or manual operators)) on the remote control device 184, which may communicate with the router 130 and/or dimmer switches 110A, 110B, and/or 110C to adjust the intensity of one or more of the dimmer switches 110A, 110B, and/or 110C. And a user may override the occupancy sensor's 180 control of the dimmer switches 110A, 110B, and/or 110C by activating one or more of the buttons of the remote control device 184, for example.

The router 130 may establish a non-public (or private) IP address for the router 130 and may establish an IP connection and corresponding respective private IP addresses with the gateway device 310, the laptop 312 and/or the laptop 314. The router 130 may coordinate one or more of the respective private IP addresses with one or more IP connections (e.g., multimedia or data streams) that are received via the router's 130 public IP address (e.g., from the server 304 and/or 306). The router 130 may coordinate one or more of the respective public IP addresses (e.g., of the server 304 and/or server 306) with one or more IP connections (e.g., multimedia or data streams) that are sent to the router's 130 private IP address (e.g., from the occupancy sensor 180, remote control device 184, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C).

## 12

multimedia or data streams) that are sent to the router's 130 private IP address (e.g., from the gateway device 310, laptop 312, and/or laptop 314). The router 130 may perform such coordination via a Network Address Table (NAT) (not shown), or the like, for example.

The wireless control device 120, the occupancy sensor 180, and/or the remote control device 184 may be operable to transmit and receive RF signals 106 including Internet Protocol packets directly to dimmer switches 110A, 110B, and/or 110C, or to dimmer switches 110A, 110B, and/or 110C via the gateway device 310 (and perhaps via the wireless router 130). The gateway device 310 may be operable to transmit one or more digital messages via RF signals 106 that may correspond to the RF signals 106 received from the wireless control device 120, the occupancy sensor 180, and/or the remote control device 184 (perhaps via the router 130). The one or more digital messages may be transmitted according to a proprietary RF communication protocol (such as, for example, the Clear Connect™ protocol) to the dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C via RF signals 108. The dimmer switch 110A, dimmer switch 110B and/or dimmer switch 110C may include a wireless communication module (e.g. circuit) operable to receive digital messages according to the proprietary RF communication protocol via the RF signals 108. The gateway device 310 (and perhaps the router 130) may communicate with the laptop 314, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C via an Ethernet based IP protocol (e.g., TCP/IP and/or "HomePlug" protocols) that may be carried via the conductors that deliver electrical energy from the AC power source 102 to the various devices such as the router 130, the gateway device 310, laptop 314, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C, among other devices illustrated in FIG. 3C.

In FIG. 3C, a communication dongle (not shown) could be connected to the wireless control device 120 that may allow for direct communication between the wireless control device 120 and the dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C using the proprietary RF communication protocol via RF signals 108. For example, the communication dongle could be plugged into a headphone jack on the wireless control device 120, or a USB port on 120. The occupancy sensor 180 and/or the remote control device 184 may communicate with the dimmer switches 110A, 110B, and/or 110C using the proprietary RF communication protocol via RF signals 108.

The router 130 may further establish IP connections and corresponding respective private IP addresses with the occupancy sensor 180, remote control device 184, dimmer switch 110A, 110B, and/or 110C. In such situations, the router 130 may coordinate one or more of the respective private IP addresses of the occupancy sensor 180, remote control device 184, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C with one or more IP connections (e.g., multimedia or data streams) that are received via the router's 130 public IP address (e.g., from the server 304 and/or 306). The router 130 may coordinate one or more of the respective public IP addresses (e.g., of the server 304 and/or server 306) with one or more IP connections (e.g., multimedia or data streams) that are sent to the router's 130 private IP address (e.g., from the occupancy sensor 180, remote control device 184, dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C).

When dimmer switch 110A, dimmer switch 110B, and/or dimmer switch 110C may be assigned private IP addresses, the wireless control device 120, the occupancy sensor 180,



## 13

and/or the remote control device **184** (among other devices with private IP addresses) may transmit RF signals **106** including Internet Protocol packets to the dimmer switch **110A**, dimmer switch **110B**, and/or dimmer switch **110C**. For example, the wireless control device **120**, the occupancy sensor **106**, the remote control device **184**, the router **130**, the laptop **312**, and/or the laptop **314** may transmit the RF signals **106** directly to the dimmer switch **110A**, dimmer switch **110B**, and/or dimmer switch **110C** via a point-to-point communication, such as a Wi-Fi communication link, e.g., an 802.11 wireless local area network (LAN), or other direct wireless communication link, e.g., a Wi-MAX communication link or a Bluetooth® communication link. The wireless control device **120**, the occupancy sensor **180**, and/or the remote control device **184** may communicate with the laptop **314**, dimmer switch **110A**, dimmer switch **110B**, and/or dimmer switch **110C** via one or more devices that have a private IP address and are connected to the AC power source **102** via an Ethernet IP based protocol (e.g., the TCP/IP and/or “HomePlug” protocols) that may be carried via the conductors that deliver electrical energy from the AC power source **102** to the various devices (e.g., router **130**, gateway device **310**, dimmer switch **110A**, dimmer switch **110B**, dimmer switch **110C**, and/or laptop **314**).

FIG. **4A** is a simplified block diagram of a first example of a dimmer switch **400A** (e.g., one of the dimmer switches **110A**, **110B**, **110C** shown in FIG. **3A**). The example dimmer switch **400A** comprises a controllably conductive device **410** coupled in series electrical connection between the AC power source **102** and the lighting load **404** for control of the power delivered to the lighting load. The controllably conductive device **410** may comprise a relay or other switching device, or any suitable type of bidirectional semiconductor switch, such as, for example, a triac, a field-effect transistor (FET) in a rectifier bridge, or two FETs in anti-series connection. The controllably conductive device **410** includes a control input coupled to a drive circuit **412**.

The dimmer switch **400A** further comprises a control circuit, e.g., a controller **414**, coupled to the drive circuit **412** for rendering the controllably conductive device **410** conductive or non-conductive to thus control the power delivered to the lighting load **404**. The controller **414** may comprise a microcontroller, a programmable logic device (PLD), a microprocessor, an application specific integrated circuit (ASIC), a field-programmable gate array (FPGA), or any suitable processing device or control circuit. A zero-crossing detector **415** determines the zero-crossings of the input AC waveform from the AC power supply **402**. A zero-crossing may be the time at which the AC supply voltage transitions from positive to negative polarity, or from negative to positive polarity, at the beginning of each half-cycle. The controller **414** receives the zero-crossing information from the zero-crossing detector **415** and provides the control inputs to the drive circuit **412** to render the controllably conductive device **410** conductive and non-conductive at predetermined times relative to the zero-crossing points of the AC waveform.

The controller **414** receives inputs from mechanical switches **416** that are mounted on a printed circuit board (not shown) of the dimmer switch **400A**, and are arranged to be actuated by buttons (e.g., the toggle actuator **114** and the intensity adjustment actuator **116**). The controller **414** also controls light-emitting diodes **418**, which are also mounted on the printed circuit board. The light emitting diodes **418** may be arranged to illuminate visual indicators (e.g., the visual indicators **118**) on a front surface of the dimmer switch **400A**, for example, through a light pipe structure (not

## 14

shown). The controller **414** is also coupled to a memory **420** for storage of unique identifiers (e.g., the MAC address and the IP address) of the dimmer switch **400A**, the SSID and the SSID password of the wireless LAN, instructions for controlling the lighting load **404**, programming instructions for communicating via a wireless communication link, or the like. The memory **420** may be implemented as an external integrated circuit (IC) or as an internal circuit of the controller **414**. A power supply **422** generates a direct-current (DC) voltage  $V_{cc}$  for powering the controller **414**, the memory **420**, and other low-voltage circuitry of the dimmer switch **400A**.

The dimmer switch **400A** further includes a wireless communication module (e.g. circuit) **430** for transmitting and receiving wireless signals (e.g., the RF signals **106** and/or **108**) to and from a wireless device (e.g., the wireless control device **120**, the gateway device **310**, and/or the wireless router **130**). For example, the wireless communication module **430** may be configured to communicate via a Wi-Fi communication link, a Wi-MAX communication link, a Clear Connect™ communication link, and/or a Bluetooth® communication link. The wireless communication module **430** may also include one or more other radio protocol modules (e.g. radios) that may be operable to communicate via a number of other protocols including Wi-Fi and/or a proprietary RF protocol such as the Clear Connect™ protocol. The dimmer switch **400A** may further include a second wireless communication module (e.g. circuit) **432** that may be configured to communicate via a Wi-Fi communication link, a Wi-MAX communication link, a Clear Connect™ communication link, and/or a Bluetooth® communication link. The wireless communication module **432** may also include one or more other radio protocol modules (e.g. radios) that may be operable to communicate via a number of other protocols including Wi-Fi and/or a proprietary RF protocol such as the Clear Connect™ protocol.

When the wireless communication modules **430** and/or **432** comprise a Wi-Fi module, the controller **414** is operable to control the lighting load **104** in response to received digital messages in Wi-Fi packets (i.e., Internet Protocol packets received via the Wi-Fi signals). If both of the wireless communication modules **430** and **432** comprise Wi-Fi modules, the modules may communicate using different frequency channels. The wireless communication module **430** and/or **432** may comprise one or more RF transceivers and one or more antennas. Examples of antennas for wall-mounted dimmer switches are described in greater detail in U.S. Pat. No. 5,736,965, issued Apr. 7, 1998, and U.S. Pat. No. 7,362,285, issued Apr. 22, 2008, both entitled COMPACT RADIO FREQUENCY TRANSMITTING AND RECEIVING ANTENNA AND CONTROL DEVICE EMPLOYING SAME, the entire disclosures of which are hereby incorporated by reference.

The dimmer switch **400A** further comprises an optical module (e.g. circuit) **440**, such as an optical signal receiving circuit for example. The optical module **440** may be optically coupled to an optical receiver (e.g., the optical receiver **119**). The optical module **440** may be coupled to the optical receiver **119** on the front surface of the dimmer switch **400A**, for example, through a light pipe (not shown), such that the optical module **440** may receive the optical signals from the wireless control device **120** via the light pipe. For example, the optical module **440** may comprise a photodiode (not shown) that is responsive to the optical signals transmitted by the wireless control device **120**. In addition, the photodiode of the optical module **440** may be controlled by the



## 15

controller 414, so as to transmit optical signals to the wireless control device 120 (as will be described in greater detail below), for example.

The wireless control device 120 may control the controllably conductive device 410 using the optical signals and/or the digital messages received via the RF signals 106 and/or RF signals 108. For example, the controller 414 may determine the module from which the signals are received, e.g., from the wireless communication module 430 and/or 432 or the optical module 440, and the controllably conductive device 410 may be controlled based on those signals. The controller 414 may also transmit messages to the wireless control device 120 via optical signals or digital messages transmitted via the RF signals 106 and/or RF signals 108. For example, the controller 414 of the dimmer switch 400A may be used to transmit digital messages to the wireless control device 120 via wireless communication. The digital messages may include alerts and/or feedback and status information regarding the lighting load 104. The digital messages may also include error messages or indications as to whether the dimmer switch 400A is able to communicate via a wireless communication link or RF signals 106 and/or RF signals 108, for example.

FIG. 4B is a simplified block diagram of a second example of a dimmer switch 400B (e.g., one of the dimmer switches 110A, 110B, 110C shown in FIG. 3B). The example dimmer switch 400B comprises a controllably conductive device 410, a drive circuit 412, a controller 414, a zero-crossing detector 415, mechanical switches 416, light-emitting diodes 418, a memory 420, a power supply 422, and an optical module 440. The elements within these devices, the functions of these devices, and/or interactions of and among these devices may be the same or similar as described with respect to FIG. 4A.

The dimmer switch 400B further includes a wireless communication module (e.g. circuit) 430 for transmitting and receiving RF signals (e.g., the RF signals 106) to and from a wireless device (e.g., the wireless control device 120, the gateway device 310, and/or the wireless router 130). For example, the wireless communication module 430 may be configured to communicate via a Wi-Fi communication link, a Wi-MAX communication link, a Clear Connect™ communication link, and/or a Bluetooth® communication link. The wireless communication module 430 may also include one or more other radio protocol modules (e.g. radios) that may be operable to communicate via a number of other protocols including Wi-Fi and/or a proprietary RF protocol such as the Clear Connect™ protocol.

The dimmer switch 400B may further include a power line interface (e.g. circuit) module 434 for transmitting and receiving signals carried on the conductors connected to the AC power source 102 via an Ethernet IP based protocol (e.g. TCP/IP, and/or a power line communication protocol such as the “HomePlug” protocol) where the conductors may deliver electrical energy from the AC power source 402 to the dimmer switch 400B. The power line interface module 434 may also transmit, receive, and/or interpret energy pulses that may be used to convey signals and/or information via the conductors may deliver electrical energy from the AC power source 402 to the dimmer switch 400B.

When the wireless communication module 430 comprises a Wi-Fi module, the controller 414 is operable to control the lighting load 404 in response to received digital messages in Wi-Fi packets (i.e., Internet Protocol packets received via the Wi-Fi signals). The wireless communication module 430 may comprise one or more RF transceivers and one or more antennas.

## 16

The wireless control device 120 may control the controllably conductive device 410 using the optical signals, the digital messages received via the RF signals 106, and/or digital messages received via the Ethernet IP based power line protocol (e.g., TCP/IP and/or “HomePlug” protocols). For example, the controller 414 may determine the module from which the signals are received, e.g., from the wireless communication module 430, the power line interface module 434, or the optical module 440, and the controllably conductive device 410 may be controlled based on those signals. The controller 414 may also transmit messages to the wireless control device 120 via optical signals or digital messages transmitted via the RF signals 106, and/or digital messages transmitted via the Ethernet IP based power line protocol. For example, the controller 414 of the dimmer switch 400B may be used to transmit digital messages to the wireless control device 120 via wireless communication. The digital messages may include alerts and/or feedback and status information regarding the lighting load 404. The digital messages may also include error messages or indications as to whether the dimmer switch 400B is able to communicate via a wireless communication link or RF signals 106, for example.

FIG. 4C is a simplified block diagram of a third example of a dimmer switch 400C (e.g., one of the dimmer switches 110A, 110B, 110C shown in FIG. 3C). The example dimmer switch 400C comprises a controllably conductive device 410, a drive circuit 412, a controller 414, a zero-crossing detector 415, mechanical switches 416, light-emitting diodes 418, a memory 420, a power supply 422, and an optical module 440. The elements within these devices, the functions of these devices, and/or interactions of and among these devices may be the same or similar as described with respect to FIG. 4A.

The dimmer switch 400C further includes a wireless communication module (e.g. circuit) 430 for transmitting and receiving RF signals (e.g., the RF signals 106 and/or 108) to and from a wireless device (e.g., the wireless control device 120, the gateway device 310, and/or the wireless router 130). For example, the wireless communication module 430 may be configured to communicate via a Wi-Fi communication link, a Wi-MAX communication link, a Clear Connect™ communication link, and/or a Bluetooth® communication link. The wireless communication module 430 may also include one or more other radio protocol modules (e.g. radios) that may be operable to communicate via a number of other protocols including Wi-Fi and/or a proprietary RF protocol such as the Clear Connect™ protocol. The dimmer switch 400C may further include a second wireless communication module (e.g. circuit) 432 that may be configured to communicate via a Wi-Fi communication link, a Wi-MAX communication link, a Clear Connect™ communication link, and/or a Bluetooth® communication link. The wireless communication module 432 may also include one or more other radio protocol modules (e.g. radios) that may be operable to communicate via a number of other protocols including Wi-Fi and/or a proprietary RF protocol such as the Clear Connect™ protocol. The dimmer switch 400C may further include a power line interface module (e.g. circuit) 434 for transmitting and receiving signals carried on the conductors connected to the AC power source 402 via an Ethernet IP based protocol (e.g. TCP/IP, and/or a power line communication protocol such as the “HomePlug” protocol) where the conductors may deliver electrical energy from the AC power source 402 to the dimmer switch 400C. The power line interface module 434 may also transmit, receive, and/or interpret energy pulses



17

that may be used to convey signals and/or information via the conductors may deliver electrical energy from the AC power source **402** to the dimmer switch **400C**.

When the wireless communication modules **430** and/or **432** comprise a Wi-Fi module, the controller **414** is operable to control the lighting load **404** in response to received digital messages in Wi-Fi packets (i.e., Internet Protocol packets received via the Wi-Fi signals). The wireless communication module **430** and/or **432** may comprise one or more RF transceivers and one or more antennas.

The wireless control device **120** may control the controllably conductive device **410** using the optical signals and/or the digital messages received via the RF signals **106** and/or RF signals **108**. For example, the controller **414** may determine the module from which the signals are received, e.g., from the wireless communication module **430** and/or **432** or the optical module **440**, and the controllably conductive device **410** may be controlled based on those signals. The controller **414** may also transmit messages to the wireless control device **120** via optical signals or digital messages transmitted via the RF signals **106** and/or RF signals **108**. For example, the controller **414** of the dimmer switch **400C** may be used to transmit digital messages to the wireless control device **120** via wireless communication. The digital messages may include alerts and/or feedback and status information regarding the lighting load **404**. The digital messages may also include error messages or indications as to whether the dimmer switch **400C** is able to communicate via a wireless communication link or RF signals **106** and/or RF signals **108**, for example.

FIG. **5A** a first simplified example block diagram of an input device, e.g., a remote control device **500A** (such as, the remote control device **184** of FIGS. **3A-3C**). The example remote control device **500A** may include devices such as a controller **514**, a memory **520**, a wireless communication module **530**, and/or a wireless communication module **532**. One or more of the elements within these devices, one or more of the functions of these devices, and/or one or more of the interactions of and among these devices may be the same or similar as described with respect to FIG. **4A**. The remote control device **500A** may also include a battery power supply **550** that may provide electrical power to the one or more devices included in the remote control device **500A**, such as the controller **514**.

The example remote control device **500A** may also include buttons **552**, visual indicators **556**, and/or a battery **550**. The controller **514** of the remote control device **500A** may be configured to receive commands input via the one or more buttons **552**. The one or more buttons **552** may include one or more soft buttons or one or more hard buttons (e.g., physical buttons or manual operators). For example, the controller **514** may interpret inputs via the one or more buttons **552** as user commands intended for one or more devices (e.g., a dimmer switch). Again by way of example, a user may contact one button of the one or more buttons **552** of remote control device **500A** to order the appropriate dimmer switch (e.g., the dimmer switch **110A**) to adjust the intensity of a lighting load (e.g., the lighting load **104A**) to 50%, among many other configurable adjustments. The controller **514** of the remote control device **500A** may interpret the signal from the one button of the one or more buttons **552** as a command to order the dimmer switch **110A** to perform the adjustment to 50%.

The controller **514** may communicate the command to the dimmer switch **110A** via one or more wireless signals sent via wireless communication module **530** and/or **532** (e.g., in a manner that is the same or similar to the functions

18

described with respect to communication modules **430** and/or **432** as described with regard to FIG. **4A**). The controller **514** of the remote control device **500A** may be configured to control one or more visual indicators **556** to provide the user with one or more feedback or status indications (e.g. at least for a period of time). For example, one indicator of the one or more indicators **556** may indicate (e.g. for some period of time) that one or more buttons **552** may have been activated by a user (e.g. as interpreted by the controller **514**). Also by way of example, one indicator of the one or more indicators **556** may indicate (e.g., for a period of time) that the dimmer switch **110A** has received the command from the controller **414** to perform an adjustment (e.g. as input by the user) of the lighting load **104A**. Also by way of example, one indicator of the one or more indicators **556** may indicate that that battery **550** is at a low level of charge.

FIG. **5B** a second simplified example block diagram of an input device, e.g., a remote control device **500B** (such as the remote control device **184** of FIGS. **3A-3C**). The remote control device **500B** may include one or more of the same or similar functional blocks as those included and described with respect to the remote control device **500A** of FIG. **5A**. The one or more of the elements within these functional blocks, one or more of the functions of these functional blocks, and/or one or more of the interactions of and among these functional blocks may be the same or similar as described with respect to FIG. **4A** and FIG. **5A**. The remote control device **500B** may operate with just the wireless communication module **530** in lieu of both the wireless communication modules **530** and **532**.

FIG. **5C** is a first simplified example block diagram of a sensor device, e.g., an occupancy sensor **500C** (such as the occupancy sensor **180** of FIGS. **3A-3C**). The occupancy sensor **500C** may include one or more of the same or similar functional blocks as those included and described with respect to the remote control device **500A** of FIG. **5A**. The one or more of the elements within these functional blocks, one or more of the functions of these functional blocks, and/or one or more of the interactions of and among these functional blocks may be the same or similar as described with respect to FIG. **4A** and FIG. **5A**.

The occupancy sensor **500C** may also include at least one sensor circuit **554**. The at least one sensor circuit **554** may detect the presence (or lack thereof) of people in a given area of sensor effectiveness. The controller **514** of the occupancy sensor **500C** may be configured to receive a signal from the at least one sensor **554**, interpret the signal as indicating a presence or absence of people in the given area of sensor effectiveness (perhaps for a period of time), and/or send one or more commands to other devices based on the interpreted presence of people or lack thereof. For example, should the controller **514** of the occupancy sensor **500C** interpret the at least one sensor **554** to report the lack of presence in the given area of effectiveness (perhaps for some period of time, e.g., 60 seconds), the controller may send respective commands to wireless devices, e.g., to one or more of the dimmer switches **110A**, **110B**, and/or **110C** to lower the respective intensities of the lighting loads **104A**, **104B**, and/or **104C** (e.g., shutoff all the lights when all people have left the room). Also by way of example, should the controller **514** of the occupancy sensor **500C** interpret the at least one sensor **554** to report a transition from a lack of any presence to the presence of at least one person in the given area of effectiveness, the controller may send respective commands to one or more of the dimmer switches **110A**, **110B**, and/or **110C** to increase the respective intensities of the lighting loads **104A**, **104B**, and/or **104C** (e.g., turn at least some of



19

the lights when at least one person enters the area of sensor effectiveness). The controller **514** of the occupancy sensor **500C** may communicate the command to the dimmer switch **110A**, dimmer switch **110B**, and/or dimmer switch **110C** via one or more wireless signals sent via wireless communication module **530** and/or **532** (e.g., in a manner that is the same or similar to the functions described with respect to communication modules **430** and/or **432** as described with regard to FIG. **4A**).

FIG. **5D** a second simplified example block diagram of a sensor device (such as the occupancy sensor **180** of FIGS. **3A-3C**). The occupancy sensor **500D** may include one or more of the same or similar functional blocks as those included and described with respect to the occupancy sensor **500C** of FIG. **5C**. The one or more of the elements within these functional blocks, one or more of the functions of these functional blocks, and/or one or more of the interactions of and among these functional blocks may be the same or similar as described with respect to FIG. **4A**, FIG. **5A**, and FIG. **5A**. The occupancy sensor **500D** may operate with just the wireless communication module **530** in lieu of both the wireless communication modules **530** and **532**.

FIG. **5E** is a simplified example block diagram of a contemplated combination input and sensor device **500E** which may be employed in the environments of FIGS. **3A-3C**. The combination input/sensor device **500E** may include one or more of the same or similar functional blocks as those included and described with respect to the remote control device **500A** and **500B** and the occupancy sensor **500C** and **500D** that may be employed in the environments of FIGS. **3A-3C**. The one or more of the elements within these functional blocks, one or more of the functions of these functional blocks, and/or one or more of the interactions of and among these functional blocks may be the same or similar as described with respect to FIG. **4A**, FIG. **5A**, and FIG. **5C**.

As described previously, any of the devices of the network environments **300A-300C** of FIGS. **3A-3C** (e.g. wireless control device **120**, dimmer switches **110A**, **110B**, and/or **110C**, router **130**, occupancy sensor **180**, remote control **184**, laptops **312** and/or **314**, among others shown and not shown) for a number of contemplate purposes, may include one or more radios. For example, any of the devices of the network environments **300A-300C** may include at least one radio that may be operable to transmit via multiple protocols (e.g., the Wi-Fi and/or the Clear Connect™ protocols) over multiple communication networks, wired and/or wireless, which may be operable to communicate with the respective protocols. Alternatively or additionally, any of the devices of the network environments **300A-300C** may include at least one radio that may be operable to transmit/receive via at least one protocol (e.g., the Wi-Fi protocol) and at least a second radio that may be operable to transmit/receive via at least another protocol (e.g., a proprietary RF protocol like the Clear Connect™ protocol) over multiple communication networks, wired and/or wireless, that may be operable to communicate with the respective protocols.

One or more, or any, of the devices of the network environments **300A-300C** may serve as a master gateway node (e.g., may be elected by the other devices to serve as the master gateway node). The master gateway node may serve as a Dynamic Host Configuration Protocol (DHCP) node (or function), for example. The master gateway node may provide one or more, or any, of the other devices of the network environments **300A-300C** with information that may enable the one or more other devices to connect to the Wi-Fi network (e.g., an IP based protocol). By way of

20

example, and not limitation, the master gateway node may provide the one or more devices of the network environments **300A-300C** with a service set identifier (SSID), an SSID password, a wireless security password or key value such as a WEP password/key or a WPA password/key, and/or an IP address, and/or other credentials or access information to enable the respective devices to connect (or register) to the Wi-Fi protocol network (e.g., via the router **130**). Such Wi-Fi access information may be preconfigured on any of the respective devices of the network environments **300A-300C**.

The Wi-Fi access information may be provided to the one or more devices of the network environments **300A-300C** via a reliable broadcast-capable RF protocol, such as the previously described Clear Connect™ protocol, either approximately at a time that it may be useful for the one or more devices to join the Wi-Fi communication network, or at some time earlier. For example, the Wi-Fi access information (e.g., even if preconfigured) for the one or more devices may be updated by the master gateway node either periodically or under certain conditions. Also, the master gateway node may provide an indication (e.g., via the Clear Connect™ protocol) to the one or more devices of the network environments **300A-300C** that may invite the one or more devices to use the Wi-Fi protocol access information to communicate, at least temporarily (e.g., for a firmware upgrade), with one or more devices of the network environments **300A-300C** (e.g., the master gateway node or any other device of the network environments **300A-300C**). For example, perhaps after the invited node may have completed the function for which it was invited to join the Wi-Fi network (e.g., a firmware upgrade is fully communicated and/or completed), the master gateway node may signal (e.g., via the Wi-Fi and/or Clear Connect™ protocols) the invited node to discontinue Wi-Fi communication and/or to leave the Wi-Fi network. By requesting that the invited node discontinue Wi-Fi communication and/or to leave the Wi-Fi network, the burden on the router **130** and/or Wi-Fi communication may be minimized. Alternatively or additionally, the invited node may be configured to discontinue Wi-Fi communication and/or to leave the Wi-Fi network after the completion of the function for which it was invited to communicate via Wi-Fi and/or after the end of a timeout period (e.g., the invited node may leave the Wi-Fi network on its own determination and without being requested to leave the Wi-Fi network).

Alternatively or additionally, the one or more devices of the network environments **300A-300C** may use the Wi-Fi access information to communicate with one or more other devices of the network environments **300A-300C** at a time and/or under a condition determined by the one or more devices of the network environments **300A-300C** that may be in possession of Wi-Fi access information. For example, dimmer switch **110A** may use its respective Wi-Fi access information to join the Wi-Fi communication network to communicate data or information (e.g., to communication monitoring database information to one or other devices of the network environments **300A-300C**) via the Wi-Fi protocol, (e.g., perhaps because its monitoring database may have become full). After the dimmer switch **110A** communicates the data or information, the dimmer switch **110A** may discontinue communication via the Wi-Fi protocol until such time as the dimmer switch **110A** may be invited to (or may decide itself to) communicate once again via the Wi-Fi protocol. In addition, when a button of an input device (e.g., the remote control device **184**) is actuated, the input device may use its respective Wi-Fi access information to join the



Wi-Fi communication network to communicate information regarding an actuation of the button. Further, a sensor device (e.g., the occupancy sensor **180**) may use its respective Wi-Fi access information to join the Wi-Fi communication network to communicate information regarding an occupancy or vacancy condition. Alternatively, a sensor device, such as a daylight sensor, may periodically use its respective Wi-Fi access information to join the Wi-Fi communication network to communicate information regarding an ambient light intensity measured in a space.

The Wi-Fi protocol may be useful via which to communicate high bandwidth data (e.g. configuration data such as firmware upgrades and/or data for relatively sophisticated user interfaces, programming data, and/or database data management) among Wi-Fi capable (IP capable) devices. A reliable broadcast-capable RF protocol, such as the previously described Clear Connect™ protocol may be useful via which to communicate relatively low bandwidth data and/or relatively high performance signaling information (e.g. operational data such as operational commands, operational (runtime) error codes, programming error codes, and/or timing synchronization signals, among other relatively high performance data). It may be useful to allocate high bandwidth data signaling (e.g. firmware upgrades, user interface data, and/or database information transfer) more to Wi-Fi protocol communication so that reliable broadcast-capable RF protocol communication, such as via the Clear Connect™ protocol, may be allocated for the relatively high performance data signaling (e.g. time synchronization signaling).

For example, radios using the Wi-Fi protocol may communicate at a frequency of 2.4 GHz. This frequency may be considered part of the industrial, scientific, and medical (ISM) radio band—which may fairly crowded, may be widely available, and may be generally considered to be an unlicensed band. Radios may communicate using the Wi-Fi protocol at a range of 120 to 300 feet (with 802.11n, up to double these ranges may be possible), for example. Radios may communicate using the Wi-Fi protocol at a rate of up to 54 Mbits/s (802.11g) and/or 300 Mbit/s (802.11n), with an average data rate of approximately 22 Mbit/s, for example. Radios may communicate via Wi-Fi with an output power of approximately 20-100 mW (13-20 dBm).

For example, radios using the Clear Connect™ protocol may communicate at frequencies of 434 MHz and/or 868 MHz (perhaps based on regional factors). The 434 MHz and 868 MHz bands may be far less crowded than other bands and may be licensed, and may be subject to a relatively stringent set of regulations, including the United States' Federal Communications Commission (FCC) regulations that may limit transmit power and/or duty cycle, for example. Radios may communicate using the Clear Connect™ protocol at a range of 30 to 60 feet indoor and/or 300 feet open air (perhaps extendable via repeaters), for example. Radios may communicate using the Clear Connect™ protocol at a rate of up to 62.5 Kbit/s, for example. Radios may communicate via the Clear Connect™ protocol with an output power of approximately 4 mW (5 dBm).

FIG. 6 is a diagram that illustrates wireless communication network access activity for one or more contemplated devices and techniques. At **6002**, one or more devices, such as the dimmer switch **110A**, dimmer switch **110B**, dimmer switch **110C**, the occupancy sensor **180**, and/or the remote control device **184**, and other devices from environments **300A-300C** (both shown and not shown), may not be communicating via a wireless communication network (e.g., a wireless local area network (LAN)) in which communi-

cation may be conducted via a particular wireless protocol, for example the Wi-Fi protocol. By not communicating on the Wi-Fi communication network, the respective device or devices may not place a burden on the Wi-Fi communication network and/or the router **130**. While the respective device or devices may not be communicating on the Wi-Fi communication network, the device or devices may or may not be operating on another wireless communication network (e.g. a Clear Connect™ protocol network) and/or a wired communication network (e.g., a wired TCP/IP network or a power line protocol network). At **6004**, one or more of the devices may, perhaps to execute a particular task, receive a trigger from another device to access the Wi-Fi communication network. Alternatively or additionally, the device may determine an internal trigger condition to access the Wi-Fi communication network.

At **6006**, the device or devices may access the Wi-Fi communication network, perhaps with access information provided by another device or preconfigured on the accessing device or devices. While on the Wi-Fi communication network the device or devices may execute the tasks or tasks that may have been part of the trigger for the device or devices to access the Wi-Fi communication network. At **6008**, perhaps either after completing the task, after some predetermined time, and/or after receiving a disconnect signal from another device, the device or devices may leave the Wi-Fi communication network.

Referring to FIG. 7 and in view of FIGS. 3A-3C, a contemplated technique **7000** may start at **7002** and may include, at **7004**, sending Wi-Fi connection information (e.g., from the master gateway node) to a targeted device of a network environment (e.g., dimmer switch **110A** or other load control device) via a proprietary RF protocol (e.g., the Clear Connect™ protocol). At **7006**, another node in the network environment may decide to communicate a firmware upgrade to the targeted device. At **7008**, the targeted node may be signaled (e.g. via the master gateway node) to use the Wi-Fi connection information to establish a Wi-Fi communication connection (e.g., with the router **130**) via a proprietary RF protocol (e.g., Clear Connect™ protocol).

At **7010**, the targeted device may use the Wi-Fi connection information to establish itself on the Wi-Fi network and commence Wi-Fi communication (e.g., via the IP address provided by the master gateway node). At **7012**, send the firmware upgrade data to the targeted device via the Wi-Fi communication network (e.g., the master gateway device and/or via the IP address of the targeted device). At **7014**, upon the completion of the firmware upgrade data transfer and/or a successful firmware upgrade, the targeted device may receive a request (e.g., via the master gateway node) to terminate Wi-Fi communication and/or leave the Wi-Fi network. Alternatively or additionally, at **7014**, upon the completion of the firmware upgrade data transfer and/or a successful firmware upgrade, the targeted device may determine a condition and/or period of time to terminate Wi-Fi communication and/or leave the Wi-Fi network. At **7016**, the targeted device may terminate the Wi-Fi connection and/or leave the Wi-Fi network upon the condition being satisfied or the request being received. At **7018**, the technique may end and may resume at **7002** as often as required to accommodate user configured load control functions for the network environments **300A-300C**.

While the present application has been described with reference to the dimmer switches **110**, and the wireless control devices **120**, the concepts of the contemplated devices and techniques could be applied to any control devices that are operable to communicate with each other,



23

such as, for example, dimming ballasts for driving gas-discharge lamps; light-emitting diode (LED) drivers for driving LED light sources; screw-in luminaires including integral dimmer circuits and incandescent or halogen lamps; screw-in luminaires including integral ballast circuits and compact fluorescent lamps; screw-in luminaires including integral LED drivers and LED light sources; electronic switches, controllable circuit breakers, or other switching devices for turning appliances on and off; plug-in load control devices, controllable electrical receptacles, or controllable power strips for each controlling one or more plug-in loads; motor control units for controlling motor loads, such as ceiling fans or exhaust fans; drive units for controlling motorized window treatments or projection screens; motorized interior or exterior shutters; thermostats for a heating and/or cooling systems; temperature control devices for controlling setpoint temperatures of HVAC systems; air conditioners; compressors; electric baseboard heater controllers; controllable dampers; humidity control units; dehumidifiers; water heaters; pool pumps; televisions; computer monitors; audio systems or amplifiers; generators; electric chargers, such as electric vehicle chargers; an alternative energy controllers; occupancy sensors, vacancy sensors, daylight sensors, temperature sensors, humidity sensors, security sensors, proximity sensors, keypads, battery-powered remote controls, key fobs, cell phones, smart phones, tablets, personal digital assistants, personal computers, timeclocks, audio-visual controls, safety devices, and central control transmitters.

Additionally, the techniques described herein may be implemented as a set of computer-executable instructions stored on a computer-readable medium, such as a random-access or read-only memory for example. Such computer-executable instructions may be executed by a processor or microcontroller, such as a microprocessor, within the dimmer switch 110 or the wireless control device 120, for example.

What is claimed is:

1. A wireless control device for use in a load control system for controlling power delivered from a power source to an electrical load, the wireless control device comprising:

a first wireless communication circuit configured to communicate digital messages via a first wireless communication network; and

a control circuit in communication with the first wireless communication circuit, the control circuit configured to join the first wireless communication network and communicate digital messages via the first wireless communication network using a first protocol;

wherein the control circuit is configured to:

determine an occurrence of a first condition;  
join the first wireless communication network upon the first condition being satisfied;  
determine an occurrence of a second condition; and  
disconnect from the first wireless communication network upon the second condition being satisfied.

2. The wireless control device of claim 1, wherein the control circuit is configured to communicate digital messages via a second wireless communication network using a second protocol.

3. The wireless control device of claim 2, further comprising:

a second wireless communication circuit configured to communicate digital messages via the second wireless communication network, the control circuit being in communication with the second wireless communication circuit.

24

4. The wireless control device of claim 3, wherein the first condition comprises the reception of a first digital message via the second wireless communication network, the first digital message including a request to join the first wireless communication network.

5. The wireless control device of claim 4, wherein the second condition comprises the completion of a task.

6. The wireless control device of claim 5, wherein the control circuit is configured to complete the task by communicating via the first wireless communication network after joining the first wireless communication network upon the first condition being satisfied.

7. The wireless control device of claim 4, wherein the control circuit is configured to receive one of firmware upgrade data, configuration data, and database data via the first wireless communication network after joining the first wireless communication network upon the first condition being satisfied.

8. The wireless control device of claim 7, wherein the second condition comprises a completion of the reception of the one of firmware upgrade data, configuration data, and database data via the first wireless communication network.

9. The wireless control device of claim 4, wherein the first protocol is a wireless Internet Protocol (IP) based protocol, and the control circuit is configured to connect to the Internet via the first wireless communication network after joining the first wireless communication network upon the first condition being satisfied.

10. The wireless control device of claim 4, wherein the second condition comprises an expiration of a predetermined amount of time since the control circuit joined the first wireless communication network.

11. The wireless control device of claim 4, wherein the second condition comprises a reception of a second digital message via the second wireless communication network, the second digital message including a request to disconnect from the first wireless communication network.

12. The wireless control device of claim 2, wherein the control circuit is configured to receive network access information for the first wireless communication network in a digital message received via the second wireless communication network.

13. The wireless control device of claim 1, further comprising:

a sensor circuit configured to generate a signal that is received by the control circuit.

14. The wireless control device of claim 13, wherein the first condition comprises a change in the signal generated by the sensor circuit, the control circuit configured to join the first wireless communication network in response to detecting the change in the signal generated by the sensor circuit and to transmit a digital message including information regarding the change in the signal generated by the sensor circuit via the first wireless communication network.

15. The wireless control device of claim 14, wherein the change in the signal generated by the sensor circuit indicates an occupancy or vacancy condition in an area in which the wireless control device is installed, the control circuit configured to include information regarding the occupancy or vacancy condition in the digital message transmitted via the first wireless communication network.

16. The wireless control device of claim 14, wherein the change in the signal generated by the sensor circuit indicates a change in an ambient light level in an area in which the wireless control device is installed, the control circuit con-



25

figured to include information regarding the ambient light level in the digital message transmitted via the first wireless communication network.

17. The wireless control device of claim 14, wherein the second condition comprises a completion of the transmission of the digital message including information regarding the change in the signal generated by the sensor circuit via the first wireless communication network.

18. The wireless control device of claim 14, wherein the second condition comprises an expiration of a predetermined amount of time since the control circuit joined the first wireless communication network.

19. The wireless control device of claim 13, wherein the control circuit is configured to receive the signal and interpret the signal as indicating an occupancy or vacancy condition in an area in which the wireless control device is installed; and

wherein the first condition comprises a detection of an occupancy or vacancy condition by the sensor circuit, the control circuit configured to join the first wireless communication network in response to the sensor circuit detecting the occupancy or vacancy condition and to transmit a digital message including information regarding the occupancy or vacancy condition via the first wireless communication network.

20. The wireless control device of claim 19, wherein the second condition comprises a completion of the transmission of the digital message including information regarding the occupancy or vacancy condition via the first wireless communication network.

21. The wireless control device of claim 13, wherein the control circuit is configured to receive the signal, and the first condition comprises a determination by the control circuit to communicate via the first wireless communication network according to a periodic function.

22. The wireless control device of claim 13, wherein the control circuit is configured to periodically join the first wireless communication network and transmit a digital message including information regarding an ambient light level in an area in which the wireless control device is installed.

23. The wireless control device of claim 1, further comprising:

26

one or more buttons for receiving user inputs; wherein the control circuit is responsive to the user inputs received via the one or more buttons.

24. The wireless control device of claim 23, wherein the first condition comprises a detection of actuation of one or more of the one or more buttons by the control circuit, the control circuit configured to join the first wireless communication network in response to detecting the actuation of one or more of the one or more buttons and to transmit a digital message including information regarding the actuation of one or more of the one or more buttons via the first wireless communication network.

25. The wireless control device of claim 24, wherein the second condition comprises a completion of the transmission of the digital message including information regarding the actuation of one or more of the one or more buttons via the first wireless communication network.

26. The wireless control device of claim 24, wherein the second condition comprises an expiration of a predetermined amount of time since the control circuit joined the first wireless communication network.

27. The wireless control device of claim 1, further comprising:

a controllably conductive device adapted to be electrically coupled in series between the power source and the electrical load;

wherein the control circuit is configured to control the controllably conductive device to control the power delivered to the electrical load in response to digital messages received via the first wireless communication network.

28. The wireless control device of claim 27, wherein the control circuit is configured to transmit digital messages including status information regarding the electrical load.

29. The wireless control device of claim 1, wherein the first protocol is a wireless Internet Protocol (IP) based protocol.

30. The wireless control device of claim 29, wherein the wireless IP based protocol is a Wi-Fi protocol.

31. The wireless control device of claim 1, wherein the control circuit is configured to transmit a digital message including a command for controlling the electrical load via the first wireless communication network after joining the first wireless communication network upon the first condition being satisfied.

\* \* \* \* \*