

**ORIGINAL**

RECEIPT NUMBER  
560476

22

**UNITED STATES DISTRICT COURT  
EASTERN DISTRICT OF MICHIGAN  
SOUTHERN DIVISION**

ALTAIR ENGINEERING, Inc., a Michigan Corporation  
Plaintiff,

vs.

HIGH TECH GLOBAL GROUP CO., LTD., a Taiwanese Corporation  
Defendant.

Thomas N. Young (P22656)  
Christopher G. Darrow (P67196)  
YOUNG & BASILE, P.C.  
3001 W. Big Beaver Rd., Ste. 624  
Troy, MI 48084-3107  
(248) 649-3333  
Attorneys for Plaintiff

Case: 2:07-cv-13276  
Assigned To: Hood, Denise Page  
Referral Judge: Scheer, Donald A  
Filed: 08-06-2007 At 03:44 PM  
CMP ALTAIR ENGINEERING INC V HIGH  
TECH GLOBAL GROUP CO LTD (EW)

**COMPLAINT FOR PATENT INFRINGEMENT  
AND DEMAND FOR JURY TRIAL**

Altair Engineering, Inc., hereby complains for patent infringement against the Defendant High Tech Global Group Co., Ltd. as follows:

**PARTIES**

1. Plaintiff, Altair Engineering, Inc. is a Michigan corporation headquartered at 1820 E. Big Beaver Rd., Troy, Michigan 48083, within this judicial district, and is the owner by assignment of United States Patent No. 7,049,761 which protects a novel LED-based replacement for fluorescent lights.

2. Defendant, High Tech Global Group Co., Ltd. is a Taiwanese corporation with offices at 7F-1, No. 339, Chung Cheng Rd., Pan Chiao City, Taipei Hsien, Taiwan, R.O.C. On information and belief, Defendant manufactures in China and sells in the United States an LED-

based fluorescent tube replacement light which is of a type covered by one or more claims of the Altair Engineering, Inc. patent as detailed below.

### JURISDICTION AND VENUE

3. This action arises under the patent laws of the United States, more specifically 35 U.S.C. § 271 *et seq.*

4. This Court has jurisdiction under 28 U.S.C. §§ 1331 and 1338.

5. Venue is proper in this Court under 28 U.S.C. § 1391(d) as the Defendant is an alien corporation.

### COUNT FOR PATENT INFRINGEMENT

The allegations of paragraphs 1-5 above are incorporated into this Count as if set forth herein in full.

6. On May 23, 2006, United States Patent No. 7,049,761 was duly issued to Altair Engineering, Inc. as the assignee of Jos Timmermans, and Jean C. Raymond. The invention of the patent is entitled "Light Tube and Power Supply Circuit" and a copy is attached hereto as **Exhibit A**. The patent was issued with 26 claims which cover and protect various aspects of a LED-based replacement light for fluorescent tubes. Plaintiff has the right to sue and recover for infringement of the '761 patent.

7. On information of belief Defendant High Tech Global Co., Ltd., without right, authority or license from Plaintiff, manufactures in China and both offers for sale and sells in the United States LED based fluorescent tube replacement lights identified as model no. RG-15-

W/V/V1 and model no. RG-8-W/V/V/1. The offer for sale and sale of aforementioned lights in the United States literally infringes at least claims 2, 3, 4, 6, 8, and 9 of U.S. Patent No. 7,049,761. Plaintiff reserves the right to modify and/or add to this list of claims on the basis of information gathered as the lawsuit progresses.

8. Plaintiff Altair Engineering, Inc. has been damaged and will continue to be damaged by Defendant's infringement of the '761 patent in an amount which can only be determined through an accounting and is without an adequate remedy at law.

**PRAYER FOR RELIEF**

WHEREFORE, Altair Engineering, Inc. prays for the following relief:


- A. A preliminary and final injunction against continued infringement of the '761 patent by Defendant and all persons in privity with Defendant barring the importation of infringing lights into the United States, and barring the distribution and sale and offer for sale of infringing lights in the United States;
- B. An accounting for damages resulting from Defendant's sale and offer for sale of infringing products in the United States;
- C. An award of treble damages against Defendant pursuant to 35 U.S.C. § 284 on account of Defendant's willful infringement of the '761 patent;
- D. An assessment of interest on the damages so computed;
- E. An award of Plaintiff's costs, expenses and attorney fees in the action; and
- F. Such other and further relief as the Court deems appropriate.

**DEMAND FOR JURY TRIAL**

Altair Engineering, Inc. demands trial by jury as to all issues triable by jury in this case as a matter of right.

Respectfully Submitted,

YOUNG & BASILE, P.C.

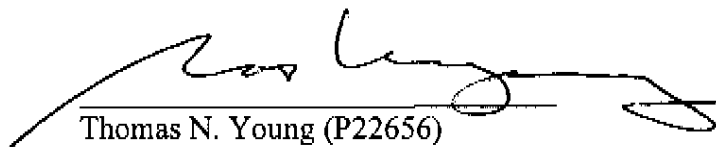

Thomas N. Young (P22656)  
Christopher G. Darrow (P67196)  
YOUNG & BASILE, P.C.  
3001 W. Big Beaver Rd. Suite 624  
Troy, MI 48084  
248.649.3333  
*Attorneys for Plaintiff*

Dated: August 3, 2007

# **EXHIBIT A**



US007049761B2

(12) **United States Patent**  
**Timmermans et al.**

(10) **Patent No.:** US 7,049,761 B2  
(45) **Date of Patent:** May 23, 2006

(54) **LIGHT TUBE AND POWER SUPPLY CIRCUIT**

(75) **Inventors:** **Jaw Timmermans**, Dearborn, MI (US);  
**Jean C. Raymond**, Montreal (CA)

(73) **Assignee:** **Altair Engineering, Inc.**, Troy, MI (US)

(\* **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 375 days.

(21) **Appl. No.:** 09/782,375

(22) **Filed:** Feb. 12, 2001

(65) **Prior Publication Data**

US 2002/0060526 A1 May 23, 2002

**Related U.S. Application Data**

(60) **Provisional application No.** 60/181,744, filed on Feb. 11, 2000.

(51) **Int. Cl.**  
**H05B 37/02** (2006.01)

(52) **U.S. CL** ..... 315/246; 315/291; 315/185 S

(58) **Field of Classification Search** ..... 315/146, 315/291, 185 S, 312, 324, 192, 185 R, 295, 315/246, 187, 294, 56, 200 A, 61; 340/815.45; 362/488, 240, 219, 800, 369, 545, 288, 249  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,581,687 A	4/1986	Nakamihi	
4,748,545 A *	5/1988	Schmitt	362/219
5,388,357 A	2/1995	Malina	
5,463,280 A *	10/1995	Johnson	315/187
5,575,459 A	11/1996	Anderson	
5,607,227 A	3/1997	Yasumoto et al.	
5,655,830 A	8/1997	Ruskowski	
5,688,042 A *	11/1997	Madadi et al.	362/240
5,697,695 A	12/1997	Lin et al.	

5,726,535 A *	3/1998	Yan	315/185 R
5,813,751 A *	9/1998	ShuDer	362/222
5,890,794 A *	4/1999	Altabi et al.	362/183
5,924,784 A *	7/1999	Chliwnyj et al.	362/234
5,949,347 A *	9/1999	Wu	340/815.45
6,072,280 A *	6/2000	Allen	315/185 S
6,158,882 A *	12/2000	Bischoff, Jr.	362/488
6,305,109 B1 *	10/2001	Lee	40/546
6,325,651 B1 *	12/2001	Nishihara et al.	439/237
6,371,637 B1 *	4/2002	Atchinson et al.	362/555
6,394,623 B1 *	5/2002	Tsui	362/249
6,577,072 B1 *	6/2003	Saito et al.	315/185 R
6,582,103 B1 *	6/2003	Popovich et al.	362/707
6,621,222 B1 *	9/2003	Hong	315/51

**OTHER PUBLICATIONS**

Web page at <http://trucklite.com/leds14.html> printed on Jan. 13, 2000.

Web page at <http://trucklite.com/leds2.html> printed on Jan. 13, 2000.

Web page at <http://trucklite.com/leds4.html> printed on Jan. 13, 2000.

Web page at [http://www.telecite.com/en/products/options\\_en.htm](http://www.telecite.com/en/products/options_en.htm) printed on Jan. 13, 2000.

Web page at <http://www.dialight.com/trans.htm> printed on Jan. 13, 2000.

Web page at <http://www.ledlights.com/replac.htm> printed on Jan. 13, 2000.

Lectronics, apparently 1996 Catalog, apparently cover page and p. 10.

\* cited by examiner

*Primary Examiner*—Wilson Lee


*Assistant Examiner*—Chue Tran

(74) *Attorney, Agent, or Firm*—Young & Basile, P.C.

(57) **ABSTRACT**

The present invention provides a light tube for illumination by a power supply circuit including a bulb portion and a pair of end caps disposed at opposite ends of the bulb portion. A plurality of light emitting diodes are disposed inside the bulb portion and in electrical communication with the pair of end caps for illuminating in response to electrical current to be received from the power supply circuit.

26 Claims, 10 Drawing Sheets

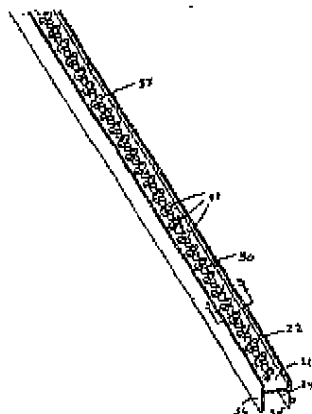

U.S. Patent

May 23, 2006

Sheet 1 of 10

US 7,049,761 B2

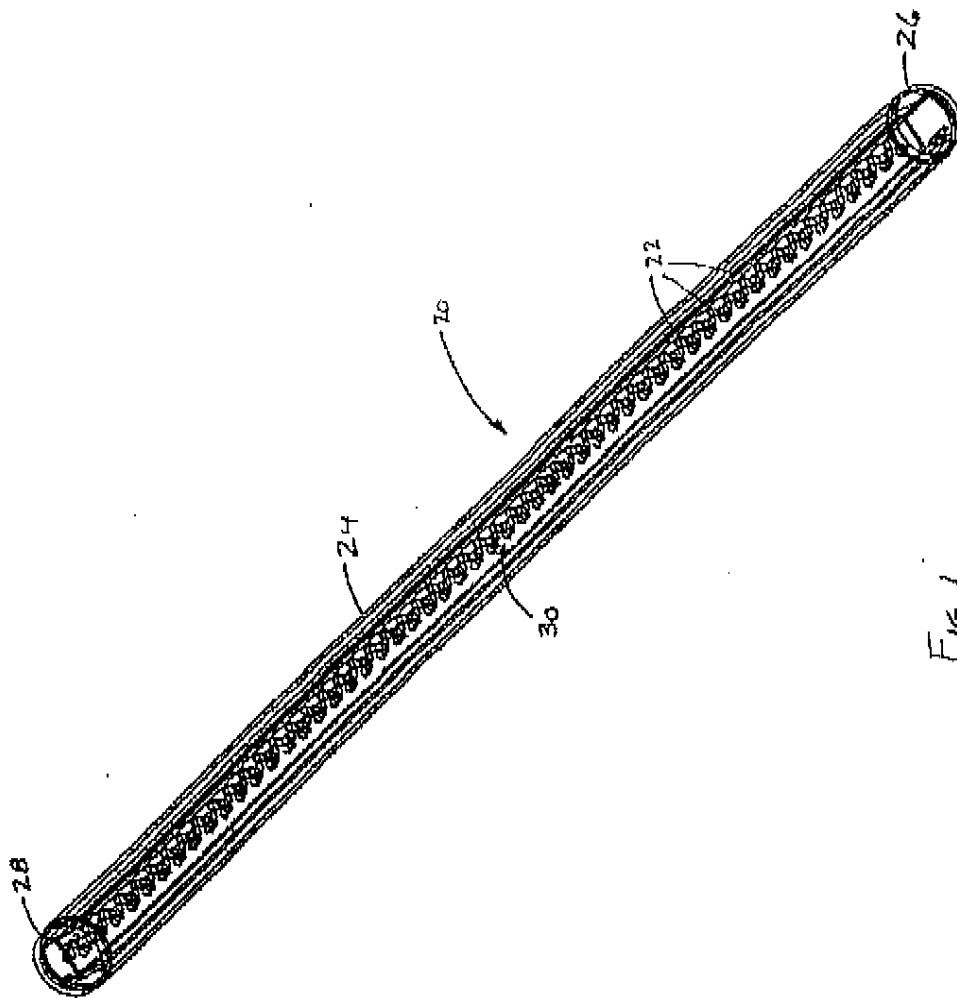


FIG. 1

U.S. Patent

May 23, 2006

Sheet 2 of 10

US 7,049,761 B2

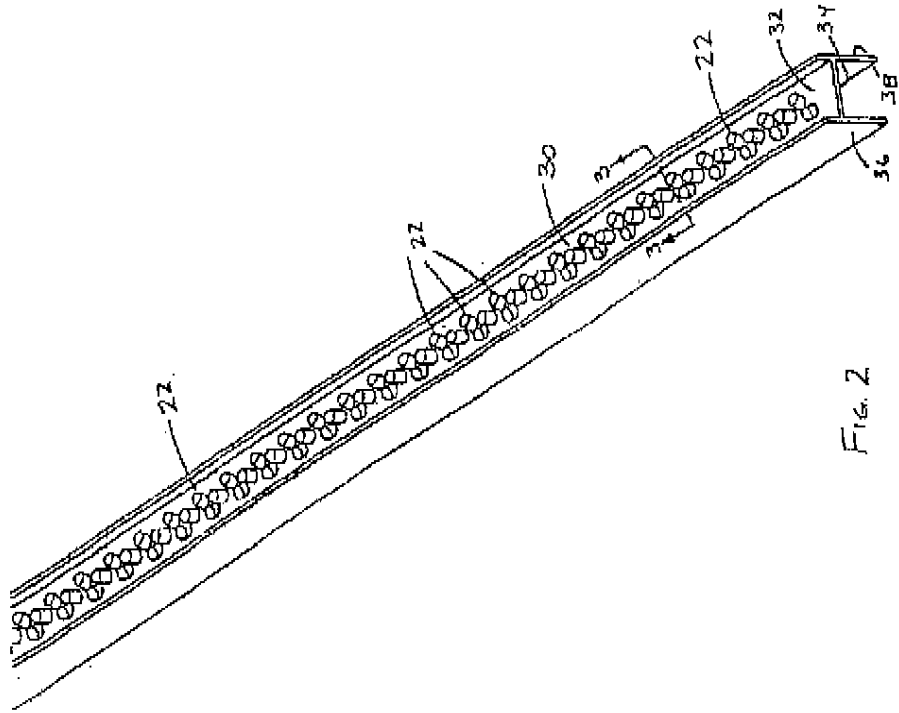


FIG. 2



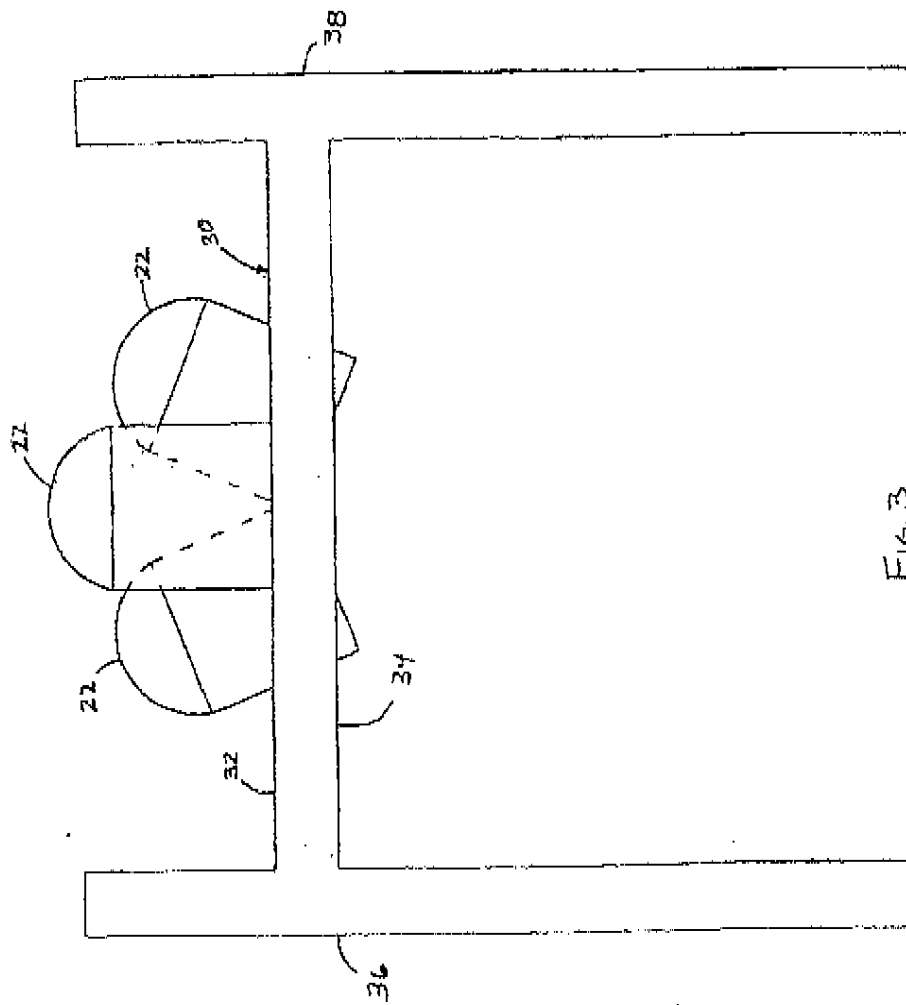


FIG. 3

U.S. Patent

May 23, 2006

Sheet 4 of 10

US 7,049,761 B2

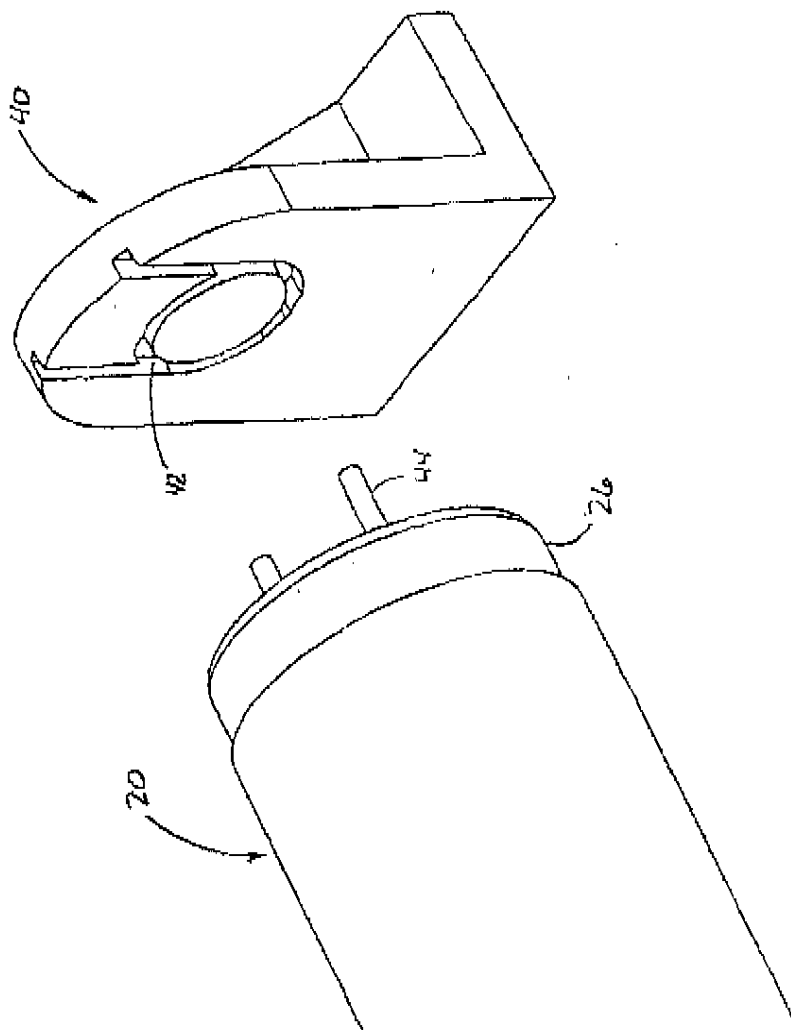


FIG. 4

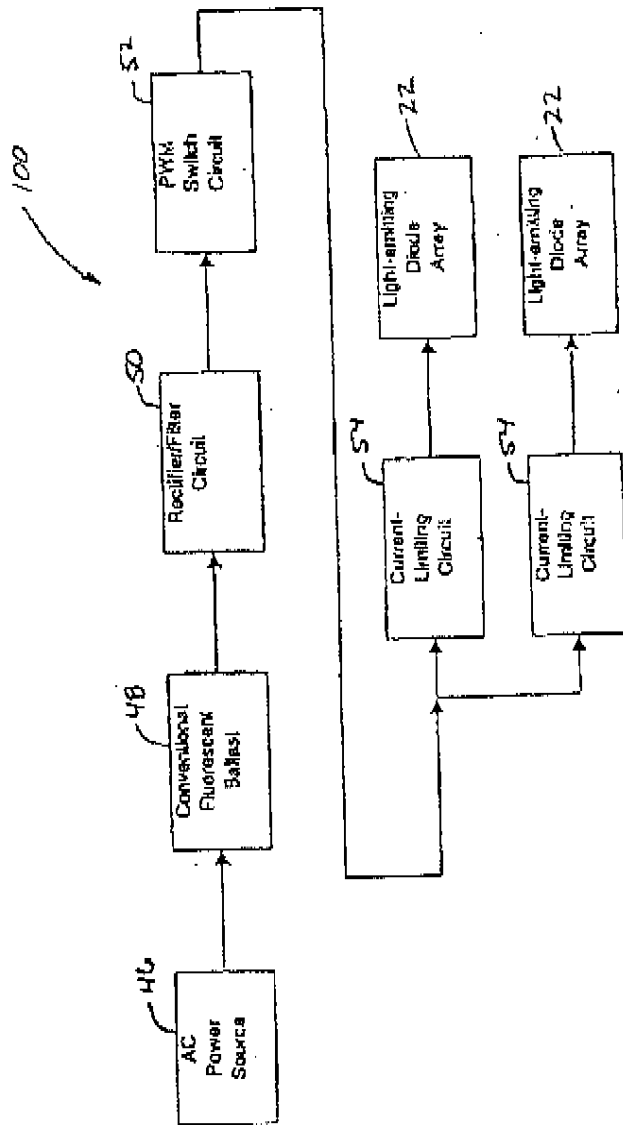


FIG 5

U.S. Patent

May 23, 2006

Sheet 6 of 10

US 7,049,761 B2

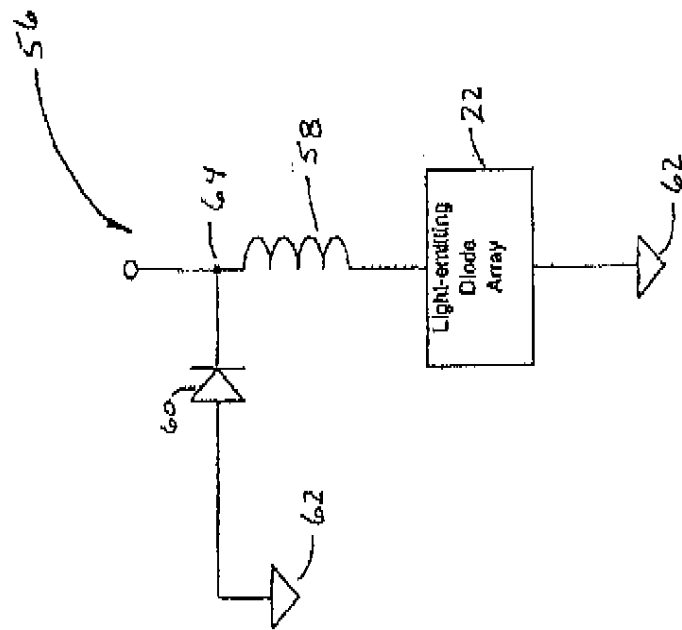


FIG. 6

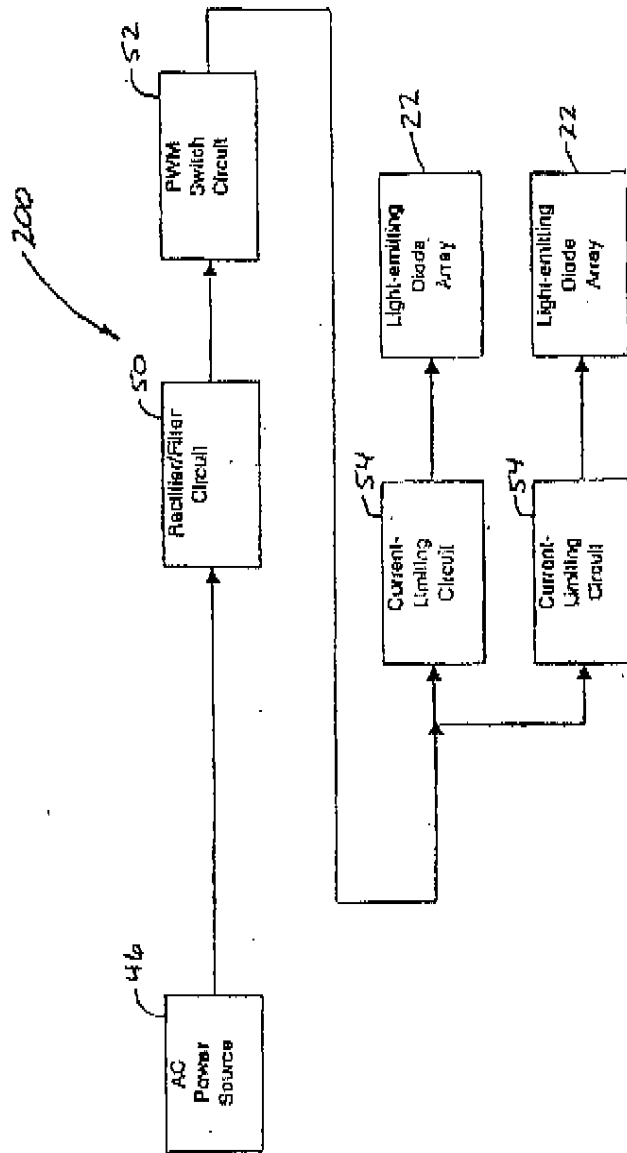


FIG. 7

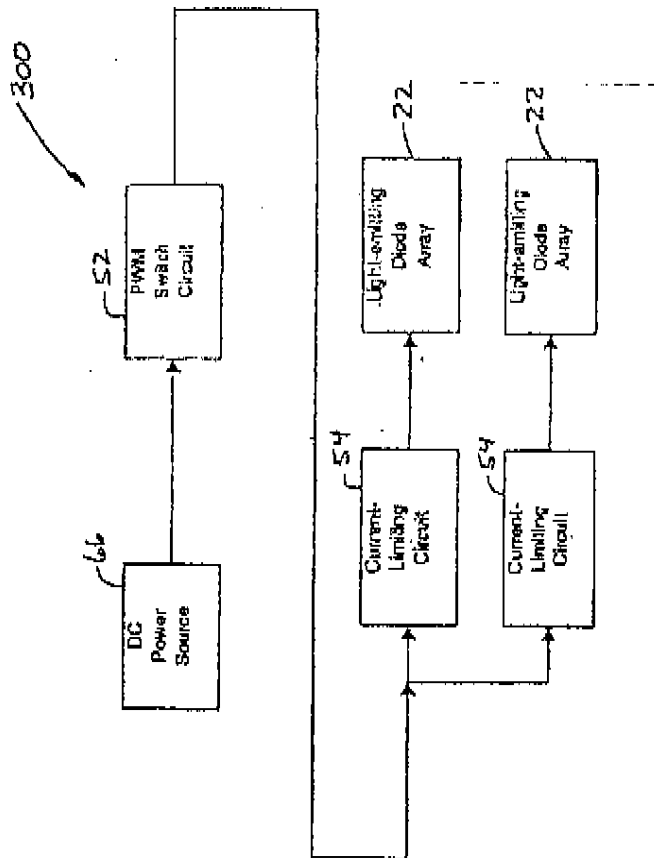


FIG. 8

U.S. Patent

May 23, 2006

Sheet 9 of 10

US 7,049,761 B2

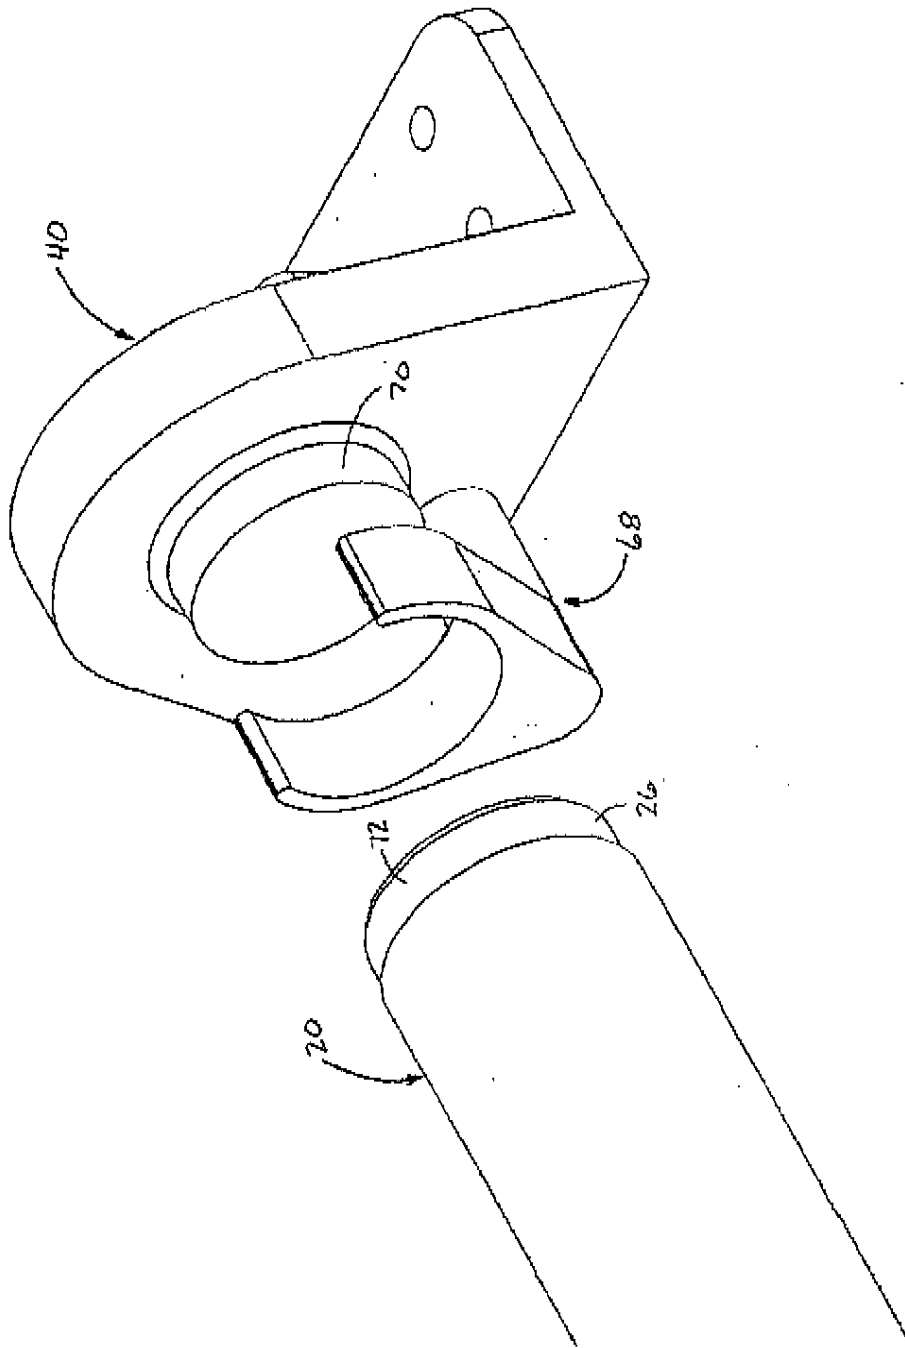


FIG. 9

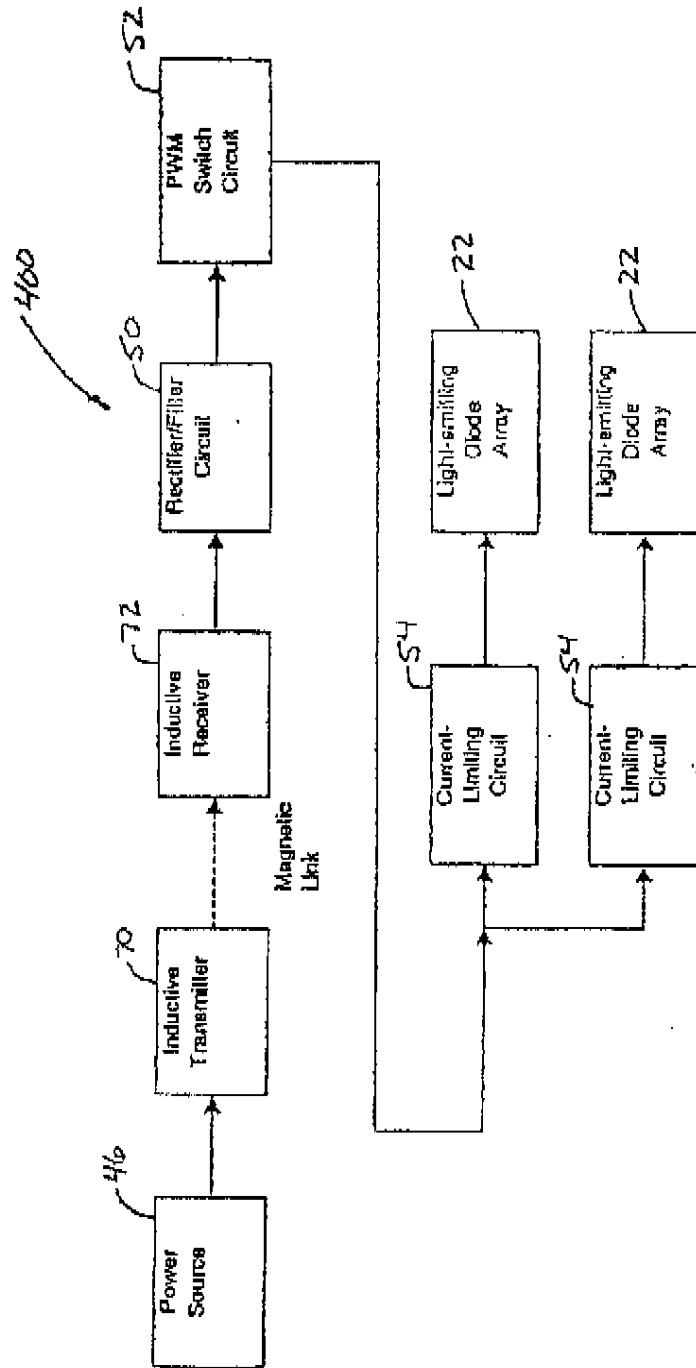


FIG. 10



US 7,049,761 B2

# 1

## LIGHT TUBE AND POWER SUPPLY CIRCUIT

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application Ser. No. 60/181,744 filed Feb. 11, 2000.

### FIELD OF THE INVENTION

The present invention relates to a light tube illuminated by LEDs (light emitting diodes) which are packaged inside the light tube and powered by a power supply circuit.

### BACKGROUND OF THE INVENTION

Conventional fluorescent lighting systems include fluorescent light tubes and ballasts. Such lighting systems are used in a variety of locations, such as buildings and transit buses, for a variety of lighting purposes, such as area lighting or backlighting. Although conventional fluorescent lighting systems have some advantages over known lighting options, such as incandescent lighting systems, conventional fluorescent light tubes and ballasts have several shortcomings. Conventional fluorescent light tubes have a short life expectancy, are prone to fail when subjected to excessive vibration, consume high amounts of power, require a high operating voltage, and include several electrical connections which reduce reliability. Conventional ballasts are highly prone to fail when subjected to excessive vibration. Accordingly, there is a desire to provide a light tube and power supply circuit which overcome the shortcomings of conventional fluorescent lighting systems. That is, there is a desire to provide a light tube and power supply circuit which have a long life expectancy, are resistant to vibration failure, consume low amounts of power, operate on a low voltage, and are highly reliable. It would also be desirable for such a light tube to mount within a conventional fluorescent light tube socket.

### SUMMARY OF THE INVENTION

A light tube for illumination by a power supply circuit includes a bulb portion and a pair of end caps disposed at opposite ends of the bulb portion. A plurality of light emitting diodes are disposed inside the bulb portion and in electrical communication with the pair of end caps, which diodes illuminate in response to electrical current received from the power supply circuit.

### BRIEF DESCRIPTION OF THE DRAWINGS

The description herein makes reference to the accompanying drawings wherein like reference numerals refer to like parts throughout the several views, and wherein:

FIG. 1 is a line drawing showing a light tube, in perspective view, which in accordance with the present invention is illuminated by LEDs packaged inside the light tube;

FIG. 2 is a perspective view of the LEDs mounted on a circuit board;

FIG. 3 is a cross-sectional view of FIG. 2 taken along lines 3—3;

FIG. 4 is a fragmentary, perspective view of one embodiment of the present invention showing one end of the light tube disconnected from one end of a light tube socket;

FIG. 5 is an electrical block diagram of a first power supply circuit for supplying power to the light tube;

FIG. 6 is an electrical schematic of a switching power supply type current limiter;

2

FIG. 7 is an electrical block diagram of a second power supply circuit for supplying power to the light tube;

FIG. 8 is an electrical block diagram of a third power supply circuit for supplying power to the light tube;

FIG. 9 is a fragmentary, perspective view of another embodiment of the present invention showing one end of the light tube disconnected from one end of the light tube socket; and

FIG. 10 is an electrical block diagram of a fourth power supply circuit for supplying power to the light tube.

### DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 is a line drawing showing a light tube 20 in perspective view. In accordance with the present invention, the light tube 20 is illuminated by LEDs 22 packaged inside the light tube 20. The light tube 20 includes a cylindrically shaped bulb portion 24 having a pair of end caps 26 and 28 disposed at opposite ends of the bulb portion. Preferably, the bulb portion 24 is made from a transparent or translucent material such as glass, plastic, or the like. As such, the bulb material may be either clear or frosted.

In a preferred embodiment of the present invention, the light tube 20 has the same dimensions and end caps 26 and 28 (e.g. electrical male bi-pin connectors, type G13) as a conventional fluorescent light tube. As such, the present invention can be mounted in a conventional fluorescent light tube socket (not shown).

The line drawing of FIG. 1 also reveals the internal components of the light tube 20. The light tube 20 further includes a circuit board 30 with the LEDs 22 mounted thereon. The circuit board 30 and LEDs 22 are enclosed inside the bulb portion 24 and the end caps 26 and 28.

FIG. 2 is a perspective view of the LEDs 22 mounted on the circuit board 30. A group of LEDs 22, as shown in FIG. 2, is commonly referred to as a bank or array of LEDs. Within the scope of the present invention, the light tube 20 may include one or more banks or arrays of LEDs 22 mounted on one or more circuit boards 30. In a preferred embodiment of the present invention, the LEDs 22 emit white light and, thus, are commonly referred to in the art as white LEDs. In FIGS. 1 and 2, the LEDs 22 are mounted to one surface 32 of the circuit board 30. In a preferred embodiment of the present invention, the LEDs 22 are arranged to emit or shine white light through only one side of the bulb portion 24, thus directing the white light to a predetermined point of use. This arrangement reduces light losses due to imperfect reflection in a conventional lighting fixture. In alternative embodiments of the present invention, LEDs 22 may also be mounted, in any combination, to the other surfaces 34, 36, and/or 38 of the circuit board 30.

FIG. 3 is a cross-sectional view of FIG. 2 taken along lines 3—3. To provide structural strength along the length of the light tube 20, the circuit board 30 is designed with a H-shaped cross-section. To produce a predetermined radiation pattern or dispersion of light from the light tube 20, each LED 22 is mounted at an angle relative to adjacent LEDs and/or the mounting surface 32. The total radiation pattern of light from the light tube 20 is effected by (1) the mounting angle of the LEDs 22 and (2) the radiation pattern of light from each LED. Currently, white LEDs having a viewing range between 6° and 45° are commercially available.

FIG. 4 is a fragmentary, perspective view of one embodiment of the present invention showing one end of the light tube 20 disconnected from one end of a light tube socket 40.

US 7,049,761 B2

3

Similar to conventional fluorescent lighting systems and in this embodiment of the present invention, the light tube socket 40 includes a pair of electrical female connectors 42 and the light tube 20 includes a pair of mating electrical male connectors 44.

Within the scope of the present invention, the light tube 20 may be powered by one of four power supply circuits 100, 200, 300, and 400. A first power supply circuit includes a power source and a conventional fluorescent ballast. A second power supply circuit includes a power source and a rectifier/filter circuit. A third power supply circuit includes a DC power source and a PWM (Pulse Width Modulation) circuit. A fourth power supply circuit powers the light tube 20 inductively.

FIG. 5 is an electrical block diagram of a first power supply circuit 100 for supplying power to the light tube 20. The first power supply circuit 100 is particularly adapted to operate within an existing, conventional fluorescent lighting system. As such, the first power supply circuit 100 includes a conventional fluorescent light tube socket 40 having two electrical female connectors 42 disposed at opposite ends of the socket. Accordingly, a light tube 20 particularly adapted for use with the first power supply circuit 100 includes two end caps 26 and 28, each end cap having the form of an electrical male connector 44 which mates with a corresponding electrical female connector 42 in the socket 40.

The first power supply circuit 100 also includes a power source 46 and a conventional magnetic or electronic fluorescent ballast 48. The power source 46 supplies power to the conventional fluorescent ballast 48.

The first power supply circuit 100 further includes a rectifier/filter circuit 50, a PWM circuit 52, and one or more current-limiting circuits 54. The rectifier/filter circuit 50, the PWM circuit 52, and the one or more current-limiting circuits 54 of the first power supply circuit 100 are packaged inside one of the two end caps 26 or 28 of the light tube 20.

The rectifier/filter circuit 50 receives AC power from the ballast 48 and converts the AC power to DC power. The PWM circuit 52 receives the DC power from the rectifier/filter circuit 50 and pulse-width modulates the DC power to the one or more current-limiting circuits 54. In a preferred embodiment of the present invention, the PWM circuit 52 receives the DC power from the rectifier/filter circuit 50 and cyclically switches the DC power on and off to the one or more current-limiting circuits 54. The DC power is switched on and off by the PWM circuit 52 at a frequency which causes the white light emitted from the LEDs 22 to appear, when viewed with a "naked" human eye, to shine continuously. The PWM duty cycle can be adjusted or varied by control circuitry (not shown) to maintain the power consumption of the LEDs 22 at safe levels.

The DC power is modulated for several reasons. First, the DC power is modulated to adjust the brightness or intensity of the white light emitted from the LEDs 22 and, in turn, adjust the brightness or intensity of the white light emitted from the light tube 20. Optionally, the brightness or intensity of the white light emitted from the light tube 20 may be adjusted by a user. Second, the DC power is modulated to improve the illumination efficiency of the light tube 20 by capitalizing upon a phenomenon in which short pulses of light at high brightness or intensity to appear brighter than a continuous, lower brightness or intensity of light having the same average power. Third, the DC power is modulated to regulate the intensity of light emitted from the light tube 20 to compensate for supply voltage fluctuations, ambient temperature changes, and other such factors which effect the

4

intensity of white light emitted by the LEDs 22. Fourth, the DC power is modulated to raise the variations of the frequency of light above the nominal variation of 120 to 100 Hz thereby reducing illumination artifacts caused by low frequency light variations, including interactions with video screens. Fifth, the DC power may optionally be modulated to provide an alarm function wherein light from the light tube 20 cyclically flashes on and off.

The one or more current-limiting circuits 54 receive the pulse-width modulated or switched DC power from the PWM circuit 52 and transmit a regulated amount of power to one or more arrays of LEDs 22. Each current-limiting circuit 54 powers a bank of one or more white LEDs 22. If a bank of LEDs 22 consists of more than one LED, the LEDs are electrically connected in series in an anode to cathode arrangement. If brightness or intensity variation between the LEDs 22 can be tolerated, the LEDs can be electrically connected in parallel.

The one or more current-limiting circuits 54 may include (1) a resistor, (2) a current-limiting semiconductor circuit, or (3) a switching power supply type current limiter.

FIG. 6 is an electrical schematic of a switching power supply type current limiter 56. The limiter 56 includes an inductor 58, electrically connected in series between the PWM circuit 52 and the array of LEDs 22, and a power diode 60, electrically connected between ground 62 and a PWM circuit/inductor node 64. The diode 60 is designed to begin conduction after the PWM circuit 52 is switched off. In this case, the value of the inductor 58 is adjusted in conjunction with the PWM duty cycle to provide the benefits described above. The switching power supply type current limiter 56 provides higher power efficiency than the other types of current-limiting circuits listed above.

FIG. 7 is an electrical block diagram of a second power supply circuit 200 for supplying power to the light tube 20. Similar to the first power supply circuit 100, the second power supply circuit 200 includes a conventional fluorescent light tube socket 40 having two electrical female connectors 42 disposed at opposite ends of the socket 40. Accordingly, a light tube 20 particularly adapted for use with the second power supply circuit 200 includes two end caps 26 and 28, each end cap having the form of an electrical male connector 44 which mates with a corresponding electrical female connector 42 in the socket 40.

In the second power supply circuit 200, the power source 46 supplies power directly to the rectifier/filter circuit 50. The rectifier/filter circuit 50, the PWM circuit 52, and the one or more current-limiting circuits 54 operate as described above to power the one or more arrays of LEDs 22. The rectifier/filter circuit 50, the PWM circuit 52, and the one or more current-limiting circuits 54 of the second power supply circuit 200 are preferably packaged inside the end caps 26 and 28 or the bulb portion 24 of the light tube 20 or inside the light tube socket 40.

FIG. 8 is an electrical block diagram of a third power supply circuit 300 for supplying power to the light tube 20. Similar to the first and second power supply circuits 100 and 200, the third power supply circuit 300 includes a conventional fluorescent light tube socket 40 having two electrical female connectors 42 disposed at opposite ends of the socket 40. Accordingly, a light tube 20 particularly adapted for use with the third power supply circuit 300 includes two end caps 26 and 28, each end cap having the form of an electrical male connector 44 which mates with a corresponding electrical female connector 42 in the socket 40.

The third power supply circuit 300 includes a DC power source 66, such as a vehicle battery. In the third power

US 7,049,761 B2

5

supply circuit 300, the DC power source 66 supplies DC power directly to the PWM circuit 52. The PWM circuit 52 and the one or more current-limiting circuits 54 operate as described above to power the one or more arrays of LEDs 22. In the third power supply circuit 300, the PWM circuit 52 is preferably packaged in physical location typically occupied by the ballast of a conventional fluorescent lighting system while the one or more current-limiting circuits 54 and LEDs 22 are preferably packaged inside the light tube 20, in either one of the two end caps 26 or 28 or the bulb portion 24.

FIG. 9 is a fragmentary, perspective view of another embodiment of the present invention showing one end of the light tube 20 disconnected from one end of the light tube socket 40. In this embodiment of the present invention, the light tube socket 40 includes a pair of brackets 68 and the light tube 20 includes a pair of end caps 26 and 28 which mate with the brackets 68.

FIG. 10 is an electrical block diagram of a fourth power supply circuit 400 for supplying power to the light tube 20. Unlike the first, second, and third power supply circuits 100, 200, and 300 which are powered through direct electrical male and female connectors 44 and 42, the fourth power supply circuit 400 is powered inductively. As such, the fourth power supply circuit 400 includes a light tube socket 40 having two brackets 68 disposed at opposite ends of the socket 40. At least one bracket 68 includes an inductive transmitter 70. Accordingly, a light tube 20 particularly adapted for use with the fourth power supply circuit 400 has two end caps 26 and 28 with at least one end cap including an inductive receiver or antenna 72. When the light tube 20 is mounted in the light tube socket 40, the at least one inductive receiver 72 in the light tube 20 is disposed adjacent to the at least one inductive transmitter 70 in the light tube socket 40.

The fourth power supply circuit 400 includes the power source 46 which supplies power to the at least one inductive transmitter 70 in the light tube socket 40. The at least one transmitter 70 inductively supplies power to the at least one receiver 72 in one of the end caps 26 and/or 28 of the light tube 20. The at least one inductive receiver 72 supplies power to the rectifier/filter circuit 50. The rectifier/filter circuit 50, PWM circuit 52, and the one or more current-limiting circuits 54 operate as described above to power the one or more arrays of LEDs 22. In this manner, the light tube 20 is powered without a direct electrical connection.

What is claimed is:

1. A light device for illumination by a power supply circuit comprising:
  - a bulb portion,
  - a first end cap disposed at one end of the bulb portion,
  - a second end cap disposed at an end of bulb portion opposite the first end cap, the first and second end caps forming a pair of end caps on opposite ends of the bulb portion; and wherein the bulb portion and the pair of end caps are dimensioned to be mounted in a fluorescent light tube socket, and
  - a plurality of light emitting diodes disposed inside the bulb portion, the light emitting diodes in electrical communication with the end cap for illuminating in response to electrical current received from the power supply circuit, and wherein the plurality of light emitting diodes is mounted on at least one circuit board; and wherein each of the plurality of light emitting diodes is mounted at an angular off-set from the circuit board to establish a predetermined radiation pattern of light.

6

2. A light tube for illumination by a power supply circuit comprising:
  - a bulb portion,
  - a first of end caps disposed at opposite ends of the bulb portion, wherein each of the pair of end caps is shaped to be coupled with a fluorescent light tube socket, and
  - a plurality of closely-spaced light emitting diodes disposed inside the bulb portion and extending between the opposite ends of the bulb portion, the light emitting diodes in electrical communication with the pair of end caps for illuminating in response to electrical current received from the power supply circuit; and wherein each of the pair of end caps is an electrical bi-pin connector.
3. In a replacement light tube for a fluorescent light fixture having a light tube socket and a power supply circuit, the improvement comprising:
  - a plurality of closely-spaced light emitting diodes disposed inside a bulb portion of the light tube and in electrical communication with a pair of end caps coupled to opposed ends of the bulb portion and engageable with the light tube socket, the plurality of light emitting diodes operable to illuminate in response to electrical current delivered by the fluorescent light; and wherein each of the pair of end caps is an electrical bi-pin connector.
4. The improvement of claim 3, wherein the plurality of light emitting diodes is mounted to a circuit board.
5. The improvement of claim 4, wherein each of the plurality of light emitting diodes is mounted at an angular off-set from the circuit board to establish a predetermined radiation pattern of light.
6. The light device of claim 1 wherein the plurality of light emitting diodes is mounted on only one side of the at least one circuit board.
7. The light device of claim 6 wherein the radiation pattern of light from each of the plurality of light emitting diodes is centered at a 90° angle relative to the at least one circuit board.
8. The light device of claim 1 wherein each of the plurality of light emitting diodes is a white LED.
9. The light device of claim 1, wherein the plurality of light emitting diodes is displaced substantially continuously between the opposite ends of the bulb portion.
10. A light device for illumination by a power supply circuit comprising:
  - a bulb portion,
  - a first end cap disposed at one end of the bulb portion, and
  - a plurality of light emitting diodes disposed inside the bulb portion, the light emitting diodes in electrical communication with the end cap for illumination in response to electrical current received from the power supply circuit; and wherein the plurality of light emitting diodes is mounted on at least one circuit board; and wherein each of the plurality of light emitting diodes is mounted at an angular off-set from the circuit board to establish a predetermined radiation pattern of light; and wherein each of the plurality of light emitting diodes is arranged into one of a plurality of equidistantly-spaced light emitting diode banks, each of the plurality of light emitting diode banks comprising at least two light emitting diodes.
11. The improvement of claim 3 wherein the bulb portion is annular.
12. The improvement of claim 3 wherein the electric current is a direct current signal, the improvement further comprising:

US 7,049,761 B2

7

a rectifier for converting an alternating current signal from the fluorescent light fixture to the direct current signal.

13. In a replacement light tube for a fluorescent light fixture having a light tube socket and a power supply circuit, the improvement comprising:

a plurality of closely-spaced light emitting diodes disposed inside a bulb portion of the light tube and in electrical communication with a pair of end caps coupled to opposed ends of the bulb portion and engageable with the light tube socket, the plurality of light emitting diodes operable to illuminate in response to electrical current delivered by the fluorescent light fixture wherein the electric current is a direct current signal;

a rectifier for converting an alternating current signal from the fluorescent light fixture to the direct current signal; and

a pulse-width modulating circuit for receiving the direct current signal and supplying a resulting modulated signal to the plurality of light emitting diodes.

14. The improvement of claim 3 wherein each of the plurality of light emitting diodes is a white LED.

15. In a replacement light tube for a fluorescent light fixture having a light tube socket and a power supply circuit, the improvement comprising:

a plurality of closely-spaced light emitting diodes disposed inside a bulb portion of the light tube and in electrical communication with a pair of end caps coupled to opposed ends of the bulb portion and engageable with the light tube socket, the plurality of light emitting diodes operable to illuminate in response to electrical current delivered by the fluorescent light fixture; and wherein each of the plurality of light emitting diodes is arranged into one of a plurality of spaced light emitting diode banks, each of the plurality of light emitting diode banks comprising at least two light emitting diodes.

16. The improvement of claim 4 wherein the plurality of light emitting diodes is mounted on only one side of the circuit board to emit light toward only one side of the bulb portion.

17. The improvement of claim 16 wherein the radiation pattern of light from each of the plurality of light emitting diodes is centered at a 90° angle relative to the circuit board.

18. The light device of claim 1 wherein the bulb portion comprises one of clear glass and frosted glass.

8

19. A retrofit LED light tube for replacing a light tube in a fixture, the retrofit LED light tube comprising:

a elongated cylindrical transparent envelope,

a base cap at an end of the envelope, wherein the base cap is an electrical bi-pin connector comprising a first pin and a second pin extending perpendicularly from a surface of the base cap, wherein the first and second pins are adapted to electrically communicate with a fluorescent light socket; and

at least one LED device in electrical communication with the base cap, wherein the at least one LED device is electrically connected to a rectifier and the at least one LED device is further electrically connected to a pulse-width modulating circuit receiving a direct current signal from the rectifier and supplying a modulated signal to the at least one LED device.

20. The retrofit light tube of claim 19, wherein the LED device comprises a circuit board and a plurality of LEDs serially connected to the circuit board.

21. The retrofit light tube of claim 19, further comprising: current-limiting means coupled to the at least one LED device.

22. The retrofit light tube of claim 19 wherein the base cap has circuitry means for connection with an AC source.

23. The light device of claim 1 wherein each of the plurality of light emitting diodes is arranged into one of a plurality of spaced light emitting diode banks, each of the plurality of light emitting diode banks comprising at least two light emitting diodes.

24. The improvement of claim 3 wherein each of the plurality of light emitting diodes is arranged into one of a plurality of spaced light emitting diode banks, each of the plurality of light emitting diode banks comprising at least two light emitting diodes.

25. The improvement of claim 24 wherein each of the plurality of spaced light emitting diode banks is spaced equidistant from adjacent ones of the plurality of spaced light emitting diode banks.

26. The improvement of claim 15 wherein each of the plurality of spaced light emitting diode banks is spaced equidistant from adjacent ones of the plurality of spaced light emitting diode banks.

\* \* \* \* \*

ORIGINAL

County in which this action arose Oakland County, Michigan

The JS 44 civil cover sheet and the information contained herein neither replace nor complement the filing and service of pleadings or other papers as required by law, except as provided by local rules of court. This form, approved by the Judicial Conference of the United States in September 1974, is required for the use of the Clerk of Court for the purpose of initiating the civil docket sheet. (SEE INSTRUCTIONS ON THE REVERSE OF THE FORM.)

**I. (a) PLAINTIFFS**

ALTAIR ENGINEERING, INC.

**DEFENDANTS**

HIGH TECH GLOBAL GROUP CO., LTD.

(b) County of Residence of First Listed Plaintiff Oakland County, Michigan  
(EXCEPT IN U.S. PLAINTIFF CASES)

County of Residence of First Listed Defendant Taipei Hsien, Taiwan  
(IN U.S. PLAINTIFF CASES ONLY)

(c) Attorney's (Firm Name, Address, and Telephone Number)  
Thomas N. Young, Young Basile Hanlon MacFarlane & Helmholtz P.C.,  
3001 West Big Beaver Road, Suite 624, Troy Michigan 48084 (248) 649-3333

Case: 2:07-cv-13276  
Assigned To: Hood, Denise Page  
Referral Judge: Scheer, Donald A  
Filed: 08-06-2007 At 03:44 PM  
CMP ALTAIR ENGINEERING INC V HIGH  
TECH GLOBAL GROUP CO LTD (EW)

**II. BASIS OF JURISDICTION** (Select One Box Only)

- 1 U.S. Government Plaintiff
- 2 U.S. Government Defendant
- 3 Federal Question (U.S. Government Not a Party)
- 4 Diversity (Indicate Citizenship of Parties in Item III)

**III. CITIZENSHIP** (For Diversity Cases Only)

	PTF	DEF		PTF	DEF
Citizen of This State	<input type="checkbox"/> 1	<input type="checkbox"/> 1	Incorporated or Principal Place of Business In This State	<input checked="" type="checkbox"/> 4	<input type="checkbox"/> 4
Citizen of Another State	<input type="checkbox"/> 2	<input type="checkbox"/> 2	Incorporated and Principal Place of Business In Another State	<input type="checkbox"/> 5	<input type="checkbox"/> 5
Citizen or Subject of a Foreign Country	<input type="checkbox"/> 3	<input checked="" type="checkbox"/> 3	Foreign Nation	<input type="checkbox"/> 6	<input type="checkbox"/> 6

**IV. NATURE OF SUIT** (Select One Box Only)

CONTRACT	TORTS	FORFEITURE/PENALTY	BANKRUPTCY	OTHER STATUTES
<input type="checkbox"/> 110 Insurance <input type="checkbox"/> 120 Marine <input type="checkbox"/> 130 Miller Act <input type="checkbox"/> 140 Negotiable Instrument <input type="checkbox"/> 150 Recovery of Overpayment & Enforcement of Judgment <input type="checkbox"/> 151 Medicare Act <input type="checkbox"/> 152 Recovery of Defaulted Student Loans (Excl. Veterans) <input type="checkbox"/> 153 Recovery of Overpayment of Veteran's Benefits <input type="checkbox"/> 160 Stockholders' Suits <input type="checkbox"/> 190 Other Contract <input type="checkbox"/> 195 Contract Product Liability <input type="checkbox"/> 196 Franchise	<b>PERSONAL INJURY</b> <input type="checkbox"/> 310 Airplane <input type="checkbox"/> 315 Airplane Product Liability <input type="checkbox"/> 320 Assault, Libel & Slander <input type="checkbox"/> 330 Federal Employers' Liability <input type="checkbox"/> 340 Marine <input type="checkbox"/> 345 Marine Product Liability <input type="checkbox"/> 350 Motor Vehicle <input type="checkbox"/> 355 Motor Vehicle Product Liability <input type="checkbox"/> 360 Other Personal Injury	<b>PERSONAL INJURY</b> <input type="checkbox"/> 362 Personal Injury - Med. Malpractice <input type="checkbox"/> 365 Personal Injury - Product Liability <input type="checkbox"/> 368 Asbestos Personal Injury Product Liability <b>PERSONAL PROPERTY</b> <input type="checkbox"/> 370 Other Fraud <input type="checkbox"/> 371 Truth in Lending <input type="checkbox"/> 380 Other Personal Property Damage <input type="checkbox"/> 385 Property Damage Product Liability	<input type="checkbox"/> 422 Appeal 28 USC 158 <input type="checkbox"/> 423 Withdrawal 28 USC 157 <b>PROPERTY RIGHTS</b> <input type="checkbox"/> 826 Copyrights <input checked="" type="checkbox"/> 830 Patent <input type="checkbox"/> 840 Trademark	<input type="checkbox"/> 400 State Reapportionment <input type="checkbox"/> 410 Antitrust <input type="checkbox"/> 430 Banks and Banking <input type="checkbox"/> 450 Commerce <input type="checkbox"/> 460 Deportation <input type="checkbox"/> 470 Racketeer Influenced and Corrupt Organizations <input type="checkbox"/> 480 Consumer Credit <input type="checkbox"/> 490 Cable/Sat. TV <input type="checkbox"/> 810 Selective Service <input type="checkbox"/> 850 Securities/Commodities/Exchange <input type="checkbox"/> 875 Customer Challenge 12 USC 3410 <input type="checkbox"/> 890 Other Statutory Actions <input type="checkbox"/> 891 Agricultural Acts <input type="checkbox"/> 892 Economic Stabilization Act <input type="checkbox"/> 893 Environmental Matters <input type="checkbox"/> 894 Energy Allocation Act <input type="checkbox"/> 895 Freedom of Information Act <input type="checkbox"/> 900 Appeal of Fee Determination Under Access to Justice <input type="checkbox"/> 950 Constitutionality of State Statutes
<b>REAL PROPERTY</b> <input type="checkbox"/> 210 Land Condemnation <input type="checkbox"/> 220 Foreclosure <input type="checkbox"/> 230 Rent Lease & Ejectment <input type="checkbox"/> 240 Torts to Land <input type="checkbox"/> 245 Tort Product Liability <input type="checkbox"/> 290 All Other Real Property	<b>CIVIL RIGHTS</b> <input type="checkbox"/> 441 Voting <input type="checkbox"/> 442 Employment <input type="checkbox"/> 443 Housing/Accommodations <input type="checkbox"/> 444 Welfare <input type="checkbox"/> 445 Amer. w/Disabilities - Employment <input type="checkbox"/> 446 Amer. w/Disabilities - Other <input type="checkbox"/> 440 Other Civil Rights	<b>PRISONER PETITIONS</b> <input type="checkbox"/> 510 Motions to Vacate Sentence <b>Habeas Corpus:</b> <input type="checkbox"/> 530 General <input type="checkbox"/> 535 Death Penalty <input type="checkbox"/> 540 Mandamus & Other <input type="checkbox"/> 550 Civil Rights <input type="checkbox"/> 555 Prison Condition	<b>LABOR</b> <input type="checkbox"/> 710 Fair Labor Standards Act <input type="checkbox"/> 720 Labor/Mgmt. Relations <input type="checkbox"/> 730 Labor/Mgmt. Reporting & Disclosure Act <input type="checkbox"/> 740 Railway Labor Act <input type="checkbox"/> 790 Other Labor Litigation <input type="checkbox"/> 791 Empl. Ret. Inc. Security Act	<b>SOCIAL SECURITY</b> <input type="checkbox"/> 861 HIA (1395ff) <input type="checkbox"/> 862 Black Lung (923) <input type="checkbox"/> 863 DIWC/DIWW (405(g)) <input type="checkbox"/> 864 SSID Title XVI <input type="checkbox"/> 865 RSI (405(g)) <b>FEDERAL TAX SUITS</b> <input type="checkbox"/> 870 Taxes (U.S. Plaintiff or Defendant) <input type="checkbox"/> 871 IRS—Third Party 26 USC 7609

**ORIGIN** (Select One Box Only)  
 1 Original Proceeding  
 2 Removed from State Court  
 3 Remanded from Appellate Court  
 4 Reinstated or Reopened  
 5 Transferred from another district (specify)  
 6 Multidistrict Litigation  
 7 Appeal to District Judge from Magistrate Judgment

**VI. CAUSE OF ACTION**

Cite the U.S. Civil Statute under which you are filing (Do not cite jurisdictional statutes unless diversity):  
28 U.S.C. Sub Sections 1331 and 1332; 28 U.S.C. Sub Section 139(d); 35 U.S.C. Sub Section 271 et seq.

Brief description of cause:  
Patent Infringement of Patent No. 7,049,761 LED-based fluorescent light replacement

**VII. REQUESTED IN COMPLAINT:**

CHECK IF THIS IS A CLASS ACTION UNDER F.R.C.P. 23 DEMAND \$ \_\_\_\_\_  
CHECK YES only if demanded in complaint:  
JURY DEMAND:  Yes  No

**VIII. RELATED CASE(S) IF ANY**

(See instructions): JUDGE George Caram Steeh DOCKET NUMBER 2:07-cv-13150

DATE August 3, 2007 SIGNATURE OF ATTORNEY OF RECORD \_\_\_\_\_

FOR OFFICE USE ONLY

RECEIPT # \_\_\_\_\_ AMOUNT \_\_\_\_\_ APPLYING IFP \_\_\_\_\_ JUDGE \_\_\_\_\_ MAG. JUDGE \_\_\_\_\_

PURSUANT TO LOCAL RULE 83.11

1. Is this a case that has been previously dismissed?

Yes  
 No

If yes, give the following information:

Court: \_\_\_\_\_

Case No.: \_\_\_\_\_

Judge: \_\_\_\_\_

2. Other than stated above, are there any pending or previously discontinued or dismissed companion cases in this or any other court, including state court? (Companion cases are matters in which it appears substantially similar evidence will be offered or the same or related parties are present and the cases arise out of the same transaction or occurrence.)

Yes  
 No

If yes, give the following information:

Court: \_\_\_\_\_

Case No.: \_\_\_\_\_

Judge: \_\_\_\_\_

Notes :

\_\_\_\_\_