

1 JOHN A. CURTAS  
A.J. KUNG  
2 KUMMER KAEMPFER BONNER & RENSHAW  
Seventh Floor  
3 3800 Howard Hughes Parkway  
Las Vegas, Nevada 89109  
4 (702) 792-7000  
5 Attorneys for Plaintiff

RECEIVED  
AND FILED  
Jul 5 3 10 PM '00  
BY Do  
CLERK

8 UNITED STATES DISTRICT COURT  
9 DISTRICT OF NEVADA

11 SERROT INTERNATIONAL, INC.,  
12 Plaintiff,  
13 vs.  
14 CARLISLE SYNTEC, INC.,  
15 Defendant.

CASE NO.  
**COMPLAINT  
JURY DEMAND**  
CV-S-00-0856-RLH----


17 Jurisdiction and Venue

18 1. This is an action for patent infringement,  
19 misappropriation of trade secrets and breach of contract

20 2. This Court holds subject matter jurisdiction over the  
21 claims in this action relating to patent infringement pursuant to  
22 28 U.S.C. Sections 1331 and 1338(a).

23 3. This Court holds subject matter jurisdiction over the  
24 remaining claims in this action pursuant to 28 U.S.C. Section  
25 1332(a) because the matter in controversy exceeds \$75,000,  
26 exclusive of interest and costs, and there is complete diversity  
27 between the parties.

28 . . .







1 16. Carlisle does not have authorization from Serrot to  
2 make, use, offer for sale, or sell the infringing fabric mesh  
3 reinforced monolithic thermoplastic membrane under Serrot's `178  
4 patent.

5 17. Carlisle's actions constitute infringement of Serrot's  
6 `178 patent under statutory and decisional law, including inter  
7 alia, 35 U.S.C. §271(a).

8 18. Upon information and belief, Carlisle knows of Serrot's  
9 `178 patent and has knowingly and deliberately acted in disregard  
10 of Serrot's patent rights.

11 19. Carlisle's actions constitute a knowing and willful  
12 infringement of Serrot's patent under statutory and decisional  
13 law.

14 20. As a result of Carlisle's infringement, Serrot has and  
15 will be damaged unless this Court permanently enjoins Carlisle  
16 from further infringement.

17 **SECOND CLAIM FOR RELIEF**  
18 (Misappropriation of Trade Secrets)

19 21. The Plaintiffs repeat and reallege each and every  
20 allegation contained in paragraphs 1 through 20 as if set forth  
21 in full herein.

22 22. Until the recent issuance of the `178 patent, Serrot's  
23 method of producing a fabric mesh reinforced monolithic  
24 thermoplastic membrane was sufficiently secret to derive economic  
25 value from not being generally known to other persons who can  
26 obtain economic value from its disclosure or use.

27 23. Serrot took reasonable efforts to maintain the secrecy  
28 of their method of producing a fabric mesh reinforced monolithic

1 thermoplastic membrane.

2 24. Serrot's methods, including the equipment used, process  
3 conditions and operating procedures, constitute a "trade secret"  
4 under common law and under Nev. Rev. Stat. §600A.030 (2000).

5 25. Carlisle acquired knowledge of Serrot's methods while a  
6 party to a confidentiality agreement with Serrot, which gave rise  
7 to a duty to maintain the secrecy of the method or limit its use.

8 26. Upon information and belief, Carlisle has  
9 misappropriated Serrot's trade secret by disclosing and/or using  
10 Serrot's methods without consent, when at the time of this  
11 disclosure and/or use, Carlisle knew or had reason to know that  
12 such information was acquired under circumstances giving rise to  
13 a duty to maintain its secrecy or limit its use.

14 27. Carlisle's misappropriation of Serrot's trade secrets  
15 is a violation of common law and Title 52, Section 600A of the  
16 Nevada Revised Statutes.

17 28. Carlisle's misappropriation of Serrot's trade secrets  
18 was willful.

19 **THIRD CLAIM FOR RELIEF**  
20 (Breach of Contract)

21 29. The Plaintiffs repeat and reallege each and every  
22 allegation contained in paragraphs 1 through 28 as if set forth  
23 in full herein.

24 30. Pursuant to the Agreement, Carlisle owed to Serrot a  
25 duty to not disclose or use any information made available to  
26 Carlisle in the production of a competing fabric mesh reinforced  
27 monolithic thermoplastic membrane product.

28 . . .

1 31. Carlisle never received permission from Serrot to  
2 disclose or use any information obtained under the Agreement.

3 32. Upon information and belief, Carlisle has breached the  
4 Agreement by disclosing and/or using the information obtained  
5 under the Agreement in the production of a competing fabric mesh  
6 reinforced monolithic thermoplastic membrane product.

7 33. Serrot has complied with all of their obligations under  
8 the Agreement.

9 **Relief Requested**

10 WHEREFORE, Plaintiff requests that the Court enter a  
11 judgment including:

12 1. a determination that the `178 patent is valid and  
13 enforceable;

14 2. a determination that the Defendant Carlisle's business  
15 activities constitute infringement pursuant to 35 U.S.C. Sections  
16 271(a);

17 3. a determination that the Agreement is a valid contract;

18 4. a determination that Defendant Carlisle's actions  
19 constitute a breach of the Agreement;

20 5. a determination that Defendant Carlisle's actions  
21 constitute a misappropriation of Serrot's trade secrets;

22 6. an order that Defendant be preliminarily and  
23 permanently enjoined from activities infringing upon the `178  
24 patent;

25 7. an award of damages adequate to compensate for the  
26 Defendant's infringement of the `178 patent;

27 8. an award of damages adequate to compensate for the  
28 Defendant's misappropriation of Serrot's trade secrets;

1 9. an award of damages adequate to compensate for the  
2 Defendant's breach of contract;

3 10. an award of exemplary damages pursuant to §600A.050;

4 11. an award of treble damages pursuant to 35 U.S.C.  
5 Section 284;

6 12. an award of costs and reasonable attorney's fees  
7 pursuant to 35 U.S.C. Section 285;

8 13. an award of any such other relief as the Court may  
9 appear just and proper.

10 **JURY DEMAND**

11 Plaintiff Serrot demands a trial by jury for each issue so  
12 triable and included in the above-mentioned Counts.

13 Dated this 5<sup>th</sup> day of July, 2000.

14 KUMMER KAEMPFER BONNER & RENSHAW

15  
16 By: \_\_\_\_\_

17 JOHN A. CURTAS  
18 A.J. KUNG  
19 Seventh Floor  
3800 Howard Hughes Parkway  
Las Vegas, Nevada 89109  
Attorneys for Plaintiff  
SERROT INTERNATIONAL INC.

# EXHIBIT A





**United States Patent** [19]  
**Howells**

[11] **Patent Number:** 6,054,178  
 [45] **Date of Patent:** Apr. 25, 2000

- [54] **FABRIC MESH REINFORCED MONOLITHIC THERMOPLASTIC MEMBRANE**
- [75] **Inventor:** Harvey A. Howells, Richardson, Tex.
- [73] **Assignee:** Serrot International, Inc., Henderson, Nev.
- [21] **Appl. No.:** 09/385,705
- [22] **Filed:** Aug. 30, 1999

- 2,697,058 12/1954 Lasak .
- 2,712,987 7/1955 Storrs et al. .
- 2,793,136 5/1957 Root .
- 2,794,677 6/1957 Collardin et al. .
- 2,804,337 8/1957 Marantz .
- 2,909,443 10/1959 Wolinski .
- 2,961,335 11/1960 Shepard .
- 3,073,528 1/1963 Wilson et al. .
- 3,171,599 3/1965 Rotolico .
- 3,415,450 12/1968 Hawk, Sr. .
- 3,441,215 4/1969 Cape .
- 3,442,454 5/1969 Stenger et al. .

**Related U.S. Application Data**

- [60] Continuation of application No. 08/698,302, Aug. 15, 1996, abandoned, which is a division of application No. 08/391,441, Feb. 21, 1995, abandoned.
- [51] **Int. Cl.<sup>7</sup>** ..... **B05D 1/34**
- [52] **U.S. Cl.** ..... **427/209; 427/211; 427/398.1; 427/398.2; 427/288; 442/43; 442/58; 442/62**
- [58] **Field of Search** ..... **427/209, 211, 427/398.1, 398.2, 288; 442/19, 43, 45, 58, 62, 65**

(List continued on next page.)

**OTHER PUBLICATIONS**

DVS Technical Committee, Working Group, "Plastics, Welding and Adhesive Bonding", Testing of Welded Joints of Thermoplastics—Test Methods—Requirements—Report, Mar. 1986, Doc. XVI-491-86, Deutscher Verband für Schweisstechnik e.V.  
 Deutscher Verband für Schweisstechnik E.V., "Prüfen von Schweißverbindungen aus thermoplastischen Kunststoffen, Zugversuch", Jul. 1985, Richtlinie DVS 2203 Teil 2.

[56] **References Cited**

**U.S. PATENT DOCUMENTS**


- 1,775,631 9/1930 Carlton .
- 1,983,349 1/1934 Dreyfus .
- 2,034,008 3/1936 Taylor .
- 2,125,764 8/1938 Benoit .
- 2,199,526 5/1940 McCowen .
- 2,220,140 11/1940 Bartling et al. .
- 2,386,626 1/1945 Nadeau et al. .
- 2,404,590 7/1946 Nantz .
- 2,431,873 1/1947 Kennelly .
- 2,433,515 12/1947 Jahoda .
- 2,436,335 2/1948 Simonsen .
- 2,523,037 9/1950 Mathes .
- 2,536,657 1/1951 Reese .
- 2,544,259 3/1951 Duccini et al. .
- 2,559,893 7/1951 Nadeau et al. .
- 2,566,441 9/1951 Camras .
- 2,594,222 4/1952 Sandora et al. .
- 2,643,955 6/1953 Powers et al. .
- 2,653,113 9/1953 Banigan .
- 2,678,285 5/1954 Browning .
- 2,689,801 9/1954 D'Alelio .

*Primary Examiner*—Elizabeth M. Cole  
*Attorney, Agent, or Firm*—William G. Lane, Esq.

[57] **ABSTRACT**

A method of manufacturing a fabric mesh reinforced monolithic thermoplastic membrane. The open mesh fabric is drawn into the gap between two calender rollers of a membrane extruder, a molten first thermoplastic material is extruded into the throat of the gap between the first roller and the first side of the fabric mesh, while a second molten thermoplastic material is simultaneously extruded into the throat of the gap between the second roller and the second side of the fabric mesh. The composite material is then drawn through the gap between the first and second rollers to force the molten first and second thermoplastic materials into and through the open mesh of the fabric to fuse and bond the molten first and second thermoplastic materials in and about the fabric mesh to form the fabric mesh reinforced monolithic thermoplastic membrane.

20 Claims, 1 Drawing Sheet

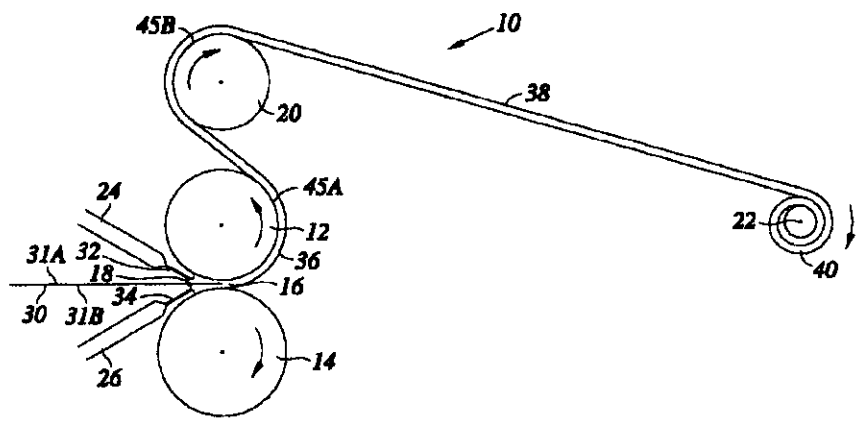

**EXHIBIT A**

6,054,178

Page 2

U.S. PATENT DOCUMENTS				
		4,488,918	12/1984	Jofs .
		4,501,783	2/1985	Hiragami et al. .
		4,543,106	9/1985	Parekh .
		4,608,287	8/1986	Biotteau .
		4,623,589	11/1986	Simmonds, Jr. .
		4,632,309	12/1986	Reimer .
		4,666,761	5/1987	Stamper et al. .... 428/215
		4,788,088	11/1988	Kohl .
		4,885,201	12/1989	Brandt .
		4,934,595	6/1990	Reimer .
		5,075,135	12/1991	Brandt .
		5,139,853	8/1992	Mathieson .
		5,167,895	12/1992	Lueghamer .
		5,258,217	11/1993	Lewis .
3,460,764	8/1969			Wallis .
3,565,345	2/1971			Moltzan .
3,894,120	7/1975			Frese et al. .
3,946,136	3/1976			Fitz. et al. .
3,973,059	8/1976			Brown et al. .
4,048,419	9/1977			Frese et al. .
4,087,577	5/1978			Hendrickson ..... 428/110
4,096,016	6/1978			Pohl .
4,239,797	12/1980			Sachs .
4,278,483	7/1981			Mansolillo .
4,327,130	4/1982			Pipkin ..... 427/209
4,368,846	1/1983			Rau et al. .
4,439,385	3/1984			Kuhls et al. .

U.S. Patent

Apr. 25, 2000

6,054,178

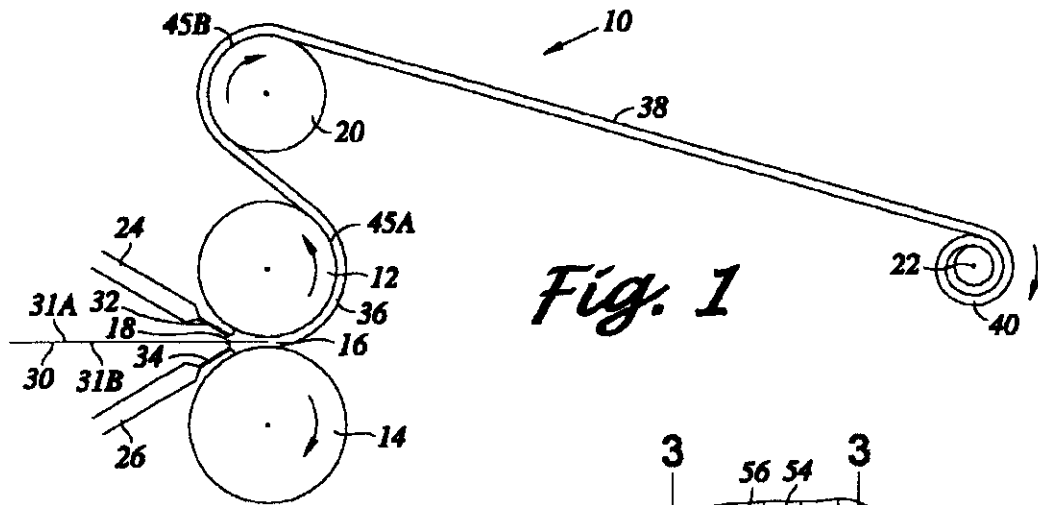


Fig. 1

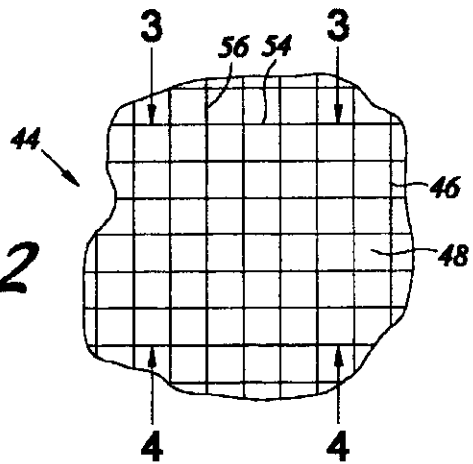


Fig. 2

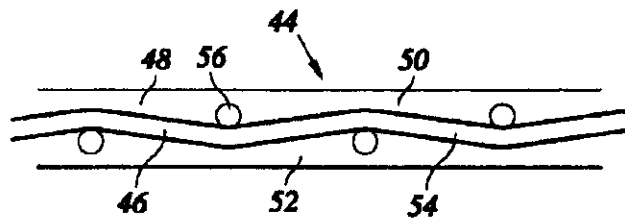


Fig. 3

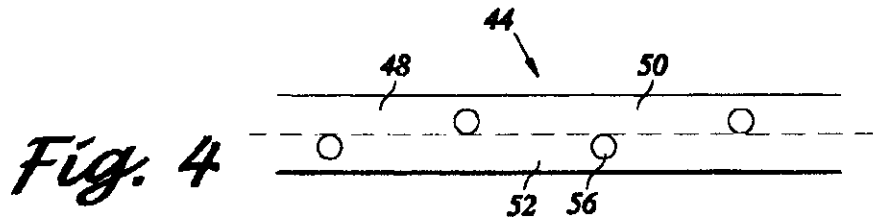


Fig. 4

6,054,178

1

## FABRIC MESH REINFORCED MONOLITHIC THERMOPLASTIC MEMBRANE

### FIELD OF THE INVENTION

This application is a continuation of U.S. patent application Ser. No. 08/698,302, filed Aug. 15, 1996, now abandoned, which is a divisional application of abandoned U.S. patent application Ser. No. 08/391,441, filed Feb. 21, 1995.

This invention is directed to an open mesh fabric reinforced monolithic thermoplastic membrane which can be used as a roofing membrane, or as a liner for ponds, reservoirs, canals, pits and the like.

### BACKGROUND OF THE INVENTION

For several years, fabric mesh reinforced thermoplastic membranes have been available for use as a roofing membrane, and pond, reservoir, pits liner, canal and the like. The conventional way of making such membranes is to extrude molten thermoplastic onto one side of a fabric mesh to weld the fabric mesh to one side of the thermoplastic membrane. The resulting composite is then heated and a second layer of molten thermoplastic is extruded onto the other side of the fabric mesh to cover the fabric mesh and to weld the second thermoplastic to the first thermoplastic.

Although this product has been made for a number of years, it has not been completely satisfactory. The membrane normally does not have a smooth surface; normally both surfaces of the membrane reflect the fabric mesh. The membrane is normally rippled and is not entirely flat because of the temperature differences between the heated first extruded thermoplastic and the molten second extruded thermoplastic. The existing membrane is truly a three-ply product having a first thermoplastic layer and a second thermoplastic layer which are partially welded together with a fabric mesh disposed in between. Because of the construction and method of manufacture, there are ply adhesion problems and ply delamination is not unknown. Because of the way the existing membranes are manufactured, there is little choice regarding the surface finish of the finished material.

It is an object of the present invention to provide a fabric mesh reinforced monolithic thermoplastic membrane for use as a roofing membrane, and reservoir, pond, canal and pit liner.

A further object of the present invention is to provide a fabric mesh reinforced monolithic thermoplastic membrane having at least one smooth surface.

An even further object of the present invention is to provide a fabric mesh reinforced monolithic thermoplastic membrane that lays flat and is ripple free.

An additional object of the present invention is to provide a fabric mesh reinforced monolithic thermoplastic membrane that is not subject to delamination.

Another additional object of the present invention is to provide a one step method for producing a fabric mesh reinforced monolithic thermoplastic membrane.

An even further additional object of the present invention is to provide an improved roofing system employing a fabric mesh reinforced monolithic thermoplastic membrane having a light reflective surface.

Still another object of the present invention is to provide a liner system for canals, ponds, reservoirs, pits and the like comprising a fabric mesh reinforced monolithic thermoplastic membrane that contains carbon black pigment.

2

These and other objects of the present invention are set forth below.

### SUMMARY OF THE INVENTION

The present invention is directed to a fabric mesh reinforced monolithic thermoplastic membrane comprising an open mesh fabric mesh having a first side and a second side and a thermoplastic layer encapsulating the fabric mesh, the thermoplastic layer having a first side and a second side, the first and second sides of the thermoplastic layer having been extruded simultaneously but separately in the molten state onto the first and second sides of the mesh fabric, respectively, to form a single thermoplastic layer, the thermoplastic material striking through, i.e., extending through, the open mesh of the fabric mesh and surrounding the mesh fibers.

In one embodiment of the present invention, the fabric mesh can be woven mesh. In an alternative embodiment, the fabric mesh can be a non-woven mesh. The mesh can be a plastic mesh, a natural fiber mesh or a metal mesh. It is not essential to the present invention that the thermoplastic material actually bond to the surface of the mesh. The mesh fibers or strands can be smooth fibers or surface configured fibers to get a better grip between the mesh and the thermoplastic material. Irregular surface fiber mesh can be corrugated, have protrusions or hollows or other irregular surface configurations that hold the fabric mesh in the thermoplastic material.

In one of the embodiments of the present invention, the thermoplastic material can be a polypropylene based, thermoplastic olefin. In one of the preferred embodiments of the present invention, the thermoplastic on the first side of the membrane will be pigmented with a white pigment, such as titanium dioxide, to act as a light reflectant and the second side of the thermoplastic layer will be pigmented with carbon black.

The present invention is also directed to a method of manufacturing a fabric mesh reinforced monolithic thermoplastic membrane which comprises drawing an open mesh fabric mesh into the gap between the two calender rollers of a membrane extruder, the mesh having first and second sides; extruding a molten first thermoplastic into the throat of the gap between the first roller and the first side of the fabric mesh and simultaneously extruding a molten second thermoplastic into the throat of the gap between the second roller and the second side of the fabric mesh; and drawing the composite of the molten first thermoplastic, the fabric mesh and the molten second thermoplastic through the gap between the first and second rollers and to force the molten first and second thermoplastic into and through the open mesh of the fabric mesh to fuse and bond the molten first and second thermoplastic and to bond the thermoplastics in and about the fabric mesh to form the fabric mesh reinforced monolithic thermoplastic membrane.

In the preferred embodiment of the present invention, one of the rollers is cooled to cool the molten second thermoplastic to a temperature below the thermoplastic melt temperature. The first roller is heated to a temperature between 85° and 110°, preferably about 105° C., to heat the molten first thermoplastic to improve fusing and bonding of the first and second thermoplastic.

In another preferred embodiment of the present invention, the fabric mesh reinforced monolithic thermoplastic membrane is maintained in contact with the first roller as it leaves the gap to insure complete fusing of the thermoplastics and imprint a finish on the first side of the membrane.

6,054,178

3

In another preferred step of the present invention, after the first side of the membrane leaves the surface of the first roller, the second side of the membrane is placed in contact with the surface of a third cooling roller to cool the second side of the membrane.

In a further preferred embodiment of the present invention, the membrane after contact cooling with the third roller is rapidly cooled to ambient temperature with air flow.

In a preferred embodiment of the present invention, the fabric mesh is maintained under slight tension as it is drawn into the gap between the first and second rollers to maintain the fabric mesh in a substantially plainer configuration.

In one embodiment of the present invention, the first and second rollers are rotated at the same speed. Preferably, the rollers are maintained at the same speed that the mesh is drawn into the gap between the first and second rollers.

In an alternative embodiment of the present invention, the rollers are rotated at different speeds with respect to each other. Preferably at least one roller is rotated at the same speed as the mesh fabric is drawn into the gap between the first and second rollers.

In one embodiment of the present invention, the fabric mesh is fed into the center of the gap between the first and second rollers with equal amounts of first and second thermoplastic being extruded into the throat of the extruder.

In an alternative embodiment of the present invention, the mesh is fed into the center of the gap between the first and second rollers with a greater amount of first thermoplastic being extruded into the throat than the amount of second thermoplastic being extruded into the throat.

In still another embodiment of the present invention, the mesh is drawn into the gap off center with equal amounts of first and second thermoplastic being extruded into the throat of the extruder.

In an alternative embodiment of the present invention, the mesh is drawn into the gap off center with a greater amount of first thermoplastic being extruded into the throat than the amount of second thermoplastic being extruded into the throat.

In the preferred embodiment of the present invention, the first and second thermoplastic are the same thermoplastic polymer, however, the first and second thermoplastic may have different pigments such as carbon black and titanium dioxide. Different thermoplastic materials of different thermoplastic polymers may be used in the production of the membrane of the present invention as long as the two thermoplastic materials can fuse together to form a monolithic structure. If the thermoplastic materials exhibit substantially different thermal coefficients of expansion, the resulting membrane may not be suitable for applications where the two sides of the membrane are exposed to different temperature gradients because of possible buckling. Preferably the two thermoplastics have similar melt indexes.

The present invention is also directed to a roofing system comprising a fabric mesh monolithic thermoplastic roofing membrane encapsulating an open mesh fabric mesh reinforcing material, the thermoplastic on the top side of the membrane containing a light reflective pigment.

In the preferred embodiment of the roofing membrane, the thermoplastic is polypropylene based thermoplastic olefin. Preferably the thermoplastic contains a UV absorbent if the membrane is for outdoor use. Preferably the top side of the roofing membrane contains titanium dioxide pigment as the light reflectant pigment. Most preferably, the bottom side of the membrane is pigmented with carbon black.

4

The present invention is also directed to a liner material for ponds, canals, reservoirs and pits comprising a fabric mesh monolithic thermoplastic encapsulating an open mesh fabric reinforcing material, the thermoplastic of the membrane containing carbon black pigment.

Preferably, the thermoplastic material contains a UV absorbent. Preferably, the thermoplastic material is polypropylene.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of the membrane extrusion process of the present invention;

FIG. 2 is a partial sectional top view of the fabric mesh reinforced thermoplastic membrane of the present invention;

FIG. 3 is a cross sectional view taken along lines 3—3 of FIG. 2; and

FIG. 4 is a cross sectional view taken along lines 4—4 of FIG. 2.

#### DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, the membrane extruder 10 comprises a first calender roller 12, a second calender roller 14 and a cooling roller 20. A take up roller 22 is provided to reel up the membrane 44 as a roll 40. The space between the first and second roller is referred to as the roller gap 16 and the entrance into the gap is referred to as the throat 18. A first die or extruder nozzle 24 is located approximate the first roller in front of the throat and a second die or extruder nozzle 26 is located approximate the second roller in front of the throat.

Open mesh fabric mesh 30 is drawn into the throat 18 under slight tension to maintain the open mesh fabric mesh in a plainer configuration. The first molten thermoplastic is extruded from the first nozzle 24 into the throat between the first side 31A of the fabric mesh and the first roller 12. Simultaneously, the second molten thermoplastic 34 is extruded from the second nozzle 26 into the throat between the second side 31B and the second roller 14. The rollers are rotated as shown by the arrows to draw the open mesh fabric and the extruded thermoplastic into the gap 16 between the rollers to force the thermoplastic into the open mesh of the open mesh fabric mesh, to fuse the first and second molten thermoplastic together and to encapsulate the fabric mesh to form the membrane. The membrane is drawn from the gap at a speed of 4 to 8 feet per minute, although other speeds can be employed. As the membrane leaves the throat, the first side of the membrane 45A is kept in contact with the surface of the first roller 12 to maintain the temperature of the polypropylene membrane above 100° C. to complete the fusing of the thermoplastic. The maintenance temperature varies for different thermoplastic melting points. The membrane 44 leaves the first roller and moves to the third roller 20 wherein the second side 45B of the membrane contacts the surface of the roller 20 to cool the second side and solidify it. The second and third rollers 14 and 20 are cooled with ambient temperature water. After leaving the gap and until the membrane leaves the third roller, the thermoplastic is still in a plastic or soft state, but has set, and can be imprinted with surface features if desired. Between the third roller 20 and the take up reel 22, the membrane is exposed to cooling air to cool the membrane down to ambient temperature. The cooled membrane is rolled into a roll 40 for transportation and storage.

The process permits the fabric mesh reinforced thermoplastic membrane to be made in a single step and it provides

6,054,178

5

a means for producing a single layer monolithic membrane wherein the reinforcing fabric mesh is fully encapsulated in the single layer of thermoplastic. The two extruded thermoplastics from the first and second nozzles are fully fused together in the gap by the action of the rollers to form a single layer. Thus, the membrane cannot delaminate, the fabric mesh is fully integral with the layer to provide maximum strength and reinforcement, and the fabric mesh is fully protected by the thermoplastic layer. In addition, because the membrane is prepared in a single step from two extruded molten thermoplastics at approximately the same temperature and which are cooled at approximately the same rate, the resulting membrane lies flat and is not subject to rippling like conventional fabric mesh reinforced thermoplastic membranes which are prepared in two or more separate steps.

Virtually any type of thermoplastic can be utilized in the present process. Preferably the thermoplastic has a melt index of at least 1.0 when tested at 2.14 Kg. at 190° C. Thermoplastics with higher melt indexes are less viscous when melted and flow easier into and through the open mesh than thermoplastics with lower melt indexes. Preferably the first and second thermoplastics have similar melt indexes; this makes the membrane more amenable to hot air weldability—sheets of membrane are frequently welded together to form continuous membranes for roofing, lines and the like—because both sides of the membrane heat up at the same rate. Thermoplastics with melt indexes of 1.0 are easier to hot air weld in the field. Polypropylene based thermoplastic olefin (a thermoplastic mixture of ethylene, propylene, polypropylene and EPR manufactured by Himont North America, Inc.) has been found to be very suitable because of its thermoplastic properties, its strength and its resistance to oxidation and UV. However, other thermoplastic polymeric material such as polyethylene, polystyrene, ABS, polyester thermoplastic, urethane and polyvinyl plastics can also be utilized. The membrane can be prepared from two types of thermoplastic polymeric material with one type of thermoplastic polymeric material being extruded from the first die or extruded nozzle 24 and the second thermoplastic polymeric material being extruded from the second die or extruder nozzle 26. The two thermoplastics must be compatible and must be able to fuse together to create the desired membrane. Preferably, the two thermoplastics will have similar thermal coefficients of expansion so that the resulting membrane will lie flat and not ripple.

The fabric mesh can be made of plastic material such as polyester or nylon, natural fibers such as cotton or hemp, or metal. A fabric mesh must be employed that has an open mesh and that can withstand the temperature of the molten thermoplastic during the extrusion process. The fabric mesh is thinner than the resulting membrane so that the fabric mesh will have a protective coating of thermoplastic on the first and second sides of the fabric mesh. The fabric mesh can be a woven mesh or a non-woven mesh.

The membranes are normally prepared in thicknesses of from 30 to 100 mils, although thicker membranes may be prepared and it may be possible to prepare membranes thinner than 30 mils.

Each of the rollers on the extruder is preferably a powered roller. Normally the rollers are run at the same circumferential speed. However, the first and second rollers may be operated at different speeds to yield a particular type of finish on the resulting membrane. Preferably, at least one of the rollers is rotating at the same circumferential speed as the speed that the membrane is being drawn out of the gap of the extruder rollers.

6

A particular finish can be applied to the first side of the membrane by imparting a particular finish to the surface of the first roller. The first roller can be polished, smooth, roughened, or imprinted with a particular design, and the like, which is imparted into the first side of the membrane which is relatively plastic when it leaves the gap 16.

The size of the rollers does not appear to be crucial to the process. Rollers having a diameter of 14" have been found to be quite satisfactory although smaller and larger rollers would work equally as well. The second and third rollers 14 and 20 are normally cooled with ambient temperature water; and the first roller 12 is heated with water and steam to about 105° C. to maintain the temperature of the polypropylene based thermoplastic olefin to at least 100° C. The thermoplastic is cooled below its melting temperature before it leaves contact with the surface of a roller, that is, the first side 45A of the membrane of 44 is cooled to below its melting temperature before it leaves the surface of the first roller 12 and the second side 45B of the membrane is cooled to below its melting temperature before it leaves the surface of the cooling roller 20.

Although the open mesh fabric mesh is normally drawn into the center of the gap, that is to the middle of the gap 16 between the first and second rollers, the fabric can be drawn off center into the gap. When it is desired to have the fabric mesh in the center of the membrane product, normally equal amounts of thermoplastic are extruded from the first and second nozzles 24 and 26. However, different amounts of thermoplastic can be extruded from the first and second nozzles to make the first or second side of the membrane thicker. Sufficient thermoplastic is employed to fully cover the fabric mesh.

Referring to FIG. 2, the membrane 44 comprises open mesh fabric mesh 46 encapsulated by thermoplastic 48. As shown in FIG. 3, the lateral mesh fabric fibers or strands 54 and the longitudinal mesh fabric fibers or strands 56 of the open mesh fabric mesh 46 are encapsulated between the first side 50 of the thermoplastic membrane 44 and the second side 52 of the thermoplastic membrane. Although the open mesh fabric mesh is shown in the central region of the membrane, the mesh fabric can be located off center depending upon the particular need.

The dotted line in FIG. 4 identifies the zone fusion between the first extruded thermoplastic and the second extruded thermoplastic when equal amounts of thermoplastic are employed in the manufacture of the membrane. The two extrusions of thermoplastic are completely fused together and there is no line of demarkation in the membrane 44 if the same thermoplastic is used to produce the membrane. The membrane is a single layer membrane, not a two layer membrane. Accordingly, the resulting membrane cannot be delaminate. It is particularly important during the manufacture of the membrane that the extruded thermoplastic be heated to a sufficiently high temperature so that the two extrusions of molten thermoplastic can flow into and through the open mesh of the open mesh fabric mesh and fuse with each other before the melted thermoplastic has cooled by the first and second rollers to below its fusion or melting temperature. It is only in that way that the monolithic membrane of the present invention can be produced. The open mesh fabric membrane can be woven from plastic, natural fiber or metal fibers or strands. Alternatively, non-woven mesh of plastic or metal mesh can also be employed in the present invention.

When the monolithic membrane is to be employed for roofing, the first layer 48 will preferably be pigmented with

6,054,178

7

a reflective pigment, such as titanium dioxide or particulate aluminum metal. Preferably, the second side 52 of the membrane 44 will be pigmented with carbon black pigment. However, both the first and second side can be pigmented with light reflective pigment. If desired, either sides or both sides can be pigmented with other colored pigmented materials for decorative effects. When the monolithic membrane is to be used as liners for canals, reservoirs, pits or the like, the thermoplastic is normally pigmented with a black pigment such as carbon black. Carbon black is an excellent UV absorber and protects the thermoplastic from atmospheric oxidation.

Although not shown in the figures, the surface of either the first side 50 or the second side 52, or both sides, can be manufactured with different types surface finishes. For relatively thin membranes, the first side can be finished with a smooth or brushed finish and the second side normally reflects the open mesh fabric.

The membrane can be prepared with two or more layers of open mesh fabric mesh as long as there is sufficient spacing between the open meshes to permit the molten thermoplastic to enter into and go through the open mesh to complete encapsulate the mesh fiber and fuse the two extrusions of thermoplastic together.

What is claimed is:

1. A method of manufacturing a fabric mesh reinforced monolithic thermoplastic membrane having first and second sides of thermoplastic comprising drawing an open mesh fabric mesh into a throat between parallel, spaced apart first and second calender rollers of a membrane extruder, the first and second calender rollers separated by a gap, the mesh having first and second sides; simultaneously extruding a molten first thermoplastic into the throat of the two rollers between the first side of the open mesh fabric mesh and the first roller and a molten second thermoplastic into the throat between the second side of the open mesh fabric mesh and the second roller; and drawing the composite of molten first and second thermoplastics and the open mesh fabric mesh through the gap between the first and second calender rollers to force molten first and second thermoplastic into and through the open mesh of the fabric mesh to encapsulate the open mesh fabric mesh and fuse the first and second molten thermoplastic together to form a single layer and to produce the fabric mesh reinforced monolithic thermoplastic membrane having first and second sides of thermoplastic, the first and second thermoplastics being compatible and fusible with each other, the first calender roller heated to maintain the temperature of the fabric mesh reinforced monolithic thermoplastic membrane above 100° C., the temperature of the fabric mesh reinforced monolithic thermoplastic membrane being maintained above 100° C. after being drawn from the throat to complete fusing of the thermoplastic by keeping the first side of the fabric mesh reinforced monolithic thermoplastic membrane in contact with the first calender roller, the second calender roller cooled with ambient temperature water to cool the second side of the thermoplastic of the resulting fabric mesh reinforced monolithic thermoplastic membrane to a temperature below the melting temperature of the first and second thermoplastics as it leaves the gap between the first and second calender rollers.

2. The method according to claim 1 wherein after contacting the first side of the fabric mesh reinforced monolithic thermoplastic membrane on the first roller to complete the fusing of the thermoplastics, the second side of the fabric reinforced monolithic thermoplastic membrane is contacted with the surface of a cooled roller to cool the second side and solidify it.

8

3. The method according to claim 2 wherein the fabric mesh reinforced monolithic thermoplastic membrane after cooling and solidifying the second side of the membrane on the cooled roller is cooled with air to ambient temperature.

4. The method according to claim 1 wherein the open mesh fabric mesh is maintained under slight tension while being drawn into the throat to maintain the fabric mesh in a substantially planar state.

5. The method according to claim 1 wherein the first and second calender rollers are rotated at the same circumferential speed.

6. The method according to claim 1 wherein the first and second calender rollers are rotated at different circumferential speeds.

7. The method according to claim 1 wherein the open mesh fabric mesh is drawn into the center of the gap between the first and second calender rollers and equal amounts of molten first and second thermoplastic are extruded into the throat.

8. The method according to claim 1 wherein the open mesh fabric mesh is drawn into the center of the gap between the first and second calender rollers and a greater amount of molten first thermoplastic is extruded into the throat than the amount of molten second thermoplastic extruded into the throat.

9. The method according to claim 1 wherein the open mesh fabric mesh is drawn into the gap between the first and second calender rollers closer to the second calender roller than to the other roller, and a greater amount of the molten first thermoplastic is extruded into the throat than the amount of molten second thermoplastic extruded into the throat.

10. The method according to claim 1 wherein open mesh fabric mesh is drawn into the gap between the first and second calender rollers closer to the first calender roller than to the other roller and a greater amount of the molten second thermoplastic is extruded into the throat than the amount of molten first thermoplastic extruded into the throat.

11. The method according to claim 1 wherein the second thermoplastic is cooled below its melting temperature before it leaves contact with the second calender roller.

12. The method according to claim 1 wherein the first thermoplastic is cooled below its melting temperature before it leaves contact with the first calender roller.

13. The method according to claim 1 wherein the first and second thermoplastics have a melt index of at least 1.0 when tested at 2.14 Kg at 109° C.

14. The method according to claim 13 wherein the first and second thermoplastics have similar melt indexes.

15. The method according to claim 1 wherein the first and second thermoplastics are polypropylene based thermoplastic olefins with a melt index of at least 1.0 when tested at 1.4 Kg at 109° C.

16. The method according to claim 1 wherein the gap between the first and second calender rollers is between 30 and 100 mils to produce a fabric mesh reinforced monolithic thermoplastic membrane having a thickness of 30 to 100 mils.

17. The method according to claim 1 wherein the first calender roller is rotated at the same circumferential speed as the speed that the fabric mesh reinforced monolithic thermoplastic membrane is drawn out of the gap.

6,054,178

**9**

18. The method according to claim 15 wherein the first calender roller is heated with water and steam to about 105° C. to maintain the temperature of the first and second thermoplastics to at least 100° C. to complete fusion of the two thermoplastics.

19. The method according to claim 1 wherein the temperature of the first thermoplastic on the fabric mesh reinforced monolithic thermoplastic membrane is cooled below

**10**

its melting temperature before it leaves contact with the surface of the first calender roller.

20. The method according to claim 1 wherein the second calender roller cools the second side of the fabric mesh reinforced monolithic thermoplastic membrane before it leaves the surface of the second calender roller.

\* \* \* \* \*