

**UNITED STATES DISTRICT COURT
CENTRAL DISTRICT OF CALIFORNIA**

NOTICE OF ASSIGNMENT TO UNITED STATES MAGISTRATE JUDGE FOR DISCOVERY

This case has been assigned to District Judge Ronald S. W. Lew and the assigned discovery Magistrate Judge is Robert N. Block.

The case number on all documents filed with the Court should read as follows:

CV09- 8535 RSWL (RNBx)

Pursuant to General Order 05-07 of the United States District Court for the Central District of California, the Magistrate Judge has been designated to hear discovery related motions.

All discovery related motions should be noticed on the calendar of the Magistrate Judge

===== :
NOTICE TO COUNSEL

A copy of this notice must be served with the summons and complaint on all defendants (if a removal action is filed, a copy of this notice must be served on all plaintiffs).

Subsequent documents must be filed at the following location:

☒ **Western Division**
312 N. Spring St., Rm. G-8
Los Angeles, CA 90012

☐ **Southern Division**
411 West Fourth St., Rm. 1-053
Santa Ana, CA 92701-4516

☐ **Eastern Division**
3470 Twelfth St., Rm. 134
Riverside, CA 92501

Failure to file at the proper location will result in your documents being returned to you.

Name & Address: Michael J. Avenatti
 EAGAN O'MALLEY & AVENATTI, LLP
 450 Newport Center Drive, Second Floor
 Newport Beach, CA 92660
 (949) 706-7000
 (949) 706-7050

UNITED STATES DISTRICT COURT
 CENTRAL DISTRICT OF CALIFORNIA

ACCO BRANDS USA LLC

CASE NUMBER

CV09-08535 RSWL (RNBx)

PLAINTIFF(S)

v.

THE ASHLEY COLLECTION, INC. dba
 PROTOCOL

SUMMONS

DEFENDANT(S).

TO: DEFENDANT(S): THE ASHLEY COLLECTION, INC. dba PROTOCOL

A lawsuit has been filed against you.

Within 20 days after service of this summons on you (not counting the day you received it), you must serve on the plaintiff an answer to the attached ☒ complaint ☐ _____ amended complaint ☐ counterclaim ☐ cross-claim or a motion under Rule 12 of the Federal Rules of Civil Procedure. The answer or motion must be served on the plaintiff's attorney, Michael J. Avenatti, whose address is 450 Newport Center Drive, 2nd Floor, Newport Beach, CA 92660. If you fail to do so, judgment by default will be entered against you for the relief demanded in the complaint. You also must file your answer or motion with the court.

Clerk, U.S. District Court

Dated: November 19, 2009

By: A. De Avila

Deputy Clerk

(Seal of the Court)

[Use 60 days if the defendant is the United States or a United States agency, or is an officer or employee of the United States. Allowed 60 days by Rule 12(a)(3)].

UNITED STATES DISTRICT COURT, CENTRAL DISTRICT OF CALIFORNIA
CIVIL COVER SHEET

I (a) PLAINTIFFS (Check box if you are representing yourself ☐)
 ACCO BRANDS USA LLC

DEFENDANTS
 THE ASHLEY COLLECTION, INC. dba PROTOCOL

(b) Attorneys (Firm Name, Address and Telephone Number. If you are representing yourself, provide same.)

Michael J. Avenatti (949) 706-7000
 EAGAN O'MALLEY & AVENATTI, LLP
 450 Newport Center Drive, Second Floor, Newport Beach, CA 92660

Attorneys (If Known)

II. BASIS OF JURISDICTION (Place an X in one box only.)

- ☐ 1 U.S. Government Plaintiff ☒ 3 Federal Question (U.S. Government Not a Party)
- ☐ 2 U.S. Government Defendant ☐ 4 Diversity (Indicate Citizenship of Parties in Item III)

III. CITIZENSHIP OF PRINCIPAL PARTIES - For Diversity Cases Only
 (Place an X in one box for plaintiff and one for defendant.)

- | | PTF | DEF | | PTF | DEF |
|---|----------------------------|----------------------------|---|---------------------------------------|---------------------------------------|
| Citizen of This State | <input type="checkbox"/> 1 | <input type="checkbox"/> 1 | Incorporated or Principal Place of Business in this State | <input type="checkbox"/> 4 | <input type="checkbox"/> 4 |
| Citizen of Another State | <input type="checkbox"/> 2 | <input type="checkbox"/> 2 | Incorporated and Principal Place of Business in Another State | <input checked="" type="checkbox"/> 5 | <input checked="" type="checkbox"/> 5 |
| Citizen or Subject of a Foreign Country | <input type="checkbox"/> 3 | <input type="checkbox"/> 3 | Foreign Nation | <input type="checkbox"/> 6 | <input type="checkbox"/> 6 |

IV. ORIGIN (Place an X in one box only.)

- ☒ 1 Original Proceeding ☐ 2 Removed from State Court ☐ 3 Remanded from Appellate Court ☐ 4 Reinstated or Reopened ☐ 5 Transferred from another district (specify): ☐ 6 Multi-District Litigation ☐ 7 Appeal to District Judge from Magistrate Judge

V. REQUESTED IN COMPLAINT: JURY DEMAND: ☒ Yes ☐ No (Check 'Yes' only if demanded in complaint.)

CLASS ACTION under F.R.C.P. 23: ☐ Yes ☒ No

MONEY DEMANDED IN COMPLAINT: \$

VI. CAUSE OF ACTION (Cite the U.S. Civil Statute under which you are filing and write a brief statement of cause. Do not cite jurisdictional statutes unless diversity.)
 Patent Infringement

VII. NATURE OF SUIT (Place an X in one box only.)

OTHER STATUTES	CONTRACT	TORTS	TORTS	PRISONER	LABOR
<input type="checkbox"/> 400 State Reapportionment	<input type="checkbox"/> 110 Insurance	PERSONAL INJURY	PERSONAL PROPERTY	PETITIONS	<input type="checkbox"/> 710 Fair Labor Standards Act
<input type="checkbox"/> 410 Antitrust	<input type="checkbox"/> 120 Marine	<input type="checkbox"/> 310 Airplane	<input type="checkbox"/> 370 Other Fraud	<input type="checkbox"/> 510 Motions to Vacate Sentence	<input type="checkbox"/> 720 Labor/Mgmt. Relations
<input type="checkbox"/> 430 Banks and Banking	<input type="checkbox"/> 130 Miller Act	<input type="checkbox"/> 315 Airplane Product Liability	<input type="checkbox"/> 371 Truth in Lending	<input type="checkbox"/> 530 General Habeas Corpus	<input type="checkbox"/> 730 Labor/Mgmt. Reporting & Disclosure Act
<input type="checkbox"/> 450 Commerce/ICC Rates/etc.	<input type="checkbox"/> 140 Negotiable Instrument	<input type="checkbox"/> 320 Assault, Libel & Slander	<input type="checkbox"/> 380 Other Personal Property Damage	<input type="checkbox"/> 535 Death Penalty	<input type="checkbox"/> 740 Railway Labor Act
<input type="checkbox"/> 460 Deportation	<input type="checkbox"/> 150 Recovery of Overpayment & Enforcement of Judgment	<input type="checkbox"/> 330 Fed. Employers' Liability	<input type="checkbox"/> 385 Property Damage Product Liability	<input type="checkbox"/> 540 Mandamus/Other	<input type="checkbox"/> 790 Other Labor Litigation
<input type="checkbox"/> 470 Racketeer Influenced and Corrupt Organizations	<input type="checkbox"/> 151 Medicare Act	<input type="checkbox"/> 340 Marine	BANKRUPTCY	<input type="checkbox"/> 550 Civil Rights	<input type="checkbox"/> 791 Empl. Ret. Inc. Security Act
<input type="checkbox"/> 480 Consumer Credit	<input type="checkbox"/> 152 Recovery of Defaulted Student Loan (Excl. Veterans)	<input type="checkbox"/> 345 Marine Product Liability	<input type="checkbox"/> 422 Appeal 28 USC 158	FORFEITURE/PENALTY	PROPERTY RIGHTS
<input type="checkbox"/> 490 Cable/Sat TV	<input type="checkbox"/> 153 Recovery of Overpayment of Veteran's Benefits	<input type="checkbox"/> 350 Motor Vehicle	<input type="checkbox"/> 423 Withdrawal 28 USC 157	<input type="checkbox"/> 610 Agriculture	<input type="checkbox"/> 820 Copyrights
<input type="checkbox"/> 810 Selective Service	<input type="checkbox"/> 160 Stockholders' Suits	<input type="checkbox"/> 355 Motor Vehicle Product Liability	CIVIL RIGHTS	<input type="checkbox"/> 620 Other Food & Drug	<input checked="" type="checkbox"/> 830 Patent
<input type="checkbox"/> 850 Securities/Commodities/Exchange	<input type="checkbox"/> 190 Other Contract	<input type="checkbox"/> 360 Other Personal Injury	<input type="checkbox"/> 441 Voting	<input type="checkbox"/> 625 Drug Related Seizure of Property 21 USC 881	<input type="checkbox"/> 840 Trademark
<input type="checkbox"/> 875 Customer Challenge 12 USC 3410	<input type="checkbox"/> 195 Contract Product Liability	<input type="checkbox"/> 362 Personal Injury-Med Malpractice	<input type="checkbox"/> 443 Housing/Accommodations	<input type="checkbox"/> 630 Liquor Laws	SOCIAL SECURITY
<input type="checkbox"/> 890 Other Statutory Actions	<input type="checkbox"/> 196 Franchise	<input type="checkbox"/> 365 Personal Injury-Product Liability	<input type="checkbox"/> 444 Welfare	<input type="checkbox"/> 640 R.R. & Truck	<input type="checkbox"/> 861 HIA (1395ff)
<input type="checkbox"/> 891 Agricultural Act	REAL PROPERTY	<input type="checkbox"/> 368 Asbestos Personal Injury Product Liability	<input type="checkbox"/> 445 American with Disabilities - Employment	<input type="checkbox"/> 650 Airline Regs	<input type="checkbox"/> 862 Black Lung (923)
<input type="checkbox"/> 892 Economic Stabilization Act	<input type="checkbox"/> 210 Land Condemnation	IMMIGRATION	<input type="checkbox"/> 446 American with Disabilities - Other	<input type="checkbox"/> 660 Occupational Safety /Health	<input type="checkbox"/> 863 DIWC/DIWW (405(g))
<input type="checkbox"/> 893 Environmental Matters	<input type="checkbox"/> 220 Foreclosure	<input type="checkbox"/> 462 Naturalization Application	<input type="checkbox"/> 440 Other Civil Rights	<input type="checkbox"/> 690 Other	<input type="checkbox"/> 864 SSID Title XVI
<input type="checkbox"/> 894 Energy Allocation Act	<input type="checkbox"/> 230 Rent Lease & Ejectment	<input type="checkbox"/> 463 Habeas Corpus-Alien Detainee			<input type="checkbox"/> 865 RSI (405(g))
<input type="checkbox"/> 895 Freedom of Info. Act	<input type="checkbox"/> 240 Torts to Land	<input type="checkbox"/> 465 Other Immigration Actions			FEDERAL TAX SUITS
<input type="checkbox"/> 900 Appeal of Fee Determination Under Equal Access to Justice	<input type="checkbox"/> 245 Tort Product Liability				<input type="checkbox"/> 870 Taxes (U.S. Plaintiff or Defendant)
<input type="checkbox"/> 950 Constitutionality of State Statutes	<input type="checkbox"/> 290 All Other Real Property				<input type="checkbox"/> 871 IRS-Third Party 26 USC 7609

FOR OFFICE USE ONLY: Case Number: **CV09-08535 RSWL (RNBx)**

AFTER COMPLETING THE FRONT SIDE OF FORM CV-71, COMPLETE THE INFORMATION REQUESTED BELOW.

UNITED STATES DISTRICT COURT, CENTRAL DISTRICT OF CALIFORNIA
CIVIL COVER SHEET

VIII(a). IDENTICAL CASES: Has this action been previously filed in this court and dismissed, remanded or closed? ☒ No ☐ Yes

If yes, list case number(s): _____

VIII(b). RELATED CASES: Have any cases been previously filed in this court that are related to the present case? ☒ No ☐ Yes

If yes, list case number(s): _____

Civil cases are deemed related if a previously filed case and the present case:

- (Check all boxes that apply) ☐ A. Arise from the same or closely related transactions, happenings, or events; or
☐ B. Call for determination of the same or substantially related or similar questions of law and fact; or
☐ C. For other reasons would entail substantial duplication of labor if heard by different judges; or
☐ D. Involve the same patent, trademark or copyright, and one of the factors identified above in a, b or c also is present.

IX. VENUE: (When completing the following information, use an additional sheet if necessary.)

- (a) List the County in this District; California County outside of this District; State if other than California; or Foreign Country, in which **EACH** named plaintiff resides.
☐ Check here if the government, its agencies or employees is a named plaintiff. If this box is checked, go to item (b).

County in this District:*	California County outside of this District; State, if other than California; or Foreign Country
	Illinois

- (b) List the County in this District; California County outside of this District; State if other than California; or Foreign Country, in which **EACH** named defendant resides.
☐ Check here if the government, its agencies or employees is a named defendant. If this box is checked, go to item (c).

County in this District:*	California County outside of this District; State, if other than California; or Foreign Country
	New York

- (c) List the County in this District; California County outside of this District; State if other than California; or Foreign Country, in which **EACH** claim arose.
Note: In land condemnation cases, use the location of the tract of land involved.

County in this District:*	California County outside of this District; State, if other than California; or Foreign Country
Orange County	

* Los Angeles, Orange, San Bernardino, Riverside, Ventura, Santa Barbara, or San Luis Obispo Counties

Note: In land condemnation cases, use the location of the tract of land involved

X. SIGNATURE OF ATTORNEY (OR PRO PER): Michael J. Acosta Date November 19, 2009

Notice to Counsel/Parties: The CV-71 (JS-44) Civil Cover Sheet and the information contained herein neither replace nor supplement the filing and service of pleadings or other papers as required by law. This form, approved by the Judicial Conference of the United States in September 1974, is required pursuant to Local Rule 3-1 is not filed but is used by the Clerk of the Court for the purpose of statistics, venue and initiating the civil docket sheet. (For more detailed instructions, see separate instructions sheet.)

Key to Statistical codes relating to Social Security Cases:

Nature of Suit Code	Abbreviation	Substantive Statement of Cause of Action
861	HIA	All claims for health insurance benefits (Medicare) under Title 18, Part A, of the Social Security Act, as amended. Also, include claims by hospitals, skilled nursing facilities, etc., for certification as providers of services under the program. (42 U.S.C. 1935FF(b))
862	BL	All claims for "Black Lung" benefits under Title 4, Part B, of the Federal Coal Mine Health and Safety Act of 1969. (30 U.S.C. 923)
863	DIWC	All claims filed by insured workers for disability insurance benefits under Title 2 of the Social Security Act, as amended; plus all claims filed for child's insurance benefits based on disability. (42 U.S.C. 405(g))
863	DIWW	All claims filed for widows or widowers insurance benefits based on disability under Title 2 of the Social Security Act, as amended. (42 U.S.C. 405(g))
864	SSID	All claims for supplemental security income payments based upon disability filed under Title 16 of the Social Security Act, as amended.
865	RSI	All claims for retirement (old age) and survivors benefits under Title 2 of the Social Security Act, as amended. (42 U.S.C. (g))

1 Michael J. Avenatti (State Bar No. 206929)
Alexander L. Conti (State Bar No. 155945)
2 EAGAN O'MALLEY & AVENATTI, LLP
450 Newport Center Drive, Second Floor
3 Newport Beach, CA 92660
(949) 706-7000
4 (949) 706-7050 (Fax)

5 Attorneys for Plaintiff
ACCO BRANDS USA LLC

FILED
2009 NOV 19 PM 4:02
CLERK U.S. DISTRICT COURT
CENTRAL DIST. OF CALIF.
SANTA ANA

6
7
8 **IN THE UNITED STATES DISTRICT COURT**
9 **FOR THE CENTRAL DISTRICT OF CALIFORNIA, SOUTHERN DIVISION**

10
11 ACCO BRANDS USA LLC

12 Plaintiff,

13 vs.

14 THE ASHLEY COLLECTION, INC. dba
15 PROTOCOL,

16 Defendants.

Case No. **CV09-08535 RSWL (RNBx)**

COMPLAINT PATENT INFRINGEMENT

JURY TRIAL DEMANDED

17
18
19
20 ACCO Brands USA LLC ("ACCO"), by its undersigned attorneys, complains against
21 Defendant The Ashley Collection Inc. dba PROTOCOL ("PROTOCOL") as follows:
22

23
24 **NATURE AND STATUTORY BASIS OF ACTION**

25 1. This civil action arises under: (i) the Federal Patent Act, as provided for by 35 U.S.C.
26 §§ 100, *et seq.*; and (ii) the Court's supplemental jurisdiction, as provided for by 28 U.S.C. §§ 1338(b)
27 and 1367(a), over related breach of contract claims.
28

1 **THE PARTIES**

2 2. ACCO is a limited liability company existing under the laws of Delaware and has its
3 principal place of business at 300 Tower Parkway, Lincolnshire, Illinois 60069. ACCO does business
4 in the State of Illinois within this district and is in the business, *inter alia*, of manufacturing and
5 selling office equipment, including computer physical security devices.

6
7 3. Defendant The Ashley Collection Inc. dba PROTOCOL is, on information and belief, a
8 New York corporation with a principal place of business at 322 West 57th Street, New York, New
9 York.

10
11 **JURISDICTION AND VENUE**

12 4. This Court has jurisdiction under 28 U.S.C. § 1338(a) in that this is an action for patent
13 infringement founded upon the patent laws of the United States.

14 5. This Court has jurisdiction under 28 U.S.C. §§ 1338(b) and 1367(a) in that Count III is
15 joined with a substantial and related claim under the patent laws of the United States.

16 6. Defendant PROTOCOL is subject to this Court's personal jurisdiction because it does
17 and has done substantial business in this State and in this District, including, but not limited to: (1)
18 selling computer security locks within this State and in this District; and (2) regularly doing or
19 soliciting business, engaging in other persistent courses of conduct, and/or deriving substantial
20 revenue from goods used or consumed by, and services provided to, individuals in this State and in
21 this District.

22 7. Venue is proper in this district based on 28 U.S.C. § 1391(b)-(c) and 1400(b).

23
24 **FACTS COMMON TO ALL ALLEGATIONS**

25 8. Defendant PROTOCOL has sold, and continues to sell, products through Macy's and
26 Bed Bath & Beyond locations in this State and, specifically, in the County of Orange.

SUBSTANTIVE ALLEGATIONS

COUNT I

Patent infringement of U.S. Patent Number 6,006,557

9. Plaintiff incorporates and alleges as if fully set forth herein the allegations contained above in paragraphs 1 through 8.

10. On December 28, 1999, United States Letters Patent 6,006,557 ("the '557 Patent") issued to Stewart R. Carl, Alice Kasahara, Arthur H. Zarnowitz and William R. Murray, Jr. for an invention relating to a computer physical security device. A copy of the '557 Patent is attached hereto as Exhibit 1 and made a part of this complaint.

11. ACCO is by assignment the owner of .the '557 Patent.

12. Defendant PROTOCOL has directly infringed, induced infringement, and contributorily infringed ACCO's exclusive rights under the '557 Patent by manufacturing, offering to sell and/or selling products that embody the inventions of and are within the scope of the '557 Patent and by causing others to use Defendant PROTOCOL's infringing products. Defendant PROTOCOL continues to so infringe, induce infringement, and contributorily infringe.

13. Defendant PROTOCOL has actual notice of Plaintiff's rights and, notwithstanding such notice, have continued to willfully infringe, induce infringement, and contributorily infringe the '557 Patent and will continue to do so unless enjoined by this Court.

14. As a direct and approximate result of Defendant PROTOCOL's infringement, ACCO has suffered injury and damage which will continue to accrue, in an amount to be determined at trial.

COUNT II

Patent infringement of U.S. Patent Number 5,502,989

15. Plaintiff incorporates and alleges as if fully set forth herein the allegations contained above in paragraphs 1 through 8.

1 sell and/or selling products that embody the inventions of and are within the scope of the '403 Patent
2 and by causing others to use Defendant PROTOCOL's infringing products. Defendant PROTOCOL
3 continues to so infringe, induce infringement, and contributorily infringe.

4 25. Defendant PROTOCOL has had actual notice of Plaintiff's rights and, notwithstanding
5 such notice, have continued to willfully infringe, induce infringement, and contributorily infringe the
6 '403 Patent and will continue to do so unless enjoined by this Court.

7 26. As a direct and approximate result of Defendant PROTOCOL's infringement, ACCO
8 has suffered injury and damage which will continue to accrue, in an amount to be determined at trial.

9
10
11 *COUNT IV*

12 **Patent infringement of U.S. Patent Number 7,111,479**

13 27. Plaintiff incorporates and alleges as if fully set forth herein the allegations contained
14 above in paragraphs 1 through 8.

15 28. On September 26, 2006, United States Letters Patent 7,111,479 ("the '479 Patent")
16 issued to Stewart R. Carl, Alice Kasahara, Arthur H. Zarnowitz and William R. Murray, Jr. for an
17 invention relating to a computer physical security device. A copy of the '479 Patent is attached hereto
18 as Exhibit 4 and made a part of this complaint.

19 29. ACCO is by assignment the owner of the '479 Patent.

20 30. Defendant PROTOCOL has directly infringed, induced infringement, and
21 contributorily infringed ACCO's exclusive rights under the '479 Patent by manufacturing, offering to
22 sell and/or selling products that embody the inventions of and are within the scope of the '479 Patent
23 and by causing others to use Defendant PROTOCOL's infringing products. Defendant PROTOCOL
24 continues to so infringe, induce infringement, and contributorily infringe.

25 31. Defendant PROTOCOL has had actual notice of Plaintiff's rights and notwithstanding
26 such notice, have continued to willfully infringe, induce infringement, and contributorily infringe the
27 '479 Patent and will continue to do so unless enjoined by this Court.

1 32. As a direct and approximate result of Defendant PROTOCOL's infringement, ACCO
2 has suffered injury and damage which will continue to accrue, in an amount to be determined at trial.
3
4

5
6 COUNT VI

7 **Patent infringement of U.S. Patent Number 7,121,125**

8 33. Plaintiff incorporates and alleges as if fully set forth herein the allegations contained
9 above in paragraphs 1 through 8.

10 34. On October 17, 2006, United States Letters Patent 7,121,125 ("the '125 Patent") issued
11 to Stewart R. Carl, Alice Kasahara, Arthur H. Zarnowitz and William R. Murray, Jr. for an invention
12 relating to a computer physical security device. A copy of the '125 Patent is attached hereto as
13 Exhibit 5 and made a part of this complaint.

14 35. ACCO is by assignment the owner of the '125 Patent.

15 36. Defendant PROTOCOL has directly infringed, induced infringement, and
16 contributorily infringed ACCO's exclusive rights under the '125 Patent by manufacturing, offering to
17 sell and/or selling products that embody the inventions of and are within the scope of the '125 Patent
18 and by causing others to use Defendant PROTOCOL's infringing products. Defendant PROTOCOL
19 continues to so infringe, induce infringement, and contributorily infringe.

20 37. Defendant PROTOCOL has had actual notice of Plaintiff's rights and, notwithstanding
21 such notice, have continued to willfully infringe, induce infringement, and contributorily infringe the
22 '125 Patent and will continue to do so unless enjoined by this Court.

23 38. As a direct and approximate result of Defendant PROTOCOL's infringement, ACCO
24 has suffered injury and damage which will continue to accrue, in an amount to be determined at trial.
25

26 **JURY DEMAND**

27 Plaintiff ACCO demands a trial by jury on all matters and issues triable by jury.
28


PRAYER FOR RELIEF

WHEREFORE, ACCO prays for and demands the following relief:

1. That a permanent injunction be issued against further infringement of the '557, '989, '403, '479, and '125 Patents by Defendant PROTOCOL, Defendant PROTOCOL's officers, agents, servants, employees, and attorneys and those person in active concert or participation with them;
2. That ACCO be awarded damages for Defendant PROTOCOL's infringement of the '557, '989, '403, '479, and '125 Patents;
3. That the cost of this action be assessed against Defendant PROTOCOL;
4. That the Court make a finding of exceptional case and that ACCO be awarded treble damages and attorney's fees; and
5. That ACCO be afforded such other and further relief as the Court may deem just.

Respectfully submitted,

Dated: November 19, 2009


Michael J. Avenatti
EAGAN O'MALLEY & AVENATTI, LLP
450 Newport Center Drive, Second Floor
Newport Beach, CA 92660
Telephone: (949) 706-7000
Facsimile: (949) 706-7050
Email: mavenatti@eoalaw.com

Attorneys for Plaintiff
ACCO BRANDS USA LLC



US006006557A

United States Patent [19]
Carl et al.

[11] **Patent Number:** **6,006,557**
 [45] **Date of Patent:** **Dec. 28, 1999**

[54] **COMPUTER PHYSICAL SECURITY DEVICE**

[75] Inventors: **Stewart R. Carl**, Palo Alto; **Alice Kasahara**, Hayward; **Arthur H. Zarnowitz**, San Jose; **William R. Murray, Jr.**, Redwood City, all of Calif.

[73] Assignee: **ACCO Brands, Inc.**, Lincolnshire, Ill.

[21] Appl. No.: **08/927,334**

[22] Filed: **Sep. 11, 1997**

Related U.S. Application Data

[63] Continuation of application No. 08/385,715, Feb. 8, 1995, abandoned.

[51] Int. Cl.⁶ **F05B 69/00**

[52] U.S. Cl. **70/58; 70/14; 70/57**

[58] Field of Search **70/58, 14, 57, 70/423-430, 18, 232; 248/553, 551, 505; 411/552, 553, 555, 549, 349, 343, 216, 217**

[56] **References Cited****U.S. PATENT DOCUMENTS**

D. 232,416 8/1974 Gazda et al. .
 285,074 9/1883 Rhoades et al. 70/424
 D. 370,473 6/1996 Derman .
 505,299 9/1893 Schneider .
 606,734 7/1898 Olmstead .

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

454901 3/1949 Canada .
 791364 8/1968 Canada .
 987121 4/1976 Canada .
 455740 3/1913 France 70/424
 1085107 6/1953 France .
 2308006 4/1976 France .
 2636686 3/1990 France .
 1026519 10/1990 France .
 456219 2/1921 German Dem. Rep. .
 329934 12/1920 Germany .

335741 4/1921 Germany 70/202
 361068 4/1923 Germany 70/424
 577757 5/1933 Germany .
 3824393 7/1989 Germany .
 451949 10/1949 Italy .
 14095 11/1904 Norway .
 447091 5/1935 United Kingdom .
 447091 5/1936 United Kingdom .
 1256295 12/1971 United Kingdom .
 1376011 12/1974 United Kingdom .
 2109109 5/1983 United Kingdom .

OTHER PUBLICATIONS

Kablit Security System Catalog, pp. 7, 93, 1988. *Computer and Office Equipment Security Catalog*, ©1990 by Secure-It, Inc., 18 Maple Court, East Longmeadow, Mass. 01028.

Kensington Product Brochure for Kensington Apple®, LaserWriter® and Macintosh® Portable Security Systems. *Computer and Office Equipment Security Catalog*, ©1990 by Secure-It, Inc. 18 Maple court, East Longmeadow, Ma 01028.

Apple Security Bracket sold in AS Kit.

Retaining Device Incorporated in Apple Computers.


Primary Examiner—Darnell M. Boucher

Attorney, Agent, or Firm—Michael E. Woods; Townsend and Townsend and Crew

[57] **ABSTRACT**

An apparatus which inhibits the theft of equipment such as personal computers is disclosed. The equipment typically includes an external wall provided with a specially designed, approximately rectangular slot having preselected dimensions. An attachment mechanism includes a housing for a spindle having a first portion rotatable within the housing, a shaft extending outwardly from the housing, and a crossmember at the end of the shaft having peripheral dimensions closely conforming to the internal dimensions of the slot. The spindle is then rotated 90° to misalign the crossmember with the slot, thereby attaching the attachment mechanism rigidly to the external wall. A cable is secured to the housing and to an immovable object so that the equipment cannot be stolen.

12 Claims, 10 Drawing Sheets

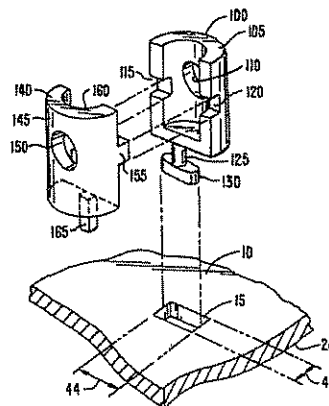

8

EXHIBIT 1

6,006,557

Page 2

U.S. PATENT DOCUMENTS

611,646	10/1898	Parker .	4,131,001	12/1978	Gotto .
786,842	4/1905	Robeson .	4,212,175	7/1980	Zakow .
881,364	3/1908	Wheeler .	4,223,542	9/1980	Basseches .
934,928	9/1909	Michel .	4,252,007	2/1981	Kerley .
942,537	12/1909	Baldorf .	4,300,371	11/1981	Herwick et al. .
952,411	3/1910	Billy .	4,311,883	1/1982	Kidney .
1,050,276	1/1913	Johnson 70/424	4,394,101	7/1983	Richer .
1,101,450	6/1914	Kerry 70/424	4,418,550	12/1983	Hamilton .
1,452,471	4/1923	Kline .	4,419,034	12/1983	DiMartino .
1,470,937	10/1923	Schou 70/424	4,442,571	4/1984	Davis et al. .
1,534,936	4/1925	Fischbach .	4,448,049	5/1984	Murray .
1,672,333	6/1928	Miller .	4,462,233	7/1984	Horetzke .
1,786,511	12/1930	Warren .	4,527,405	7/1985	Renick .
2,130,216	9/1938	Zaninovich .	4,570,465	2/1986	Bennett .
2,190,661	2/1940	Hauer .	4,584,856	4/1986	Petersdorff .
2,383,397	8/1945	Lofquist .	4,603,829	8/1986	Koike et al. .
2,469,874	5/1949	Fetsko, Jr. .	4,616,490	10/1986	Robbins .
2,480,662	8/1949	McKinzie .	4,640,106	2/1987	Derman .
2,594,012	4/1952	Griffin .	4,655,057	4/1987	Derman .
2,660,084	11/1953	Newman .	4,667,491	5/1987	Lokken et al. .
2,677,261	5/1954	Jacobi .	4,676,080	6/1987	Schwarz .
2,729,418	1/1956	Maynard .	4,680,949	7/1987	Stewart .
2,800,090	7/1957	Reid .	4,685,312	8/1987	Lakoski .
2,963,310	12/1960	Abolins .	4,691,891	9/1987	Dionne .
3,091,011	5/1963	Campbell .	4,704,881	11/1987	Sloop, Sr. .
3,101,695	8/1963	Honeyman, Jr. .	4,733,840	3/1988	D'Amore .
3,130,571	4/1964	Neumann .	4,738,428	4/1988	Themistos et al. .
3,136,017	6/1964	Preziosi .	4,741,185	5/1988	Weinert et al. .
3,171,182	3/1965	Danby .	4,768,361	9/1988	Derman .
3,200,694	8/1965	Rapata .	4,779,434	10/1988	Derman .
3,220,077	11/1965	Newcomer, Jr. et al. .	4,805,426	2/1989	Dimmick et al. .
3,276,835	10/1966	Hall .	4,826,193	5/1989	Davis .
3,469,874	9/1969	Mercurio .	4,842,912	6/1989	Hutter, III .
3,521,845	7/1970	Sweda et al. .	4,843,848	7/1989	Igelmund .
3,590,608	7/1971	Smyth et al. .	4,856,304	8/1989	Derman .
3,634,963	1/1972	Hermann .	4,856,305	8/1989	Adams .
3,664,163	5/1972	Foote .	4,858,455	8/1989	Kuo .
3,722,329	3/1973	Mestre .	4,862,716	9/1989	Derman .
3,727,934	4/1973	Averbook et al. .	4,870,840	10/1989	Klein .
3,737,135	6/1973	Bertolini .	4,893,488	1/1990	Klein .
3,754,420	8/1973	Oellerich .	4,907,111	3/1990	Derman .
3,765,197	10/1973	Foote .	4,907,716	3/1990	Wankel et al. .
3,771,338	11/1973	Raskin .	4,918,952	4/1990	Lakoski .
3,772,645	11/1973	Odenz et al. .	4,924,683	5/1990	Derman .
3,782,146	1/1974	Franke .	4,938,040	7/1990	Humphreys, Jr. .
3,785,183	1/1974	Sander .	4,959,635	9/1990	Wilson .
3,798,934	3/1974	Wright et al. .	4,959,979	10/1990	Filipow .
3,826,510	7/1974	Halter .	4,979,382	12/1990	Perry .
3,859,826	1/1975	Singer et al. .	4,985,695	1/1991	Wilkinson et al. .
3,866,873	2/1975	Bohli .	4,986,097	1/1991	Derman .
3,875,645	4/1975	Tucker et al. .	4,993,244	2/1991	Osman .
3,910,079	10/1975	Gassaway .	5,001,854	3/1991	Derman .
3,910,081	10/1975	Pender .	5,010,748	4/1991	Derman .
3,986,780	10/1976	Nivel .	5,022,242	6/1991	Povilaitis .
3,990,276	11/1976	Shontz .	5,024,072	6/1991	Lee .
3,999,410	12/1976	Hall .	5,027,627	7/1991	Derman .
4,003,228	1/1977	Lievens et al. .	5,050,836	9/1991	Makous .
4,004,440	1/1977	Dreyer .	5,052,199	10/1991	Derman .
4,007,613	2/1977	Gassaway .	5,063,763	11/1991	Johnson .
4,018,339	4/1977	Pritz .	5,076,079	12/1991	Monoson et al. .
4,028,913	6/1977	Falk .	5,082,232	1/1992	Wilson .
4,028,916	6/1977	Pender .	5,082,233	1/1992	Ayers et al. .
4,047,748	9/1977	Whaley et al. .	5,119,649	6/1992	Spence .
4,055,973	11/1977	Best .	5,184,798	2/1993	Wilson .
4,057,984	11/1977	Avaiusini .	5,197,706	3/1993	Braithwaite et al. .
4,065,083	12/1977	Gassaway .	5,228,319	7/1993	Holley et al. .
4,066,195	1/1978	Dickler .	5,279,136	1/1994	Perry .
4,114,409	9/1978	Scire .	5,327,752	7/1994	Myers et al. .
4,118,902	10/1978	Saxton .	5,349,834	9/1994	Davidge .
4,123,922	11/1978	Kuenstler .	5,351,507	10/1994	Derman .
			5,351,508	10/1994	Kelley .
			5,361,610	11/1994	Sanders .

6,006,557

Page 3

5,370,488	12/1994	Sykes .	5,421,667	6/1995	Leyden et al. .
5,381,685	1/1995	Carl et al. .	5,466,022	11/1995	Derman .
5,390,514	2/1995	Harmon .	5,489,173	2/1996	Höfle .
5,390,977	2/1995	Miller .	5,520,031	5/1996	Davidge .
5,398,530	3/1995	Derman .	5,579,657	12/1996	Makous .
5,400,622	3/1995	Harmon .	5,603,416	2/1997	Richardson et al. .
5,406,809	4/1995	Igelmund .	5,608,605	3/1997	Siow et al. .
5,412,959	5/1995	Bentley .			

U.S. Patent

Dec. 28, 1999

Sheet 1 of 10

6,006,557

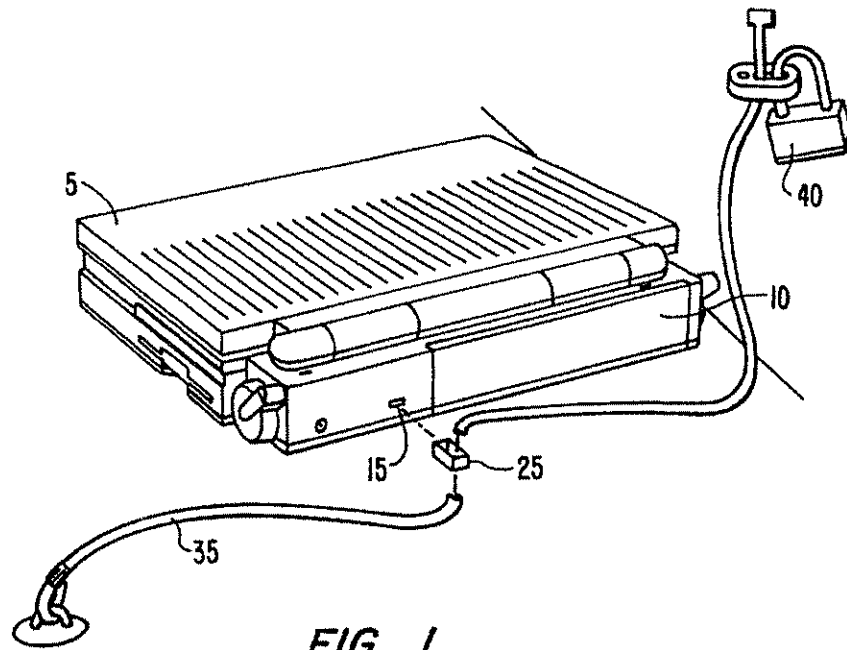


FIG. 1.

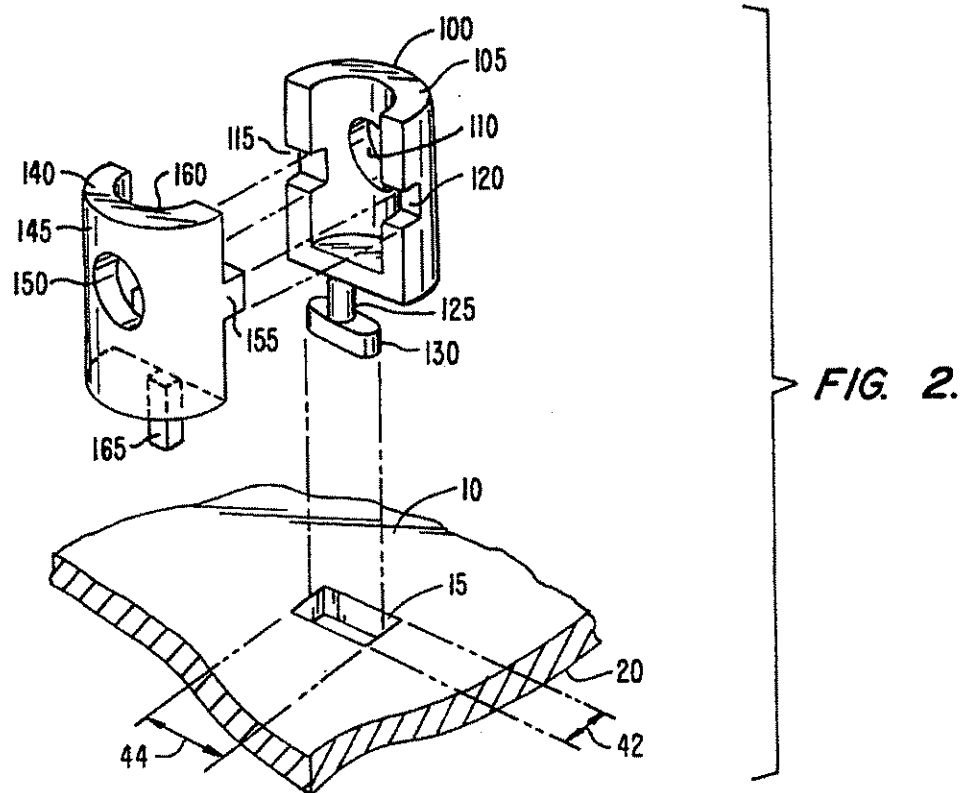


FIG. 2.

U.S. Patent

Dec. 28, 1999

Sheet 2 of 10

6,006,557

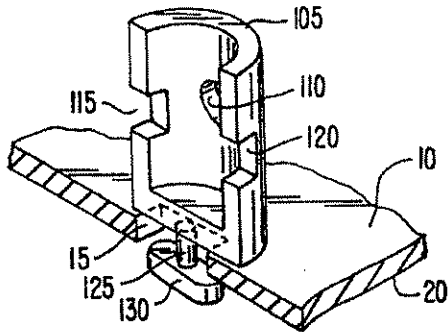


FIG. 3.

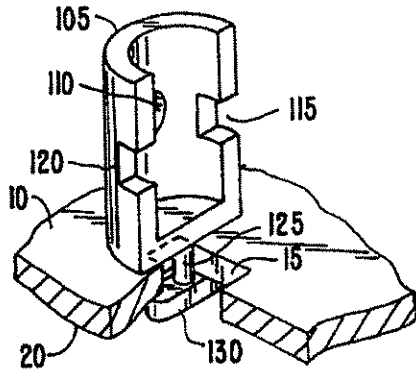


FIG. 4.

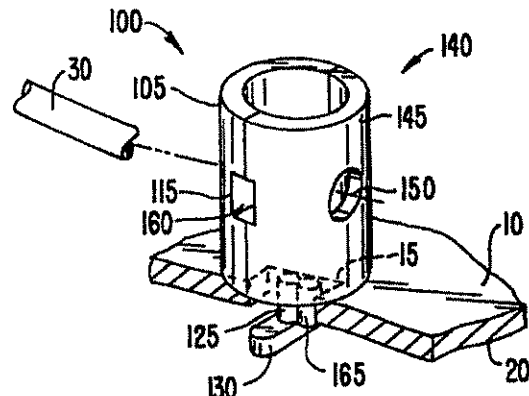


FIG. 5.

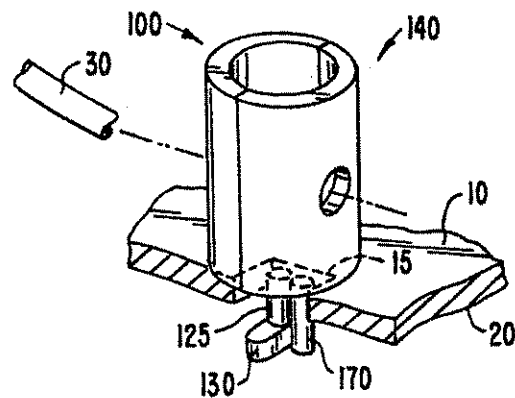




FIG. 6.

U.S. Patent

Dec. 28, 1999

Sheet 3 of 10

6,006,557


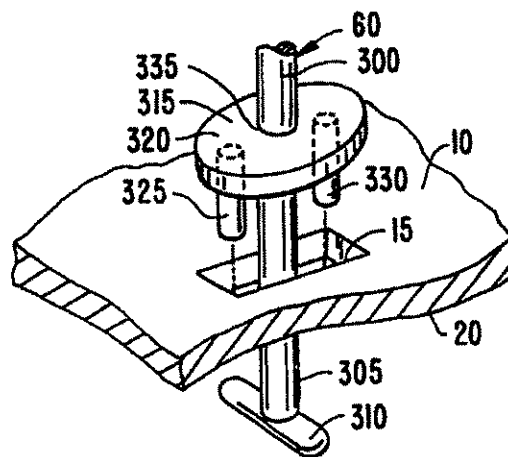
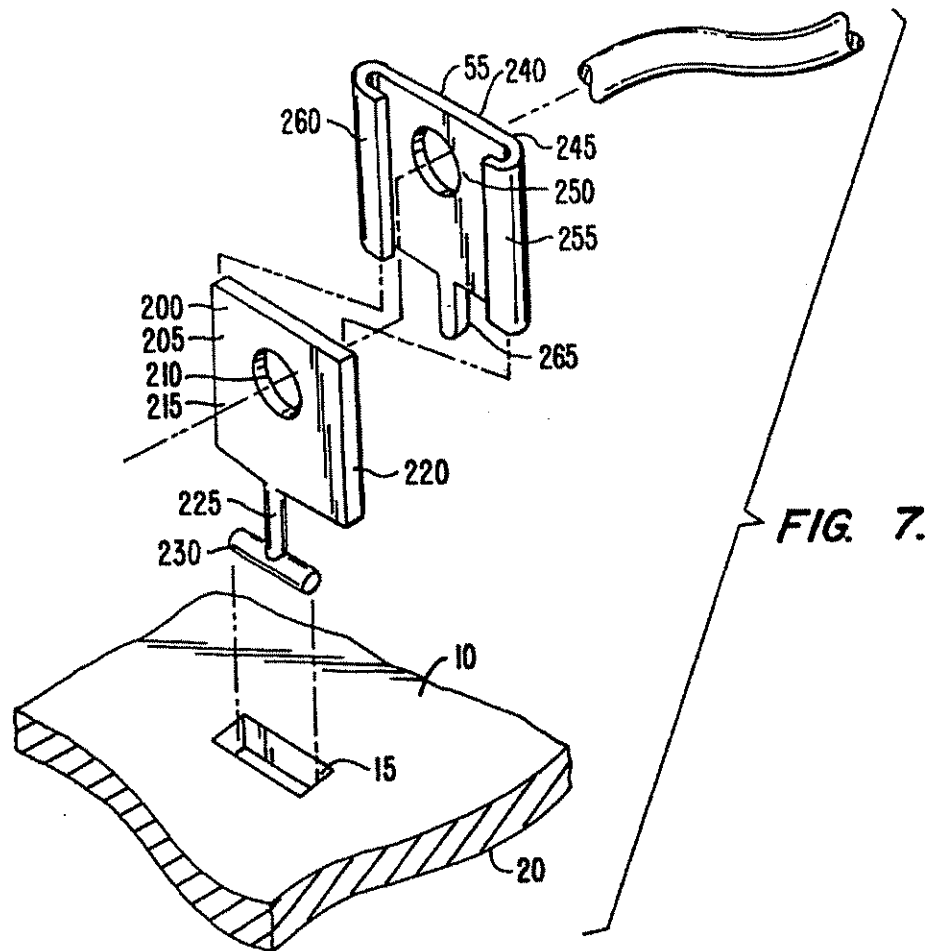


U.S. Patent

Dec. 28, 1999

Sheet 4 of 10

6,006,557

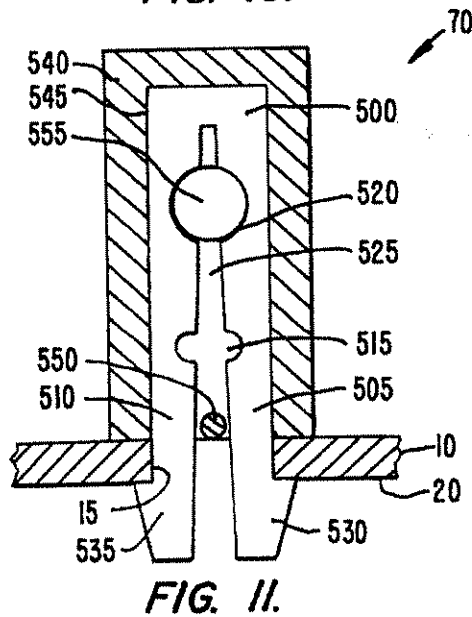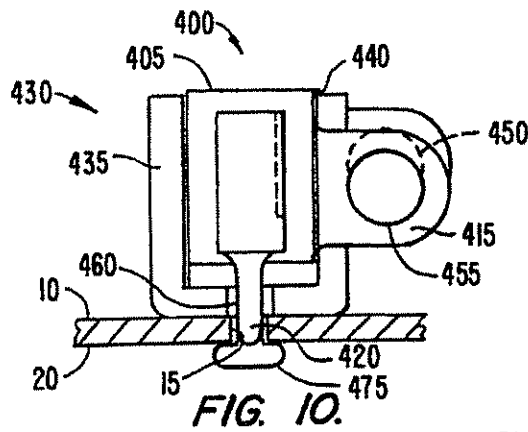
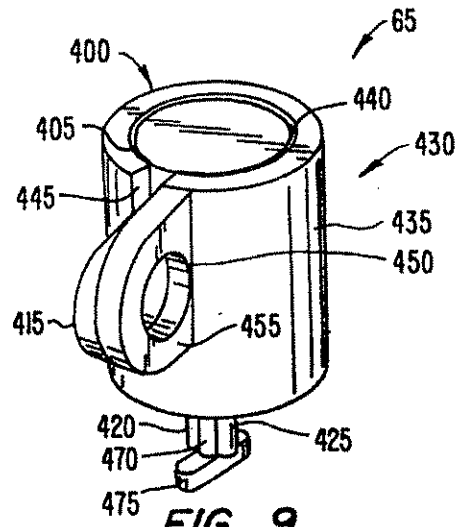


U.S. Patent

Dec. 28, 1999

Sheet 5 of 10

6,006,557

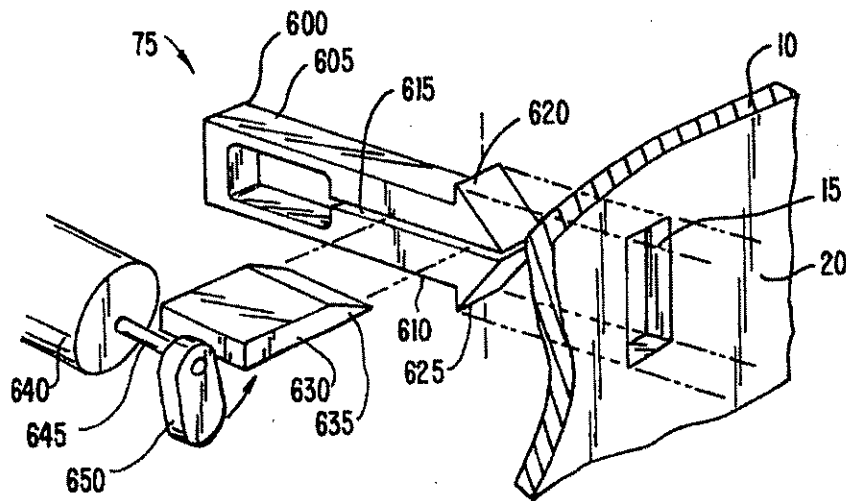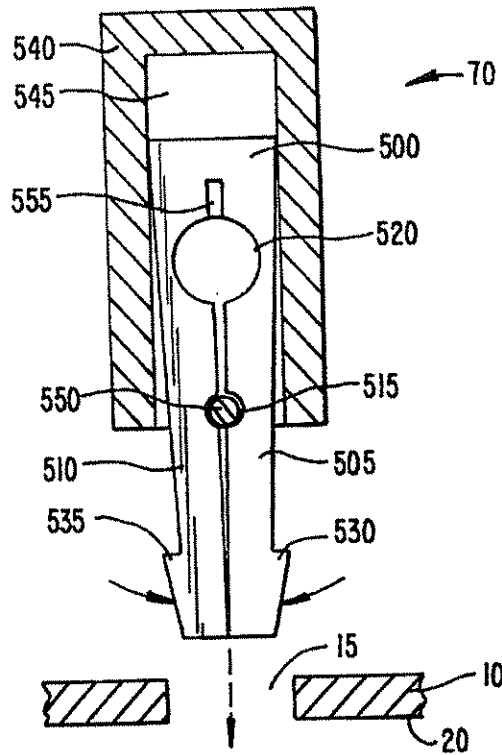

U.S. Patent

Dec. 28, 1999

Sheet 6 of 10

6,006,557

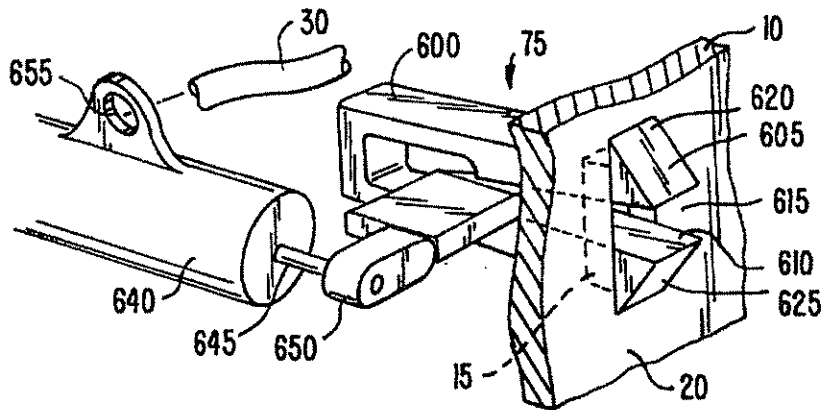


FIG. 14.

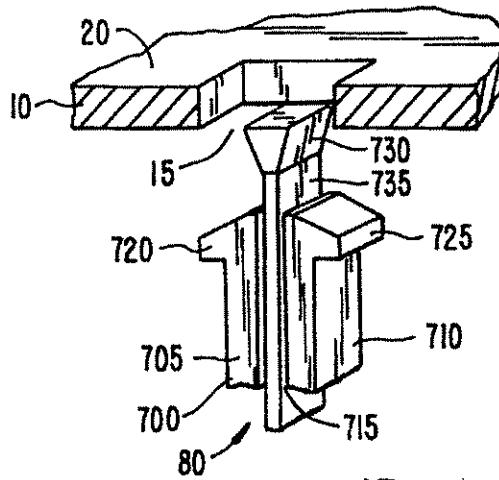


FIG. 15.

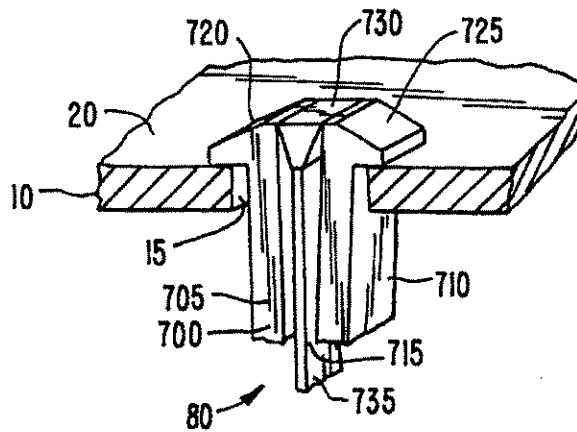


FIG. 16.

U.S. Patent

Dec. 28, 1999

Sheet 7 of 10

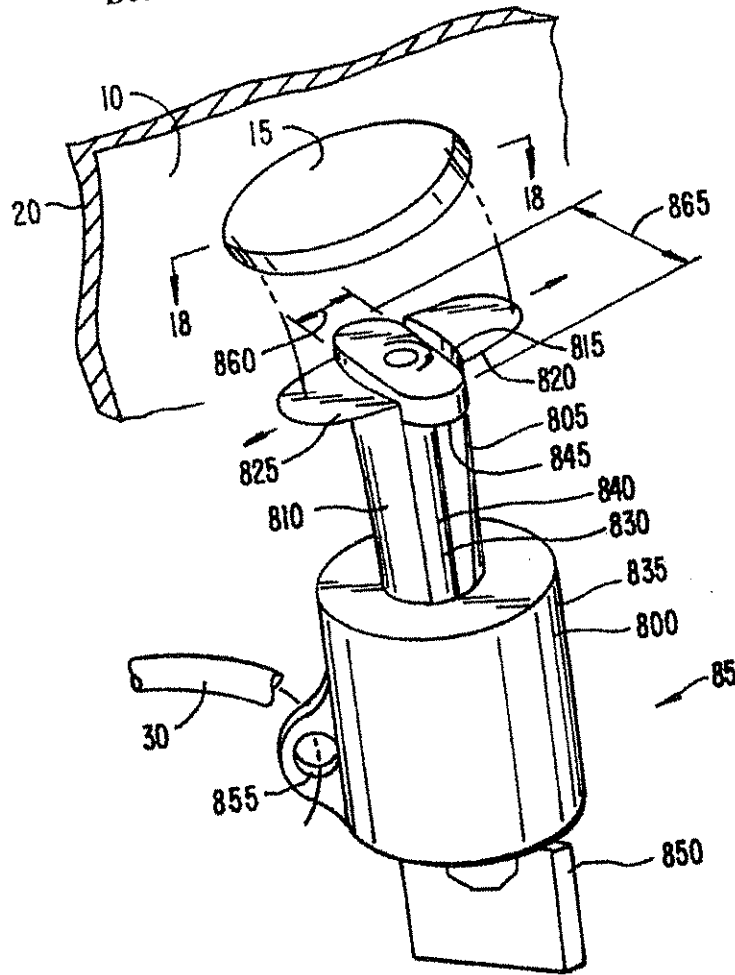


FIG. 17.

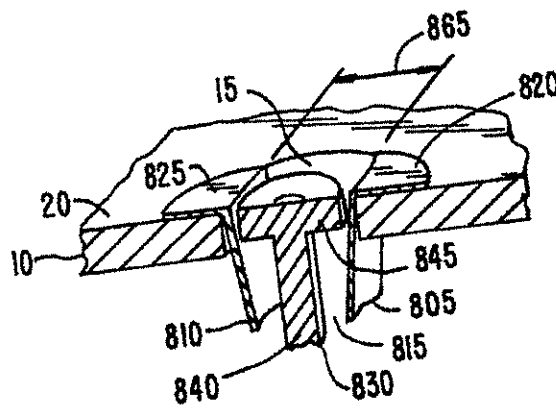




FIG. 18.

U.S. Patent

Dec. 28, 1999

Sheet 8 of 10

6,006,557

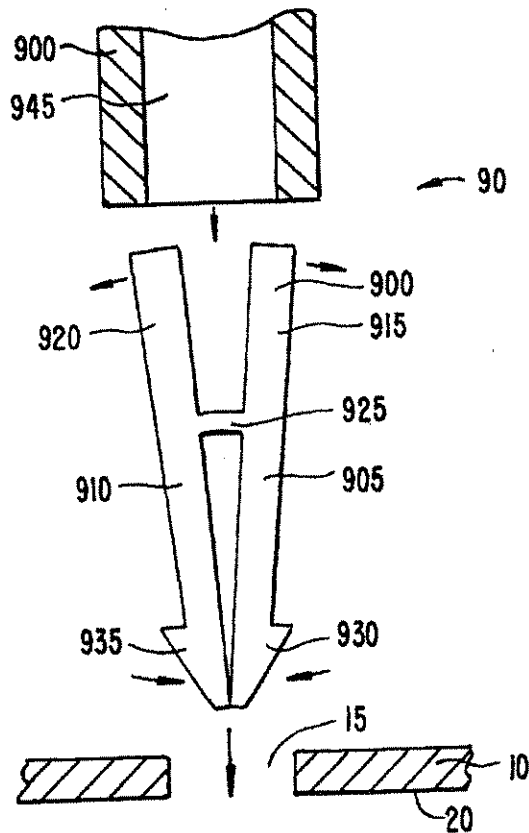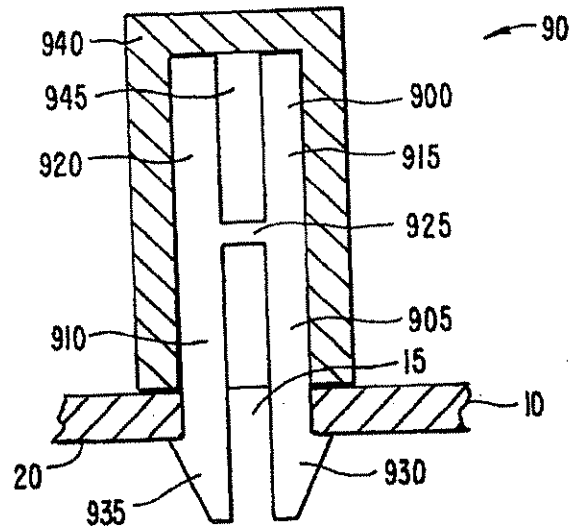

U.S. Patent

Dec. 28, 1999

Sheet 9 of 10

6,006,557

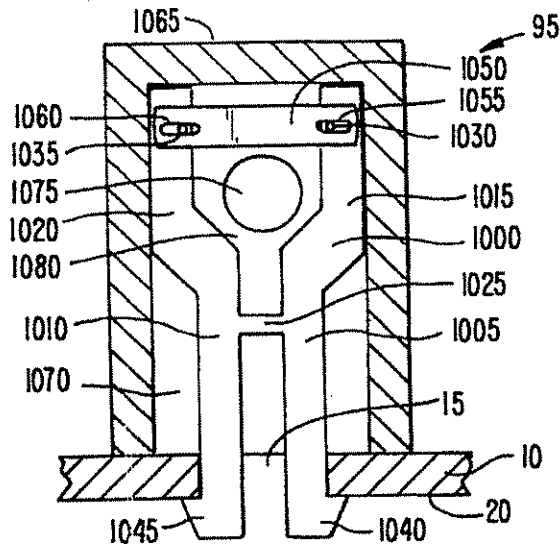


FIG. 21.

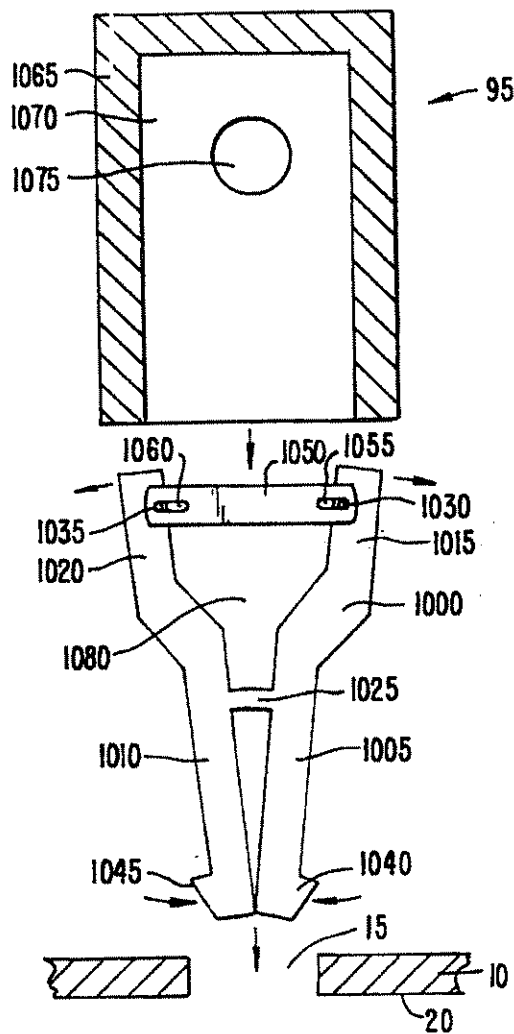




FIG. 22.

U.S. Patent

Dec. 28, 1999

Sheet 10 of 10

6,006,557

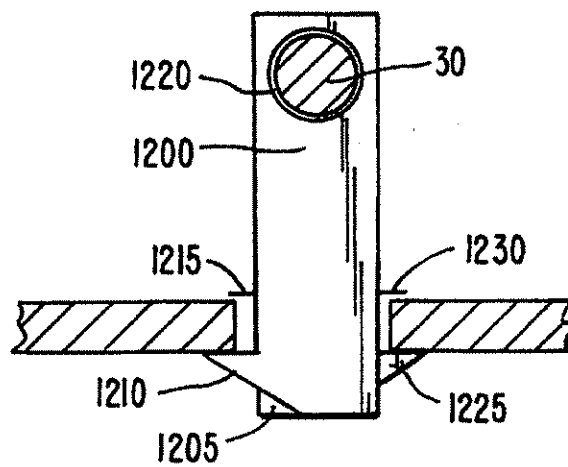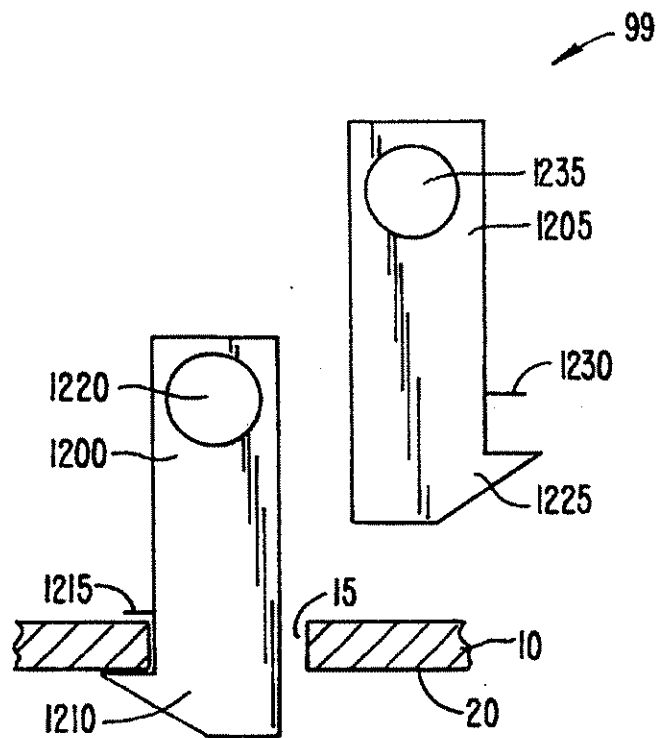

6,006,557

1

COMPUTER PHYSICAL SECURITY DEVICE

This is a Continuation of application Ser. No. 08/385,715, filed Feb. 8, 1995 now abandoned, the disclosure of which is incorporated by reference.

BACKGROUND OF THE INVENTION

The present invention relates generally to devices for inhibiting the theft of relatively small but expensive pieces of equipment. More specifically, the invention relates to a lock interface for a specially designed slot having predetermined dimensions.

Computers have evolved rather rapidly from large, expensive machines usable only by a few, to relatively small, portable machines which are usable by many. In particular, the development of desktop computers with significant processing power has made computers available to the general population. It is now common for college and even high school students to have their own computer, and desktop computers are in wide spread use as word processors and work stations in almost all forms of business. Desktop computers are relatively small and easily transportable, and an undesirable side effect of their proliferation is the fact that the theft of such computers is a significant problem.

A variety of devices have been developed to inhibit the theft of desktop computers and similar equipment. Since desktop computer systems involve several components, typically including the computer itself, a separate monitor, keyboard and often a printer, such security systems often employ a cable which attaches each of the components to each other and to a relatively immovable object such as a desk. The principal difficulty in such systems is providing an effective and convenient method for attaching the cable itself to the equipment.

Kensington Microware Limited, assignee of this application, currently provides a security system which is especially designed for use with particular Apple computers. Certain Apple computer components have slots and internal brackets designed to capture a specially designed tab inserted through the slot so that the tab is not removable. While this system is effective for particular types of Apple computers, it does not work for those Apple computer components and other computer brands which do not have the special designed slots and brackets.

It is undesirable to require a computer to have specially designed slots and internal capture brackets because the brackets occupy a significant amount of space in an item of equipment which is intended to be as space efficient as possible. Different items of Apple equipment require different sized slots, meaning that the security mechanism must provide a variety of different sized tabs. The tabs, once inserted, cannot be removed without damage to the equipment, meaning that the security system cannot be moved from one computer to the other. Even Apple computers with specially designed slots are typically used with peripheral equipment which does not have them, and, the Kensington system provides screws requiring a special screwdriver which replace the screws used to attach the existing communication cables, securing the peripheral equipment to the base computer by preventing unauthorized removal of the communication cables. This last aspect of the system has a drawback in that the peripheral equipment cannot be removed from the base computer without the special screwdriver, which can be lost or misplaced.

Other vendors provide security systems which are not required to interface directly with special slots and capture

2

mechanisms as provided in certain Apple computers. For example, Secure-It, Inc., under the trademark "KÄBLIT", provides a variety of brackets attached to the computer component using existing mounting screws, i.e., screws which are already used to secure items of equipment within the cabinet. Typically, the bracket is apertured so that passage of the cable through the aperture prevents access to the mounting screw and thus prevents removal of the bracket from the equipment. A deficiency of this type of system is that it requires the removal of the existing mounting screw, which may cause some damage to the internal components of the computer. Suitable existing screws are not always available on certain peripherals for convenient attachment of the fastener. For this latter reason, KÄBLIT also provides glue-on disks which, unfortunately, are permanently secured to the equipment.

The theft of small but expensive equipment such as desktop computers is a growing problem. Existing devices are simply too inefficient or ineffective, or their application is too limited. As a result, the use of such security systems is rare, computer equipment is typically left unprotected, and it is all too often stolen.

SUMMARY OF THE INVENTION

The present invention provides a simple yet efficient solution to the prior art problem of inhibiting theft of portable equipment. Specifically, the present invention discloses lock interfaces for a specially designed slot having predetermined dimensions and methods of providing a locking interface to a specially designed slot.

According to a preferred embodiment of the invention, a lock interface includes an anchor spindle and a locking spindle. The anchor spindle includes a neck portion and a head portion, and the locking spindle includes a locking pin. The head portion is adapted for insertion and removal from the specially designed slot when the head portion is aligned with the slot, with the locking pin adapted for insertion and removal from the slot after misaligning the head portion with the slot.

In operation, a user aligns the head portion with the slot, inserts the head portion into the slot, and then misaligns the head portion with the slot. The user then inserts the locking spindle into the slot, thereby inhibiting re-alignment of the head portion with the slot.

Alternative embodiments of the invention include: a lock interface with a first leg and an optional second leg, each having flanges that engage the inner surface of the slot in a locked position but not when the legs are in an unlocked position, and a spacer is interposed between the legs inhibiting the legs from moving from the locked position to the unlocked position; and a lock interface with a first and second legs as above and including a first handle, a second handle, and a retainer coupled to the handles inhibiting the legs from moving from the locked position to the unlocked position.

The preferred embodiment of the invention includes a method of attaching a locking interface to a slot in a computer device having the steps of: aligning a head portion of an anchor spindle with the slot, inserting the head portion into the slot, mis-aligning the head portion with the slot to inhibit removal of the head portion from the slot, and inserting a locking pin of a locking spindle into the slot to inhibit the head portion from aligning with the slot.

Further understanding of the nature and advantages of the invention may be realized by reference to the remaining

21

6,006,557

3

portions of the Specification and Drawings. In the drawings, similarly numbered items represent the same or functionally equivalent structures.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a typical use of an embodiment of the present invention;

FIG. 2 is a perspective view of an embodiment of the present invention;

FIG. 3 is a perspective view illustrating the head portion of an embodiment of the present invention aligned and inserted into the slot;

FIG. 4 is another perspective view illustrating the head portion of an embodiment of the present invention inserted and misaligned with the slot;

FIG. 5 is a perspective view illustrating the head portion of an embodiment of the present invention engaging the inner surface and the locking pin inserted in the slot;

FIG. 6 is a lock interface that is an alternative embodiment to the lock interface shown in FIGS. 2-5;

FIG. 7 illustrates another embodiment of a lock interface;

FIG. 8 illustrates another embodiment of a lock interface;

FIG. 9 illustrates another embodiment of a lock interface;

FIG. 10 is an elevation of FIG. 9, illustrating the head portion engaging the inner surface and the locking pin inserted into the slot;

FIG. 11 illustrates another embodiment of a lock interface;

FIG. 12 is another view of the lock interface in FIG. 11 with the first leg and the second leg in the first position;

FIG. 13 illustrates another embodiment of lock interface;

FIG. 14 is another view of the lock interface in FIG. 13 with the first leg and the second leg in the second position;

FIG. 15 illustrates another embodiment of lock interface;

FIG. 16 is another view of the lock interface in FIG. 15 with the first leg and the second leg in the second position;

FIG. 17 illustrates another embodiment of a lock interface;

FIG. 18 is another view of the lock interface in FIG. 17 with the first leg and the second leg in the second position;

FIG. 19 illustrates another embodiment of lock interface;

FIG. 20 is another view of the lock interface in FIG. 19 with the first leg and the second leg in the first position;

FIG. 21 illustrates another embodiment of lock interface;

FIG. 22 is another view of the lock interface in FIG. 21 with the first leg and the second leg in the second position;

FIG. 23 illustrates another embodiment of a lock interface; and

FIG. 24 is another view of the lock interface in FIG. 23 with the flange and the flange engaging the inner surface.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

FIG. 1 illustrates a typical use of an embodiment of the present invention. A portable computer 5 has a wall 10 provided with a slot 15. Wall 10 includes an inner surface 20. A lock interface 25 is engageable with wall 10 through slot 15. A locking mechanism 30, according to the preferred embodiment, includes a cable 35 and a lock 40. In operation, a user inserts lock interface 25 into slot 15 and engages lock interface 25 with inner surface 20. Once engaged, a user can attach lock interface 25 to a stationary object with cable 35

4

and lock 40. Locking mechanism 30 may include other objects, such as a shackle of padlock coupling a cable to the stationary object.

FIG. 2 is a perspective view of an embodiment of the present invention including a lock interface 25. Slot 15 has a small dimension 42 and a large dimension 44. Lock interface 25 includes an anchor spindle 100 having a body portion 105. Body portion 105 includes an aperture 110, two engagement members (engagement member 115 and engagement member 120), a neck portion 125, and a head portion 130. Neck portion 125 has a length exceeding a thickness of wall 10, enabling head portion 130 to be fully inserted into slot 15. In the preferred embodiment, head portion 130 preferably has a shape conforming to slot 15. Lock interface 25 also includes a locking spindle 140 having a body portion 145. Body portion 145 includes an aperture 150, two engagement members (engagement member 155 and engagement member 160), and a locking pin 165.

In operation, a user aligns head portion 130 with slot 15 and inserts head portion 130 into slot 15. FIG. 3 is a perspective view illustrating head portion 130 of an embodiment of the present invention aligned and inserted into slot 15. FIG. 4 is another perspective view illustrating head portion 130 of an embodiment of the present invention inserted and misaligned with slot 15. Mis-aligning head portion 130 with slot 15 engages head portion 130 with inner surface 20 of wall 10, thereby inhibiting removal of lock interface 25 from computer 5. Subsequent insertion of locking pin 165 into slot 15 inhibits re-alignment of head portion 130 with slot 15. FIG. 5 is a perspective view illustrating head portion 130 of an embodiment of the present invention engaging inner surface 20 and locking pin 165 inserted into slot 15. Engaging engagement member 115 with engagement member 160, and engagement member 120 with engagement member 155 (not shown) engages anchor spindle 100 with locking spindle 140. In the preferred embodiment, the size of neck portion 125 together with locking pin 165 exceeds small dimension 42 of slot 15, inhibiting rotation of locking spindle 140 and anchor spindle 100 together as a unit into slot 15, thereby inhibiting realignment of head portion 130 with slot 15. Inserting a locking mechanism 30 through aperture 110 and aperture 150 maintains the engagement of anchor spindle 100 with locking spindle 140, and can be used to lock the computer 5 to a stationary object.

FIG. 6 is a lock interface that is an alternative embodiment to the lock interface shown in FIGS. 2-5. Lock interface 50 does not have engagement members 115, 120, 155, or 160 on anchor spindle 100 or locking spindle 140. Lock interface 50 includes a locking pin 170 that has a depth at least equal to the depth of neck portion 125 including head portion 130.

In operation, a user aligns head portion 130 with slot 15 and inserts head portion 130 into slot 15. Misaligning head portion 130 with slot 15 engages head portion 130 with inner surface 20 of wall 10, thereby inhibiting removal of lock interface 50 from computer 5. Subsequent insertion of a locking pin 165 into slot 15 inhibits realignment of head portion 130.

In the preferred embodiment, the locking pin 170 physically inhibits rotation of head portion 130 within slot 15, thereby inhibiting re-alignment of head portion 130 with slot 15. Inserting a locking mechanism 30 through aperture 110 and aperture 150 maintains insertion of locking pin 165 and head portion 130 into slot 15, and can be used to lock the computer 5 to a stationary object.

6,006,557

5

FIG. 7 illustrates another embodiment of a lock interface 55. Lock interface 55 includes an anchor spindle 200 having a body portion 205. Body portion 205 includes an aperture 210, two engagement members (engagement member 215 and engagement member 220), a neck portion 225, and a head portion 230. The vertical sides of anchor spindle 200 form engagement member 215 and engagement member 220. Neck portion 225 has a length exceeding the thickness of wall 10 enabling head portion 230 to be fully inserted into slot 15. Head portion 230 preferably has a shape conforming to slot 15. Lock interface 55 also includes a locking spindle 240 having a body portion 245. Body portion 245 includes an aperture 250, two engagement members (engagement member 255 and engagement member 260), and a locking pin 265. The curved portions of locking spindle 240 form engagement member 255 and engagement member 260.

In operation, a user aligns head portion 230 with slot 15 and inserts head portion 230 into slot 15. Misaligning head portion 230 with slot 15 engages head portion 230 with inner surface 20 of wall 10, thereby inhibiting removal of lock interface 55 from computer 5. Subsequent insertion of locking pin 265 into slot 15 inhibits realignment of head portion 230 with slot 15. Sliding engagement member 220 over engagement member 255 and engagement member 215 over engagement member 260 engages locking spindle 240 with anchor spindle 200.

In the preferred embodiment, the size of neck portion 223 together with locking pin 265 exceed smaller dimension 42 of slot 15, inhibiting rotation of locking spindle 240 and anchor spindle 200 together as a unit within slot 15, thereby inhibiting re-alignment of head portion 230 with slot 15. Inserting a locking mechanism 30 through aperture 210 and aperture 250, maintains the engagement of anchor spindle 200 with locking spindle 240, and can be used to lock the computer 5 to a stationary object.

FIG. 8 illustrates another embodiment of a lock interface 60. Lock interface 60 includes an anchor spindle 300 having a neck portion 305 and a head portion 310. Head portion 310 preferably has a shape conforming to slot 15. Lock interface 60 also includes a locking spindle 315 having a body portion 320. Body portion 320 includes two locking pins (locking pin 325 and locking pin 330), and an engagement aperture 335. Neck portion 305 is adapted to engage locking spindle 335.

In operation, a user aligns head portion 310 with slot 15 and inserts head portion 310 into slot 15. Subsequent insertion of neck portion 305 through engagement aperture 335 allows movement of locking spindle 315 down neck portion 305 until locking pin 325 and locking pin 330 protrude into slot 15. Mis-aligning head portion 310 with slot 15, engages head portion 310 with inner surface 20 thereby inhibiting removal of lock interface 60 from computer 5. Attaching a locking mechanism 30 to anchor spindle 300 maintains engagement of head portion 310 with inner surface 20, and can be used to lock the computer 5 to a stationary object.

An alternative embodiment of the invention shown in FIG. 8, the locking spindle 315 may include a single locking pin 325.

FIG. 9 illustrates another embodiment of a lock interface 65. Lock interface 65 includes a locking spindle 400 having a cylindrical shaped body 405. Cylindrical shaped body 405 includes an aperture 410 in an engagement handle 415, and two locking pins (locking pin 420 and locking pin 425). Lock interface 65 also includes an anchor spindle 430 having a hollow cylindrical shaped body 435. Hollow cylindrical shaped body 435 includes a central cavity 440, an

6

engagement slot 445, an aperture 450 in a handle 455, two locking pin apertures, locking pin aperture 460 and locking pin aperture 465 (not shown), a neck portion 470, and a head portion 475. Neck portion 470 has a length exceeding the thickness of wall 10 enabling head portion 470 to be fully inserted into slot 15. Head portion 475 has a shape conforming to slot 15 in dimensions. FIG. 10 is an elevation of FIG. 9, illustrating head portion 470 engaging inner surface 20 and locking pin 420 inserted into slot 15.

Locking spindle 400 is inserted in central cavity 440 with engagement handle 415 slidably insertable into engagement slot 445. Anchor spindle 430 is adapted to allow locking spindle 400 to move co-axially within anchor cavity 440 towards and away from head portion 475 so as to insert and withdraw locking pin 420 and locking pin 425 from locking pin aperture 460 and locking pin aperture 465.

In operation, a user aligns head portion 475 with slot 15 and inserts head portion 475 into slot 15. Aligning locking pin aperture 460 and locking pin aperture 465 with slot 15 mis-aligns head portion 475 with slot 15, thereby engaging head portion 475 with inner surface 20 and inhibiting removal of lock interface 65 from computer 5. Subsequent insertion of locking spindle 400 into central cavity 440 and insertion of engagement handle 415 in engagement slot 445, moves locking spindle 400 co-axially in central cavity 440 towards wall 10 until locking pin 420 protrudes through locking pin aperture 460 and into slot 15 and until locking pin 425 protrudes through locking pin aperture 465 and into slot 15.

In the preferred embodiment, the size of neck portion 470 together with locking pin 420 exceed smaller dimension 42 of slot 15, inhibiting rotation of locking spindle 400 and anchor spindle 430 within slot 15, thereby inhibiting re-alignment of head portion 475 with slot 15. Locking a locking mechanism 30 through aperture 410 and aperture 450 maintains the engagement of locking spindle 400 to anchor spindle 430, and can be used to lock the computer 5 to a stationary object.

FIG. 11 illustrates another embodiment of a lock interface 70. Lock interface 70 includes an engagement member 500. Engagement member 500 includes a first leg 505, a second leg 510, a first aperture 515 between first leg 505 and second leg 510, a second aperture 520 between first leg 505 and second leg 510, and a space 525 between first leg 505 and second leg 510. First leg 505 includes a flange 530 at a distal end that is flanged away from second leg 510, and second leg 510 includes a flange 535 at a distal end that is flanged away from first leg 505. Lock interface 70 also includes a retainer 540. Retainer 540 includes a cavity 545, a spacer 550, and an aperture 555.

Engagement member 500 is slidably disposed within cavity 545 with spacer 550 being fixed in relation to retainer 540. Spacer 550 is small enough to freely slide within space 525, but is large enough to inhibit first leg 505 and second leg 510 from being squeezed together as illustrated in FIG. 11. When spacer 550 is located at first aperture 515 or second aperture 520, first leg 505 and second leg 510 can be squeezed together. This squeezed position defines a first position, and the unsqueezed position defines a second position. FIG. 12 is another view of the lock interface in FIG. 11 with first leg 505 and second leg 510 in the first position. When first leg 505 and second leg 510 are in the first position, flange 530 and flange 535 are insertable and removable from the slot 15. FIG. 11 illustrates that when first leg 505 and second leg 510 are in the second position, flange 530 and flange 535 are engageable with inner surface 20.

6,006,557

7

In operation, a user withdraws engagement member 500 from cavity 545 until spacer 550 is located at first aperture 515 (or second aperture 520). Squeezing first leg 505 and second leg 510 together moves first leg 505 and second leg 510 into the first position, allowing insertion of flange 530 and flange 535 into slot 15. Returning first leg 505 and second leg 510 to the second position allows flange 530 and flange 535 to engage inner surface 20. Subsequent movement of retainer 545 towards wall 10 until retainer 545 abuts wall 10, locates spacer 550 in space 525 but not within first aperture 515 or second aperture 520 and co-aligns aperture 555 with second aperture 520. In the preferred embodiment, locating spacer 550 in space 525 but not within first aperture 515 or second aperture 520, inhibits moving first leg 505 and second leg 510 into the first position. Locking a locking mechanism 30 through aperture 555 and second aperture 520 maintains the engagement of engagement member 500 with inner surface 20, and can be used to lock the computer 5 to a stationary object.

FIG. 13 illustrates another embodiment of lock interface 75. Lock interface 75 includes an engagement member 600. Engagement member 600 includes a first leg 605, a second leg 610, and a space 615 between first leg 605 and second leg 610. First leg 605 includes a flange 620 at a distal end that is flanged away from second leg 610, and second leg 610 includes a flange 625 at a distal end that is flanged away from first leg 605. Lock interface 75 also includes a spacer 630 having a ramped portion 635, and a spacer mover 635. Spacer mover 635 includes a housing 640, a rotatable shaft 645, a cam 650, and an aperture 655.

Spacer 630 is slidably disposable within space 615 by the movement of cam 650. When spacer 630 is not disposed between first leg 605 and second leg 610, this default position defines a first position, and when spacer 630 is disposed between first leg 605 and second leg 610 the position defines a second position. FIG. 13 illustrates that when first leg 605 and second leg 610 are in the first position, flange 620 and flange 625 are insertable and removable from the slot 15. FIG. 14 is another view of the lock interface in FIG. 13 with first leg 605 and second leg 610 in the second position. When first leg 605 and second leg 610 are in the second position, flange 620 and flange 625 are engageable with inner surface 20. A ramped portion 635 of spacer 630 is used to smoothly move first leg 605 and second leg 610 from the first position to the second position.

In operation, when first leg 605 and second leg 610 are in the first position, a user inserts flange 620 and flange 625 into slot 15. Rotating rotatable shaft 645 relative to housing 640 causes cam 650 to insert spacer 630 into space 615 which causes first leg 605 and second leg 610 to move into the second position. When first leg 605 and second leg 610 reach the second position, flange 620 and flange 625 engage inner surface 20. Locking a locking mechanism 30 through aperture 655 maintains the engagement of engagement member 600 with inner surface 20, and can be used to lock the computer 5 to a stationary object.

FIG. 14 illustrates another embodiment of lock interface 80. Lock interface 80 includes an engagement member 700. Engagement member 700 includes a first leg 705, a second leg 710, and a space 715 between first leg 705 and second leg 710. First leg 705 includes a flange 720 at a distal end that is flanged away from second leg 710, and second leg 710 includes a flange 725 at a distal end that is flanged away from first leg 705. Lock interface 80 also includes a spacer 730 and a shaft 735.

Spacer 730 is slidably disposable within space 715 in response to the movement of shaft 735 in space 715. When

8

spacer 730 is not disposed between first leg 705 and second leg 710, this default position defines a first position, and when spacer 730 is disposed between first leg 705 and second leg 710 the position defines a second position. FIG. 14 illustrates that when first leg 705 and second leg 710 are in the first position, flange 720 and flange 725 are insertable and removable from the slot 15. FIG. 16 is another view of the lock interface in FIG. 14 with first leg 705 and second leg 710 in the second position. When first leg 705 and second leg 710 are in the second position, flange 720 and flange 725 are engageable with inner surface 20.

In operation, when first leg 705 and second leg 710 are in the first position, a user inserts spacer 730, flange 720, and flange 725 into slot 15. Withdrawing shaft 735 partially from slot 15 while maintaining the position of first leg 705 and second leg 710 to the slot 15, forces spacer 730 into space 715 which causes first leg 705 and second leg 710 to move into the second position. When first leg 705 and second leg 710 reach the second position, flange 720 and flange 725 engage inner surface 20.

FIG. 17 illustrates another embodiment of a lock interface 85. Lock interface 85 includes an engagement member 800. Engagement member 800 includes a first leg 805, a second leg 810, and a space 815 between first leg 805 and second leg 810. First leg 810 includes a flange 820 at a distal end that is flanged away from second leg 810, and second leg 810 includes a flange 825 at a distal end that is flanged away from first leg 805. Lock interface 85 also includes a spacer mechanism 830. Spacer mechanism 830 includes a housing 835, a shaft 840, a head portion 845, a removable knob 850, and an aperture 855. Head portion 845 is oval in shape and has a smaller diameter 860 and a larger diameter 865.

First leg 805 and second leg 810 are fixed to housing 835 with shaft 840 and head portion 845 rotatably interspersed in space 815 between first leg 805 and second leg 810. When smaller diameter 860 is interposed between first leg 805 and second leg 810, the position defines a first position, and when larger diameter 865 is interposed between first leg 805 and second leg 810, the position defines a second position. FIG. 18 illustrates that when first leg 805 and second leg 810 are in the first position, flange 820 and flange 825 are insertable and removable from the slot 15. FIG. 18 is another view of the lock interface in FIG. 17 with first leg 805 and second leg 810 in the second position. When first leg 805 and second leg 810 are in the second position, flange 820 and flange 825 are engageable with inner surface 20. Smaller diameter 860 and larger diameter 865 of head portion 845 are interposed between first leg 805 and second leg 810 by rotating removable knob 850 relative to housing 835. Rotating removable knob 850 causes shaft 840 and head portion 845 to rotate relative to first leg 805 and second leg 810.

In operation, when first leg 805 and second leg 810 are in the first position, a user inserts head portion 845, flange 820, and flange 825 into slot 15. Rotating removable knob 850, shaft 840, and head portion 845 relative to housing 835 causes larger diameter 865 to be interposed between first leg 805 and second leg 810 and causes first leg 805 and second leg 810 to move into the second position. When first leg 805 and second leg 810 reach the second position, flange 820 and flange 825 engage inner surface 20. Removing removable knob 850 and locking a locking mechanism 30 through aperture 855 maintains the engagement of engagement member 800 with inner surface 20, and can be used to lock the computer 5 to a stationary object.

FIG. 19 illustrates another embodiment of lock interface 90. Lock interface 90 includes an engagement member 900.

24

6,006,557

9

Engagement member 900 includes a first leg 905, a second leg 910, a first handle 915, a second handle 920, and an articulation point 925. First leg 905 includes a flange 930 at a distal end that is flanged away from second leg 910, and second leg 910 includes a flange 935 at a distal end that is flanged away from first leg 905. Lock interface 90 also includes a retainer 940 having a cavity 945.

First leg 905 and second leg 910 are coupled to each other at articulation point 925. When first leg 905 and second leg 910 move towards each other, defining a first position, first handle 915 and second handle 920 are moved away from each other, and when first handle 915 and second handle 920 are moved towards each other, first leg 905 and second leg 910 move away from each other, defining a second position. FIG. 20 is another view of the lock interface in FIG. 19 with first leg 905 and second leg 910 in the first position. When first leg 905 and second leg 910 are in the first position, flange 930 and flange 935 are insertable and removable from slot 15. FIG. 19 illustrates that when first leg 905 and second leg 910 are in the second position, flange 930 and flange 935 are engageable with inner surface 20.

In operation, a user squeezes first leg 905 and second leg 910 into the first position, and inserts flange 930 and flange 935 into slot 15. Returning first leg 905 and second leg 910 to the second position allows engaging flange 930 and flange 935 with inner surface 20. Subsequent movement of retainer 940 towards wall 10 until retainer 945 abuts wall 10, prevents access to engagement member 900. In the preferred embodiment, access to first leg 905, second leg 910, first handle 915 and second handle 920 is prevented, maintaining the second position of first leg 905 and second leg 910, thereby maintaining the engagement of flange 930 and flange 935 with inner surface 20.

FIG. 21 illustrates another embodiment of lock interface 95. Lock interface 95 includes an engagement member 1000. Engagement member 1000 includes a first leg 1005, a second leg 1010, a first handle 1015, a second handle 1020, and an articulation point 1025. First handle 1015 includes a retaining pin 1030, and second handle 1020 includes a retaining pin 1035. First leg 1005 includes a flange 1040 at a distal end that is flanged away from second leg 1010, and second leg 1010 includes a flange 1045 at a distal end that is flanged away from first leg 1005. Lock interface 95 also includes a retaining clip 1050 having a first aperture 1055 and a second aperture 1060 and a retainer 1065 having a cavity 1070 and an aperture 1075. Retaining clip 1050, first handle 1015, and second handle 1020 together define an aperture 1080.

Retaining pin 1025 and retaining pin 1030 are inserted into first aperture 1055 and into second aperture 1060, respectively. Retaining clip 1050 limits the range of motion of first handle 1015 and second handle 1020. First leg 1005 and second leg 1010 are coupled to each other at articulation point 1025. When first leg 1005 and second leg 1010 move towards each other, defining a first position, first handle 1015 and second handle 1020 are moved away from each other, and when first handle 1015 and second handle 1020 are moved towards each other, first leg 1005 and second leg 1010 move away from each other, defining a second position. FIG. 21 illustrates that when first leg 1005 and second leg 1010 are in the first position, flange 1040 and flange 1045 are insertable and removable from slot 15. FIG. 22 is another view of the lock interface in FIG. 21 with first leg 1005 and second leg 1010 in the second position. When first leg 1005 and second leg 1010 are in the second position, flange 1040 and flange 1045 are engageable with inner surface 20.

In operation, a user squeezes first leg 1005 and second leg 1010 into the first position, and inserts flange 1040 and

10

flange 1045 into slot 15. Returning first leg 1005 and second leg 1010 to the second position allows engaging flange 1040 and flange 1045 with inner surface 20. Subsequent insertion of engagement member 1000 into cavity 1070 and movement of retainer 1065 until retainer 1065 abuts wall 10, co-aligns aperture 1075 and aperture 1080, and prevents access to engagement member 1000. In the preferred embodiment, access to first leg 1005, second leg 1010, first handle 1015, and second handle 1020 is prevented, maintaining positioning of first leg 1005 and second leg 1010 in the second position, thereby maintaining engagement of flange 1040 and flange 1045 with inner surface 20. Inserting a locking mechanism 30 through aperture 1075 and aperture 1080 maintains positioning of retainer 1065 to engagement member 1000, and can be used to lock the computer 5 to a stationary object.

FIG. 23 illustrates another embodiment of a lock interface 99. Lock interface 99 includes a first engagement member 1200 and a second engagement member 1205. First engagement member 1200 includes a flange 1210 at a distal end, a catch 1215, and an aperture 1220. Second engagement member 1205 includes a flange 1225 at a distal end, a catch 1230 and an aperture 1235.

First engagement member 1200 and second engagement member 1205 are independently insertable and removable from slot 15. When inserted into slot 15, flange 1210 and flange 1225 are engageable with inner surface 20. Catch 1215 and catch 1230 inhibit first engagement member 1200 and second engagement member 1205 from being fully inserted into slot 15, respectively. FIG. 23 illustrates flange 1210 of first engagement member 1200 engaging the inner surface 20 whereas second engagement member 1205 has not been inserted from slot 15. FIG. 24 is another view of the lock interface in FIG. 23 with flange 1210 and flange 1225 engaging inner surface 20.

In operation, a user inserts flange 1210 of first engagement member 1200 into slot 15 and engages flange 1210 with inner surface 20. Subsequent insertion of flange 1225 of second engagement member 1205 into slot 15, with flange 1225 pointing in a direction opposite that of flange 1210, engages flange 1225 with inner surface 20. Inserting a locking mechanism 30 through aperture 1210 and 1220 maintains engagement of flange 1210 and flange 1225 with inner surface 20 and can be used to lock the computer 5 to a stationary object.

In the foregoing specification, the invention has been described with reference to a specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereunto without departing from the broader spirit and scope of the invention as set forth in the claims.

Many changes or modifications are readily envisioned, for example, changing the shape of the slot and the shape of the head portion, adding catches to the engagement members, and changing the shape of the flanges among other changes. The specification and drawings are, accordingly, to be regarded in an illustrative rather than in a restrictive sense.

We claim:

1. A security lock system, comprising:
 - a portable electronic device having an external wall defining a security slot;
 - locking means for attaching to a first object other than to the portable electronic device;
 - a locking member having a peripheral profile complementary to preselected dimensions of said security slot, said locking member adapted for insertion into and

25

6,006,557

11

withdrawal from said slot when in a first position and for engagement with an interior surface of said wall when in a second position such that said locking member is associated with said portable device while in said second position;

a pin adapted for insertion into and withdrawal from said slot when said locking member is in said second position, said pin inhibiting transition of said locking member from said second position to said first position; and

means, coupled to said pin, for attaching to said locking means and for inhibiting removal of said pin from said slot.

2. The security lock of claim 1 wherein said peripheral profile matches said security slot.

3. A security lock system, comprising:

a portable electronic device having an external wall defining a security slot;

a locking member having a peripheral profile complementary to preselected dimensions of said security slot, said locking member adapted for insertion into and withdrawal from said slot when in a first position and for engagement with an interior surface of said wall when in a second position such that said locking member is associated with said portable device while in said second position;

a pin adapted for insertion into and withdrawal from said slot when said locking member is in said second position, said pin inhibiting transition of said locking member from said second position to said first position; and

pin retaining means coupled to said pin for inhibiting removal of said pin from said slot.

4. The security lock of claim 3 further comprising:

a cable attachment mechanism for associating a cable with the engagement member.

5. The security lock of claim 1 wherein said security slot is rectangular having a length dimension greater than a width dimension.

6. The security lock of claim 1 wherein said locking means is a cable and lock.

12

7. The security lock of claim 6 wherein said means for attaching to said locking means further comprises a cable attachment mechanism for associating said pin with said cable.

8. The security lock of claim 3 wherein said security slot is rectangular having a length dimension greater than a width dimension.

9. A security lock system, comprising:

a portable electronic device having an external wall defining a security slot;

a locking spindle having a body portion and a head portion, said head portion having a peripheral profile complementary to said security slot, said head portion adapted for insertion into and withdrawal from said slot when in a first position and for engagement with an interior surface of said wall when in a second position such that said head portion is associated with said portable device while in said second position;

an anchor spindle having a body portion and an anchor portion, said anchor portion adapted for insertion into and withdrawal from said slot when said head portion of the locking spindle is in said second position, said anchor portion inhibiting transition of said head portion from said second position to said first position, and said anchor spindle body portion adapted for association with said locking spindle body portion; and

a locking mechanism, adapted for engaging said anchor spindle body portion and said locking spindle body portion, inhibiting disassociation of said locking spindle and said anchor spindle.

10. The security lock of claim 9 wherein said anchor spindle body portion has at least one engagement member adapted for engaging said anchor spindle body portion to said locking spindle body portion.

11. The security lock of claim 9 wherein said security slot is rectangular having a length dimension greater than a width dimension.

12. The security lock of claim 9 wherein said locking mechanism is a cable for attaching to an object other than to said portable electronic device.

* * * * *



US005502989A

United States Patent [19]
Murray, Jr. et al.

[11] **Patent Number:** **5,502,989**
 [45] **Date of Patent:** **Apr. 2, 1996**

[54] **COMPUTER PHYSICAL SECURITY DEVICE**

2109109 5/1983 United Kingdom .

[75] **Inventors:** William R. Murray, Jr., Redwood City; Stewart R. Carl, Palo Alto; Arthur H. Zarnowitz, San Jose, all of Calif.

[73] **Assignee:** Kensington Microware Limited, San Mateo, Calif.

[21] **Appl. No.:** 307,113

[22] **Filed:** Sep. 16, 1994

Related U.S. Application Data

[60] Division of Ser. No. 138,634, Oct. 15, 1993, which is a continuation-in-part of Ser. No. 42,851, Apr. 5, 1993, Pat. No. 5,381,685, which is a continuation of Ser. No. 824,964, Jan. 24, 1992, abandoned, and a continuation-in-part of Ser. No. 6,311, Jan. 19, 1993, abandoned.

[51] **Int. Cl.**⁶ E05B 65/00
 [52] **U.S. Cl.** 70/58; 70/14; 70/57; 248/551
 [58] **Field of Search** 70/57, 58, 14, 70/18, 30, 49, 232, 423-430; 248/551, 553, 505; 411/555, 552, 553, 549, 349, 343, 216, 217

[56] References Cited

U.S. PATENT DOCUMENTS

505,299	9/1893	Schneider .	
606,734	7/1898	Olmstead .	70/428
611,646	10/1898	Parker .	70/430
786,842	4/1905	Robeson .	
881,364	3/1908	Wheeler .	70/424

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

987121	4/1976	Canada .	
2308006	4/1976	France .	
2636686	9/1988	France .	
329934	12/1920	Germany .	
577757	5/1933	Germany .	
447091	5/1936	United Kingdom .	70/424
1376011	12/1974	United Kingdom .	

OTHER PUBLICATIONS

Kablitz Security System Catalog, pp. 7, 93, 198. *Computer and Office Equipment Security Catalog*, ©1990 by Secure-It, Inc., 18 Maple Court, East Longmeadow, Mass. 01028.

Kensington Product Brochure for Kensington Apple®, LaserWriter® and Macintosh® Portable Security Systems. *Computer and Office Equipment Security Catalog*, ©1990 by Secure-It, Inc. 18 Maple Court, East Longmeadow, MA 01028.

Apple Security Bracket Sold in AS Kit.


Primary Examiner—Darnell M. Boucher

Attorney, Agent, or Firm—Townsend and Townsend and Crew

ABSTRACT

[57] An apparatus which inhibits the theft of equipment such as personal computers is disclosed. The equipment must have an external wall provided with a specially designed, approximately rectangular slot having preselected dimensions. An attachment mechanism includes a housing for a spindle having a first portion rotatable within the housing, a shaft extending outwardly from the housing, and a crossmember at the end of the shaft having peripheral dimensions closely conforming to the internal dimensions of the slot. An abutment mechanism also emanates from the housing, and is located on opposite sides of the shaft intermediate the housing and the crossmember. The peripheral cross-sectional dimensions of the abutment mechanism and the shaft in combination closely conform to the dimensions of the slot. The length of the shaft from the housing to the crossmember is approximately equal to the thickness of the external wall of equipment. The crossmember is aligned with the abutment mechanism so that the crossmember can be inserted through the slot with the shaft and the abutment mechanism occupying the slot. The spindle is then rotated 90° to misalign the crossmember with the slot, thereby attaching the attachment mechanism rigidly to the external wall. A cable is secured to the housing and to an immovable object so that the equipment cannot be stolen.

12 Claims, 11 Drawing Sheets

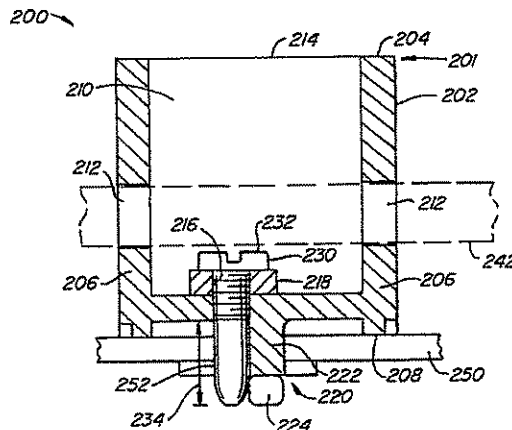

27

EXHIBIT 2

5,502,989

Page 2

U.S. PATENT DOCUMENTS

934,928	9/1909	Michel .	4,527,405	7/1985	Renick .
942,537	12/1909	Batdorf .	4,570,465	2/1986	Benett .
1,452,471	4/1923	Kline .	4,584,856	4/1986	Petersdorff .
2,480,662	8/1949	McKinzie .	4,616,490	10/1986	Robbins .
2,594,012	4/1952	Griffin .	4,640,106	2/1987	Derman .
2,660,084	11/1953	Newman .	4,655,057	4/1987	Derman .
2,677,261	5/1954	Jacobi 70/428	4,685,312	8/1987	Lakoski .
2,729,418	1/1956	Maynard .	4,691,891	9/1987	Dionne .
2,800,090	7/1957	Reid .	4,704,881	11/1987	Sloop, Sr. 70/428
3,136,017	6/1964	Preziosi .	4,733,840	3/1988	D'Amore .
3,200,694	8/1965	Rapata .	4,738,428	4/1988	Themistos'et al. .
3,220,077	11/1965	Newcomer, Jr. et al. .	4,826,193	5/1989	Davis .
3,276,835	10/1966	Hall .	4,842,912	6/1989	Hutter, III .
3,469,874	9/1969	Mercurio .	4,843,848	7/1989	Igelmund .
3,664,163	5/1972	Footo .	4,856,304	8/1989	Derman .
3,727,934	4/1973	Averbook et al. .	4,858,455	8/1989	Kuo .
3,785,183	1/1974	Sander .	4,907,716	3/1990	Wankel et al. .
3,859,826	1/1975	Singer et al. .	4,918,952	4/1990	Lakoski .
3,866,873	2/1975	Bohli . .	4,938,040	7/1990	Humphreys, Jr. .
4,004,440	1/1977	Dreyer .	4,959,979	10/1990	Filipow .
4,028,913	6/1977	Falk .	4,979,382	12/1990	Perry .
4,057,984	11/1977	Avaiusini .	4,985,695	1/1991	Wilkinson et al. .
4,065,083	12/1977	Gassaway .	4,993,244	2/1991	Osman .
4,131,001	12/1978	Gotto .	5,024,072	6/1991	Lee .
4,212,175	7/1980	Zakow .	5,050,836	9/1991	Makous .
4,223,542	9/1980	Basseches .	5,082,232	1/1992	Wilson .
4,252,007	2/1981	Kerley .	5,119,649	6/1992	Spence .
4,311,883	1/1982	Kidney .	5,184,798	2/1993	Wilson .
4,442,571	4/1984	Davis et al. .	5,197,706	3/1993	Braithwaite et al. .
4,462,233	7/1984	Horetzke .	5,327,752	7/1994	Myers et al. .

U.S. Patent

Apr. 2, 1996

Sheet 1 of 11

5,502,989

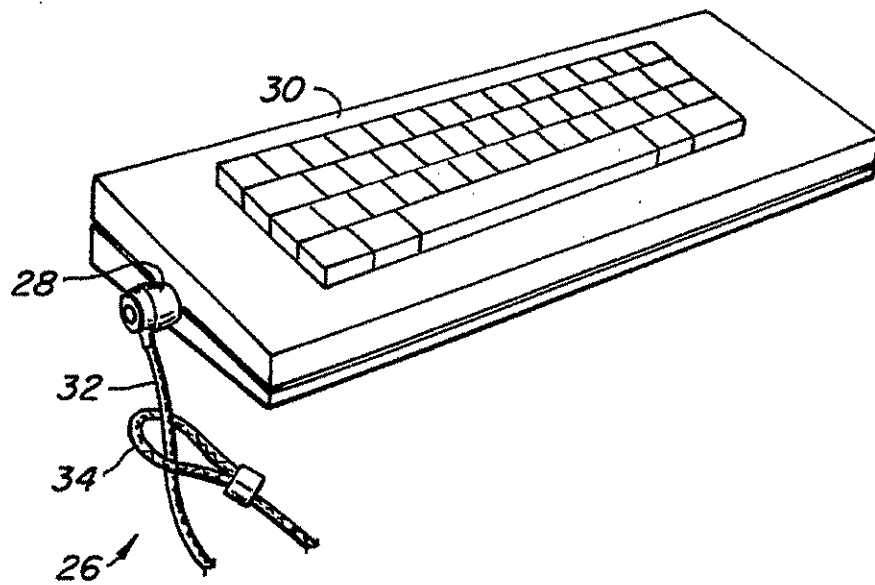
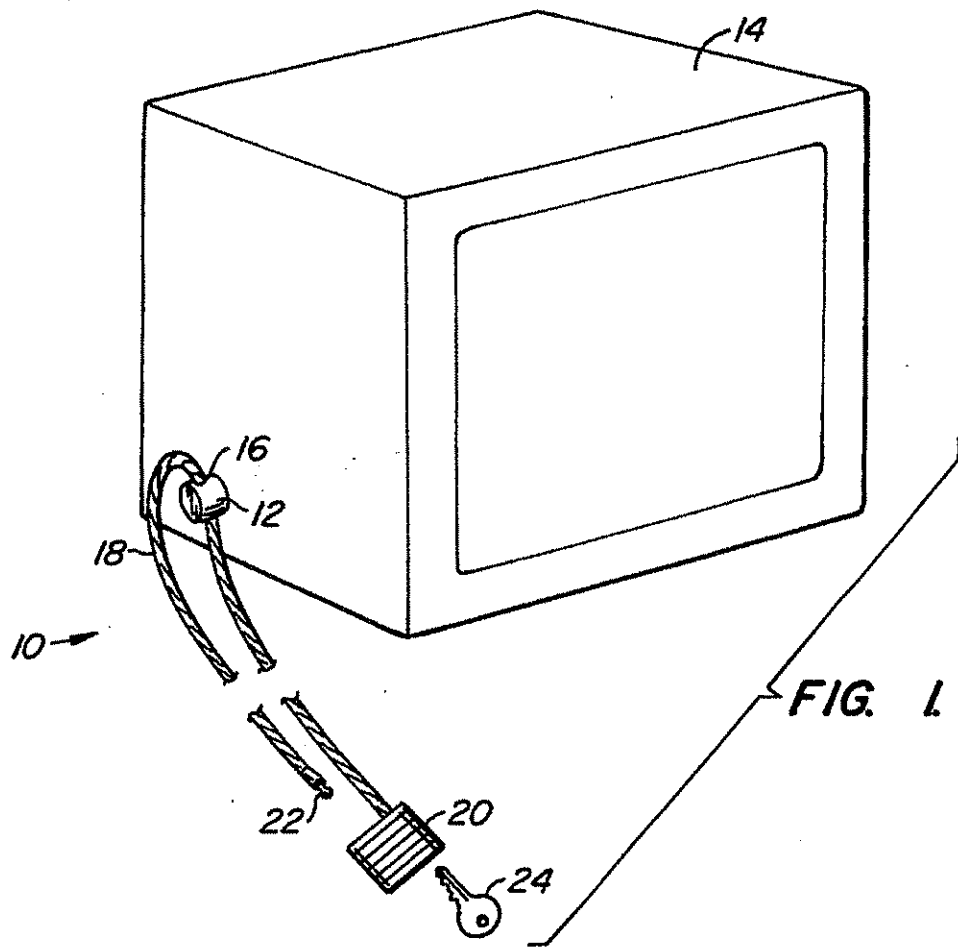


FIG. 2.

U.S. Patent

Apr. 2, 1996

Sheet 2 of 11

5,502,989

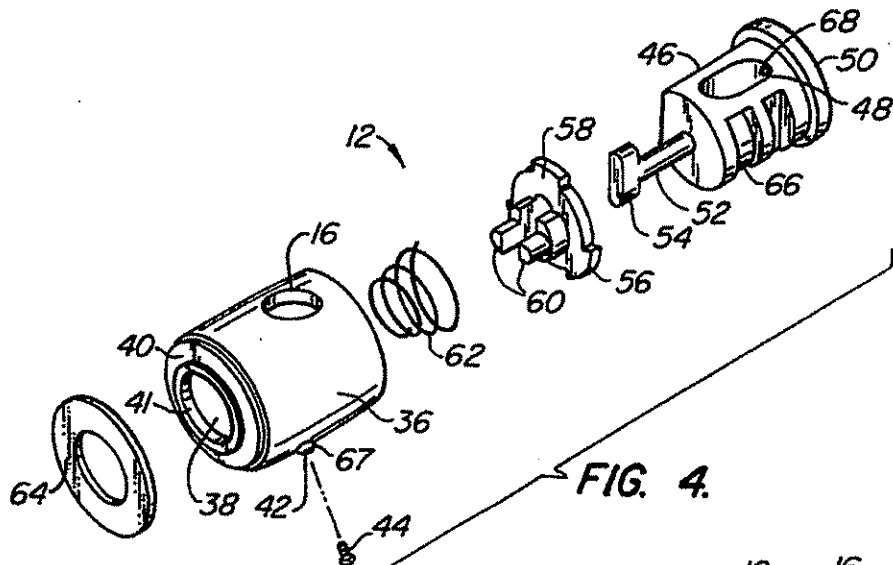


FIG. 4.

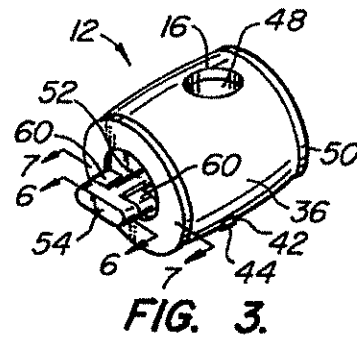


FIG. 3.

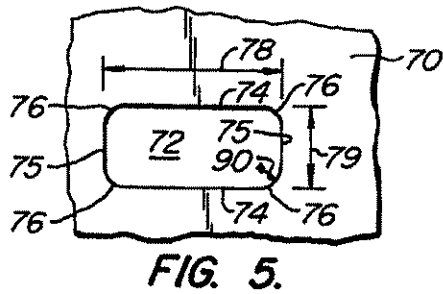


FIG. 5.

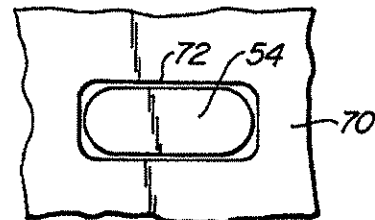


FIG. 8.




FIG. 6.




FIG. 7.

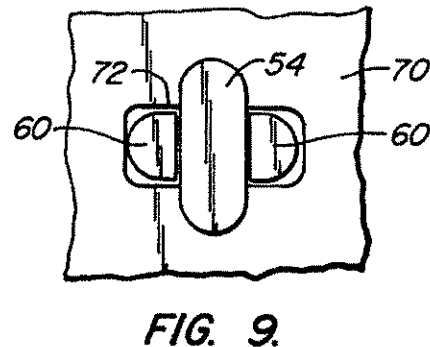


FIG. 9.

U.S. Patent

Apr. 2, 1996

Sheet 3 of 11

5,502,989

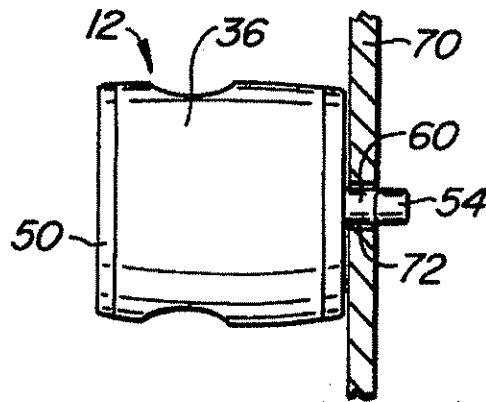


FIG. 10A.

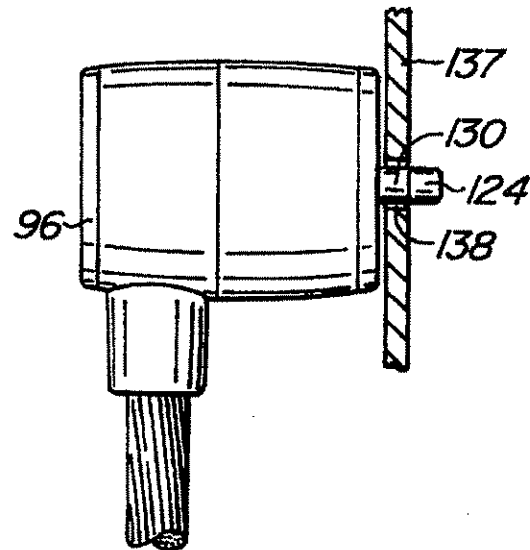


FIG. 13A.

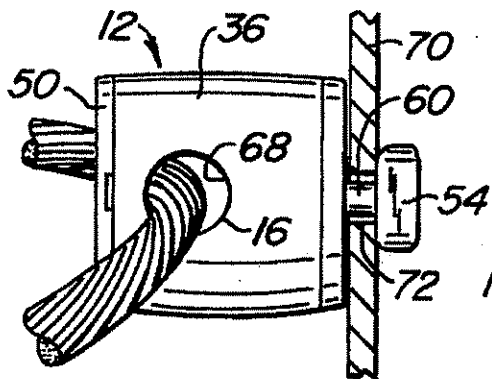


FIG. 10B.

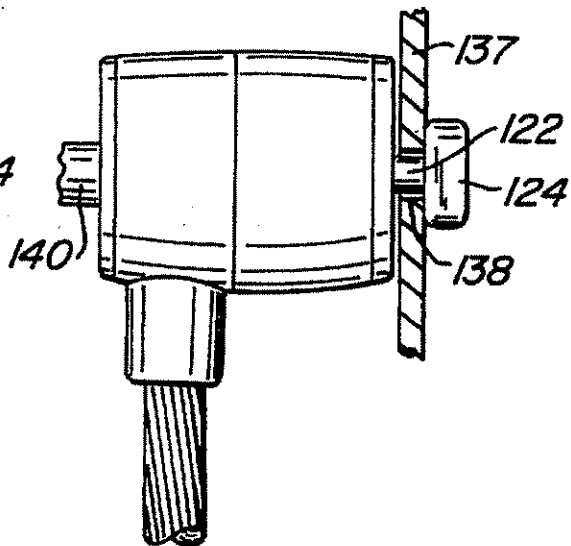



FIG. 13B.

U.S. Patent

Apr. 2, 1996

Sheet 4 of 11

5,502,989

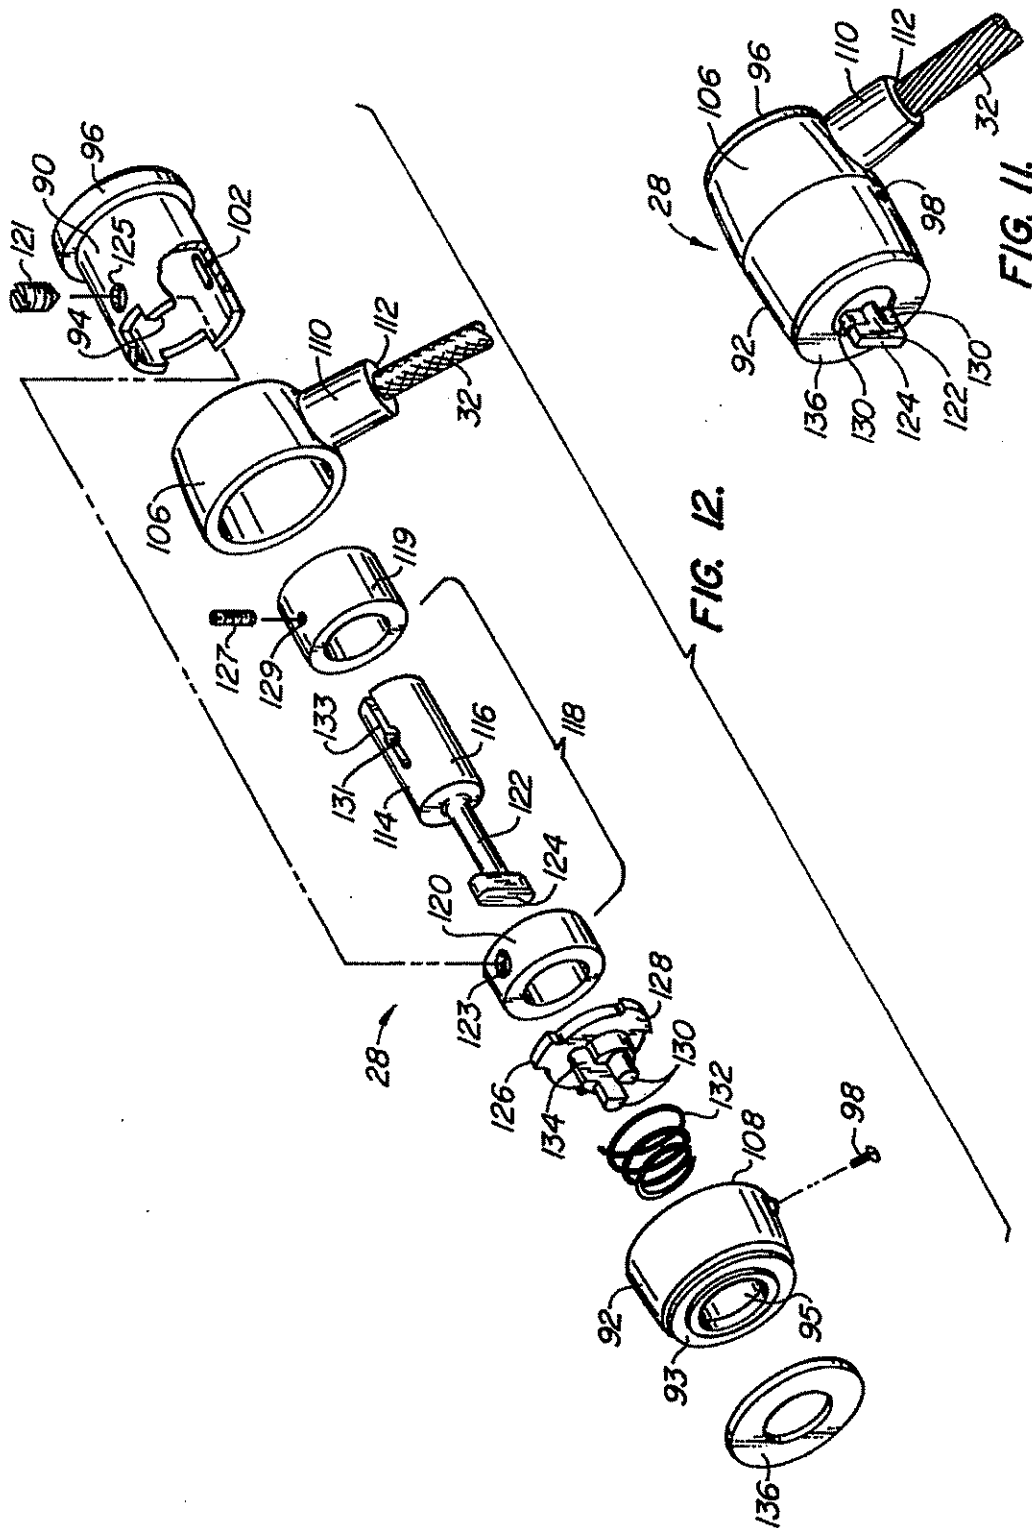

U.S. Patent

Apr. 2, 1996

Sheet 5 of 11

5,502,989

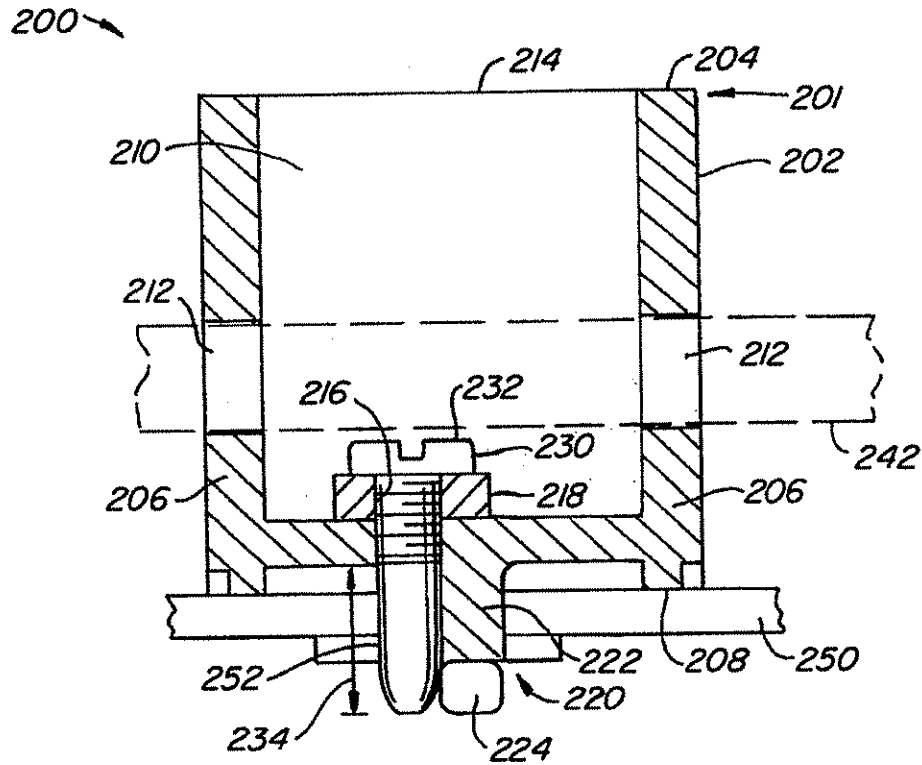


FIG. 14.

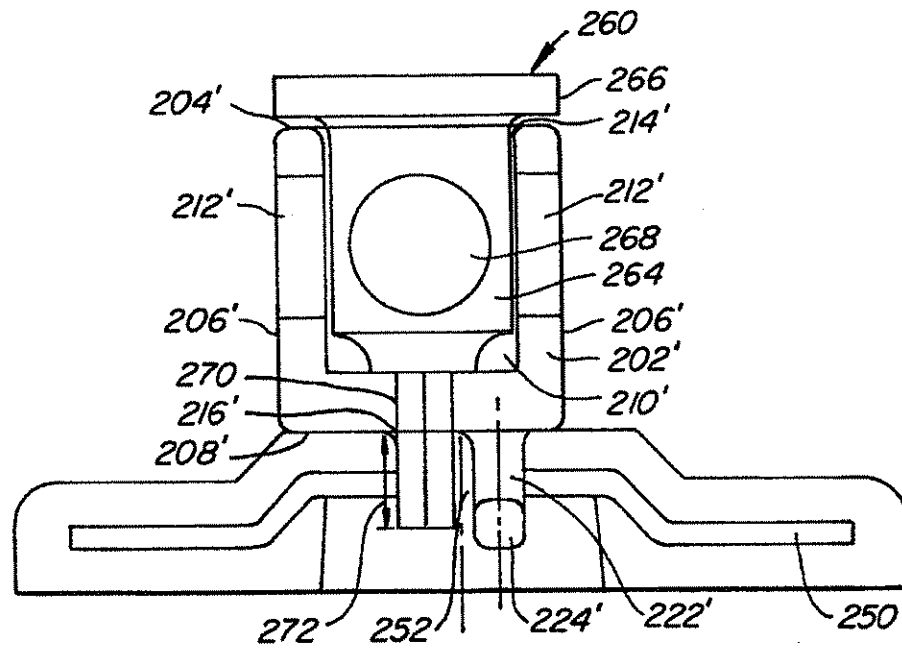


FIG. 15.

33

U.S. Patent

Apr. 2, 1996

Sheet 6 of 11

5,502,989

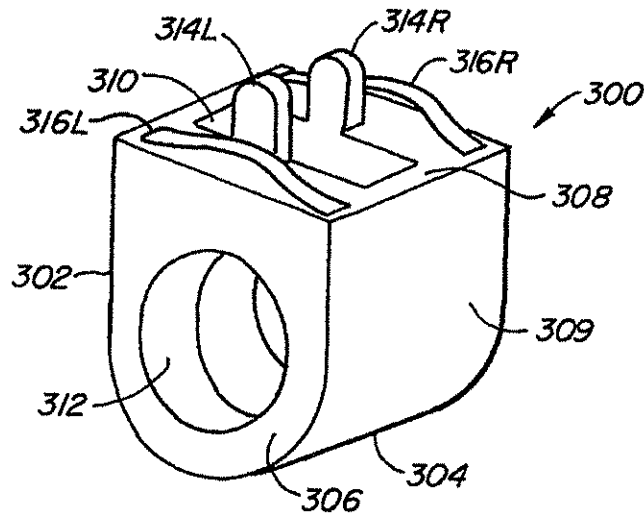


FIG. 16A.

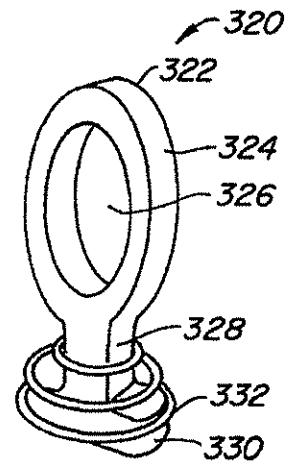


FIG. 16B.

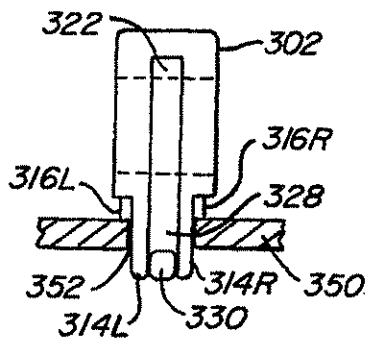


FIG. 16C.

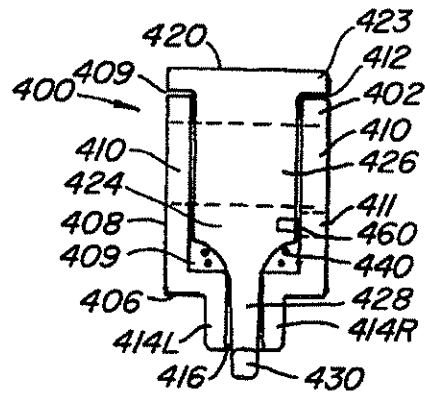


FIG. 17A.

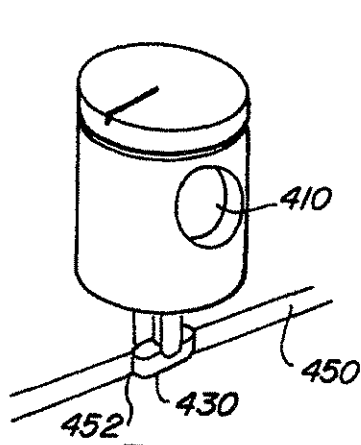


FIG. 17B.

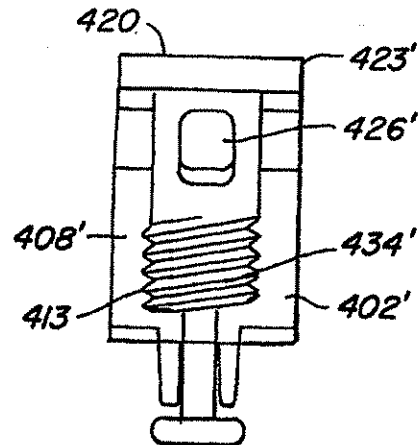


FIG. 18.

U.S. Patent

Apr. 2, 1996

Sheet 7 of 11

5,502,989

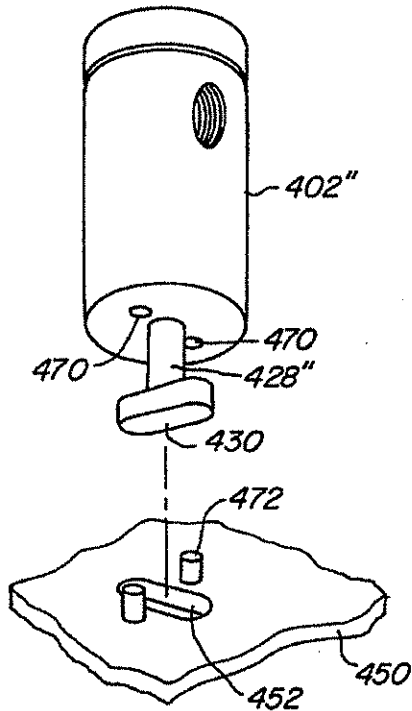


FIG. 19.

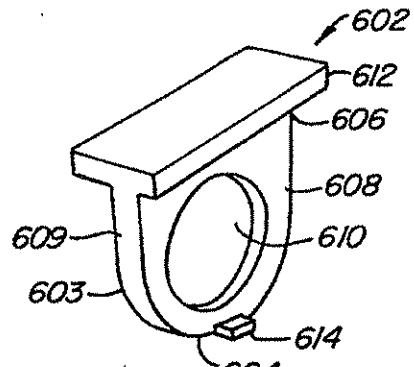


FIG. 20A.

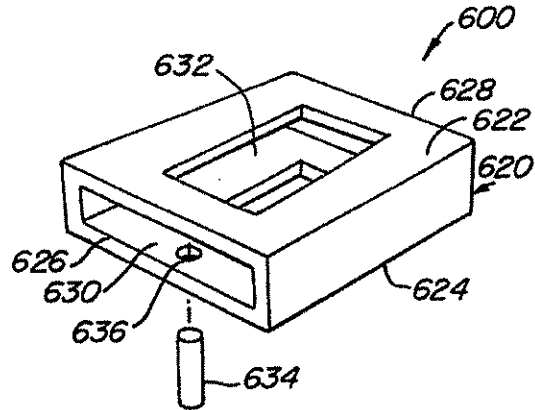


FIG. 20B.

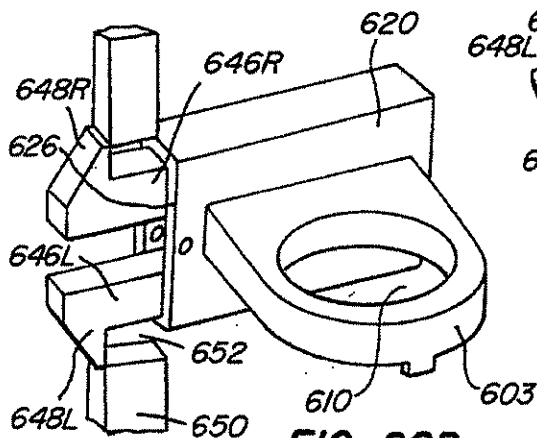


FIG. 20D.

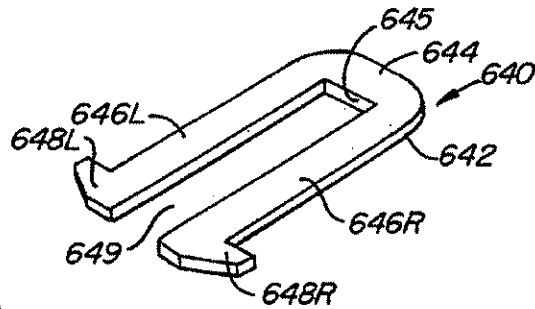








FIG. 20C.

U.S. Patent

Apr. 2, 1996

Sheet 8 of 11

5,502,989

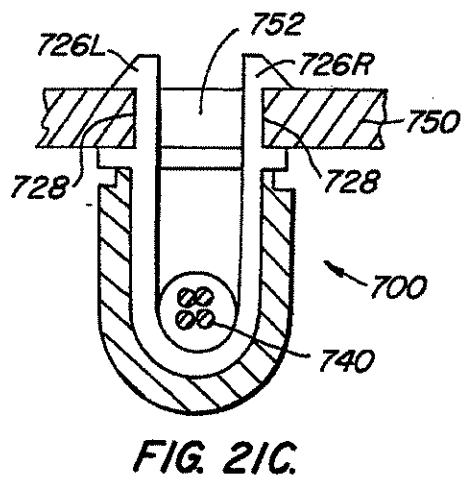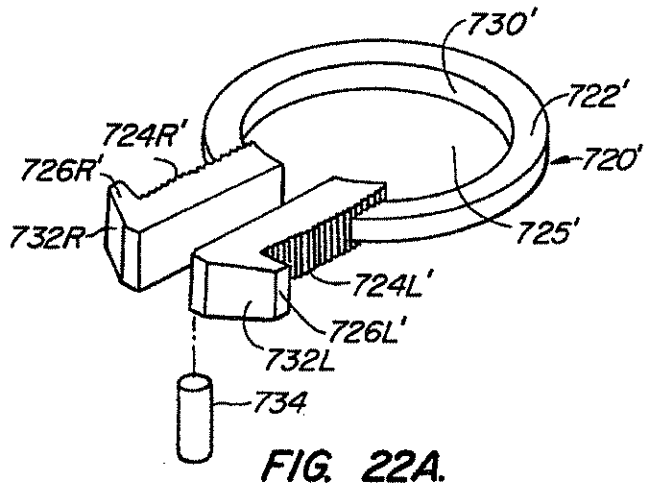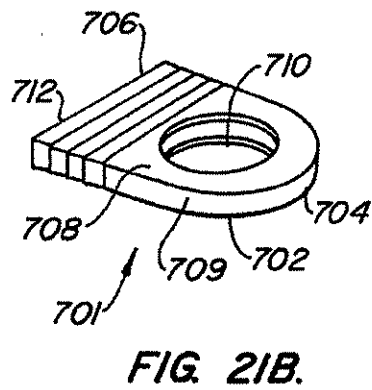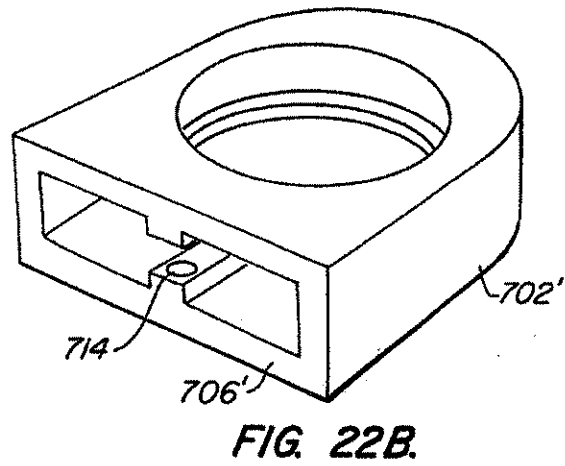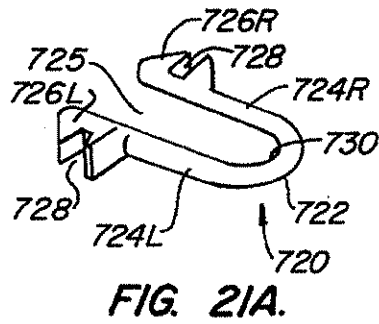

U.S. Patent

Apr. 2, 1996

Sheet 9 of 11

5,502,989

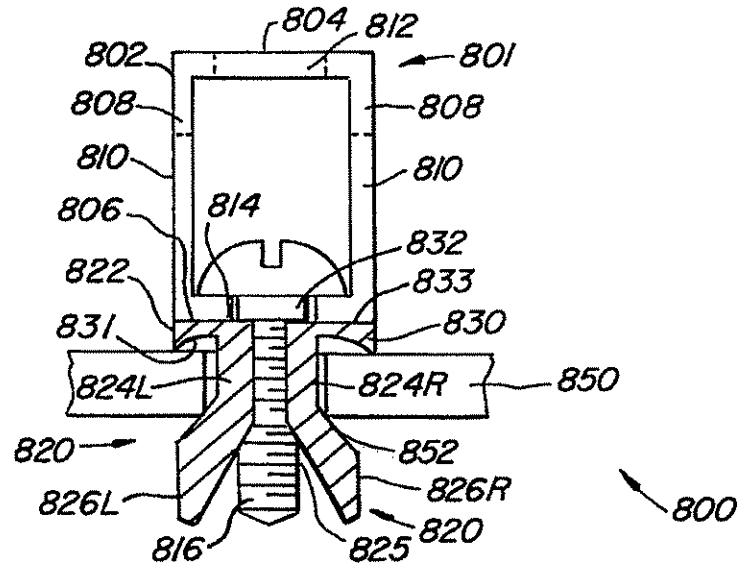


FIG. 23A.

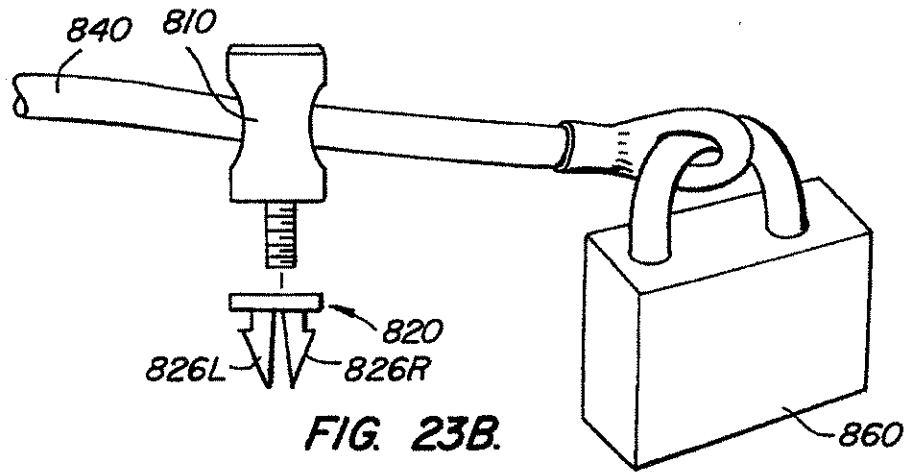


FIG. 23B.

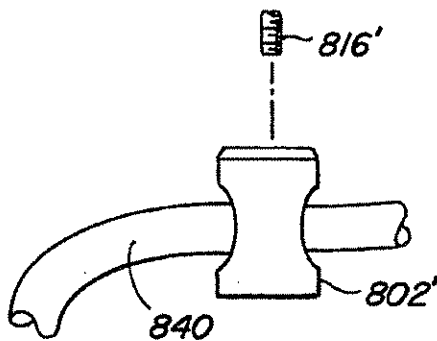


FIG. 24A.

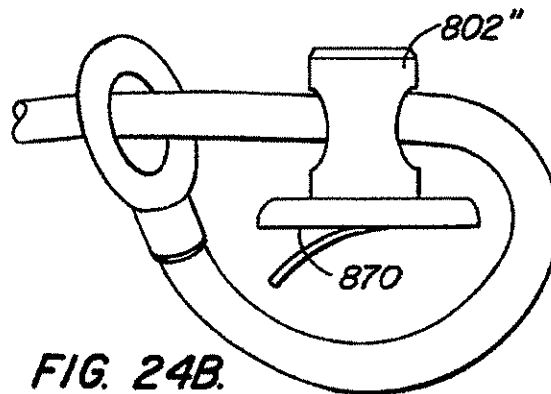


FIG. 24B.

U.S. Patent

Apr. 2, 1996

Sheet 10 of 11

5,502,989

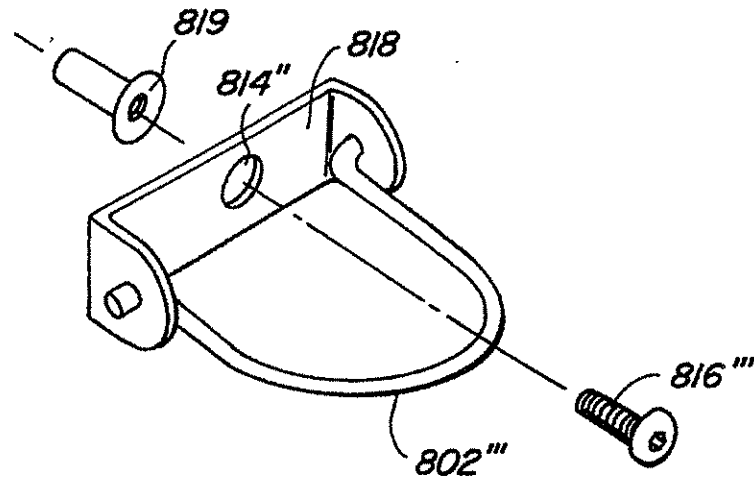


FIG. 25.

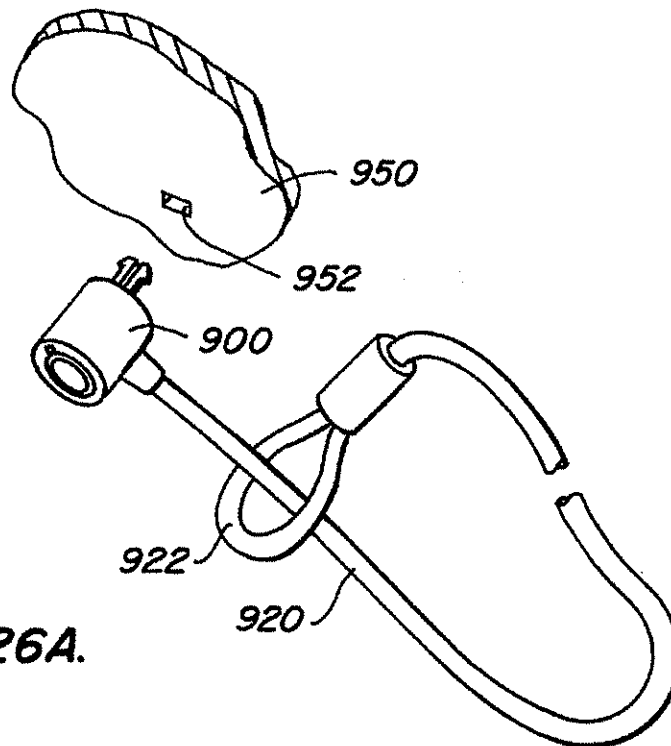


FIG. 26A.

U.S. Patent

Apr. 2, 1996

Sheet 11 of 11

5,502,989

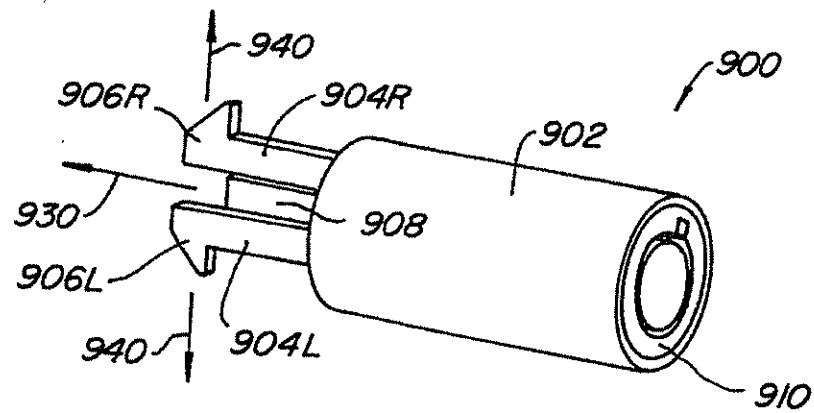


FIG. 26B.

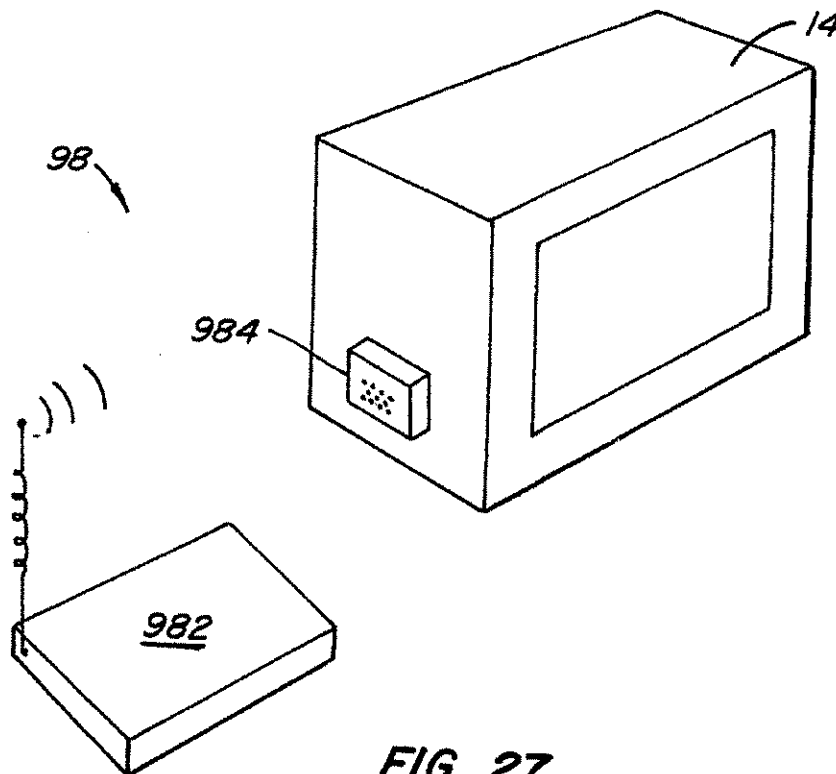


FIG. 27.

5,502,989

1

COMPUTER PHYSICAL SECURITY DEVICE

This application is a division of Ser. No. 08/138,643 filed Oct. 15, 1993, which is a continuation-in-part of Ser. No. 08/042,851, filed Apr. 5, 1993, entitled **COMPUTER PHYSICAL SECURITY DEVICE**, now U.S. Pat. No. 5,381,685, which is a continuation of Ser. No. 07/824,964, filed Jan. 24, 1992 (now abandoned), entitled **COMPUTER PHYSICAL SECURITY DEVICE**, and a continuation-in-part of Ser. No. 08/006,311, filed Jan. 19, 1993, now abandoned, entitled **COMPUTER PHYSICAL SECURITY DEVICE**, all the above applications are hereby expressly incorporated by reference for all purposes.

BACKGROUND OF THE INVENTION

The present invention relates to devices for inhibiting the theft of relatively small but expensive pieces of equipment.

Computers have evolved rather rapidly from large, expensive machines usable only by a few, to relatively small, portable machines which are usable by many. In particular, the development of desk top computers with significant processing power has made computers available to the general population. It is now common for college and even high school students to have their own computer, and desk top computers are in wide spread use as word processors and work stations in almost all forms of business. Desk top computers are relatively small and easily transportable, and an undesirable side effect of their proliferation is the fact that the theft of such computers is a significant problem.

A variety of devices have been developed to inhibit the theft of desk top computers and similar equipment. Since desk top computer systems involve several components, typically including the computer itself, a separate monitor, keyboard and often a printer, such security systems often employ a cable which attaches each of the components to each other and to a relatively immovable object such as a desk. The principal difficulty in such systems is providing an effective and convenient method for attaching the cable itself to the equipment.

Kensington Microware Limited, assignee of this application, currently provides a security system which is especially designed for use with particular Apple computers. Certain Apple computer components have slots and internal brackets designed to capture a specially designed tab inserted through the slot so that the tab is not removable. While this system is effective for particular types of Apple computers, it does not work for those Apple computer components and other computer brands which do not have the special designed slots and brackets.

It is undesirable to require a computer to have specially designed slots and internal capture brackets because the brackets occupy a significant amount of space in an item of equipment which is intended to be as space efficient as possible. Different items of Apple equipment require different sized slots, meaning that the security mechanism must provide a variety of different sized tabs. The tabs, once inserted, cannot be removed without damage to the equipment, meaning that the security system cannot be moved from one computer to the other. Even Apple computers with specially designed slots are typically used with peripheral equipment which does not have them, and, the Kensington system provides screws requiring a special screwdriver which replace the screws used to attach the existing communication cables, securing the peripheral equipment to the base computer by preventing unauthorized removal of the

2

communication cables. This last aspect of the system has a drawback in that the peripheral equipment cannot be removed from the base computer without the special screwdriver, which can be lost or misplaced.

Other vendors provide security systems which are not required to interface directly with special slots and capture mechanisms as provided in certain Apple computers. For example, Secure-It, Inc., under the trademark "KÄBLIT", provides a variety of brackets attached to the computer component using existing mounting screws, i.e., screws which are already used to secure items of equipment within the cabinet. Typically, the bracket is apertured so that passage of the cable through the aperture prevents access to the mounting screw and thus prevents removal of the bracket from the equipment. A deficiency of this type of system is that it requires the removal of the existing mounting screw, which may cause some damage to the internal components of the computer. Suitable existing screws are not always available on certain peripherals for convenient attachment of the fastener. For this latter reason, KÄBLIT also provides glue-on disks which, unfortunately, are permanently secured to the equipment.

The theft of small but expensive equipment such as desk top computers is a growing problem. Existing devices are simply too inefficient or ineffective, or their application is too limited. As a result, the use of such security systems is rare, computer equipment is typically left unprotected, and it is all too often stolen.

SUMMARY OF THE INVENTION

The present invention provides apparatus which inhibits the theft of equipment such as personal computers. The equipment must have an external wall provided with a specially designed, approximately rectangular slot having preselected dimensions. An attachment mechanism includes a housing for a spindle having a first portion rotatable within the housing, a shaft extending outwardly from the housing, and a crossmember at the end of the shaft having peripheral dimensions closely conforming to the internal dimensions of the slot. An abutment mechanism also emanates from the housing, and is located on opposite sides of the shaft intermediate the housing and the crossmember. The peripheral cross-sectional dimensions of the abutment mechanism and the shaft in combination closely conform to the dimensions of the slot. The length of the shaft from the housing to the crossmember is approximately equal to the thickness of the external wall of equipment. The crossmember is aligned with the abutment mechanism so that the crossmember can be inserted through the slot with the shaft and the abutment mechanism occupying the slot. The spindle is then rotated 90° to misalign the crossmember with the slot, thereby attaching the attachment mechanism rigidly to the external wall. A cable is secured to the housing and to an immovable object so that the equipment cannot be stolen.

The apparatus of the present invention is far more adaptable and convenient to use than existing systems. The only required modification of the equipment to be protected is a small (preferably about 3 by 7 millimeter) slot in an external wall. Additional brackets, capture mechanisms or the like are not necessary. This small slot can easily be molded into computer systems at essentially no cost and without degrading the integrity of the equipment. The attachment mechanism can readily be installed on the equipment, and removed when appropriate by an authorized user. In one embodiment, a key-operated attachment attaches a single item of equip-

40

5,502,989

3

ment to an immovable object with the cable. In a second embodiment, the cable passes through mating apertures in the spindle and the housing of one or more attachment mechanisms to prevent their removal once they have been attached to the equipment and the cable has been installed.

The attachment mechanism of the present invention is surprisingly difficult to remove from an item of equipment once it has been installed. In the preferred embodiments, the mechanism is quite small, and it is difficult to apply sufficient leverage to break the mechanism away from the equipment to which it is attached. Forcibly removing the mechanism will result in significant, highly visible damage to the exterior wall, identifying the equipment as stolen and making it difficult to resell, greatly reducing its theft potential.

Several alternative embodiments of the invention are provided in which there are shown several different combinations of attachment mechanisms which are either integrally connected or separately coupled to engagement mechanisms for securing the attachment mechanism proximate the external wall of the object of equipment. Further embodiments of the invention provide an attachment mechanism that can be directly coupled to the external wall of the object of equipment without the need to provide a specially designed slot in the wall.

The novel features which are characteristic of the invention, as to organization and method of operation, together with further objects and advantages thereof will be better understood from the following description considered in connection with the accompanying drawings in which a preferred embodiment of the invention is illustrated by way of example. It is to be expressly understood, however, that the drawings are for the purpose of illustration and description only and are not intended as a definition of the limits of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a first embodiment of the present invention attached to a computer monitor;

FIG. 2 is a perspective view of a second embodiment of the present invention attached to a computer keyboard;

FIG. 3 is a perspective view of the attachment mechanism of the first embodiment;

FIG. 4 is an exploded view of the attachment mechanism of FIG. 3;

FIG. 5 is a fragmentary elevation view of a slot in a piece of equipment specially designed to accept the attachment mechanism of either embodiment of the present invention;

FIG. 6 is a section view taken along lines 6—6 of FIG. 3;

FIG. 7 is a section view taken along lines 7—7 of FIG. 3;

FIG. 8 is a fragmentary section view from inside an item of equipment illustrating insertion of a crossmember of the embodiment of FIG. 3 into the slot of FIG. 5;

FIG. 9 is a view similar to that of FIG. 8 with the crossmember misaligned;

FIGS. 10A and B are elevation views illustrating the installation of the attachment mechanism of FIG. 3 on an item of equipment;

FIG. 11 is a perspective view of the attachment mechanism of the second embodiment of the present invention;

FIG. 12 is an exploded view of the attachment mechanism of FIG. 10;

FIGS. 13A and 13B are side elevation views illustrating the installation of the attachment mechanism of FIG. 11 on an item of equipment;

4

FIGS. 14 and 15 are side elevational views of alternative embodiments of an attachment mechanism and an engagement mechanism;

FIGS. 16A and 16B are respective perspective views of another alternative embodiment of an attachment mechanism and an engagement mechanism of the invention;

FIG. 16C is a side elevational view of the attachment mechanism and the engagement mechanism of FIGS. 16A and 16B assembled together proximate the external wall of an item of equipment;

FIG. 17A is a side elevational view of another embodiment of the invention;

FIG. 17B is a corresponding perspective view of the embodiment of FIG. 17A;

FIG. 18 is a side elevational view of a slightly modified version of the embodiment of FIGS. 17A and 17B showing a threaded engagement between the spindle and the housing;

FIG. 19 is a perspective view of another slightly modified version of the embodiment of FIGS. 17A and 17B showing a pin and pin hole engagement between the attachment mechanism and the external wall of an item of equipment;

FIGS. 20A, 20B, and 20C are perspective views of component parts of another embodiment of the invention showing a separate attachment mechanism, housing, and engagement mechanism respectively;

FIG. 20D is perspective view of the embodiment of FIGS. 20A, 20B, and 20C showing the three component parts in an assembled configuration;

FIGS. 21A and 21B are perspective views of component parts of another embodiment of the invention showing an engagement mechanism and a separate attachment mechanism respectively;

FIG. 21C is a side elevational view of the embodiment of FIGS. 21A and 21B with the engagement mechanism coupled to the attachment mechanism;

FIGS. 22A and 22B are perspective views of slightly modified version of the respective component parts of FIGS. 21A and 21B;

FIG. 22C is a side elevational view of the embodiment of FIGS. 22A and 22B with the attachment mechanism shown coupled to a slot in the external wall of an item of equipment;

FIG. 23A is a side elevational view of an attachment mechanism coupled to an engagement mechanism according to another embodiment of the invention;

FIG. 23B is a perspective view of the embodiment of FIG. 23A with the attachment mechanism and engagement mechanism shown coupled to a cable and a separate locking device;

FIG. 24A is a perspective view of the attachment mechanism of FIGS. 23A and 23B which can be directly coupled to an external wall of an item of equipment;

FIG. 24B is a perspective view of another embodiment of the attachment mechanism of FIGS. 23A and 23B which can be directly coupled to an external wall with the use of an adhesive;

FIG. 25 is another embodiment of an attachment mechanism which can be directly coupled to an external wall of an item of equipment;

FIG. 26A is a perspective view of another embodiment of the present invention with a conventional lock assembly and a retractable spindle;

FIG. 26B is a perspective view of the spindle and lock assembly of FIG. 26A showing the spindle in its retracted position; and

41

5,502,989

5

FIG. 27 is perspective view of another embodiment of the preferred embodiment including a base unit and an attachment unit.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A first preferred embodiment 10 of the security device of the present invention is illustrated generally by way of reference to FIG. 1. Security device 10 includes an attachment mechanism 12 designed to attach to a component of a computer system, such as computer monitor 14. Attachment mechanism 12 has an aperture 16, and a cable 18 which passes through the aperture when the attachment mechanism 12 is attached to a component such as monitor 14. A lock 20 is fixed to one end of cable 18. The free end of cable 18 may be of the type having a "mushroom" head 22 adapted to penetrate and be secured within lock 20 using key 24. With mushroom head 22 detached from lock 20, cable 18 can be threaded through the apertures 16 of one or more attachment mechanisms 12, and wrapped around a relatively immovable object (not shown) such as the cross bar spanning two legs of a desk. Mushroom head 22 is then inserted into lock 20 and the lock closed using key 24 to secure the computer components to the immovable object.

A second embodiment 26 of the present invention, designed primarily to secure single rather than multiple items of computer equipment, is illustrated generally by way of reference to FIG. 2. Embodiment 26 includes an attachment mechanism 28 designed to be secured to a computer component such as keyboard 30. Attachment mechanism 28 is affixed to one end of a cable 32 which has a closed loop 34 at its other end. Cable 32 is first wrapped around a relatively immovable object, such as a cross piece between two legs of a desk or table, and attachment mechanism 28 is passed through loop 34 and attached to the item to be protected such as keyboard 30 to make it difficult to steal the item of equipment.

Attachment mechanism 12 of first embodiment 10 is illustrated in more detail by way of reference to FIGS. 3 and 4 in combination. Mechanism 12 includes a housing 36 having a hollow interior cylindrical cavity 38. An annular plate 40 forms one end of housing 36 and has an aperture 41. A pair of apertures such as aperture 16 are located on opposite sides of housing 36. A small raised aperture 42 is also provided in housing 36 to accommodate a pin 44, as explained in more detail hereinafter.

A spindle 46 includes a cylindrical portion 48 adapted to fit within the cylindrical cavity of housing 36. Spindle 48 includes a raised plate 50 at one end which forms the aft end of the mechanism when assembled as illustrated in FIG. 3. Spindle 46 also includes a shaft 52 extending outwardly through the aperture 41 in housing 36. A crossmember 54 is located on the distal end of shaft 52.

An abutment mechanism 56 includes an abutment plate 58 designed to be received within the cylindrical interior cavity of housing 36, and a pair of pins 60 adapted to extend outwardly through the aperture 41 in housing 36. A spring 62 biases abutment plate 58 and spindle 46 rearwardly when the mechanism is assembled, as illustrated in FIG. 3. A plastic bushing 64 designed to prevent scarring of the equipment to which mechanism 12 is attached is affixed to the plate 40 on housing 36 circumscribing aperture 41.

When mechanism 12 is assembled as illustrated in FIG. 3, crossmember 54 and shaft 52, together with pins 60 on either side of the shaft, extend outwardly beyond housing 46

6

through aperture 41. Pin 44 engages a groove 66 in spindle 46 so that the mechanism cannot be disassembled without removing the pin. The head of pin 44 is conformed to the shape of a boss 67 on the surface of housing 36 so that the pin cannot be removed without special equipment. Groove 66 has a preselected width allowing limited axial movement of spindle 46 relative to housing 36 with pin 44 engaged so that the axial position of crossmember 54 relative to the housing is somewhat adjustable. Spring 62 biases plate 58 and spindle 46 rearwardly to bias crossmember 54 toward housing 36.

Groove 66 extends around about 25% of the periphery of spindle 46 so that the spindle can be rotated approximately 90° relative to the housing. A transverse aperture 68 through the cylindrical portion 48 of spindle 46 is aligned with aperture 16 in housing 36 when crossmember 54 is misaligned from pin 60 (see FIG. 4). With spindle 46 rotated 90° as allowed by pin 44 in groove 68, crossmember 54 is aligned with pin 60, and aperture 68 is not aligned with aperture 16. Cable 18 (see FIG. 1) can only be inserted through the aligned apertures 16, 68 when crossmember 54 is misaligned with pins 60, i.e., when attachment mechanism 12 is attached to the piece of equipment, as explained hereinbelow. With cable 18 passing through aligned apertures 16 and 68, rotation of spindle 46 so as to align crossmember 54 with pins 60 and allow removal of the attachment mechanism is effectively prevented.

The preferred embodiments 10 and 26 of the present invention are designed to operate with items of equipment provided by a special slot, as illustrated in FIG. 5. The exterior wall 70 of the piece of equipment is typically made of sheet metal, or molded plastic, either of which is compatible with the present invention. A relatively small slot 72 is formed in wall 70, by molding or otherwise as appropriate. In the preferred embodiment of slot 72, the slot has a generally rectangular configuration, i.e., the slot is generally rectangular having long parallel sides 74, short parallel sides 75 and rounded corners 76. Slot 72 is relatively small, having a long dimension 78 of seven millimeters, and a short dimension 79 of three millimeters, in the preferred embodiment of the present invention. Corners 76 have a radius of curvature 90 from 0.30 mm. to a maximum of 1.5 millimeters. If the radius of curvature 90 is 1.5 mm., the short sides 75 disappear and the slot has a straight-sided oval configuration.

The peripheral dimensions of crossmember 54 are closely conformed to the interior dimensions of slot 72, as illustrated in FIG. 6. The crossmember 4 of attachment mechanism 12 has a straight-sided oval configuration, i.e., the crossmember is generally rectangular, having straight sides and semi-circular ends. In the preferred embodiment, the long dimension 82 of crossmember 54 is 6.75 millimeters, while the short dimension 83 is 2.75 millimeters, each being slightly less than the corresponding dimension of slot 72. As illustrated in FIG. 7, the peripheral dimensions of the pins 60 and shaft 52 also closely conform to the interior dimensions of slot 72. As with crossmember 54, pins 60 in shaft 52 have a long dimension 84 of 6.75 millimeters, and a short dimension 85 of 2.75 millimeters.

The insertion of crossmember 54 of attachment mechanism 12 into slot 72 of exterior wall 70 is illustrated by reference to FIGS. 8 and 10A. Before insertion, spindle 46 must be rotated so that crossmember 54 is aligned with pins 60, as illustrated in FIG. 3. With the spindle in this position, the periphery of crossmember 54 and that of pins 60 and shaft 52 are essentially congruent. Since the peripheral dimension of crossmember 54 and pins 60 and shaft 52 in

42

5,502,989

7

combination are less than the dimensions of slot 72, the crossmember 54 can be inserted through the slot until crossmember 54 is completely inside wall 70 (see FIG. 10A). If necessary, the plate 50 on spindle 46 can be pressed to compress spring 62 so that crossmember 54 is completely inside wall 70.

As illustrated in FIG. 9, upon insertion of crossmember 54 completely through slot 72, the spindle is rotated by manipulating plate 50 so that crossmember 54 is 90° misaligned with respect to pins 60. The aperture 16 in the side wall of housing 36 will be aligned with the aperture 68 in the spindle, providing a passageway completely through the housing. In this configuration, cable 18 can easily be threaded through the aperture, and the presence of the cable prevents the spindle from being rotated back so as to disengage crossmember 54 from slot 72.

The attachment mechanism 28 of the second embodiment 26 of the present invention is illustrated in more detail by way of reference to the perspective view of FIG. 11 and the exploded view of FIG. 12. Attachment mechanism 28 includes a hollow shell 90 and a nose-piece 92 which, in combination, form a housing. Shell 90 has a hollow cylindrical interior cavity 94, and an integral apertured plate 96 at one end. A pin 98 is inserted through an aperture (not shown) in nose-piece 92 to engage a slot 102 in shell 90. Pin 98 is designed to shear when torque is applied to nose-piece 92 so that an unauthorized attempt to remove the attachment mechanism will simply shear the pin and allow the nose-piece to freely rotate without degrading the attachment of the attachment mechanism to the component to be protected. Slot 102 is axially elongate so that limited axial movement is allowed between shell 90 and nose-piece 92. The forward end of nose-piece 92 has a plate 93 having a central aperture 95.

A cylindrical collar 106 circumscribes the outer portion of shell 90 and occupies the slot laterally defined by plate 96 and the aft surface 108 of nose-piece 92. Collar 106 has an integral tab 110 with an aperture 112 adapted to receive one end of cable 32. Cable 32 is dead-ended into tab 110 and attached so that it cannot be removed.

A spindle 114 has a cylindrical portion 116 adapted to be received within a cylindrical lock 118 in shell 90. Cylindrical lock 118 includes a front cylinder 119, and a back cylinder 120. A blunt pin or set screw 121 is inserted through an aperture 125 in shell 90, and through a corresponding aperture 123 in back cylinder 120, to lock the front cylinder rotationally with respect to shell 90. Correspondingly, pin or set screw 127 engages a relatively smaller aperture 129 in front cylinder 119, and a widening 131 in slot 133 in the cylindrical portion 116 of spindle 114. Front cylinder 119 is thus fixed rotationally with respect to spindle 114.

As with conventional cylindrical locks, a plurality of pins normally span the interface between front cylinder 119 and back cylinder 120 so that the cylinders are rotationally locked together, thus preventing relative rotation between locking shell 90 and spindle 114. However, a key 140 (see FIG. 13B) is insertable through the apertured plate 96 of shell 90 to engage front cylinder 119. The correct key will have bosses located to depress the pins passing between cylinders 119 and 120 so that such pins do not span the interface between the cylinders, allowing the cylinders to rotate with respect to one another. In this fashion, spindle 114 can be rotated with respect to shell 90 only upon insertion and rotation of the appropriate key.

Spindle 114 also includes a shaft 122, and a crossmember 124 at the free end of the shaft. An abutment mechanism 126

8

has an abutment plate 128 adapted to fit within nose-piece 92, and a pair of pins 130 adapted to extend outwardly through aperture 95. A spring 132 is located between abutment plate 128 and nose-piece 92 to bias the cylindrical portion 116 of spindle 114 and the abutment plate rearwardly. Abutment plate 126 has an elongate aperture 134 which allows crossmember 124 to extend through the aperture plate. A plastic bushing 136 is fixed to the surface of plate 93 so that the mechanism does not scar the equipment to which it is attached.

The insertion of attachment mechanism 28 into the exterior wall 137 of a piece of equipment is illustrated by way of reference to FIGS. 13 A and B. Wall 136 has a slot 138, which is identical to the slot 72 illustrated in FIG. 8. The peripheral dimensions of crossmember 124, and also those of pins 130 and shaft 122 in combination, are identical to the corresponding parts in FIGS. 6 and 7. Simply put, attachment mechanism 28 is designed to fit into the same slot as attachment mechanism 12.

As illustrated in FIG. 13A, crossmember 124 is aligned with pins 30 so that the crossmember can be inserted into slot 138. When fully inserted, the space in the slot is essentially occupied by pins 130 and shaft 122. If necessary, plate 96 can be depressed to push the cylindrical portion of spindle 114 against spring 132. Once crossmember 124 has been fully inserted through slot 138, a key 140 engaging lock mechanism 11B (see FIG. 12) is used to rotate the spindle 90° and misalign crossmember 124 and slot 138.

In operation, both attachment mechanism 12 and attachment mechanism 28 are attached to an item of computer or other equipment which has a specially designed slot 72, 138. First, the crossmember 54, 124 is aligned with the pins 60, 130, for insertion to the crossmember through the slot. The spindle 46, 114 is then rotated relative to the housing to misalign the crossmember 54, 124 relative to the slot. The spindle is locked in this configuration by passing the cable through the mating slot 16, 48 in the first embodiment, or using the key 140 in the second embodiment. Either way, the attachment mechanism is extremely difficult to disengage by anyone not having the appropriate key 24, 140. Any unauthorized attempt to remove the attachment mechanism from the computer component will most likely result in significant damage to the computer housing, making the computer difficult to resell and greatly reducing its theft potential.

FIG. 14 illustrates another embodiment of the invention. Security device 200 includes an attachment mechanism 201 designed to be attached to a portable object of equipment, such as a personal computer (not shown), having an external wall 250. Attachment mechanism 201 comprises a housing 202 which generally includes a top end 204, a bottom end 208, and a generally cylindrical side wall 206, which in combination define internal hollow cavity 210. Side wall 206 has a pair of apertures 212 which are aligned with one another and which are sized to allow a cable 242 to pass through the apertures. Top end 204 is provided with an opening 214 which extends to proximate bottom end 208 to provide access for screw 230 into cavity 210, as will be described in more detail hereinafter. A raised plate 218 having a threaded aperture 216 is provided in bottom end 208 of the housing to accommodate insertion of screw 230.

Integral with bottom end 208 of housing 202 is an engagement mechanism 220 which includes a generally cylindrical shaft 222 and a crossmember 224 attached to the shaft at the distal end of the shaft. As previously described with reference to prior embodiments of the invention, the peripheral dimensions of the crossmember conform closely

43

5,502,989

9

to the internal dimensions of slot 252. The crossmember 224 is generally rectangular, having straight sides and semi-circular ends, as previously described.

To secure attachment mechanism 201 proximate external wall 250, housing 202 must first be rotated prior to insertion of screw 230 so that crossmember 224 is aligned with slot 252. Since the peripheral dimensions of crossmember 224 and shaft 222 are less than the dimensions of slot 252, crossmember 224 can be inserted through the slot until the crossmember is completely inside external wall 250, with shaft 222 occupying a portion of slot 252. Housing 202 may then be rotated by grasping onto side wall 206 and turning housing 202 until crossmember 224 is 90 degrees misaligned with respect to the slot. In this position of the crossmember, screw 230 can be inserted through opening 214 in the housing and threaded into aperture 216 in raised plate 218 of the housing. With screw head 232 firmly pressed against the upper surface of plate 218, a length of the screw 234 external the housing will extend beyond the housing for a distance that is slightly greater than the thickness of external wall 250. Further, the peripheral dimension of the screw portion 234 and the shaft 222 in combination is slightly less than the dimensions of the slot. In this way, screw portion 234 and shaft 222 occupy slot 252 when the screw is threadably engaged with aperture 216 in the housing so as to prevent rotation of the housing relative to the external wall and thereby prevent disengagement of crossmember 224 from slot 252. In this configuration, cable 242 can easily be threaded through apertures 212 to secure the housing to an external object (not shown). Once the cable is inserted through apertures 212 in the housing, screw 230 cannot be removed.

FIG. 15 illustrates another embodiment of the invention which has a similar configuration to the embodiment of FIG. 14 except that a spindle 260 is used instead of a screw to prevent rotation of housing 202'. Spindle 260 includes a cylindrical portion 264 adapted to be rotatably mounted within the cylindrical cavity 210' of the housing. An aperture 268 is formed through cylindrical portion 264 and is sized to allow a cable (not shown) to pass through the aperture. Spindle 260 includes a raised plate 266 at a proximal end of the spindle which forms the aft end of the spindle. Spindle 260 also includes a pin member 270 extending outwardly through aperture 216' in housing 202'. The length of the pin member 272 external the housing is slightly greater than the thickness of external wall 250.

In operation, with the crossmember misaligned from the slot as described above with reference to the embodiment of FIG. 14, spindle 260 is positioned in the housing so that base pin 270 is inserted through aperture 216' and into slot 252 proximate shaft 222'. The peripheral dimension of the shaft and the pin in combination is less than the dimension of the slot so that the pin and shaft occupy the slot with the crossmember misaligned 90 degrees. In this position, spindle 260 is rotated by manipulating raised plate 266 so that apertures 212' in the side wall 206' of housing 202' will be aligned with aperture 268 in cylindrical portion 264 of the spindle, providing a passageway completely through the housing. In this configuration, a cable (not shown) can easily be threaded through the apertures, and the presence of the cable prevents spindle 260 from being separated from the housing.

FIGS. 16A, 16B and 16C illustrate another embodiment of the invention in which the attachment mechanism 300 is a separate component from the engagement mechanism 320. Attachment mechanism 300 comprises a housing 302 having a top end 304, a bottom end 308, spaced apart side walls

10

306, and a peripheral edge wall 309, as seen in an inverted configuration in FIG. 16A. Bottom end 308 includes a generally rectangular opening 310 which extends the length of the housing to closed top end 304. Opening 310 is configured to permit passage of engagement mechanism 320 into housing 302, as will be described in more detail hereinafter. Apertures 312 through side wall 306 are spatially coupled to opening 310 and are sized to allow a cable (not shown) to pass through the apertures. Housing 302 also preferably includes first and second springs 316L and 316R mounted on either side of bottom end 308 of the housing which are used to adjust the relative position of the housing proximate the external wall 350, as best seen in FIG. 16C. Housing 302 further includes first and second, spaced apart abutment plates 314L and 314R located on opposite sides of opening 310.

Engagement mechanism 320, which is configured to fit within housing 302 through opening 310, is shown by way of reference to FIG. 16B and generally includes a spindle 322. Spindle 322 has an upper portion 324 which includes aperture 326 sized to permit passage of a cable (not shown) through aperture 326. Connected to the distal end of upper portion 324 of the spindle is a shaft 328 which has generally rectangular crossmember 330 attached to the shaft at the distal end of the shaft. The dimensions of the crossmember conform closely to the dimensions of the slot 352, as previously described. Engagement mechanism also preferably includes a spring 332 located around the periphery of shaft 328.

In operation, crossmember 330 is aligned with slot 352 and is inserted therein until crossmember 330 is completely inside external wall 350, as seen in FIG. 16C. If necessary, the upper portion 324 of spindle 322 can be firmly pressed to compress spring 332 so that crossmember 330 is completely inside wall 350.

Upon insertion of crossmember 330 completely through slot 352, spindle 322 is rotated so that crossmember 330 is 90 degrees misaligned with slot 352. In this configuration, housing 302 is placed over the spindle 322, so that the spindle is received within opening 310 in the housing. Abutment plates 314L and 314R are inserted into the slot on both sides of shaft 328 extending from spindle 322. With the upper portion 324 of the spindle completely received within the housing, aperture 326 in spindle 322 will be aligned with apertures 312 in housing 302, providing a passageway completely through the housing. In this configuration, a cable (not shown) can be easily threaded through the apertures, and the presence of the cable secures the spindle to the housing. As best seen in FIG. 16C, the peripheral dimension of the abutment plates 314L, 314R and shaft 328 of the spindle in combination closely conform to the dimensions of the slot and thereby occupy the slot. In this way, the housing is fixed relative to the spindle and neither can be rotated back so as to disengage crossmember 330 from slot 352. Springs 316L, 316R are biased against the lower end of the housing to firmly secure housing 302 proximate the external wall 350.

Another embodiment of the invention is shown by way of reference to FIGS. 17A and 17B in which a spindle 420, a housing 402, and a spring 440 are assembled to operate as a single unit. Attachment mechanism 400 comprises housing 402 which generally includes top end 404, bottom end 406, and cylindrical side wall 408, which in combination define internal cylindrical cavity 409. A cylindrical opening 412 in the top end 404 of the housing extends to proximate closed bottom end 406 of the housing and is configured to allow engagement mechanism 420 to be rotatably mounted within

44

5,502,989

11

the housing. Side wall 408 has a pair of apertures 410 which are sized to allow passage of a cable (not shown) through the apertures. Attached to bottom end 406 of the housing are two abutment plates 414L and 414R which are spaced apart from aperture 416 in bottom end 406 and which are adapted to be inserted into slot 452 in external wall 450 (See FIG. 17B).

Spindle 420 includes a cylindrical portion 424 rotatably mounted within the cylindrical cavity 409 of housing 402. Spindle 420 includes a raised plate 423 at one end which forms the aft end of the spindle. Spindle 420 also includes a shaft 428 extending outwardly through aperture 416 in housing 402. A crossmember 430 is located at the distal end of shaft 428. Aperture 426 through cylindrical portion 424 of the spindle 420 is sized to allow a cable (not shown) to pass through aperture 426. A spring 440 is located at the distal end of cylindrical portion 424 of the spindle and biases the spindle away from the bottom end of housing 402 so that crossmember 430 will firmly engage the inner surface of external wall 450, as will now be described.

When the apparatus is assembled as illustrated in FIG. 17A, crossmember 430 and shaft 428, together with abutment plates 414L and 414R on either side of the shaft, extend outwardly beyond the bottom end 406 of housing 402. Prior to insertion of crossmember 430 into slot 452, spindle 420 must be rotated via raised plate 423 so that crossmember 430 is aligned with slot 452, as seen in FIG. 17B. With the spindle in this position, the crossmember can be inserted through the slot as previously discussed. If necessary, plate 423 can be pressed to compress spring 440 so that crossmember 430 is completely inside wall 450. In this position of the crossmember, shaft 428 and abutment plates 414L, 414R occupy the slot to prevent rotation of the housing relative to external wall 450.

Upon insertion of crossmember 430 completely through slot 452, the spindle is rotated by manipulating plate 423 so that crossmember 430 is 90 degrees misaligned with slot 452. Side wall 408 of housing 402 preferably includes at least one small hole 411 on either side of the housing through which a pin 460 engages a groove (not shown) in the cylindrical portion 424 of the spindle, the groove extending around about 25% of the periphery of cylindrical portion 424 so that the spindle can be rotated substantially only 90 degrees relative to the housing. With the crossmember misaligned from the slot, apertures 410 in the side wall of housing 402 will be aligned with aperture 426 in the spindle providing a passageway completely through the housing. In this configuration, a cable (not shown) can easily be threaded through the aligned apertures, and the presence of the cable prevents the spindle from being rotated back so as to disengage crossmember 430 from slot 452.

The embodiment of FIGS. 17A and 17B can be slightly modified to provide a threaded cylindrical portion 424' of the spindle 420', as seen in FIG. 18. In this embodiment, the internal peripheral surface 413 of side wall 408' is also threaded so that the cylindrical portion 424' engages threaded surface 413. This engagement variation between spindle 420' and housing 402' can be used instead of spring 440 in FIG. 17A to adjust the relative lateral displacement between the spindle and the housing.

FIG. 19 illustrates another alternative embodiment of a housing 402" which is used to prevent rotation of the housing relative to the external wall 450 when the crossmember is misaligned with the slot. In this embodiment, pins 472 are mounted to the outer surface of the external wall on either side of slot 452 and engage pin holes 470 located on opposite sides of shaft 428" to prevent rotation of

12

the housing relative to external wall 450 when crossmember 430" is located completely within slot 452 and is misaligned from the slot.

Other embodiments of the invention are described with reference to FIGS. 20-23 wherein the engagement mechanism includes at least two engagement portions for engaging with the inner surface of the external wall proximate the slot to prevent removal of the attachment mechanism from proximate the external wall.

FIGS. 20A, 20B, 20C, and 20D illustrate another embodiment of the invention 600 including three separate components, an attachment mechanism 602 (see FIG. 20A), a housing 620 (see FIG. 20B), and a separate engagement mechanism 640 (see FIG. 20C). Attachment mechanism 602 includes attachment member 603 shown in an inverted position in FIG. 20A. Attachment member 603 generally includes a top end 604, a bottom end 606, spaced apart side walls 608, and a peripheral edge wall 609. An aperture 610 is provided through side walls 608 and is sized to permit passage of a cable (not shown) through aperture 610. Base portion 612 is integrally connected to attachment member 603 proximate bottom end 606 of the attachment member. A retaining flange 614 is provided proximate top end 604 to retain attachment member 603 within housing 620, as will be described in more detail hereinafter.

Housing 620 is shown by way of reference to FIG. 20B and generally includes a top wall 622, a bottom wall 624, and four separate spaced apart side walls including a front end 626 and a back end 628. A pair of substantially rectangular openings 632 are provided through both top wall 622 and bottom wall 624 of the housing and are configured to allow passage of the attachment member 603 through openings 632. A separate, generally rectangular aperture 630 is provided in front end 626 of housing 620 and extends the length of the housing to the closed back end 628. Aperture 630 is configured to permit passage of engagement mechanism 640 into the aperture, as will be described in more detail hereinafter. Bottom wall 624 is also provided with a pin hole 636 proximate front end 626 which is sized to receive a retaining pin 634 therein. The housing is preferably made from cast metal, but any other suitable material may be used.

Engagement mechanism 640 is shown by way of reference to FIG. 20C and includes an engagement member 642. Engagement member 642 includes first and second, spaced apart engagement arms 646L, 646R which have first and second engagement portions 648L, 648R integrally connected to the arms at the distal end of arms 646L, 646R. A transverse member 644 connects the two engagements arms 646L, 646R together at the proximal end of the arms and defines an abutment surface 645 located towards the distal end of transverse member 644. Engagement arms 646L, 646R and transverse member 644 in combination define clearance space 649 which is sized to permit passage of attachment member 603 through clearance space 649, as will now be described.

To assemble device 600 prior to securing the device proximate external wall 650, engagement member 642 is initially inserted into rectangular aperture 630 in housing 620 until transverse member 644 abuts against back end 628 of the housing. Retaining pin 634 is subsequently inserted into pin hole 636 in the housing and secured thereto so that engagement member 642 cannot be removed from the housing without removing the pin. Attachment member 603 is then inserted into rectangular openings 632 in the housing and through clearance space 649 of the engagement member

45

5,502,989

13

so that the attachment member extends outwardly through opening 632 in bottom wall 624 of the housing. Base portion 612 of the attachment member engages the upper surface of top wall 622 of the housing to prevent passage of attachment member 603 completely through housing 620. Retaining flange 614 prevents attachment member 603 from being separated from the housing. Further, abutment surface 645 of transverse member 644 engages with attachment member 603 to secure engagement member 642 to attachment member 603.

When device 600 is assembled as illustrated in FIG. 20D, engagement portions 648L, 648R and a lower portion of engagement arms 646L, 646R extend outwardly beyond front end 626 of housing 620. In this configuration, engagement portions 648L, 648R may be pressed firmly against slot 652 until the engagement portions bend sufficiently inward to fit within slot 652. The inwardly sloped peripheral dimensions of the engagement portions permit easier access into slot 652. Upon insertion of engagement portions 648L, 648R completely within the slot, with a portion of the engagement arms 646L, 646R occupying the slot, the arms will spread back to their natural configuration and thereby engage the internal surface of the external wall 650 proximate slot 652 to secure the device 600 proximate the external wall. A cable (not shown) can then be inserted through aperture 610 in attachment member 603, and the presence of the cable prevents the attachment member 603 from moving relative to housing 620.

FIGS. 21A, 21B, and 21C depict another embodiment of the invention, device 700, in which there are two major component parts, attachment mechanism 701 and engagement mechanism 720.

Attachment mechanism 701 of FIG. 21B generally includes an attachment member 702 having a closed top end 704, a bottom end 706, a peripheral edge wall 709, and spaced apart side walls 708. An aperture 710 is provided through side walls 708 and is sized to permit a cable to pass through aperture 710. A generally rectangular opening 712 is further provided in bottom end 706 of attachment member 702 and extends the length of the attachment member to closed top end 704. Opening 712 is configured to accommodate passage of the engagement mechanism 720 into opening 712, as will be described in more detail hereinafter.

Engagement mechanism 720 is shown by way of reference to FIG. 21A and generally includes engagement member 722 having first and second, spaced apart engagement arms 724L and 724R connected at the proximal end of engagement member 702 and defining a clearance space 725 between the arms sized large enough to permit a cable to pass through clearance space 725. Abutment surface 730 is located adjacent the proximal end of the engagement arms. Engagement portions 726L, 726R are integral with engagement arms 724L, 724R at the distal end of the arms. A pair of grooves 728 is provided in engagement portions 726L, 726R, with the length of the groove being substantially equal to the thickness of external wall 750 (See FIG. 21C). Engagement member 722 is preferably injection molded and made from a plastic material to enhance its resiliency. However, it is to be noted that the engagement member may be made from other materials, such as metal, provided that the material is sufficiently resilient to allow engagement arms 724L, 724R to be bent inward sufficiently far enough to allow engagement portions 726L, 726R to be inserted into slot 752.

To utilize device 700, engagement arms 724L, 724R are pressed towards one another so that engagement portions

14

726L, 726R are positioned sufficiently close to one another to allow the engagement portions to be inserted into slot 752. As seen in FIG. 21C, grooves 728 engage with external wall 750 when engagement portions 726L, 726R are within slot 752 and have spread back to their natural configuration. In this way, engagement member 722 is firmly secured to external wall 750. Subsequently, attachment member 702 is positioned over engagement member 722 until clearance space 725 is aligned with aperture 710 in the housing. In this configuration, a cable 740 can easily be threaded through aperture 710 in the housing and clearance space 725, and the presence of the cable 740 prevents attachment member 702 from being separated from engagement member 722.

FIGS. 22A, 22B, and 22C illustrate a slightly modified version of the embodiment of FIGS. 21A, 22B, and 22C. In this embodiment, housing 702' preferably includes a retaining pin hole 714. Engagement mechanism 720' is also slightly modified to include a retaining pin 734 which engages with pin hole 714 proximate bottom end 706' of housing 702' to prevent engagement member 722' from being separated from housing 702' prior to insertion of a cable (not shown). Side walls 732L, 732R forming part of alternative engagement portions 726L', 726R' will spread back to their natural configuration once inserted into slot 752 to thereby engage the inner surface of external wall 750 proximate the slot to affix the engagement member to the external wall. Engagement member 722' of FIGS. 22A and 22C is adapted to engage with a slot having substantially smaller peripheral dimensions than the slot necessary to engage with engagement member 722 of FIG. 22A.

FIGS. 23A and 23B illustrate another embodiment of the invention 800 in which there are also substantially only two component parts, an attachment mechanism 801 and an engagement mechanism 820. Attachment mechanism 801, shown by way of reference to FIG. 23A, generally includes an attachment member 802 having a top end 804, a bottom end 806, and a cylindrical side wall 808. A pair of apertures 810 are provided through side wall 808 and are sized to permit a cable 840 to pass through apertures 810 (See FIG. 23B). A generally cylindrical opening 812 is further provided in top end 804 of attachment member 802 and extends the length of the attachment member to a substantially smaller screw opening 814 in bottom end 806 of the attachment member. Opening 812 is configured to accommodate passage of screw 816 through opening 812 to bottom end 806 of the attachment member, as will be described in more detail hereinafter.

Engagement mechanism 820 is used in conjunction with attachment member 802, as is also illustrated in FIG. 23A. Engagement mechanism 820 generally includes engagement member 822 having first and second, spaced apart engagement arms 824L and 824R connected to base portion 830 at the proximal end of engagement member 822 and defining a clearance space 825 between the arms sized large enough to permit screw 816 to pass through clearance space 825. Base portion 830 has a top surface 833 and a bottom surface 831 and is provided with a screw hole 832 through the surfaces. Engagement portions 826L, 826R are integral with engagement arms 824L, 824R at the distal end of the arms. In the preferred embodiment of device 800, engagement portions 826L, 826R have inwardly sloped side walls which facilitate insertion of the engagement portions into slot 852, as previously described.

In operation, engagement portions 826L, 826R are inserted into slot 852 until lower surface 831 of base portion 830 engages the outer surface of external wall 850. In this position of engagement member 822, attachment member

46

5,502,989

15

802 is positioned proximate upper surface 833 of base portion 830 until screw hole 832 is aligned with opening 814 in the attachment member. Screw 816 is then inserted through each of opening 812 in the attachment member, opening 814 at the bottom end 806 of the housing, hole 832 in base portion 830, and clearance space 825. The screw will force engagement arms 824L, 824R to spread apart so that engagement portions 826L, 826R will engage the inner surface of external wall 850 proximate slot 852. In this configuration, cable 840 (See FIG. 23B) can be threaded through apertures 810 in the attachment member and attached to an external object, such as lock 860, to secure the attachment member to the lock. The cable will also prevent removal of screw 816.

It is to be understood that an attachment member 802' can be used independently of engagement mechanism 820 provided that an appropriate screw hole or screw insert is provided in the external wall (not shown) sized to permit screw 816' to engage with the hole (or insert), as is apparent from FIG. 24A. Further, an attachment member 802" may also be secured to an external wall by any other suitable engagement means, as for example providing a double-sided adhesive pad 870 for engaging both the bottom end of the attachment member 802" and the outer surface of the wall (not shown), as seen in FIG. 24B.

In still another embodiment of the same device 800, attachment member 802'" can be hingably connected to a base portion 818 having a screw hole 814'" so that the attachment member 802'" will swing away from the external wall when not in use, as seen in FIG. 25. In this embodiment, base portion 818 may be secured proximate the external wall of an item of equipment via screw 816'" and a threaded insert 819.

The attachment mechanism concept of FIGS. 23A and 23B can also be modified to include a conventional lock assembly 910 (as previously described by way of reference to the embodiment of FIG. 2) in combination with a retractable spindle arm 908. As illustrated in FIG. 26A, attachment mechanism 900 is affixed to one end of a cable 920 which has a closed loop 922 at its other end. Cable 920 is first wrapped around a relatively immovable object (not shown) and attachment mechanism 900 is passed through loop 922 and attached to the item to be protected such as external wall 950 to make it difficult to steal.

Attachment mechanism 900 is shown in its retracted position in FIG. 26B and generally includes a housing 902 and first and second, resilient engagement arms 904L and 904R which are mounted to the bottom end of housing 902 and extend outwardly therefrom. Engagement arms 904L, 904R have first and second, inwardly angled engagement portions 906L and 906R at the distal end of each of the arms which are configured so as to be easily received within slot 952 in the retracted position of spindle arm 908, as will be described in more detail hereinafter. At the other end of housing 902 from the engagement arms is a conventional cylindrical lock assembly 910, an example of which was described in detail by reference to FIG. 13B. A spindle arm 908 is adapted to be mounted to cylindrical lock assembly 910 at one end, with the opposite end of arm 908 extending between engagement arms 904L and 904R external of housing 902. Spindle arm 908 is connected to lock assembly 910 in such a manner that rotation of lock assembly 910 with an appropriate key (not shown) will cause translational movement of spindle arm 908 in the direction of arrow 930 (see FIG. 26B). This movement of arm 908 can be accomplished in any manner as is well known in the art, as for example having spindle arm 908 received within a cork-

16

screw shaped cam attachment mounted to lock assembly 910 so that rotation of the lock will cause corresponding translational movement of spindle arm 908.

In operation, with spindle arm 908 in the retracted position of FIG. 26B, engagement portions 906L and 906R are insertable into slot 952. Once inside of slot 952, a key can be inserted into lock assembly 910 and rotated so that spindle arm 908 will be moved in the direction of arrow 930 to its extracted position. The movement of spindle arm 930 along arrow 930 permits engagement arms 904L and 904R to flex outwards in the direction of arrow 940 so that engagement portions 906L and 906R will move outwards to engage the inner surface of slot 952. In this way, attachment mechanism 900 will be secured proximate external wall 950. To subsequently detach attachment mechanism 900 from proximate external wall 950, the appropriate key is reinserted into lock assembly 910 and rotated to retract spindle arm 908. This will cause engagement arms 904L, 904R to relax back to their natural configuration of FIG. 26B to thereby permit engagement portions 906L, 906R to be separated from slot 952.

FIG. 27 is a perspective view of an alternate preferred embodiment of the present invention. There are occasions that cables and locks are inappropriate or a certain amount of mobility for protected equipment is necessary. In those instances, using a proximity detecting system 980 can protect portable computer equipment. Proximity detecting system 980 includes a base unit 982 and a remote unit 984 relatively permanently attached to monitor 14 by use of a standardized slot 72 (as shown in FIG. 5 for example). The various embodiments shown in FIGS. 1-27 provide examples of different attachment schemes for remote unit 984. Base unit 982 and remote unit 984 operate together to control a separation distance between them. There are many different ways to implement proximity detecting system 980 as well known in the art. One way provides base unit 982 with a transmitter for periodically transmitting a signal to remote unit 984.

In operation, remote unit 984 includes a receiver and a self-powered siren (not shown). Should remote unit 984 fail to receive the periodic transmission, the siren activates to indicate unauthorized removal of the protected equipment. Optionally, remote unit 984 includes a transmitter transmitting a unique ID code allowing base unit 982 to activate a siren and to identify a particular piece of protected equipment.

While several embodiments of the present invention have been illustrated by way of example, it is apparent that further embodiments could be developed within the spirit and scope of the present invention. However, it is to be expressly understood that such modifications and adaptations are within the spirit and scope of the present invention, as set forth in the following claims.

What is claimed is:

1. A locking apparatus, comprising:

a housing including a slot engagement member having a slot engaging portion provided with a locking member having a peripheral profile complementary to preselected dimensions of a security slot provided in an exterior wall of a portable electronic device which thereby permits said locking member to extend into said security slot, said slot engagement member being rotatable between an unlocked position wherein said locking member is removable from said security slot, and a locked position wherein said locking member is retained within said security slot;

47

5,502,989

17

a pin, coupled through said housing, for extending into said security slot proximate said slot engaging portion when said slot engagement member is in said locked position to thereby inhibit rotation of said slot engagement member to said unlocked position; and

cable attachment means, coupled to said housing, for attaching a cable to said housing.

2. The apparatus of claim 1 wherein said pin includes a first threaded portion, complementary to a second threaded portion in an aperture in said housing.

3. The apparatus of claim 1 wherein said pin extends a distance into the security slot greater than a wall thickness of the external wall.

4. The apparatus of claim 1 wherein a first side of said housing abuts the external wall, said housing includes a cavity and a second side opposite said first side that is open to access said cavity wherein said pin is insertable through said second side and into said cavity to interlock said first side and the security slot.

5. The apparatus of claim 4 wherein said pin includes a first threaded portion complementary to a second threaded portion in an aperture in said first side of said housing.

6. The apparatus of claim 1 wherein said housing includes sidewalls orthogonal to said first side wherein said sidewalls include opposing apertures to permit an object to extend therethrough after insertion of said pin into the security slot to inhibit removal of said pin from the security slot.

7. The apparatus of claim 6 wherein said object is a cable.

8. The apparatus of claim 4 further comprising a spindle adapted for insertion into said cavity, said spindle incorporating said pin at a first end such that insertion of said spindle into said cavity inserts said pin into the security slot through an aperture in said first side.

9. The apparatus of claim 8 wherein said housing includes sidewalls orthogonal to said first side wherein said sidewalls include apertures and a second end of said spindle includes a transverse aperture collinear with said opposing apertures in said sidewalls, said opposing apertures and said transverse apertures permitting an object to extend therethrough after insertion of said pin into the security slot to inhibit removal of said pin from the security slot.

10. A removable, lockable, portable electronic device attachment system, comprising:

a cable for attaching to a first object other than a portable electronic device;

18

a housing, proximate to said electronic device and including a slot engagement member having a slot engaging portion provided with a locking member having a peripheral profile complementary to preselected dimensions of a security slot provided in an exterior wall of said portable electronic device to thereby permit said locking member to extend into said slot, said slot engagement member being rotatable between an unlocked position wherein said locking member is removable from the slot, and a locked position wherein said locking member is retained within the slot;

a pin, coupled through said housing, for extending into said security slot proximate said slot engaging portion when said slot engagement member is in said locked position to thereby inhibit rotation of said slot engagement member to said unlocked position; and

means, coupled to said housing, for attaching said cable to said housing.

11. A cable attachment apparatus, comprising:

a portable electronic device having an exterior wall provided with a security slot;

a housing, adapted to abut said exterior wall adjacent said security slot, said housing including a slot engagement member having a slot engaging portion provided with a locking member having a peripheral profile complementary to said security slot, to permit said locking member to extend into said security slot, said slot engagement member being rotatable between an unlocked position wherein said locking member is removable from said security slot, and a locked position wherein said locking member is retained within said security slot;

a pin, coupled through said housing adjacent to said slot engagement member, for extending into said security slot proximate said slot engaging portion when said slot engagement member is in said locked position to thereby inhibit rotation of said slot engagement member to said unlocked position; and

means, coupled to said housing, for retaining said cable to said housing.

12. The apparatus of claim 1 wherein said locking member is "T-shaped."

* * * * *

48

US007100403B2

(12) **United States Patent**
Murray, Jr. et al.

(10) **Patent No.:** **US 7,100,403 B2**
(45) **Date of Patent:** ***Sep. 5, 2006**

(54) **COMPUTER PHYSICAL SECURITY DEVICE**

(75) Inventors: **William R. Murray, Jr.**, Redwood City, CA (US); **Stewart R. Carl**, Palo Alto, CA (US); **Arthur N. Zarnowitz**, Burlingame, CA (US)

(73) Assignee: **ACCO Brands USA LLC**,
Lincolnshire, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
This patent is subject to a terminal disclaimer.

(21) Appl. No.: **10/839,521**

(22) Filed: **May 4, 2004**

(65) **Prior Publication Data**

US 2004/0206138 A1 Oct. 21, 2004

Related U.S. Application Data

(63) Continuation of application No. 08/998,961, filed on Dec. 29, 1997, now Pat. No. 6,735,990, which is a continuation of application No. 08/485,518, filed on Jun. 7, 1995, now abandoned, which is a continuation-in-part of application No. 08/042,851, filed on Apr. 5, 1993, now Pat. No. 5,381,685, which is a continuation-in-part of application No. 08/006,311, filed on Jan. 19, 1993, now abandoned, and a continuation of application No. 07/824,964, filed on Jan. 24, 1992, now abandoned.

(51) **Int. Cl.**

E05B 69/00 (2006.01)

(52) **U.S. Cl.** 70/58; 70/14; 70/18; 248/551

(58) **Field of Classification Search** 70/14, 70/57, 58, 18, 30, 49, 232, 423-430; 248/551-553; 411/549, 552, 553, 555, 343, 349, 216, 217


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

285,074 A 9/1883 Rhoades et al.
505,299 A 9/1893 Schneider

606,734 A	7/1898	Olmstead
611,646 A	10/1898	Parker
786,842 A	4/1905	Robeson
881,364 A	3/1908	Wheeler
934,928 A	9/1909	Michel
942,537 A	12/1909	Batdorf
952,411 A	3/1910	Billy
1,004,333 A	9/1911	Alsterberg
1,050,276 A	1/1913	Johnson
1,432,646 A	10/1922	Gillom
1,452,471 A	4/1923	Kline
1,470,937 A	10/1923	Schou
1,534,936 A	4/1925	Fischbach
1,672,333 A	6/1928	Miller
1,786,511 A	12/1930	Warren
2,109,109 A	2/1938	Finch
2,130,216 A	9/1938	Zaninovich
2,172,208 A	9/1939	Kurtzon
2,190,661 A	2/1940	Hauer
2,383,397 A	8/1945	Lofqwist
2,469,874 A	5/1949	Fetsko, Jr.
2,480,662 A	8/1949	McKinzie
2,530,560 A	11/1950	Young
2,577,956 A	12/1951	Elsberg
2,594,012 A	4/1952	Griffin
2,660,084 A	11/1953	Newman
2,677,261 A	5/1954	Jacobi
2,729,418 A	1/1956	Maynard
2,800,090 A	7/1957	Reid
2,963,310 A	12/1960	Abolins
3,091,011 A	5/1963	Campbell
3,101,695 A	8/1963	Honeyman, Jr.
3,130,571 A	4/1964	Neumann
3,136,017 A	6/1964	Preziosi
3,171,182 A	3/1965	Danehy
3,200,694 A	8/1965	Rapata
3,211,408 A	10/1965	Schaefer
3,220,077 A	11/1965	Newcomer, Jr. et al.
3,276,835 A	10/1966	Hall
3,469,874 A	9/1969	Mercuio
3,521,845 A	7/1970	Sweda et al.
3,590,608 A	7/1971	Smyth et al.
3,625,031 A	12/1971	Alley, III
3,634,963 A	1/1972	Hermann
3,664,163 A	5/1972	Foote
3,722,239 A	3/1973	Mestre
3,727,934 A	4/1973	Averbrook et al.
3,737,135 A	6/1973	Bertolini
3,754,420 A	8/1973	Oellerich

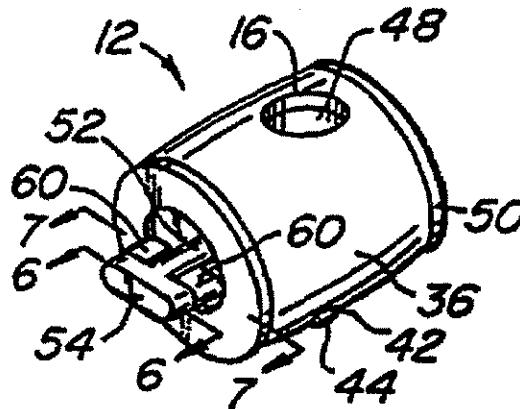

US 7,100,403 B2

Page 2

3,765,197 A	10/1973	Foote	4,862,716 A	9/1989	Derman
3,771,338 A	11/1973	Raskin	4,870,840 A	10/1989	Klein
3,772,645 A	11/1973	Odenz et al.	4,893,488 A	1/1990	Klein
3,782,146 A	1/1974	Franke	4,907,111 A	3/1990	Derman
3,785,183 A	1/1974	Sander	4,907,716 A	3/1990	Wankel et al.
3,798,934 A	3/1974	Wright et al.	4,918,952 A	4/1990	Lakoski et al.
3,826,510 A	7/1974	Halter	4,924,683 A	5/1990	Derman
D232,416 S	8/1974	Gazda et al.	4,938,040 A	7/1990	Humphreys, Jr.
3,859,826 A	1/1975	Singer et al.	4,959,635 A	9/1990	Wilson
3,866,873 A	2/1975	Bohli	4,959,979 A	10/1990	Filipow et al.
3,875,945 A	4/1975	Tucker et al.	4,966,511 A	10/1990	Lee
3,910,079 A	10/1975	Gassaway	4,978,265 A	12/1990	De Wan
3,910,081 A	10/1975	Pender	4,979,382 A	12/1990	Perry
3,986,780 A	10/1976	Nivet	4,985,695 A	1/1991	Wilkinson et al.
3,990,276 A	11/1976	Shontz	4,986,097 A	1/1991	Derman
3,999,410 A	12/1976	Hall	4,993,244 A	2/1991	Osman
4,003,228 A	1/1977	Lievens et al.	5,001,854 A	3/1991	Derman
4,004,440 A	1/1977	Dreyer	5,010,748 A	4/1991	Derman
4,007,613 A	2/1977	Gassaway	5,022,242 A	6/1991	Povilaitis
4,018,339 A	4/1977	Pritz	5,024,072 A	6/1991	Lee
4,028,913 A	6/1977	Falk	5,027,627 A	7/1991	Derman
4,028,916 A	6/1977	Pender	5,050,836 A	9/1991	Makous
4,047,748 A	9/1977	Whaley et al.	5,052,199 A	10/1991	Derman
4,055,973 A	11/1977	Best	5,063,763 A	11/1991	Johnson
4,057,984 A	11/1977	Avaiusini	5,067,151 A	11/1991	Inagaki et al.
4,065,083 A	12/1977	Gassaway	5,076,079 A	12/1991	Monoson
4,066,195 A	1/1978	Dickler	5,082,232 A	1/1992	Wilson
4,114,409 A	9/1978	Scire	5,082,233 A	1/1992	Ayers et al.
4,118,902 A	10/1978	Saxton	5,099,663 A	3/1992	Dearstine
4,123,922 A	11/1978	Kuenstler	5,119,649 A	6/1992	Spence
4,131,001 A	12/1978	Gotto	5,135,197 A	8/1992	Kelley et al.
4,212,175 A	7/1980	Zakow	5,184,798 A	2/1993	Wilson
4,223,542 A	9/1980	Basseches	5,197,706 A	3/1993	Braithwaite et al.
4,252,007 A	2/1981	Kerley	D337,040 S	7/1993	Carl
4,300,371 A	11/1981	Herwick et al.	5,228,319 A	7/1993	Holley et al.
4,311,883 A	1/1982	Kidney	5,279,136 A	1/1994	Perry
4,391,110 A	7/1983	Nielsen	5,327,752 A	7/1994	Myers et al.
4,394,101 A	7/1983	Richer	D350,473 S	9/1994	Simon
4,418,550 A	12/1983	Hamilton	5,349,834 A	9/1994	Davidge
4,419,034 A	12/1983	DiMartino	5,351,507 A	10/1994	Derman
4,442,571 A	4/1984	Davis et al.	5,351,508 A	10/1994	Kelley
4,448,049 A	5/1984	Murray	5,361,610 A	11/1994	Sanders
4,462,233 A	7/1984	Horetzke	5,370,488 A	12/1994	Sykes
4,527,405 A	7/1985	Renick et al.	5,381,685 A	1/1995	Carl et al.
4,570,465 A	2/1986	Bennett	5,390,514 A	2/1995	Harmon
4,584,856 A	4/1986	Petersdorff et al.	5,390,977 A	2/1995	Miller
4,586,843 A	5/1986	Heng	5,394,713 A	3/1995	Harmon
4,603,829 A	8/1986	Koike et al.	5,398,530 A	3/1995	Derman
4,610,587 A	9/1986	Wollar	5,400,622 A	3/1995	Harmon
4,616,490 A	10/1986	Robbins	5,406,809 A	4/1995	Igelmund
4,640,106 A	2/1987	Derman	5,412,959 A	5/1995	Bentley
4,655,057 A	4/1987	Derman	5,421,667 A	6/1995	Leyden et al.
4,667,491 A	5/1987	Lokken et al.	5,466,022 A	11/1995	Derman
4,676,080 A	6/1987	Schwarz	5,489,173 A	2/1996	Hoffe
4,680,949 A	7/1987	Stewart	5,493,878 A *	2/1996	Murray et al. 70/58
4,685,312 A	8/1987	Lakoski et al.	5,502,989 A *	4/1996	Murray et al. 70/58
4,691,891 A	9/1987	Dionne	5,520,031 A	5/1996	Davidge
4,692,968 A	9/1987	Girard	D370,473 S	6/1996	Derman
4,704,881 A	11/1987	Sloop, Sr.	5,579,657 A	12/1996	Makous
4,733,840 A	3/1988	D'Amore	5,593,878 A	1/1997	Knopf et al.
4,738,428 A	4/1988	Themistos et al.	5,603,416 A	2/1997	Richardson et al.
4,741,185 A	5/1988	Weinert et al.	5,608,605 A	3/1997	Siow et al.
4,768,361 A	9/1988	Derman	5,611,223 A	3/1997	Spitzer
4,779,434 A	10/1988	Derman	5,622,064 A	4/1997	Gluskoter et al.
4,805,426 A	2/1989	Dimmick et al.	5,687,592 A	11/1997	Penniman
4,813,252 A	3/1989	Einstabland et al.	5,692,400 A	12/1997	Bliven et al.
4,826,193 A	5/1989	Davis	5,709,110 A	1/1998	Greenfield et al.
4,834,600 A	5/1989	Lemke	5,722,268 A	3/1998	Choi
4,842,912 A	6/1989	Hutter, III	5,787,739 A	8/1998	Derman
4,843,848 A	7/1989	Igelmund	5,791,171 A	8/1998	Kelley
4,856,304 A	8/1989	Derman	5,836,183 A	11/1998	Derman
4,856,305 A	8/1989	Adams	5,870,281 A	2/1999	Kim
4,858,455 A	8/1989	Kuo	5,875,657 A	3/1999	Kelley

US 7,100,403 B2

Page 3

5,913,907 A	6/1999	Lee	
5,963,131 A	10/1999	D'Angelo et al.	
5,983,679 A	11/1999	Reyes	
6,000,251 A	12/1999	Murray et al.	
6,000,252 A *	12/1999	Murray et al.	70/58
6,006,557 A *	12/1999	Carl et al.	70/58
6,038,891 A	3/2000	Zeren et al.	
6,058,744 A	5/2000	Ling	
6,081,974 A	7/2000	McDaid	
6,112,562 A	9/2000	Murray, Jr. et al.	
6,133,830 A	10/2000	D'Angelo et al.	
6,155,088 A *	12/2000	Murray et al.	70/58
6,170,364 B1	1/2001	Johnson	
6,173,591 B1	1/2001	Derman	
6,199,413 B1	3/2001	McDaid et al.	
6,205,824 B1	3/2001	Miao	
6,212,918 B1	4/2001	Krautin	
6,227,017 B1	5/2001	Igelmund	
6,244,080 B1	6/2001	Sakurai	
6,257,029 B1	7/2001	Liao	
6,265,974 B1	7/2001	D'Angelo et al.	
6,301,940 B1	10/2001	Derman et al.	
6,317,936 B1	11/2001	McDaid et al.	
6,360,405 B1	3/2002	McDaid et al.	
6,401,502 B1	6/2002	Yang	
6,449,992 B1	9/2002	Yu et al.	
6,513,350 B1	2/2003	Hurd et al.	
6,553,794 B1 *	4/2003	Murray et al.	70/58
6,588,241 B1 *	7/2003	Murray et al.	70/58
6,735,990 B1 *	5/2004	Murray et al.	70/58
6,758,069 B1	7/2004	Derman	
2003/0101778 A1	6/2003	Carl	
2004/0206138 A1	10/2004	Murray et al.	
2005/0107813 A1	5/2005	Kuo	
2005/0150262 A1	7/2005	Murray et al.	
2005/0150263 A1	7/2005	Murray et al.	

FOREIGN PATENT DOCUMENTS

CA	454901	3/1949
CA	791364	8/1968
CA	987121	4/1976
DE	329934	12/1920
DE	335741	4/1921
DE	361068	4/1923
DE	456219	2/1928
DE	557757	8/1932
DE	3202700	8/1983
DE	3824393	7/1989
DE	3824393 C1	7/1989
FR	455740	8/1913
FR	877220	11/1940
FR	1026519	4/1953
FR	1085107	1/1955
FR	2308006	11/1976
FR	2636686 A1	3/1990
GB	447091	5/1936
GB	1256295	12/1971
GB	1376011	12/1974
GB	2109109 A	5/1983
GB	2 234 856 A	2/1991
IT	451949	10/1949
JP	37-007592	4/1962
JP	49-091096	8/1974
JP	52-36813	3/1977
JP	57-25092	2/1982
JP	57-179618	11/1982
NO	14095	5/1905
WO	WO 95/10680	4/1985
WO	WO 86/00396	1/1988
WO	WO 93/15295	8/1993

WO WO 9607002 A1 3/1996

OTHER PUBLICATIONS

Kablit Security System Catalog, pp. 7, 93, 1988. Computer and Office Equipment Security Catalog, .COPYRGT.1990 by Secure-It, Inc., 18 Maple Court, East Long-meadow, Mass. 01028.

Kensington Product Brochure for Kensington Apple.RTM., LaserWriter.RTM. and Macintosh.RTM. Portable Security Systems. Computer and Office Equipment Security Catalog, .COPYRGT. 1990 by Secure-It, Inc. 18 Maple Court, East Longmeadow, MA 01028.

Apple Security Bracket Solid in AS Kit.

Retaining Device Incorporated in Apple Computers.

Kensington MicroSaver Computer Lock Box and Literature, 3 pages.

Kensington Product News Release; "Kensington Wins Case Protecting Cable Lock Status", 2003, 1 page.

ACCO Brands, Inc. v. Micro Security Devices, Inc. Federal Circuit Court Order Granting Defendant's Motion for Summary Judgment, Jul. 23, 2002, 13 pages.

U.S. Appl. No. 09/441,142, filed Nov. 12, 1999, Murray et al.

U.S. Appl. No. 09/603,240, filed Jun. 23, 2000, Murray et al.

U.S. Appl. No. 09/804,973, filed Mar. 13, 2001, Murray et al.

U.S. Appl. No. 90/007,221, filed Sep. 24, 2004, Murray et al.

U.S. Appl. No. 90/007,225, filed Sep. 24, 2004, Carl et al.

U.S. Appl. No. 90/007,674, filed Aug. 19, 2005, Myers et al.

U.S. Appl. No. 95/000,116, filed Nov. 23, 2005, Murray et al.

U.S. Appl. No. 10/970,060, filed Oct. 20, 2004, Merrem et al.

U.S. Appl. No. 11/000,397, filed Nov. 29, 2004, Merrem et al.

Kensington Pass Proof User Manual, 1990 pp. 4-17, 4-19.

Los Angeles Times, Jan. 12, 1989. Part V, p. 10.

Kensington Microsaver Packaging and Manual (copyright 1992), 4 pages.

Flexguard, Philadelphia Security Products, 1 page (no date).

* cited by examiner

Primary Examiner—Suzanne Dino Barrett
(74) Attorney, Agent, or Firm—Townsend and Townsend and Crew LLP

(57) ABSTRACT

An apparatus which inhibits the theft of equipment such as personal computers is disclosed. The equipment must have an external wall provided with a specially designed, approximately rectangular slot having preselected dimensions. An attachment mechanism includes a housing for a spindle having a first portion rotatable within the housing, a shaft extending outwardly from the housing, and a crossmember at the end of the shaft having peripheral dimensions closely conforming to the internal dimensions of the slot. An abutment mechanism also emanates from the housing, and is located on opposite sides of the shaft intermediate the housing and the crossmember. The peripheral cross-sectional dimensions of the abutment mechanism and the shaft in combination closely conform to the dimensions of the slot. The length of the shaft from the housing to the crossmember is approximately equal to the thickness of the external wall of equipment. The crossmember is aligned with the abutment mechanism so that the crossmember can be inserted through the slot with the shaft and the abutment mechanism occupying the slot. The spindle is then rotated 90° to misalign the crossmember with the slot, thereby attaching the attachment mechanism rigidly to the external wall. A cable is secured to the housing and to an immovable object so that the equipment cannot be stolen.

19 Claims, 11 Drawing Sheets

U.S. Patent

Sep. 5, 2006

Sheet 1 of 11

US 7,100,403 B2

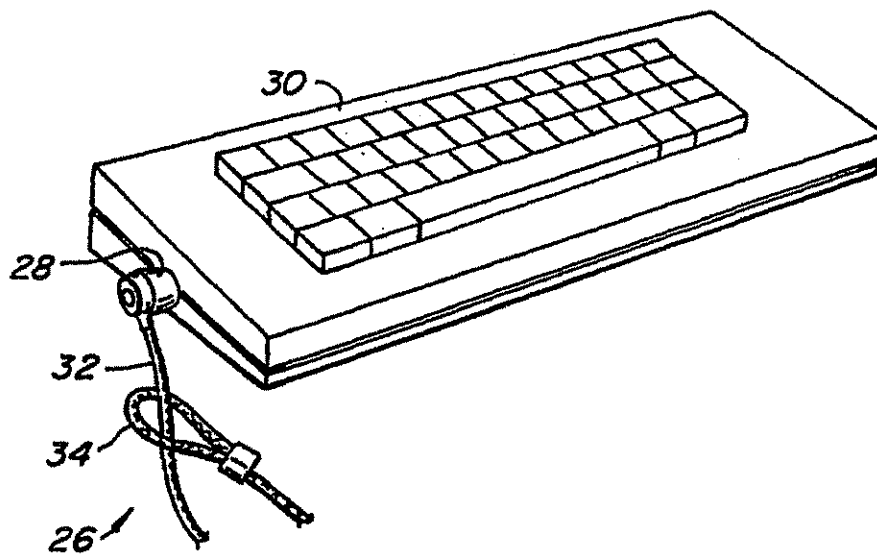
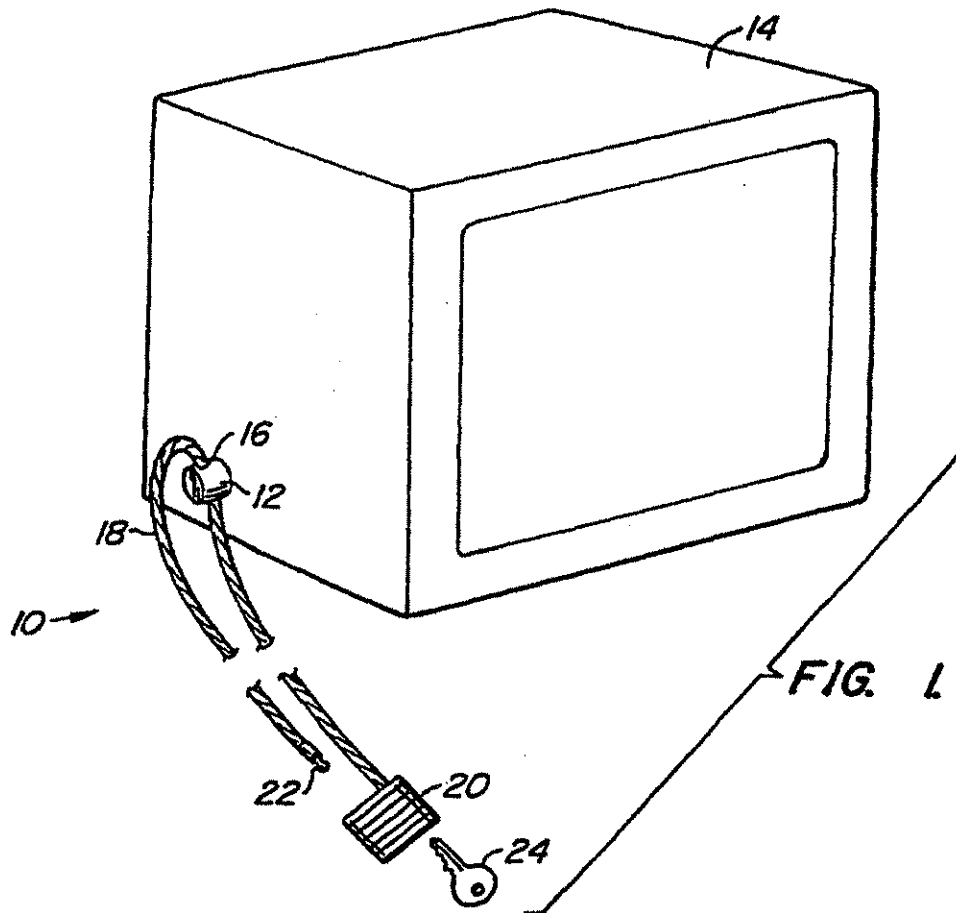


FIG. 2.

U.S. Patent

Sep. 5, 2006

Sheet 2 of 11

US 7,100,403 B2

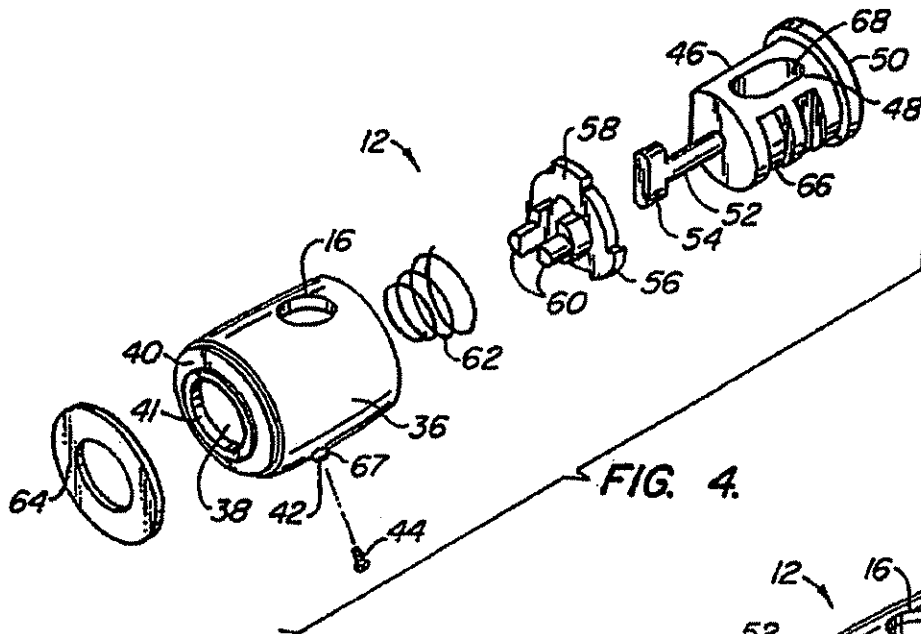


FIG. 4.

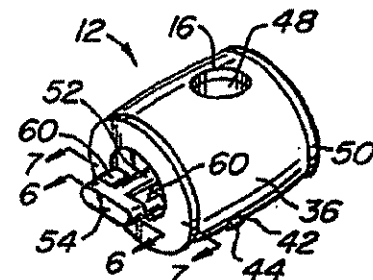


FIG. 3.

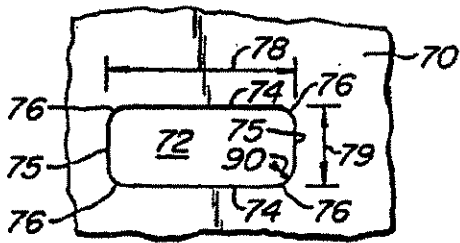


FIG. 5.

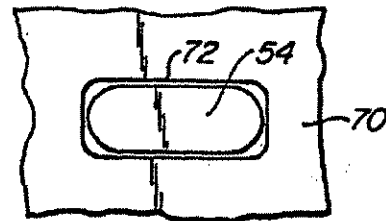


FIG. 8.




FIG. 6.

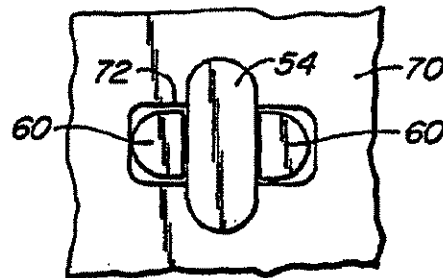


FIG. 9.




FIG. 7.

U.S. Patent

Sep. 5, 2006

Sheet 3 of 11

US 7,100,403 B2

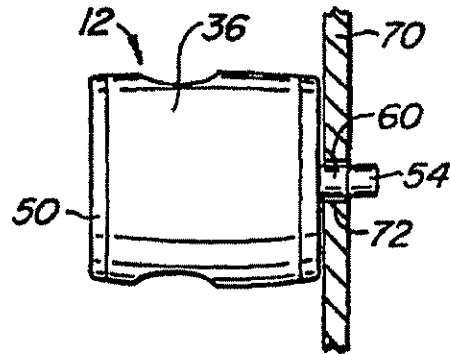


FIG. 10A.

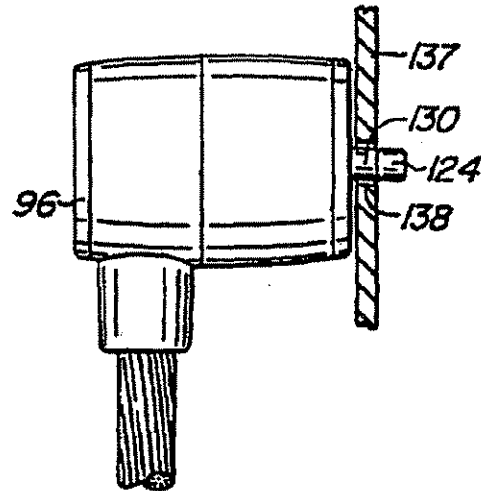


FIG. 13A.

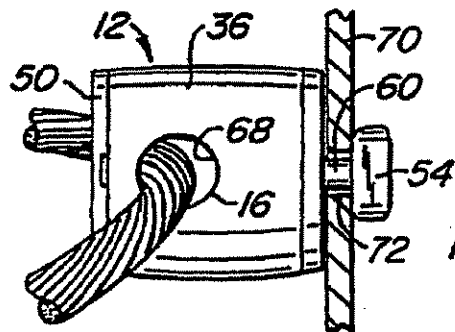


FIG. 10B.

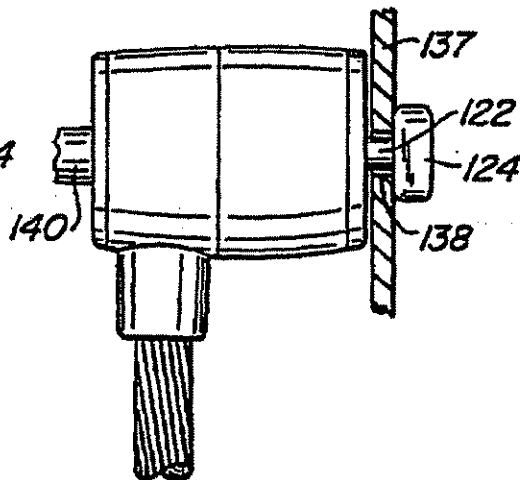



FIG. 13B.

U.S. Patent

Sep. 5, 2006

Sheet 4 of 11

US 7,100,403 B2

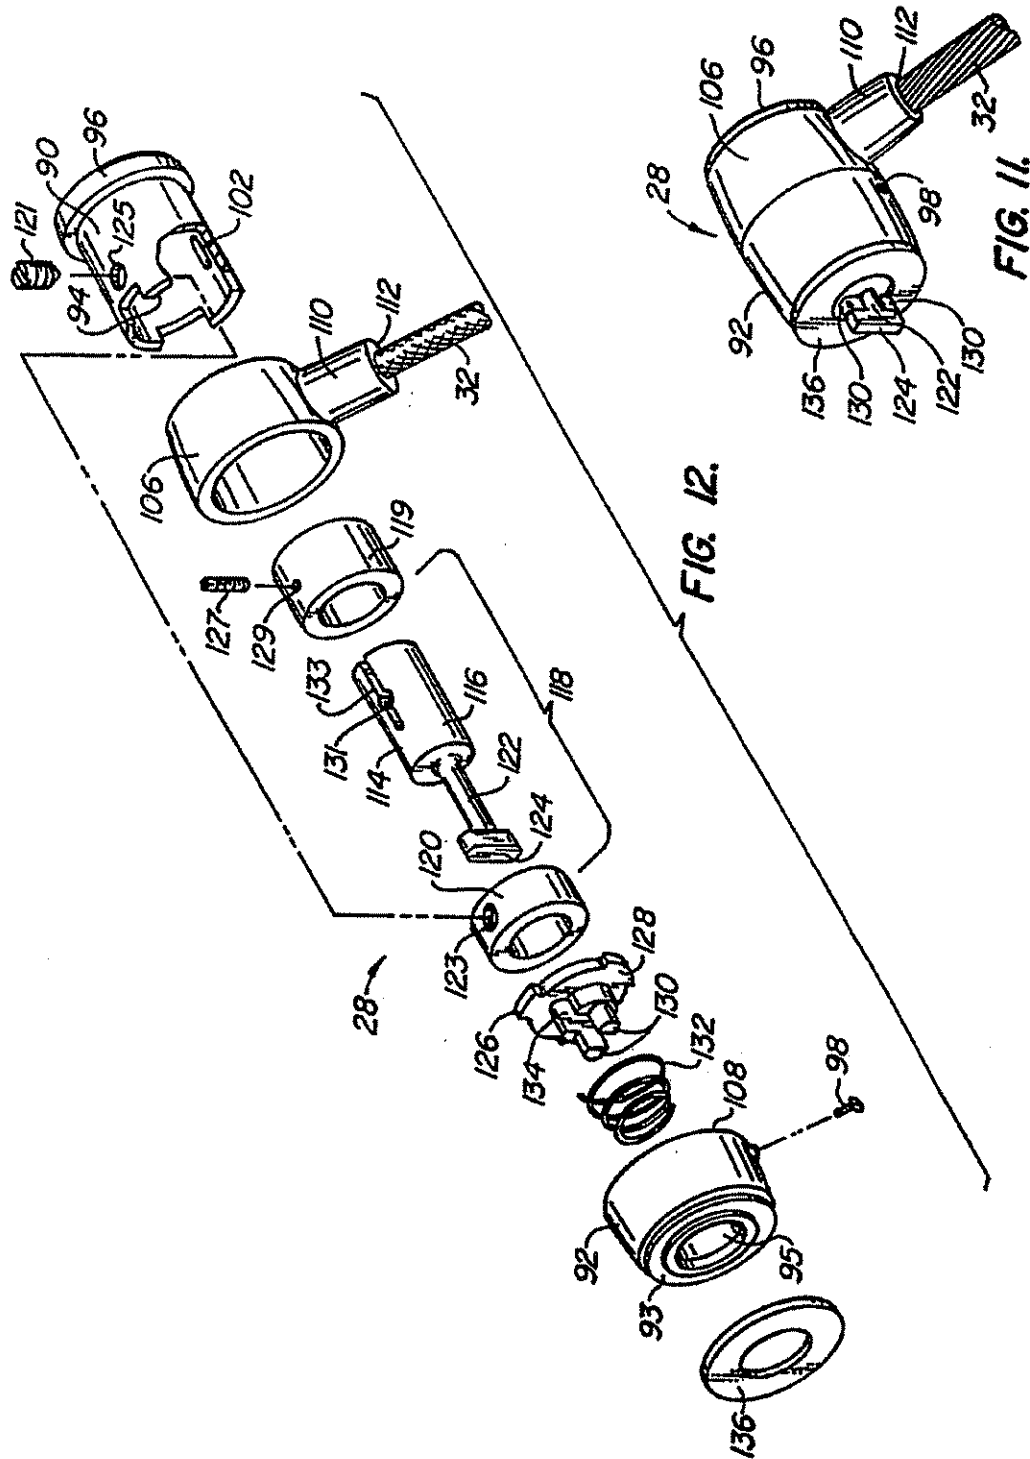

U.S. Patent

Sep. 5, 2006

Sheet 5 of 11

US 7,100,403 B2

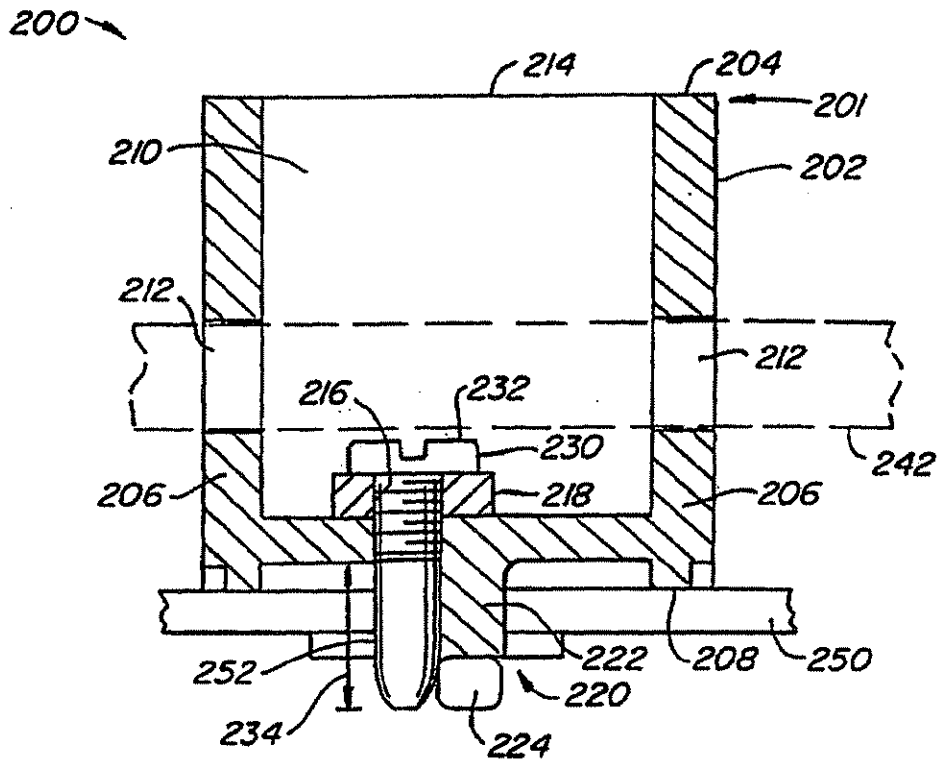


FIG. 14.

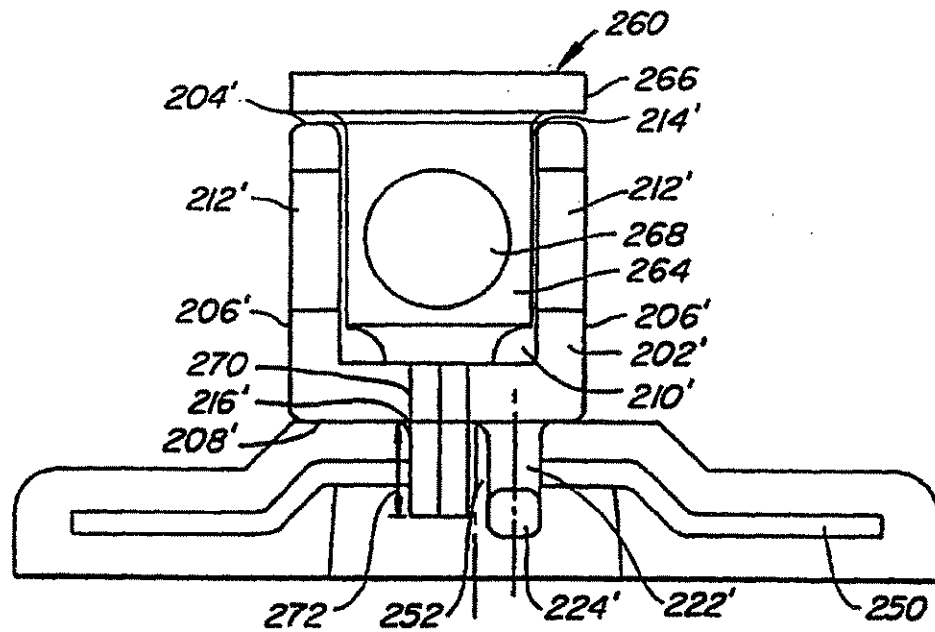


FIG. 15.