

1 **J. MICHAEL KALER**, SBN 158296  
2 **KALER LAW OFFICES**  
3 9930 Mesa Rim Road, Suite 200  
4 San Diego, California 92121  
Telephone (858) 362-3151

5 **MELODY A. KRAMER**, SBN 169984  
6 **KRAMER LAW OFFICE, INC.**  
7 9930 Mesa Rim Road, Suite 1600  
8 San Diego, California 92121  
Telephone (858) 362-3150

9  
10  
11 Attorneys for Plaintiff **JENS ERIK SORENSEN**,  
12 as Trustee of **SORENSEN RESEARCH AND**  
**DEVELOPMENT TRUST**

13  
14  
15 **UNITED STATES DISTRICT COURT**  
16 **FOR THE NORTHERN DISTRICT OF CALIFORNIA**

17 **JENS ERIK SORENSEN**, as Trustee of ) **Case No. CV 07-D5568 JSW**  
18 **SORENSEN RESEARCH AND** )  
19 **DEVELOPMENT TRUST,** ) **AMENDED**  
20 ) **COMPLAINT FOR PATENT**  
Plaintiff ) **INFRINGEMENT**  
21 v. )  
22 )  
23 **DIGITAL NETWORKS NORTH** ) **REQUEST FOR JURY TRIAL**  
24 **AMERICA, INC., a Delaware** )  
corporation; **LEGACY SUPPORT** )  
25 **SERVICES, LTD. d/b/a S2G; and DOES** )  
1-100,  
26 Defendants.  
27  
28

1 Plaintiff JENS E. SORESENSEN, as TRUSTEE OF THE SORESENSEN  
2 RESEARCH AND DEVELOPMENT TRUST (“SRDT”), for its Amended  
3 Complaint for Patent Infringement against Defendants, allege as follows:

4  
5 **THE PARTIES**

6 1. SRDT is a California resident, and the trustee of a trust organized  
7 according to California law and the assignee of all rights to United States Patent No.  
8 4,935,184 (“the ‘184 patent”).

9 2A. Defendant Digital Networks North America, Inc. (hereinafter “DNNA”) is a corporation organized under the laws of Delaware, having its principal offices in  
10 Cupertino, California, engaged in the manufacture, import, sale, and or offer for sale  
11 within the United States, including this District, of consumer electronic products,  
12 including Rio-brand MP3 players.

13  
14 2B. Defendant Legacy Support Services, Ltd. is a limited partnership organized under the laws of Texas, having its principal offices in Waco, Texas, and  
15 doing business under the name “S2G” (hereinafter “S2G”), engaged in the  
16 manufacture, import, sale, and/or offer for sale within the United States, including  
17 this District, of consumer electronic products, including Rio-brand MP3 players.

18  
19 2C. Defendant DOES 1-100 are other persons or entities, form unknown, that have also engaged in manufacture, import, sale, and/or offers for sale of Rio-  
20 brand MP3 players accused of patent infringement in this case during the past six  
21 years.

22  
23 2D. On information and belief, one or more Defendants have acted as agents  
24 of one or more of each other during some or all of the times relative to the subject  
25 matter of this Amended Complaint.

26  
27 **JURISDICTION and VENUE**

28 3. This action arises under the Patent Laws of the United States of

1 America, Title 35, United States Code. Jurisdiction is founded on Title 28, United  
2 States Code §§ 1331, 1332(a), and 1338(a).

3 4. Venue in this district is proper under 28 U.S.C. § 1391 and § 1400(b)  
4 because Defendant DNNA has committed acts of infringement here.

5 5A. This Court has personal jurisdiction over Defendant DNNA under the  
6 laws of California and U.S. constitutional law because Defendant DNNA maintains  
7 an office in the Northern District of California, offers or has offered those products  
8 for sale and sells or has sold those products in this District, provides advertising in  
9 this District targeted to this District's residents, and maintains a network of  
10 authorized distribution arrangements with retailers in this District for the purpose of  
11 selling DNNA products.

12 5B. This Court has personal jurisdiction over Defendant S2G under the laws  
13 of California and U.S. constitutional law because Defendant S2G offers and has  
14 offered those products for sale and sells those products in this District.

15 6. Ole Sorensen, the inventor of the United States Patent No. 4,935,184  
16 ("the '184 patent"), is an inventor who has spent a lifetime making improved plastic  
17 products and solving problems in the manufacture of plastic products including  
18 product weight reduction and reduced production cycle time and various strength and  
19 quality enhancements.

20 7. Ole Sorensen's experience and efforts over the last four decades in the  
21 plastics industry have resulted in more than 65 United States Patents, many of which  
22 have been recognized worldwide. His ideas and work have resulted in improved  
23 products and manufacturing processes for plastic flower pots, plastic medical  
24 devices, tape cassette cases, cable ties, educational toys, food and beverage  
25 containers and other plastic products.

26 8. The '184 patent entitled "Stabilized Injection Molding When Using a  
27 Common Mold Part With Separate Complimentary Mold Parts," was issued on June  
28 19, 1990. The '184 patent is one of Ole Sorensen's globally recognized patents,

1 having also been granted in Japan and Europe. A true and correct copy of the '184  
2 patent is attached to this complaint as Exhibit A.

3 9. The '184 patent provides a long-sought elegant solution to a pervasive  
4 problem in the injection molding of hollow plastic products: i.e., how to stabilize the  
5 mold parts against relative movement during the highly pressurized injection of  
6 melted plastic.

7 10. This mold part relative movement problem causes misalignment of the  
8 mold parts and results in products with walls of uneven thicknesses if not adequately  
9 controlled.

10 11. Ole Sorensen has been awarded several patents for his invention of  
11 multiple methods for mold part stabilization that are applicable in different injection  
12 molding situations.

13 12. The '184 patented method is directed toward stabilizing the mold parts  
14 against relative movement during the second injection of injection molding of  
15 laminated plastic parts produced sequentially in two cavities made up of at least one  
16 common mold part and at least two different complementary mold parts.

17 13. The '184 patent teaches a method to stabilize the mold parts during the  
18 second or later plastic injection by molding one or more stabilizing regions into the  
19 first plastic material component(s) that rigidly secure the two mold parts against  
20 displacement during the second or later injection.

21 14. By stabilizing the mold parts against mold part relative movement  
22 during the injection process, hollow products may be produced having more  
23 controlled dimensions.

24 15. Defendants have not obtained a license or any other valid authorization  
25 for import, sale, or offer for sale in the United States of products manufactured  
26 through use of the '184 patented process.

**CLAIM FOR RELIEF**

**(Patent Infringement)**

16. SRDT realleges and incorporates herein by reference paragraphs 1 through 15, inclusive, as though fully set forth herein.

17. Defendants have imported into, sold and/or offered for sale within the United States and this District, consumer electronic products manufactured through use of the '184 patented process. Those products are identified as all Rio Sport MP3 players ("Accused Products") and any other DNNA products which are manufactured utilizing the technology claimed in the '184 patent.

18. Defendants sell or have sold these Accused Products, under the Rio trademark. The Accused Products bear the Rio name either directly on the Accused Product and/or the packaging for the same. Defendants represents that the Accused Products are genuine Rio products.

19. [RESERVED]

20. [RESERVED]

21. Defendants are more likely to possess or be able to obtain the manufacturing process information for the Accused Products sold under the Rio trademark, including the Accused Products, than is Plaintiff.

22. Defendants have been on constructive notice of the '184 patent since the earlier of the patent's issuance on June 19, 1990 or their company formation.

23. By counsel's letter of October 11, 2004, SRDT placed DNNA on actual notice of the '184 patent.

25. SRDT's counsel's letter of October 11, 2004 provided DNNA with Drawing Number D-5438 and its associated claim chart showing the substantial likelihood pursuant to 35 U.S.C. § 295, of the infringement of the '184 patented process by the import, sale and/or offer for sale in this District and the United States of the Accused Products identified in Drawing Number D-5438 and all other DNNA products manufactured with the same process.

1           26. The evidence provided to DNNA in the letter of October 11, 2004,  
2 including Drawing Number D-5438 and related claim charts, illustrate how the  
3 process utilized to produce the Accused Products incorporated each element of the  
4 '184 patent claims. The letter included the results of expert analysis of the apparent  
5 injection molding process used to make the Accused Products. The letter also  
6 provided DNNA with a copy of the '184 patent.

7           27. As of the date of filing of this Complaint, SRDT has discovered the  
8 above-referenced Accused Products for which there is a substantial likelihood  
9 pursuant to 35 U.S.C. § 295, of the infringement of the '184 patented process by the  
10 import, sale and/or offer for sale in this District and the United States.

11           28. Defendant S2G received actual notice of the '184 patent at some time  
12 prior to filing of this Amended Complaint.

13           29. [RESERVED]

14           30. SRDT also alleges that any subsequently identified Rio-brand product  
15 that is manufactured in substantially the same manner as the Accused Products  
16 would also infringe on the '184 patent.

17           31. The housing of the Accused Products are plastic products.

18           32. The housing of the Accused Products are thin-walled products.

19           33. The housing of the Accused Products are hollow products.

20           34. The housing of the Accused Products are concave.

21           35. Some portions of the walls of the housing of the Accused Products are  
22 less than 5.0 mm in thickness.

23           36. The housing of the Accused Products are produced by cyclic injection  
24 molding.

25           37. The housing of the Accused Products have a closed end.

26           38. The housing of the Accused Products have an open end.

27           39. The housing of the Accused Products have laminated walls.

28           40. The laminated walls of each of the housing of the Accused Products

1 terminate in a rim at an open end.

2 41. The housing of the Accused Products are molded utilizing a first mold  
3 cavity and a second mold cavity.

4 42. On information and belief, the first mold cavity utilized to mold each of  
5 the housing of the Accused Products is formed of at least one first common mold  
6 part and at least one first complementary mold part.

7 43. On information and belief, the second mold cavity utilized to mold each  
8 of the housing of the Accused Products is formed of at least one first common mold  
9 part and at least one second complementary mold part.

10 44. On information and belief, the steps described in the following  
11 paragraphs 45 through 55, inclusive, are followed in production of each of the  
12 housing of the Accused Products:

13 45. On information and belief, the first common mold part and the first  
14 complementary mold part are combined to assemble the first mold cavity in  
15 production of the housing of the Accused Products.

16 46. On information and belief, a first plastic material is injected into the  
17 first mold cavity in production of the housing of the Accused Products.

18 47. On information and belief, the injected first plastic material is solidified  
19 to form a first plastic material component in production of the housing of the  
20 Accused Products.

21 48. On information and belief, the first common mold part and the second  
22 complementary mold part are combined to assemble the second mold cavity in  
23 production of the housing of the Accused Products, with the first plastic material  
24 component attached to the first common mold part during assembly of the second  
25 mold cavity. The first plastic material component is then contained within the  
26 second mold cavity.

27 49. On information and belief, a second plastic material having different  
28 characteristics than the first plastic material is injected into the second mold cavity in

1 production of the housing of the Accused Products.

2 50. On information and belief, after the second plastic material is injected, it  
3 solidifies to form a second plastic material component that fuses with the first plastic  
4 material component to produce the housing of the Accused Products.

5 51. On information and belief, the first plastic material component has one  
6 or more stabilizing regions.

7 52. On information and belief, the stabilizing regions in the first plastic  
8 material component, rigidly secure the first common mold part, in position in  
9 relation to the second complementary mold part in production of the housing of the  
10 Accused Product.

11 53. On information and belief, the stabilizing regions of the first plastic  
12 material component restrict displacement of the first common mold part in relation to  
13 the second complementary mold part that would otherwise result from the injection  
14 pressure of the second plastic material during injection into the second mold cavity  
15 in production of the housing of the Accused Product.

16 54. On information and belief, the stabilization during the injection of the  
17 second plastic material allows the housing of the Accused Product, to be produced  
18 with improved control of dimensions.

19 55. The first plastic material of the Accused Products reaches the rim of the  
20 housing of the Accused Product.

21 56. The second plastic material of the housing of the Accused Product  
22 reaches the rim of the Accused Products.

23 57. SRDT provided Defendant DNNA with an opportunity to prove that it  
24 was not using the '184 process. Pursuant to 35 U.S.C. § 295, SRDT requested that  
25 Defendant DNNA provide information about the manufacturing process for the  
26 Accused Products that could either prove or disprove the use of the '184 patented  
27 process.

28 58. SRDT also offered to negotiate a license or release with Defendants for



1 its use of the '184 patent in the event that Defendants could not demonstrate that they  
2 were not using the '184 patented process in making the Accused Products.

3 59. Despite the evidence of patent infringement, Defendants have not  
4 procured a license for its use of the '184 patent.

5 60. Defendants have an affirmative duty to investigate allegations of  
6 infringement, and to not to infringe the '184 patent now that it has been placed on  
7 notice of the '184 patent and its infringement.

8 61. As of the filing date of this Complaint, Defendants have not provided  
9 specific manufacturing process information for the Accused Products though  
10 requested to do so by SRDT in accordance with 35 U.S.C. § 295.

11 62. As of the filing of this Complaint, Defendants have not provided any  
12 information with regard to the manufacturing process for the Accused Products that  
13 would indicate that Defendants use a non-infringing process to manufacture any of  
14 the Accused Products.

15 63. On information and belief the manufacturing process information  
16 illustrated in Drawing No. D-5438 (attached hereto as Exhibit B), and described in  
17 the related claim chart (attached hereto as Exhibit C) are substantially correct.

18 64. The Accused Products which infringe the '184 patent include the  
19 Accused Products identified hereinabove, and may include others, of which SRDT is  
20 not presently aware, which will be identified when SRDT becomes aware of them.

21 65. At least one Defendant has contributed to infringement of the '184  
22 patent and has induced others to infringe the '184 patent by virtue of making,  
23 importing, selling, using and/or offering for sale within the United States and this  
24 District, in violation of 35 U.S.C. § 271, products manufactured using the '184  
25 patent process in willful disregard of SRDT's '184 patent rights.

26 66. The conduct of Defendants in willfully continuing to infringe the '184  
27 patent, and to induce others to actively infringe the '184 patent, by the acts alleged  
28 hereinabove despite being on both constructive notice and actual notice, is deliberate,

1 thus making this an exceptional case within the meaning of 35 U.S.C. § 285.

2 67. SRDT has suffered and is continuing to suffer damages in an amount  
3 according to proof at trial, by reason of Defendants' infringing conduct alleged  
4 hereinabove, including trebling of damages for willful infringement.

5  
6 **PRAYER FOR RELIEF**

7 **WHEREFORE**, SRDT prays that judgment be entered as follows:

8 a. For a determination that the Accused Processes are presumed to infringe  
9 the '184 patent pursuant to 35 U.S.C. § 295;

10 b. Defendants are adjudicated and decreed to have infringed the '184  
11 patent;

12 c. Defendants are adjudicated and decreed to have contributed to the  
13 infringement of the '184 patent and to have induced others to infringe the '184  
14 patent;

15 d. Defendants, their parents, subsidiaries, divisions, affiliates, officers,  
16 agents, and attorneys, and those acting in privity or concert with them, are enjoined  
17 from further infringement of the '184 patent, and from further contribution to or  
18 inducement of the infringement of the '184 patent;

19 e. Defendants are ordered to account for damages adequate to compensate  
20 SRDT for the infringement of '184 patent, their contributory infringement of the  
21 '184 patent, and their inducement of infringement of the '184 patent, in an amount  
22 according to proof at trial;

23 f. Such damages as are awarded are trebled by the Court pursuant to 35  
24 U.S.C. § 284 by reason of the willful, wanton, and deliberate nature of the  
25 infringement as to one or more Defendants;

26 g. That this is decreed an "exceptional case" and SRDT is awarded  
27 reasonable attorneys' fees by the Court pursuant to 35 U.S.C. § 285;

28 h. For interest thereon at the legal rate;

- i. For costs of suit herein incurred;
- j. For such other and further relief as the Court may deem just and proper.

**DEMAND FOR JURY TRIAL**

SRDT respectfully requests that its claims be tried to a jury.

DATED this 26th day of November, 2007.

JENS ERIK SORENSEN, as Trustee of  
SORENSEN RESEARCH AND DEVELOPMENT  
TRUST, Plaintiff

\J. Michael Kaler\

J. Michael Kaler, Esq.  
Melody A. Kramer, Esq.  
Attorneys for Plaintiff

## **EXHIBIT A**

**United States Patent** [19]

Sorensen

[11] Patent Number: 4,935,184

[45] Date of Patent: Jun. 19, 1990

[54] **STABILIZED INJECTION MOLDING WHEN USING A COMMON MOLD PART WITH SEPARATE COMPLIMENTARY MOLD PARTS**

[75] Inventor: Jens O. Sorensen, Rancho Santa Fe, Calif.

[73] Assignee: Primtec, Rancho Santa Fe, Calif.

[21] Appl. No.: 386,812

[22] Filed: Jul. 27, 1989

**Related U.S. Application Data**

[63] Continuation of Ser. No. 152,670, Feb. 5, 1988, abandoned.

[51] Int. Cl.<sup>1</sup> B29C 45/16

[52] U.S. Cl. 264/246; 264/255; 264/328.8; 425/129.1

[58] Field of Search 264/245, 246, 255, 328.1, 264/328.8, 328.11, 328.12; 425/127, 129.1, 130

**References Cited****U.S. PATENT DOCUMENTS**

3,543,338	12/1970	Cooper	264/246
3,737,272	6/1973	Segmüller	425/248
3,832,110	8/1974	Hehl	425/130
4,341,275	4/1983	Sorensen	264/328.8
4,422,995	12/1983	Schad	425/129.1
4,459,256	7/1984	Ziegler	264/242
4,508,676	4/1985	Sorensen	264/328.8

**FOREIGN PATENT DOCUMENTS**

17577 1/1972 Australia

**OTHER PUBLICATIONS**

Promat 100-100/100, Nestal.


Primary Examiner—Jill L. Heitbrink

Attorney, Agent, or Firm—Edward W. Callan

**ABSTRACT**

A process for injection molding plastic products having a closed end and an open end with laminated walls terminating in a rim at the open end. A first common mold part is combined with a first complementary mold part to assemble a first mold cavity in which the first plastic material is injected until it reaches the portion of the first mold cavity that defines the rim of the product. Portions of the first complementary mold part contact portions of the first common mold part to rigidly secure the mold parts in position in relation to each other in order to impede movement of the mold parts in relation to each other during injection of a first plastic material into the first mold cavity. The first plastic material is shaped such that when it is contained after solidification in a second mold cavity it provides one or more stabilizing regions that rigidly secure the first common mold part in position in relation to the second complementary mold part in order to impede movement of such mold parts in relation to each other during the injection of a second plastic material into the second mold cavity. A second plastic material having different characteristics than the first plastic material is injected until it reaches the portion of the second mold cavity that defines the rim of the product to form a laminated wall.

10 Claims, 5 Drawing Sheets

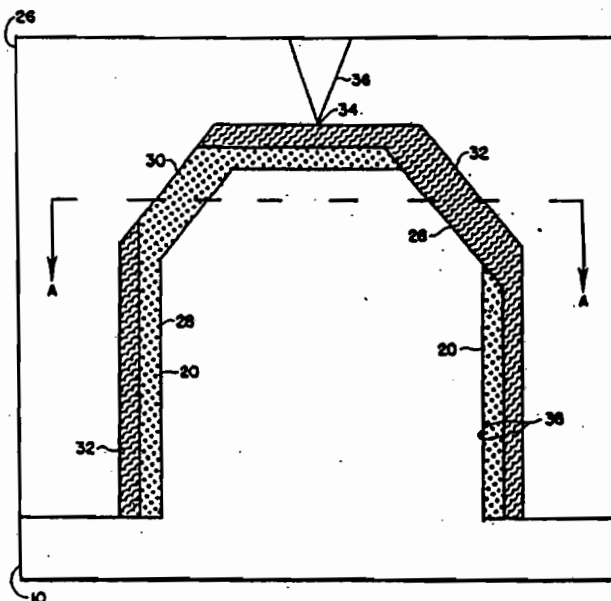



FW 002

U.S. Patent

Jun. 19, 1990

Sheet 1 of 5

4,935,184

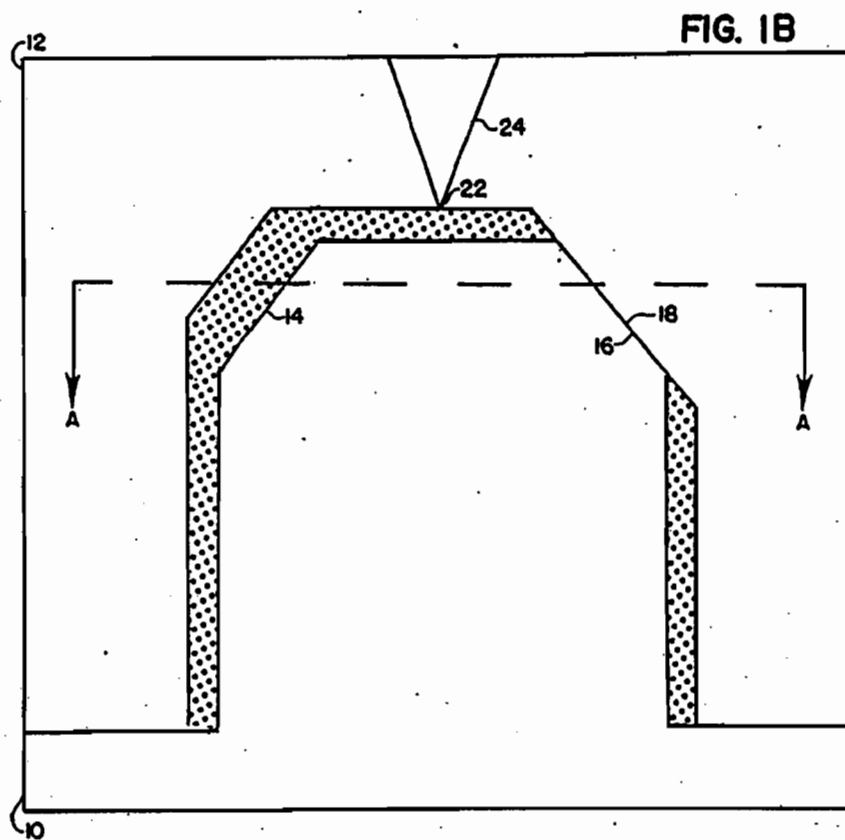
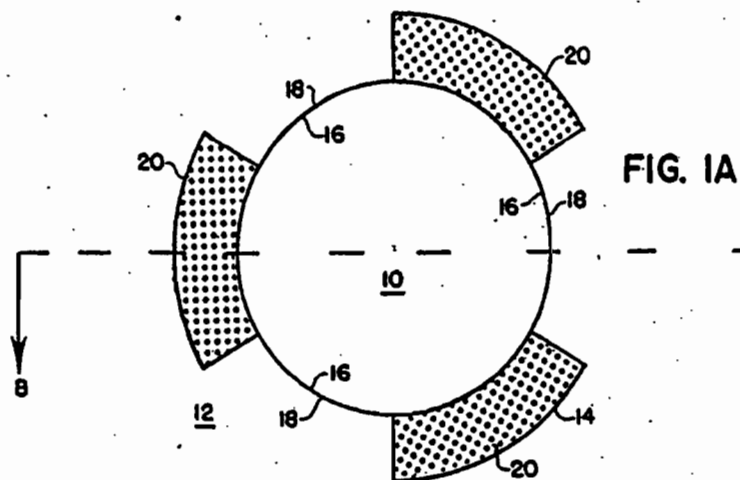


U.S. Patent

Jun. 19, 1990

Sheet 2 of 5

4,935,184



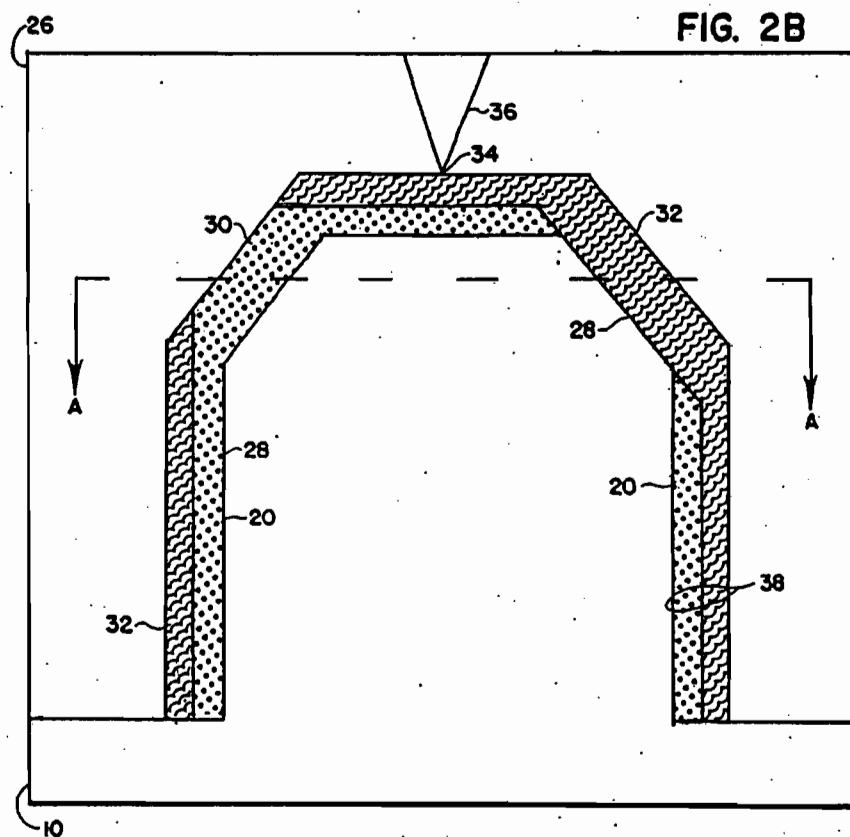
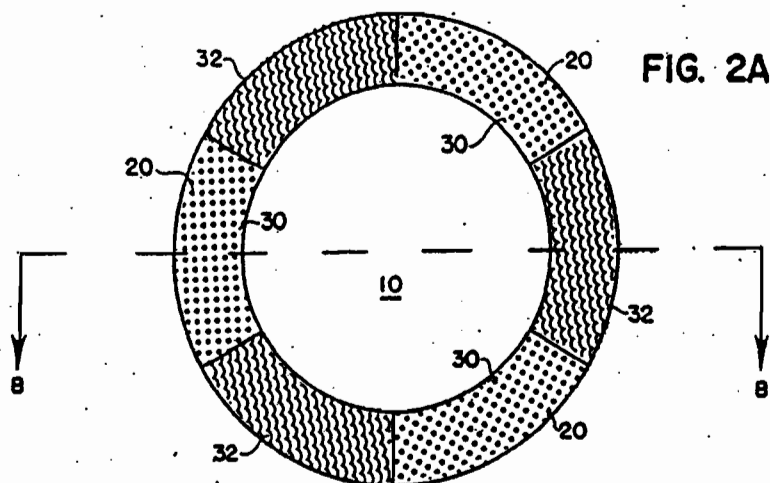


FW 004

U.S. Patent Jun. 19, 1990

Sheet 3 of 5

4,935,184

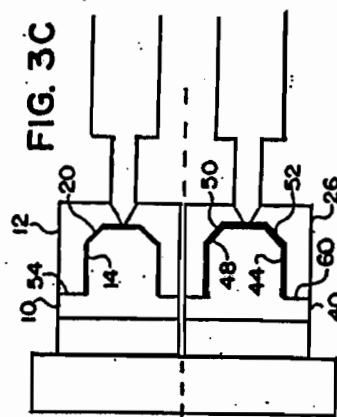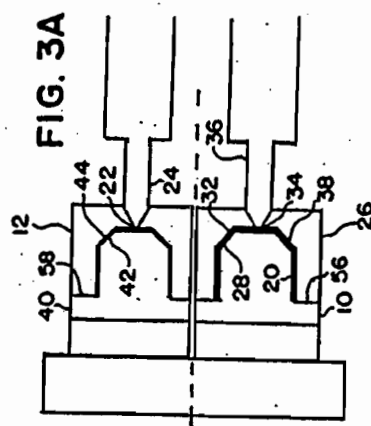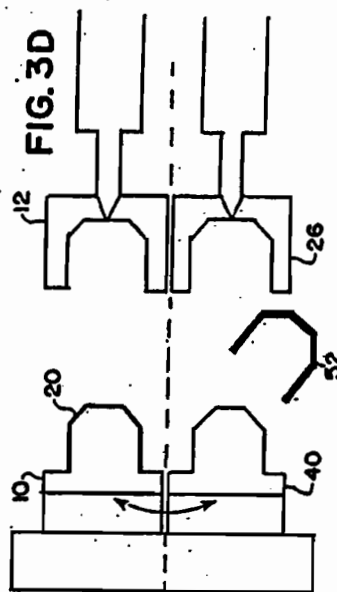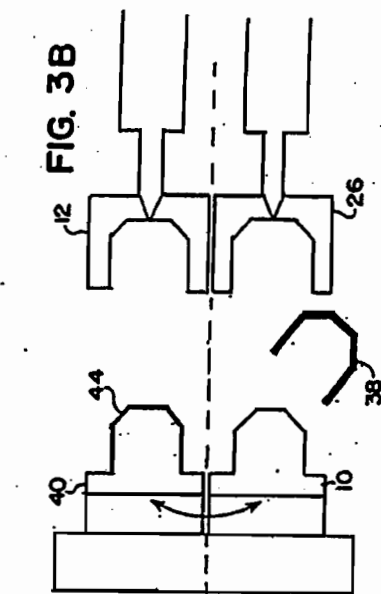

FW 005





U.S. Patent

Jun. 19, 1990

Sheet 4 of 5

4,935,184

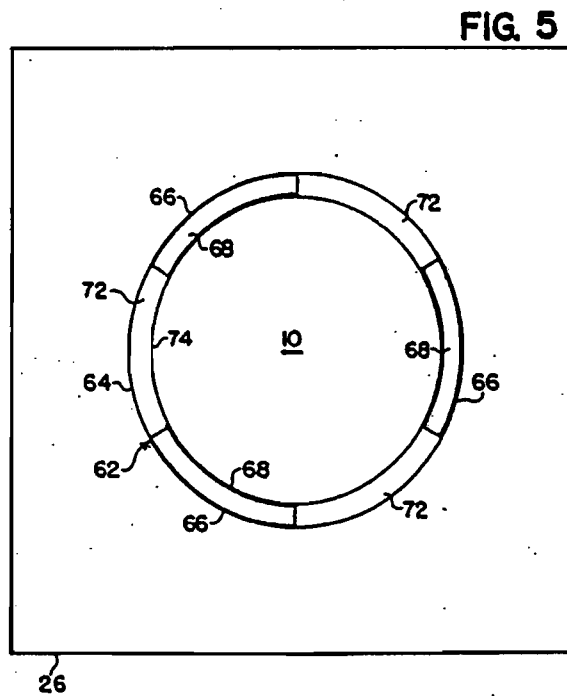
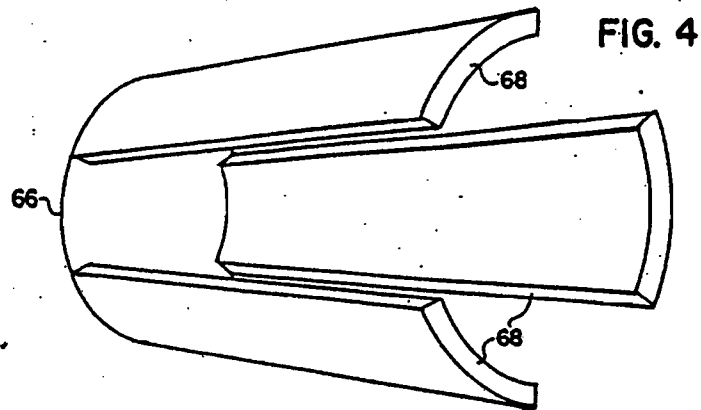


U.S. Patent

Jun. 19, 1990

Sheet 5 of 5

4,935,184

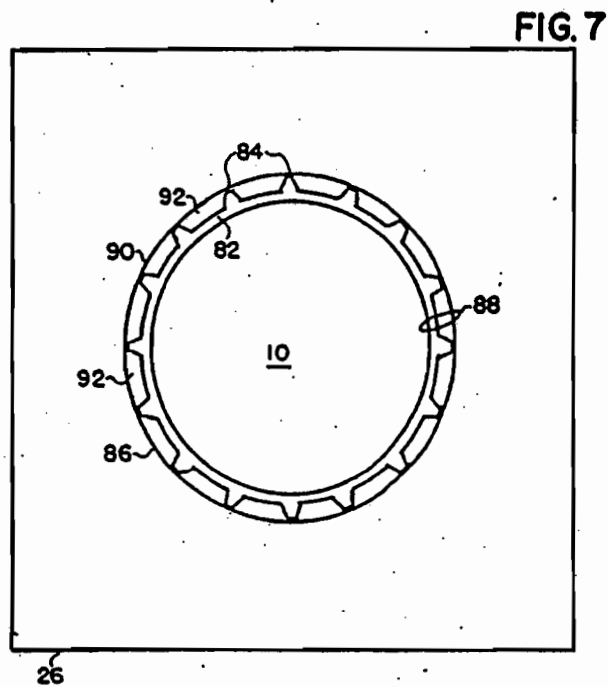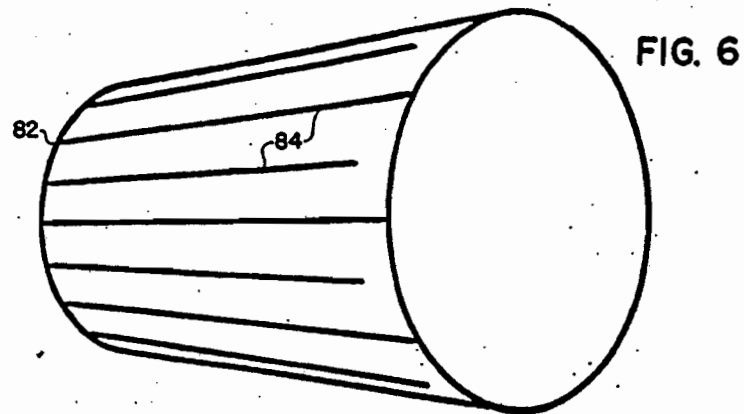

4,935,184

1

# **STABILIZED INJECTION MOLDING WHEN USING A COMMON MOLD PART WITH SEPARATE COMPLIMENTARY MOLD PARTS**

This is a continuation of co-pending application Ser. No. 07/152,670 filed on Feb. 5, 1988 now abandoned.

## **BACKGROUND OF THE INVENTION**

The present invention generally pertains to injection molding of plastic products and is particularly directed to stabilizing the dimensions of mold cavities during the injection steps when using a common mold part and at least two complementary mold parts to assemble separate mold cavities for receiving separate injections of plastic materials to produce a thin-walled, hollow plastic product.

The use of a common mold part with at least two complementary mold parts to provide separate mold cavities for receiving separate injections of plastic materials for producing a hollow plastic product is known. In one known prior art method of cyclic injection molding a hollow plastic product, a first mold cavity is defined by a first common mold part and a first complementary mold part; and a second mold cavity is defined by the first common mold part and a second complementary mold part. The method includes the steps of:

(a) combining the first common mold part with the first complementary mold part to assemble the first mold cavity;

(b) injecting a first plastic material into the first mold cavity;

(c) solidifying the injected first plastic material to form a first plastic material component;

(d) combining the first common mold part with the second complementary mold part to assemble the second mold cavity with the first plastic material component attached to the first common mold part so that when the second mold cavity is assembled the first plastic material component is contained within the second mold cavity;

(e) injecting a second plastic material into the second mold cavity while the first plastic material component is contained therein; and

(f) solidifying the injected second plastic material so as to form a second plastic material component that fuses with the first plastic material component to produce a hollow plastic product.

It also is known to expand upon this method by further using a third mold cavity defined by a second common mold part and the first complementary mold part, and a fourth mold cavity defined by the second common mold part and the second complementary mold part. The method further includes the steps of:

(h) during step (d), combining the second common mold part with the first complementary mold part to assemble the third mold cavity;

(i) during step (e), injecting a third plastic material into the third mold cavity;

(j) during step (f), solidifying the injected third plastic material to form a third plastic material component;

(k) during step (a), combining the second common mold part with the second complementary mold part to assemble the fourth mold cavity with the third plastic material attached to the second common mold part so that when the fourth mold cavity is assembled the third plastic material is contained within the fourth mold cavity;

2

(l) during step (b), injecting the fourth plastic material into the fourth mold cavity while the solidified third plastic material is contained therein; and

(m) during step (c), solidifying the injected fourth plastic material so as to form a fourth plastic material component that fuses with the third plastic material to produce a second said hollow plastic product.

This method has been used for producing hollow plastic products having composite walls of separately injected plastic materials. In performing such method, the first plastic material is injected until it reaches the parting line between the first common mold part and the first complementary mold part; the second plastic material is injected until it reaches the parting line between the first common mold part and the second complementary mold part; the third plastic material is injected until it reaches the parting line between the second common mold part and the first complementary mold part; and the fourth plastic material is injected until it reaches the parting line between the second common mold part and the second complementary mold part.

Typically, all four plastic materials are the same.

## **SUMMARY OF THE INVENTION**

The present invention provides a method and apparatus for injecting molding hollow, thin-walled plastic products, having a closed end and an open end with laminated walls terminating in a rim at the open end, where relative movement between the common mold part and the complementary mold parts is impeded during injection of the plastic materials.

According to the present invention, the first and second plastic materials have different characteristics, and in the injection molding method described above, the step of solidifying the injected first plastic material to form the first plastic material component (step (c)) includes the step of

(g) shaping the first plastic material component such that when the first plastic material component is so contained in the second mold cavity the first plastic material component provides one or more stabilizing regions that rigidly secure the first common mold part in position in relation to the second complementary mold part in order to impede movement of the first common mold part in relation to the second complementary mold part during the injection of the second plastic material into the second mold cavity, to thereby produce a thin-walled plastic product having controlled dimension in that the wall-thickness dimensions of the second mold cavity are stabilized by the stabilizing regions.

The step of injecting the first plastic material into the first mold cavity (step (b)) includes the step of

(h) injecting the first plastic material until it reaches the portion of the first mold cavity that defines the rim of the product; and

the step of injecting the second plastic material into the second mold cavity (step (e)) includes the step of

(i) injecting the second plastic material until it reaches the portion of the second mold cavity that defines the rim of the product.

When the method of the present invention utilizes two common mold cavities, such as described above, the step of solidifying the injected third plastic material to form the third plastic material component (step (j)) includes the step of shaping the third plastic material component such that when the third plastic material

FW 008

4,935,184

3

component is so contained in the fourth mold cavity the solidified third plastic material provides one or more stabilizing regions that rigidly secure the second common mold part in position in relation to the second complementary mold part in order to impede movement of the second common mold part in relation to the second complementary mold part during the injection of the fourth plastic material into the fourth mold cavity, to thereby produce a second thin-walled plastic product having controlled dimensions.

The method of the present invention may also be used for molding a product having a side wall including an approximately longitudinal strip that may be transparent to provide a transparent window in the side wall. This feature is particularly advantageous when it is desired to provide a longitudinal window in the side wall in order to monitor the level of a substance, such as a fluid, contained in the plastic product. In one embodiment, the first plastic material component is shaped to provide at least one stabilizing region that is transverse to a parting line between the first common mold part and the first complementary mold part, whereby the longitudinal strip is defined by the transverse stabilizing region. A transparent window is provided in the side wall by injecting a transparent first plastic material into the first mold cavity. A nontransparent second plastic material is injected into the second mold cavity to provide a nontransparent background for printing in the remainder of the side wall. In an alternative embodiment, the first plastic material component is shaped such that when the first plastic material component is contained in the second mold cavity, the second mold cavity defines at least one unfilled cavity region that is transverse to a parting line between the first common mold part and the second complementary mold part, whereby the longitudinal strip is defined by the unfilled transverse cavity region. In this embodiment, a transparent window is provided in the side wall by injecting a transparent second plastic material into the second mold cavity; and a nontransparent first plastic material is injected into the first mold cavity to provide a nontransparent background for printing in the remainder of the side wall.

In another aspect of the method of the present invention, the step of shaping the first plastic material component (step (g)) may further include the step of providing a first complementary mold part that is dimensioned in relation to the first common mold part such that when combined with the first common mold part to assemble the first mold cavity, portions of the first complementary mold part contact portions of the first common mold part to rigidly secure the first common mold part in position in relation to the first complementary mold part in order to impede movement of the first common mold part in relation to the first complementary mold part during the injection of the first plastic material into the first mold cavity.

The present invention further provides apparatus for performing the method of the present invention and hollow, thin-walled plastic products molded according to the method of the present invention.

Additional features of the present invention are described in relation to the description of the preferred embodiments.

#### BRIEF DESCRIPTION OF THE DRAWING

FIGS. 1A and 1B are sectional views illustrating a first mold cavity assembled by combining a first com-

4

mon mold part with a first complementary mold part. FIG. 1A is a top sectional view taken along lines A—A in FIG. 1B; and FIG. 1B is a side sectional view taken along lines B—B in FIG. 1A. FIGS. 1A and 1B further show the first plastic material injected into the first mold cavity.

FIGS. 2A and 2B are sectional views illustrating a second mold cavity assembled by combining the first common mold part of FIGS. 1A and 1B with a second complementary mold part. FIG. 2A is a top sectional view taken along lines A—A in FIG. 2B; and FIG. 2B is a side sectional view taken along lines B—B in FIG. 2A. FIGS. 2A and 2B further show the first plastic material component contained in the second mold cavity and the second plastic material injected into the second mold cavity.

FIGS. 3A through 3D illustrate a series of steps in the performance of a preferred embodiment of the method of the present invention.

FIG. 4 illustrates a first plastic material component formed in an alternative embodiment of the method of the present invention.

FIG. 5 is a sectional view illustrating a second mold cavity containing the first plastic material component of FIG. 4. FIG. 5 also is a sectional view illustrating a product molded according to such alternative embodiment of the method of the present invention.

FIG. 6 illustrates a first plastic material component formed in a further alternative embodiment of the method of the present invention.

FIG. 7 is a sectional view illustrating a second mold cavity containing the first plastic material component of FIG. 6. FIG. 7 also provides a sectional view of a product molded according to such further alternative embodiment of the method of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 1A and 1B the apparatus of a preferred embodiment of the present invention includes a first common mold part 10 and first complementary mold part 12. The first common mold part 10 is combined with the first complementary mold part 12 to assemble a first mold cavity 14. The first complementary mold part 12 is dimensioned in relation to the first common mold part 10 such that when so combined with the first common mold part 10 to assemble the first mold cavity 14, portions 16 of the first complementary mold part 12 contact portions 18 of the first common mold part 10 to rigidly secure the first common mold part 10 in position in relation to the first complementary mold part 12 in order to impede movement of the first common mold part 10 in relation to the first complementary mold part 12 during injection of the first plastic material 20 into the first mold cavity 14. The first plastic material 20 is injected into the mold cavity 14 through a gate 22 and a runner 24 in the first complementary mold part 12.

The injected first plastic material 20 is solidified to form a first plastic material component 20 by cooling the injected first plastic material in the first mold cavity 14, whereby the first plastic material component 20 is shaped in accordance with the dimensions of the first mold cavity 14. In an alternative embodiment, the first plastic material component may be further shaped following removal of the first complementary mold part 12.



4,935,184

5

Referring to FIGS. 2A and 2B the apparatus of a preferred embodiment of the present invention includes a second complementary mold part 26. The first common mold part 10 is combined with the second complementary mold part 26 to assemble a second mold cavity 28 with the first plastic material component 20 attached to the first common mold part 10, so that when the second mold cavity 28 is assembled, the first plastic material component 20 is contained within the second mold cavity 28.

The first plastic material component 20 is shaped such that when the first plastic material component 20 is so contained in the second mold cavity 28 the first plastic material component 20 provides one or more stabilizing regions 30 that rigidly secure the first common mold part 10 in position in relation to the second complementary mold part 26 in order to impede movement of the first common mold part 10 in relation to the second complementary mold part 26 during the insertion of a second plastic material 32 into the second mold cavity 28.

The second plastic material 32 is injected into the second mold cavity 28 through a gate 34 and a runner 36 in the second complementary mold part 26 while the first plastic material component 20 is contained in the second mold cavity 28.

The injected second plastic material 32 is solidified by cooling in the second mold cavity 28 so as to form a second plastic material component 32 that fuses with the first plastic material component 20 to produce thin-walled hollow plastic product 38 having controlled dimensions.

A preferred embodiment of a method of cyclic injection molding of hollow, thin-walled plastic products according to the present invention, utilizing two common mold parts and two complementary mold parts to provide four mold cavities is described with reference to FIGS. 3A through 3D.

Referring to FIG. 3A, a second common mold part 40 is combined with the first complementary mold part 12 to assemble a third mold cavity 42; while at the same time the first common mold part 10 is combined with the second complementary mold part 26 to assemble a second mold cavity 28, with the first plastic material component 20 attached to the first common mold part 10, so that when the second mold cavity 28 is assembled, the first plastic material component 20 is contained within the second mold cavity 28. The formation of the first plastic material component 20 is discussed above in relation to FIGS. 1A and 1B.

A third plastic material 44, which may be the same as the first plastic material 20, is injected into the third mold cavity 42 through the gate 22 and the runner system 24 contained in the first complementary mold part 12; while at the same time, the second plastic material 32 is injected into the second mold cavity 28 through the gate 34 and a runner system 36 contained in the second complementary mold part 26.

The injected third plastic material 44 is solidified by cooling in the third mold cavity 42 to form a third plastic material component 44; while at the same time the injected second plastic material 32 is solidified by cooling in the second mold cavity 28 so as to form the second plastic material component 28 that fuses with the first plastic material component 20 to produce the hollow, thin-walled plastic product 38.

Referring to FIG. 3B, the first common mold part 10 and the second common mold part 40 are separated

6

from the second complementary mold part 26 and the first complementary mold part 12 respectively; and the molded hollow, thin-walled plastic product 38 is ejected from first common mold part 10, while the third plastic material component 44 is retained on the third common mold part 40. The positions of the first common mold part 10 and the second common mold part 40 are then interchanged from those shown in FIG. 3B to those shown in FIG. 3C.

Referring to FIG. 3C, the first common mold part 10 is combined with the first complementary mold part 12 to assemble the first mold cavity 14; while at the same time the second common mold part 40 is combined with the second complementary mold part 26 to assemble a fourth mold cavity 48; with the first plastic material component 44 attached to the third common mold part 40, so that when the fourth mold cavity 48 is assembled, the third plastic material component 44 is contained within the fourth mold cavity 48. The formation of the third plastic material component 44 is discussed above in relation to FIG. 3A.

The first plastic material 20, which may be the same as the third plastic material 44, is injected into the first mold cavity 14 through the gate 22 and the runner system 24 contained in the first complementary mold part 12; while at the same time, a fourth plastic material 50, which may be identical to the second plastic material 32, is injected into the fourth mold cavity 48 through the gate 34 and a runner system 36 contained in the second complementary mold part 26.

The injected first plastic material 20 is solidified by cooling in the first mold cavity 14 to form another first plastic material component 20; while at the same time the injected fourth plastic material 50 is solidified by cooling in the fourth mold cavity 48 so as to form the second plastic material component 48 that fuses with the third plastic material component 44 to produce a second hollow, thin-walled plastic product 52.

Referring to FIG. 3D, the first common mold part 10 and the second common mold part 40 are separated from the first complementary mold part 12 and the second complementary mold part 26 respectively; and the second molded hollow, thin-walled plastic product 52 is ejected from second common mold part 40, while the first plastic material component 20 is retained on the first common mold part 10. The positions of the first common mold part 10 and the second common mold part 40 are then interchanged from those shown in FIG. 3D to those shown in FIG. 3A, and the cycle is repeated.

As described above, the first plastic material component 20 is shaped such that when the first plastic material component 20 is contained in the second mold cavity 28, the first plastic material component 20 provides one or more stabilizing regions 30 that rigidly secure the first common mold part 10 in position in relation to the second complementary mold part 26 in order to impede movement of the first common mold part 10 in relation to the second complementary mold part 26 during injection of the second plastic material 32 into the second mold cavity 28.

Likewise, the third plastic material component 44 is shaped such that when the third plastic material component 44 is contained in the fourth mold cavity 48, the third plastic material component 44 provides one or more stabilizing regions that rigidly secure the second common mold part 40 in position in relation to the second complementary mold part 26 in order to impede

FW 010

4,935,184

7

movement of the second common mold part 40 in relation to the second complementary mold part 26 during injection of the fourth plastic material 50 into the fourth mold cavity 48.

The method described above with reference to FIGS. 3A through 3D may be used for producing hollow, thin-walled plastic products having laminated walls of different plastic materials. In performing such method, the first plastic material 20 is injected until it reaches a parting line 54 between the first common mold part 10 and the first complementary mold part 12 (FIG. 3C); and the second plastic material 32 is injected until it reaches a parting line 56 between the first common mold part 10 and the second complementary mold part 26 (FIG. 3A). Likewise, the third plastic material 44 is injected until it reaches a parting line 58 between the second common mold part 40 and the first complementary mold part (FIG. 3A); and the fourth plastic material 50 is injected until it reaches a parting line 60 between the second common mold part 40 and the second complementary mold part 26.

Referring to FIGS. 4 and 5, the method of the present invention also may be used for molding a product 62 having a side wall 64 including at least one approximately longitudinal strip that may be transparent to thereby provide a transparent window in the side wall 64.

In one embodiment, the first plastic material component 66 is shaped to provide at least one stabilizing region 68 that is transverse to a parting line 54 (FIG. 3C) between the first common mold part 10 and the first complementary mold part 12, whereby each longitudinal strip is defined by a transverse stabilizing region 68. The stabilizing regions 68 need not extend all the way to the parting line 54. A transparent window is provided in the side wall 64 by injecting a transparent first plastic material into the first mold cavity to provide the first plastic material component 66. A nontransparent second plastic material 72 is injected into the second mold cavity 74 to provide a nontransparent background for printing in the remainder of the side wall 64.

In an alternative embodiment, the first plastic material component 66 is shaped such that when the first plastic material component 66 is contained in the second mold cavity 74, the second mold cavity 74 defines at least one unfilled cavity region 72 that is transverse to a parting line 56 (FIG. 3A) between the first common mold part 10 and the second complementary mold part 26, whereby longitudinal strips may be provided in the unfilled transverse cavity regions 72. The unfilled transverse cavity regions 72 need not extend all the way to the parting line 56. In this embodiment, transparent windows are defined in the side wall 64 by injecting a transparent second plastic material into the second mold cavity 74 to fill the transverse cavity regions 72. Prior thereto, a nontransparent first plastic material is injected into the first mold cavity to form the first plastic material component 66 and thereby provide a nontransparent background for printing in the remainder of the side wall 64.

Referring to FIGS. 6 and 7, in a further preferred embodiment, the first plastic material component 82 that is shaped as shown in FIG. 6 to include a plurality of symmetrically disposed stabilizing regions 84, which extend approximately longitudinally over a portion of the side wall 86 of the molded product 88. The first plastic material component 82 is molded in a first mold cavity in accordance with the teaching of applicant's

8

U.S. Pat. application No. 7,463, filed Jan. 26, 1987 and in accordance of the above description to the extent that such description is compatible with the teaching of application Ser. No. 7,463. After the first plastic material component 82 is formed in a first mold cavity, which is assembled by combining a first complementary mold part 12 and a first common mold part 10, the first plastic component 82 is retained on the first common mold part 10 while the first common mold part 10 is combined with a second complementary mold part 26 to assemble a second mold cavity 90, as shown in FIG. 7.

Referring to FIG. 7, the first plastic material component 82 is shaped such that when the first plastic material component 82 is contained in the second mold cavity 90, the first plastic material component 82 provides one or more stabilizing regions 84 that rigidly secure the first common mold part 10 in position in relation to the second complementary mold part 26 in order to impede movement of the first common mold part 10 in relation to the second complementary mold part 26 during injection of the second plastic material 92 into the second mold cavity 90.

The injected second plastic material 92 is solidified by cooling in the second mold cavity 90 to form a second plastic material component 92 that fuses with the first plastic material component 82 to produce the hollow, thin-walled, plastic product 88. The side wall 86 of the molded product 88 thus includes two layers of plastic 82, 92. The molded product 88 has controlled dimensions, is generally shaped as shown in FIG. 6, and has a lateral cross section as shown in FIG. 7. The side wall 86 of the molded product thus includes two layers of plastic 82, 92.

The stabilizing regions 84 have a wall thickness equal to the thickness of the side wall 86 and are transverse to the parting line 56 (FIG. 3A) between the first common mold part 10 and the second complementary mold part 26 to thereby provide longitudinal transparent windows 84 in the side wall 86. The stabilizing regions 84 need not extend all the way to the parting line 56. In a preferred embodiment of this product, the other side-wall layer 90 is nontransparent and extends throughout the majority of the side wall 86.

The present invention may be modified from the embodiments illustrated and described above. The common mold parts may be cavity mold parts instead of core mold parts, as illustrated and described herein. In addition, injections of plastic material into any given mold cavity may be made through more than one gate. Also, injections of plastic materials may be made into more than two mold cavities simultaneously, whereby the number of mold cavities included in the mold may be a multiple of the number of separate mold cavities required to produce a single product. For example, when using the method described and illustrated herein for producing a product composed of two plastic material components formed following injection of plastic material into two separate mold cavities, the number of mold cavities included in the mold may be any multiple of two, i.e. 2, 4, 6, etc.

The present invention also can be used to mold products including more than two plastic material components formed following injection of plastic material into more than two separate mold cavities. In an embodiment requiring three separate mold cavities, a third complementary mold part is used, and the fused first and second plastic material components are retained on

FW 011



9

the first common mold part when the first common mold part is combined with the third complementary mold part to assemble the third mold cavity, with the fused first and second mold parts being shaped to stabilize the common mold in relation to the third complementary mold part during injection of a third plastic material into the third mold cavity.

The core-stabilization techniques described in applicant's U.S. Pat. Nos. 4,381,275 and 4,508,676; U.S. Pat. No. 3,737,272 to Stegmüller; and in Australian Patent Specification 17,577/70 filed by Ryles and published Jan. 20, 1972 may be used to stabilize the common mold part in relation to the first complementary mold part during the injection of the first plastic material in lieu of the technique described above with relation to FIGS. 1A and 1B.

The first and second plastic materials may be either the same material or different materials. It is sometimes advantageous to use first and second plastic materials having different physical characteristics. For example, the present invention is ideally suited for molding a hollow, thin-walled plastic product in which the side wall must provide both a moisture barrier and a gas (such as Oxygen) barrier. To mold such a product, a plastic material having a desirable moisture-barrier characteristic is selected as one of the injected plastic materials; and a plastic material having a desirable gas-barrier characteristic is selected as the other injected plastic material.

I claim:

1. A method of cyclic injection molding a thin-walled hollow, plastic product having a closed end and an open end with laminated walls terminating in a rim at the open end, utilizing a first mold cavity and a second mold cavity, the first mold cavity being defined by a first common mold part and a first complementary mold part, and the second mold cavity being defined by the first common mold part and a second complementary mold part, the method comprising the steps of

- (a) combining the first common mold part with the first complementary mold part to assemble the first mold cavity;
  - (b) injecting a first plastic material into the first mold cavity;
  - (c) solidifying the injected first plastic material to form a first plastic material component;
  - (d) combining the first common mold part with the second complementary mold part to assemble the second mold cavity with the first plastic material component attached to the first common mold part so that when the second mold cavity is assembled the first plastic material component is contained within the second mold cavity;
  - (e) injecting a second plastic material having different characteristics than the first plastic material into the second mold cavity while the first plastic material component is contained therein; and
  - (f) solidifying the injected second plastic material so as to form a second plastic material component that fuses with the first plastic material component to produce a hollow plastic product;
- wherein step (c) comprises the step of
- (g) shaping the first plastic material component such that when the first plastic material component is so contained in the second mold cavity the first plastic material component provides one or more stabilizing regions that rigidly secure the first common mold part in position in relation to the second com-

4,935,184

10

plementary mold part in order to impede movement of the first common mold part in relation to the second complementary mold part during step (e), to thereby produce a thin-walled plastic product having controlled dimensions;

wherein step (b) comprises the step of

- (h) injecting the first plastic material until it reaches the portion of the first mold cavity that defines the rim of the product; and

wherein step (e) comprises the step of

- (i) injecting the second plastic material until it reaches the portion of the second mold cavity that defines the rim of the product.

2. A method according to claim 1 for molding a product having a side wall including an approximately longitudinal strip, wherein step (g) comprises shaping the first plastic material component to provide at least one said stabilizing region that is transverse to a parting line between the first common mold part and the first complementary mold part, whereby said longitudinal strip is defined by said transverse stabilizing region.

3. A method according to claim 2,

wherein step (b) comprises injecting a said first plastic material that is transparent, whereby said strip defines a transparent window in the side wall; and wherein step (e) comprises injecting a said second plastic material that is nontransparent.

4. A method according to claim 1 for molding a product having a side wall including an approximately longitudinal strip, wherein step (g) comprises shaping the first plastic material component such that when the first plastic material component is contained in the second mold cavity, the second mold cavity defines at least one unfilled cavity region that is transverse to a parting line between the first common mold part and the second complementary mold part, whereby said longitudinal strip is defined by said unfilled transverse cavity region.

5. A method according to claim 4,

wherein step (b) comprises injecting a said first plastic material that is nontransparent; and wherein step (e) comprises injecting a said second plastic material that is transparent, whereby said strip defines a transparent window in the side wall.

6. A method according to claim 1, for cyclic injection molding a plurality of thin-walled, hollow, plastic products, further utilizing a third mold cavity and a fourth mold cavity, the third mold cavity being defined by a second common mold part and the first complementary mold part, and the fourth mold cavity being defined by the second common mold part and the second complementary mold part, the method further comprising the steps of:

- (h) during step (d), combining the second common mold part with the first complementary mold part to assemble the third mold cavity;
- (i) during step (e), injecting a third plastic material into the third mold cavity;
- (j) during step (f), solidifying the injected third plastic material to form a third plastic material component;
- (k) during step (a), combining the second common mold part with the second complementary mold part to assemble the fourth mold cavity with the third plastic material attached to the second common mold part so that when the fourth mold cavity is assembled the third plastic material is contained within the fourth mold cavity;

FW 012

4,935,184

11

(l) during step (b), injecting the fourth plastic material into the fourth mold cavity while the solidified third plastic material is contained therein; and  
 (m) during step (c), solidifying the injected fourth plastic material so as to form a fourth plastic material component that fuses with the third plastic material to produce a second hollow plastic product;

wherein step (j) comprises the step of

(n) shaping the third plastic material component such that when the third plastic material component is so contained in the fourth mold cavity the third plastic material component provides one or more stabilizing regions that rigidly secure the second common mold part in position in relation to the second complementary mold part in order to impede movement of the second common mold part in relation to the second complementary mold part during step (l), to thereby produce a second thin-walled plastic product having controlled dimensions.

7. A method according to claim 6, for producing said products having laminated walls,

wherein step (b) comprises the step of

(o) injecting the first plastic material until it reaches the parting line between the first common mold part and the first complementary mold part;

wherein step (c) comprises the step of

(p) injecting the second plastic material until it reaches the parting line between the first common mold part and the second complementary mold part;

12

wherein step (l) comprises the step of

(q) injecting the third plastic material until it reaches the parting line between the second common mold part and the first complementary mold part; and

wherein step (l) comprises the step of

(r) injecting the fourth plastic material until it reaches the parting line between the second common mold part and the second complementary mold part.

8. A method according to claim 6, wherein the first plastic material is the same as the third plastic material and the second plastic material is the same as the fourth plastic material.

9. A method according to claim 1, wherein step (g) further comprises providing a said first complementary mold part that is dimensioned in relation to the first common mold part such that when so combined with the first common mold part to assemble the first mold cavity, portions of the first complementary mold part contact portions of the first common mold part to rigidly secure the first common mold part in position in relation to the first complementary mold part in order to impede movement of the first common mold part in relation to the first complementary mold part during step (b).

10. A method according to claim 1, further comprising the step of

(j) between steps (c) and (d), separating said first common mold part with the first plastic material component attached thereto from said first complementary mold part without dividing that portion of said first complementary mold part that defines the rim of the product.

\* \* \* \* \*

FW 013



## **EXHIBIT B**

# RIO FORCE SPORT MP3 PLAYER

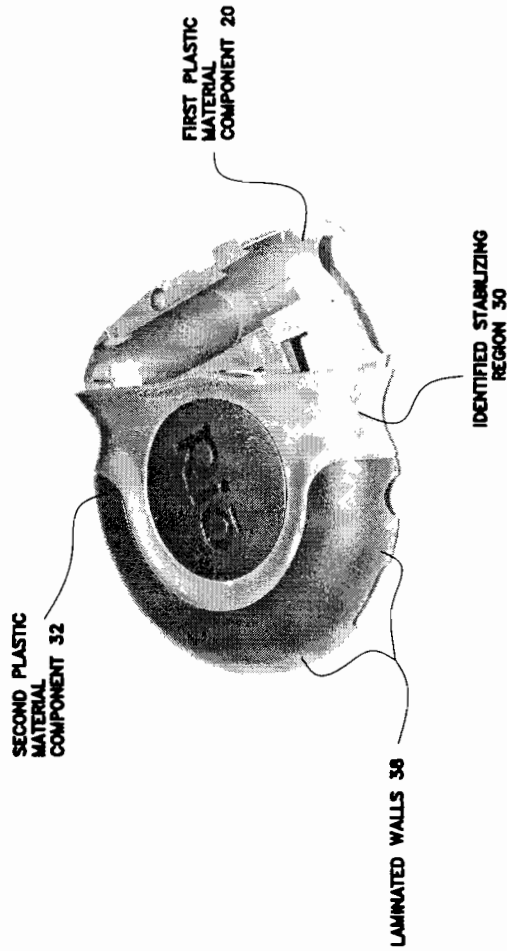


FIG. 1

FIG. 3

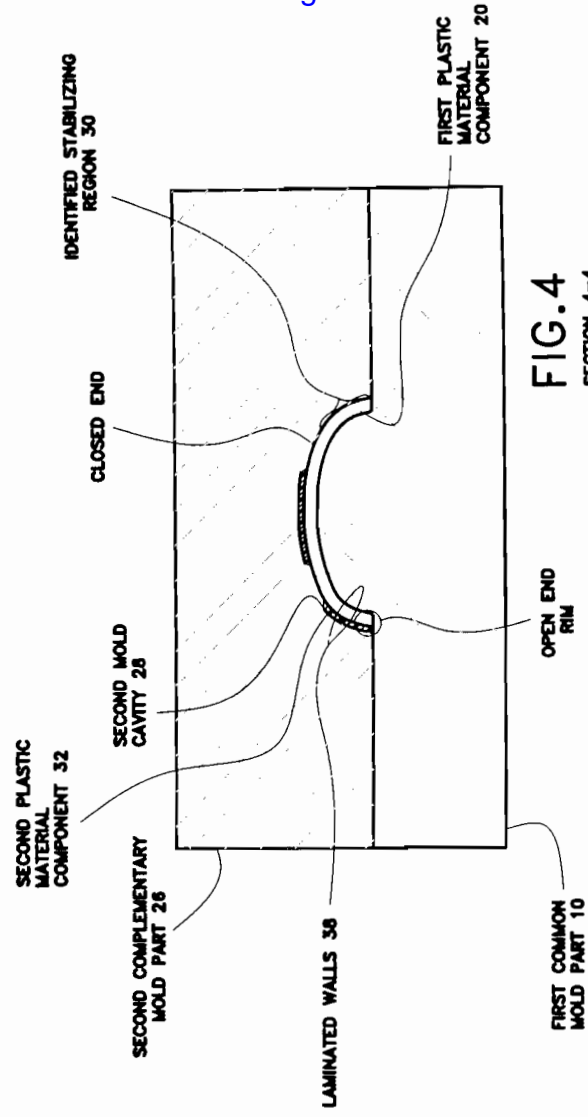
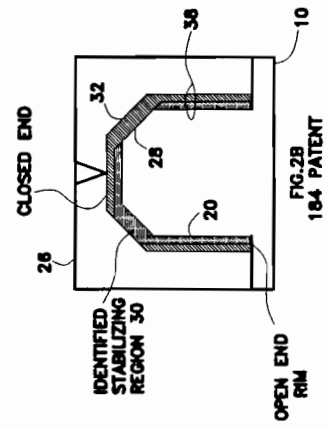


FIG. 4

SECTION 4-4

SRD TRUST

UNITED STATES PATENT NO. 4,935,184  
RIO FORCE SPORT MP3 PLAYER

NOT TO SCALE  
D-5438

## **EXHIBIT C**

**U.S. PATENT NO. 4,935,184**  
**Digital Networks North America, Inc.**  
**RIO Forge Sport MP3 Player ("Accused Product")**  
**Claim Chart for SRD Trust Drawing No. D-5438**

<b>CLAIM 1 -- '184 PATENT</b>	<b>REMARK</b>	<b>REM. NO.</b>	<b>REF. FIGURE</b>
A method of cyclic injection molding a thin-walled hollow, plastic product	<i>The Accused Product is a thin-walled hollow, plastic product and has been molded by cyclic injection molding.</i>	1	Figs. 1 and 3
having a closed end	<i>A closed end of the Accused Product is identified.</i>	2	Fig. 4
and an open end	<i>An open end of the Accused Product is identified.</i>	3	Fig. 4
with laminated walls	<i>Laminated walls (38) of the Accused Product are identified.</i>	4	Figs. 3 and 4
terminating in a rim at the open end,	<i>Laminated walls (38) of the Accused Product terminate in an identified rim at the open end.</i>	5	Fig. 4
utilizing a first mold cavity and	<i>The Accused Product is molded utilizing a first mold cavity.</i>	6	
a second mold cavity,	<i>The Accused Product is molded utilizing a second mold cavity (28).</i>	7	Fig. 4
the first mold cavity being defined by a first common mold part and a first complementary mold part,	<i>The first mold cavity utilized in molding the Accused Product is formed of a first common mold part (10) and a first complementary mold part.</i>	8	
and the second mold cavity being defined by the first common mold part and a second complementary mold part	<i>The second mold cavity (28) utilized in molding the Accused Product is formed of a first common mold part (10) and a second complementary mold part (26).</i>	9	Fig. 4
////////////////////////////////////			
the method comprising the steps of			

CLAIM 1 -- '184 PATENT	REMARK	REM. NO.	REF. FIGURE
////////////////////////////////////			
(a) combining the first common mold part with the first complementary mold part to assemble the first mold cavity;	<i>(a) The first common mold part (10) and the first complementary mold part are combined to assemble the first mold cavity.</i>	11	
(b) injecting a first plastic material into the first mold cavity;	<i>(b) A first plastic material (gray) is injected into the first mold cavity of the Accused Product.</i>	12	
(c) solidifying the injected first plastic material;	<i>(c) The injected first plastic material (gray) is solidified.</i>	13	
to form a first plastic material component	<i>The solidified first plastic material (gray) forms a first plastic material component (20) of the Accused Product.</i>	14	Figs. 3 and 4
(d) combining the first common mold part with the second complementary mold part to assemble the second mold cavity	<i>(d) The first common mold part (10) and the second complementary mold part (26) are combined to assemble the second mold cavity (28) of the Accused Product.</i>	15	Fig. 4
with the first plastic material component attached to the first common mold part so that when the second mold cavity is assembled	<i>The first plastic material component (20) of the Accused Product is attached to the first common mold part (10) during assembly of the second mold cavity (28).</i>	16	Fig. 4
the first plastic material component is contained within the second mold cavity;	<i>The first plastic material component (20) of the Accused Product is contained within the second mold cavity (28).</i>	17	Fig. 4
(e) injecting a second plastic material having different characteristics than the first plastic material into the second mold cavity	<i>(e) In production of the Accused Product, a second plastic material (black) having different characteristics than the first plastic material (gray) is injected into the second mold cavity (28).</i>	18	Figs. 3 and 4
while the first plastic material component is contained therein; and	<i>During injection of the second plastic material (black), the first plastic material component (20) of the Accused Product is contained within the second mold cavity (28).</i>	19	Fig. 4

CLAIM 1 -- '184 PATENT	REMARK	REM. NO.	REF. FIGURE
(f) solidifying the injected second plastic material so as to form a second plastic material component that fuses with the first plastic material component to produce a hollow plastic product;	<i>(f) After the second plastic material (black) of the Accused Product is injected, it solidifies to form a second plastic material component (32) of the Accused Product.</i>	20	Figs. 3 and 4
fuses with the first plastic material component to produce a hollow plastic product;	<i>The second plastic material component (32) fuses with the first plastic material component (20) to produce the Accused Product.</i>	21	Figs. 3 and 4
wherein step (c) comprises the step of			
(g) shaping the first plastic material component such that when the first plastic material component is so contained in the second mold cavity the first plastic material component provides one or more stabilizing regions that rigidly secure the first common mold part in position in relation to the second complementary mold part	<i>(g) The first plastic material component (20) has one or more identified stabilizing region(s) (30), that rigidly secure the first common mold part (10), in position in relation to the second complementary mold part (26).</i>	22	Figs. 3 and 4
in order to impede movement of the first common mold part in relation to the second complementary mold part during step (e),	<i>The identified stabilizing region(s) (30) of the first plastic material component (20) impede movement of the first common mold part (10) in relation to the second complementary mold part (26) that would otherwise result from the injection pressure of the second plastic material (black) during injection into the second mold cavity (28).</i>	23	Figs. 3 and 4
to thereby produce a thin-walled plastic product having controlled dimensions;	<i>The stabilization during the injection of the second plastic material (black) allows the thin-walled plastic product, the Accused Product, to be produced with controlled dimensions.</i>	24	Figs. 1 3 and 4



CLAIM 1 -- '184 PATENT	REMARK	REM. NO.	REF. FIGURE
wherein step (b) comprises the step of			
(h) injecting the first plastic material until it reaches the portion of the first mold cavity that defines the rim of the product; and	<i>The first plastic material (gray) of the Accused Product reaches a rim of the Accused Product.</i>	25	Fig. 4
wherein step (e) comprises the step of			
(i) injecting the second plastic material until it reaches the portion of the second mold cavity that defines the rim of the product.	<i>The second plastic material (black) of the Accused Product reaches a rim of the Accused Product.</i>	26	Fig. 4