

FILED

CONFORM

1 Terry T. Tsai (SBN 277495)
ttsai@steptoe.com
2 STEPTOE & JOHNSON LLP
2121 Avenue of the Stars, Suite 2800
3 Los Angeles, CA 90067-5052
4 Telephone: (310) 734-3200
Facsimile:(310) 734-3300

2012 OCT -3 PM 4: 15

CLERK U.S. DISTRICT COURT
CENTRAL DIST. OF CALIF.
LOS ANGELES

BY: _____

5 Thomas G. Pasternak (*admitted pro hac vice*)
6 tpasternak@steptoe.com
7 STEPTOE & JOHNSON LLP
115 South La Salle Street, Suite 3100
8 Chicago, IL 60603
Telephone: (312) 577-1300
9 Facsimile: (312) 577-1370

10 John Caracappa (*admitted pro hac vice*)
11 jcaracappa@steptoe.com
12 STEPTOE & JOHNSON LLP
1330 Connecticut Avenue, NW
13 Washington, DC 20036
Telephone: (202) 429-3000
14 Facsimile: (202) 429-3902

15 Attorneys for Plaintiff, American Radio

16
17 **UNITED STATES DISTRICT COURT**
18 **CENTRAL DISTRICT OF CALIFORNIA**

19 **SACV12-01709-DOC(RNBx)**

20 AMERICAN RADIO LLC,
21 Plaintiff,
22 vs.
23 BROADCOM CORPORATION,
24 Defendant.

Case No.:

**COMPLAINT FOR PATENT
INFRINGEMENT**

JURY TRIAL DEMANDED

25
26
27
28
COMPLAINT FOR PATENT INFRINGEMENT

1 Plaintiff American Radio LLC (“American Radio”), by its attorneys, files
2 this Complaint against defendant Broadcom Corporation (“Broadcom”) as follows:

3 **PARTIES**

4 1. Plaintiff American Radio is a limited liability corporation organized
5 under the laws of California with its principal place of business at 1007 Goldeneye
6 View, Carlsbad, CA 92011. American Radio is the assignee of all right, title, and
7 interest in and to the ‘334 Patent, U.S. Patent No. 8,280,334.

8 2. On information and belief, defendant Broadcom is a Delaware
9 corporation with its principal place of business at 5300 California Avenue, Irving,
10 California 92617.

11 **JURISDICTION**

12 3. This is an action arising under the patent laws of the United States,
13 Title 35 of the United States Code. This Court has subject matter jurisdiction
14 under 28 U.S.C. §§ 1331 and 1338(a).

15 4. Broadcom, directly and/or through intermediaries or established
16 distribution channels (including distributors, online retailers, and others), ships,
17 distributes, offers for sale, sells, provides instructions on how to use, and/or
18 advertises its products in or into the United States, the State of California, and this
19 District. Broadcom has purposefully and voluntarily placed one or more of its
20 infringing products into the stream of commerce with the expectation that they will
21 be purchased by customers within this District. These infringing products have
22 been, and continue to be, purchased by customers within this District.

23 5. Broadcom derives substantial revenue from the sale of infringing
24 products distributed within this District, and/or expects or should reasonably
25 expect its actions to have consequences within this District, and derives substantial
26 revenue from interstate and international commerce.

27 6. In addition, Broadcom actively induces infringement and contributes
28 to infringement within this District by contracting with others to market and sell

1 infringing products with the knowledge and intention of facilitating infringing
2 sales of the infringing products by others within this District.

3 7. Broadcom has a significant presence in this district by virtue of its
4 corporate headquarters.

5 8. For these reasons this Court has personal jurisdiction over Broadcom.

6 **VENUE**

7 9. Venue is proper in this judicial district under 28 U.S.C. §§ 1391(b),
8 (c) and (d) and 1400(b) because this is an action for patent infringement, and
9 Broadcom resides in this State. Moreover, venue is proper because this State and
10 District has personal jurisdiction over Broadcom.

11 **'334 PATENT**

12 10. United States Patent No. 8,280,334 (“the ‘334 Patent”), entitled
13 “System And Method For Radio Signal Reconstruction Using Signal Processor,”
14 was duly and legally issued by the United States Patent and Trademark Office on
15 October 2, 2012. A true and correct copy of the ‘334 Patent is attached hereto as
16 Exhibit A and is incorporated herein by reference.

17 11. American Radio is the owner of all right, title and interest in and to
18 the ‘334 Patent and is entitled to sue for past and future infringement and recover
19 damages.

20 **DIRECT INFRINGEMENT OF U.S. PATENT NO. 8,280,334**

21 12. American Radio repeats and realleges the allegations in paragraphs 1-
22 11, inclusive.

23 13. Broadcom has directly infringed, and is continuing to directly
24 infringe, one or more of the ‘334 Patent claims, including but not limited to claim
25 1, by making, using, selling, offering for sale, and/or importing at least the
26 following products and any similar products and related technology: Broadcom
27 part no. BCM3138, BCM3140, BCM3419, BCM3510; cable TV receiver, tuner,
28 and demodulator; products described or marketed by Broadcom as using or

1 supporting the “low IF” or “low IF direct conversion” technology; and any
2 products incorporating any of the aforementioned devices.

3 14. Broadcom is liable for its infringement of the ‘334 Patent pursuant to
4 35 U.S.C. § 271.

5 15. Broadcom’s direct infringement of the ‘334 Patent is damaging
6 American Radio.

7 16. Broadcom’s direct infringement of the ‘334 Patent will continue to
8 cause American Radio irreparable harm unless enjoined by the Court. American
9 Radio has no adequate remedy at law. American Radio’s damages from the
10 infringing activities of Broadcom are not yet determined.

11
12 WHEREFORE, American Radio LLC, respectfully requests that this Court
13 enter judgment in its favor against Broadcom and grant the following relief:

14 A. Enter a judgment that Broadcom is directly infringing the ‘334 Patent;

15 B. Enter an order preliminarily and permanently enjoining Broadcom, its
16 officers, directors, agents, servants, employees and all other persons in privity or
17 acting in concert with them who receive actual notice of the order by personal
18 service or otherwise, from any further acts of infringement of the ‘334 Patent;

19 C. Award American Radio damages in the amount adequate to
20 compensate American Radio for Broadcom’s infringement of the ‘334 Patent;

21 D. Enter an order trebling any and all damages awarded to American
22 Radio by reason of Broadcom’s infringement of the ‘334 Patent, pursuant to 35
23 U.S.C. § 284;

24 E. Enter an order awarding American Radio interest on damages
25 awarded and its costs pursuant to 35 U.S.C. § 284;

26 F. Enter an order finding that this is an exceptional case and awarding
27 American Radio its reasonable attorneys’ fees pursuant to 35 U.S.C. § 285; and
28


1 G. Award American Radio such other relief as the Court may deem
2 appropriate and just under the circumstances.

3
4 **JURY DEMAND**

5 Plaintiff American Radio LLC respectfully demands trial by jury of all
6 matters triable to a jury.

7
8 Dated: October 3, 2012

STEPTOE & JOHNSON LLP

9
10 By:  _____

11 Terry T. Tsai (SBN 277495)
12 ttsai@steptoe.com
13 STEPTOE & JOHNSON LLP
14 2121 Avenue of the Stars, Suite 2800
15 Los Angeles, CA 90067-5052
16 Telephone: (310) 734-3200
17 Facsimile:(310) 734-3300

18 Thomas G. Pasternak (*admitted pro hac*
19 *vice*)
20 tpasternak@steptoe.com
21 STEPTOE & JOHNSON LLP
22 115 South La Salle Street, Suite 3100
23 Chicago, IL 60603
24 Telephone: (312) 577-1300
25 Facsimile: (312) 577-1370

26 John Caracappa (*admitted pro hac vice*)
27 jcaracappa@steptoe.com
28 STEPTOE & JOHNSON LLP
1330 Connecticut Avenue, NW
Washington, DC 20036
Telephone: (202) 429-3000
Facsimile: (202) 429-3902

Attorneys American Radio LLC

EXHIBIT A



US008280334B2

(12) **United States Patent**
Hotto

(10) **Patent No.:** **US 8,280,334 B2**
(45) **Date of Patent:** ***Oct. 2, 2012**

(54) **SYSTEM AND METHOD FOR RADIO SIGNAL RECONSTRUCTION USING SIGNAL PROCESSOR**

continuation of application No. 08/596,551, filed on Feb. 5, 1996, now Pat. No. 5,864,754.

(75) Inventor: **Robert Hotto**, Carlsbad, CA (US)

(51) **Int. Cl.**
H04B 1/18 (2006.01)

(73) Assignee: **American Radio LLC**, Carlsbad, CA (US)

(52) **U.S. Cl.** **455/289; 455/295; 455/296; 455/303; 455/307**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(58) **Field of Classification Search** None
See application file for complete search history.

This patent is subject to a terminal disclaimer.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,230,011 A * 7/1993 Gielis et al. 455/324 X
5,375,146 A * 12/1994 Chalmers 375/350

OTHER PUBLICATIONS

American Radio LLC vs. Qualcomm Incorporated, Compliant for Patent Infringement filed Jul. 6, 2012.
American Radio LLC vs. Intel Corporation, Complaint for Patent Infringement filed Jul. 6, 2012.
American Radio LLC vs. Cisco Systems Incorporated, Complaint for Patent Infringement filed Jul. 6, 2012.
American Radio LLC vs. Broadcom Corporation, Complaint for Patent Infringement filed Jul. 6, 2012.

(21) Appl. No.: **13/420,783**

(22) Filed: **Mar. 15, 2012**

(65) **Prior Publication Data**
US 2012/0178396 A1 Jul. 12, 2012

Related U.S. Application Data

(63) Continuation of application No. 12/964,215, filed on Dec. 9, 2010, now Pat. No. 8,170,519, which is a continuation of application No. 12/702,498, filed on Feb. 9, 2010, now Pat. No. 8,045,942, which is a continuation of application No. 11/928,585, filed on Dec. 10, 2007, now Pat. No. 7,831,233, which is a continuation of application No. 11/068,585, filed on Apr. 13, 2005, now Pat. No. 7,433,664, which is a continuation of application No. 10/255,438, filed on Sep. 26, 2002, now Pat. No. 7,043,219, which is a continuation of application No. 09/771,821, filed on Jan. 29, 2001, now Pat. No. 6,577,854, which is a continuation of application No. 09/178,229, filed on Oct. 23, 1998, now Pat. No. 6,236,845, which is a


* cited by examiner

Primary Examiner — Philip Sobutka
(74) *Attorney, Agent, or Firm* — John L. Rogitz

(57) **ABSTRACT**

A waveform reconstruction circuit receives an rf signal from an antenna, digitizes it, and then generates an undistorted reconstructed waveform. The reconstructed waveform can then be conventionally mixed and demodulated to extract useful signal information with enhanced receiver fidelity and sensitivity.

35 Claims, 3 Drawing Sheets

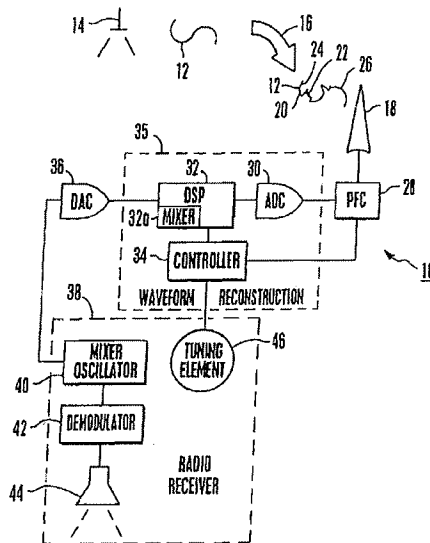

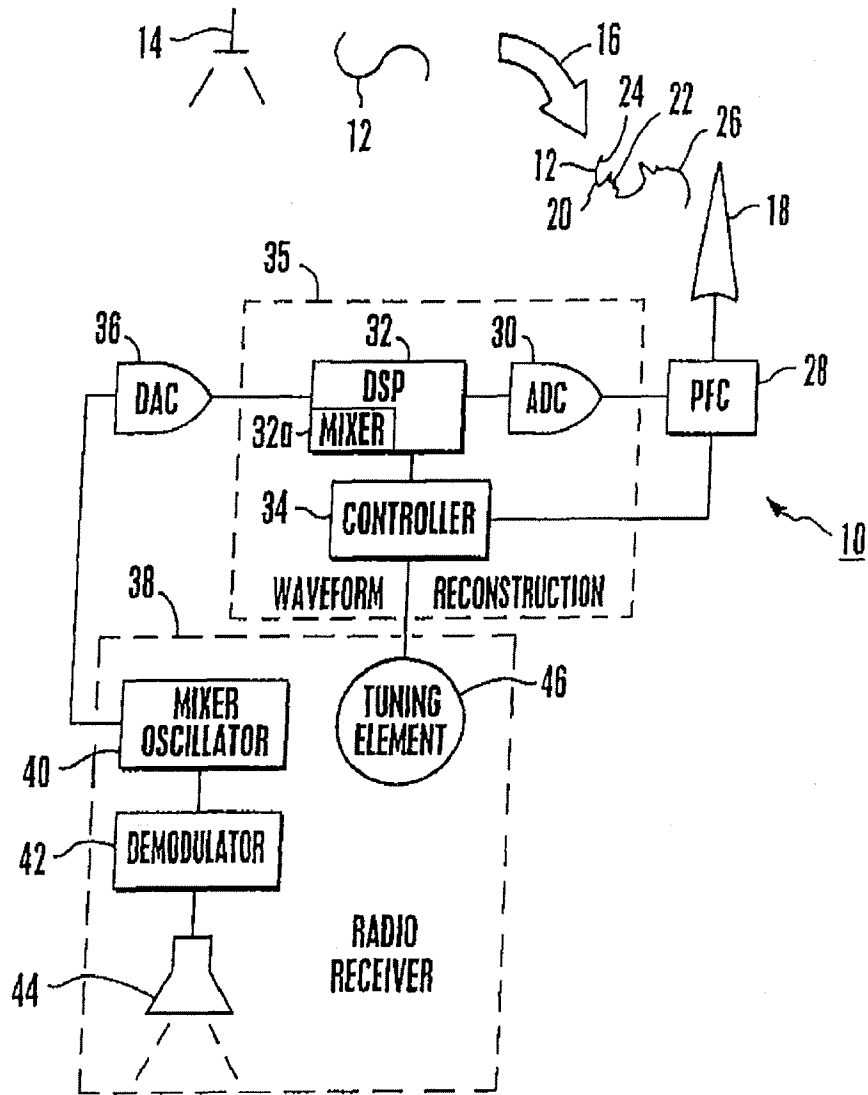


Fig. 1

Fig. 2


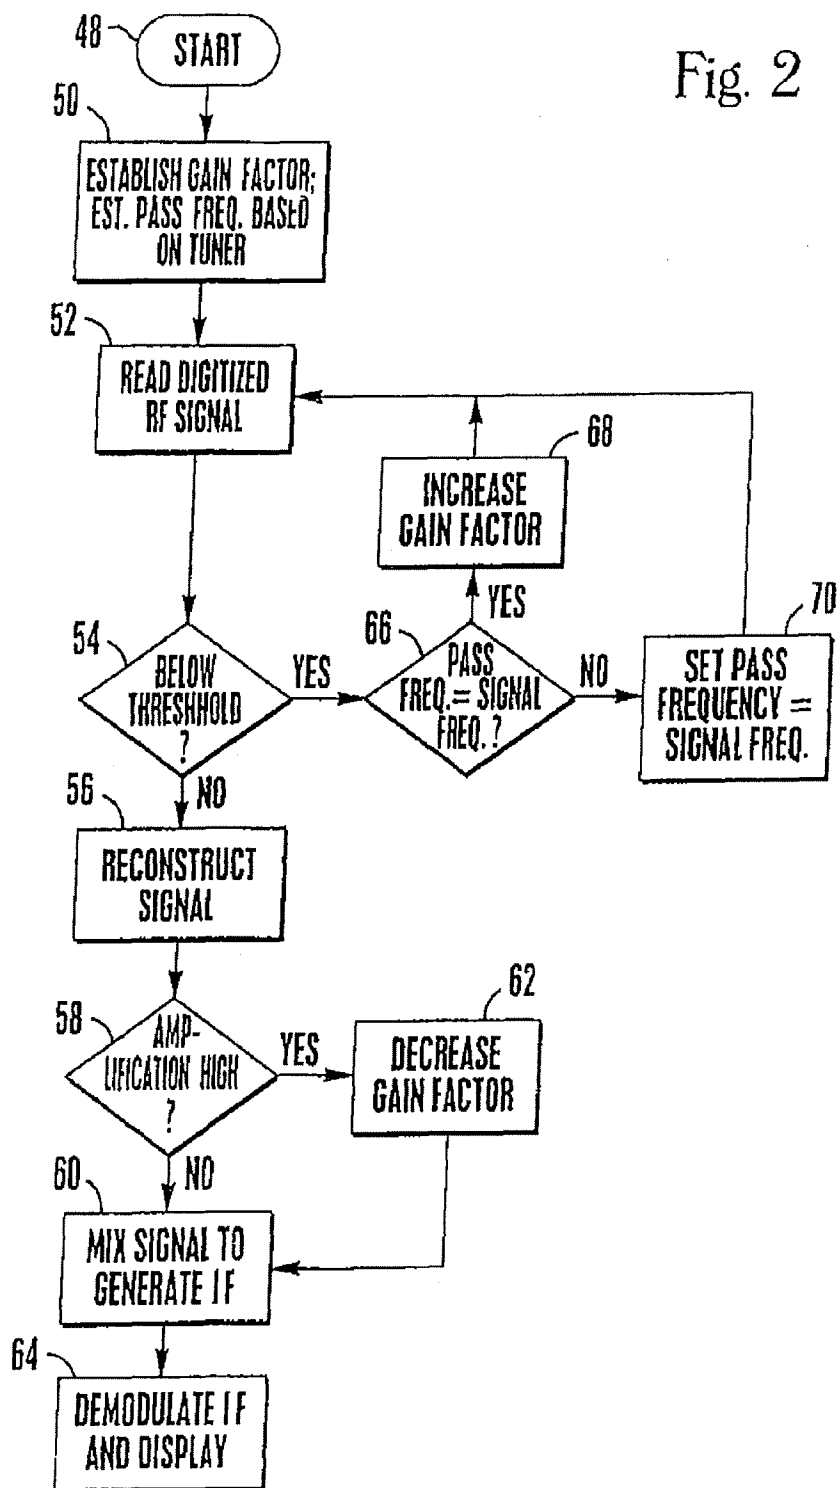


Fig. 3

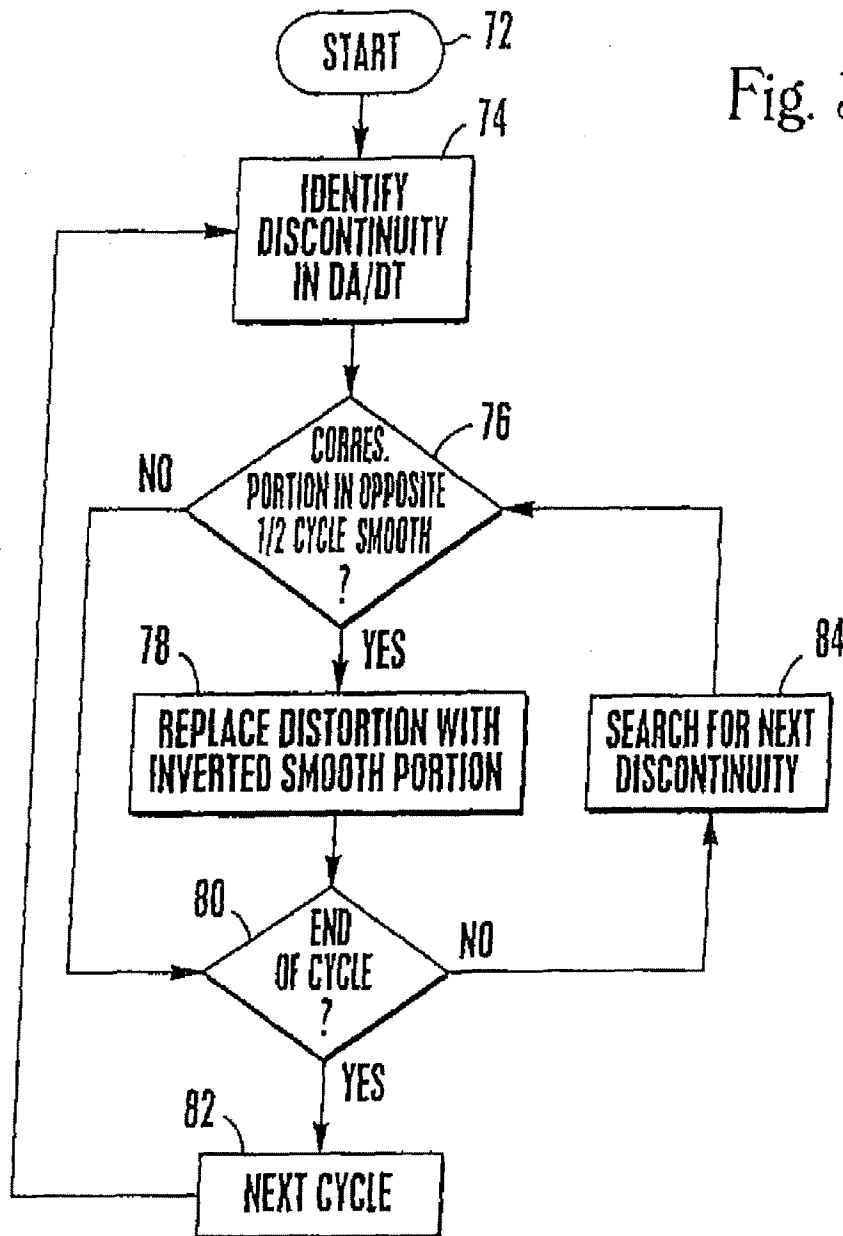

US 8,280,334 B2

1

SYSTEM AND METHOD FOR RADIO SIGNAL RECONSTRUCTION USING SIGNAL PROCESSOR

This application is a continuation of U.S. patent application Ser. No. 12/964,215, filed Dec. 9, 2010 now U.S. Pat. No. 8,170,519, which is a continuation of Ser. No. 12/702,498, filed Feb. 9, 2010 now U.S. Pat. No. 8,045,942, which is a continuation of U.S. patent application Ser. No. 11/928,585, filed Dec. 10, 2007, now U.S. Pat. No. 7,831,233, which is a continuation of U.S. patent application Ser. No. 11/068,585, filed Apr. 13, 2005, now U.S. Pat. No. 7,433,664, which is a continuation of U.S. patent application Ser. No. 10/255,438 filed Sep. 26, 2002, now U.S. Pat. No. 7,043,219, which is a continuation of Ser. No. 09/771,821, now U.S. Pat. No. 6,577,854, filed Jan. 29, 2001, which in turn is a continuation of Ser. No. 09/178,229, now U.S. Pat. No. 6,236,845, filed Oct. 23, 1998, which in turn is a continuation of Ser. No. 08/596,551, now U.S. Pat. No. 5,864,754, filed Feb. 5, 1996 all of which are incorporated by reference and priority from all of which is hereby claimed.

FIELD OF THE INVENTION

The present invention relates generally to radio signal processing, and more particularly to systems and methods for reducing distortion in rf signals and thus enhancing the fidelity and sensitivity of radio receivers.

BACKGROUND

Conventional radio receivers function by receiving an rf signal and preamplifying it, and then processing the signal using a superheterodyne structure. The superheterodyne structure, in its simplest configuration, includes a mixer oscillator which mixes the received signal down to an intermediate frequency (IF) signal. The IF signal is then sent through a bandpass filter and demodulated by an envelope detector to recover the information (colloquially referred to as "baseband") that is carried by the received rf signal.

Of importance to the present invention is the fact that rf signals are corrupted by environmental factors during transmission. Conventional superheterodyne structures attempt to correct for signal corruption by suppressing corruption-induced noise using filtering techniques. Unfortunately, such conventional filtering, whether using analog or digital techniques, suppresses both noise and useful signal, thereby reducing the fidelity of the receiver. In other words, although filtering improves the ratio between useful signal and noise (referred to as the signal-to-noise ratio, SNR), it typically reduces system fidelity and signal strength.

Further, during demodulation, the envelope detector of a conventional superheterodyne structure effectively demodulates only one-half cycle, for example, the positive half cycle, of the IF signal. Only one half of the signal need be used, since the information attached to the positive half cycle during transmission is identical to the information attached to the negative half cycle during transmission. Accordingly, the negative half of each cycle of the received rf signal is discarded by the envelope detector, and replaced with a mirror image of the positive half.

It happens, however, that either one of the positive or negative half of a cycle can be distorted asymmetrically from the other half. Consequently, in instances wherein the negative half of a cycle is relatively uncorrupted, but the positive half cycle is corrupted, the opportunity to use the "best" half of a cycle is lost. Thus, the portion of a corrupted IF signal that

2

is ultimately demodulated and output by the envelope detector statistically can be expected to be the corrupt half 50% of the time.

In light of the above discussion as recognized by the present invention, it would be advantageous to analyze both the positive and negative halves of an rf signal cycle and determine which half is the "best" half, and then extract the useful signal from this "best" half. As further recognized by the present invention, it would be advantageous to accomplish such analysis prior to the non-linear transformation of the rf signal to the IF signal during mixing by the oscillator. Stated differently, it would be advantageous to accomplish such analysis prior to mixing, since the mixing function causes certain data in the signal to be irrecoverable and therefore precludes identification of some distortion and corruption in the "true" signal post-mixing. As still further recognized by the present invention, it would be advantageous to adjust signal gain and tuning "on the fly" to account for transmitter frequency drift and for sometimes constantly changing received signal strength at the antenna.

Accordingly, it is an object of the present invention to provide a system and method for reconstructing a radio signal prior to mixing and demodulating the signal. Another object of the present invention is to provide a system and method for reconstructing a radio signal to improve the extraction of useful portions of the originally transmitted signal that had been corrupted. Yet another object of the present invention is to provide a system and method for reconstructing a radio signal which adjusts signal gain and tuning from the antenna on the fly. Still another object of the present invention is to provide a system and method for reconstructing a radio signal which is easy to use and cost-effective.

SUMMARY OF THE INVENTION

An electromagnetic waveform reconstruction device includes an analog to digital converter (ADC) that is electrically connectable to an antenna for receiving an analog electromagnetic signal therefrom and digitizing the signal. The ADC outputs the digitized electromagnetic signal to a digital signal processor (DSP), which in turn outputs a reconstructed electromagnetic signal in accordance with a predetermined reconstruction paradigm. As more fully discussed herein, the DSP is electrically associable with a mixer circuit for sending the reconstructed electromagnetic signal thereto for mixing and demodulating the signal.

Preferably, the electromagnetic signal is an rf signal, and the device further includes a digital to analog converter (DAC) for converting the reconstructed rf signal to an analog reconstructed rf signal, prior to sending the reconstructed rf signal to the mixer circuit. Alternatively, the DSP digitally mixes the reconstructed rf signal and outputs an intermediate frequency (IF) signal to a demodulator.

As envisioned by the preferred embodiment, the DSP includes reconstruction means for effecting method steps to implement the predetermined reconstruction paradigm. In accordance with the present invention, the method steps include receiving both a positive half and a negative half of the digitized rf signal, and then analyzing the positive and negative halves to identify distorted portions and undistorted portions thereof. At least some of the distorted portions are removed and replaced with respective replacement portions. Thereby, the reconstructed rf signal is produced, with each replacement portion being based on at least some of the undistorted portions.

In one presently preferred embodiment, a controller is electrically connected to the DSP. Also, a preamplifier filter cir-

US 8,280,334 B2

3

cuit (PFC) is electrically connectable to the antenna and to the ADC for amplifying and filtering the analog rf signal from the antenna prior to sending the analog rf signal to the ADC. Moreover, the PFC is also electrically connected to the controller. Advantageously, the PFC includes a frequency band-
pass filter for attenuating signals having a frequency not equal
to a pass frequency, and the controller dynamically estab-
lishes the pass frequency.

Furthermore, in the presently preferred embodiment, the PFC includes an amplifier for increasing, by a gain factor, the
amplitude of signals having the pass frequency. As intended
by the preferred embodiment, the controller establishes the
gain factor. To this end, the DSP outputs a gain adjust signal
to the controller when the rf signal input to the DSP is char-
acterized by an amplitude outside of a predetermined ampli-
tude range. Stated somewhat differently, the DSP generates
the gain adjust signal when its input signal is characterized by
distortions due to a weak or clipped signal, and the DSP
generates the gain adjust signal by determining information
content of the signal. In response to the gain adjust signal,
and the controller dynamically establishes the gain factor based
on the gain adjust signal. If desired, the device of the present
invention can be combined with an electromagnetic signal
transmitter.

In another aspect of the present invention, an rf receiver
includes an antenna and a signal reconstruction circuit elec-
trically connected to the antenna. Accordingly, the signal
reconstruction circuit receives an analog rf signal from the
antenna. Per the principles of the present invention, the signal
reconstruction circuit generates a substantially undistorted
reconstructed waveform. A mixer circuit is electrically asso-
ciated with the signal reconstruction circuit for generating an
intermediate frequency (IF) signal based on the reconstructed
waveform, and a demodulator decodes useful information
from the IF signal.

In yet another aspect, a computer-implemented method is
disclosed for processing a transmitted electromagnetic signal
to extract useful information from the signal. The present
method includes receiving the electromagnetic signal and
reconstructing it in accordance with a predetermined recon-
struction paradigm, and then, after reconstruction, mixing
and demodulating the electromagnetic signal to extract useful
information therefrom.

In still another aspect, a computer program device includes
a computer program storage device which is readable by a
digital processing system. A program means is provided on
the program storage device, and the program means includes
instructions that are executable by the digital processing sys-
tem for performing method steps for reconstructing an rf
signal prior to mixing and demodulating the rf signal. The
method steps advantageously include receiving both a posi-
tive half and a negative half of the rf signal, and analyzing the
positive and negative halves to identify distorted portions and
undistorted portions thereof. The method steps further
include removing at least some of the distorted portions and
replacing each with a respective replacement portion to
thereby produce a reconstructed rf signal, with each replace-
ment portion being based on at least some of the undistorted
portions.

In another aspect of the present invention, a device is dis-
closed for dynamically preamplifying and filtering an rf sig-
nal from an antenna, prior to mixing and demodulating the
signal to extract useful information from it. The device
includes a controller and a preamplifier filter circuit (PFC)
electrically connectable to the antenna and in electrical com-
munication with the controller for amplifying and filtering the
rf signal. Per the present invention, the PFC includes a fre-

4

quency bandpass filter for attenuating signals having a fre-
quency not equal to a pass frequency. Additionally, the PFC
includes an amplifier for increasing, by a gain factor, the
amplitude of signals having the pass frequency. The control-
ler dynamically establishes/adjusts the pass frequency and
gain factor, based on the signal amplitude and distortion.

The details of the present invention, both as to its structure
and operation, can best be understood in reference to the
accompanying drawings, in which like reference numerals
refer to like parts, and in which:

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram of the system of the
present invention;

FIG. 2 is a flow chart showing the overall method steps of
the present invention; and

FIG. 3 is a flow chart showing the steps of a waveform
reconstruction method in accordance with the present inven-
tion.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring initially to FIG. 1, a system, generally designated
10, is shown for reconstructing an rf waveform signal 12 that
has been transmitted by an rf transmitter 14, before the signal
12 is mixed and demodulated. As schematically shown in
FIG. 1, the rf signal 12 is an analog, sinusoidally-shaped
signal that is relatively smooth and undistorted when trans-
mitted, but which can become degraded and distorted as it
propagates in the direction of the arrow 16 toward an rf
antenna 18. Consequently, upon reaching the antenna 18, a
negative half 20 of the rf signal 12 can have distorted por-
tions 22 and undistorted portions 24. Likewise, a positive half 26
of the rf signal 12 can have distorted portions and undistorted
portions as shown. The present invention is directed to remov-
ing distortions from rf signals, prior to mixing and demodu-
lating the signals incident to the decoding of useful informa-
tion therefrom, thereby improving the fidelity and sensitivity
of radio receivers.

While the disclosure herein focuses on rf waveform recon-
struction, it is to be understood that the principles of the
present invention apply equally to other forms of modulated
electromagnetic waves that are modulated as appropriate for
the data the waves represent. For example, the principles of
the present invention can be applied to processing modulated
light waves that are transmitted through fiber optic bundles
incident to the transfer of computer, video, or voice data.

FIG. 1 shows that the rf signal detected by the antenna 18
is sent to a preamplifying and filtering circuit 28. In accor-
dance with the present invention, the preamplifying and fil-
tering circuit 28 includes an amplifying circuit which pream-
plifies, by a gain factor, the signal from the antenna 18.
Furthermore, the preamplifying and filtering circuit 28
includes a frequency bandpass filter for attenuating signals
having a frequency not equal to a pass frequency. As
described in greater detail below, the pass frequency and gain
factor are dynamically established under the principles of the
present invention.

Continuing with the description of FIG. 1, an analog to
digital converter (ADC) 30 is electrically connected to the
antenna 18 for receiving the analog rf signal therefrom. The
ADC 30 is structure well-known in the art that outputs a
digitized rf signal in response to the analog rf input from the
antenna 18.

US 8,280,334 B2

5

Additionally, a digital signal processor (DSP) 32 is electrically connected to the ADC 30. Accordingly, the DSP 32 receives the digitized signal from the ADC 30. Per the present invention, the DSP 32 outputs a reconstructed rf signal in accordance with a predetermined waveform reconstruction paradigm as more fully disclosed below. The reconstructed waveform has substantially no distorted portions. Instead, distorted portions in the input signal to the DSP 32 are replaced by smooth, undistorted portions.

As shown in FIG. 1, a digital computer or controller 34 is electrically connected to or integrated with the DSP 32. In one preferred embodiment, the DSP 32, controller 34, and ADC 30 establish a waveform reconstruction circuit 35. As intended by the present invention, the DSP 32 outputs a gain adjust signal to the controller 34 when the rf signal input to the DSP 32 is characterized by an amplitude outside of a predetermined amplitude range. In other words, when the amplitude of the input signal to the DSP 32 is too high or too low, the DSP 32 sends a gain adjust signal representing this fact to the controller 34.

In turn, the controller 34 is electrically connected to the preamplifying and filtering circuit 28, and the controller 34 dynamically establishes the gain factor of the preamplifying and filtering circuit 28, based on the gain adjust signal. Moreover, the controller 34 can also dynamically establish the pass frequency of the preamplifying and filtering circuit 28, based on the gain adjust signal, to adjust the signal to optimize reception thereof.

After reconstructing the rf waveform, the DSP 32 sends the reconstructed digitized signal to a digital-to-analog converter (DAC) 36, which converts the digitized output of the DSP 32 to an analog waveform. The DAC 36 is in turn electrically connected to the mixing circuit of a radio receiver 38. More specifically, the DAC 36 is electrically connected to an oscillator mixer 40 of the radio receiver 38, and the mixer 40 outputs an intermediate frequency (IF) signal in accordance with principles well-known in the art, based upon the analog signal from the DAC 36. The IF output from the mixer 40 is then sent to a demodulator 42, which decodes the signal to extract useful information therefrom. As but one example of how such useful information is used, an audio speaker 44 can be electrically connected to the demodulator 42 for producing audio signals, based on the output signal of the demodulator 42.

As the skilled artisan will recognize, the configuration shown in FIG. 1 is conducive to operably associating the waveform reconstruction circuit of the present invention with existing conventional radio receivers. In other words, the waveform reconstruction circuit 35 can be implemented in, e.g., a computer chip, and the chip then electrically engaged with a conventional radio receiver between the receiver and antenna as described, for enhancing the fidelity and sensitivity of the radio receiver. Alternatively, a mixer circuit can be incorporated in the DSP 32 to digitally implement the function of the mixer 40 after reconstruction of the waveform. In such an embodiment, the digitized output of the DSP 32 accordingly represents a reconstructed IF signal to be analogized by a DAC and then decoded by a demodulator.

As can be further appreciated in reference to FIG. 1, the radio receiver 38 typically includes one or more a tuning control elements, such as, for example, a knob-like tuning element 46. As is well known in the art, the tuning element 46 is manipulable by a person to establish a channel frequency selection. As shown in FIG. 1, the tuning element 46 is electrically connected to the controller 34, such that the controller 34 can establish the pass frequency based on the channel frequency. As stated above, however, once the channel fre-

6

quency has been set by a person, the controller 34 can further dynamically vary the pass frequency from the channel frequency as may be required by the gain adjust signal from the DSP 32, to compensate for transmitter 14 frequency drift. Stated differently, because the gain adjust signal generated by the DSP 32 is based on the received rf signal, the controller 34 can dynamically establish the pass frequency and/or gain factor, based on the received rf signal.

Now referring to FIGS. 2 and 3, the operational steps of the present invention can be appreciated. It is to be understood that FIGS. 2 and 3 represent logic flow charts of the present reconstruction means for implementing the predetermined reconstruction paradigm of the present invention. As recognized herein, the advantages of the present invention can be realized by removing at least some of the distorted portions of a received waveform and replacing each distorted portion with a respective replacement portion that is based on at least some of the undistorted portions of the received waveform. Thereby, a reconstructed rf signal is produced.

FIGS. 2 and 3 illustrate the logical structure of the waveform reconstruction of the present invention. This logical structure can be embodied in hardware, firmware, or computer program software. When the waveform reconstruction logic is embodied in software, it will be appreciated that the Figures illustrate the structures of computer program code elements that function according to this invention. Manifestly, the software-implemented invention is practiced in its essential embodiment by a machine component that renders the computer program code elements in a form that instructs a digital processing apparatus (that is, a computer) to perform a sequence of function steps corresponding to those shown in the Figures.

These software instructions may reside on a program storage device including a data storage medium, such as may be included in the DSP 32. The machine component in such an embodiment is a combination of program code elements in computer readable form that are embodied in a computer-usable data medium on the DSP 32. Alternatively, such media can also be found in semiconductor devices, on magnetic tape, on optical and magnetic disks, on a DASD array, on magnetic tape, on a conventional hard disk drive, on electronic read-only memory or on electronic random access memory, or other appropriate data storage device. In an illustrative embodiment of the invention, the computer-executable instructions may be lines of compiled C++ language code.

Referring particularly to FIG. 2, the waveform reconstruction logic of the DSP 32 begins at start oval 48, wherein positive and negative half cycles of a digitized waveform having distorted and undistorted portions are received from the ADC 30. At block 50, the gain factor and pass frequency of the preamplifying and filtering circuit 28 are established. Initially, the gain factor is established at a default value, and the pass frequency is established to be equal to the channel frequency established by the tuning element 46 (FIG. 1).

Next, at block 52, the digitized rf signal input to the DSP 32 is read. The present logic proceeds to decision diamond 54 to determine whether the amplitude of the input signal is below a predetermined threshold. If not, the logic moves to block 56 to reconstruct the signal as discussed in greater detail below.

From block 56, the logic proceeds to decision diamond 58, wherein it is determined whether the amplification of the reconstructed signal exceeds a predetermined value. If not, the logic proceeds to block 60, wherein the reconstructed signal is mixed (after being analogized, if appropriate) to generate an IF signal.

On the other hand, if, at decision diamond 58, it is determined that the amplification of the reconstructed signal

US 8,280,334 B2

7

indeed exceeds a predetermined value, the logic proceeds to block 62, wherein the DSP 32 outputs a gain adjust signal to the controller 34 to cause the controller 34 to decrease the gain factor of the preamplifying and filtering circuit 28. From blocks 60 or 62, the logic moves to block 64, wherein the IF signal is demodulated, and the useful information that is thereby extracted is displayed audibly, visually, or indeed stored or otherwise input to a device requiring the information.

Recall that at decision diamond 54 it is determined whether the amplitude of the input signal is below a predetermined threshold. In other words, as recognized by the present invention, the signal input to the DSP 32 should be characterized by an amplitude that is sufficient to permit decoding of useful information from the signal.

If the amplitude is below the threshold, the logic of the present invention proceeds to decision diamond 66, wherein it is determined whether the pass frequency is equal to the frequency of the received rf signal. If it is, the logic moves to block 68, wherein the gain adjust signal from the DSP 32 is generated to cause the controller 34 increase the gain factor of the preamplifying and filtering circuit 28.

In contrast, if, at decision diamond 66, it is determined that the pass frequency is not equal to the frequency of the received rf signal (i.e., that the pass frequency is not optimized for receiving the desired rf signal), the logic moves to block 70. As shown in Figure, at block 70, the controller 34 dynamically varies the pass frequency to set the pass frequency equal to the frequency of the received rf signal. From blocks 68 and 70, the logic returns to block 52.

Now referring to FIG. 3, the details of one embodiment of the waveform reconstruction paradigm of the present invention are shown. The paradigm begins at start oval 72, and moves to block 74, wherein discontinuities in the slope (referred to as "dA/dt") of the input waveform to the DSP 32 are identified. As recognized by the present invention, such discontinuities should not exist in a perfect waveform, and consequently indicate distorted portions of the waveform. On the other hand, a smooth slope (i.e., dA/dt is a smooth sinusoidal function) indicates an undistorted waveform portion.

From block 74, the logic proceeds to decision diamond 76, wherein it is determined whether the corresponding waveform portion in the opposite half-cycle that corresponds to the distorted portion is smooth (i.e., whether dA/dt of the corresponding waveform portion is a smooth sinusoidal function). By "corresponding waveform portion" is meant the portion of the waveform that occupies the segment along the time axis in the opposite half-cycle from the distorted portion which corresponds to the segment along the time axis occupied by the distorted portion in its own half-cycle.

If the test at decision diamond 76 is positive, the logic moves to block 78, wherein the distorted portion is replaced with the inverse of the corresponding waveform portion. Next, the logic moves to decision diamond 82, wherein it is determined whether the complete waveform cycle (i.e., one positive half-cycle and its negative half-cycle) has been analyzed. If it has been, the process proceeds to block 82, to analyze the next cycle, returning to block 74. Otherwise, the process proceeds to block 84 to search for the next discontinuity in the current cycle, thence to loop back to decision diamond 76. Also, if the test at decision diamond 76 is negative, the process skips to decision diamond 80.

It is to be understood that the waveform reconstruction paradigm of the present invention may use analysis methods other than the one shown in FIG. 3. For example, a fast Fourier transform (FFT) may be used to reconstruct a smooth waveform from a distorted waveform by replacing the dis-

8

torted input waveform with a series of smooth regular waveforms from a waveform library, with each replacement waveform having a unique frequency and an amplitude based upon its relative contribution to the reconstructed waveform. Accordingly, using FFT analysis, distorted portions of waveforms are replaced by smooth portions, with the smooth portions being based in accordance with FFT principles on the undistorted portions of the input waveform.

As yet another alternative, distorted portions of the input waveform can be replaced by smooth portions that are based on the undistorted portions of the input waveform using so-called "wavelet analysis". In wavelet analysis, small undistorted waveform segments are stored in a library and are fitted to the undistorted portions of the input waveform as needed to replace distorted waveform portions. Examples of such analysis are disclosed by, e.g., Donoho in "Nonlinear Wavelet Methods for Recovery of Signals, Densities, and Spectra from Indirect and Noisy Data", *Proceedings of Symposia in Applied Mathematics*, Vol. 00. 1993 (American Mathematical Society); Basseville et al., "Modeling and Estimation of Multiresolution Stochastic Processes", *IEEE Transactions on Information Theory*, vol. 38. no. 2, 1992 (IEEE); and Coffman et al., "Wavelet Analysis and Signal Processing", pps. 153-178, Jones and Bartlett, Boston, Mass., 1992, all of which publications are incorporated herein by reference.

While the particular SYSTEM AND METHOD FOR RADIO SIGNAL RECONSTRUCTION USING SIGNAL PROCESSOR as herein shown and described in detail is fully capable of attaining the above-described objects of the invention, it is to be understood that it is the presently preferred embodiment of the present invention and is thus representative of the subject matter which is broadly contemplated by the present invention, that the scope of the present invention fully encompasses other embodiments which may become obvious to those skilled in the art, and that the scope of the present invention is accordingly to be limited by nothing other than the appended claims.

What is claimed is:

1. An apparatus comprising:

an amplifier receiving as input an rf signal that has not been downconverted in the analog domain to IF, the amplifier generating an amplified signal;

a converter receiving as input the amplified signal which has not been downconverted after amplification, the converter outputting a digitized signal representing the amplified signal; and

at least one hardware module electrically connected to the converter, the module being configured with software to implement a mixer function, the at least one module being configured to decode and extract baseband information from the digitized signal, wherein the at least one module replaces at least one distorted portion of the signal with a replacement portion.

2. An apparatus, comprising:

a reconstruction circuit receiving an analog sinusoidal signal and generating a reconstructed waveform, wherein the reconstruction circuit includes:

an amplifier receiving the analog sinusoidal signal that has not been downconverted in the analog domain by the reconstruction circuit and outputting an amplified signal;

a converter receiving the amplified signal which has not been downconverted after amplification and outputting a digitized signal in response; and

at least one module electrically connected to the converter for outputting the reconstructed waveform in accordance with a predetermined reconstruction paradigm

US 8,280,334 B2

9

which includes generating the reconstructed waveform using at least portions of the digitized signal.

3. The apparatus of claim 2, wherein the module controls the amplifier.

4. The apparatus of claim 2, wherein the module implements a mixer function.

5. A device, comprising:

a circuit receiving an analog waveform carried in an optical transmission line, wherein the circuit includes:

an amplifier for receiving the signal prior to any extraction of baseband information therefrom and outputting an amplified signal;

a first circuit element receiving the amplified signal prior to any downconversion of the amplified signal and outputting a non-continuous signal in response;

a second circuit element receiving the non-continuous signal and repairing at least a portion of the non-continuous signal prior to the extraction of baseband information from the non-continuous signal; and

at least one module electrically connected to the second circuit element receiving the non-continuous signal, implementing a mixer function, and outputting a baseband waveform.

6. The receiver of claim 5, wherein the element receiving the non-continuous signal controls the amplifier.

7. A method, comprising:

amplifying a continuous signal that has not been downconverted in the analog domain to render an amplified signal;

converting the amplified signal which has not been downconverted in the analog domain into a non-continuous signal, the continuous signal being a carrier for baseband information;

repairing the non-continuous signal prior to completing a downconversion operation;

generating, subsequent to the repairing, a digitized signal from the non-continuous signal; and

at least in part executing a mixing operation, extracting the baseband information from the digitized signal without converting the digitized signal to the analog domain.

8. The method of claim 7, wherein the repairing is executed in the RF domain.

9. The method of claim 7, wherein the repairing includes signal reconstruction of distorted portions of the signal using the non-continuous signal.

10. A device, comprising:

a circuit configured to receive an analog waveform carried in an optical transmission line, wherein the circuit includes:

an amplifier configured to receive the signal prior to any extraction of baseband information therefrom and to amplify the signal;

a first subcircuit receiving the amplified signal prior to any downconversion of the amplified signal and outputting a non-continuous signal;

at least a second subcircuit receiving the non-continuous signal prior to any downconversion thereof, the second subcircuit repairing at least portions of the non-continuous signal; and

at least one processing assembly electrically connected to the second subcircuit to receive the non-continuous signal and in response to output a baseband waveform at least in part using a mixer function.

11. The receiver of claim 10, wherein the processing assembly controls the amplifier.

10

12. An article of manufacture, comprising:

a circuit receiving an analog waveform carried in an optical transmission line and conveying baseband information useful for display to a person, wherein the circuit includes:

an amplifier configured to receive the analog waveform prior to any extraction of baseband information therefrom and to amplify the signal, outputting an amplified signal;

at least a first subcircuit configured to receive the amplified signal prior to any downconversion thereof and to output a non-continuous signal;

at least a second subcircuit configured to receive the non-continuous signal prior to any extraction of baseband information therefrom and to output a non-continuous signal in response; and

at least one processing assembly electrically connected to the second subcircuit and configured for receiving the non-continuous signal prior to any downconversion of the non-continuous signal and for outputting a baseband waveform from which baseband information for display is obtained while still in the digital domain, the processing assembly configured to repair at least one portion of the non-continuous signal.

13. The article of manufacture of claim 12, wherein the reconstructing is effected on the non-continuous signal while still in the RF domain.

14. The article of manufacture of claim 12, wherein the processing assembly controls the amplifier.

15. The article of manufacture of claim 12, wherein the processing assembly implements a mixer function.

16. A receiver, comprising:

an incoming signal port at which an rf signal that has propagated through a transmission medium is received;

an amplifier downstream of the incoming signal port and receiving an analog signal from downstream of the incoming signal port, the amplifier outputting an amplified signal;

a converter receiving the amplified signal prior to any downconversion of the amplified signal and outputting a non-analog signal representative of the analog signal; and

a digital processor electrically connected to the converter, the digital processor being configured to extract baseband information from the non-analog signal at least in part by emulating a mixer without converting the non-analog signal to the analog domain after first reducing distortion in the non-analog signal.

17. The receiver of claim 16, wherein the digital processor is configured to reconstruct at least some distorted portions of the signal being processed, wherein at least one distorted portion is reconstructed by replacing the distorted portion with an undistorted portion.

18. The receiver of claim 16, wherein the converter digitizes the analog signal prior to any demodulation thereof.

19. The receiver of claim 16, further comprising a mixer generating an intermediate frequency (IF) signal based on the non-analog signal, and a demodulator decoding useful information from the IF signal, wherein at least the mixer and demodulator are embodied in the digital processor.

20. The receiver of claim 16, wherein the incoming signal port is coupled to an antenna.

21. The receiver of claim 16, wherein the digital processor controls the amplifier.

US 8,280,334 B2

11

- 22. An rf receiver, comprising:
 a signal input configured to receive an rf signal;
 an amplifying component configured for receiving the rf
 signal from the signal input and configured to output an
 amplified representation thereof;
 a converting component configured to receive the ampli-
 fied representation of the rf signal and configured to
 output a non-continuous representation thereof, the con-
 verting component configured to receive the amplified
 representation of the rf signal prior to downconversion
 of the amplified representation of the rf signal; and
 a processing component configured for receiving the non-
 continuous representation from the converting compo-
 nent and at least in part configured for emulating a mixer
 to extract baseband information from the non-continu-
 ous representation prior to any conversion of the non-
 continuous representation to a continuous representa-
 tion, the processing component being configured to
 reconstruct the signal in the non-continuous domain
 prior to extracting baseband information.
- 23. The receiver of claim 22, wherein the converting compo-
 nent is established by an analog-to-digital converter
 (ADC).
- 24. The receiver of claim 22, wherein the processing compo-
 nent is established by a digital signal processor (DSP).
- 25. The receiver of claim 22, wherein the signal input
 receives rf from an antenna connected thereto.
- 26. The receiver of claim 22, wherein the processing compo-
 nent uses a fast Fourier transform (FFT) to reconstruct a
 distorted portion of the rf.
- 27. The receiver of claim 22, wherein the processing compo-
 nent is configured to control the amplifying component.
- 28. The receiver of claim 22, wherein the processing compo-
 nent uses wavelet analysis to reconstruct a distorted portion
 of the rf.

12

- 29. A receiver, comprising:
 a filtering circuit receiving and filtering an electromagnetic
 signal;
 an amplifier associated with the filtering circuit and ampli-
 fying the electromagnetic signal to render an amplified
 signal;
 an analog to digital converter (ADC) receiving the ampli-
 fied signal which has not been downconverted after
 amplification and outputting a digitized signal represen-
 tative of the amplified signal; and
 a digital processor electrically connected to the ADC, the
 digital processor reconstructing at least one corrupted
 portion of the digitized signal prior to extracting, at least
 in part by implementing a mixing operation, useful
 information from the digitized signal while the digitized
 signal remains a digitized signal.
- 30. The receiver of claim 29, wherein the digital processor
 reconstructs the digitized signal.
- 31. The receiver of claim 29, wherein the ADC digitizes the
 signal prior to any analog demodulation thereof.
- 32. The receiver of claim 29, wherein the filtering circuit is
 controlled and tuned by the processor.
- 33. The receiver of claim 29, wherein the processor recon-
 structs the digitized signal such that spurious signal elements
 and noise are removed therefrom.
- 34. The receiver of claim 29, wherein the processor recon-
 structs the digitized signal such that a desired signal is
 enhanced and amplified.
- 35. The receiver of claim 29, wherein the processor con-
 trols the amplifier.

* * * * *

Name & Address:

Terry T. Tsai (SBN 277495)
Thomas G Pasternak (Admitted Pro Hac Vice)
John Caracappa (Admitted Pro Hac Vice)
Steptoe & Johnson LLP, 2121 Ave of the Stars, #2800
LA, Cal. 90067; T: 310/734-3200/Fax: 310/734-3300

UNITED STATES DISTRICT COURT
CENTRAL DISTRICT OF CALIFORNIA

AMERICAN RADIO LLC

CASE NUMBER

PLAINTIFF(S)

SA CV12-01709-DOC (RNBx)

v.

BROADCOM CORPORATION

SUMMONS

DEFENDANT(S).

ORIGINAL

TO: DEFENDANT(S):

A lawsuit has been filed against you.

Within 21 days after service of this summons on you (not counting the day you received it), you must serve on the plaintiff an answer to the attached complaint _____ amended complaint counterclaim cross-claim or a motion under Rule 12 of the Federal Rules of Civil Procedure. The answer or motion must be served on the plaintiff's attorney, Terry T. Tsai, whose address is 2121 Avenue of the Stars, Suite 2800, Los Angeles, CA 90067. If you fail to do so, judgment by default will be entered against you for the relief demanded in the complaint. You also must file your answer or motion with the court.

Clerk, U.S. District Court

Dated: 10/3/2012

By: [Signature]
Deputy Clerk

(Seal of the Court)

[Use 60 days if the defendant is the United States or a United States agency, or is an officer or employee of the United States. Allowed 60 days by Rule 12(a)(3)].

UNITED STATES DISTRICT COURT, CENTRAL DISTRICT OF CALIFORNIA
CIVIL COVER SHEET

I (a) PLAINTIFFS (Check box if you are representing yourself <input type="checkbox"/>) AMERICAN RADIO LLC	DEFENDANTS BROADCOM CORPORATION
(b) Attorneys (Firm Name, Address and Telephone Number. If you are representing yourself, provide same.) Terry T. Tsai (SBN 277495) / Thomas G. Pasternak (Admitted Pro Hac Vice) / John Caracappa (Admitted Pro Hac Vice) / Michael Heimbold (SBN 173981) / Steptoe & Johnson LLP, 2121 Ave of the Stars #2800, Los Angeles, CA 90067	Attorneys (If Known)

II. BASIS OF JURISDICTION (Place an X in one box only.) <input type="checkbox"/> 1 U.S. Government Plaintiff <input checked="" type="checkbox"/> 3 Federal Question (U.S. Government Not a Party) <input type="checkbox"/> 2 U.S. Government Defendant <input type="checkbox"/> 4 Diversity (Indicate Citizenship of Parties in Item III)	III. CITIZENSHIP OF PRINCIPAL PARTIES - For Diversity Cases Only (Place an X in one box for plaintiff and one for defendant.) <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:30%;"></td> <td style="width:10%; text-align: center;">PTF</td> <td style="width:10%; text-align: center;">DEF</td> <td style="width:40%;"></td> <td style="width:10%; text-align: center;">PTF</td> <td style="width:10%; text-align: center;">DEF</td> </tr> <tr> <td>Citizen of This State</td> <td style="text-align: center;"><input type="checkbox"/> 1</td> <td style="text-align: center;"><input type="checkbox"/> 1</td> <td>Incorporated or Principal Place of Business in this State</td> <td style="text-align: center;"><input type="checkbox"/> 4</td> <td style="text-align: center;"><input type="checkbox"/> 4</td> </tr> <tr> <td>Citizen of Another State</td> <td style="text-align: center;"><input type="checkbox"/> 2</td> <td style="text-align: center;"><input type="checkbox"/> 2</td> <td>Incorporated and Principal Place of Business in Another State</td> <td style="text-align: center;"><input type="checkbox"/> 5</td> <td style="text-align: center;"><input type="checkbox"/> 5</td> </tr> <tr> <td>Citizen or Subject of a Foreign Country</td> <td style="text-align: center;"><input type="checkbox"/> 3</td> <td style="text-align: center;"><input type="checkbox"/> 3</td> <td>Foreign Nation</td> <td style="text-align: center;"><input type="checkbox"/> 6</td> <td style="text-align: center;"><input type="checkbox"/> 6</td> </tr> </table>		PTF	DEF		PTF	DEF	Citizen of This State	<input type="checkbox"/> 1	<input type="checkbox"/> 1	Incorporated or Principal Place of Business in this State	<input type="checkbox"/> 4	<input type="checkbox"/> 4	Citizen of Another State	<input type="checkbox"/> 2	<input type="checkbox"/> 2	Incorporated and Principal Place of Business in Another State	<input type="checkbox"/> 5	<input type="checkbox"/> 5	Citizen or Subject of a Foreign Country	<input type="checkbox"/> 3	<input type="checkbox"/> 3	Foreign Nation	<input type="checkbox"/> 6	<input type="checkbox"/> 6
	PTF	DEF		PTF	DEF																				
Citizen of This State	<input type="checkbox"/> 1	<input type="checkbox"/> 1	Incorporated or Principal Place of Business in this State	<input type="checkbox"/> 4	<input type="checkbox"/> 4																				
Citizen of Another State	<input type="checkbox"/> 2	<input type="checkbox"/> 2	Incorporated and Principal Place of Business in Another State	<input type="checkbox"/> 5	<input type="checkbox"/> 5																				
Citizen or Subject of a Foreign Country	<input type="checkbox"/> 3	<input type="checkbox"/> 3	Foreign Nation	<input type="checkbox"/> 6	<input type="checkbox"/> 6																				

IV. ORIGIN (Place an X in one box only.)

1 Original Proceeding
 2 Removed from State Court
 3 Remanded from Appellate Court
 4 Reinstated or Reopened
 5 Transferred from another district (specify):
 6 Multi-District Litigation
 7 Appeal to District Judge from Magistrate Judge

V. REQUESTED IN COMPLAINT: JURY DEMAND: Yes No (Check 'Yes' only if demanded in complaint.)

CLASS ACTION under F.R.C.P. 23: Yes No MONEY DEMANDED IN COMPLAINT: \$ TBD

VI. CAUSE OF ACTION (Cite the U.S. Civil Statute under which you are filing and write a brief statement of cause. Do not cite jurisdictional statutes unless diversity.)

Title 35, Infringement

VII. NATURE OF SUIT (Place an X in one box only.)

OTHER STATUTES	CONTRACT	TORTS	TORTS	PRISONER PETITIONS	LABOR
<input type="checkbox"/> 400 State Reapportionment <input type="checkbox"/> 410 Antitrust <input type="checkbox"/> 430 Banks and Banking <input type="checkbox"/> 450 Commerce/ICC Rates/etc. <input type="checkbox"/> 460 Deportation <input type="checkbox"/> 470 Racketeer Influenced and Corrupt Organizations <input type="checkbox"/> 480 Consumer Credit <input type="checkbox"/> 490 Cable/Sat TV <input type="checkbox"/> 810 Selective Service <input type="checkbox"/> 850 Securities/Commodities/Exchange <input type="checkbox"/> 875 Customer Challenge 12 USC 3410 <input type="checkbox"/> 890 Other Statutory Actions <input type="checkbox"/> 891 Agricultural Act <input type="checkbox"/> 892 Economic Stabilization Act <input type="checkbox"/> 893 Environmental Matters <input type="checkbox"/> 894 Energy Allocation Act <input type="checkbox"/> 895 Freedom of Info. Act <input type="checkbox"/> 900 Appeal of Fee Determination Under Equal Access to Justice <input type="checkbox"/> 950 Constitutionality of State Statutes	<input type="checkbox"/> 110 Insurance <input type="checkbox"/> 120 Marine <input type="checkbox"/> 130 Miller Act <input type="checkbox"/> 140 Negotiable Instrument <input type="checkbox"/> 150 Recovery of Overpayment & Enforcement of Judgment <input type="checkbox"/> 151 Medicare Act <input type="checkbox"/> 152 Recovery of Defaulted Student Loan (Excl. Veterans) <input type="checkbox"/> 153 Recovery of Overpayment of Veteran's Benefits <input type="checkbox"/> 160 Stockholders' Suits <input type="checkbox"/> 190 Other Contract <input type="checkbox"/> 195 Contract Product Liability <input type="checkbox"/> 196 Franchise <div style="background-color: #cccccc; text-align: center;">REAL PROPERTY</div> <input type="checkbox"/> 210 Land Condemnation <input type="checkbox"/> 220 Foreclosure <input type="checkbox"/> 230 Rent Lease & Ejectment <input type="checkbox"/> 240 Torts to Land <input type="checkbox"/> 245 Tort Product Liability <input type="checkbox"/> 290 All Other Real Property	<div style="background-color: #cccccc; text-align: center;">PERSONAL INJURY</div> <input type="checkbox"/> 310 Airplane <input type="checkbox"/> 315 Airplane Product Liability <input type="checkbox"/> 320 Assault, Libel & Slander <input type="checkbox"/> 330 Fed. Employers' Liability <input type="checkbox"/> 340 Marine <input type="checkbox"/> 345 Marine Product Liability <input type="checkbox"/> 350 Motor Vehicle <input type="checkbox"/> 355 Motor Vehicle Product Liability <input type="checkbox"/> 360 Other Personal Injury <input type="checkbox"/> 362 Personal Injury-Med Malpractice <input type="checkbox"/> 365 Personal Injury-Product Liability <input type="checkbox"/> 368 Asbestos Personal Injury Product Liability <div style="background-color: #cccccc; text-align: center;">IMMIGRATION</div> <input type="checkbox"/> 462 Naturalization Application <input type="checkbox"/> 463 Habeas Corpus-Alien Detainee <input type="checkbox"/> 465 Other Immigration Actions	<div style="background-color: #cccccc; text-align: center;">PERSONAL PROPERTY</div> <input type="checkbox"/> 370 Other Fraud <input type="checkbox"/> 371 Truth in Lending <input type="checkbox"/> 380 Other Personal Property Damage <input type="checkbox"/> 385 Property Damage Product Liability <div style="background-color: #cccccc; text-align: center;">BANKRUPTCY</div> <input type="checkbox"/> 422 Appeal 28 USC 158 <input type="checkbox"/> 423 Withdrawal 28 USC 157 <div style="background-color: #cccccc; text-align: center;">CIVIL RIGHTS</div> <input type="checkbox"/> 441 Voting <input type="checkbox"/> 442 Employment <input type="checkbox"/> 443 Housing/Accommodations <input type="checkbox"/> 444 Welfare <input type="checkbox"/> 445 American with Disabilities - Employment <input type="checkbox"/> 446 American with Disabilities - Other <input type="checkbox"/> 440 Other Civil Rights	<input type="checkbox"/> 510 Motions to Vacate Sentence <input type="checkbox"/> 530 Habeas Corpus <input type="checkbox"/> 530 General <input type="checkbox"/> 535 Death Penalty <input type="checkbox"/> 540 Mandamus/Other <input type="checkbox"/> 550 Civil Rights <input type="checkbox"/> 555 Prison Condition <div style="background-color: #cccccc; text-align: center;">FORFEITURE/PENALTY</div> <input type="checkbox"/> 610 Agriculture <input type="checkbox"/> 620 Other Food & Drug <input type="checkbox"/> 625 Drug Related Seizure of Property 21 USC 881 <input type="checkbox"/> 630 Liquor Laws <input type="checkbox"/> 640 R.R. & Truck <input type="checkbox"/> 650 Airline Regs <input type="checkbox"/> 660 Occupational Safety /Health <input type="checkbox"/> 690 Other	<input type="checkbox"/> 710 Fair Labor Standards Act <input type="checkbox"/> 720 Labor/Mgmt. Relations <input type="checkbox"/> 730 Labor/Mgmt. Reporting & Disclosure Act <input type="checkbox"/> 740 Railway Labor Act <input type="checkbox"/> 790 Other Labor Litigation <input type="checkbox"/> 791 Empl. Ret. Inc. Security Act <div style="background-color: #cccccc; text-align: center;">PROPERTY RIGHTS</div> <input type="checkbox"/> 820 Copyrights <input checked="" type="checkbox"/> 830 Patent <input type="checkbox"/> 840 Trademark <div style="background-color: #cccccc; text-align: center;">SOCIAL SECURITY</div> <input type="checkbox"/> 861 HIA (1395ff) <input type="checkbox"/> 862 Black Lung (923) <input type="checkbox"/> 863 DIWC/DIWW (405(g)) <input type="checkbox"/> 864 SSID Title XVI <input type="checkbox"/> 865 RSI (405(g)) <div style="background-color: #cccccc; text-align: center;">FEDERAL TAX SUITS</div> <input type="checkbox"/> 870 Taxes (U.S. Plaintiff or Defendant) <input type="checkbox"/> 871 IRS-Third Party 26 USC 7609

CV12-01709-DOC (RNBx)

FOR OFFICE USE ONLY: Case Number

AFTER COMPLETING THE FRONT SIDE OF FORM CV-71, COMPLETE THE INFORMATION REQUESTED BELOW.

UNITED STATES DISTRICT COURT, CENTRAL DISTRICT OF CALIFORNIA
CIVIL COVER SHEET

VIII(a). IDENTICAL CASES: Has this action been previously filed in this court and dismissed, remanded or closed? No Yes
If yes, list case number(s): _____

VIII(b). RELATED CASES: Have any cases been previously filed in this court that are related to the present case? No Yes
If yes, list case number(s): _____

Civil cases are deemed related if a previously filed case and the present case:

- (Check all boxes that apply) A. Arise from the same or closely related transactions, happenings, or events; or
 B. Call for determination of the same or substantially related or similar questions of law and fact; or
 C. For other reasons would entail substantial duplication of labor if heard by different judges; or
 D. Involve the same patent, trademark or copyright, and one of the factors identified above in a, b or c also is present.

IX. VENUE: (When completing the following information, use an additional sheet if necessary.)

(a) List the County in this District; California County outside of this District; State if other than California; or Foreign Country, in which EACH named plaintiff resides.
 Check here if the government, its agencies or employees is a named plaintiff. If this box is checked, go to item (b).

County in this District:*	California County outside of this District; State, if other than California; or Foreign Country
San Diego County	

(b) List the County in this District; California County outside of this District; State if other than California; or Foreign Country, in which EACH named defendant resides.
 Check here if the government, its agencies or employees is a named defendant. If this box is checked, go to item (c).

County in this District:*	California County outside of this District; State, if other than California; or Foreign Country
Orange County	BROADCOM CORPORATION, a California corporation

(c) List the County in this District; California County outside of this District; State if other than California; or Foreign Country, in which EACH claim arose.
Note: In land condemnation cases, use the location of the tract of land involved.

County in this District:*	California County outside of this District; State, if other than California; or Foreign Country
Los Angeles County	

* Los Angeles, Orange, San Bernardino, Riverside, Ventura, Santa Barbara, or San Luis Obispo Counties
Note: In land condemnation cases, use the location of the tract of land involved

X. SIGNATURE OF ATTORNEY (OR PRO PER):  Date October 3, 2012

Notice to Counsel/Parties: The CV-71 (JS-44) Civil Cover Sheet and the information contained herein neither replace nor supplement the filing and service of pleadings or other papers as required by law. This form, approved by the Judicial Conference of the United States in September 1974, is required pursuant to Local Rule 3-1 is not filed but is used by the Clerk of the Court for the purpose of statistics, venue and initiating the civil docket sheet. (For more detailed instructions, see separate instructions sheet.)

Key to Statistical codes relating to Social Security Cases:

Nature of Suit Code	Abbreviation	Substantive Statement of Cause of Action
861	HIA	All claims for health insurance benefits (Medicare) under Title 18, Part A, of the Social Security Act, as amended. Also, include claims by hospitals, skilled nursing facilities, etc., for certification as providers of services under the program. (42 U.S.C. 1935FF(b))
862	BL	All claims for "Black Lung" benefits under Title 4, Part B, of the Federal Coal Mine Health and Safety Act of 1969. (30 U.S.C. 923)
863	DIWC	All claims filed by insured workers for disability insurance benefits under Title 2 of the Social Security Act, as amended; plus all claims filed for child's insurance benefits based on disability. (42 U.S.C. 405(g))
863	DIWW	All claims filed for widows or widowers insurance benefits based on disability under Title 2 of the Social Security Act, as amended. (42 U.S.C. 405(g))
864	SSID	All claims for supplemental security income payments based upon disability filed under Title 16 of the Social Security Act, as amended.
865	RSI	All claims for retirement (old age) and survivors benefits under Title 2 of the Social Security Act, as amended. (42 U.S.C. (g))

**UNITED STATES DISTRICT COURT
CENTRAL DISTRICT OF CALIFORNIA**

NOTICE OF ASSIGNMENT TO UNITED STATES MAGISTRATE JUDGE FOR DISCOVERY

This case has been assigned to District Judge David O. Carter and the assigned discovery Magistrate Judge is Robert N. Block.

The case number on all documents filed with the Court should read as follows:

SACV12- 1709 DOC (RNBx)

Pursuant to General Order 05-07 of the United States District Court for the Central District of California, the Magistrate Judge has been designated to hear discovery related motions.

All discovery related motions should be noticed on the calendar of the Magistrate Judge

=====

NOTICE TO COUNSEL

A copy of this notice must be served with the summons and complaint on all defendants (if a removal action is filed, a copy of this notice must be served on all plaintiffs).

Subsequent documents must be filed at the following location:

Western Division
312 N. Spring St., Rm. G-8
Los Angeles, CA 90012

Southern Division
411 West Fourth St., Rm. 1-053
Santa Ana, CA 92701-4516

Eastern Division
3470 Twelfth St., Rm. 134
Riverside, CA 92501

Failure to file at the proper location will result in your documents being returned to you.