

original

Aleksandr L. Yufa,
698 Cypress Avenue,
Colton, CA 92324
ypesinc@msn.com
(909) 370-4454-phone/voice message,
(909) 370-1714-voice message/fax,
IN PRO-SE

RECEIVED
FILED
DEC 12 2012

DEC 12 2012
RICHARD W. WIEKING
CLERK, U.S. DISTRICT COURT
NORTHERN DISTRICT OF CALIFORNIA

RICHARD W. WIEKING
CLERK, U.S. DISTRICT COURT
NORTHERN DISTRICT OF CALIFORNIA

**UNITED STATES DISTRICT COURT
NORTHERN DISTRICT OF CALIFORNIA**

Aleksandr L. Yufa,

Plaintiff in Pro-Se

v.

Lighthouse Worldwide Solutions, Inc., et al.

Defendants

Case No. C09-000968 MEJ
SECOND AMENDED COMPLAINT
FOR PATENT INFRINGEMENT;
AND DEMAND FOR JURY TRIAL

Judge: Hon. Maria-Elena James
Courtroom: B
Trial: Not scheduled

Pursuant to the Court Order of December 03, 2012 (Doc. 82), Plaintiff, Aleksandr L. Yufa, Ph.D., hereby amends his Complaint against Defendant, Lighthouse Worldwide Solutions, Inc. so that, as so amended, it alleges as follows:

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

SECOND AMENDED COMPLAINT FOR PATENT INFRINGEMENT

1
2
3 1) This Court (U.S. District Court, Northern District of California) has a jurisdiction
4 over this patent infringement law suit pursuant to 28 U.S.C., Sections 1331 and 1338(a).

5 2) Venue is proper in this judicial district pursuant to 28 U.S.C., Sections 1391(b) and
6 1400(b).

7 3) The First Listed Defendant - "Lighthouse Worldwide Solution, Inc." ("Lighthouse")
8 has a Principal Place of Business (headquarter) located in California (94538), Fremont,
9 at 46501 Landing Parkway [phone: 510-438-0500] (Northern District of California).

10 4) Plaintiff - Aleksandr L. Yufa, Ph.D. ("Yufa") is a resident of the city of Colton at 698
11 Cypress Avenue, San Bernardino County, California (92324-1952), (909-370-4454-
12 phone/voice message, 909-370-1714-fax).

13 5) This law suit is filed under U.S. Civil Statute of title 35 United States Code, Chapter
14 28, §271 for infringement of the U.S. Patent No. 6,346,983 (" '983 patent") entitled
15 "METHODS AND WIRELESS COMMUNICATING PARTICLE COUNTING AND
16 MEASURING APPARATUS" [issued February 12, 2002 (Application No.: 09/015,458
17 filed January 29, 1998)] amended in compliance with the *Ex Parte* Reexamination
18 Certificate (9186th), US 6,346,983 C1 ("amended '983 patent" or "patent-in-suit")
19 [issued August 14, 2012 for the 6,346,983 patent] (Exhibit A is a true and correct copy
20 of the 6,346,983 patent and Exhibit B is a true and correct copy of the *Ex Parte*
21 Reexamination Certificate (9186th), US 6,346,983 C1).

22 6) This action is to recover all damages from the infringement of the patent pursuant to
23 35 United States Code, Chapter 29, §§281, 283-285 including a final injunction to
24 prevent future infringement.

25 7) Plaintiff has all rights to enforce the patent-in-suit against the believed
26 infringement(s), and Plaintiff has an entire interest in the said patent.

CAUSE OF ACTION

(Infringement of the amended '983 patent against Defendant: Lighthouse)

1
2
3 **8)** Plaintiff re-alleges and incorporates herein by this reference thereto the allegations set
4 forth in paragraphs 1) through 7).

5 **9)** The amended '983 patent's claims are presented in the Reexamination Certificate
6 (9186th), US 6,346,983 C1 [Exhibit B].

7 **10)** Based on the below presented information, documents, communication(s) and
8 evidences, it is believed that Lighthouse has infringed and does continuously infringe the
9 claims 6, 7 and 8 of the amended '983 patent.

10 **11)** On September 25, 2007, Yufa sent to Lighthouse the letter (Certified Mail # 7007
11 0710 0002 2671 4707) notifying Lighthouse about the believed infringement with the
12 offer to license or acquire the Yufa's patent. (Exhibit C is true and correct copy of the
13 Yufa's letter of September 25, 2007 to Lighthouse. Hereinafter all Exhibits including but
14 not limited to mail correspondence (letters), fax communication(s), Web-sites' print-outs
15 are true and correct copies of the original documents and/or computer's print-outs).

16 **12)** There was no Lighthouse's response to the Yufa's letter of September 25, 2007.

17 **13)** On November 16, 2007, Yufa sent to Lighthouse the Brief Follow-Up Letter
18 (Certified Mail # 7006 2760 0004 3379 9535) [Exhibit D is true and correct copy of the
19 Yufa's Brief Follow-Up Letter of November 16, 2007].

20 **14)** There was no Lighthouse's response to the Yufa's Brief Follow-Up Letter of
21 November 16, 2007.

22 **15)** Based on the documents and evidences, it is believed that the structure(s)/apparatus
23 claimed in the claims 6, 7 and 8 of the amended '983 patent (Exhibit B) are infringed by
24 Lighthouse by manufacturing (making), using, selling, and offering for sale (offering to
25 sell) of at least the following products, including but not limited to: Remote Airborne
26 Particle Counters without Pumps [Models: 1104,1100,2014, 2012, 2014V, 3014, 3012,
27 3014V, 3104, 3102, 3104V, 5014, 5012, 5104, 5102, 5104V, 5102V] (Exhibit E is true
28 and correct copy of the computer's print-out of Web page "Compare Airborne Particle

1 Counters” and Exhibit F is true and correct copy of the computer’s print-out for Remote
2 5104), with Pumps (Models: 2014P, 3014P, 5014P, 5104P, 3104P, 3012PN, 5012PN,
3 5102PN, 3104PN, 5014PN, 5104PN) [Exhibit E], handheld particle counters [Models:
4 2016, 3016 IAQ, 3013] (Exhibits G and H are true and correct copies of the computer’s
5 print-out for Handheld 2016), portable particle counters Models: [SOLAIR 3100/5100,
6 SOLAIR 3200/5200, SOLAIR 3350/5350, SOLAIR 1100LD, Boulder Counter]
7 (Exhibits I and J are true and correct copies of the computer’s print-out for SOLAIR
8 3100/5100 and SOLAIR 3350/5350 respectively), etc. Also, the new press-
9 released/advertised products, infringing the amended ‘983 patent, are presented in
10 Exhibit K (Exhibit K is true and correct copy of the computer’s print-out “Airborne
11 Particle Counters | Aerosol, Handheld, Portable, Remote Particle Counters”). {The word
12 “product” has a wider meaning, including but not limited to: system(s), apparatus,
13 means, device(s), station(s), unit(s), block(s), particle monitoring apparatus, etc. The
14 word “particle” has a wider meaning, including but not limited to: agent(s); airborne
15 particle(s), gas particle(s), etc.; contamination(s), fluid contamination(s), liquid
16 contamination(s), etc.; aerosol; etc. The word “monitoring” has a wider meaning,
17 including but not limited to: counting, measuring, analyzing, detecting, sensing, etc. The
18 words “particle”, “product”, etc. have a singular or plural and vice versa meaning
19 appropriately}.

20 16) The Claim comparison chart is presented in Exhibit L.

21 17) The mentioned above product is not limited to the named systems, and include
22 without limitation the other system(s), unknown to the Plaintiff at this time but which
23 may be subsequently discovered later.

24 18) The amended ‘983 patent discloses and claims (independent claim 6): “This
25 invention relates to air, gas and liquid quality and, more particularly, to devices,
26 apparatus and instruments for airborne (gas) and/or liquid contamination quantity
27 counting and particle size measuring by light (laser) beam.” (Exhibit A, column 1, lines
28 6-9); “... apparatus for particle counting and measuring provide the counting and

1 measuring of the airborne (gas) particles and/or liquid contaminations and include a ...
2 sensor system 5 [which] includes a particle detecting system 4, providing the sensing of
3 the light created by an intersection of the particles with a light beam within particle
4 monitoring region of the particle detecting system 4, particle detection and timing
5 processing of the detected signals ..." ['983 patent's Reexamination Certificate (Exhibit
6 B), Abstract, lines 1-4]; "For example, for light detecting systems 68, using the scattered
7 light detection principles, the signals from light detecting means 67 can be presented
8 Fig. 9b ..." (Exhibit A, column 9, lines 57-60); "Apparatus for counting and measuring
9 particles, providing a processing of an output of a light detecting means ..." ['983
10 patent's Reexamination Certificate (Exhibit B), Claim 6, lines 20-21), etc.

11 19) Base on the previous clause [clause "18"]], the infringement of claims 6, 7 and 8 of
12 the amended '983 patent is indirectly confirmed by Lighthouse at least in the following
13 Lighthouse's document(s), including but not limited to: "How Does a Particle Counter
14 Work?" (Exhibit M is true and correct copy of the computer's print-out "How Does a
15 Particle Counter Work?"), wherein is described that the Lighthouse's products include
16 the circuitry/means providing "light scattering or light blocking", "[a]n aerosol stream",
17 "a chamber" with "a light source" providing "light beam" in which "a particle is illumi-
18 nated", and the detected scattered light "relates to the size of the particle" providing
19 "sizing [measurement - Yufa's remark] and counting of the individual particles",
20 thereby, infringing the apparatus/means claimed in the claims 6-8 of the amended '983
21 patent. These evidences were discovered on the Lighthouse Web-site by searching for a
22 word "scatter" (Exhibit N is true and correct copy of the computer's print-out "Search
23 for "scatter" - Lighthouse Worldwide Solutions - Technology that Counts"), etc.

24 20) The first retained counsel for Lighthouse, Mr. William E. Ireland, ("counsel")
25 directly confirmed a sale (an infringement) by Lighthouse of the infringing products
26 during verbal (telephonic communications) and letters'/faxes' communications (in
27 writing) between the counsel and Plaintiff (Exhibit O is true and correct copy of the
28 Yufa's letter-fax of May 22, 2009 to the counsel, Exhibit P is true and correct copy of

1 the counsel's letter-fax of May 26, 2009 to Yufa, Exhibit Q is true and correct copy of
2 the Yufa's letter-fax of May 26, 2009 to the counsel). Thus, the fact of infringement of
3 the '983 patent is incontrovertibly established.

4 21) During verbal and in writing communications with the Defendant and its legal
5 representatives, Yufa has requested to provide the non-infringement evidences, technical
6 and financial information and/or to allow the visitation of its facilities for
7 study/inspection of the believed infringing products in order to precisely determine the
8 Lighthouse's infringing products [Exhibit R is true and correct copy of the Yufa's letter-
9 fax of May 09, 2012 to the second retained counsel for Lighthouse, Mr. Robert P. Andris
10 ("attorney"), Exhibit S is true and correct copy of the Yufa's letter-fax of May 21, 2012
11 to attorney, Exhibit T is true and correct copy of the attorney's letter-fax of May 25,
12 2012 to Yufa, Exhibit U is true and correct copy of the Yufa's letter-fax of May 25, 2012
13 to Mr. Michael D. Kanach, Exhibit V is true and correct copy of the Yufa's certified
14 letter of June 18, 2012 to Mr. Michael D. Kanach and Exhibit W is true and correct
15 copies of the proofs of delivery of the Yufa's certified letter of June 18, 2012 to Mr.
16 Michael D. Kanach, Exhibit X is true and correct copy of the attorney's letter-fax of July
17 06, 2012 to Yufa, Exhibit Y is true and correct copy of the Yufa's letter-fax of July 07,
18 2012 to Mr. Michael D. Kanach].

19 22) Lighthouse has not cooperated, has not provided the requested technical and
20 financial/commercial information (e.g., total sale of Lighthouse's infringing product,
21 profit, etc.), and has not allowed the visitation of its facilities for study/inspection of the
22 believed infringing product.

23 23) Considering the Lighthouse's refusal to provide any financial/commercial
24 information [some prices for some Lighthouse's product have been provided during the
25 telephone conversations, in Lighthouse's E-mail(s) (i.e., in attachment(s) to E-mail(s)) to
26 Yufa, and on the Lighthouse's Web-page "What is Airborne Molecular
27 Contamination?", page 3 of 5, lines 11-12, where Lighthouse states that the price for its
28 1 (one) system is \$400,000.00, i.e.: "Prices can range from ... to \$400,000 for an entire

1 system sampling multiple locations. ..." (Exhibit Z is true and correct copy of the
2 computer's print-out "What is Airborne Molecular Contamination?"), it is difficult to
3 calculate/estimate the damages (losses). Therefore, the damage caused by the
4 Defendant's infringing product can not be specified at this time and may be timely
5 determined later during formal Discovery and/or defined by the Court during jury trial.

6 24) Under the law [*Knorr-Bremse v. Dana Corp.*, 383 F3d 1337 (Fed. Cir. 2004)],
7 person have a duty of due care to determine whether or not person infringe any in-force
8 patents [the word "person" has a wider meaning, including but not limited to: individual,
9 corporation, organization, etc., and a singular or plural and vice versa meaning
10 appropriately - Yufa's remark].

11 25) The Lighthouse's refusal to cooperate and provide the requested technical and
12 financial/commercial information, e.g., total sale of Lighthouse's infringing product,
13 profit, etc. [thereby "hiding" information], and refusal to allow the visitation of its facili-
14 ties for study/inspection of the believed infringing product, indirectly confirm the inf-
15 ringement of the amended '983 patent and also justify and encourage the Yufa's asser-
16 tion of infringement additionally to the presented herein above and below facts and
17 evidences, which unconditionally confirm the infringement of the patent-in-suit.

18 26) The Defendant's refusal to present the non-infringement evidences for claims 6-8
19 indirectly confirms the infringement of claims 6-8. The refusal to disclose ("hiding") the
20 relevant evidence(s), which can be used in the interest of justice, shows that the party
21 does not cooperate and act not in a good faith.

22 27) In response to the Yufa's verbal and written communications regarding possible
23 infringement, Lighthouse has not declared (verbally and/or in writing) a non-
24 infringement and has not presented any evidences of non-infringement.

25 28) Lighthouse has failed to defense by non-declaring a non-infringement in the
26 Lighthouse's responses to Yufa's communication(s), therefore, Lighthouse has waived
27 its right for further defense.

28 29) The estimations of the believed damage should include the Plaintiff's emotional

1 distress caused by the believed Defendant's misrepresentation of the Plaintiff's
2 achievements described and claimed in the amended '983 patent as the Defendant's
3 achievements.

4 **30)** Based on the information, fact(s), material(s)/document(s), and evidence(s) disclosed
5 above, it is believed, that the Defendant has manufactured (made), used, sold, offered for
6 sale and does manufacture (make), use, sell, and offer for sale at least the described
7 herein product operating and structured by the claims 6-8 of the amended '983 patent.
8 Therefore, based on the information, fact(s), document(s), and evidence(s) disclosed
9 above, it is believed, that Lighthouse has infringed and does continuously infringe the
10 amended '983 patent.

11 **31)** It is believed, that the Defendant, including but not limited to their employee(s),
12 is/are the subscriber(s)/recipient(s) of the "CleanRooms" magazine for a very long time.
13 The brief description (with the patent number, inventor's name, and inventor's location
14 [city, state]) of the Yufa's '983 patent has been published in "CleanRooms", "The
15 Magazine of Contamination Control Technology", Volume 16, No. 6, June 2002. [The
16 mentioned magazine and/or the copy(ies) of the appropriate page(s) are available and
17 can be presented, as the exhibit(s), upon request and/or necessity].

18 **32)** Lighthouse has been earlier informed and had a knowledge of the Yufa's '983
19 patent.

20 **33)** Therefore, it is believed in the Defendant's willful infringement of the amended '983
21 patent.

22 **34)** As a result, the Defendant's products directly infringe (by manufacturing (making),
23 using, selling, and offering for sale) the claims claimed in the amended '983 patent, as
24 well as inducing infringement and/or contributing to infringement of the amended '983
25 patent, has caused the Plaintiff's substantial monetary income damages (losses), and
26 emotional distress.

27
28

Claim I

CLAIM FOR DIRECT INFRINGEMENT OF THE AMENDED '983 PATENT

1
2
3 35) Plaintiff re-alleges and incorporates herein by this reference thereto the allegations
4 set forth in paragraphs 1) through 34).

5 36) Upon information, evidences and belief, Lighthouse has directly infringed and
6 continue infringe the claims of the amended '983 patent by manufacturing (making),
7 using, selling,

8 37) Upon information, evidences and belief, Lighthouse has willfully directly infringed
9 and continue willfully directly infringe the claims of the amended '983 patent by
10 manufacturing (making), using, selling, and offering for sale.

11 38) Upon information, evidences and belief, Lighthouse has caused the damages by the
12 continued direct infringement, in the amount specified/accounted by jury/Court.

13 39) Upon information, evidences and belief, Lighthouse has willfully caused the
14 damages by the continued direct infringement, in the treble amount specified/accounted
15 by jury/Court.

16 40) Upon information, evidences and belief, the Lighthouse continues and will continue
17 direct infringement unless this Court restrains Lighthouse's infringing activity by final
18 injunction.

19 41) Upon information, evidences and belief, Plaintiff is entitled for award of cost,
20 expenses, and interest, computed on the damages, in this action.

21 42) Upon information, evidences and belief, Plaintiff is entitled for award of attorney's
22 fees, and cost, expenses, and interest, computed on the damages, in this action
23 sufficiently warranted by willful infringement exceptional case.

24
25 Claim II

26 CLAIM FOR INDUCING INFRINGEMENT OF THE AMENDED '983 PATENT

27 43) Plaintiff re-alleges and incorporates herein by this reference thereto the allegations
28 set forth in paragraphs 1) through 42).

1 44) Upon information, evidences and belief, Lighthouse has induced and continue the
2 inducement of the infringement of the claims of the amended '983 patent.

3 45) Upon information, evidences and belief, Lighthouse has willfully induced and
4 continue willful inducement of the infringement of the claims of the amended '983
5 patent.

6 46) Upon information, evidences and belief, Lighthouse has caused the damages by the
7 continued inducement of the infringement, in the amount specified/accounted by
8 jury/Court.

9 47) Upon information, evidences and belief, Lighthouse has willfully caused the
10 damages by the continued inducement of the infringement, in the treble amount
11 specified/accounted by jury/Court.

12 48) Upon information, evidences and belief, the Lighthouse continues and will continue
13 inducement of the infringement unless this Court restrains Lighthouse's infringing
14 activity by final injunction.

15 49) Upon information, evidences and belief, Plaintiff is entitled for award of cost,
16 expenses, and interest, computed on the damages, in this action.

17 50) Upon information, evidences and belief, Plaintiff is entitled for award of attorney's
18 fees, and cost, expenses, and interest, computed on the damages, in this action
19 sufficiently warranted by willful infringement exceptional case.
20

21 **Claim III**

22 **CLAIM FOR CONTRIBUTING INFRINGEMENT OF THE AMENDED '983**

23 **PATENT**

24 51) Plaintiff re-alleges and incorporates herein by this reference thereto the allegations
25 set forth in paragraphs 1) through 50).

26 52) Upon information, evidences and belief, Lighthouse has contributed and continue
27 contribution to infringement of the claims of the amended '983 patent.

28 53) Upon information, evidences and belief, Lighthouse has willfully contributed and

1 continue willful contribution to infringement of the claims of the amended '983 patent.

2 **54)** Upon information, evidences and belief, Lighthouse has caused the damages by the
3 continued contribution to infringement, in the amount specified/accounted by jury/Court.

4 **55)** Upon information, evidences and belief, Lighthouse has willfully caused the
5 damages by the continued contribution to infringement, in the treble amount
6 specified/accounted by jury/Court.

7 **56)** Upon information, evidences and belief, the Lighthouse continues and will continue
8 contribution to infringement unless this Court restrains Lighthouse's infringing activity
9 by final injunction.

10 **57)** Upon information, evidences and belief, Plaintiff is entitled for award of cost,
11 expenses, and interest, computed on the damages, in this action.

12 **58)** Upon information, evidences and belief, Plaintiff is entitled for award of attorney's
13 fees, and cost, expenses, and interest, computed on the damages, in this action
14 sufficiently warranted by willful infringement exceptional case.

15
16 **Claim IV**

17 **CLAIM FOR EMOTIONAL DISTRESS**

18 **59)** Plaintiff re-alleges and incorporates herein by this reference thereto the allegations
19 set forth in paragraphs 1) through 58).

20 **60)** Upon information, evidences and belief, Lighthouse has caused the emotional
21 distress of Plaintiff, by misrepresentation of the Plaintiff's achievements as Defendants'
22 achievements, and thereby, caused the damage in the amount specified/assessed by
23 jury/Court.

24 **61)** Upon information, evidences and belief, Plaintiff is entitled for award of attorney's
25 fees, and cost, expenses, and interest, computed on the damages, in this action.

PRAYER FOR RELIEF

1
2 WHEREFORE, Plaintiff prays for and demands a judgment against Defendants as
3 follows:

- 4 A. For final injunction against continued infringement;
- 5 B. For literal and/or under the doctrine of equivalents infringement of the patent-in-suit;
- 6 C. For finding of direct infringement of the patent-in-suit by making, using, selling,
7 offering for sale;
- 8 D. For finding of inducing infringement of the patent-in-suit;
- 9 E. For finding of contributing to infringement of the patent-in-suit;
- 10 F. For determination that this is an exceptional case;
- 11 G. For finding of willful infringement of the patent-in-suit pursuant to 35 U.S.C. §284.
- 12 H. For finding of willful direct infringement of the patent-in-suit;
- 13 I. For finding of willful inducing infringement of the patent-in-suit;
- 14 J. For finding of willful contributing to infringement of the patent-in-suit;
- 15 K. For damages caused by the continued infringement, in the amount
16 specified/accounted by jury/Court;
- 17 L. For trebled damages caused by knowing and willful infringement;
- 18 M. For award of attorney's fees in this action sufficiently warranted by willful
19 infringement exceptional case pursuant to 35 U.S.C. §285;
- 20 N. For award of cost and expenses in this action.
- 21 O. For interest on the damages computed;
- 22 P. The Court enjoin Defendants, and its officers, president(s), directors, agents, servants,
23 employees, and attorneys, their divisions, associated entities, distributors, resellers,
24 and all others acting in privity or concert with them, from further infringing,
25 contributing to, and/or inducing infringement of the patents-in-suit.
- 26 Q. For emotional distress caused by misrepresentation of the Plaintiff's achievements as
27 the Defendants' achievements;
- 28 R. For damage caused by emotional distress, in the amount specified/assessed by


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

jury/Court;

S. For such other and further relief as the Court deems just and proper.

JURY TRIAL DEMANDED

December 10, 2012

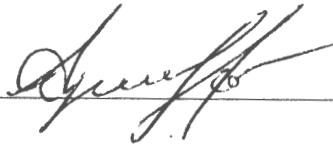


Aleksandr L. Yufa, Ph.D.
Plaintiff IN PRO-SE

DEMAND FOR JURY TRIAL

Pursuant Federal Rule of Civil Procedure 38, Plaintiff respectfully requests (demands) a jury trial as to all issues triable thereby.

Respectfully submitted:

December 10, 2012

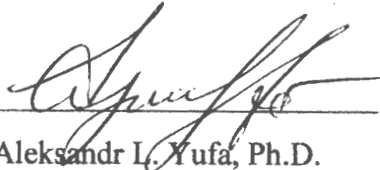

Aleksandr L. Yufa, Ph.D.

Plaintiff IN PRO-SE

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

EXHIBIT A



US006346983B1

(12) **United States Patent**
Yufa

(10) Patent No.: **US 6,346,983 B1**
(45) Date of Patent: **Feb. 12, 2002**

(54) **METHODS AND WIRELESS COMMUNICATING PARTICLE COUNTING AND MEASURING APPARATUS**

(76) Inventor: Aleksandr L. Yufa, P.O. Box 1677, Colton, CA (US) 92324

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 09/015,458

(22) Filed: Jan. 29, 1998

(51) Int. Cl.⁷ G01N 21/53

(52) U.S. Cl. 356/338; 356/338

(58) Field of Search 356/336, 338, 356/339, 437, 438, 439

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 4,160,246 A * 7/1979 Martin et al. 356/438
- 4,798,465 A 1/1989 Knollenberg 356/73
- 5,524,129 A 6/1996 Pettigrew 377/6


5,751,424 A * 5/1998 Bostater 356/342
* cited by examiner

Primary Examiner—Richard A. Rosenberger

(57) **ABSTRACT**

An improved methods and apparatus for particle counting and measuring provide the counting and measuring of the airborne (gas) particle and/or liquid contamination and include a remote sensor 5, wireless communicating with a data processing and control system 13, comprising a micro-processor system 27 and a wireless communication means 56, comprising a transmitting-receiving means 58 connected to an aerial means 57. The sensor system 5 includes a particle detecting system 4, providing the sensing a light created by an intersection of the particles with a light beam within particle monitoring region of the particle detecting system 4, particle detection and timing processing of the detected signals, and a wireless communication means 36 intended for wireless communication with the data processing and control system 13, providing a received data processing, illuminating of the resulting information and also providing a wireless communicating control of the sensor 5.

8 Claims, 9 Drawing Sheets

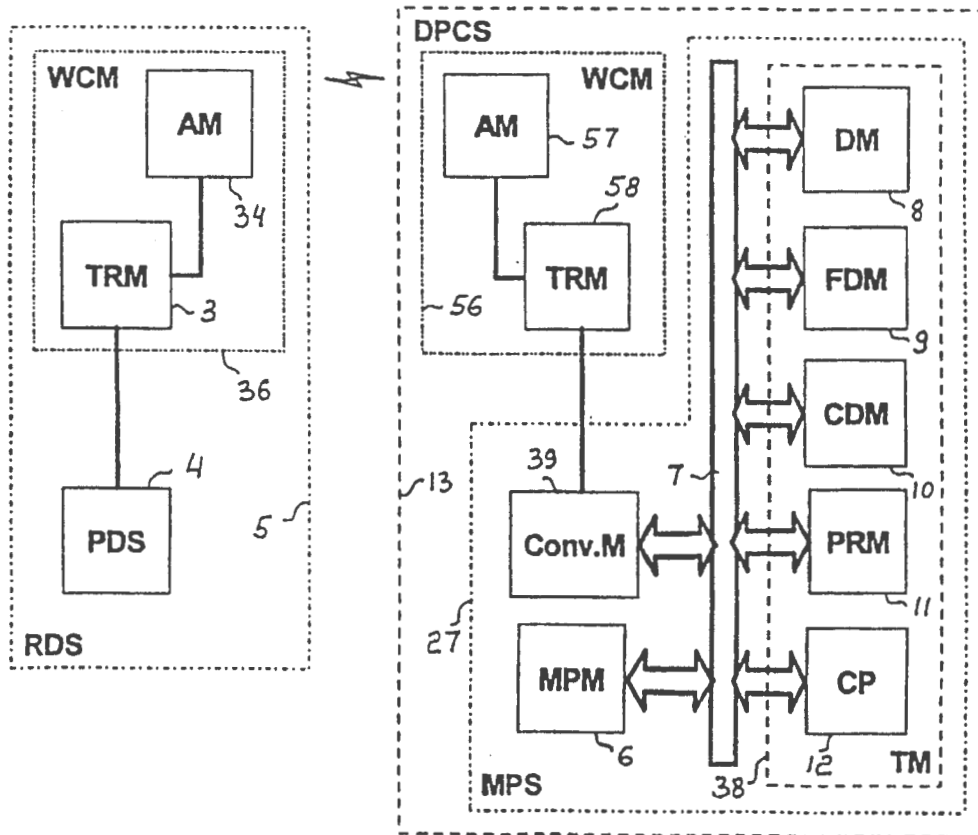

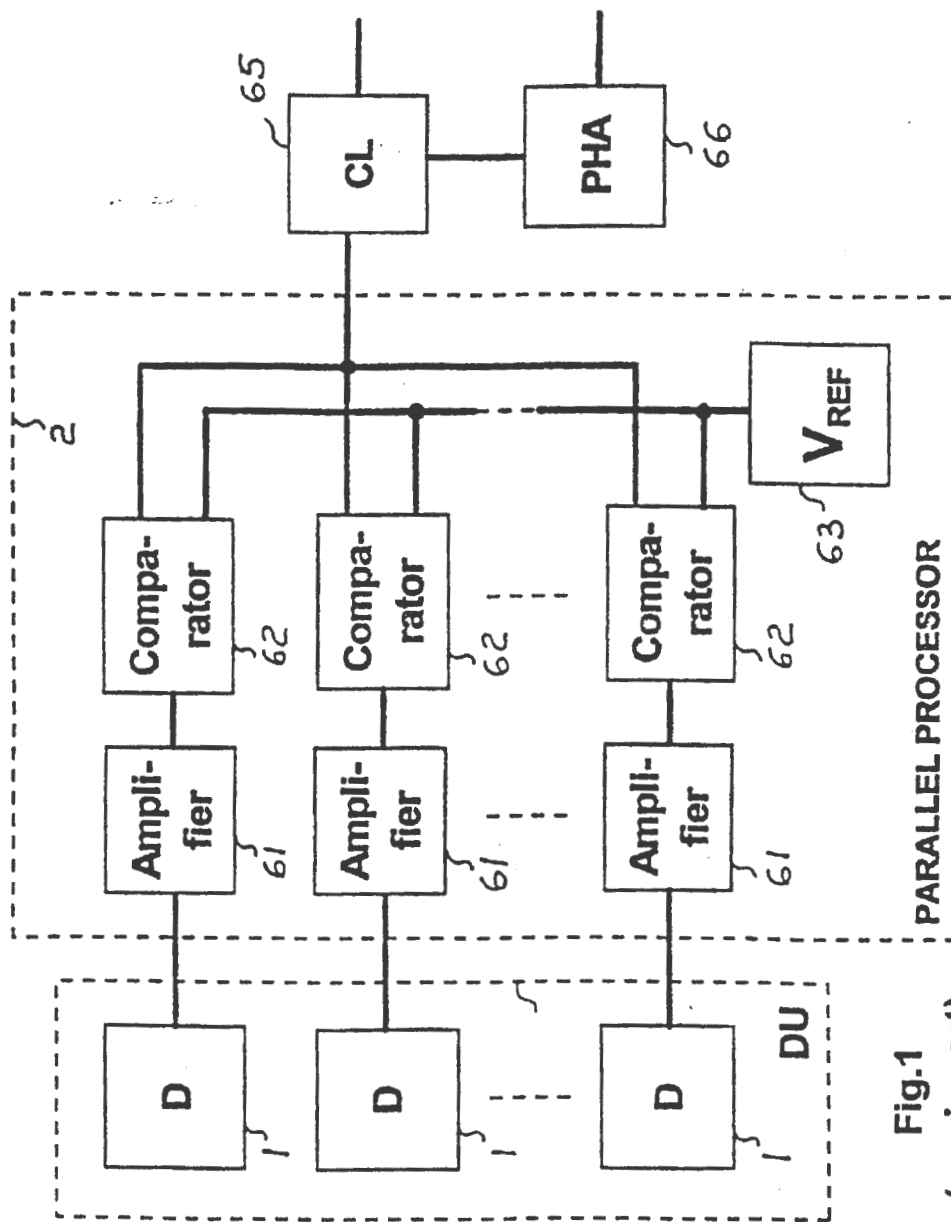


Fig.1
(a prior art)

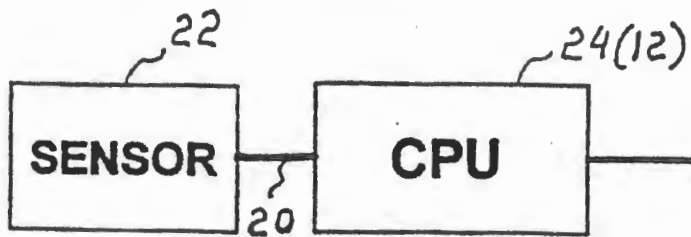


Fig. 2
(a prior art)

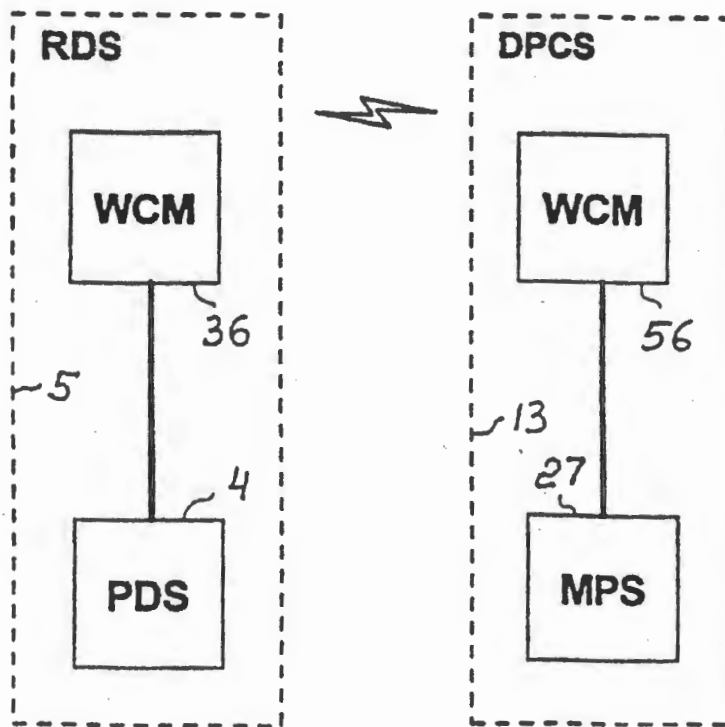


Fig. 3

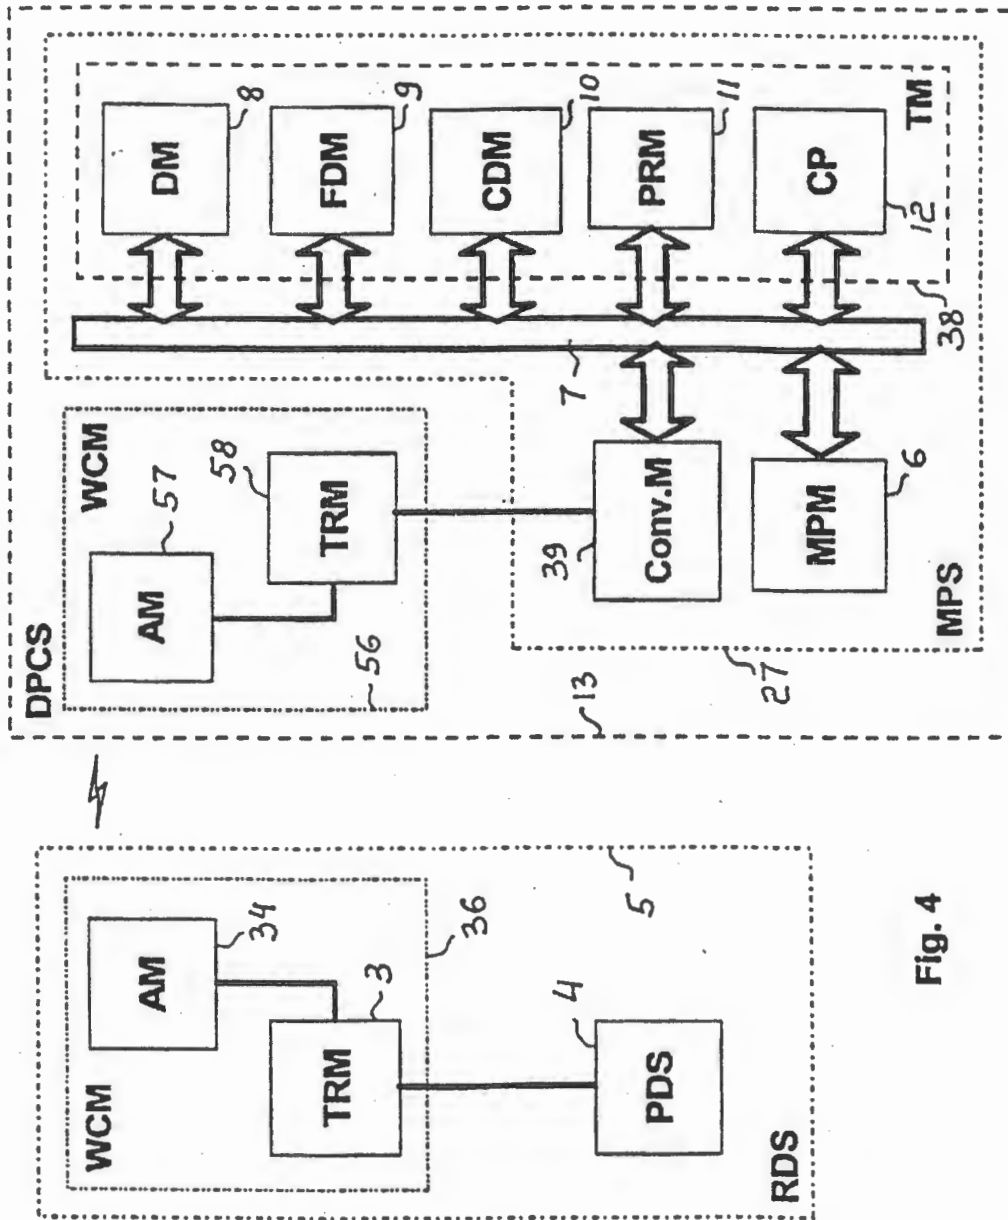


Fig. 4

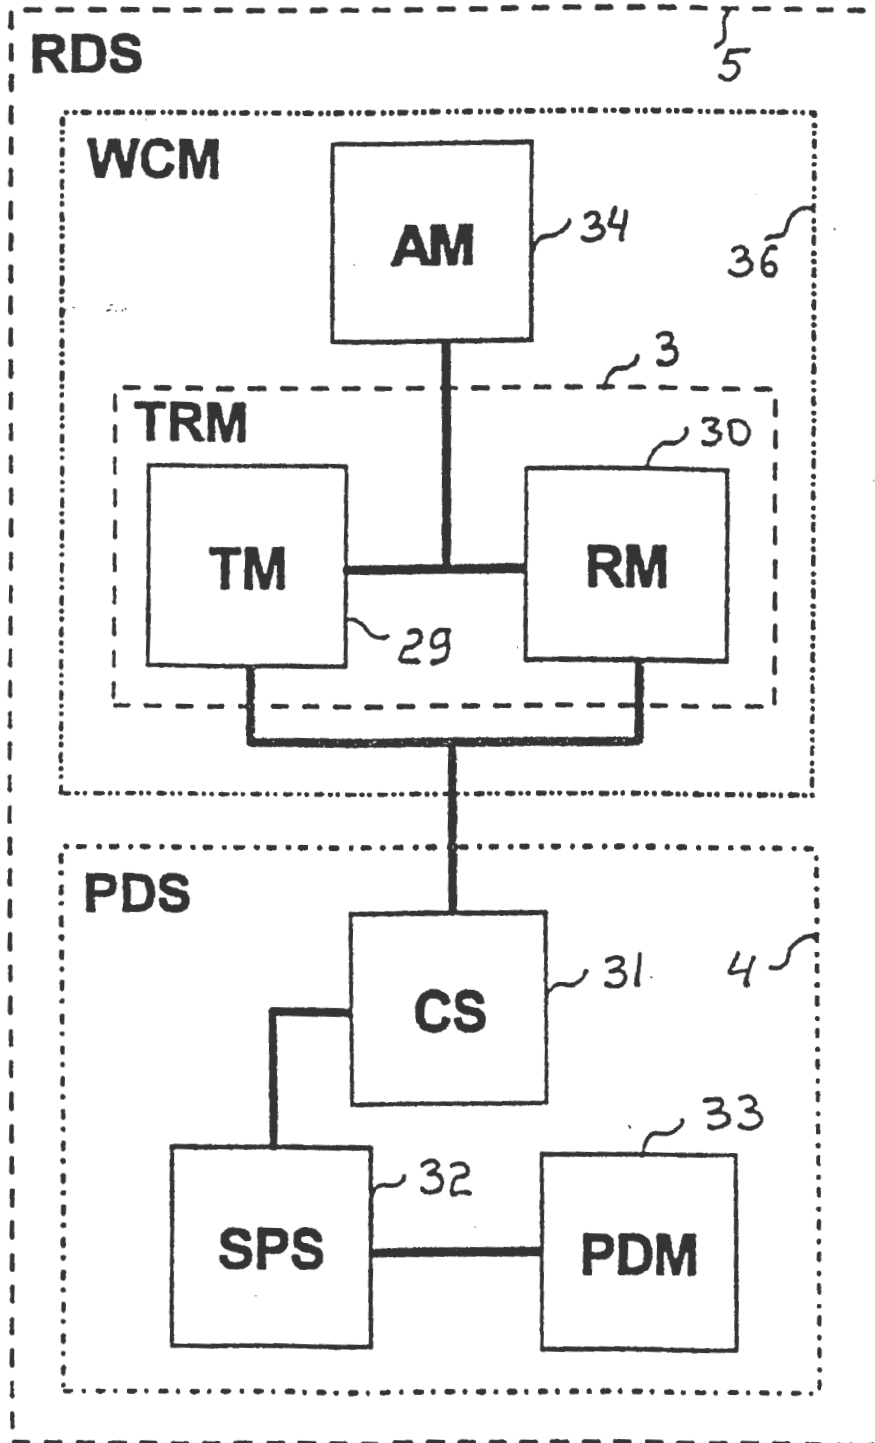


Fig. 5

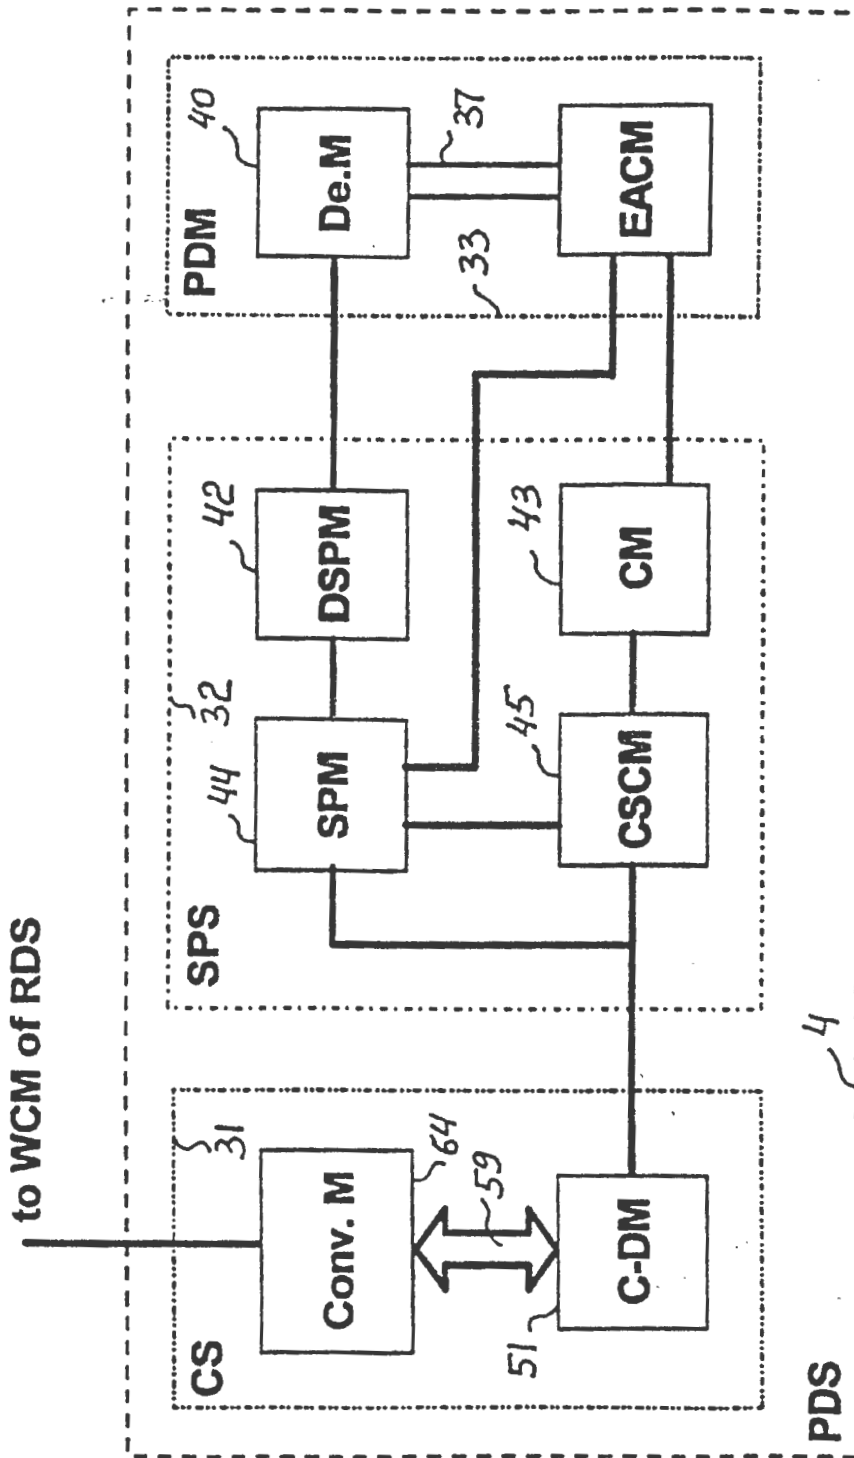


Fig. 6

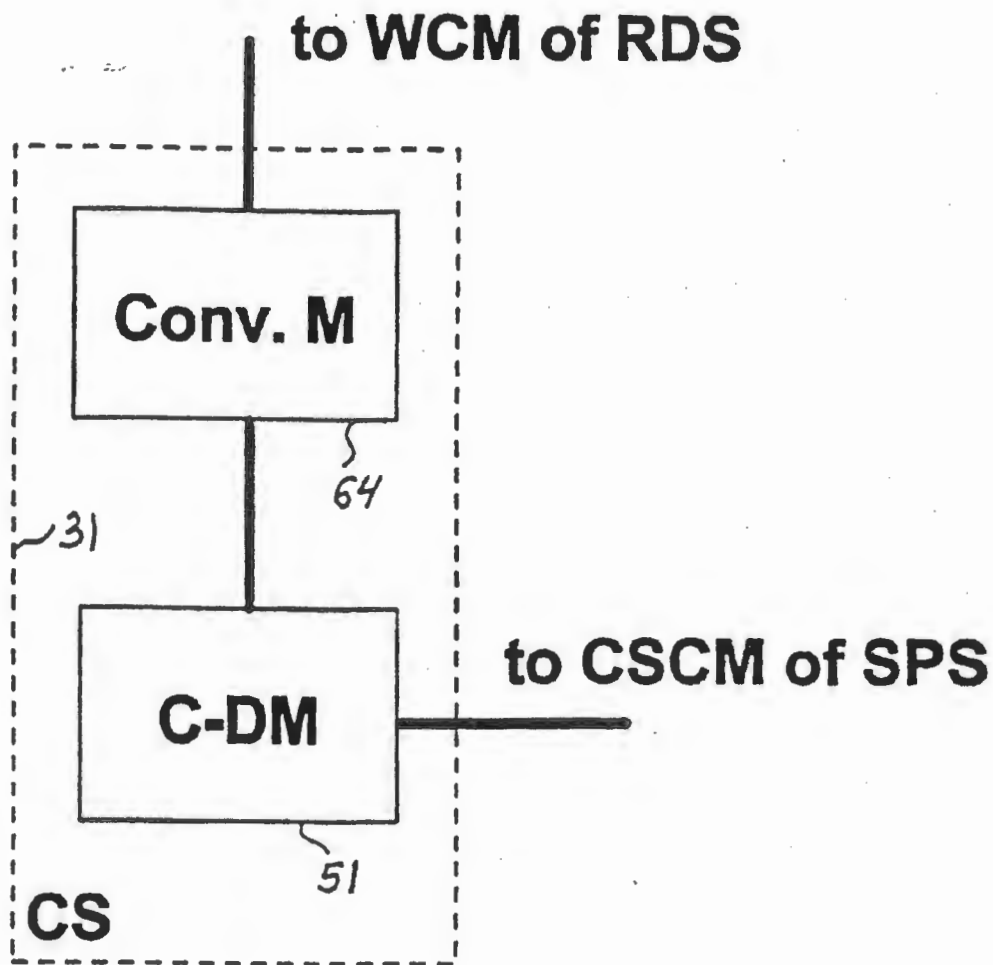


Fig.7

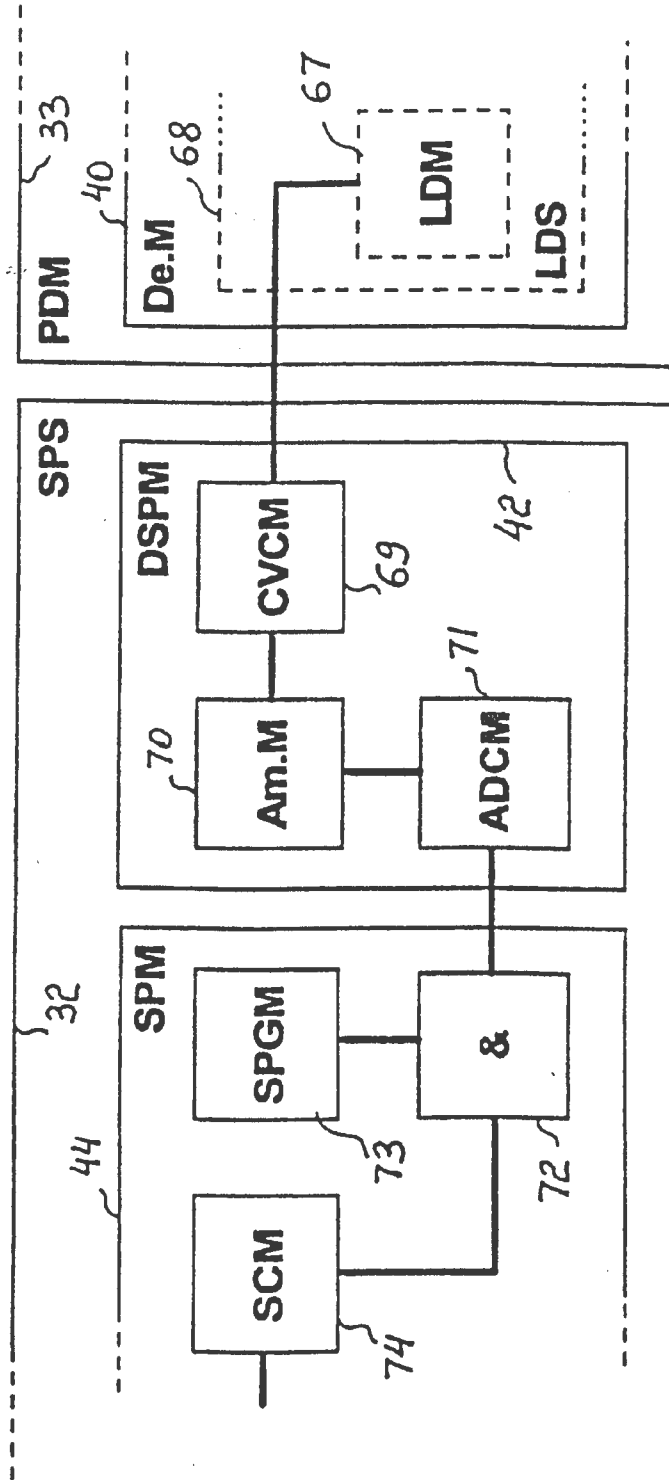


Fig.8

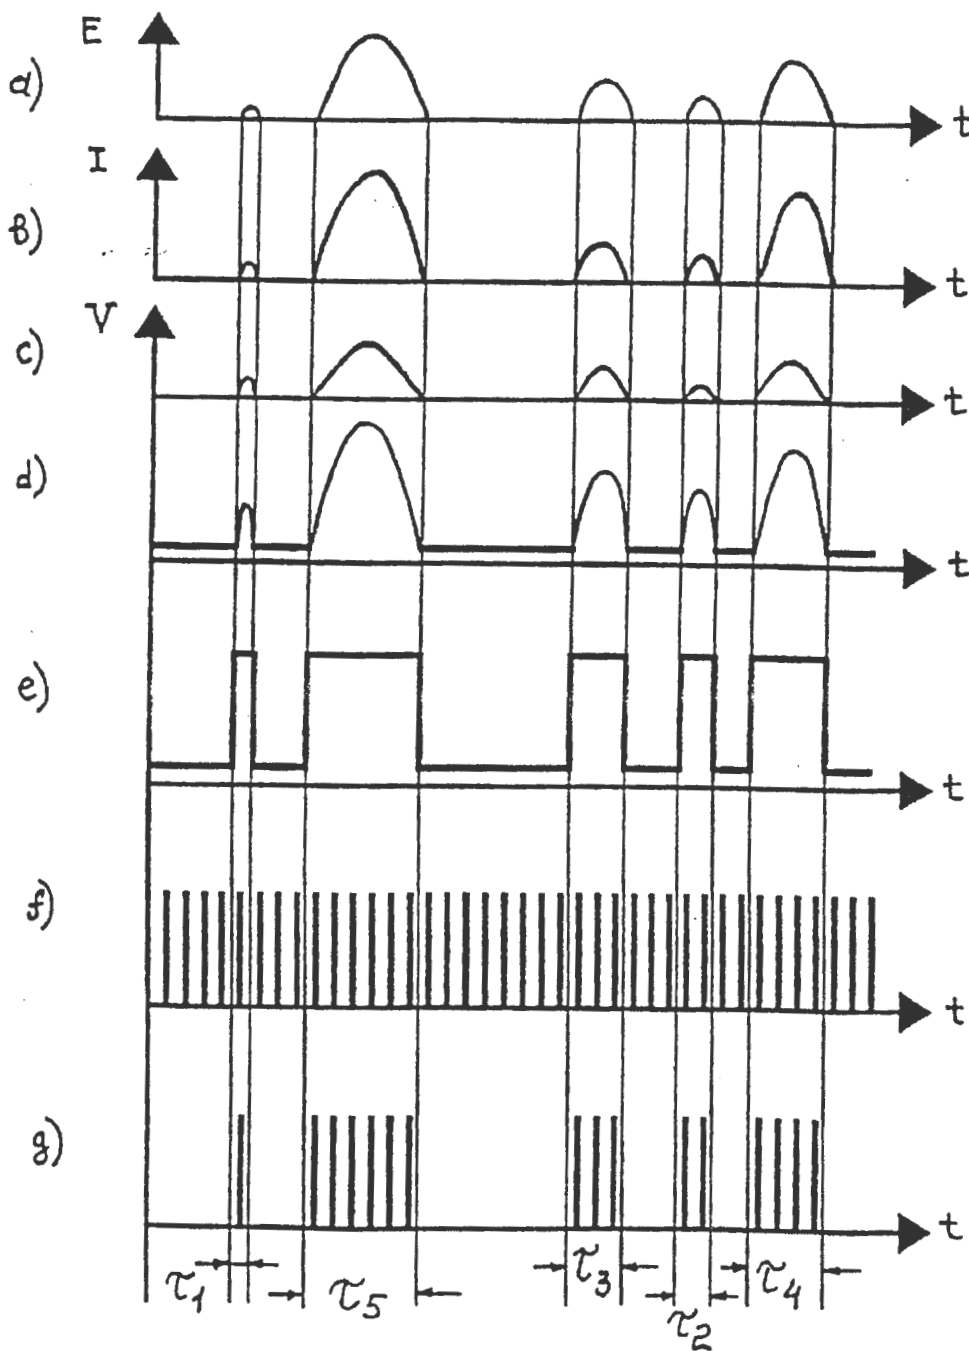


Fig.9

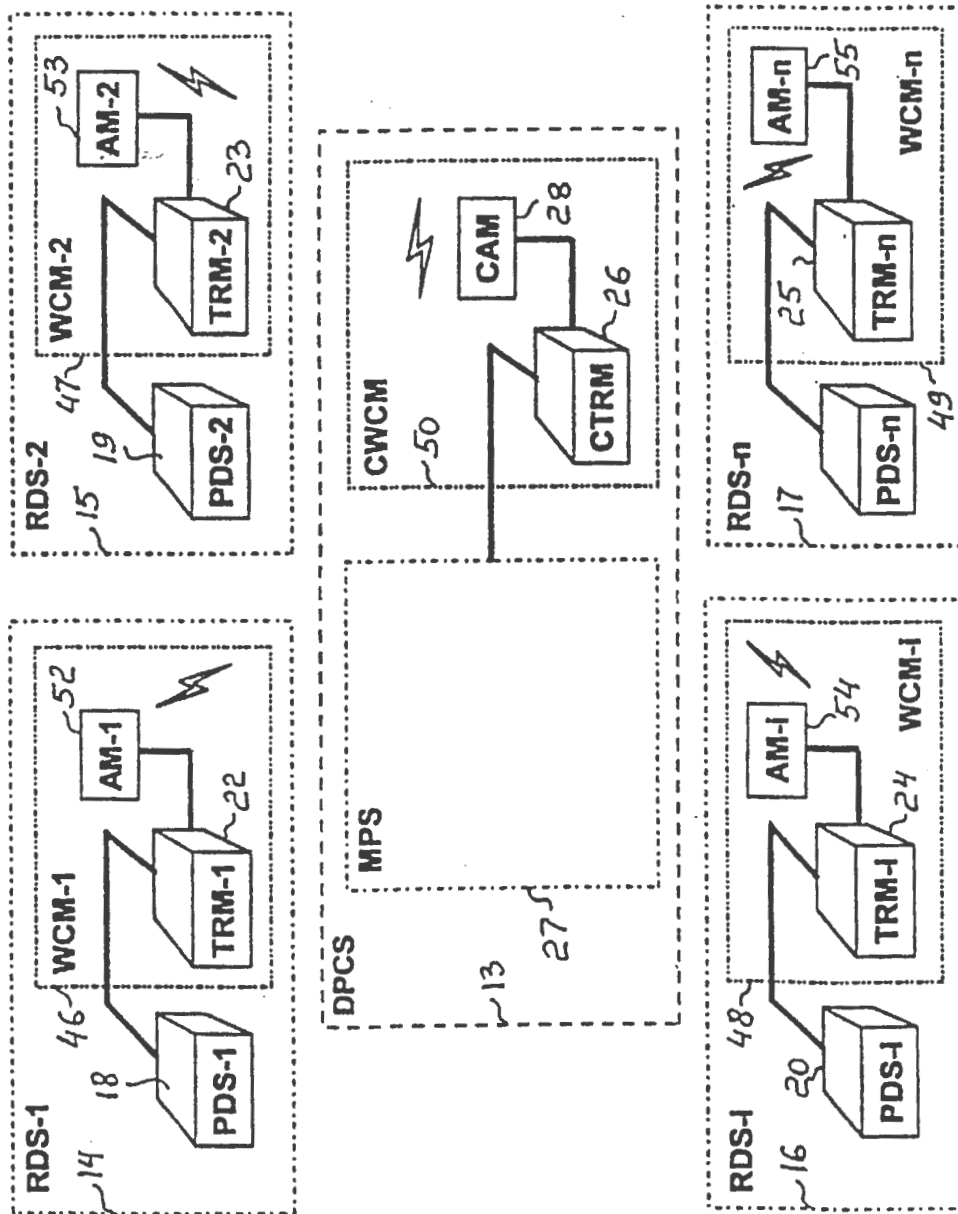


Fig. 10

US 6,346,983 B1

1

**METHODS AND WIRELESS
COMMUNICATING PARTICLE COUNTING
AND MEASURING APPARATUS**

FIELD OF THE INVENTION

This invention relates to air, gas and liquid quality and, more particularly, to devices, apparatus and instruments for airborne (gas) particle and/or liquid contamination quantity counting and particle size measuring by light (laser) beam.

BACKGROUND OF THE INVENTION

The methods and devices for determining quantity and size of the particles and/or liquid (water) contaminations are now well known, and it is also well known that powerful light or laser and detecting system can be, and have been used to achieve particle size and particle quantity measurements. Such devices, mostly using or computers, are well known and described, for example, in the articles: R. G. Knollenberg, B. Schuster—"Detection and Sizing of Small Particles in Open Cavity Gas Laser," *Applied Optics*, Vol. 11, No. 7, November 1972, pp. 1515-1520; R. G. Knollenberg—"An Active Scattering Aerosol Spectrometer," *Atmospheric Technology*, No. 2, June 1973, pp. 80-81; Schehl, Ergun, Headrick—"Size Spectrometry of Aerosols Using Light Scattering from the Cavity of a Gas Laser," *Review of Scientific Instruments*, Vol. 44, No. 9, September 1973; R. G. Knollenberg—"Active Scattering Aerosol Spectrometry," *National Bureau of Standards Special Publication*, No. 412, October 1974, pp. 57-64; R. G. Knollenberg, R. E. Luehr—"Open Cavity Laser Active Scattering Particle Spectrometry from 0.05 to 5.0 Microns," *Fine Particles, Aerosol Generation Measurement, Sampling and Analysis*, Academic Press, May 1975, pp. 669-696; R. G. Knollenberg—"Three New Instruments for Cloud Physics Measurements: The 2-D Spectrometer, the Forward Scattering Spectrometer Probe, and the Active Scattering Aerosol Spectrometer," *American Meteorological Society, International Conference on Cloud Physics*, July 1976, pp. 554-561; R. G. Knollenberg—"The Use of Low Power Laser in Particle Size Spectrometry", *Proceeding of the Society of Photo-Optical Instrumentation Engineers, Practical Applications of Low Power Lasers*, Vol. 92, August 1976, pp. 137-152; Elterman—"Brewster Angle Light Trap," *Applied Optics*, Vol. 16, No. 9, September 1977; Marple—"The Aerodynamics Size Calibration of Optical Particle Counters by Inertial Impactors," *Aerosol Measurement*, 1979; Diehl, Smith, Sydor—"Analysis by Suspended Solids by Single-Particle Scattering," *Applied Optics*, Vol. 18, No. 10, May 1979; K. Suda—"Review of Scientific Instruments", Vol. 51, No. 8, August 1980, pp. 1049-1058; R. G. Knollenberg—"The Measurement of Particle Sizes Below 0.1 Micrometers", *Journal of Environment Science*, January-February, 1985, pp. 64-67; Peters—"20 Good Reasons to Use In Situ Particle Monitors", *Semiconductor International*, Nov. 1992, pp. 52-57 and Busselman et al.—"In Situ Particle Monitoring in a Single Wafer Poly Silicon and Silicon Nitride Etch System", *IEEE/SEMI Int'l Semiconductor Manufacturing Science Symposium*, 1993, pp. 20-26.

The reference in these articles is made to the devices and methods of particle measurement, utilizing an open cavity laser for particle detection.

The known devices, having the particle detecting means are based on the scattered light collection, as it is mentioned, for example, in U.S. Pat. No. 4,140,395, U.S. Pat. No. 4,798,465, U.S. Pat. No. 5,467,189 and in 5,515,164 of the prior art.

2

For example, in U.S. Pat. No. 4,140,395 and in U.S. Pat. No. 4,798,465 of the prior art are used the imaging systems, which are based on lenses.

Yet in other prior art (for example, such as U.S. Pat. No. 5,467,189 and U.S. Pat. No. 5,515,164) we can find the devices (sensors) with ellipsoidal mirrors instead of the lens systems or non-divergent quadric mirrors.

All these devices, mentioned in the prior art above, use light scattering focalizing methods. Such methods are based on the collection of the scattered light. A light scattering occurs at the first focal point (focus) by intersecting. Considering stochastic processes of the light scattering, the devices, mentioned in the above prior art, use mirrors or optics. This is necessary for scattered light, collecting and focalizing at the second focal point (focus), where a light detector is placed and intended for scattered light detection.

Further the devices, based on scattered light collection and some other detection methods (for example, by light splitting), use a different variations of the comparison method for the particle size measuring. Such method can be illustrated (see FIG. 1), for example, by U.S. Pat. No. 4,798,465. On FIG. 1 is shown the particle size detection device, using one of the particle measuring comparison method variations. The signal from detectors 1 via the amplifiers 61 follow to the comparators 62, which is connected to the reference voltage means 63. The amplified detected signals are compared with the predetermined reference voltages for the particle size qualifying.

Such methods cannot provide light the sufficiently light the sensitivity related to the increasing requirements to the particle counting and measuring devices, because of the analog (amplitude) method of comparison.

Another and also important deficiency of all known particle analyzing devices is the use of the wire leads (cable) for the particle detecting means connection to the data processing means.

The devices, using the wire (cable) connection of the particle detecting, means to the data processing and control system, are presented by two styles of their configuration: a portable configuration of the particle analyzing device, which is an entire unit comprising particle detecting means (sensor) connected by short wires (short cable) to the microprocessor means, or a remote sensor configuration of the particle analyzing device, wherein, for example, the sensor and the data processing means are represented by two separated and remote of each other units connected by long wires (long cable).

On FIG. 2 is shown, for example, a device (see U.S. Pat. No. 5,524,129) with the wire (cable) connection 20 of the sensor 22 with the microprocessor (CPU) 24(12).

It is known, that all wire (cable) connections in electronic apparatus are a source of the electromagnetic noise, which can create a distortion of the signals. Also the portable devices require local operation with them and exactly in the place of the airborne particle or liquid (water) contaminations assaying. The devices with long cable connection between the remote sensor and the data processing means have a limited mobility, because of cable.

Other known devices by U.S. Pat. Nos. 4,160,246 and 5,751,424 intended for the smoke detection and liquid mixture, gas or solid medium analysis respectively. The smoke detector by U.S. Pat. No. 4,160,246 does not provide the counting and measuring of the particles in the specimen and uses the analog processing of the signals. The probe by U.S. Pat. No. 5,751,424 does not provide the analysis of the airborne particle. Also these devices use one-way wireless

US 6,346,983 B1

3

communication for the data transmission only and do not provide the wireless transmission of the control commands/signals (automatic modes of turn-on/turn-off, switching of the particle size counting scale, etc.), requiring the handle control of the remote unit.

For example, it is known, that integrated circuits (chips) and semiconductors have been produced in "clean rooms". The air in such "clean rooms" should be very well cleaned. The continuing tendencies of improvement in circuit integration and degree of microminiaturization require corresponding improvements of the environment in "clean rooms" and efficiency and sensitivity of the measuring devices. And now, as it is known, the sensitivity of the counting and measuring devices should be at least as small as 0.1 μm (Micron). Such rate requires minimum distortions in the data processing signals. Also the measurements should be done in the different places of the semiconductor production areas of "clean rooms" and sometimes in the areas, which could be difficult to approach. The same is regarding the pharmaceutical and biological industries, where is required the well condition of the environment.

Thus, the comparison method of the particle size measuring (an analog comparison of the detected signal amplitudes with the appropriate reference voltages) and the wire (cable) connections between the sensors (particle detecting means) and create an insufficient signal to noise ratio, thereby limiting the sensitivity and efficiency of the particle counting and measuring devices. Also such wire (cable) connection, using in the known particle counting and measuring devices with the known devices with the remote sensors, limits the mobility of the particle counting and measuring instruments. Another known system by U.S. Pat. No. 4,160,246, intended for the smoke detection, comprises an infrared radiation source, photodetector, the frequency filters, audio amplifiers, annunciator driver, a plurality of light-emitting diodes (LED) and a horn or buzzer. This device uses a wireless communication (from the smoke detector/transmitter to the receiver/annunciator). Such smoke detector system does not provide counting and measuring of the particles in the specimen. Also the device by U.S. Pat. No. 4,160,246 provides the analog processing of the signals.

OBJECT AND ADVANTAGES OF THE INVENTION

Accordingly, several objects and advantages of the present invention are to provide an improved methods and apparatus for airborne (gas) particle and/or liquid (water) contamination analysis.

It is the object of the invention to provide an improved method and apparatus for increasing the sensitivity of the particle counting and measuring means.

It is another object of the invention to provide an improved methods and apparatus for increasing the efficiency of the analyzing processes and means.

It is yet another object of the invention to provide an improved method and apparatus for decreasing electromagnetic noises by the elimination of wire (cable) connection between particle detecting means (sensors) and data processing means.

It is still further an object of the invention to provide an improved method and apparatus for increasing the authenticity of the information about air or liquid (water) composition.

It is still another object of the invention to provide an improved method and apparatus for increasing the mobility,

4

compactness and convenient placement possibility of the remote detecting means.

Still, further objects and advantages will become apparent from a consideration of the ensuing description accompanying drawings.

DESCRIPTION OF THE DRAWING

FIG. 1 is a presentation of the particle size detecting device (a prior art).

FIG. 2 is a presentation of portable counter (a prior art).

FIG. 3 is a presentation of the simplified structural schematic of an improved apparatus.

FIG. 4 is a presentation of the simplified detailed block-schematic of an improved apparatus.

FIG. 5 is a presentation of the simplified block-schematic of the remote detecting system of an improved apparatus.

FIG. 6 is a presentation of the simplified block-schematic of the particle detecting system of an improved apparatus.

FIG. 7 is a presentation of the simplified block-schematic of the conversion system of an improved apparatus.

FIG. 8 is the presentation of the simplified block-schematic of an improved apparatus portion, providing a timing a strobing processes.

FIG. 9 is a timing diagram.

FIG. 10 is a presentation of the simplified structural schematic of an improved wireless communication apparatus (complex).

On FIG. 1 are shown: 1—the detectors (D); 60—a detection unit (DU); 61—the amplifiers; 62—the comparators; 63—a reference voltage means (VREF); 65—a control logic; 66—a pulse height analyzer.

On FIG. 2 are shown: 35—a wire (cable); 75—a sensor; 76—a microprocessor (CPU).

On FIG. 3 are shown: 4—a particle detecting system (PDS); 5—a remote detecting system (RDS); 13 a data processing and control system (DPCS); 27—a microprocessor system (MPS); 36—a wireless communication means (WCM) of the remote detecting system 5; 56—a wireless communication means (WCM) of the data processing and control system 13.

On FIG. 4 are shown: 3—a transmitting-receiving means (TRM) of the wireless communication means 36; 4—a particle detecting system; 5—a remote detecting system; 6—a microprocessor means (MPM); 7—a multiplexed bus of the data processing and control system 13; 8—a displaying means (DM); 9—a floppy disk means (FDM); 10—a compact disk means (CDM); 11—a printing means (PRM); 12—a control panel (CP); 13—a data processing and control system; 27—a microprocessor system; 34—an aerial means (AM) of the wireless communication means 36; 36—a wireless communication means of the remote detecting system 5; 38—a terminal means (TM); 39—a conversion means (Conv.M) of the microprocessor system 27; 56—a wireless communication means of the data processing and control system 13; 57—an aerial means of the wireless communication means 56; 58—a transmitting-receiving means of the wireless communication means 56.

On FIG. 5 are shown: 3—a transmitting-receiving means of the wireless communication means 36; 4—a particle detecting system; 5—a remote detecting system; 29—a transmitting means (TM); 30—a receiving means (RM); 31—a conversion system (CS); 32—a signal processing system (SPS); 33—a particle detecting means (PDM); 34—an aerial means of the wireless communication means

US 6,346,983 B1

5

36; 36—a wire less communication means of the remote detecting system 5.

On FIG. 6 are shown: 31—a conversion system; 32—a signal processing system; 33—a particle detecting means; 37—a tubular means; 40—a detection means (De.M); 41—an environment assaying control means (EACM); 42—a detected signal processing means (DSPM); 43—a control means (CM); 44—a signal processing means (SPM); 45—a control signal conversion means (CSCM); 51—a coding-decoding means (C-DM); 59—a multiplexed bus of the remote detecting system 5; 64—a conversion means (Conv.M) of the conversion system 31.

On FIG. 7 are shown: 31—a conversion system; 51—a coding-decoding means; 64—a conversion means of the conversion system 31.

On FIG. 8 are shown: 32—signal processing system; 33—a particle detecting system; 40—a detection means; 42—a detected signal processing means; 44—a signal processing means; 67—a light detecting means (LDM); 68—a light detecting system (LDS); 69—a current-voltage conversion means (CVCM); 70—an amplifying means (Am.M); 71—an analog digital form pulse duration conversion means (ADCM); 72—a conjunction means (&); 73—a strobe pulse generating means (SPGM); 74—a selecting, sorting and counting means (SCM).

On FIG. 10 are shown: 13—a data processing and control system; 14—a first remote detecting system (RDS-1); 15—a second remote detecting system (RDS-2); 16—an i-th remote detecting system (RDS-i); 17—a n-th remote detecting system (RDS-n); 18—a particle detecting system the (PDS-1) of the first remote detecting system 14; 19—a particle detecting system (PDS-2) of second remote detecting system 15; 20—a particle detecting system (PDS-i) of the i-th remote detecting system 16; 21—a particle detecting system (PDS-n) of the n-th remote detecting system 17; 22—a transmitting-receiving means (TRM-1) of the first remote detecting system 14; 23—a transmitting-receiving means (TRM-2) of the second remote detecting system 15; 24—a transmitting-receiving means (PDS-i) of the i-th remote detecting system 16; 25—a transmitting-receiving means (PDS-n) of the n-th remote detecting system 17; 26—a central transmitting-receiving means (CORM); 27—a microprocessor system; 28—a central aerial means (CAM); 46—a wireless communication means (WCM-1) of the first remote detecting system 14; 47—a wireless communication means (WCM-2) of the second remote detecting system 15; 48—a wireless communication means (WCM-i) of the i-th remote detecting system 16; 49—a wireless communication means (WCM-n) of the n-th remote detecting system 17; 50—a central wireless communication means (CWCM); 52—an aerial means (AM-1) of the first remote detecting system 14; 53—an aerial means (AM-2) of the second remote detecting system 15; 54—an aerial means (AM-i) of the i-th remote detecting system 16; 55—an aerial means (AM-n) of the n-th remote detecting system 17.

SUMMARY OF THE INVENTION

The invention provides a methods and wireless communicating apparatus particle counting and measuring, having a wireless communication means, intended for two-way communication of the remote particle detecting system(s) with a data processing and control system.

The improved method and device of the particle analyzing provide an airborne (gas) particle and/or liquid contamination counting and measuring, eliminating an analog comparison of the detected signal amplitudes with the appropri-

6

ate reference voltages and also eliminating the wire (cable), connecting the particle detection system to the data processing and control system. An improved apparatus, realizing the improved methods, includes a remote detecting system, comprising a particle detecting system and a wireless communication means of the remote detecting system, and a data processing and control system, comprising a microprocessor system and a wireless communication means of the data processing and control system. The control signals from a data processing and control system are transmitted by the two-way wireless communication means of the remote data processing and control system to the two-way wireless communication means of the remote detecting system. Further the signals from two-way wireless communication means of the remote detecting system via the appropriate conversion means of the remote detecting system follow to the control means. The control means provide a control (for example, switching operations) of the environment assaying control means (for example, air/liquid pumps, flowmeter, etc.), which by tubular means transfer an assayed composition to the detection means.

The detected signals are amplified, converted to the digital pulse form and strobed by strobe pulses. The selecting, sorting and counting means select and sorts the strobe pulse packages by strobe pulse quantity inside each package and also counts quantity of the strobe pulses within the strobe pulse package (particle size) and quantity of the identical packages (particle quantity).

The initially processed detected signals, containing an information about particle characteristics (size and quantity), are converted in the data, which is transmitted by two-way wireless communication means of the remote detecting system to the wireless communication means of the remote data processing and control system. Further the signals from two-way communication means of the remote data processing and control system via the appropriate conversion means of the remote data processing and control system follow to the microprocessor system for data processing. The processed data is indicated to the operator in the informative form by terminal means (for example, by a display means or by a printing means).

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Here the description of an improved apparatus will be done in statics (as if the components of the improved apparatus are suspended in the space) with description of their relative locations and connections to each other. The description of the improved methods and functional operations of an improved apparatus will be done hereafter.

FIG. 3 illustrates a structure of the wireless communicating apparatus (for counting and measuring particles), including a remote detecting system 5, having a particle detecting system 4 connected to a wireless communication means 36 of the remote detecting system 5, and a data processing and control system 13, having a microprocessor system 27 connected to a wireless communication means 56 of the data processing and control system 13.

FIG. 4 presents the detailed block-schematic of the wireless communicating apparatus for counting and measuring particles, comprising a remote detecting system 5, which includes a particle detecting system 4 and a wireless communication means 36, having an aerial means 34 connected to a transmitting-receiving means 3. The transmitting-receiving means 3 is connected to a particle detecting system 4. Also the wireless communicating apparatus for counting

US 6,346,983 B1

7

and measuring particles comprises a data processing and control system 13, which includes a wireless communication means 56 and microprocessor system 27, having a microprocessor means 6, a conversion means 39 and terminal means 38. The wireless communication means 56 includes an aerial means 57 connected to a transmitting-receiving means 58. The transmitting-receiving means 58 connected to the conversion means 39 of the microprocessor system 27. The terminal means 38 can include a displaying means 8, a floppy disk means 9, a compact disk means 10, a printing means 11 and a control panel 12 (for example, a keyboard), which are connected to each other, to the microprocessor means 6 and to the conversion means 39 by a multiplexed bus 7 (can be used a data bus and an address bus, which are not shown).

Referring to FIG. 5, the remote detecting system (sensor) 5 comprises a particle detecting system 4, having a particle detecting means 33 connected to a signal processing system 32, which is connected to a conversion system 31. Also the remote detecting system 5 comprises a wireless communication means 36, having an aerial means 34 connected to a transmitting means 29 and to a receiving means 30 of the transmitting-receiving means 3. The conversion means 31 of the particle detecting system 4 is connected to the transmitting means 29 and to receiving means 30.

FIG. 6 illustrates the detailed block-schematic of the particle detecting system 4, which comprises a conversion system 31, having a conversion means 64 and a coding-decoding means 51 connected either by a multiplexed bus 59 (can be used a data bus and an address bus—not shown), if the conversion means 64 comprises a buffered memory means (not shown), or by a regular connection, as it is shown on FIG. 7. Also the particle detecting system 4 comprises a signal processing system 32 and a particle detecting means 33. The signal processing system 32 includes a detected signal processing means 42 connected to a signal processing means 44, which is connected to a control signal conversion means 45 and to the coding-decoding means 51 of the conversion system 31. The control signal conversion means 45 is connected to a control means 43 and to the coding-decoding means 51 of the conversion system 31. The particle detecting means 33 includes a detection means 40, connected to the detected signal processing means 42 of the signal processing system 32, and an environment assaying control means 41, which is connected to the control means 43 of the signal processing system 32 and to the signal processing means 44 of the signal processing system 32. Also the environment assaying control means 41 is coupled to the detection means 40 by a tubular means 37.

FIG. 7, as it has been mentioned of the above (see description of the FIG. 6), presents a regular connection (not by a bus) of the conversion means 64 and the coding-decoding means 51 of the conversion system 31.

On FIG. 8 is shown the improved apparatus portion, which realizes the signal timing (digital) processing. Referring to FIG. 8, a light detecting means 67 of the detecting system 68, belonging to the detection means 40, is connected to a current-voltage conversion means 69 (if the primer signals light of the detecting means are presented in the current value). The current-voltage conversion means 69 of the detected signal processing means 42 via an amplifying means 70 is connected to a voltage-pulse duration conversion means 71, which is connected to a conjunction means 72 of the signal processing means 44. The strobe pulse generating means 73 is also connected to the conjunction means 72, which is connected to a selecting, sorting and counting means 74.

8

FIG. 9 presents a timing diagram of the detected signal processing steps, which will be described hereafter.

On the FIG. 10 is presented a structural schematic of the wireless communicating complex for particle counting and measuring, which comprises at least one of a plurality ("N" of (where $N=1, 2, \dots, i, \dots, n$) of remote detecting systems and at least one of a plurality of remote data processing and control system. "N" remote detecting systems are presented on FIG. 10 by: a first remote detecting system 14 (RDS-1), a second remote detecting system 15 (RDS-2), an i-th remote detecting system 16 (RDS-i) and a n-th remote detecting system 17 (RDS-n). A plurality of remote data processing and control systems is presented on FIG. 10 by a single remote data processing and control system 13. The first remote detecting system 14 includes a wireless communication means 46, having a transmitting-receiving means 22 connected to an aerial means 52, and a particle detecting system 18 connected to the transmitting-receiving means 22. The second remote detecting system 15 includes a wireless communication means 47, having a transmitting-receiving means 23 connected to an aerial means 53, and a particle detecting system 19 connected to a transmitting-receiving means 23. The i-th remote detecting system 16 comprises a wireless communication means 48, including a transmitting-receiving means 24 connected to an aerial means 54, and a particle detecting system 20 connected to the transmitting-receiving means 24. The n-th remote detecting system 17 includes a wireless communication means 49, comprising a transmitting-receiving means 25 connected to an aerial means 55, and a particle detecting system 21 connected to the transmitting-receiving means 25. The data processing and control system 13 includes a wireless communication means (a central wireless communication means) 50, having a transmitting-receiving means (a central transmitting-receiving means) 26 connected to an aerial means (a central aerial means) 28, and a microprocessor system 27, which is connected to the transmitting-receiving means 26.

The improved methods of counting and measuring particles provides a wireless transmitting of the control signals from the data processing and control system to the remote detecting system and a wireless transmitting of the data (information), characterizing the detected particle parameters, from a remote detecting system to a data processing and control system.

An improved apparatus operates as follows. The wireless communicating apparatus for analyzing of particles (see FIGS. 3, 4, 10) can operate in the three modes: handle service of the data processing and control system 13 by the operator, using a control panel 12 (see FIG. 4) of the terminal means 38 of the data processing and control system 13; automatically by a priori programmed stages, conditions, regimes and schedule of the operation and/or recorded, for example, on the floppy disk means 9, or on the compact disk means 10 of the microprocessor system 27, or in E-PROM (not shown) of the microprocessor means 6; and the third mode is the different variations of the handle and automatic modes combination.

Regarding the handle mode of the operation, the operator selects the regimes (for example, by control panel 12 from the menu on the displaying means 8) for remote detecting system 5 operation. The control signals from the control panel 12 (see FIG. 4) of the terminal means 38 follow by the multiplexed bus 7 to the microprocessor means 6 of the microprocessor system 27. Referring to automatic mode of the operation, the regimes are selected either by a floppy disk means 9, or by compact disk means 10, or by E-PROM

US 6,346,983 B1

9

(not shown) and follow by same multiplexed bus 7 to the microprocessor means 6.

Thus, the control signal, processed by microprocessor means 6, via the conversion means 39 of the microprocessor system 27 follow to the transmitting-receiving means 58 of the wireless communication means 56. The control signal can provide, for example, possibility to switch "on/off", to switch "run/stop", to select and change the particle counting and measuring channels, to provide remote sensor diagnostics, to switch the mode (regime) from particle counting and measuring to concentration determination, to select and change the modes for the particle flow velocity, environmental temperature and/or humidity determination, etc. The signals from the transmitting-receiving means 58 follow to the aerial means 57. The two-way wireless communication means 56 of the remote data processing and control system 13 communicates with the two-way wireless communication means 36 of the remote detecting system 5 (see FIGS. 3, 4) and the signal from the aerial means 57 are received by the aerial means 34 (see FIG. 4) of the wireless communication means 36 and follow via the receiving means 30 of the transmitting-receiving means 3 to the conversion system 31 of the particle detecting system 4, as shown on FIG. 5.

Also referring to FIG. 5, the signals from conversion system 31, including a conversion means 64 and a coding-decoding means 51, follow to the particle detecting means 33 via the signal processing system 32. The conversion system 31 provides the conversion of the received signals to the form, acceptable for further processing. Hereby, the signals from the receiving means 30 follow to the conversion means 64, wherein they can be converted to the digital form intended, for example, for the further use either the multiplexed bus 59, as it is shown on FIG. 6 or the regular connection, as shown on FIG. 7. Thereby, the converted signals from the conversion means 64 follow to the coding-decoding means 51 (see FIG. 6). The decoded signals in the digital form from the coding-decoding means 51 follow to the signal processing means 44 and to the control signal conversion means 45, wherein the control signals are converted to the form required for the control means 43 operation (for example, low power switching means—not shown).

The control means 43 can perform for example, the low power switching functions for the control of the power executive means (not shown) of the environment assaying control means 41 (for example, switching on/off the pump, blower, chamber purging means; switching of the particle size rate means, particle flow control means, etc.—not shown). The assaying air or liquid (water) sample follows by the tubular means 37 from the environment assaying control means 41 to the detection means 40 of the particle detecting means 33.

The particles are detected by the light detecting means 67 of the imaging, or non-imaging means (not shown) of the light detecting system 68 of the detection means 40, belonging to the particle detecting means 33 (see FIG. 8). For example, for light detecting system 68, using the scattered light detection principles, the signals from light detecting means 67 can be presented by FIG. 9b, where shown the simplified timing diagram $I=f_1(t)$, where: I—an output current of the light detecting means 67 if the primer signals from the light detecting means 67 are the current value signals, t —a time. Regarding the primer detected signals, presented on FIG. 9b, an equation $I=f_2(E, F_1)$ should be considered too. In this equation: E—a light intensity (a positive polarity of the signals on FIGS. 9a, 9b is inherent

10

for scattered light detecting principles, but for some other light detecting principles if can be negative or can have the different form), F_1 —a physical-technical parameters of the light detecting means 67. Referring to FIG. 9a, the primer signals $I=f_1(t)$ from the light detecting means 67 depend on the light intensity E, which can be presented by a function $E=f_3(P, D, F_2)$, where: P—a light beam power, D—a particle dimensions (sizes), F_2 —the other factors (for example, a particle reflectiveness, a particle permeability, etc.). On FIG. 9a is shown the simplified timing diagram $E=f_4(t)$.

The signals (FIG. 9b) from the light detecting means 67 follow to the current-voltage conversion means 69, where they are converted to the voltage value signals (FIG. 9c), and after the amplifying (FIG. 9d) by an amplifying means 70 they follow to the analog-digital form pulse duration conversion means 71. From the analog-digital form pulse duration conversion means 71 the signals (FIG. 9e) follow to the conjunction means 72, in which also follow strobe pulses (FIG. 9f) from the strobe pulse generating means 73. The signals (FIG. 9g) from the conjunction means 72, having the strobe pulse packages configuration, follow to the selecting, sorting and counting means 74.

The selecting, sorting and counting means 74 provides selection and sorting of the identical strobe pulse packages (packages within the same strobe pulse quantity, that means—with the same strobe pulse package duration T_i , where $i=0, 1, 2, \dots, k, \dots, n$) and also provides the counting of the identical strobe pulse packages (particle quantity) and the counting of the strobe pulse quantity in the mentioned packages (particle size). The T_i characterizes the particle sizes. The more strobe pulses within a strobe pulse package (the larger value of T_i), the bigger particle size. The higher frequency of the strobe pulses, the higher precision and sensitivity of an improved apparatus. The signals, containing information about particle characteristics, from the selecting, sorting and counting means 74 follow to the constituent parts (blocks) of the signal processing means 44, in which also follow the signals, containing the information, for example, about environmental temperature, humidity, velocity rate, etc. The signals (for example, the coordinating or synchronizing signals) from the signal processing means 44 follow to the control signal conversion means 45 and to the environment assaying control means 41. Further the processed signals, containing the information about particle quantity and dimensions, follow to the coding-decoding means 51 for coding (see FIG. 6).

The coded data from the coding-decoding means 51 via conversion means 64 follow to the transmitting means 29 of the transmitting-receiving means 3 (see FIG. 5) and further from the transmitting means 3 follow to the aerial means 34 of the wireless communication means 36.

By a wireless communication, the signals, received by the aerial means 57 of the data processing and control system. 13, as shown on FIG. 4, follow to the receiving means (not shown) of the transmitting-receiving means 58 of the wireless communication means 56. The signals from the transmitting-receiving means 58 follow to the conversion means 39 of the microprocessor system 27 and further the converted signals follow by the multiplexed bus 7 to the microprocessor means 6 for decoding and the received data processing. The processed information (data), containing the characteristics of the assayed environment (air, gas, liquid or water, for instance), is displayed in the convenient for operator form (e.g., graphics, diagrams, tables, texts, etc.) on the displaying means 8 and/or can be printed by printing means 11.

Referring to FIG. 10, an improved apparatus can comprise $N=1, 2, \dots, i, \dots, n$ remote detecting systems and, for

US 6,346,983 B1

11

example, at least one data processing and control system. The wireless communication process is the same as described of the above, but the remote data processing and control system 13 serves "N" remote detecting systems (on FIG. 10 "N" remote detecting systems are presented by 14, 15, 16, 17). Regarding FIG. 10, each remote detecting system 14, 15, 16, 17 includes the appropriate particle detecting system 18, 19, 20, 21 and the appropriate wireless communication means 46, 47, 48, 49, having the appropriate transmitting-receiving means 22, 23, 24, 25 and appropriate aerial means 52, 53, 54, 55. Each remote detecting system has the conventional address (code) for the wireless communication, which is recognized by the coding-decoding means included in the conversion system of the each remote detecting system (see, for example, FIGS. 6, 7) and by the microprocessor system 27 of the data processing and control system 13. Therefore, each remote detecting system operates independently of each other. The data processing and control system 13 communicates with the remote detecting systems 14, 15, 16, 17 by central wireless communication means 50, comprising the central transmitting-receiving means 26 and the central aerial means 28.

The wireless communication can be provided by at least one-way wireless communication from the remote detecting system to the data processing and control system, if the remote detecting system includes a programmable means (not shown), or built-in some control means (not shown), or if remote detecting system can work in the permanent predetermined regimes.

Also, the mentioned above wireless communication means and also aerial means, transmitting-receiving mean, transmitting means and receiving means (not shown on FIG. 10) can be an identical (can have the same performance).

CONCLUSION, RAMIFICATION AND SCOPE

Accordingly the reader will see that, according to the invention, I have provided an effective methods and apparatus, which provide counting and measuring of the particles of the assayed air (gas) or liquid contaminations.

An improved method and apparatus provide authenticity of the quantity and sizes of the particles in the assayed mixture of air or liquid, because the electromagnetic noise created in the known prior art by wire (electrical cable) connection of the particle detecting means to the data processing means, is eliminated in an improved apparatus.

Also an improved method and apparatus provide the maximal mobility of the remote sensor. This factor may be very convenient for the improved apparatus use in the difficult accessible areas, where the operator's activity or the cable (wire) tracing cannot be used.

Additionally, an improved method of the detected signal timing processing, and apparatus provide the increasing of the sensitivity. An improved method makes it possible to achieve sensitivity much less than 0.1 μm .

While the above description contains many specificities, these should not construed as limitations on the scope of the invention, but as exemplification of the presently-preferred embodiments thereof. Many other ramifications are possible within the teaching of the invention. For example, an improved method and apparatus provide a maximal portability of the wireless communicating remote detecting system.

Thus, the scope of the invention should be determined by the appended claims and their legal equivalents, and not by examples given.

12

What is claimed is:

1. A method for counting and measuring particles illuminated by a light beam, providing two-way wireless communication between a data processing and control system and a remote particle detecting system, said method comprising the steps of:

forming in said data processing and control system at least one of control signals, which provide a turning-on, turning-off and switching of modes of operation of said remote particle detecting system;

conversing said control signals to the form for wireless transmission;

wireless transmitting of the conversed control signals from said data processing and control system to said remote particle detecting system;

wireless receiving of the transmitted control signals by said remote particle detecting system;

conversing the received control signals to the form for control of said remote particle detecting system;

sensing by a light detecting means of a particle detecting means of said remote particle detecting system a light created by an intersection of said light beam and said particles within a particle monitoring region and providing an output, which is effectively indicative of a size of said particles;

processing said output by a signal processing system of said remote particle detecting system;

forming in said signal processing system of said remote detecting system a data, containing an information about a quantity and said size of said particles;

conversing said data, containing said information about said quantity and said size of said particles to the form for wireless transmission;

wireless transmitting of the conversed data, containing said information about said quantity and said size of said particles, from said remote particle detecting system to said data processing and control system;

wireless receiving of the transmitted data, containing said information about said particle quantity and size, by said data processing and control system;

conversing the received data, containing said information about said quantity and said size of said particles to the form for processing;

processing the conversed data, containing said information about said quantity and said size of said particles, by said data processing and control system.

2. The method of claim 1, wherein said two-way wireless communication is provided by a transmitting-receiving means of a wireless communication means of said remote particle detecting system via an aerial means of said wireless communication means of said remote particle detecting system and by an adequate transmitting-receiving means of an adequate wireless communication means of said data processing and control system via an adequate aerial means of said adequate wireless communication means of said data processing and control system.

3. An apparatus for counting and measuring particles illuminated by a light beam, providing two-way wireless communication between a data processing and control system and remote particle detecting systems, said apparatus comprises:

at least on of a plurality of said wireless communicating remote particle detecting systems, each of which includes

a particle detecting system, comprising

US 6,346,983 B1

13

- a particle detecting means, including detection means, comprising a light detecting means of a light detecting system;
- a signal processing system, providing a processing of an output from said light detecting system and forming a data, containing an information about a quantity and a size of said particles;
- a conversion system, converting control signals, received from said data processing and control systems, to the form for control of said remote particle detecting system and converting said data, containing said information about said quantity and said size of said particles, to the form for transmission to said data processing and control systems;
- a wireless communication means, comprising
- a wireless transmitting-receiving means, including a transmitting means, providing the transmission of said data, containing said information about said quantity and said size of said particles, to said data processing and control system, and a receiving means, providing the receiving of said control signals from said data processing and control system; and
 - an aerial means;
- at least one said wireless communicating data processing and control system, comprising
- a processing system, including
 - a microprocessor means, forming said control signals and processing said data received from said remote particle detecting system and containing said information about said quantity and said size of said particles;
 - a terminal means, comprising at least one of: a displaying means, a floppy disk means, a compact disk means, a printing means and a control panel; and
 - a conversion means, converting said control signals to the form for transmission to said remote particle detecting system and converting said data received from said remote particle detecting system to the form for processing by said processing system;
- an adequate wireless communication means, including
- an adequate wireless transmitting-receiving means, comprising an adequate transmitting means, providing the transmission of said control signals to said remote particle detecting system, and an adequate receiving means, providing the receiving of said data, containing said information about said quantity and said

14

size of said particles, from said remote particle detecting system; and
an adequate aerial means.

4. The apparatus of claim 3, wherein said particle detecting means of each of said wireless communicating remote particle detecting systems includes a tubular means coupling a detection means and an environment assaying control means.

5. The apparatus of claim 3, wherein said conversion system of each of said wireless communicating remote particle detecting systems includes an appropriate conversion means connected to a coding-decoding means, providing recognition of a conventional identification number of an appropriate wireless communicating remote particle detecting system.

6. An apparatus for counting and measuring particles, providing a processing of an output of a light detecting means, said apparatus comprises:

- a current-voltage conversion means, providing conversion of said output of said light detecting means to voltage value signals, and wherein said output is effectively indicative of a size of said particles;

- an amplifying means, providing an amplification of said voltage value signals;

- an analog-digital form pulse duration conversion means, providing conversion of each of said voltage value signals to digital form pulses, and wherein each of said digital form pulses has a duration, which is adequate to the duration of an appropriate output of said light detecting means;

- a strobe pulse generating means, providing generating of strobe pulses;

- a conjunction means, forming a strobe pulse packages by conjunction of each of said digital form pulses and said strobe pulses;

- a selecting, sorting and counting means, providing the selection and sorting of said strobe pulse packages by an identical quantity of said strobe pulses within each of said strobe pulse packages.

7. The apparatus of claim 6, wherein said amplifying means is connected to said light detecting means through said current-voltage conversion means, and wherein said analog-digital form pulse duration conversion means is connected to said amplifying means.

8. The apparatus of claim 6, wherein said conjunction means is connected to said analog-digital form pulse duration conversion means, to said strobe pulse generating means and to said selecting, sorting and counting means.

* * * * *

EXHIBIT B



US006346983C1

(12) **EX PARTE REEXAMINATION CERTIFICATE (9186th)**
United States Patent
Yufa

(10) Number: **US 6,346,983 C1**
 (45) Certificate Issued: **Aug. 14, 2012**

(54) **METHOD AND WIRELESS COMMUNICATING PARTICLE COUNTING AND MEASURING APPARATUS**

(75) Inventor: Aleksandr L. Yufa, Colton, CA (US)
 (73) Assignee: Aleksandr L. Yufa, Colton, CA (US)

Reexamination Request:
 No. 90/008,387, Dec. 21, 2006

Reexamination Certificate for:
 Patent No.: 6,346,983
 Issued: Feb. 12, 2002
 Appl. No.: 09/015,458
 Filed: Jan. 29, 1998

Certificate of Correction issued Oct. 22, 2002.
 Certificate of Correction issued Jan. 21, 2003.
 Certificate of Correction issued Mar. 28, 2006.

(51) Int. Cl. *G01N 15/14* (2006.01)
 (52) U.S. CL 356/338
 (58) Field of Classification Search 702/127, 702/182
 See application file for complete search history.


(56) **References Cited**

To view the complete listing of prior art documents cited during the proceeding for Reexamination Control Number 90/008,387, please refer to the USPTO's public Patent Application Information Retrieval (PAIR) system under the Display References tab.

Primary Examiner—B. James Peikari

(57) **ABSTRACT**

An improved method and apparatus for particle counting and measuring provide the counting and measuring of the airborne (gas) particle and/or liquid contamination and include a remote sensor 5, wireless communicating with a data processing and control system 13, comprising a micro-processor system 27 and a wireless communication means 56, comprising a transmitting-receiving means 58 connected to an aerial means 57. The sensor system 5 includes a particle detecting system 4, providing the sensing a light created by an intersection of the particles with a light beam within particle monitoring region of the particle detecting system 4, particle detection and timing processing of the detected signals, and a wireless communication means 36 intended for wireless communication with the data processing and control system 13, providing a received data processing, illuminating of the resulting information and also providing a wireless communicating control of the sensor 5.

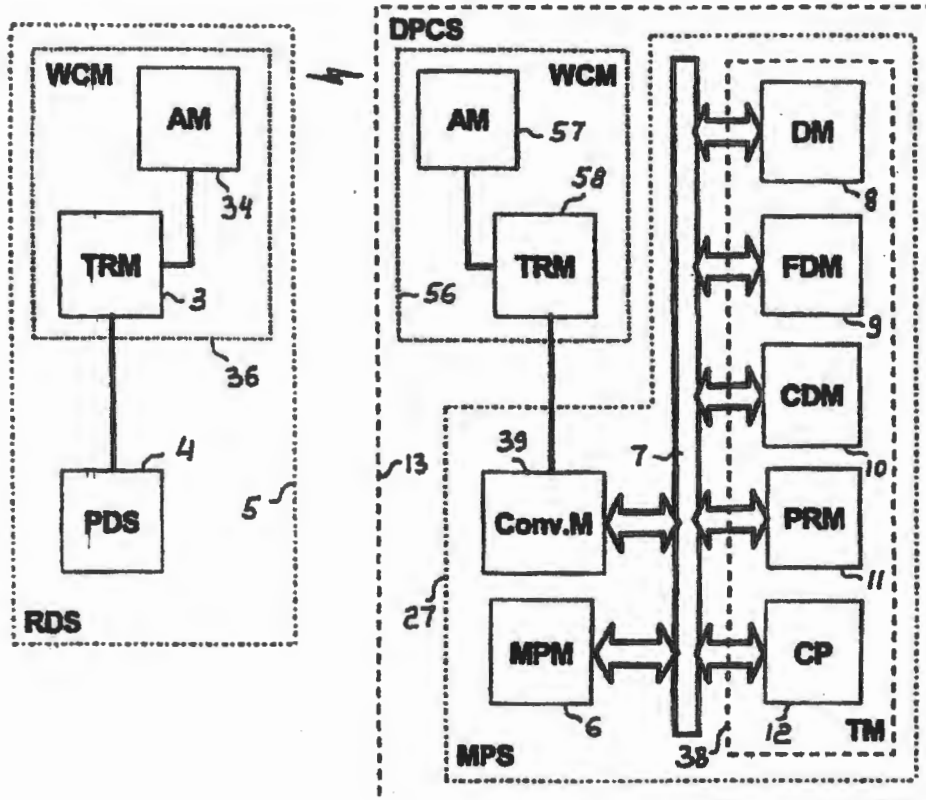

US 6,346,983 C1

1

**EX PARTE
REEXAMINATION CERTIFICATE
ISSUED UNDER 35 U.S.C. 307**

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

Claims 1-5 are cancelled.

Claims 6-8 are determined to be patentable as amended.

6. An apparatus for counting and measuring particles, providing a processing of an output of a light detecting means, said apparatus comprises:

- a current-voltage conversion means, providing conversion of said output of said light detecting means to voltage value signals, and wherein said output is effectively indicative of a size of said particles;
- an amplifying means, providing an amplification of said voltage value signals;
- an analog-digital form pulse duration conversion means, providing conversion of each of said voltage value sig-

2

nals to a digital form [pulses, and] pulse without using a reference voltage to convert each of said voltage value signals, wherein each [of] said digital form [pulses] pulse has a duration, which is adequate to [the duration of an] a baseline duration of the appropriate output of said light detecting means;

a strobe pulse generating means, providing generating of strobe pulses;

a conjunction means, forming [a] strobe pulse packages by conjunction of [each of] each said digital form [pulses] pulse and said strobe pulses;

a selecting, sorting and counting means, providing the selection and sorting of said strobe pulse packages by an identical quantity of said strobe pulses within each of said strobe pulse packages.

7. The apparatus of claim 6, wherein said amplifying means is connected to said light detecting means through said current-voltage conversion means and [wherein] to said analog-digital form pulse duration conversion [means is connected to said amplifying means] means.

8. The apparatus of claim 6, wherein said conjunction means is connected [to said analog-digital form pulse duration conversion means,] to said strobe pulse generating [means and] means, to said selecting, sorting and counting means, and to said analog-digital form pulse duration conversion means.

* * * * *

EXHIBIT C

LIGHTHOUSE WORLDWIDE SOLUTIONS

Mr. SCOTT SALTON,
President
48501 Landing Parkway,
Fremont, CA 94538

September 25, 2007

Certified Mail # 7007 0710 0002 2871 4707
with Return Receipt Requested

Copy to: **Adams Instruments**
Mr. ADAM GIANDOMENICO,
President
50 Staniford Street,
Boston, MA 02114

September 25, 2007

Certified Mail # 7007 0710 0001 9444 0783
with Return Receipt Requested

Dear Mr. S. Salton

Based on the information available, I would like to inform you that I think and believe in a very strong possibility of infringement by your company (including but not limited to your company's subsidiary - Adams Instruments, Inc., etc.) of the methods claimed in at least 1 (one) of my 4 (four) U.S. Patents (5,767,967; 5,946,091; 6,034,769; 6,346,983) related to the particle monitoring, i.e.: of the methods claimed in the claims 1 and 2 of U.S. Patent No. 6,346,983. {P.S. The word "company" has a wider meaning, including but not limited to: incorporated, corporation, organization, etc., and vice versa}. Also, based on the information available, I think and believe in a very strong possibility of the willful infringement.

I think and believe in a possibility of your company's manufacturing (making), selling, and offering for sale of the wireless communicating particle counting and measuring product, including but not limited to: wirelessly communicating "R-Series" remote models, including but not limited to Remote 2014P, 3014P, 5014P, 5104V, LPC 0.1µm, LPC 0.2µm, LPC 0.3µm, LPC 0.5µm, NanoCount 50; R-Series 0.2µm@2.83LPM, 0.3µm@2.83LPM, 0.5µm@2.83LPM, 0.5µm@28.3LPM, etc., and including but not limited to the other product unknown to me at this time but which may be subsequently discovered later, believed operating by the methods (claims 1 and 2) claimed in the U.S. Patent No. 6,346,983. {P.S. The word "product" has a wider meaning, including but not limited to: system(s), apparatus, device(s), unit(s), station(s), block(s), etc., and vice versa. The word "particle" has a wider meaning, including but not limited to: agent(s); airborne particle(s), gas particle(s), etc; contamination(s) [including but not limited to: liquid, fluid, water, etc. contaminations]; aerosol; etc., and vice versa. The words "counting" and/or "measuring" have a wider meaning, including but not limited to: analyzing, sampling, monitoring, etc., and vice versa}.

If your company has an interest in licensing or acquiring the mentioned above 6,346,983 patent, please, contact me at your convenient time.


If my thoughts and beliefs are inadequate in your and/or your specialist(s)' opinion, I greatly appreciate the opportunity to receive the information/document(s) (including but not limited to: technical, financial documents, etc.) related to the believed infringing product mentioned above, and/or to study/inspect the mentioned above believed infringing product at the mutually convenient location(s) and time.

I greatly appreciate your response as soon as possible.

Thank you.

Attachment: 1. U.S. Patent No. 6,346,983; 2. Claim Comparison Chart for '983 patent - 1 page.

Very Respectfully,

 09/25/2007
Alex Yufa, Ph.D.
698 Cypress Avenue,
Colton, CA 92324-1952
(909) 370-4454 - phone, voice message
(909) 370-1714 - fax

D

LIGHTHOUSE WORLDWIDE SOLUTIONS

Mr. SCOTT SALTON,
President
46501 Landing Parkway,
Fremont, CA 94538

November 16, 2007
Certified Mail # 7006 2760 0004 3379 9535
with Return Receipt Requested

Brief Follow-Up Letter

Dear Mr. S. Salton


On September 25, 2007, I sent you a letter - Certified Mail # 7007 0710 0002 2671 4707 (received by you on September 27, 2007 at 1:39 p.m.) regarding my thought(s) and belief(s) of a possibility of infringement of my U.S. Patents No.: 6,346,983 (hereinafter " '983") with the offer to license or acquire this patent (if your company has an interest in the licensing or acquiring of '983 patent), or if my thought(s) and belief(s) regarding possible infringement are inadequate in your and/or your specialist(s)' opinion, I have been asking in my that letter the opportunity to receive the information/document(s) (including but not limited to: technical, financial, etc.) related to the believed infringing product, and/or to study/inspect the believed infringing product at the mutually convenient location(s). {P.S. The word "product" has a wider meaning including but not limited to: system(s), device(s), unit(s), station(s), block(s), etc., and vice versa, and a singular or plural and vice versa meaning}.

Unfortunately, I have not received any response to my letter of September 25, 2007.

I appreciate your response as soon as possible, and I greatly appreciate your response not later than in 30 (thirty) days from the date of receiving of this Brief Follow-Up Letter.

Thank you.

Very Respectfully,

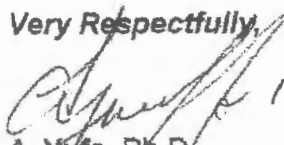 11/16/2007
A. Yufa, Ph.D.
698 Cypress Avenue,
Colton, CA.92324-1952
(909) 370-4454 - phone, voice message
(909) 370-1714 - fax

//
//

E

Search this site...

Search

Home » Compare Airborne Particle Counters

Compare Airborne Particle Counters

Remote Products without Pumps

Model Name	Sensitivity	Flow Rate	Communication	Hydrogen Peroxide Compatible	Hazardous Environment Rating (Class 1 DIV 2)	Relay Output	Temp/RH Probe
1104	100nm	1.0CFM	RS-485 Ethernet				
1100	100nm	1.0CFM	PULSE				
2014	0.2µm	0.1CFM	RS-485 Ethernet (via adapter)			✓	✓
2012	0.2µm	0.1CFM	4-20mA				
2014V	0.2µm	0.1CFM	RS-485	✓	✓		
3014	0.3µm	0.1CFM	RS-485 Ethernet (via adapter)			✓	✓
3012	0.3µm	0.1CFM	4-20mA				
3014V	0.3µm	0.1CFM	RS-485	✓	✓		
3104	0.3µm	1.0CFM	RS-485 Ethernet (via adapter)			✓	✓
3102	0.3µm	1.0CFM	4-20mA				
3104V	0.3µm	1.0CFM	RS-485	✓	✓		
6014	0.5µm	0.1CFM	RS-485 Ethernet (via adapter)			✓	✓
6012	0.5µm	0.1CFM	4-20mA				
5104	0.5µm	1.0CFM	RS-485 Ethernet (via adapter)			✓	✓
5102	0.5µm	1.0CFM	4-20mA				
5104V	0.5µm	1.0CFM	RS-485	✓	✓		
5102V	0.5µm	1.0CFM	4-20mA	✓			
60104	5.0µm	1.0CFM	RS-485 Ethernet (via adapter)			✓	✓

Remote Products with Pumps

Model Name	Sensitivity	Flow Rate	Communication	Local Display Option	Relay Output	Analog Inputs	Manifold Compatible
------------	-------------	-----------	---------------	----------------------	--------------	---------------	---------------------

Model Name	Sensitivity	Flow Rate	Communication	Local Display Option	Relay Output	Analog Inputs	Manifold Compatible
2014P	0.2µm	0.1CFM	RS-485 Ethernet USB	✓	✓	✓	✓
3014P	0.3µm	0.1CFM	RS-485 Ethernet USB	✓	✓	✓	✓
5014P	0.5µm	0.1CFM	RS-485 Ethernet USB	✓	✓	✓	✓
5104P	0.5µm	1.0CFM	RS-485 Ethernet USB	✓	✓	✓	✓
3104P	0.3µm	1.0CFM	RS-485 Ethernet USB	✓	✓	✓	✓
3012PN	0.3µm	0.1CFM	4-20MA				
5012PN	0.5µm	0.1CFM	4-20MA				
5102PN	0.5µm	1.0CFM	4-20MA				
3104PN	0.3µm	1.0CFM	RS-485 Ethernet				
5014PN	0.5µm	0.1CFM	RS-485 Ethernet				
5104PN	0.5µm	1.0CFM	RS-485 Ethernet				

Particle Counters	Monitoring Systems	Services	Company
Airborne	Pharmaceutical	Calibration	News
Liquid	Environmental	Customer Training	About Lighthouse
Micro Air Samplers	Cleanroom Monitoring	Project Management	ISO 9001:2008
Gas	Contamination Monitoring	Service and Support	Registration
Products By Industry	Hospitals & Surgery	System Maintenance	About the CEO
Refurbished, Upgrades & Trade Ins		RMA	CEO Message
			Corporate Video
			Careers
			FAQ
			Tech Papers
TOC	Global Distributors	Contact Us	

Newsletter Signup

Get the scoop on new products and the latest tech papers.

Name

Email

[Subscribe](#)



Quality Made in the USA

Copyright © 2006 - 2012 Lighthouse Worldwide Solutions. All Rights Reserved.

[Privacy Policy](#) • [Terms and Conditions](#)



Search this site...

Search

Home » Airborne Particle Counters » REMOTE 5104

REMOTE 5104

Incorporating the latest in laser optical particle counting technology, Lighthouse designed the **REMOTE 5104** for continuous trouble-free operation.

With a sensitivity of 0.5, at a flow rate of 1.0 CFM (28.3 LPM), the **REMOTE 5104** provide real-time continuous data collection at a cost-effective price per point.

Using an external vacuum source, the compact **REMOTE 5104** provide versatile mounting options and can be installed where space is at a premium. The optional T/RH Probe can be mounted up to eight feet from the instrument by using an optional extension cable.

The **REMOTE 5104** integrate seamlessly into large facility monitoring and management systems and transfer up to 4 channels of simultaneous particle count and environmental data using RS-485 Modbus.

With the optional Network or Wireless Adapter, the **REMOTE 5104** can be connected to TCP/IP LANs.

Designed and built by **Lighthouse**, a name you can trust.



Optional T/RH Probe



Direct Mount Isokinetic Probe



RJ45 Connector



LED Status



Alarm Relay



Flow Status Monitoring

Remote 5104 Datasheets

[Letter Size - Lo Res](#)

[A4 Size - Lo Res](#)

[Letter Size - Hi Res](#)

[A4 Size - Hi Res](#)



- 0.5 - 25µm Sensitivity
- 1.0 CFM (28.3 LPM) Flow Rate
- Up to 4 Channels of Simultaneous Data
- All Models Meet JIS Standards
- Compact Size
- Stainless Steel Enclosure
- Status Indicators
- External Alarm Connector
- Optional Temperature/Relative Humidity Probe
- RS-485 Modbus Output
- Facility Monitoring Systems Interface
- Versatile Mounting Options
- External Vacuum Source
- Designed for Reliability



Find a Distributor



Contact the Global Distributor local to you.

Compare Products

[Compare Product Features](#)

Select a Product by Industry

Industries...

Chart of Products by Industry

Airborne Accessories



The latest Lighthouse accessories for the airborne particle counters.

Monitoring Systems Software

Lighthouse Monitoring System

LMS Enterprise

LMS Pharma

LMS Express

Services

Calibration

Customer Training

Project Management

Service and Support

System Maintenance

Specifications

Size Range: 0.5 - 25µm

Channel Sizes: Standard: 0.5, 5.0µm; 0.5, 10.0µm
 Optional: 0.5, 1.0, 5.0, 10.0µm; 0.5, 5.0, 10.0, 25.0µm

Counting Efficiency: 50% @ 0.5 µm; 100% for particles > 0.75 µm (per JIS)

Flow Rate: 1.0 CFM (28.3 LPM)

Laser Source: Laser Diode

Zero Count Level:

Concentration Limits: 500,000 Particles / ft³ @ 5% Coincidence Loss

Calibration: NIST Traceable

Vacuum Requirements: External Vacuum >18" (45.72) of Hg

Air Flow: Internally Monitored

Communication Modes: RS-485 MODBUS

LED Indicators: Power, Flow, Service, Sampling

Connector: RJ45

Supporting Software: LMS XChange, Lighthouse Monitoring System, LMS Express, LMS Express RT/RT+, LMS Net

Environmental Sensors: (Optional) Temperature/Relative Humidity Probe 32 - 122F (0-50C)+/-1F (0.5C), 0 - 100% RH +/-2%

External Alarm Output: Normally Open Dry Contact Rated 0-60 V AC/DC 1 Amp

Concentration Limits: 500,000 particles / ft³ @ 5% Coincidence Loss

Enclosure: Stainless steel

Power: 24 VDC

Dimensions: 1.7"(l) x 4.2"(w) x 3"(h) [4.3 x 10.7 x 7.6 cm]

Weight: 0.97 lb (0.44 kg)

Conditions

Operating: 50°F to 104°F (10°C to 40°C) / 20% to 95% non-condensing

Storage: 14°F to 122°F (-10°C to 50°C) / Up to 98% non-condensing

Accessories

Included: Operating Manual on CD

Optional: Printed Operating Manual; RS-485 Hub with Power Supply; RS-232 Communication Cable and Adapter; USB to Serial Port Converter; Network Adapter; Wireless Network Adapter; Isokinetic Sampling Probes; Vacuum Tubing; Sample Tubing; Data Cable; Purge Filter; Power Supply; Temperature/ Relative Humidity Probe; 8" T/RH Probe Extension Cable; REMOTE Mounting Kit; LMS XChange, LMS

Express; Express RT and RT+, LMSNet software; RS-485
Communication Kit; High-Pressure Diffuser.

Particle Counters	Monitoring Systems	Services	Company	Newsletter Signup Get the scoop on new products and the latest tech papers. Name Email <input type="button" value="Subscribe"/>
Airborne	Pharmaceutical	Calibration	News	
Liquid	Environmental	Customer Training	About Lighthouse	
Micro Air Samplers	Cleanroom Monitoring	Project Management	ISO 9001:2008	
Gas	Contamination Monitoring	Service and Support	Registration	
Products By Industry	Hospitals & Surgery	System Maintenance	About the CEO	
Refurbished, Upgrades & Trade Ins		RMA	CEO Message	
			Corporate Video	
			Careers	
			FAQ	
			Tech Papers	
TOC	Global Distributors	Contact Us		



Copyright © 2006 - 2012 Lighthouse Worldwide Solutions. All Rights Reserved.
Privacy Policy • Terms and Conditions

G

[Global Distributors](#) [Tech Papers](#) [FAQ](#) [Contact](#)

Search this site...

[Home](#) | [Particle Counters](#) | [TOC](#) | [Monitoring Systems](#) | [Services](#) | [Calibration](#) | [News](#) | [Company](#)

[Home](#) » [Airborne Particle Counters](#) » **HANDHELD 2016**

HANDHELD 2016

The first and only 0.2 Micron Handheld on the market!

The ergonomically designed and lightweight Lighthouse **HANDHELD 2016, 3016** and **5016** particle counters feature 0.2, 0.3 and 0.5µm sensitivities and are the most advanced handheld particle counters on the market.

Providing up to 6 particle size channels of simultaneous counting, Lighthouse **HANDHELD** Particle Counters can display cumulative and differential particle count data as well as Temperature/Relative Humidity data on the fast and easy to read color touch screen. Removable batteries and an optional charger help to maximize the **HANDHELD**'s uptime. Data is very easily downloaded using the Lighthouse Data Transfer Software.



The **HANDHELD** can be used as a mobile particle monitor or become a part of a large facility monitoring and management system.

Designed and built by **Lighthouse**, a name you can trust.



Backlit	Removable	One-handed	Reports	Removable	Temp / RH	Easily
Color Touch	Rechargeable	Operation	Screen	and	and	Download
Screen	Li-Ion Battery	with	on	Isokinetic	Data to PC	
Interface		Start & Stop	Handle	Probe		

Handheld 2016 / 3016 / 5016 Datasheets

[Letter Size - Lo Res](#) [A4 Size - Lo Res](#)

FEATURES BENEFITS

- Handheld 2016: 0.2 - 2 µm
- Handheld 3016: 0.3 - 25 µm
- Handheld 5016: 0.5 - 25 µm
- 0.1 CFM (2.83 LPM) Flow Rate
- View 6 Particle Sizes Simultaneously
- Designed for ISO 21501-4 Compliance: Unit-to-Unit Accuracy and Repeatability
- Bright 3.5" (8.89 cm) Color Touch Screen Display
- Removable / Rechargeable Li-Ion Battery
- Large Memory for Storing Data (3,000 samples)
- Concentration Limit - 4,000,000/R3
- Temperature/Relative Humidity Probe included
- Alphanumeric Location Labels

Find a Distributor

 [Contact the Global Distributor local to you](#)

Compare Products

 [Compare Product Features](#)

Select a Product by Industry

Industries...

[Chart of Products by Industry](#)

Airborne Accessories

 The latest Lighthouse accessories for the airborne particle counters.

Monitoring Systems Software

[Lighthouse Monitoring System](#)

[LMS Enterprise](#)

[LMS Pharma](#)

[LMS Express](#)

Services

[Calibration](#)

[Customer Training](#)

[Project Management](#)

[Service and Support](#)

[System Maintenance](#)

- Test Wizard for Cleanroom Pass/Fail Reports:
FS-209E, ISO-14644-1 or EU GMP Annex 1
- Easily Configurable Interface with Zoom Capability
- Internal Audible Alarm
- Ergonomically Designed
- Lightweight
- Open Architecture Connectivity with OPC Server

Specifications

	2016	3016	5016
Size Range:	0.2 - 2.0 µm	0.3 - 25.0 µm Standard: 0.3, 0.5, 0.7, 1.0, 2.0, 5.0 µm Standard: 0.3, 0.5, 1.0, 3.0, 5.0, 10.0 µm	0.5 - 25.0 µm Standard: 0.5, 0.7, 1.0, 3.0, 5.0, 10.0 µm
Channel Sizes:	0.2, 0.3, 0.5, 0.7, 1.0, 2.0 µm	Standard: 0.3, 0.5, 0.7, 1.0, 2.5, 5.0 µm Standard: 0.3, 0.5, 1.0, 2.5, 5.0, 10.0 µm Optional: 0.3, 0.5, 1.0, 5.0, 10.0, 25.0 µm	Standard: 0.5, 0.7, 1.0, 3.0, 5.0, 10.0 µm Optional: 0.5, 1.0, 3.0, 5.0, 10.0, 25.0 µm
Counting Efficiency:	50% @ 0.2 µm; 100% for particles > 0.3 µm (per JIS)	50% @ 0.3 µm; 100% for particles > 0.45 µm (per JIS)	50% @ 0.5 µm; 100% for particles > 0.75 µm (per JIS)
Flow Rate:	0.1 CFM (2.83 LPM)		
Counting Efficiency:	50% @ 0.3 µm; 100% for particles > 0.45 µm (per JIS)		
Laser Source:	Extreme Life Laser Diode with >20 Years MTTF		
Zero Count Level:			
Concentration Limits:	4,000,000 Particles / ft3 @ 5% Coincidence Loss		
Calibration:	Meets ISO 21501-4 Calibration using NIST Traceable PSL Spheres, DMA and Condensation Particle Counter		
Count Modes:	Automatic, Manual, Beep, Concentration, Cumulative/Differential		
Data Storage:	3,000 Sample Records, Rotating Buffer (includes particle and environmental data, location and time)		
Communication Modes:	RS-232 via RJ-45 to a PC or an Optional Printer		
Supporting Software:	LMS XChange; LMS Express; LMS Express RT; LMS Pharma; LMS Standard; CRQWin		
Environmental Sensors:	Temperature/Relative Humidity Probe: 32-122°F(0-50°C) +1°F (0.5°C), 15-90% + 2% RH		
Touch Screen Display:	3.5" (8.89 cm), Color TFT		

Reports: FS-209E, ISO-14644-1 & EC GMP

Alarms: Internal, Adjustable Alarm Buzzer. Alarms on Counts, Low Battery or Sensor Failure

Sample Inlet: Isokinetic Sampling Probe

Sample Output: Internally Filtered to HEPA Standards (>99.997% @ 0.3 µm)

Vacuum Source: Internal Pump, Automatic Flow Control

Enclosure: High Impact Injection Molded Plastic

Power: 100-240 V, 50-60 Hz

Battery: Li-Ion, Removable & Rechargeable

Dimensions: 8.75" (l) x 5.0" (w) x 2.5" (h) [22.23 x 12.7 x 6.35 cm]

Weight: 2.2 lb (1kg)

Languages: English (U.S.), Deutsch, Español, Italiano, Français

Conditions

Operating: 50°F to 104°F (10°C to 40°C) / 20% to 95% non-condensing

Storage: 14°F to 122°F (-10°C to 50°C) / Up to 98% non-condensing

Accessories

Included: Operating Manual on CD; Removable Battery; Direct Mount Isokinetic Sample Probe; Purge Filter; Temperature / Relative Humidity Probe; Power Supply; Power Cord; LMS XChange and LMS Express Software

Optional: Carrying Case; Isokinetic Sample Probe with 6 ft. tubing (extends Isokinetic sample input); Additional Li-Ion Batteries; External Battery Charger w/ AC & Car Adapter; Thermal Printer and Cable; Mini Manifold; Printed Operating Manual

Particle Counters	Monitoring Systems	Services	Company
Airborne	Pharmaceutical	Calibration	News
Liquid	Environmental	Customer Training	About Lighthouse
Micro Air Samplers	Cleanroom Monitoring	Project Management	ISO 9001:2008
Gas	Contamination Monitoring	Service and Support	Registration
Products By Industry	Hospitals & Surgery	System Maintenance	About the CEO
Refurbished Upgrades & Trade Ins		RMA	CEO Message
			Corporate Video
			Careers
			FAQ
			Tech Papers
TOC	Global Distributors	Contact Us	

Newsletter Signup

Get the scoop on new products and the latest tech papers.

Name

Email

Subscribe



Quality Made in the USA

Copyright © 2006 - 2012 Lighthouse Worldwide Solutions. All Rights Reserved.

[Privacy Policy](#) • [Terms and Conditions](#)