




US 20100198508A1

(19) **United States**(12) **Patent Application Publication**  
**Tang**(10) **Pub. No.: US 2010/0198508 A1**(43) **Pub. Date: Aug. 5, 2010**(54) **NAVIGATION SYSTEM HAVING ROUTE  
CUSTOMIZATION MECHANISM AND  
METHOD OF OPERATION THEREOF**(22) Filed: **Feb. 3, 2009****Publication Classification**(75) Inventor: **Ky Tang, Milpitas, CA (US)**(51) **Int. Cl.**  
**G01C 21/36** (2006.01)(52) **U.S. Cl.** ..... **701/210; 701/200**

Correspondence Address:

**LAW OFFICES OF MIKIO ISHIMARU  
333 W. EL CAMINO REAL, SUITE 330  
SUNNYVALE, CA 94087 (US)**(57) **ABSTRACT**

A method of operation of a navigation system having route customization mechanism includes: generating a base route; selecting a custom route priority based on a route preference; generating a modified route based on the base route and the custom route priority; and sending the modified route for displaying on a device.

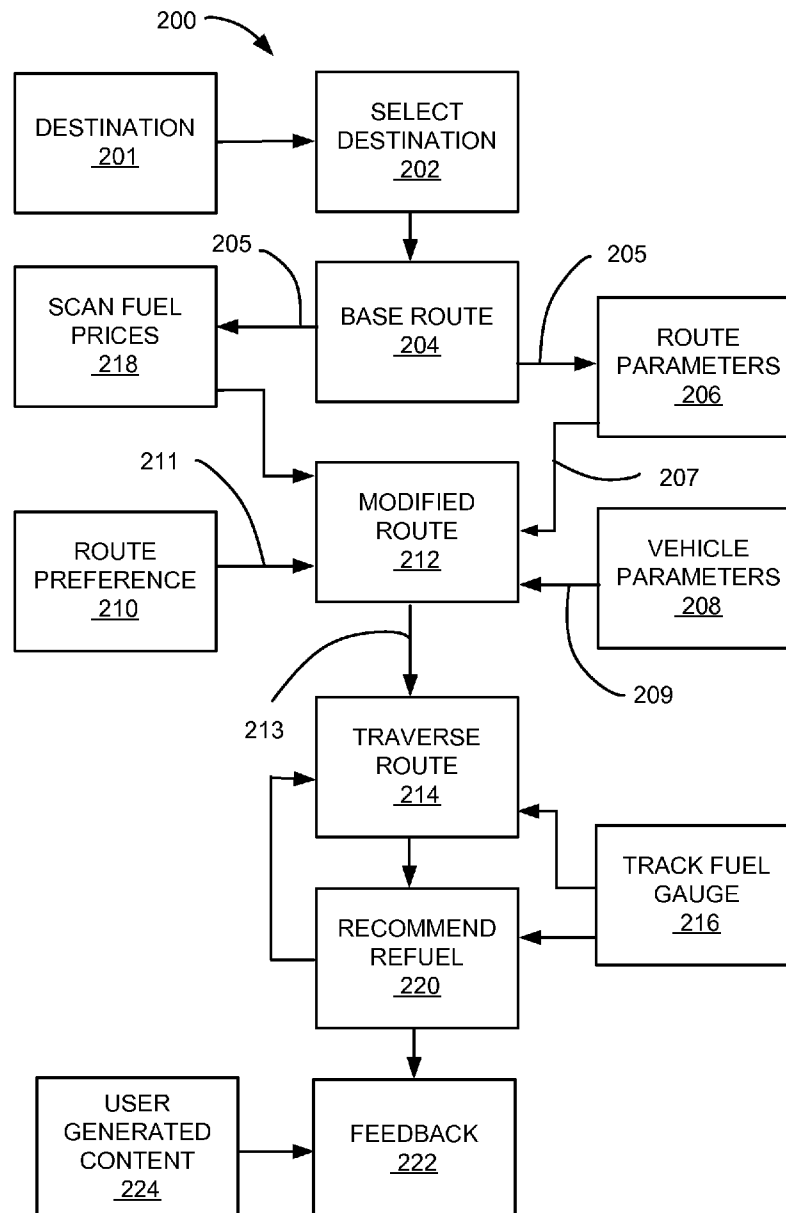(73) Assignee: **TELENAV, INC., Sunnyvale, CA  
(US)**(21) Appl. No.: **12/365,148**

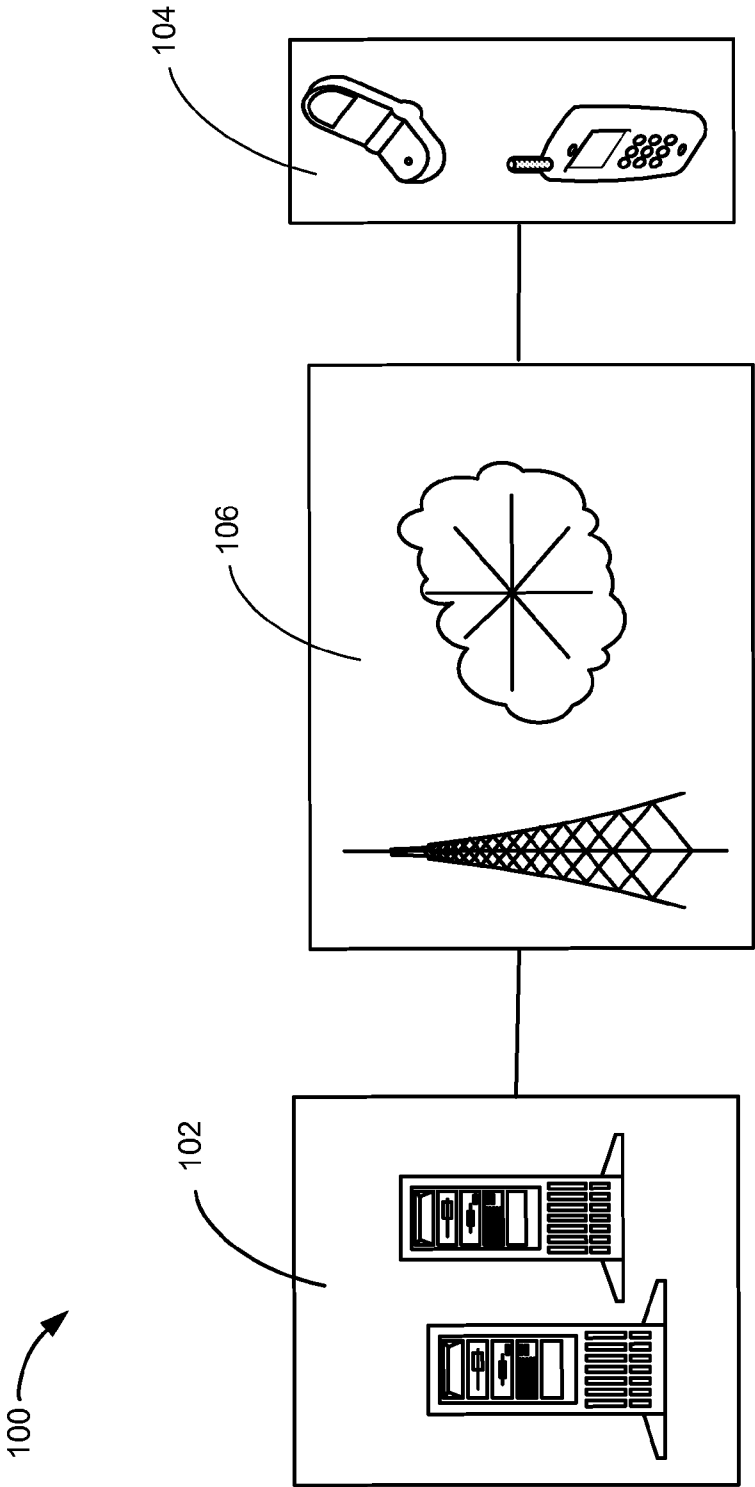


FIG. 1

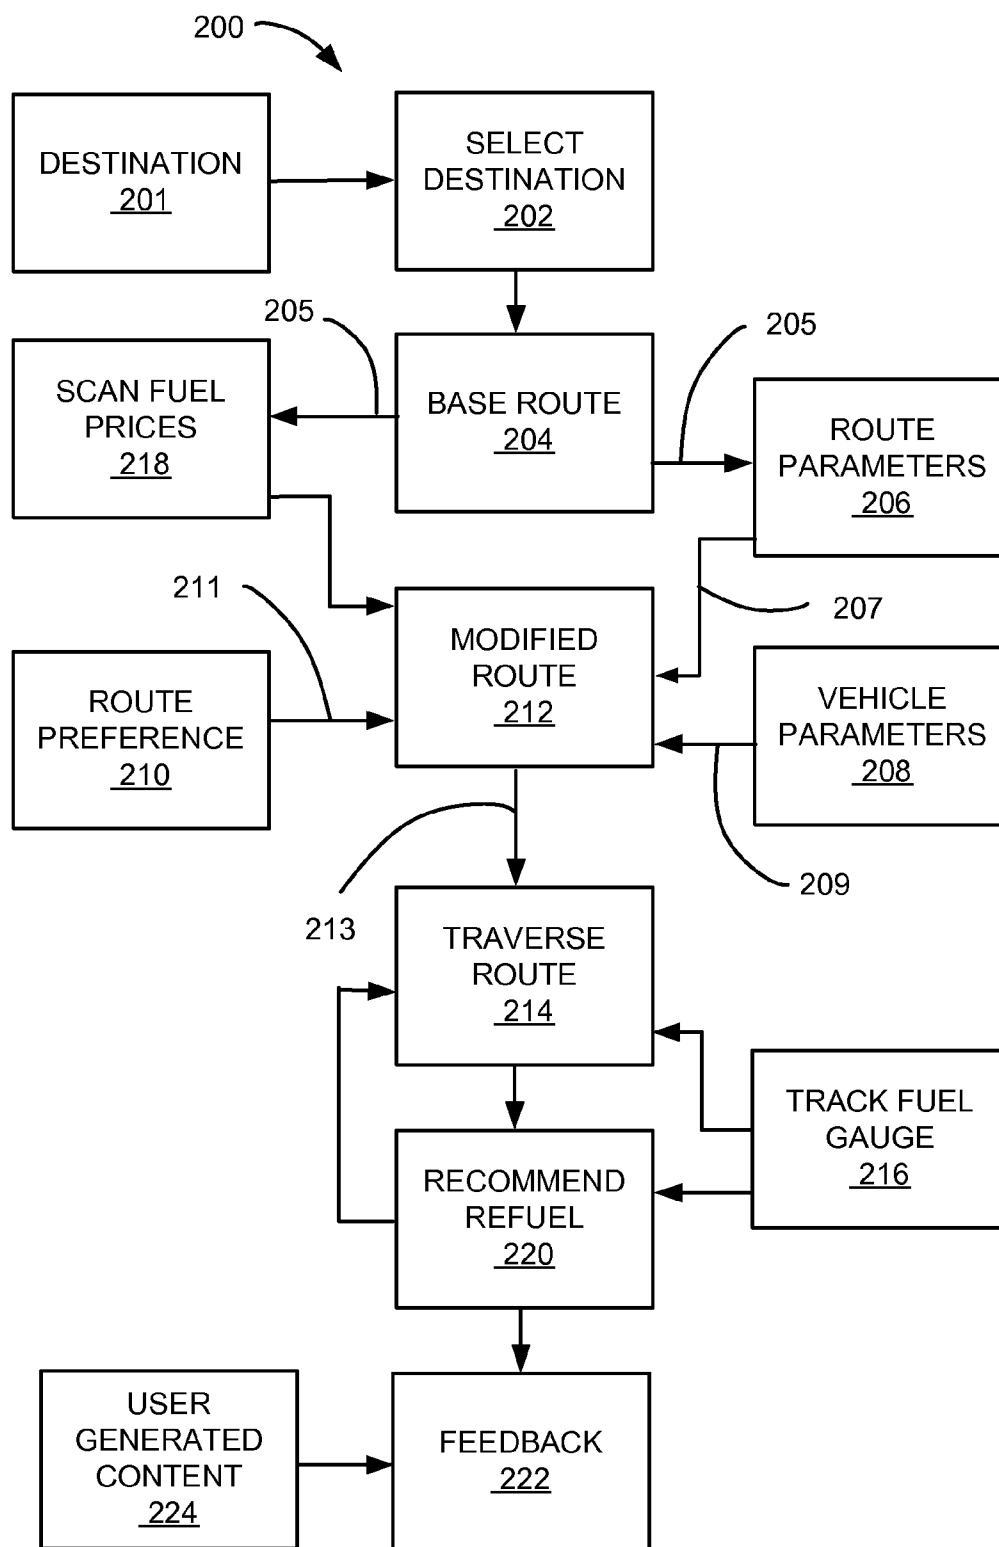


FIG. 2

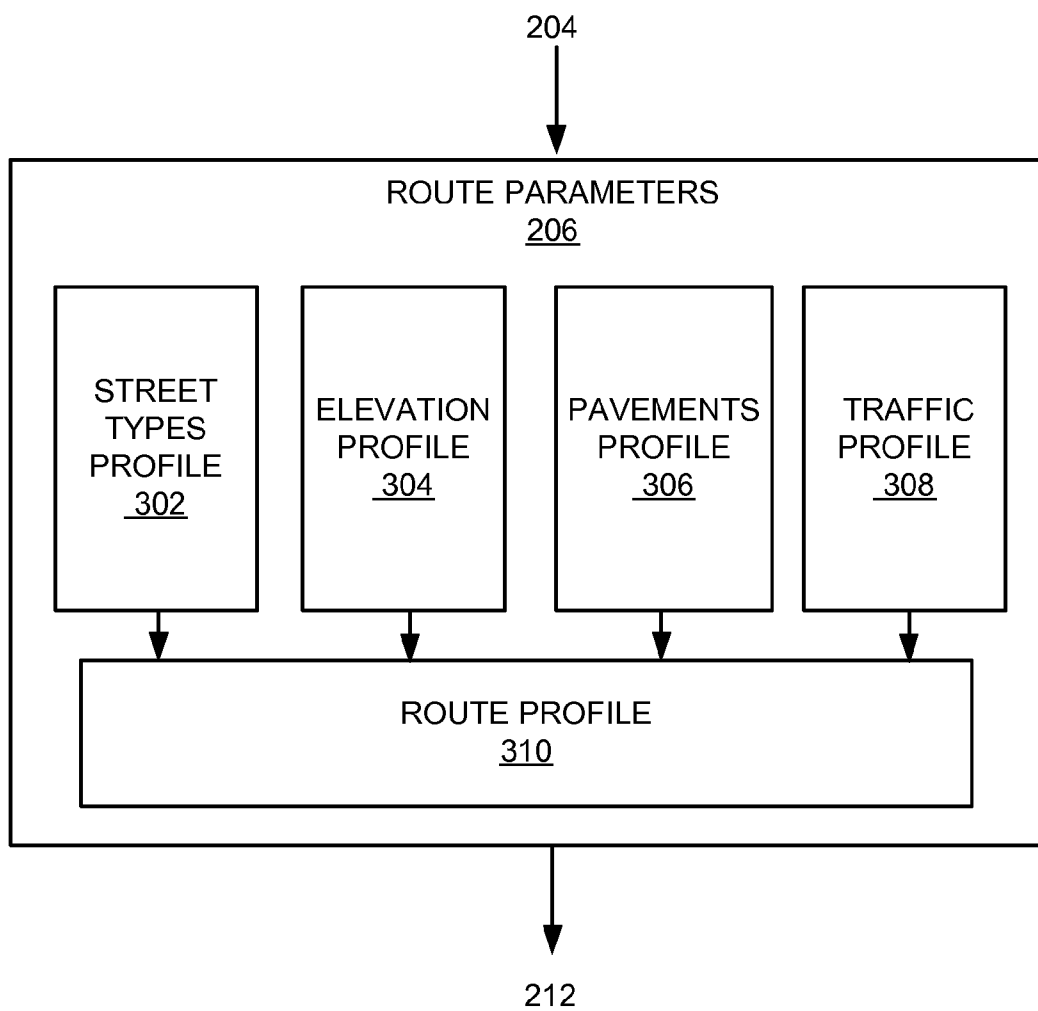


FIG. 3

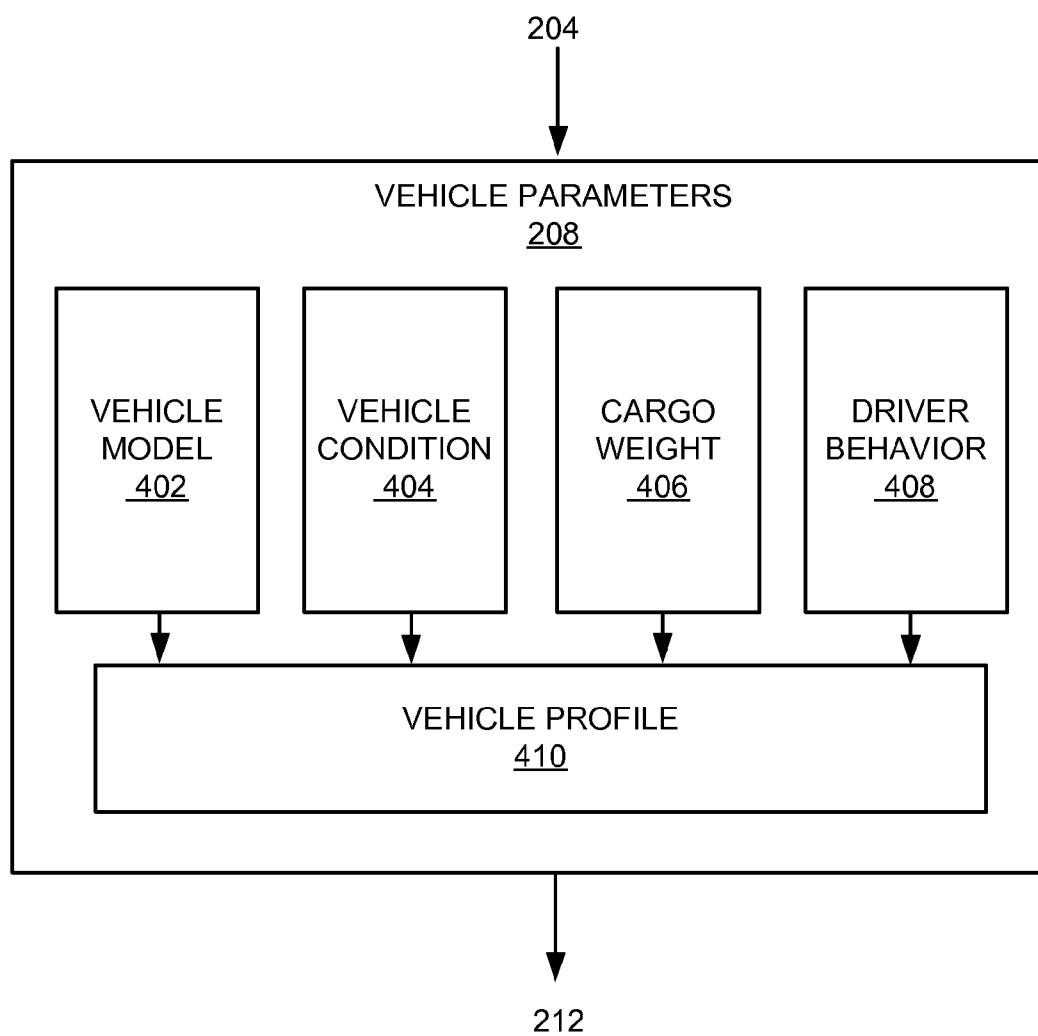


FIG. 4

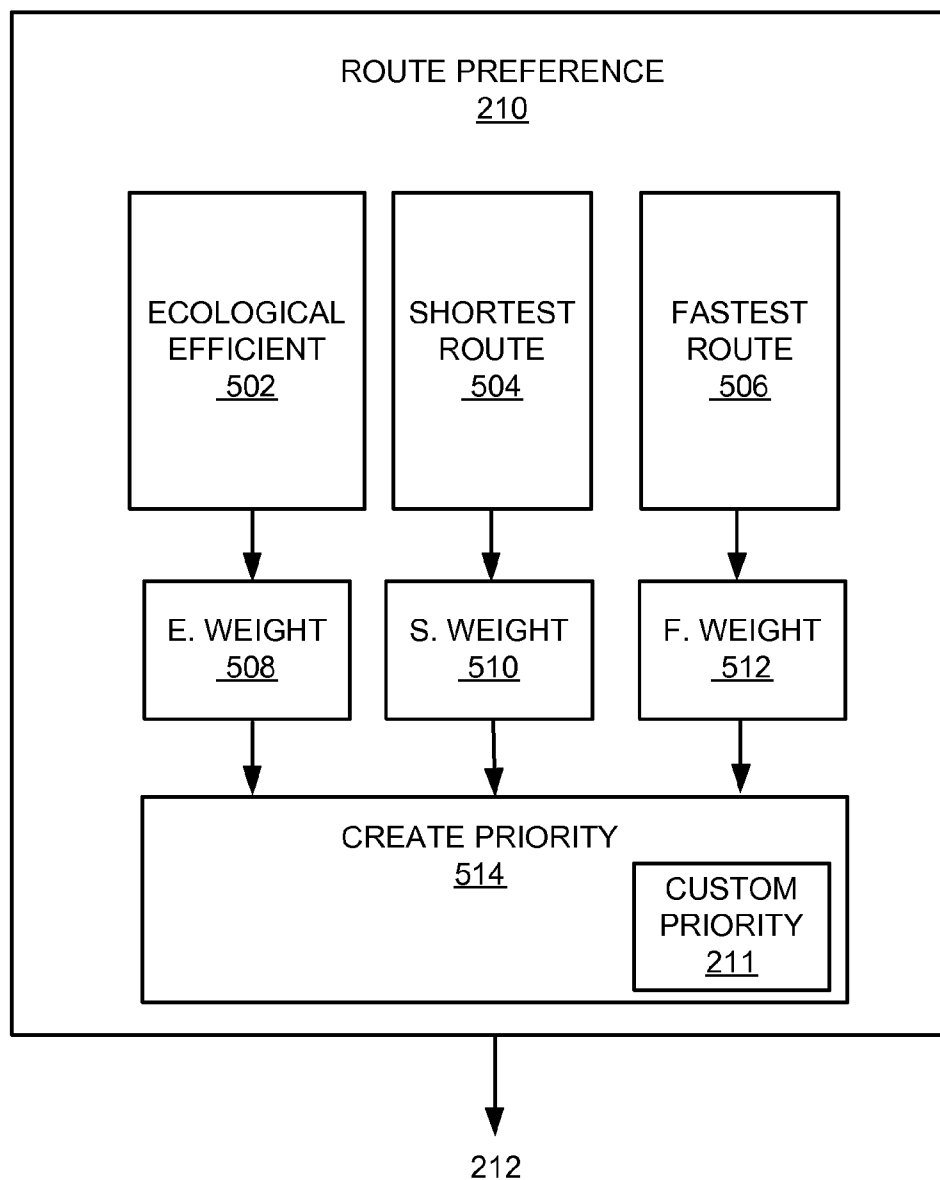


FIG. 5

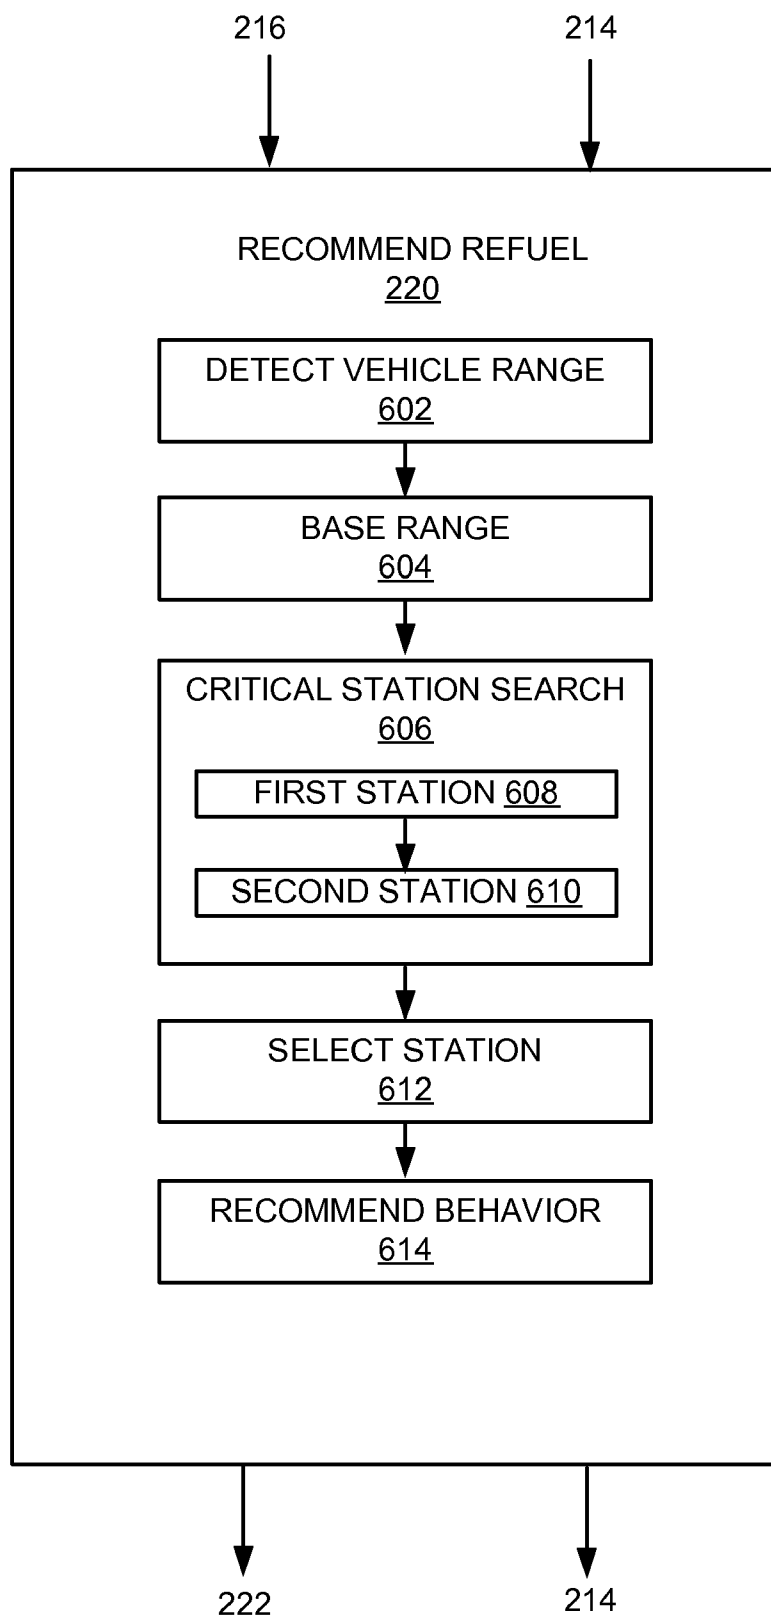


FIG. 6

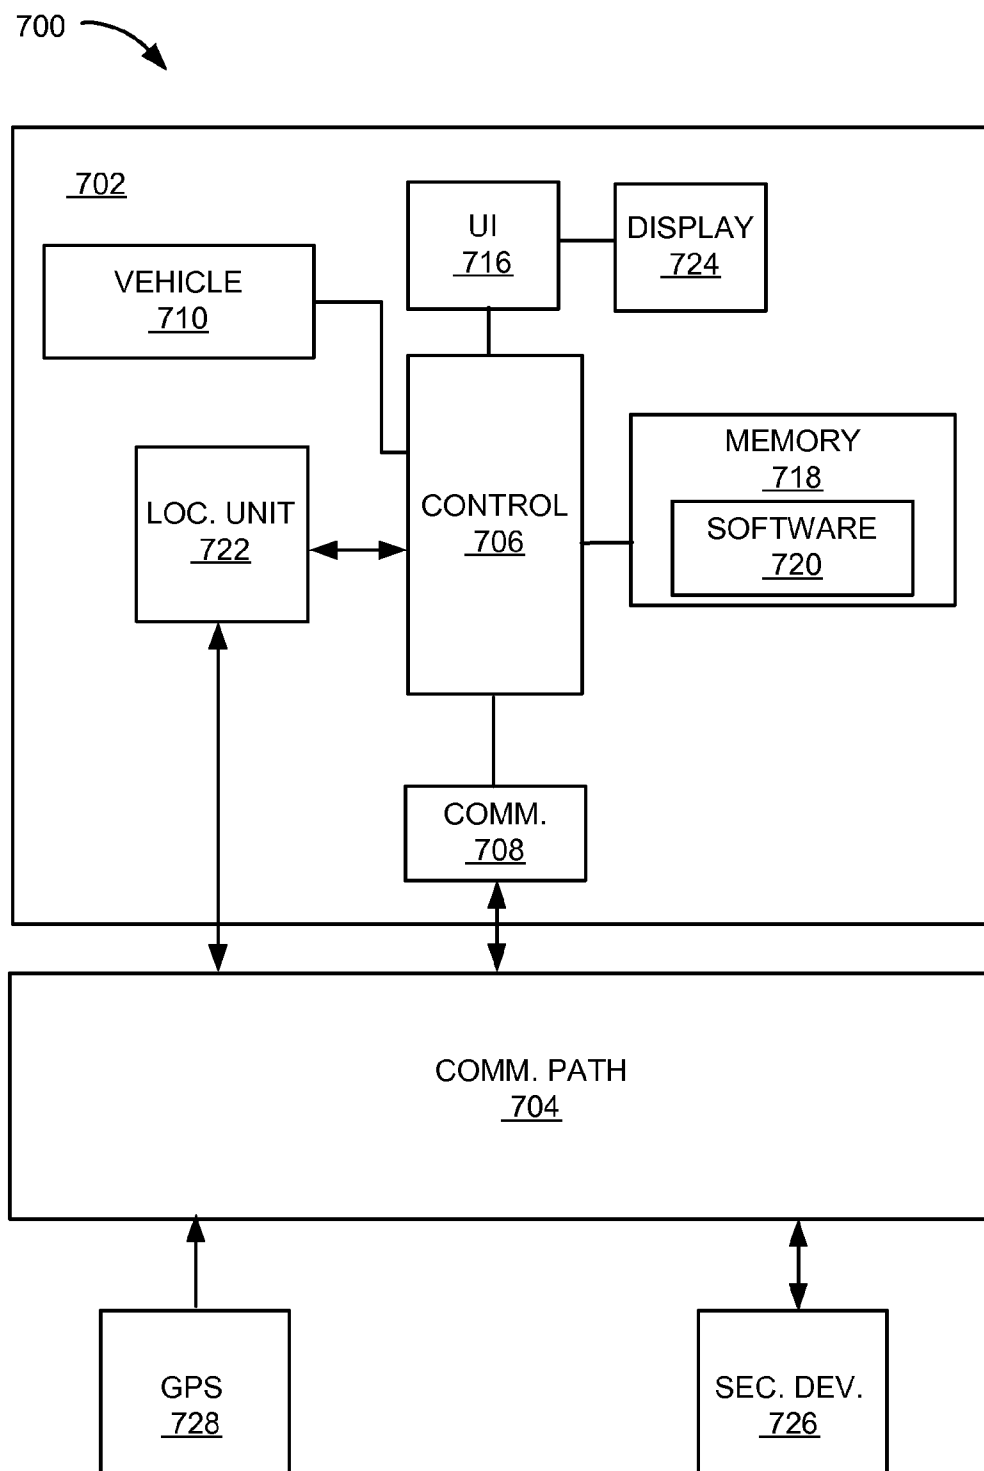


FIG. 7



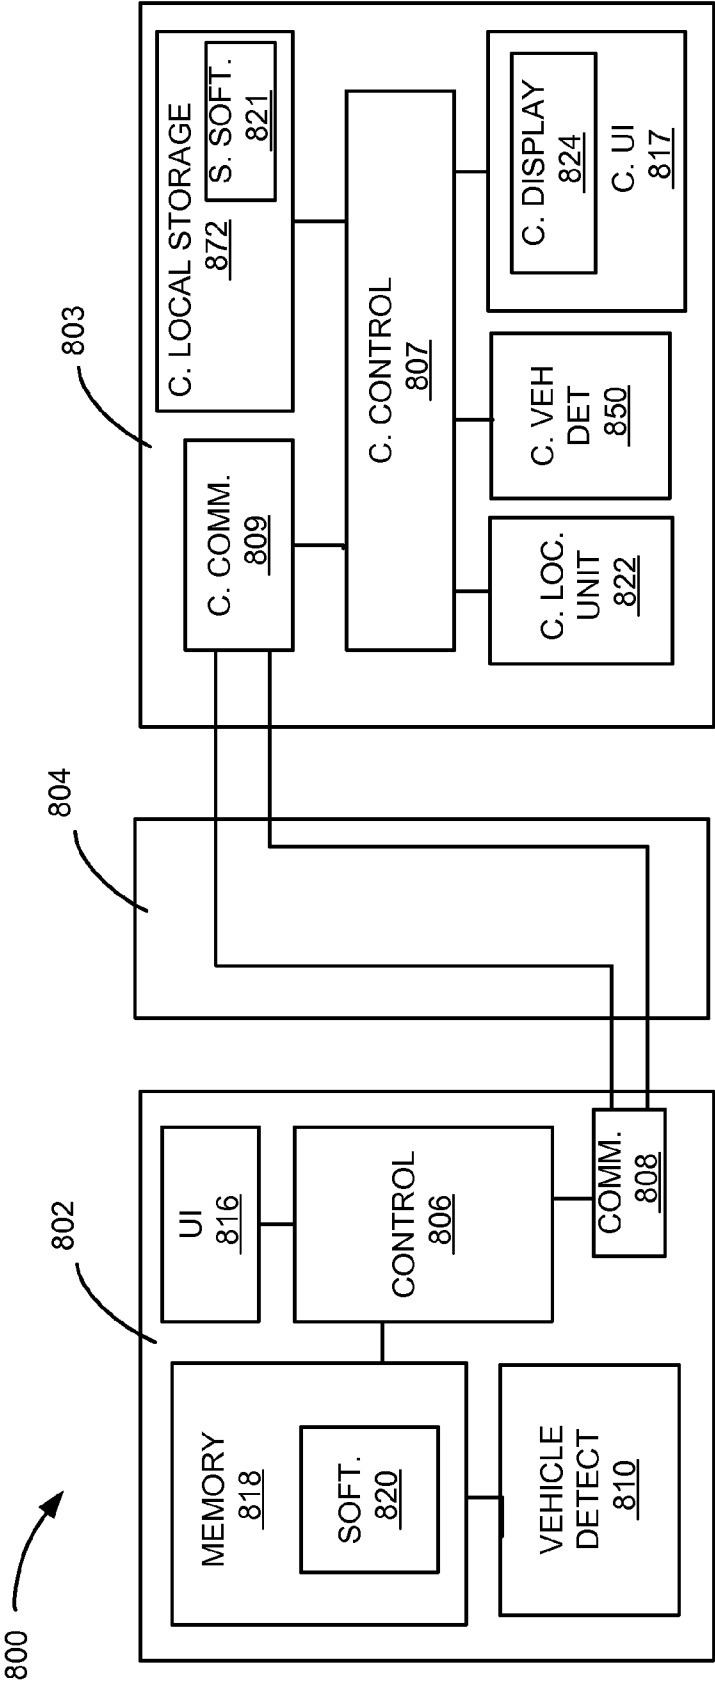


FIG. 8

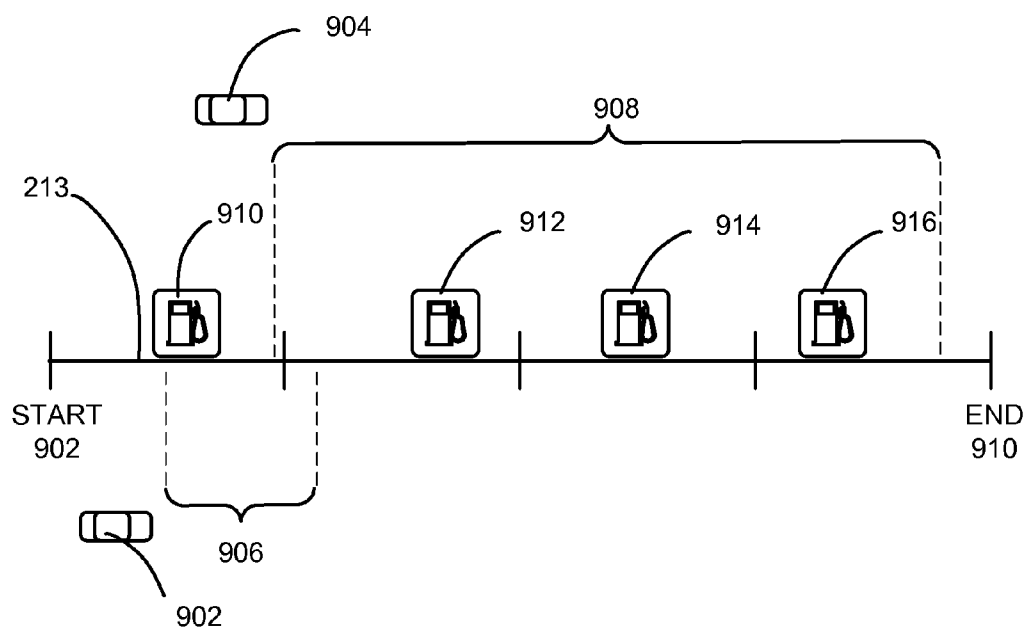


FIG. 9

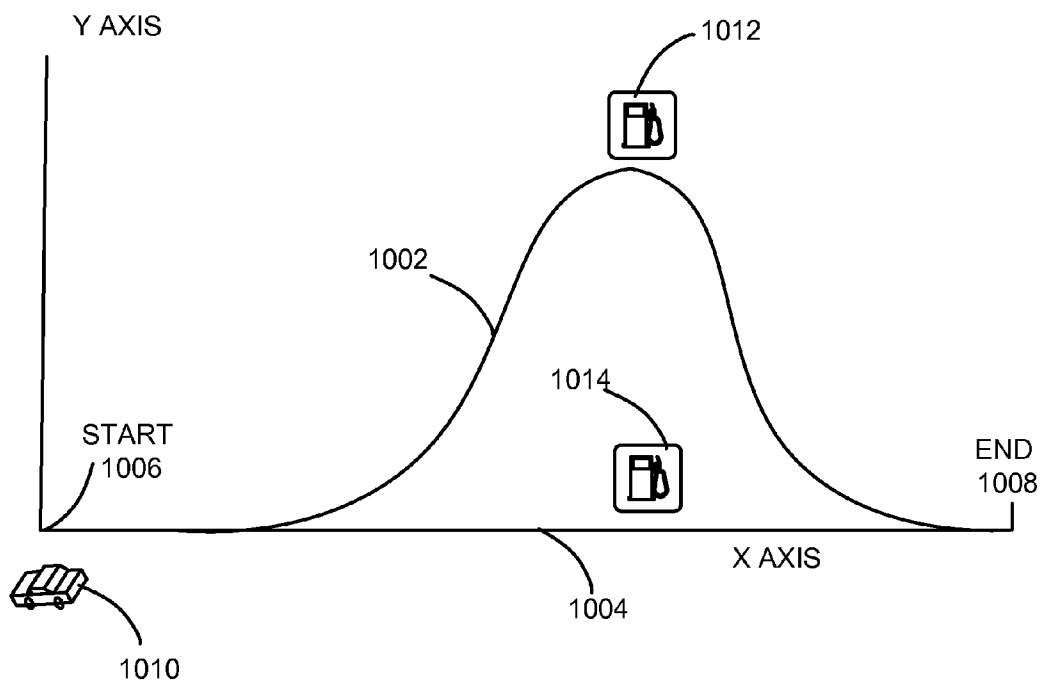


FIG. 10

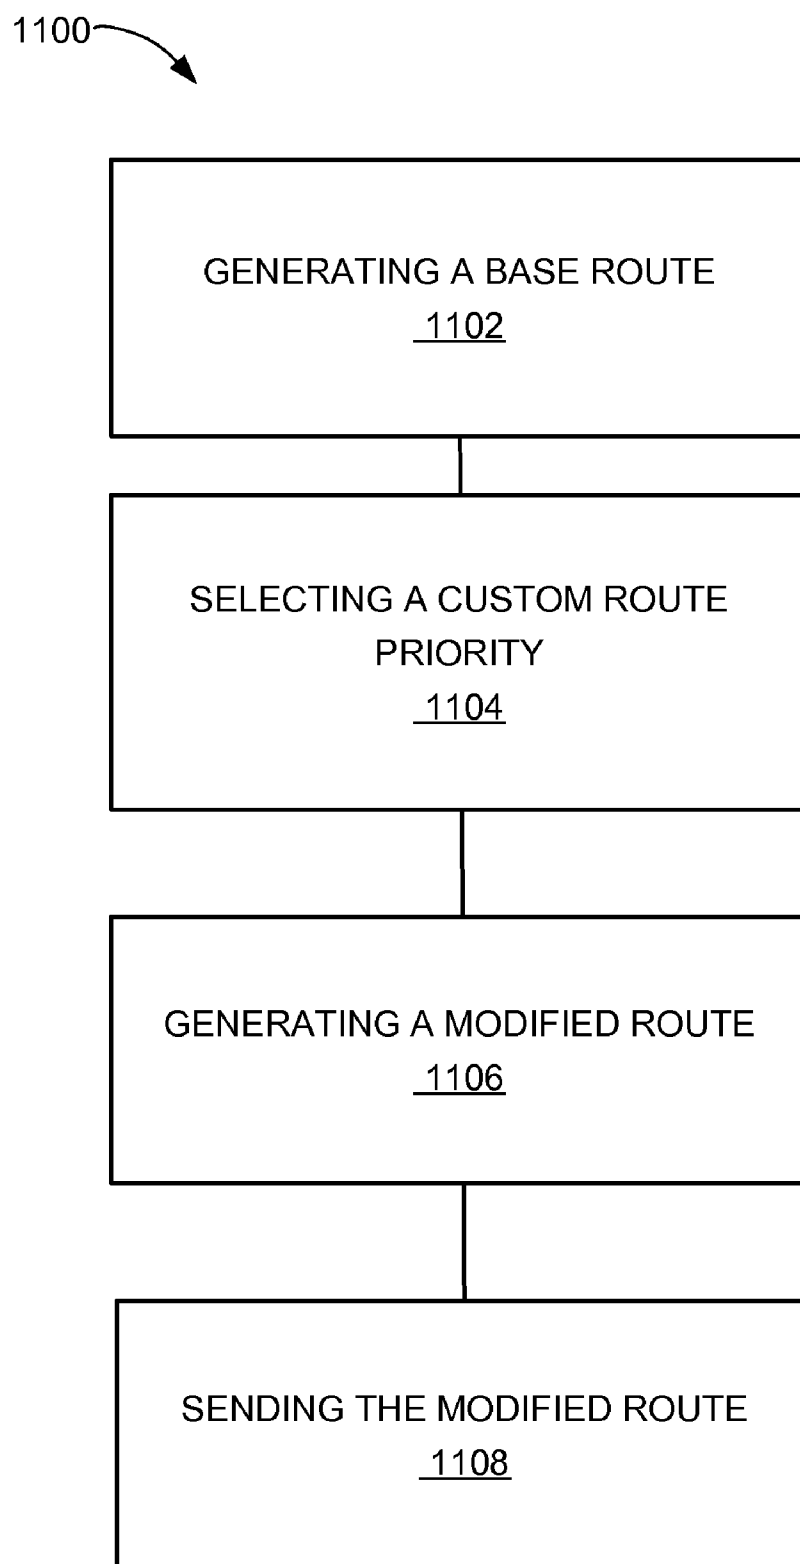


FIG. 11

## NAVIGATION SYSTEM HAVING ROUTE CUSTOMIZATION MECHANISM AND METHOD OF OPERATION THEREOF

### TECHNICAL FIELD

[0001] The present invention relates generally to a navigation system and more particularly to a system for a navigation system with a route customization mechanism.

### BACKGROUND ART

[0002] Modern portable consumer and industrial electronics, especially client devices such as navigation systems, cellular phones, portable digital assistants, and combination devices, are providing increasing levels of functionality to support modern life including location-based information services. Numerous technologies have been developed to utilize this new functionality. Some of the research and development strategies focus on new technologies while others focus on improving the existing and mature technologies. Research and development in the existing technologies can take a myriad of different directions.

[0003] As users become more empowered with the growth of mobile location based service devices, new and old paradigms begin to take advantage of this new device space. There are many technological solutions to take advantage of this new device location opportunity. One existing approach is to use location information to provide navigation services such as a global positioning system (GPS) for a car or on a mobile device such as a cell phone, portable navigation device (PND) or a personal digital assistant (PDA).

[0004] Location based services allow users to create, transfer, store, and/or consume information in order for users to create, transfer, store, and consume in the "real world". One such use of location based services is to efficiently transfer or route users to the desired destination or service.

[0005] Navigation systems and location based services enabled systems have been incorporated in automobiles, notebooks, handheld devices, and other portable products. Today, these systems aid users by incorporating available, real-time relevant information, such as maps, directions, local businesses, or other points of interest (POI). The real-time information provides invaluable relevant information.

[0006] In addition, rapid fluctuations in fuel prices have become a paramount concern for consumers. Current navigation systems can generate routes for shortest distance and fastest time but do not take fuel efficiency, environmental concerns, and fuel costs into account. The advancements with navigation system need to incorporate these growing concerns.

[0007] Thus, a need still remains for a navigation system that can create custom routes to a destination that can maximize fuel efficiency and minimize fuel consumption. In view of the ever-increasing commercial competitive pressures, along with growing consumer expectations and the diminishing opportunities for meaningful product differentiation in the marketplace, it is critical that answers be found for these problems. Additionally, the need to reduce costs, improve efficiencies and performance, and meet competitive pressures adds an even greater urgency to the critical necessity for finding answers to these problems.

[0008] Solutions to these problems have been long sought but prior developments have not taught or suggested any solutions and, thus, solutions to these problems have long eluded those skilled in the art.

### DISCLOSURE OF THE INVENTION

[0009] The present invention provides a method of operation of a navigation system having route customization mechanism including: generating a base route; selecting a custom route priority based on a route preference; generating a modified route based on the base route and the custom route priority; and sending the modified route for displaying on a device.

[0010] The present invention provides a navigation system having route customization mechanism including: a user interface for selecting a custom route priority based on a route preference; a control unit, coupled to the user interface, for generating a base route, generating a modified route based on the base route and the custom route priority; and a communication unit, coupled to the control unit, for sending the modified route for displaying on a device.

[0011] Certain embodiments of the invention have other aspects in addition to or in place of those mentioned above. The aspects can become apparent to those skilled in the art from a reading of the following detailed description when taken with reference to the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is an example of an environment using an embodiment of the present invention.

[0013] FIG. 2 is a flow chart of a navigation system in a first embodiment of the present invention.

[0014] FIG. 3 is a flow chart of the route parameters module of FIG. 2.

[0015] FIG. 4 is a flow chart of the vehicle parameters module of FIG. 2.

[0016] FIG. 5 is a flow chart of the route preference module of FIG. 2.

[0017] FIG. 6 is a flow chart of the recommend refuel module of FIG. 2.

[0018] FIG. 7 is a block diagram of a navigation system in a second embodiment of the present invention.

[0019] FIG. 8 is a block diagram of a navigation system in a third embodiment of the present invention.

[0020] FIG. 9 is a diagrammatical example of an application of the navigation system recommend refuel module of FIG. 2.

[0021] FIG. 10 is an example of an application of the navigation system having route customization mechanism for fuel estimation.

[0022] FIG. 11 is a flow chart of a method of operation of the navigation system in a further embodiment of the present invention.

### BEST MODE FOR CARRYING OUT THE INVENTION

[0023] The following embodiments are described in sufficient detail to enable those skilled in the art to make and use the invention. It is to be understood that other embodiments would be evident based on the present disclosure, and that system, process, or mechanical changes can be made without departing from the scope of the present invention.

[0024] In the following description, numerous specific details are given to provide a thorough understanding of the invention. However, it can be apparent that the invention can be practiced without these specific details. In order to avoid

obscuring the present invention, some well-known circuits, system configurations, and process locations are not disclosed in detail.

[0025] Likewise, the drawings showing embodiments of the system are semi-diagrammatic and not to scale and, particularly, some of the dimensions are for the clarity of presentation and are shown greatly exaggerated in the drawing FIGs. Similarly, although the views in the drawings for ease of description generally show similar orientations, this depiction in the FIGs. is arbitrary for the most part. Generally, the invention can be operated in any orientation.

[0026] Where multiple embodiments are disclosed and described having some features in common, for clarity and ease of illustration, description, and comprehension thereof, similar and like features one to another will ordinarily be described with similar reference numerals. The embodiments have been numbered first embodiment, second embodiment, etc. as a matter of descriptive convenience and are not intended to have any other significance or provide limitations for the present invention.

[0027] One skilled in the art would appreciate that the format with which navigation information is expressed is not critical to some embodiments of the invention. For example, in some embodiments, navigation information is presented in the format of (X, Y), where X and Y are two ordinates that define the geographic location, i.e., a position of a user.

[0028] The navigation information is presented by longitude and latitude related information. The navigation information also includes a velocity element comprising a speed component and a direction component.

[0029] The term “navigation routing information” referred to herein is defined as the routing information described as well as information relating to points of interest to the user, such as local business, hours of businesses, types of businesses, advertised specials, traffic information, maps, local events, and nearby community or personal information.

[0030] The term “module” referred to herein can include software, hardware, or a combination thereof. For example, the software can be machine code, firmware, embedded code, and application software. Also for example, the hardware can be circuitry, processor, computer, integrated circuit, integrated circuit cores, or a combination thereof.

[0031] The term “fuel” referred to herein can include gasoline, diesel, bio-diesel, ethanol, electric power, hydrogen fuel-cell, or a combination thereof, as examples. The term “fuel efficiency” referred to herein is the measure of a distance unit per a volume unit. A distance unit can include miles or kilometers. A volume unit can include gallons or liters. The term “fuel consumption” referred to herein is the actual volume of fuel used.

[0032] Referring now to FIG. 1, therein is an example of an environment 100 using an embodiment of the present invention. The environment 100 applies to any embodiment of the present invention described later. The environment includes a first device 102, such as a server or client. The first device 102 can be linked to a second device 104, such as a client or server, with a communication path 106, such as a network.

[0033] The first device 102 can be any of a variety of centralized or decentralized computing devices. For example, the first device 102 can be a computer, a computer in a grid computing pool, a virtualized computer, a computer in a cloud computing pool, or a computer in a distributed computing topology. The first device 102 can include routing

functions or switching functions for coupling with the communication path 106 to communicate with the second device 104.

[0034] The second device 104 can be of any of a variety of mobile devices. For example, the second device 104 can be a cellular phone, personal digital assistant, a notebook computer, or other multi-functional mobile communication or entertainment devices having means for coupling to the communication path 106.

[0035] The communication path 106 can be a variety of networks. For example, the communication path 106 can include wireless communication, wired communication, optical, ultrasonic, or the combination thereof. Satellite communication, cellular communication, Bluetooth, Infrared Data Association standard (IrDA), radio data system (RDS), HD radio data, wireless fidelity (WiFi), and worldwide interoperability for microwave access (WiMAX) are examples of wireless communication that can be included in the communication path 106. Ethernet, digital subscriber line (DSL), fiber to the home (FTTH), and plain old telephone service (POTS) are examples of wired communication that can be included in the communication path 106.

[0036] Further, the communication path 106 can traverse a number of network topologies and distances. For example, the communication path 106 can include personal area network (PAN), local area network (LAN), metropolitan area network (MAN), and wide area network (WAN).

[0037] For illustrative purposes, the first device 102 is shown in a single location, although it is understood that the server can be centralized or decentralized and located at different locations. For example, the first device 102 can represent real or virtual servers in a single computer room, distributed across different rooms, distributed across different geographical locations, embedded within a telecommunications network, virtualized servers within one or more other computer systems including grid or cloud type computing resources, or in a high powered client device.

[0038] Further for illustrative purposes, the environment 100 is shown with the second device 104 as a mobile computing device, although it is understood that the second device 104 can be different types of computing devices. For example, the second device 104 can be a mobile computing device, such as notebook computer, another client device, or a different type of client device.

[0039] Yet further for illustrative purposes, the environment 100 is shown with the first device 102 and the second device 104 as end points of the communication path 106, although it is understood that the environment 100 can have a different partition between the first device 102, the second device 104, and the communication path 106. For example, the first device 102, the second device 104, or a combination thereof can also function as part of the communication path 106.

[0040] Referring now to FIG. 2, therein is shown a flow chart of a navigation system 200 in a first embodiment of the present invention. The navigation system 200 provides routes based on terrain information, traffic information, fuel consumption, vehicle information, map information, and customized priorities selection by the navigation system 200 or manually entered.

[0041] The navigation system 200 can include a user destination 201, a select destination module 202, a base route module 204, base routes 205, a route parameters module 206, a route profile 207, a vehicle parameters module 208, a

vehicle profile 209, a route preference module 210, a custom route priority 211, a modified route module 212, a modified route 213, a traverse route module 214, a track fuel gauge module 216, a scan fuel prices module 218, a recommend refuel module 220, a feedback module 222, and a user generated content 224. For illustrative purposes, the navigation system 200 is shown having discrete modules, although it is understood that the navigation system 200 can include other modules or modules in different configurations.

[0042] The user destination 201 can be linked to the select destination module 202. The select destination module 202 can be linked to the base route module 204. The base route module 204 can be linked to the route parameters module 206 and the scan fuel prices module 218. The route parameters module 206 can be linked to the modified route module 212. The scan fuel prices module 218 can be linked to the modified route module 212. The modified route module 212 can be linked to the traverse route module 214. The traverse route module 214 can be linked to the recommend refuel module 220. The recommend refuel module 220 can be linked to the feedback module 222. These modules can utilize the same or portion of the same information. For illustrative purposes, the navigation system 200 is shown having discrete modules, although it is understood that the navigation system 200 can include other modules or modules in different configurations.

[0043] In addition, the vehicle parameters module 208 can be linked to the modified route module 212. The route preference module 210 can be linked to the modified route module 212. The track fuel gauge module 216 can be linked to the traverse route module 214 and the recommend refuel module 220. The recommend refuel module 220 can loop back to the traverse route module 214.

[0044] The select destination module 202 can allow a driver to input the user destination 201 into the navigation system 200. The select destination module 202 can send the user destination 201 to the base route module 204.

[0045] The base route module 204 can receive the user destination 201 from the select destination module 202. The base route module 204 can calculate a number of the base routes 205 to the user destination 201 and can display the total distance of each of the base routes 205. For example, the base routes 205 can include multiple routes to the user destination including using different local streets, freeways, and a combination thereof. The base route module 204 can send the base routes 205 to the route parameters module 206 and the scan fuel prices module 218.

[0046] The route parameters module 206 can receive the base routes 205 from the base route module 204. The route parameters module 206 can scan for parameters like street types, elevation changes, different road pavement types, and traffic along each of the base routes 205. Using these parameters, the route parameters module 206 can generate the route profile 207 for each of the base routes 205. The route profile 207 can be sent to the modified route module 212. The modified route module 212 can use the route profile 207 to calculate the total fuel estimation of each of the base routes 205.

[0047] The vehicle parameters module 208 can detect parameters about the driver's vehicle that can affect fuel consumption and fuel efficiency. These parameters can include the vehicle model, the vehicle condition such as tire pressure, the cargo weight including passengers, and driver behavior. For example, parameters like the vehicle model can inform the vehicle parameters module 208 of the vehicle's base weight, engine size, performance statistics, tire size, fuel

tank size, and other pertinent information. Parameters like tire pressure, cargo weight, and driver behavior can be inputted manually by the driver or automatically detected. The vehicle parameters module 208 can send vehicle parameter information to the modified route module 212.

[0048] The route preference module 210 can allow the driver to set a preference to the types of routes displayed to the driver. The route preference module 210 can allow a driver to set a priority based on three types of route preferences in order to create the custom route priority 211. The three types of route preference can include most ecological route, shortest route, and fastest route. The custom route priority 211 can be sent to the modified route module 212.

[0049] For example, the driver can assign values or weights to each route preference in order to create the custom route priority 211. The modified route module 212 can use the custom route priority 211 to filter and display the base routes 205.

[0050] The scan fuel prices module 218 can scan the fuel prices of stations along the base routes 205. In addition, the scan fuel prices module 218 can calculate the fuel consumption needed to reach each fuel station along the base routes 205. The scan fuel prices module 218 can send updated fuel prices to the modified route module 212.

[0051] The modified route module 212 can compile the route profile 207, the vehicle profile 209, and the custom route priority 211 to generate the total fuel estimation for each of the base routes 205. The modified route module 212 can also display the estimated fuel consumption of each of the base routes 205 and display the total estimated time of each of the base routes 205.

[0052] For example, the modified route module 212 can display one of the base routes 205 as having a predicted fuel consumption of eight volume units, a fuel efficiency of 23 distance units per volume unit and an estimated total time of two hours and seven minutes. This information can assist a driver in selecting a route based on a total time goal or a fuel consumption goal.

[0053] The modified route module 212 can use the route profile 207 and the vehicle profile 209 to modify the base routes 205 for calculating the total fuel estimation of each of the base routes 205. For example, to calculate the total fuel estimation for one of the base routes 205, the modified route module 212 can combine data from the route profile 207 and the vehicle profile 209. The modified route module 212 can apply vehicle weight and engine acceleration parameters to road conditions, traffic, and elevation changes. Using route and vehicle parameters, the modified route module 212 can display a fuel estimation that is unique for the type of vehicle, the current traffic conditions, and terrain of each of the base routes 205.

[0054] The modified route module 212 can display the total time and fuel estimation of each of the base routes 205 that reflect updated information from the route and vehicle parameters. The driver can select one of the base routes to traverse. The modified route module 212 can generate the modified route 213 once the driver selects one of the base routes 205. The modified route 213 can be sent to the traverse route module 214.

[0055] The traverse route module 214 can execute navigation operations for the modified route 213. Navigation operations can include turn-by-turn instructions and audio prompts

of routing instructions. The traverse route module **214** can receive updated fuel gage information from the track fuel gauge module **216**.

[0056] The track fuel gauge module **216** can track the amount of fuel in the vehicle. The track fuel gauge module **216** can determine the amount of fuel in the vehicle through a sensor attached to the vehicle or calculate the amount through driver input. For example, the driver can input the amount of fuel and the octane level of the fuel in the fuel tank. The track fuel gauge module **216** can calculate the current level of fuel in the vehicle by subtracting the inputted amount by the fuel consumption on the trip. The track fuel gauge module **216** can send fuel gauge updates to the traverse route module **214** and the recommend refuel module **220**.

[0057] The recommend refuel module **220** can recommend refueling options to a driver. The recommend refuel module **220** can determine how much range the vehicle has remaining and scan the fuel prices within that range. The recommend refuel module **220** can recommend the fuel station with the lowest actual cost within that range. For example, if the vehicle's fuel tank is at a low level, the recommend refuel module **220** will recommend the closest and cheapest fuel station within that range.

[0058] If the vehicle's fuel tank is not at a low level, the recommend refuel module **220** will scan all the fuel prices within the vehicle's range. The recommend refuel module **220** can recommend the fuel station with the lowest estimated cost. The recommend refuel module **220** can calculate the lowest estimated cost by combining the listed fuel price with the price of fuel consumed to reach that fuel station. Once the driver has selected a fuel station, the recommend refuel module **220** can enable the traverse route module **214** to detour to the fuel station.

[0059] The feedback module **222** can allow the driver to input the user generated content **224** into the navigation system **200**. The user generated content **224** can include a survey that reflects the driver's behavior. The user generated content **224** can assist the navigation system **200** to calculate more accurate fuel estimations for subsequent trips. In addition, the feedback module **222** can also record driving behavior during trips. For example, the feedback module **222** can record the frequency of behaviors like rapid accelerations and rapid stops. The recorded driver behavior and the user generated content **224** can allow the navigation system **200** to more accurately calculate fuel estimations in subsequent trips.

[0060] Referring now to FIG. 3, therein is shown the flow chart of the route parameters module **206** of FIG. 2. The route parameters module **206** is linked to the base route module **204** of FIG. 2 and the modified route module **212** of FIG. 2.

[0061] The route parameters module **206** can include a street types profile module **302**, an elevation profile module **304**, a pavements profile module **306**, a traffic profile module **308**, and a route profile **310**. The route parameters module **206** can receive the base routes **205** from the base route module **204**. For illustrative purposes, the route parameters module **206** is shown having discrete modules, although it is understood that the route parameters module **206** can include other modules or modules in different configurations.

[0062] The street types profile module **302** can determine the types of streets within each of the base routes **205** and calculate the effect of these street types on fuel consumption. The calculations from the street types profile module **302** can be used to generate the route profile **310**. The route profile **310**

can be used by the modified route module **212** of FIG. 2 to generate a route's total fuel estimation.

[0063] For example, the street types profile module **302** can account for the frequency of expressways, one-way streets, boulevards, and four-lane highways within each of the base routes **205** route. The street types profile module **302** can calculate the effect of each street type on fuel efficiency and fuel consumption. The street types profile module **302** can send the street type frequency and the fuel consumption information for each of the base routes **205** to the route profile **310**. The route profile **310** can be used by the modified route module **212** of FIG. 2 for calculating the total fuel estimation of each of the base routes **205**.

[0064] The elevation profile module **304** can calculate fuel consumption based on elevation changes in the terrain along each of the base routes **205**. The elevation profile module **304** can calculate fuel consumption based on the elevation changes. For example, the elevation profile module **304** can determine how much additional fuel is consumed by going uphill and how much fuel is saved by going downhill. The calculations from the elevation profile module **304** can be used to generate the route profile **310**. The route profile **310** can be used by the modified route module **212** of FIG. 2 to generate the total fuel estimation for each of the base routes **205**.

[0065] The pavements profile module **306** can calculate fuel consumption based on the different road pavements in each of the base routes **205**. Road pavements can include dirt roads, asphalt, fording streams, desert sand, ice, and snow. The pavements profile module **306** can detect each different pavement type in each of the base routes **205** and the duration of each pavement type to calculate a change in fuel consumption for each of the base routes **205**.

[0066] For example, the pavements profile module **306** can calculate slippage and traction information for each pavement type. If the vehicle is off-roading, the pavements profile module **306** can take into account loss of traction due to loose dirt, rocks, and wheel spin. Factors like slippage and traction can be used to calculate additional fuel consumption. The pavements profile module **306** can send road pavement information to the route profile **310** to be used by the modified route module **212** of FIG. 2.

[0067] The traffic profile module **308** can calculate how traffic conditions will affect fuel efficiency and fuel consumption for a route. For example, the traffic profile module **308** can account for idle times, low speeds, and maximum speeds. The traffic profile module **308** can also account for routes with free flowing traffic and estimate the positive effect on fuel efficiency for each of the base routes **205**. The traffic profile module **308** can send the traffic information to the route profile **310** to be used by the modified route module **212** of FIG. 2.

[0068] The route profile **310** can include route information from the street types profile module **302**, the elevation profile module **304**, the pavements profile module **306**, and the traffic profile module **308**. The route profile **310** can be sent to the modified route module **212** of FIG. 2. Using the route profile **310**, the modified route module **212** can determine the fuel consumption of each of the base routes **205** based on route parameters.

[0069] Referring now to FIG. 4, therein is shown a more detailed flow chart of the vehicle parameters module **208** of FIG. 2. The vehicle parameters module **208** can be linked to the modified route module **212** of FIG. 2.

[0070] The vehicle parameters module 208 can include a vehicle model module 402, a vehicle condition module 404, a cargo weight module 406, and a driver behavior module 408. For illustrative purposes, the vehicle parameters module 208 is shown having discrete modules, although it is understood that the vehicle parameters module 208 can include other modules, or modules in different configurations.

[0071] The vehicle parameters module 208 can detect parameters about the driver's vehicle that can affect fuel consumption. These parameters can be detected through sensors or can be inputted manually by the driver. The parameter information can be sent to the modified route module 212 to provide information needed to calculate the total fuel estimation for each of the base routes 205.

[0072] The vehicle model module 402 can detect the brand and the model of the vehicle. The vehicle model module 402 can detect the vehicle model through sensors attached to the vehicle or through driver input. The vehicle model module 402 can access databases to gain pertinent information about the vehicle. This information can include the vehicle's base weight, engine size, performance statistics, tire size, and fuel tank size. The vehicle information can be sent to the modified route module 212 in preparation for calculating the total fuel estimation for each of the base routes 205.

[0073] The vehicle condition module 404 can determine vehicle maintenance conditions that can affect fuel efficiency. Vehicle conditions and maintenance can include engine tuning and tire pressure. For example, the vehicle condition module 404, through sensors attached to the vehicle, can determine the tire pressure within all four tires. Tires at maximum pressure will decrease fuel consumption and increase fuel efficiency in contrast to tires at a low pressure.

[0074] The cargo weight module 406 can determine the additional weight in the vehicle. For example, the additional weight can include cargo and passengers in addition to the base weight of the vehicle. The cargo and passenger weight can be determined manually or automatically. The driver can estimate the additional weight, including passengers and enter the amount into the cargo weight module 406.

[0075] The driver behavior module 408 can determine driving behavior that can affect fuel efficiency. For example, driving behavior like quick accelerations after stop signs or low constant speeds can increase or decrease fuel efficiency. The driver behavior module 408 can also track statistics like average speed, maximum speed, braking frequency, and other statistics that affect fuel efficiency. Driver behavior can be determined manually or automatically. For example, the driver behavior module 408 can prompt the driver to complete a short survey of driver behavior before a trip.

[0076] In addition, the driver behavior module 408 can learn driver behavior by recording the driver's habits during a trip. For example, the driver behavior module 408 can store information including a driver's top speed, a driver's acceleration behavior, a driver's braking behavior, and a driver's cruising behavior. The driver behavior module 408 can identify frequencies in each type of driving behavior. Based on these frequencies, the driver behavior module 408 can recalculate fuel estimation for each of the base routes 205.

[0077] A vehicle profile 410 can include the information from the vehicle model module 402, the vehicle condition module 404, the cargo weight module 406, and the driver behavior module 408. The vehicle profile 410 can be sent to the modified route module 212. Applying the vehicle profile

410 to each of the base routes 205, the modified route module 212 can calculate a total fuel estimation for each of the base routes 205.

[0078] Referring now to FIG. 5, therein is shown a flow chart of the route preference module 210 of FIG. 2. The route preference module 210 is linked to the modified route module 212 of FIG. 2.

[0079] The route preference module 210 can include an ecological efficient module 502, a shortest route module 504, a fastest route module 506, an ecological weight 508, a shortest weight 510, a fastest weight 512, a create custom priority module 514 and the custom route priority 211 of FIG. 2. For illustrative purposes, the route preference module 210 is shown having discrete modules, although it is understood that the route preference module 210 can include other modules or modules in different configurations.

[0080] The route preference module 210 can allow the driver to create the custom route priority 211. The custom route priority 211 can allow the modified route module 212 to search for a route that conforms to the driver's preference. The custom route priority 211 can include the ecological weight 508, the shortest weight 510, and the fastest weight 512.

[0081] The ecological weight 508 corresponds to a preference for routes that minimize fuel consumption. The shortest weight 510 corresponds to a preference for routes that minimize distance traveled. The fastest weight 512 corresponds to minimizing time spent traversing the route.

[0082] The route preference module 210 can allow the driver to input scalar values into the ecological efficient module 502, the shortest route module 504, and the fastest route module 506. For example, the ecological efficient module 502, the shortest route module 504, and the fastest route module 506 can prompt the driver to distribute a maximum of 10 points among the modules. For illustrative purposes, the driver can input 5 points into the ecological efficient module 502, 3 points into the fastest route module 506 and 2 points into the shortest route module 504.

[0083] The ecological efficient module 502, the shortest route module 504, and the fastest route module 506 can assign a scalar value to the corresponding weight. The ecological efficient module 502 can assign a scalar value to the ecological weight 508. The shortest route module 504 can assign a scalar value to the shortest weight 510. The fastest route module 506 can assign a scalar value to the fastest weight 512.

[0084] The create custom priority module 514 can read the scalar values from the ecological weight 508, the shortest weight 510, and the fastest weight 512. The create custom priority module 514 can generate a custom route priority 516 based on the scalar values assigned to the weight modules. For illustrate purposes, the create custom priority module 514 can generate the custom route priority 516 by using the algorithm in equation 1 below.

$$a \cdot x + b \cdot y + c \cdot z \quad (1)$$

[0085] The variables a, b, and c represent scalar numbers from the ecological weight 508, the shortest weight 510, and the fastest weight 512. The variables a, b, c are denoted as integers, although it is understood that a, b, and c can be real numbers which includes fractions or decimals. The variables x, y, and z can represent the ecological weight 508, the shortest weight 510, and the fastest weight 512.

[0086] As another example to achieve a route that minimizes fuel consumption, the value of 10 can be assigned to the



ecological weight **508**, and no points assigned to the shortest weight **510** and the fastest weight **512**. In this situation, the create custom priority module **514** can generate the custom route priority **516** that can reflect the algorithm of equation 2:

$$10x+0y+0z \quad (2)$$

[**0087**] In this example, the scalar points were all assigned to the ecological weight **508**. The custom route priority **211** that reflects equation 2 can be sent to the modified route module **212**. The modified route module **212** can display routes that conform to the custom route priority **211**.

[**0088**] As another example, a system with points to allocate, can allow the driver to select a route that reflect all of the route preferences. The driver can weight each route preference to select a route that reflects each preference to varying degrees. For example, the driver can input 5 points into the fastest route module **506**, 3 points into the ecological efficient module **502**, and 2 points into the shortest route module **504**. The create custom priority module **514** can generate the custom route priority **516** that can include the algorithm in equation 3 below:

$$3x+2y+5z \quad (3)$$

[**0089**] It has been discovered that the present invention can generate routes that balance route preferences to the proportions established by the custom route priority **211**. For example, the modified route module **212** of FIG. 2 can generate a route reflecting a 50 percent priority to speed, 30 percent priority to the ecological efficiency, and 20 percent priority to shortest distance. The modified route **213** of FIG. 2 will reflect a preference to speed but still account for the lower preference of shortest distance.

[**0090**] Referring now to FIG. 6, therein shown is a flow chart of the recommend refuel module **220** of FIG. 2. The traverse route module **214** of FIG. 2 can be linked to the recommend refuel module **220** of FIG. 2. The track fuel gauge module **216** of FIG. 2 can be linked to the recommend refuel module **220**. The recommend refuel module **220** can be linked to the feedback module **222** of FIG. 2. The recommend refuel module **220** can loop back to the traverse route module **214** of FIG. 2.

[**0091**] The recommend refuel module **220** can include a detect vehicle range module **602**, a base range **604**, a critical station search module **606**, a first station fuel module **608**, a second station fuel module **610**, a select station module **612**, and a recommend behavior module **614**.

[**0092**] The detect vehicle range module **602** can be linked to the base range **604**. The base range **604** can be linked to the critical station search module **606**. The critical station search module **606** can include the first station fuel module **608** and the second station fuel module **610**. The first station fuel module **608** can be linked to the second station fuel module **610**. The critical station search module **606** can be linked to the select station module **612**. The select station module **612** can be linked to the recommend behavior module **614**. The modules within the recommend refuel module **220** are shown having discrete modules, although it is understood that the recommend refuel module **220** can include other modules or modules in different configurations.

[**0093**] The recommend refuel module **220** can receive fuel gauge information from the traverse route module **214**. The recommend refuel module **220** can enable the traverse route module **214**. Additionally, the driver can manually enable the traverse route module **214**. The recommend refuel module

**220** can prompt the driver to refuel based on fuel station costs and fuel consumption used to reach the fuel station.

[**0094**] The detect vehicle range module **602** can predict the remaining distance the vehicle can travel based on the fuel estimation of the vehicle's current course. Depending on the fuel remaining in the vehicle's fuel tank, the detect vehicle range module **602** can calculate the base range **604**. The base range **604** can reflect the amount of distance units the vehicle can travel before the vehicle runs out of fuel.

[**0095**] The detect vehicle range module **602** can increase or decrease the base range **604** based on the terrain conditions along the route. For example, if the driver is currently climbing a mountain road, the detect vehicle range module **602** will predict a shorter value for the base range **604** than if the vehicle was going downhill.

[**0096**] The critical station search module **606** can receive the base range **604**. The critical station search module **606** can locate and display the prices of all fuel stations within the base range **604**. If the critical station search module **606** detects only one refuel station within the base range **604**, the critical station search module **606** can alert the driver that a refuel must occur at that fuel station.

[**0097**] The critical station search module **606** can execute the first station fuel module **608**. The first station fuel module **608** can calculate the fuel consumption it will take to reach the first fuel station within the base range **604**. If there is only one fuel station within the vehicle's range, the first station fuel module **608** can prompt the driver of a critical fuel warning. A critical fuel warning is defined as an alert that indicates that the vehicle must refuel at the nearest fuel station. The vehicle must refuel at the nearest fuel station because the vehicle cannot reach any other fuel stations with the vehicle's base range.

[**0098**] If the critical station search module **606** detects more than one fuel station within the base range **604**, the critical station search module **606** can enable the second station fuel module **610** after enabling the first station fuel module **608**. The second station fuel module **610** can calculate the fuel consumption to reach the remaining fuel stations within the base range **604** of the vehicle.

[**0099**] The select station module **612** can allow the driver to select a station for refueling. The select station module **612** can display the fuel consumption calculations from the first station fuel module **608** and the second station fuel module **610**. If the driver received a critical fuel level warning, the select station module **612** can recommend the first station within the base range **604**. The select station module **612** can display the fuel consumption to reach the first fuel station, and the price of fuel at the first station.

[**0100**] If more than one fuel station is within the base range **604**, the select station module **612** can display all fuel stations within the base range **604**. The select station module **612** can display the price of fuel for each of the fuel station within the base range **604**.

[**0101**] The select station module **612** can determine the estimated total cost of a refuel by combining the station's fuel price with the costs of the fuel consumed to reach the fuel station. The select station module **612** can display the estimated refuel costs of all the fuel stations within the base range **604**, allowing the driver to select the cheapest fuel station based on price and fuel consumption.

[**0102**] The recommend behavior module **614** can detect how the driver's speed, braking frequency, and acceleration patterns are increasing or decreasing the base range **604**. The

recommend behavior module **614** can recommend instructions to the driver to increase fuel efficiency. For example, a driver in a secluded section of a highway could be far away from the next fuel station. For illustrative purposes, the next fuel station could be four miles outside the base range **604** of the vehicle. The recommend behavior module **614** can recommend a change in top speed, slower accelerations, and cruising behavior to increase fuel efficiency. The driver's modified behavior can increase the base range **604** so that a driver, low on fuel, can reach the next fuel station.

[0103] It has been discovered that the present invention provides a navigation system having the ability to recommend modifications to driver behavior in order to minimize fuel consumption. The navigation system can calculate vehicle parameters and route parameters to provide a fuel estimation and the base range **604**. The navigation system can recommend a modification of the driver's behavior for increasing the base range **604** when the vehicle is low on fuel.

[0104] Referring now to FIG. 7, therein is shown a block diagram of a navigation system **700** having route customization mechanism for fuel estimation in a second embodiment of the present invention. The navigation system **700** can include a first device **702** that can link to a communication path **704**. The communication path **704** can link to a global positioning system **728**. The communication path **704** can be linked to a second device **726** such as a server.

[0105] The first device **702** can access the communication path **704** for location services, such as the global positioning system **728**. The first device **702** can be any of a variety of centralized or decentralized computing devices or any of a variety of mobile devices. For example, the first device **702** can be a computer, a computer in a grid computing pool, a virtualized computer, a computer in a cloud computing pool, or a computer in a distributed computing topology. The first device **702** can include routing functions or switching functions for coupling with the communication path **704**.

[0106] As another example, the first device **702** can be a cellular phone, personal digital assistant, a notebook computer, or other multi-functional mobile communication or entertainment devices having means for coupling to the communication path **704**. The communication path **704** can include the same variety of networks listed in the communication path **106** of FIG. 1.

[0107] The first device **702** can include a number of functional units. For example, the first device **702** can include a control unit **706** such as a processor or computer, a communication unit **708**, a vehicle detect unit **710**, a user interface **716**, a memory **718**, a first software **720**, a location unit **722**, and a multimedia display interface **724**.

[0108] The control unit **706** can be coupled to the communication unit **708**, the vehicle detect unit **710**, the user interface **716**, the memory **718**, and the location unit **722**. The memory **718** can include the first software **720**. The user interface **716** can be linked to the multimedia display interface **724**.

[0109] The multimedia display interface **724** can include a display or a projector. The user interface **716** can include a key pad, a touchpad, soft-keys, a keyboard, a microphone, a speaker, or any combination thereof to provide data and command inputs for the navigation system **700**.

[0110] For illustrative purposes, the navigation system **700** is described with discrete functional blocks, although it is understood that the navigation system **700** can have a different configuration. For example, the control unit **706**, the com-

munication unit **708**, the vehicle detect unit **710**, and the location unit **722** may not be discrete functional blocks but may have one or more of the aforementioned blocks combined into one functional block.

[0111] The control unit **706** can execute the first software **720** and can provide the intelligence of the first device **702**. The control unit **706** can interact with the vehicle detect unit **710**, the communication path **704** via the communication unit **708**, and the user interface **716**.

[0112] The vehicle detect unit **710** can detect vehicle information and can interact with the vehicle parameters module **208** of FIG. 2. The driver can provide an input to the first device **702** through the user interface **716**.

[0113] The location unit **722** can provide location information and can be implemented in many ways. For example, the location unit **722** can be an inertial navigation system, cell-tower location system, accelerometer location system, or any combination thereof. The location unit **722** can be linked with the global positioning system **728** to determine location and provide location information. The location unit **722** can include the active and passive components, such as micro-electronics or an antenna, for interaction with the communication path **704**.

[0114] The memory **718**, such as a volatile memory, a non-volatile memory, an internal memory, an external memory, or a combination thereof, can store the first software **720**, setup data, multimedia data, photos, text, sounds recordings, video, and other data for the operation of the navigation device. The memory **718** can also store the relevant information, such as maps, route information, traffic information, vehicle information, advertisement and point of interest (POI), navigation routing entries, driver profiles, or any combination thereof. The memory **718** can also store recorded, imaged, sampled or created relevant information to be transmitted to the first device **702**.

[0115] The memory **718** can be implemented in a number of ways. For example, the memory **718** can be a nonvolatile storage such as non-volatile random access memory (NVRAM), Flash memory, or disk storage or a volatile storage such as static random access memory (SRAM).

[0116] The communication unit **708** can connect with the communication path **704** and can include active and passive components, such as microelectronics or an antenna, for interaction to the telecommunication system of the communication path **704**.

[0117] The first software **720** can include the navigation system **200** of FIG. 2. For example, the first software **720** can include the select destination module **202** of FIG. 2, the base route module **204** of FIG. 2, the route parameters module **206** of FIG. 2, the vehicle parameters module **208** of FIG. 2, the modified route module **212** of FIG. 2, the traverse route module **214** of FIG. 2, the track fuel gauge module **216** of FIG. 2, the recommend refuel module **220** of FIG. 2, and the feedback module **222** of FIG. 2. The control unit **706** can execute the first software **720**.

[0118] The user destination **201** of FIG. 2 can be inputted into the user interface **716**. The control unit **706** can send the user destination **201** to the first software **720**. The control unit **706** can access the global positioning system **728** through the communication unit **708** and the location unit **722**. The first software **720** can generate the base routes **205**. The base routes **205** can be displayed on the multimedia display interface **724**. The driver can select the modified route **213** of FIG. 2 with the user interface **716**. The control unit **706** can send

the modified route **213** to the multimedia display interface **724** for displaying. The control unit **706** can execute the traverse route module **214** of FIG. 2, the recommend refuel module **220** of FIG. 2, and the feedback module **222** of FIG. 2.

[0119] The control unit **706** can operate the vehicle detect unit **710**. The vehicle detect unit **710** can include sensors attached to the vehicle. For example, the sensors can include tire pressure sensors, vehicle weight sensors, fuel gauge sensor, and an engine sensor.

[0120] Referring now to FIG. 8, therein is shown a block diagram of a navigation system **800** having route customization mechanism for fuel efficiency in a third embodiment of the present invention. A first device **802**, such as a server or non-mobile computing device, can link to a second device **803**, such as a client device or a mobile computing device, with a communication path **804**.

[0121] The first device **802** can include routing functions or switching functions for coupling with the communication path **804** to communicate with the second device **803**.

[0122] The second device **803** can be of any of a variety of mobile devices. For example, the second device **803** can be a cellular phone, personal digital assistant, a notebook computer, or other multi-functional mobile communication or entertainment devices having means for coupling to the communication path **804**. The communication path **804** can be a variety of networks similar to networks listed in the communication path **106** of FIG. 1.

[0123] For illustrative purposes, the first device **802** is shown as a server. The first device **802** is shown in a single location, although it is understood that the server can be centralized or decentralized and located at different locations. For example, the first device **802** can represent real or virtual servers in a single computer room, distributed across different rooms, distributed across different geographical locations, embedded within a telecommunications network, virtualized servers within one or more other computer systems including grid or cloud type computing resources, or in a high powered client device.

[0124] Further, for illustrative purposes, the navigation system **800** is shown with the second device **803** as a client. The second device **803** can be a mobile computing device, although it is understood that the second device **803** can be different types of computing devices. For example, the second device **803** can be a mobile computing device, such as notebook computer, another client device, or a different type of client device.

[0125] Yet further for illustrative purposes, the navigation system **800** is shown with the first device **802** and the second device **803** as end points of the communication path **804**, although it is understood that the navigation system **800** can have a different partition between the first device **802**, the second device **803**, and the communication path **804**. For example, the first device **802**, the second device **803**, or a combination thereof can also function as part of the communication path **804**.

[0126] The first device **802** can include a server control unit **806**, such as a processor or a computer, a server communication unit **808**, a vehicle detect engine **810**, a user interface **816**, and a memory **818**. The memory **818** can include a first software **820**. The server control unit **806** can be coupled to the server communication unit **808**, the vehicle detect engine **810**, a road conditions engine **812**, a mapping engine **814**, the user interface **816**, and the memory **818**.

[0127] For illustrative purposes, the navigation system **800** is shown with the first device **802** described with discrete functional blocks, although it is understood that the navigation system **800** can have the first device **802** in a different configuration. For example, the server control unit **806**, the server communication unit **808**, the memory **818**, and the first software **820** may not be discrete blocks but may have one or more of the aforementioned blocks combined into one functional block.

[0128] The server control unit **806** can execute the first software **820** and can provide the intelligence of the first device **802** for interaction with the second device **803**. The server control unit **806** can interact with the vehicle detect engine **810**, the road conditions engine **812**, the mapping engine **814**, the communication path **804** via the server communication unit **808**, and the user interface **816**. The server communication unit **808** can send and receive information through the communication path **804**.

[0129] The second device **803** can include, for example, a client control unit **807**, such as a processor, coupled with a client local storage **872**, a second software **821**, a client communication unit **809**, a client vehicle detect unit **850**, a client location unit **822**, and a client user interface **817** having a multimedia display interface **824**. The client user interface **817** can also include a projector, a key pad, a touchpad, soft-keys, a keyboard, a microphone, a speaker, or any combination thereof to provide data and command inputs to the second device **803**.

[0130] The client control unit **807** can execute the second software **821** from the client local storage **872**. The client control unit **807** can provide the intelligence of the second device **803** for interaction with the first device **802**. The second software **821** can allow the second device **803** to interact with the communication path **804** via the client communication unit **809** and with the client location unit **822**.

[0131] The client location unit **822** can provide location information and be implemented in many ways. For example, the client location unit **822** can be a global positioning system (GPS), inertial navigation system, cell-tower location system, accelerometer location system, or any combination thereof. The client location unit **822** can include the active and passive components, such as microelectronics or an antenna, for interaction with the communication path **804**.

[0132] The client local storage **872** can store the second software **821**, setup data, multimedia data, photos, text, sounds recordings, video, and other data for the operation of the second device **803** as a navigation device. The client local storage **872** can also store relevant information, such as maps, route information, vehicle information, traffic information, advertisement and point of interest (POI), navigation routing entries, driver profiles, or any combination thereof, from the first device **802** or can be preloaded. The client local storage **872** can also store recorded, imaged, sampled or created relevant information to be transmitted to the first device **802**.

[0133] The client local storage **872** can be implemented in a number of ways. For example, the client local storage **872** can be a nonvolatile storage such as non-volatile random access memory (NVRAM), Flash memory, or disk storage or a volatile storage such as static random access memory (SRAM).

[0134] The client communication unit **809** can connect to the server communication unit **808** through the communication path **804**. The client communication unit **809** can include active and passive components, such as microelectronics or

an antenna, for interaction to the telecommunication system of the communication path 804.

[0135] The navigation system 200 of FIG. 2 can be partitioned between the first software 820 and the second software 821. For example, the first software 820 can include the base route module 204 of FIG. 2, the route parameters module 206 of FIG. 2, the vehicle parameters module 208 of FIG. 2, the modified route module 212 of FIG. 2, the traverse route module 214 of FIG. 2, and the recommend refuel module 220 of FIG. 2. The server control unit 806 can execute the software modules partitioned on the first software 820.

[0136] For illustrative purposes, the second software 821 can include the select destination module 202 of FIG. 2, the track fuel gauge module 216 of FIG. 2, and the feedback module 222 of FIG. 2. Based on the size of the client local storage 872, the second software 821 can include additional modules of the navigation system 200 of FIG. 2. The client control unit 807 can execute the software modules partitioned on the second software 821.

[0137] The user destination 201 of FIG. 2 can be inputted into the multimedia display interface 824. The client control unit 807 can send the user destination 201 to the second software 821 and the first software 820.

[0138] The first software 820 can generate the base routes 205 of FIG. 2. The server communication unit 808 can send information like the base routes 205 to the second device 803 through the communication path 804. The base routes 205 can be displayed on the multimedia display interface 824.

[0139] The client control unit 807 can operate the client vehicle detect unit 850. The client vehicle detect unit 850 can include sensors attached to the vehicle. For example, the sensors can include tire pressure sensors, vehicle weight sensors, and an engine sensor. The client communication unit 809 can send tire information, vehicle weight information, and engine information to the first device 802.

[0140] Referring now to FIG. 9, therein is shown a diagrammatical view of a route in an example application of the navigation system 200 of FIG. 2. The diagram includes a first vehicle 902 and a second vehicle 904. The diagram also includes a first base range 906 for the first vehicle 902 and a second base range 908 for the second vehicle 904.

[0141] The diagrammatic view depicts an example of the first vehicle 902 and the second vehicle 904 depicted traveling from left to right of the modified route 213 of FIG. 2. The modified route 213 can include a first fuel station 910, a second fuel station 912, a third fuel station 914, and a fourth fuel station 916.

[0142] For illustrative purposes, the first fuel station 910 sells fuel at \$3.35. The second fuel station 912 sells fuel at \$3.20. The third fuel station 914 sells fuel at \$2.97 and the fourth fuel station 916 sells fuel at \$3.26.

[0143] The first vehicle 902 has a low level of fuel remaining. The recommend refuel module 220 of FIG. 2 can enable the detect vehicle range module 602 of FIG. 6. The detect vehicle range module 602 can calculate the first base range 906 based on local terrain and remaining fuel. The critical station search module 606 of FIG. 6 can enable the first station fuel module 608. The first station fuel module 608 of FIG. 6 can detect the first fuel station 910. The critical station search module 606 can determine that the first vehicle 902 can only reach one refuel station.

[0144] The first base range 906 represents the distance the first vehicle 902 can travel before running out of fuel. The recommend refuel module 220 of FIG. 2 can display a critical

fuel level warning and can warn the driver of the first vehicle 902 that a refuel must occur at the first fuel station 910. The recommend refuel module 220 can display the first base range 906 to the driver.

[0145] The driver of the second vehicle 904 has more refuel options. The detect vehicle range module 602 of FIG. 2 can calculate the second base range 908. The second base range 908 represents the distance that the second vehicle 904 can travel before the vehicle runs out of fuel. The first station fuel module 608 can detect that the second fuel station 912 is the first station within the second base range 908. The critical station search module 606 of FIG. 6 can detect that more than one fuel station is within the second base range 908.

[0146] The critical station search module 606 of FIG. 6 can enable the second station fuel module 610 of FIG. 6. The second station fuel module 610 can detect that the second fuel station 912, the third fuel station 914, and the fourth fuel station 916 are within the second base range 908. The second station fuel module 610 can display the prices of the fuel stations within the second base range 908.

[0147] For example, the select station module 612 of FIG. 6 can display the prices of each station and can recommend for the driver to stop at the third fuel station 914. The third fuel station 914 is selling fuel at the cheapest price.

[0148] In addition, the recommend refuel module 220 of FIG. 2 can calculate and display the estimated total costs to reach each of the fuel stations. The recommend refuel module 220 can calculate the estimated total cost of each fuel station by combining the fuel price to the fuel consumed to reach each fuel station. The recommend refuel module 220 can display a list of each fuel station's estimated total cost. The driver of the second vehicle 904 can select a fuel station based on the lowest total cost to refuel.

[0149] Referring now to FIG. 10, therein is shown an example of an application of the navigation system 200 of FIG. 2. The example represents two routes, whereas the x-axis direction represents distance and the y-axis direction represents elevation. The example includes an elevated route 1002, a flat route 1004, a start point 1006, an end point 1008, a vehicle 1010, a first fuel station 1012 and a second fuel station 1014. The vehicle 1010 is depicted traveling from left to right in the example.

[0150] At the start point 1006, the driver can input the user destination of FIG. 2 into the select destination module 202 of FIG. 2. The base route module 204 of FIG. 2 can generate the base routes 205 to the end point 1008. The base routes 205 can be sent to the route parameters module 206 of FIG. 2 and the modified route module 212 of FIG. 2.

[0151] Additionally, the vehicle parameters module 208 of FIG. 2 can detect the capabilities of the vehicle 1010 and this information can be sent to the modified route module 212 of FIG. 2. Furthermore, the driver can create the custom route priority 516 from the route preference module 210 of FIG. 2.

[0152] For example, the driver assigns a weight of 5 out of 10 to the ecological efficient module 502 of FIG. 5, a weight of 4 out of 10 to the fastest route module 506 of FIG. 5, and a weight of 1 out of 10 to the shortest route module 504 of FIG. 5. Based on the driver input, the route preference module 210 can create the custom route priority 516 that can be sent to the modified route module 212 of FIG. 2.

[0153] Using information from the route parameters module 206 of FIG. 2, and the vehicle parameters module 208 of FIG. 2, the modified route module 212 of FIG. 2 can calculate and display the fuel estimation for each of the base routes 205.

For example, the modified route module **212** can calculate the fuel estimation based on the weight of the vehicle **1010**, the extra fuel consumed by climbing the elevated route **1002**, traffic conditions, and other route and vehicle parameters. The custom route priority **516** can determine the routes that are recommended by the modified route module **212**.

[0154] For illustrative purposes, the modified route module **212** of FIG. 2 can display the flat route **1004** and the elevated route **1002** as recommended routes. The modified route module **212** can display that the elevated route **1002** is a total distance of 90 distance units, estimated time is 2.5 hours, and the fuel estimation is 6 volume units. The modified route module **212** can display that the flat route **1004** is a total distance **107** of distance units, estimated time is 2.2 hours, and the fuel estimation is 4 volume units. The flat route **1004** can represent a long road that curves around hilly terrain. The elevated route **1002** can represent a route that directly climbs over hilly terrain instead of the flat route **1004** that curves around the hilly terrain.

[0155] Based on the driver's input for the custom route priority **516** of FIG. 5, the modified route module **212** of FIG. 2 will recommend the flat route **1004**. Although the elevated route **1002** is 90 distance units and less distance units than the flat route **1004**, the flat route **1004** more accurately conforms to the driver's input for the custom route priority **211** of FIG. 2. In this example, the custom route priority **211** has 5 points assigned to the ecological efficient module **502** of FIG. 5. The flat route **1004** consumes less fuel than the elevated route **1002** because more fuel is not needed to accelerate up an elevated road.

[0156] The custom route priority **211** in this example has 4 points assigned to the fastest weight **512** of FIG. 5. The flat route **1004** more accurately conforms to the 4 points assigned to the fastest weight **512**. The flat route **1004** is 2.2 hours whereas the elevated route **1002** is 2.5 hours. The vehicle **1010** can achieve faster speeds on the flat route **1004** than on the elevated route **1002**. The modified route module **212** of FIG. 2 can display the flat route **1004** first as the flat route **1004** conforms to the custom route priority **211**.

[0157] As another example, the driver can enable the recommend refuel module **220** of FIG. 2 at the start point **1006** or at anytime, to find a fuel station that minimizes fuel consumption. The modified route module **212** of FIG. 2 can display the first fuel station **1012** and the second fuel station **1014** and calculate the estimated cost to refuel at each station. The driver can then select a fuel station that has the lowest total cost to refuel.

[0158] For illustrative purposes, the first fuel station **1012** has a price of 1 dollar and the second fuel station **1014** has a price of 3 dollars. The modified route module **212** of FIG. 2 can calculate the fuel estimation needed to reach the first fuel station **1012** and the second fuel station **1014**. The modified route module **212** can display the estimated total cost to reach a fuel station by combining the fuel price with the fuel consumed to reach the fuel station.

[0159] For example, the first fuel station **1012** involves climbing a steep elevation. The first fuel station **1012** will have a greater fuel consumption than the second fuel station **1014** because of fuel consumed from climbing the elevation. The modified route module **212** of FIG. 2 can display that the first fuel station **1012** has an estimated cost of 3.9 dollars and that the second fuel station **1014** has an estimated cost of 3.2 dollars. Although the listed price of fuel at the first fuel station

**1012** is one dollar, the driver can select to refuel at the second fuel station **1014** because the estimated cost to refuel is lower.

[0160] Referring now to FIG. 11, therein is shown a flow chart of a method **1100** of operation of the navigation system **200** in a further embodiment of the present invention. The method **1100** includes generating a base route in a block **1102**; selecting a custom route priority based on a route preference in a block **1104**; generating a modified route based on the base route and the custom route priority in a block **1106**; and sending the modified route for display on a device in a block **1108**.

[0161] Yet another important aspect of the present invention is that it valuably supports and services the historical trend of reducing costs, simplifying systems, and increasing performance. These and other valuable aspects of the present invention consequently further the state of the technology to at least the next level.

[0162] Thus, it has been discovered that the navigation system of the present invention furnishes important and heretofore unknown and unavailable solutions, capabilities, and functional aspects for improving performance, increasing reliability, increasing safety and reducing cost of using a mobile client having location based services capability. The resulting processes and configurations are straightforward, cost-effective, uncomplicated, highly versatile, accurate, sensitive, and effective, and can be implemented by adapting known components for ready, efficient, and economical manufacturing, application, and efficiency.

[0163] While the invention has been described in conjunction with a specific best mode, it is to be understood that many alternatives, modifications, and variations can be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to embrace all such alternatives, modifications, and variations that fall within the scope of the included claims. All matters hitherto set forth herein or shown in the accompanying drawings are to be interpreted in an illustrative and non-limiting sense.

What is claimed is:

1. A method of operation of a navigation system comprising:

- generating a base route;
- selecting a custom route priority based on a route preference;
- generating a modified route based on the base route and the custom route priority; and
- sending the modified route for displaying on a device.

2. The method as claimed in claim 1 wherein selecting the custom route priority includes generating the custom route priority based on a weighting of an ecological efficient route, a fastest route, a shortest route, or a combination thereof.

3. The method as claimed in claim 1 further comprising:

- traversing the modified route;
- scanning a fuel station and a fuel price associated with the fuel station along the modified route; and
- recommending a refuel based on the fuel station.

4. The method as claimed in claim 1 further comprising:

- traversing the modified route;
- generating a fuel estimation for calculating a base range of the device;
- locating a fuel station approximately along the modified route; and
- recommending a refuel based on the base range and with the fuel station within the base range.

5. The method as claimed in claim 1 wherein generating the modified route includes:

- traversing the modified route;
- generating a fuel estimation for calculating a base range of the device;
- locating a fuel station approximately along the modified route and beyond the base range;
- recommending a driver behavior change to extend the base range to reach the fuel station; and
- recommending a refuel based on the driver behavior change and the extended value of the base range.

6. A method of operation of a navigation system comprising:

- generating a base route;
- selecting a custom route priority based on a route preference;
- generating a modified route based on the base route and the custom route priority;
- sending the modified route for displaying on a device and for traversing the modified route by the device;
- scanning a fuel station and a fuel price associated with the fuel station along the modified route; and
- recommending a refuel based on the fuel station.

7. The method as claimed in claim 6 wherein generating the modified route includes utilizing a route profile for the base route.

8. The method as claimed in claim 6 wherein generating the modified route includes utilizing a vehicle profile for the base route.

9. The method as claimed in claim 6 wherein recommending the refuel based on the fuel station includes updating the modified route to the fuel station.

10. The method as claimed in claim 6 wherein generating the modified route includes utilizing a route profile for the base route with the route profile including an elevation profile and a pavement profile.

11. A navigation system comprising:

- a user interface for:
  - selecting a custom route priority based on a route preference;
- a control unit, coupled to the user interface, for:
  - generating a base route,
  - generating a modified route based on the base route and the custom route priority; and
- a communication unit, coupled to the control unit, for:
  - sending the modified route for displaying on a device.

12. The system as claimed in claim 11 wherein the control unit is for generating the custom route priority based on a

weighting of an ecological efficient route, a fastest route, a shortest route, or a combination thereof.

13. The system as claimed in claim 11 further comprising: a location unit, coupled to the control unit, for detecting a traversal along the modified route; and wherein the control unit is for: scanning a fuel station and a fuel price associated with the fuel station along the modified route; and recommending a refuel based on the fuel station.

14. The system as claimed in claim 11 further comprising: a location unit, coupled to the control unit, for detecting a traversal along the modified route; and wherein the control unit is for: generating a fuel estimation for calculating a base range of the device; locating a fuel station approximately along the modified route; and recommending a refuel based on the base range and with the fuel station within the base range.

15. The system as claimed in claim 11 further comprising: a location unit, coupled to the control unit, for detecting a traversal along the modified route; and wherein the control unit is for: generating a fuel estimation for calculating a base range of the device;

locating a fuel station approximately along the modified route and beyond the base range; recommending a driver behavior change to extend the base range to reach the fuel station; and recommending a refuel based on the driver behavior change and the extended value of the base range.

16. The system as claimed in claim 11 further comprising: a location unit, coupled to the control unit, for detecting a traversal along the modified route by the device; and wherein the control unit is for: scanning a fuel station and a fuel price associated with the fuel station along the modified route; and recommending a refuel based on the fuel station.

17. The system as claimed in claim 16 wherein the control unit is for utilizing a route profile for the base route.

18. The system as claimed in claim 16 wherein the control unit is for utilizing a vehicle profile for the base route.

19. The system as claimed in claim 16 wherein the control unit is for updating the modified route to the fuel station.

20. The system as claimed in claim 16 wherein the control unit is for utilizing a route profile for the base route with the route profile including an elevation profile and a pavement profile.

\* \* \* \* \*