

(12) **United States Patent**
Harel et al.

(10) **Patent No.:** **US 9,300,378 B2**
(45) **Date of Patent:** ***Mar. 29, 2016**

- (54) **IMPLEMENTING MULTI USER MULTIPLE INPUT MULTIPLE OUTPUT (MU MIMO) BASE STATION USING SINGLE-USER (SU) MIMO CO-LOCATED BASE STATIONS**
- (71) Applicant: **Magnolia Broadband Inc.**, Englewood, NJ (US)
- (72) Inventors: **Haim Harel**, New York, NY (US); **Kenneth Kludt**, San Jose, CA (US); **Phil F. Chen**, Denville, NJ (US); **Sherwin J. Wang**, Towaco, NJ (US)
- (73) Assignee: **MAGNOLIA BROADBAND INC.**, Englewood, NJ (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
- This patent is subject to a terminal disclaimer.
- (21) Appl. No.: **14/450,625**
- (22) Filed: **Aug. 4, 2014**
- (65) **Prior Publication Data**
- US 2014/0341314 A1 Nov. 20, 2014

Related U.S. Application Data

- (63) Continuation of application No. 14/172,500, filed on Feb. 4, 2014, now Pat. No. 8,797,969, which is a (Continued)
- (51) **Int. Cl.**
H04B 7/04 (2006.01)
H04B 7/02 (2006.01)
(Continued)
- (52) **U.S. Cl.**
CPC **H04B 7/0452** (2013.01); **H04B 7/024** (2013.01); **H04L 5/14** (2013.01); **H04B 7/10** (2013.01)
- (58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,044,359 A 8/1977 Applebaum et al.
4,079,318 A 3/1978 Kinoshita

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1 189 303 3/2002
EP 1 867 177 5/2010

(Continued)

OTHER PUBLICATIONS

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/630,146 dated Jan. 22, 2013.
(Continued)


Primary Examiner — Hong Cho

(74) *Attorney, Agent, or Firm* — Pearl Cohen Zedek Latzer Baratz LLP

(57) **ABSTRACT**

A system that implements multi user multiple inputs multiple outputs (MU MIMO) base station using a plurality of co-located single-user (SU) MIMO base stations is provided herein. The system may include a number N co-located single-user multiple input multiple output (SU-MIMO) base stations each having a number K MIMO rank, wherein said N co-located SU-MIMO base stations are configured to share a common antennas array, operating over a common frequency band; a front-end MIMO processor connected to said N co-located SU-MIMO base stations and further coupleable to said common antennas array; and a back-end coordinator configured to collaboratively assist in optimizing operation of said N co-located SU-MIMO base stations, such that said N co-located SU-MIMO base stations and said front-end MIMO processor collaboratively implement a multi-user multiple input multiple output (MU-MIMO) base station capable of dynamically separating a coverage area into N*K spatial channels.

23 Claims, 9 Drawing Sheets

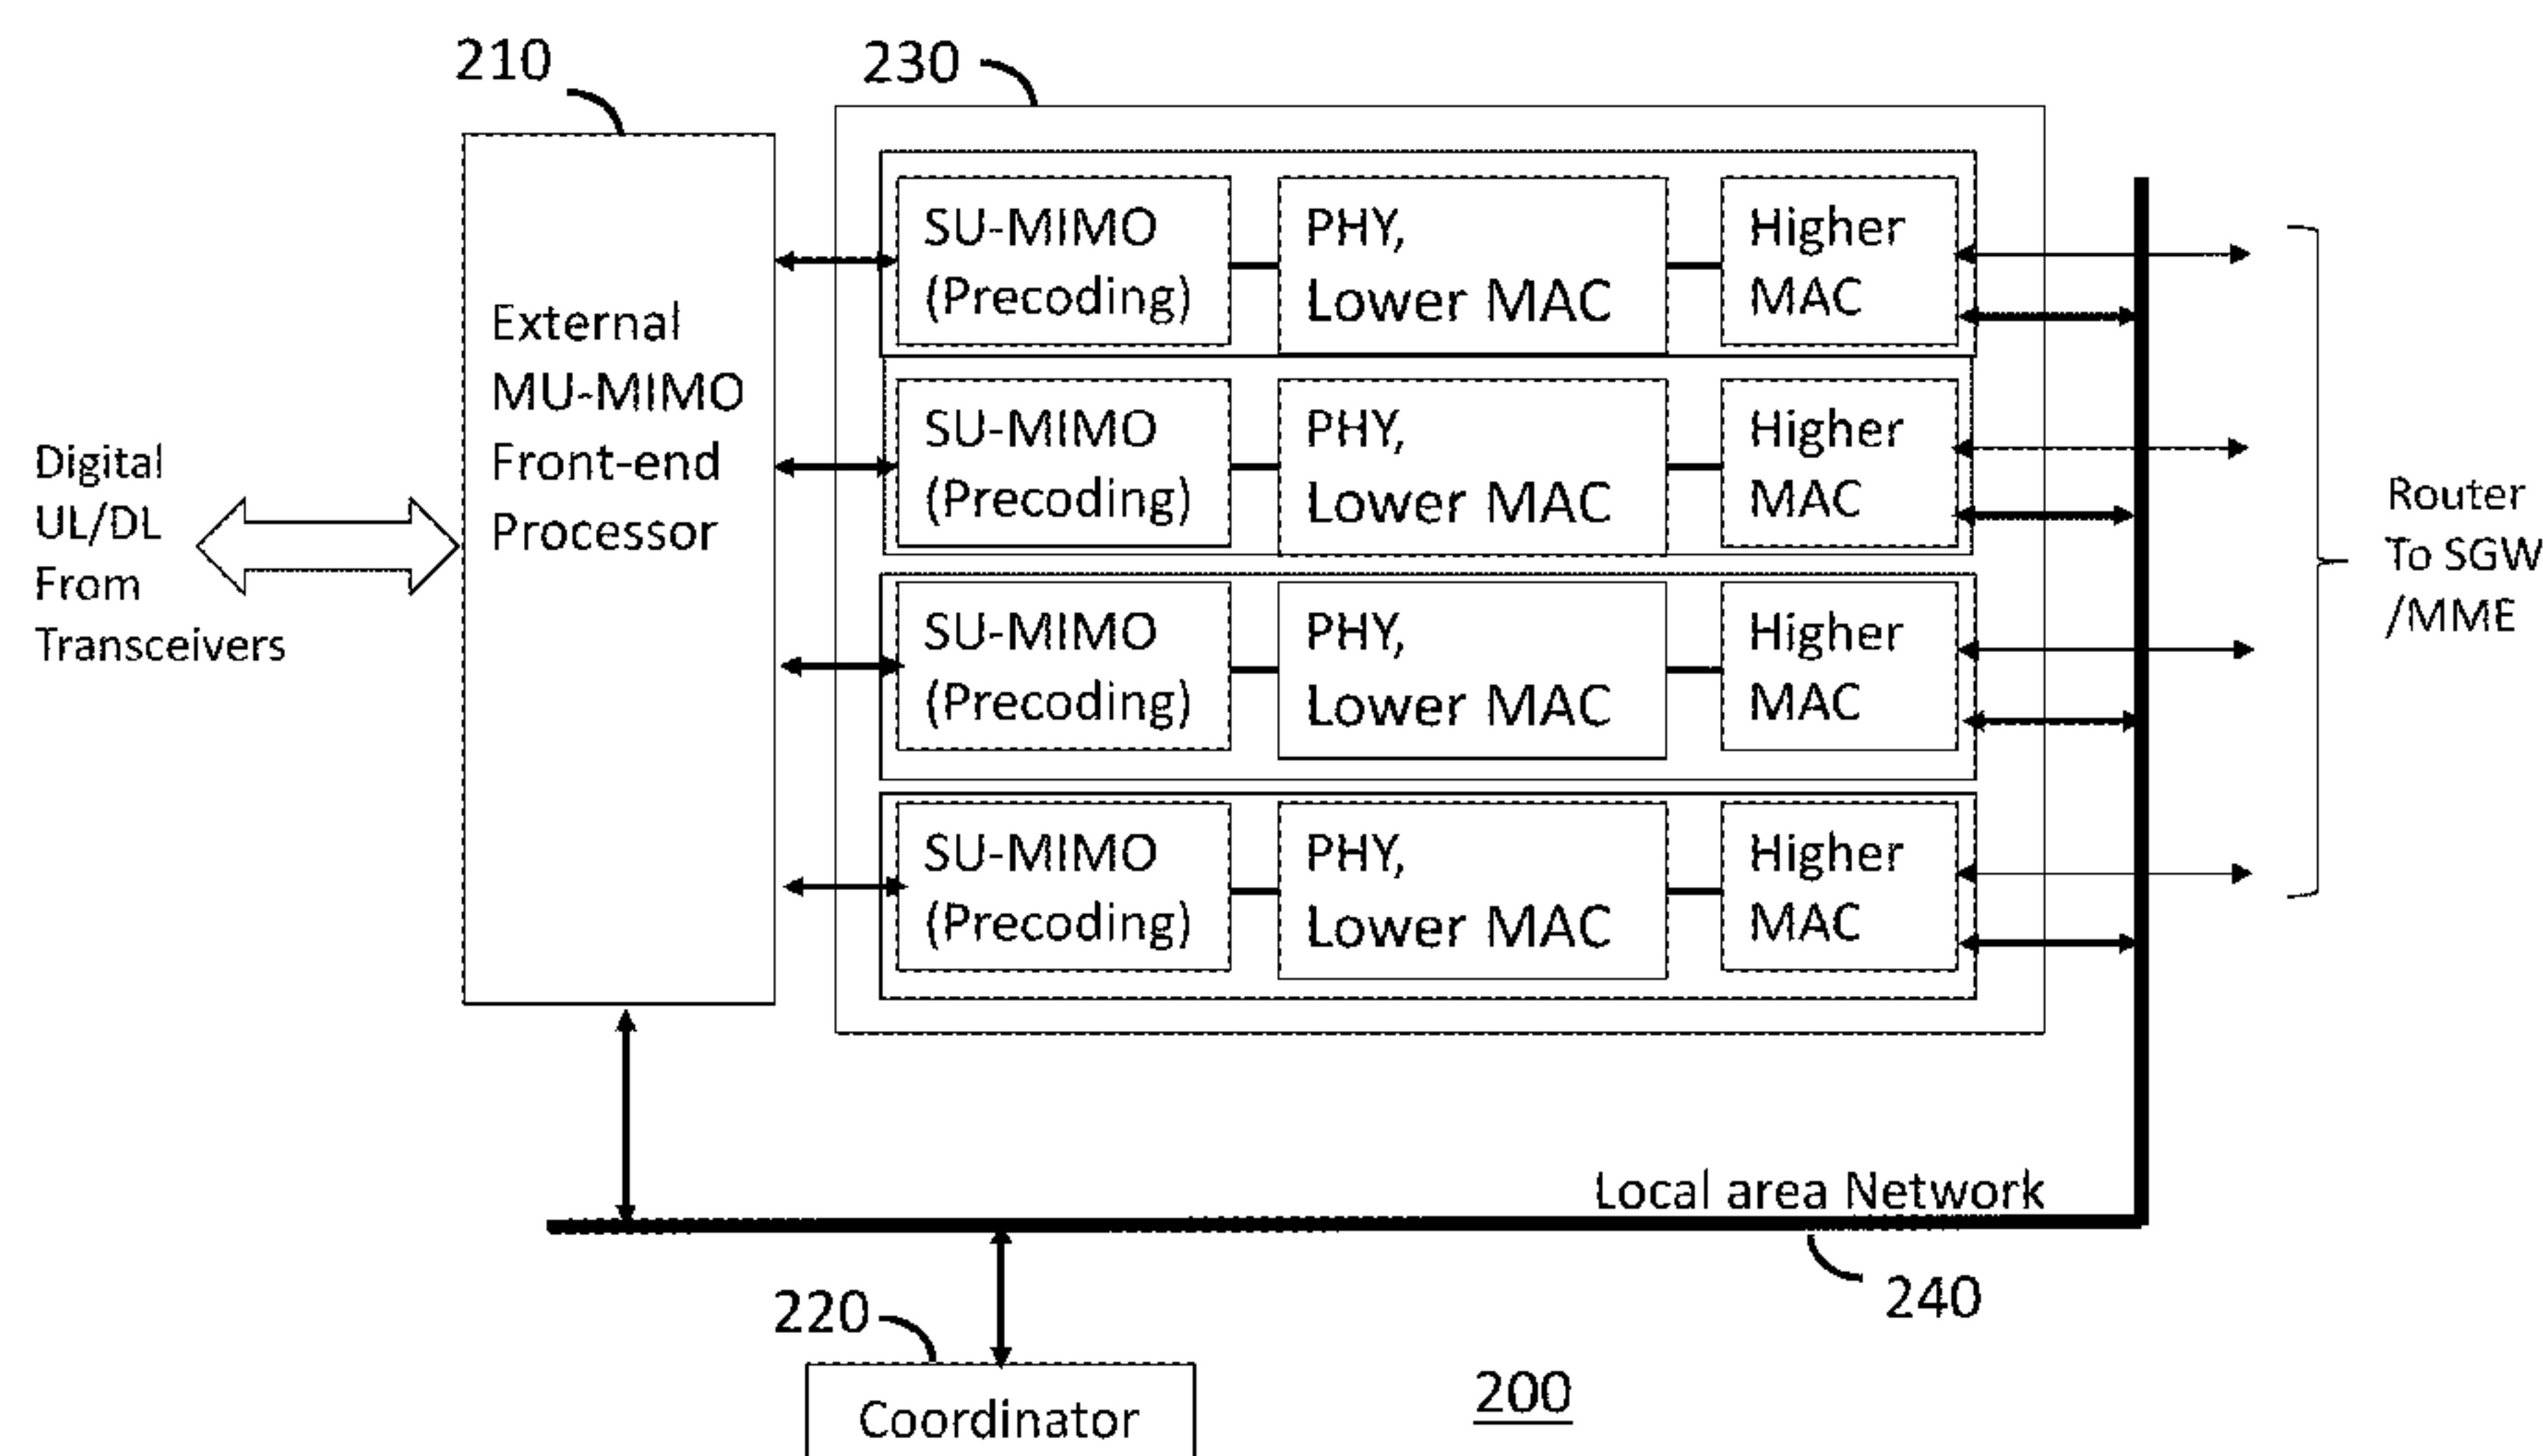

Related U.S. Application Data					
continuation-in-part of application No. 13/888,057, filed on May 6, 2013.			7,898,478 B2	3/2011	Niu et al.
			7,904,086 B2	3/2011	Kundu et al.
			7,904,106 B2	3/2011	Han et al.
			7,933,255 B2	4/2011	Li
			7,970,366 B2	6/2011	Arita et al.
(60) Provisional application No. 61/762,486, filed on Feb. 8, 2013, provisional application No. 61/811,751, filed on Apr. 14, 2013, provisional application No. 61/845, 270, filed on Jul. 11, 2013, provisional application No. 61/898,817, filed on Nov. 1, 2013.			8,078,109 B1	12/2011	Mulcay
			8,103,284 B2	1/2012	Mueckenheim et al.
			8,111,782 B2	2/2012	Kim et al.
			8,115,679 B2	2/2012	Falk
			8,155,613 B2	4/2012	Kent et al.
			8,194,602 B2 *	6/2012	van Rensburg et al. 370/329
			8,275,377 B2	9/2012	Nanda et al.
			8,280,443 B2	10/2012	Tao et al.
			8,294,625 B2	10/2012	Kittinger et al.
(51) Int. Cl.			8,306,012 B2	11/2012	Lindoff et al.
H04L 5/14	(2006.01)		8,315,671 B2	11/2012	Kuwahara et al.
H04B 7/10	(2006.01)		8,369,436 B2	2/2013	Stirling-Gallacher
			8,504,098 B2	8/2013	Khojastepour
(56) References Cited			8,509,190 B2	8/2013	Rofougaran
U.S. PATENT DOCUMENTS			8,520,657 B2	8/2013	Rofougaran
4,359,738 A	11/1982	Lewis	8,526,886 B2	9/2013	Wu et al.
4,540,985 A	9/1985	Clancy et al.	8,571,127 B2	10/2013	Jiang et al.
4,628,320 A	12/1986	Downie	8,588,844 B2	11/2013	Shpak
5,162,805 A	11/1992	Cantrell	8,599,955 B1	12/2013	Kludt et al.
5,363,104 A	11/1994	Richmond	8,599,979 B2	12/2013	Farag et al.
5,444,762 A	8/1995	Frey et al.	8,605,658 B2	12/2013	Fujimoto
5,732,075 A	3/1998	Tangemann et al.	8,611,288 B1	12/2013	Zhang et al.
5,915,215 A	6/1999	Williams et al.	8,644,413 B2	2/2014	Harel et al.
5,936,577 A	8/1999	Shoki et al.	8,649,458 B2	2/2014	Kludt et al.
5,940,033 A	8/1999	Locher et al.	8,666,319 B2	3/2014	Kloper et al.
6,018,317 A	1/2000	Dogan et al.	8,670,504 B2	3/2014	Naguib
6,026,081 A	2/2000	Hamabe	8,744,511 B2	6/2014	Jones et al.
6,046,655 A	4/2000	Cipolla	8,754,810 B2	6/2014	Guo et al.
6,094,165 A	7/2000	Smith	8,767,862 B2	7/2014	Abreu et al.
6,101,399 A	8/2000	Raleigh et al.	8,780,743 B2	7/2014	Sombrutzki et al.
6,163,695 A	12/2000	Takemura	8,891,598 B1	11/2014	Wang et al.
6,167,286 A	12/2000	Ward et al.	8,928,528 B2	1/2015	Harel et al.
6,215,812 B1	4/2001	Young et al.	8,942,134 B1	1/2015	Kludt et al.
6,226,507 B1	5/2001	Ramesh et al.	8,976,845 B2	3/2015	O'Keeffe et al.
6,230,123 B1	5/2001	Mekuria et al.	9,014,066 B1	4/2015	Wang et al.
6,259,683 B1	7/2001	Sekine et al.	9,035,828 B2	5/2015	O'Keeffe et al.
6,297,772 B1	10/2001	Lewis	2001/0029326 A1	10/2001	Diab et al.
6,321,077 B1	11/2001	Saitoh et al.	2001/0038665 A1	11/2001	Baltersee et al.
6,335,953 B1	1/2002	Sanderford et al.	2002/0024975 A1	2/2002	Hendler
6,370,378 B1	4/2002	Yahagi	2002/0051430 A1	5/2002	Kasami et al.
6,377,783 B1	4/2002	Lo et al.	2002/0065107 A1	5/2002	Harel et al.
6,393,282 B1	5/2002	Iimori	2002/0085643 A1	7/2002	Kitchener et al.
6,584,115 B1	6/2003	Suzuki	2002/0107013 A1	8/2002	Fitzgerald
6,647,276 B1	11/2003	Kuwahara et al.	2002/0115474 A1	8/2002	Yoshino et al.
6,697,622 B1	2/2004	Ishikawa et al.	2002/0181426 A1	12/2002	Sherman
6,697,633 B1	2/2004	Dogan et al.	2002/0181437 A1	12/2002	Ohkubo et al.
6,735,182 B1	5/2004	Nishimori et al.	2003/0087645 A1	5/2003	Kim et al.
6,834,073 B1	12/2004	Miller et al.	2003/0114162 A1	6/2003	Chheda et al.
6,842,460 B1	1/2005	Olkkonen et al.	2003/0153322 A1	8/2003	Burke et al.
6,914,890 B1	7/2005	Tobita et al.	2003/0153360 A1	8/2003	Burke et al.
6,927,646 B2	8/2005	Niemi	2003/0186653 A1	10/2003	Mohebbi et al.
6,934,541 B2	8/2005	Miyatani	2003/0203717 A1	10/2003	Chuprun et al.
6,975,582 B1	12/2005	Karabinis et al.	2003/0203743 A1	10/2003	Sugar et al.
6,987,958 B1	1/2006	Lo et al.	2004/0023693 A1	2/2004	Okawa et al.
7,068,628 B2	6/2006	Li et al.	2004/0056795 A1	3/2004	Ericson et al.
7,154,960 B2	12/2006	Liu et al.	2004/0063455 A1	4/2004	Eran et al.
7,177,663 B2	2/2007	Axness et al.	2004/0081144 A1	4/2004	Martin et al.
7,190,964 B2	3/2007	Damnjanovic et al.	2004/0121810 A1	6/2004	Goransson et al.
7,257,425 B2	8/2007	Wang et al.	2004/0125899 A1	7/2004	Li et al.
7,299,072 B2	11/2007	Ninomiya	2004/0125900 A1	7/2004	Liu et al.
7,391,757 B2	6/2008	Haddad et al.	2004/0142696 A1	7/2004	Saunders et al.
7,392,015 B1	6/2008	Farlow et al.	2004/0147266 A1	7/2004	Hwang et al.
7,474,676 B2	1/2009	Tao et al.	2004/0156399 A1	8/2004	Eran
7,499,109 B2	3/2009	Kim et al.	2004/0166902 A1	8/2004	Castellano et al.
7,512,083 B2	3/2009	Li	2004/0198292 A1	10/2004	Smith et al.
7,606,528 B2	10/2009	Mesecher	2004/0228388 A1	11/2004	Salmenkaita
7,634,015 B2	12/2009	Waxman	2004/0235527 A1	11/2004	Reudink et al.
7,646,744 B2	1/2010	Li	2004/0264504 A1	12/2004	Jin
7,719,993 B2	5/2010	Li et al.	2005/0068230 A1	3/2005	Munoz et al.
7,742,000 B2	6/2010	Mohamadi	2005/0068918 A1	3/2005	Mantravadi et al.
7,769,107 B2	8/2010	Sandhu et al.	2005/0075140 A1	4/2005	Famolari
7,876,848 B2	1/2011	Han et al.	2005/0085266 A1	4/2005	Narita
7,881,401 B2	2/2011	Kraut et al.	2005/0129155 A1	6/2005	Hoshino
			2005/0147023 A1	7/2005	Stephens et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2005/0163097	A1	7/2005	Do et al.	2010/0208712	A1	8/2010	Wax et al.
2005/0245224	A1	11/2005	Kurioka	2010/0222011	A1	9/2010	Behzad
2005/0250544	A1	11/2005	Grant et al.	2010/0232355	A1	9/2010	Richeson et al.
2005/0254513	A1	11/2005	Cave et al.	2010/0234071	A1	9/2010	Shabtay et al.
2005/0265436	A1	12/2005	Suh et al.	2010/0278063	A1	11/2010	Kim et al.
2005/0286440	A1	12/2005	Strutt et al.	2010/0283692	A1	11/2010	Achour et al.
2005/0287962	A1	12/2005	Mehta et al.	2010/0285752	A1	11/2010	Lakshmanan et al.
2006/0041676	A1	2/2006	Sherman	2010/0291931	A1	11/2010	Suemitsu et al.
2006/0092889	A1	5/2006	Lyons et al.	2010/0303170	A1	12/2010	Zhu et al.
2006/0094372	A1	5/2006	Ahn et al.	2010/0316043	A1	12/2010	Doi et al.
2006/0098605	A1	5/2006	Li	2011/0019639	A1	1/2011	Karaoguz et al.
2006/0111149	A1	5/2006	Chitrapu et al.	2011/0032849	A1	2/2011	Yeung et al.
2006/0135097	A1	6/2006	Wang et al.	2011/0032972	A1	2/2011	Wang et al.
2006/0183503	A1	8/2006	Goldberg	2011/0085465	A1	4/2011	Lindoff et al.
2006/0203850	A1	9/2006	Johnson et al.	2011/0085532	A1	4/2011	Scherzer et al.
2006/0227854	A1	10/2006	McCloud et al.	2011/0105036	A1	5/2011	Rao et al.
2006/0264184	A1	11/2006	Li et al.	2011/0116489	A1	5/2011	Grandhi
2006/0270343	A1	11/2006	Cha et al.	2011/0134816	A1	6/2011	Liu et al.
2006/0271969	A1	11/2006	Takizawa et al.	2011/0150050	A1	6/2011	Trigui et al.
2006/0285507	A1	12/2006	Kinder et al.	2011/0150066	A1	6/2011	Fujimoto
2007/0041398	A1	2/2007	Benveniste	2011/0151826	A1	6/2011	Miller et al.
2007/0058581	A1	3/2007	Benveniste	2011/0163913	A1	7/2011	Cohen et al.
2007/0076675	A1	4/2007	Chen	2011/0205883	A1	8/2011	Mihota
2007/0093261	A1	4/2007	Hou et al.	2011/0205998	A1	8/2011	Hart et al.
2007/0097918	A1	5/2007	Cai et al.	2011/0228742	A1	9/2011	Honkasalo et al.
2007/0115882	A1	5/2007	Wentink	2011/0249576	A1	10/2011	Chrisikos et al.
2007/0115914	A1	5/2007	Ohkubo et al.	2011/0250884	A1	10/2011	Brunel et al.
2007/0152903	A1	7/2007	Lin et al.	2011/0273977	A1	11/2011	Shapira et al.
2007/0217352	A1	9/2007	Kwon	2011/0281541	A1	11/2011	Borremans
2007/0223380	A1	9/2007	Gilbert et al.	2011/0299437	A1	12/2011	Mikhemar et al.
2007/0249386	A1	10/2007	Bennett	2011/0310827	A1	12/2011	Srinivasa et al.
2007/0298742	A1	12/2007	Ketchum et al.	2011/0310853	A1	12/2011	Yin et al.
2008/0043867	A1	2/2008	Blanz et al.	2012/0014377	A1	1/2012	Joergensen et al.
2008/0051037	A1	2/2008	Molnar et al.	2012/0015603	A1	1/2012	Proctor et al.
2008/0081671	A1	4/2008	Wang et al.	2012/0020396	A1	1/2012	Hohne et al.
2008/0095163	A1	4/2008	Chen et al.	2012/0027000	A1	2/2012	Wentink
2008/0108352	A1	5/2008	Montemurro et al.	2012/0028638	A1	2/2012	Mueck et al.
2008/0125120	A1	5/2008	Gallagher et al.	2012/0028655	A1	2/2012	Mueck et al.
2008/0144737	A1	6/2008	Naguib	2012/0028671	A1	2/2012	Niu et al.
2008/0165732	A1	7/2008	Kim et al.	2012/0033761	A1	2/2012	Guo et al.
2008/0238808	A1	10/2008	Arita et al.	2012/0034952	A1	2/2012	Lo et al.
2008/0240314	A1	10/2008	Gaal et al.	2012/0045003	A1 *	2/2012	Li et al. 375/260
2008/0247370	A1	10/2008	Gu et al.	2012/0051287	A1	3/2012	Merlin et al.
2008/0267142	A1	10/2008	Mushkin et al.	2012/0064838	A1	3/2012	Miao et al.
2008/0280571	A1	11/2008	Rofougaran et al.	2012/0069828	A1	3/2012	Taki et al.
2008/0285637	A1	11/2008	Liu et al.	2012/0076028	A1 *	3/2012	Ko et al. 370/252
2009/0003299	A1	1/2009	Cave et al.	2012/0076229	A1	3/2012	Brobston et al.
2009/0028225	A1	1/2009	Runyon et al.	2012/0088512	A1	4/2012	Yamada et al.
2009/0046638	A1	2/2009	Rappaport et al.	2012/0092217	A1	4/2012	Hosoya et al.
2009/0058724	A1	3/2009	Xia et al.	2012/0100802	A1	4/2012	Mohebbi
2009/0121935	A1	5/2009	Xia et al.	2012/0115523	A1	5/2012	Shpak
2009/0137206	A1	5/2009	Sherman et al.	2012/0155349	A1	6/2012	Bajic et al.
2009/0154419	A1 *	6/2009	Yoshida et al. 370/330	2012/0155397	A1	6/2012	Shaffer et al.
2009/0187661	A1	7/2009	Sherman	2012/0163257	A1	6/2012	Kim et al.
2009/0190541	A1	7/2009	Abedi	2012/0163302	A1	6/2012	Takano
2009/0227255	A1	9/2009	Thakare	2012/0170453	A1	7/2012	Tiwari
2009/0239486	A1	9/2009	Sugar et al.	2012/0170672	A1	7/2012	Sondur
2009/0268616	A1	10/2009	Hosomi	2012/0201153	A1	8/2012	Bharadia et al.
2009/0279478	A1	11/2009	Nagaraj et al.	2012/0201173	A1	8/2012	Jain et al.
2009/0285331	A1	11/2009	Sugar et al.	2012/0207256	A1	8/2012	Farag et al.
2009/0322610	A1	12/2009	Hants et al.	2012/0212372	A1	8/2012	Petersson et al.
2009/0322613	A1	12/2009	Bala et al.	2012/0213065	A1	8/2012	Koo et al.
2009/0323608	A1	12/2009	Adachi et al.	2012/0218962	A1 *	8/2012	Kishiyama et al. 370/329
2010/0002656	A1	1/2010	Ji et al.	2012/0220331	A1	8/2012	Luo et al.
2010/0037111	A1	2/2010	Ziaja et al.	2012/0230380	A1	9/2012	Keusgen et al.
2010/0040369	A1	2/2010	Zhao et al.	2012/0251031	A1	10/2012	Suarez et al.
2010/0067473	A1	3/2010	Cave et al.	2012/0270531	A1	10/2012	Wright et al.
2010/0087227	A1	4/2010	Francos et al.	2012/0270544	A1	10/2012	Shah
2010/0111039	A1	5/2010	Kim et al.	2012/0281598	A1	11/2012	Struhsaker et al.
2010/0117890	A1 *	5/2010	Vook et al. 342/174	2012/0314570	A1 *	12/2012	Forenza et al. 370/230
2010/0135420	A1	6/2010	Xu et al.	2012/0321015	A1	12/2012	Hansen et al.
2010/0150013	A1	6/2010	Hara et al.	2012/0327870	A1	12/2012	Grandhi et al.
2010/0172429	A1	7/2010	Nagahama et al.	2013/0010623	A1	1/2013	Golitschek
2010/0195560	A1	8/2010	Nozaki et al.	2013/0012134	A1	1/2013	Jin et al.
2010/0195601	A1	8/2010	Zhang	2013/0017794	A1	1/2013	Kloper et al.
				2013/0023225	A1	1/2013	Weber
				2013/0044877	A1	2/2013	Liu et al.
				2013/0051283	A1	2/2013	Lee et al.
				2013/0058239	A1	3/2013	Wang et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2013/0070741	A1	3/2013	Li et al.
2013/0079048	A1	3/2013	Cai et al.
2013/0094437	A1	4/2013	Bhattacharya
2013/0094621	A1	4/2013	Luo et al.
2013/0095780	A1	4/2013	Prazan et al.
2013/0101073	A1	4/2013	Zai et al.
2013/0150012	A1	6/2013	Chhabra et al.
2013/0156016	A1	6/2013	Debnath et al.
2013/0156120	A1	6/2013	Josiam et al.
2013/0170388	A1	7/2013	Ito et al.
2013/0172029	A1	7/2013	Chang et al.
2013/0188541	A1	7/2013	Fischer
2013/0190006	A1	7/2013	Kazmi et al.
2013/0208587	A1	8/2013	Bala et al.
2013/0208619	A1	8/2013	Kudo et al.
2013/0223400	A1	8/2013	Seo et al.
2013/0229996	A1	9/2013	Wang et al.
2013/0229999	A1	9/2013	Da Silva et al.
2013/0235720	A1	9/2013	Wang et al.
2013/0242853	A1	9/2013	Seo et al.
2013/0242899	A1	9/2013	Lysejko et al.
2013/0242965	A1	9/2013	Horn et al.
2013/0242976	A1	9/2013	Katayama et al.
2013/0252621	A1	9/2013	Dimou et al.
2013/0272437	A1	10/2013	Eidson et al.
2013/0301551	A1	11/2013	Ghosh et al.
2013/0304962	A1	11/2013	Yin et al.
2013/0331136	A1	12/2013	Yang et al.
2013/0343369	A1	12/2013	Yamaura
2014/0010089	A1	1/2014	Cai et al.
2014/0010211	A1	1/2014	Asterjadhi et al.
2014/0029433	A1	1/2014	Wentink
2014/0071873	A1	3/2014	Wang et al.
2014/0079016	A1	3/2014	Dai et al.
2014/0086077	A1	3/2014	Safavi
2014/0086081	A1	3/2014	Mack et al.
2014/0098681	A1	4/2014	Stager et al.
2014/0119288	A1	5/2014	Zhu et al.
2014/0185501	A1	7/2014	Park et al.
2014/0185535	A1	7/2014	Park et al.
2014/0192820	A1	7/2014	Azizi et al.
2014/0204821	A1	7/2014	Seok et al.
2014/0241182	A1	8/2014	Smadi
2014/0242914	A1	8/2014	Monroe
2014/0269409	A1	9/2014	Dimou et al.
2014/0307653	A1	10/2014	Liu et al.
2015/0016438	A1	1/2015	Harel et al.
2015/0085777	A1	3/2015	Seok
2015/0124634	A1	5/2015	Harel et al.
2015/0139212	A1	5/2015	Wang et al.

FOREIGN PATENT DOCUMENTS

EP	2 234 355	9/2010
EP	2 498 462	9/2012
JP	2009-182441	8/2009
JP	2009-278444	11/2009
WO	WO 03/047033	6/2003
WO	WO 03/073645	9/2003
WO	WO 2010/085854	8/2010
WO	WO 2011/060058	5/2011
WO	WO 2013/192112	12/2013

OTHER PUBLICATIONS

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/630,146 dated Mar. 27, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/762,159 dated Apr. 16, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/762,191 dated May 2, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/762,188 dated May 15, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/776,204 dated May 21, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/770,255 dated Jun. 6, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/776,068 dated Jun. 11, 2013.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/762,159 dated Jun. 20, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/775,886 dated Jul. 17, 2013.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/762,191 dated Jul. 19, 2013.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/630,146 dated Jul. 31, 2013.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/762,188 dated Aug. 19, 2013.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/770,255 dated Sep. 17, 2013.

Ahmadi-Shokouh et al., "Pre-LNA Smart Soft Antenna Selection for MIMO Spatial Multiplexing/Diversity System when Amplifier/Sky Noise Dominates", European Transactions on Telecommunications, Wiley & Sons, Chichester, GB, vol. 21, No. 7, Nov. 1, 2010, pp. 663-677.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/889,150 dated Sep. 25, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/955,320 dated Oct. 15, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/776,204 dated Oct. 23, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/925,454 dated Oct. 28, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/955,194 dated Oct. 30, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/013,190 dated Nov. 5, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/776,068 dated Nov. 5, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/010,771 dated Dec. 17, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/065,182 dated Dec. 17, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/068,863 dated Dec. 17, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/011,521 dated Dec. 23, 2013.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/775,886 dated Jan. 7, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/018,965 dated Jan. 13, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/858,302 dated Jan. 16, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/042,020 dated Jan. 16, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/102,539 dated Jan. 27, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/087,376 dated Jan. 29, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/776,204 dated Jan. 31, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/094,644 dated Feb. 6, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/955,320 dated Feb. 21, 2014.

Huang et al., "Antenna Mismatch and Calibration Problem in Coordinated Multi-point Transmission System," IET Communications, 2012, vol. 6, Issue 3, pp. 289-299.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/109,904 dated Feb. 27, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/925,454 dated Mar. 7, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/172,500 dated Mar. 26, 2014.

(56)

References Cited

OTHER PUBLICATIONS

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/065,182 dated Mar. 25, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/068,863 dated Mar. 25, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/010,771 dated Apr. 4, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/085,352 dated Apr. 7, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/889,150 dated Apr. 9, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/955,194 dated Apr. 9, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/097,765 dated Apr. 22, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/087,376 dated May 9, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/143,580 dated May 9, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/776,068 dated May 13, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/013,190 dated May 20, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/085,252 dated Jun. 18, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/094,644 dated Jun. 24, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/102,539 dated Jun. 24, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/011,521 dated Jul. 1, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/109,904 dated Jul. 2, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/889,150 dated Jul. 8, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/250,767 dated Jul. 10, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/085,352 dated Jul. 23, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/013,190 dated Jul. 25, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/198,280 dated Jul. 29, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/042,020 dated Jul. 31, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/010,771 dated Aug. 6, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/306,458 dated Aug. 13, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/297,898 dated Aug. 15, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/085,252 dated Aug. 27, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/181,844 dated Aug. 29, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/296,209 dated Sep. 4, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/097,765 dated Sep. 8, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/143,580 dated Sep. 8, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/198,155 dated Sep. 12, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/173,640 dated Oct. 6, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/449,431 dated Oct. 10, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/171,736 dated Oct. 16, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/011,521 dated Oct. 20, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/320,920 dated Oct. 23, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/889,150 dated Nov. 10, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/775,886 dated Nov. 17, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/198,280 dated Nov. 18, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/480,920 dated Nov. 18, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/481,319 dated Nov. 19, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/273,866 dated Nov. 28, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/042,020 dated Dec. 1, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/888,057 dated Dec. 3, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/297,898 dated Dec. 5, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/281,358 dated Dec. 16, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/250,767 dated Dec. 26, 2014.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/097,765 dated Dec. 31, 2014.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/181,844 dated Jan. 5, 2015.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/306,458 dated Jan. 9, 2015.

International Search Report and Written Opinion for International Application No. PCT/US14/65958 dated Jan. 13, 2015.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/198,155 dated Jan. 26, 2015.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/296,209 dated Jan. 27, 2015.

International Search Report and Written Opinion for PCT International Application No. PCT/US2014/064346 dated Jan. 29, 2015.

Mitsubishi Electric, "Discussion on Antenna Calibration in TDD", 3GPP Draft; R1-090043, 3rd Generation Partnership Project (3GPP), Mobile Competence Centre; 650, Route Des Lucioles; F-06921 Sophia-Antipolis Cedex; France, no. Ljubljana; 20090107, Jan. 7, 2009, pp. 1-4.

Alcatel-Lucent Shanghai Bell et al., "Antenna Array Calibration for TDD CoMP", 3GPP Draft; R1-100427, 3rd Generation Partnership Project (3GPP), Mobile Competence Centre; 650, Route Des Lucioles; F-06921 Sophia-Antipolis Cedex; France, vol. RAN WG1, no. Valencia, Spain; 20100118, Jan. 12, 2010, pp. 1-5.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/925,454 dated Feb. 3, 2015.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/173,640 dated Feb. 3, 2015.

International Search Report and Written Opinion for PCT International Application No. PCT/US2014/064185 dated Feb. 5, 2015.

Kai Yang et al., "Coordinated Dual-Layer Beamforming for Public Safety Network: Architecture and Algorithms", Communications (ICC), 2012 IEEE International Conference on, IEEE, Jun. 10, 2012, pp. 4095-4099.

Songtao et al., "A Distributed Adaptive GSC Beamformer over Coordinated Antenna Arrays Network for Interference Mitigation", Asilomar Conference on Signals, Systems and Computers, Conference Record, IEEE Computer Society, US, Nov. 4, 2012, pp. 237-242.

International Search Report and Written Opinion for PCT International Application No. PCT/US2014/065635 dated Feb. 13, 2015.

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/171,736 mailed Feb. 20, 2015.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/320,920 dated Feb. 23, 2015.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/775,886 dated Mar. 23, 2015.

(56)

References Cited

OTHER PUBLICATIONS

Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/449,431 dated Mar. 23, 2015.
 Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/273,866 dated Mar. 25, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/517,114 dated Apr. 6, 2015.
 Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/925,454 dated Apr. 14, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/543,357 dated Apr. 23, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/250,767 dated Apr. 29, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/181,844 dated May 13, 2015.
 Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/775,886 dated May 26, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/320,920 dated May 29, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/481,319 dated Jun. 12, 2015.
 Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/505,655 dated Jun. 17, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/472,759 dated Jun. 18, 2015.

Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/042,020 dated Jun. 19, 2015.
 Notice of Allowance issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/480,920 dated Jun. 22, 2015.
 International Search Report and Written Opinion for PCT International Application No. PCT/US2014/062116 dated Jun. 22, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/467,415 dated Jun. 30, 2015.
 International Search Report and Written Opinion for PCT International Application No. PCT/US2014/063304 dated Jul. 8, 2015.
 Bandyopadhyay, S. et al., "An Adaptive MAC Protocol for Wireless Ad Hoc Community Network (WACNet) Using Electronically Steerable Passive Array Radiator Antenna", Globecom '01 : IEEE Global Telecommunications Conference; San Antonio, Texas, USA, Nov. 25-29, 2001, IEEE Operations Center, Piscataway, NJ, vol. 5, Nov. 25, 2001, pp. 2896-2900.
 Du, Yongjiu et al., "iBeam: Intelligent Client-Side Multi-User Beamforming in Wireless Networks", IEEE INFOCOM 2014—IEEE Conference on Computer Communications, IEEE, Apr. 27, 2014, pp. 817-825.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 13/888,057 dated Jul. 9, 2015.
 Office Action issued by the United States Patent and Trademark Office for U.S. Appl. No. 14/173,640 dated Jul. 16, 2015.

* cited by examiner

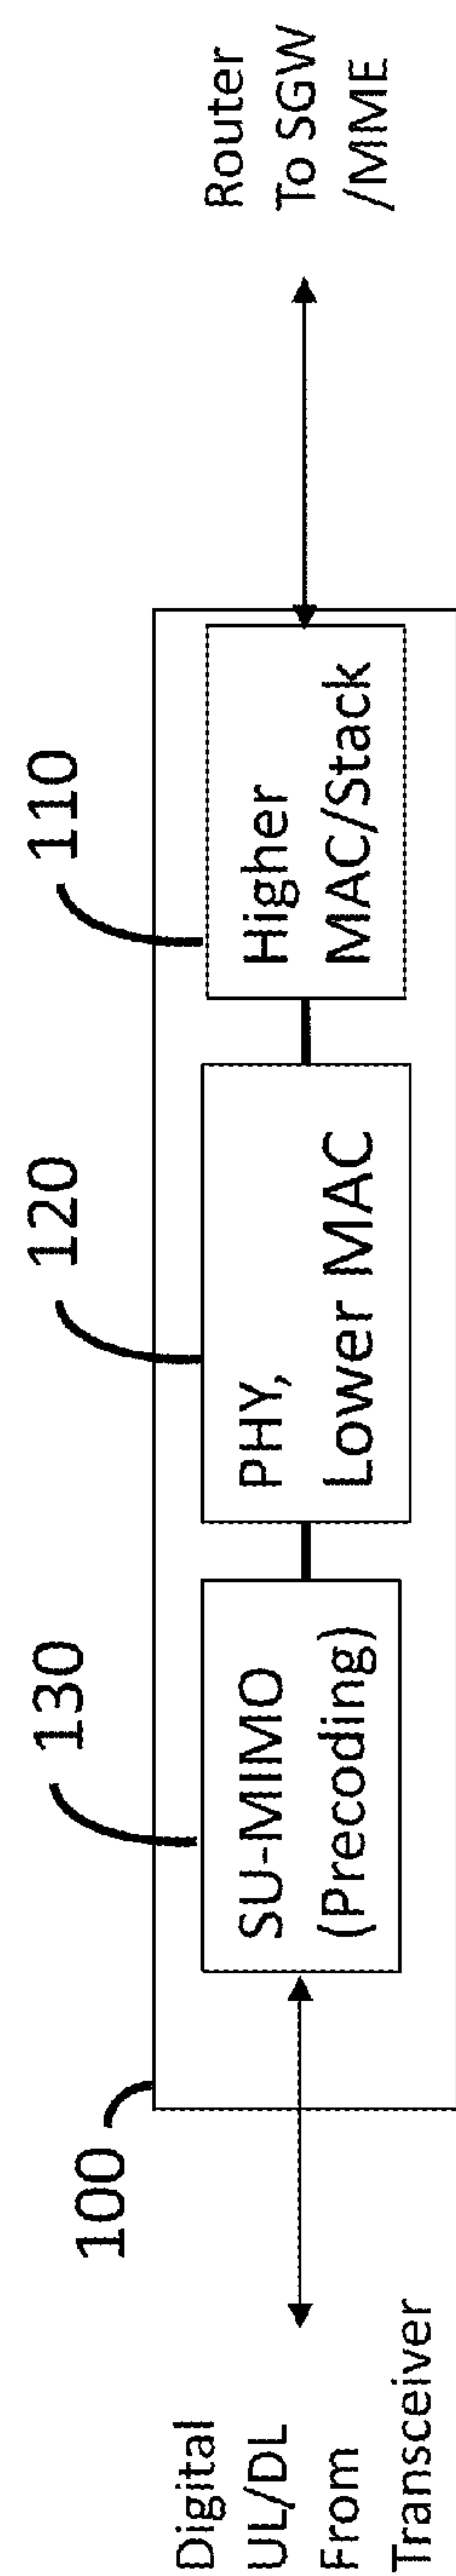


Figure 1A
(prior art)

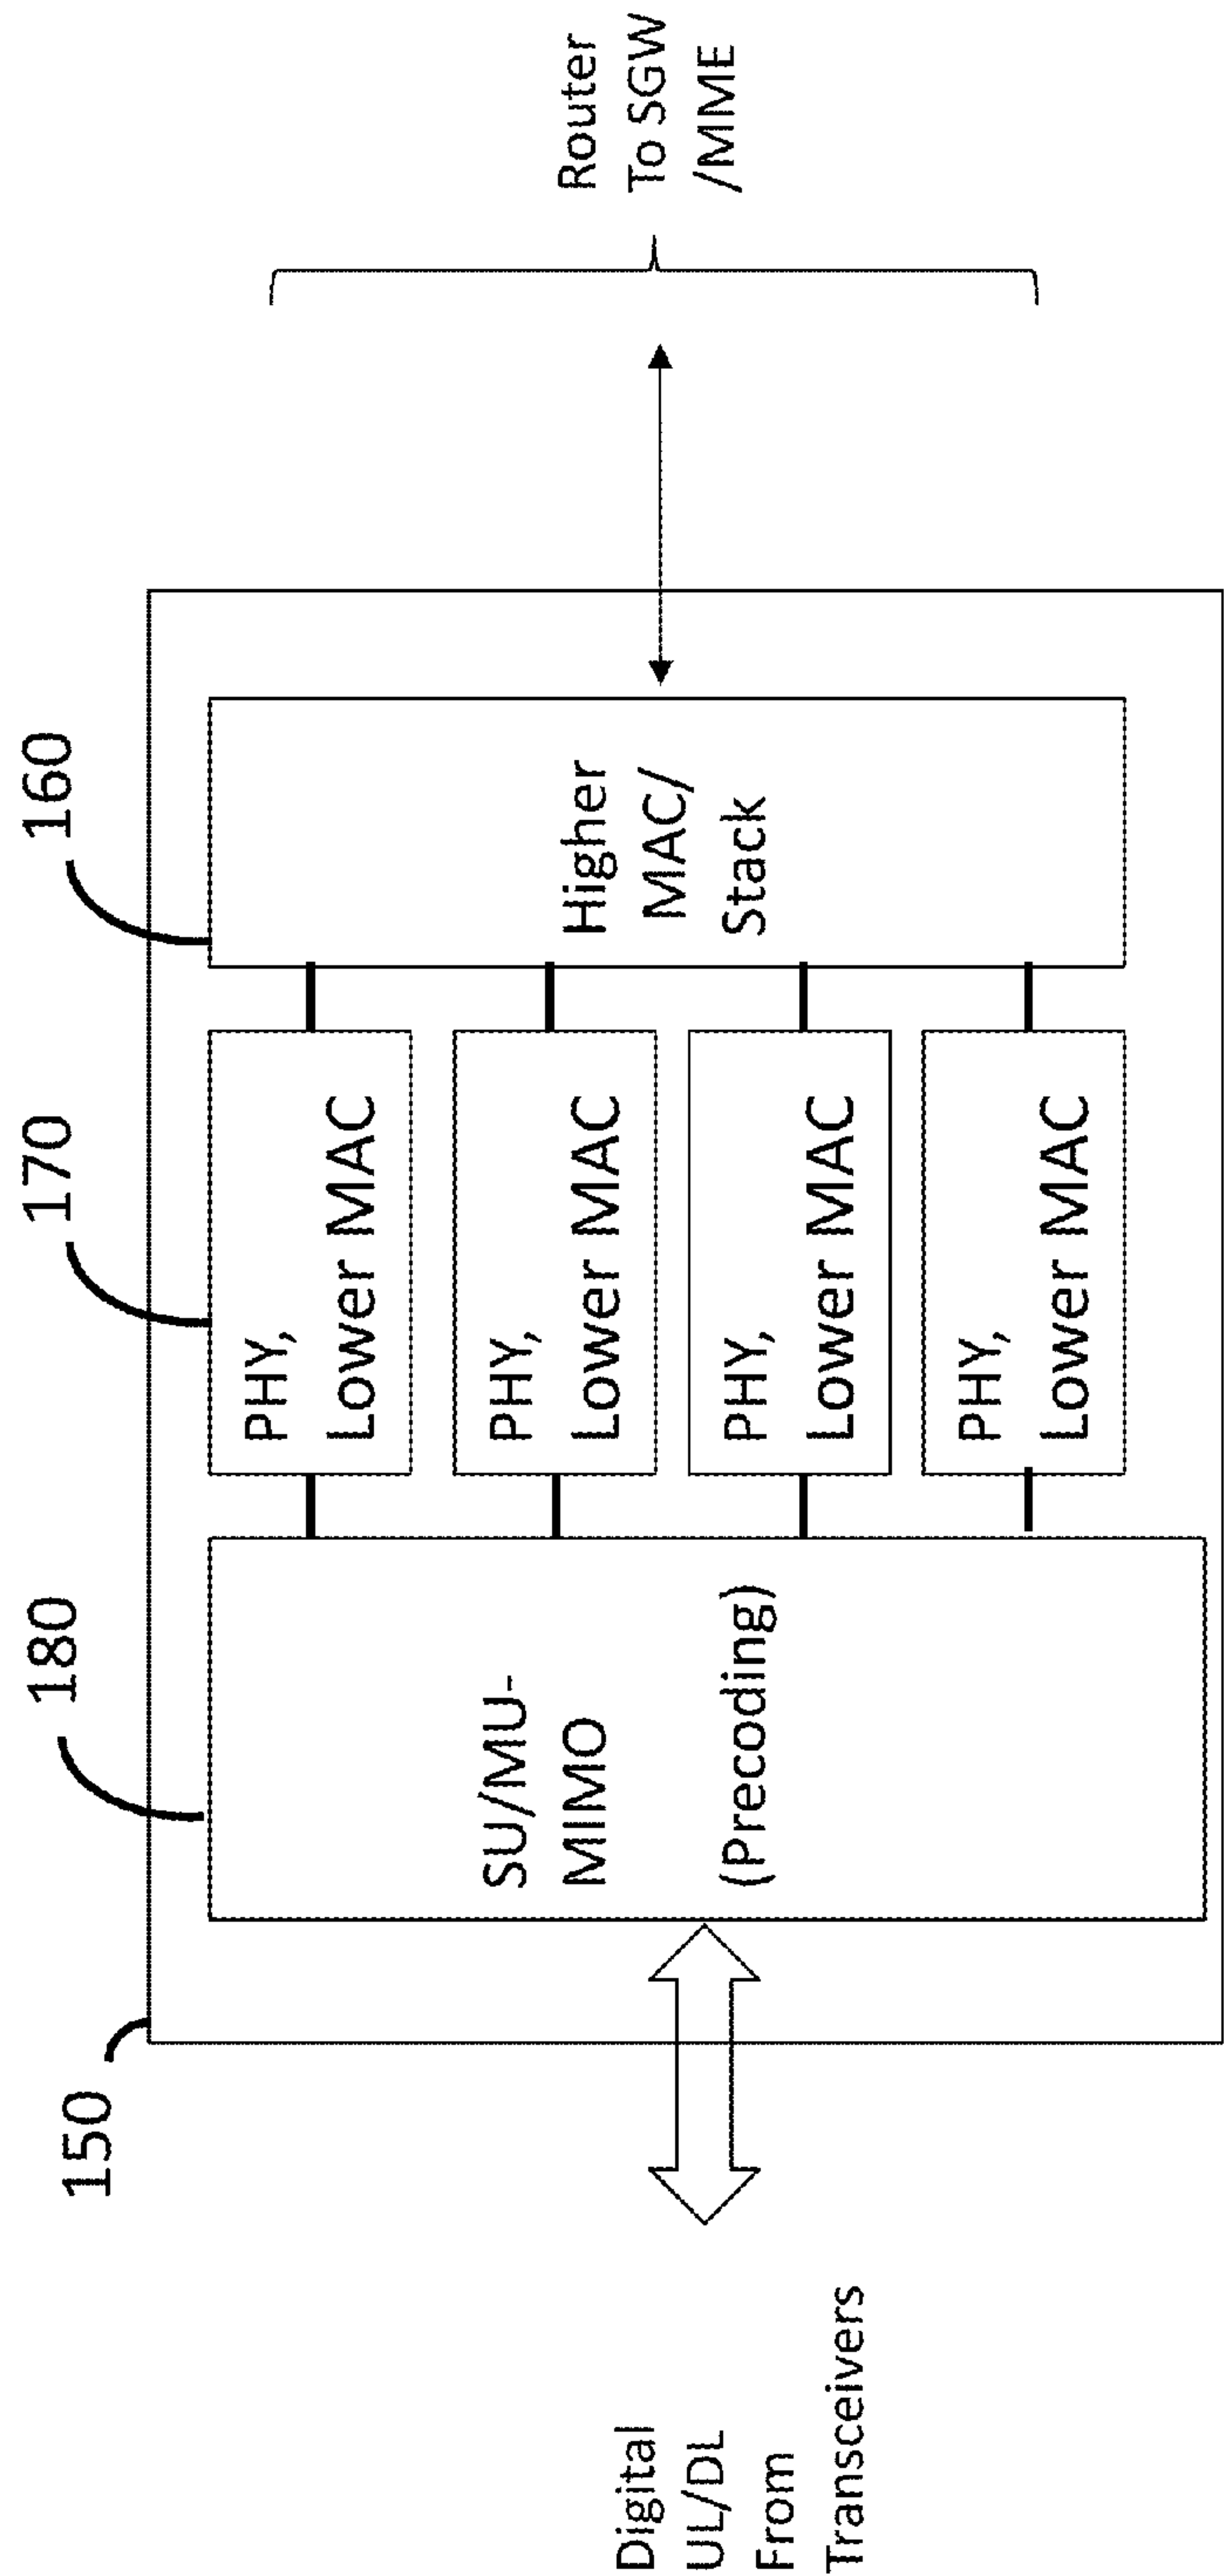


Figure 1B
(prior art)

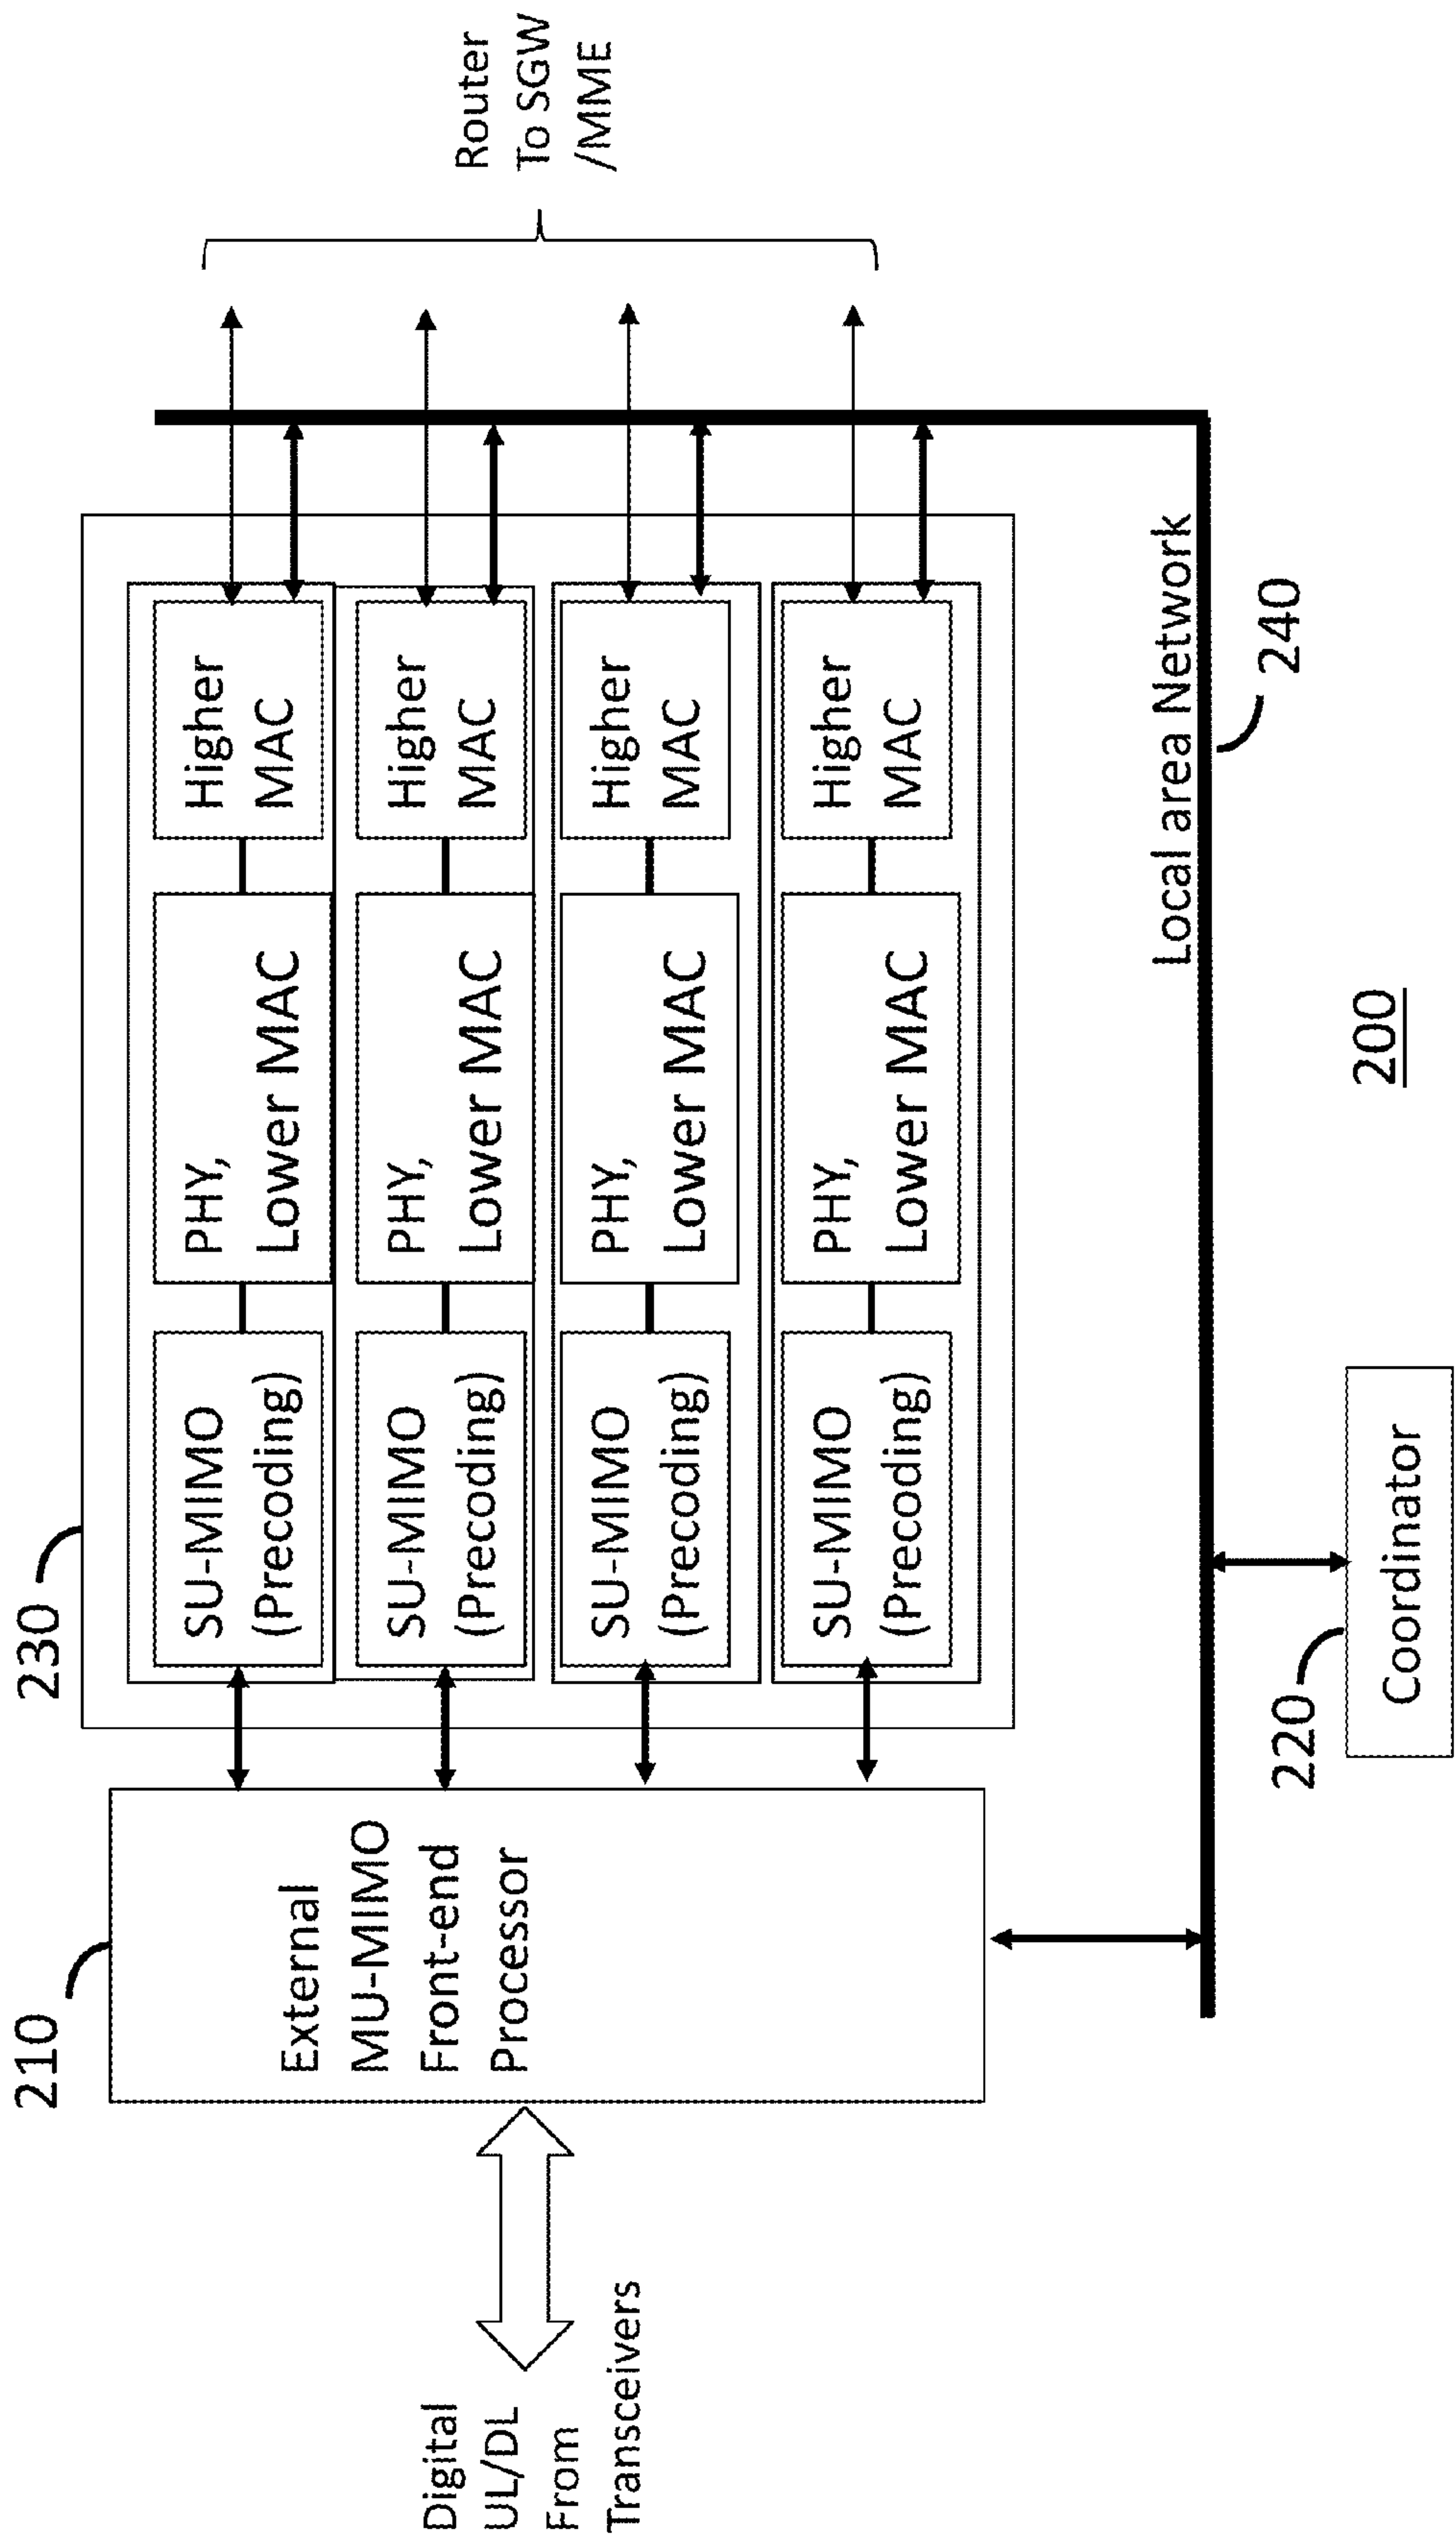


Figure 2

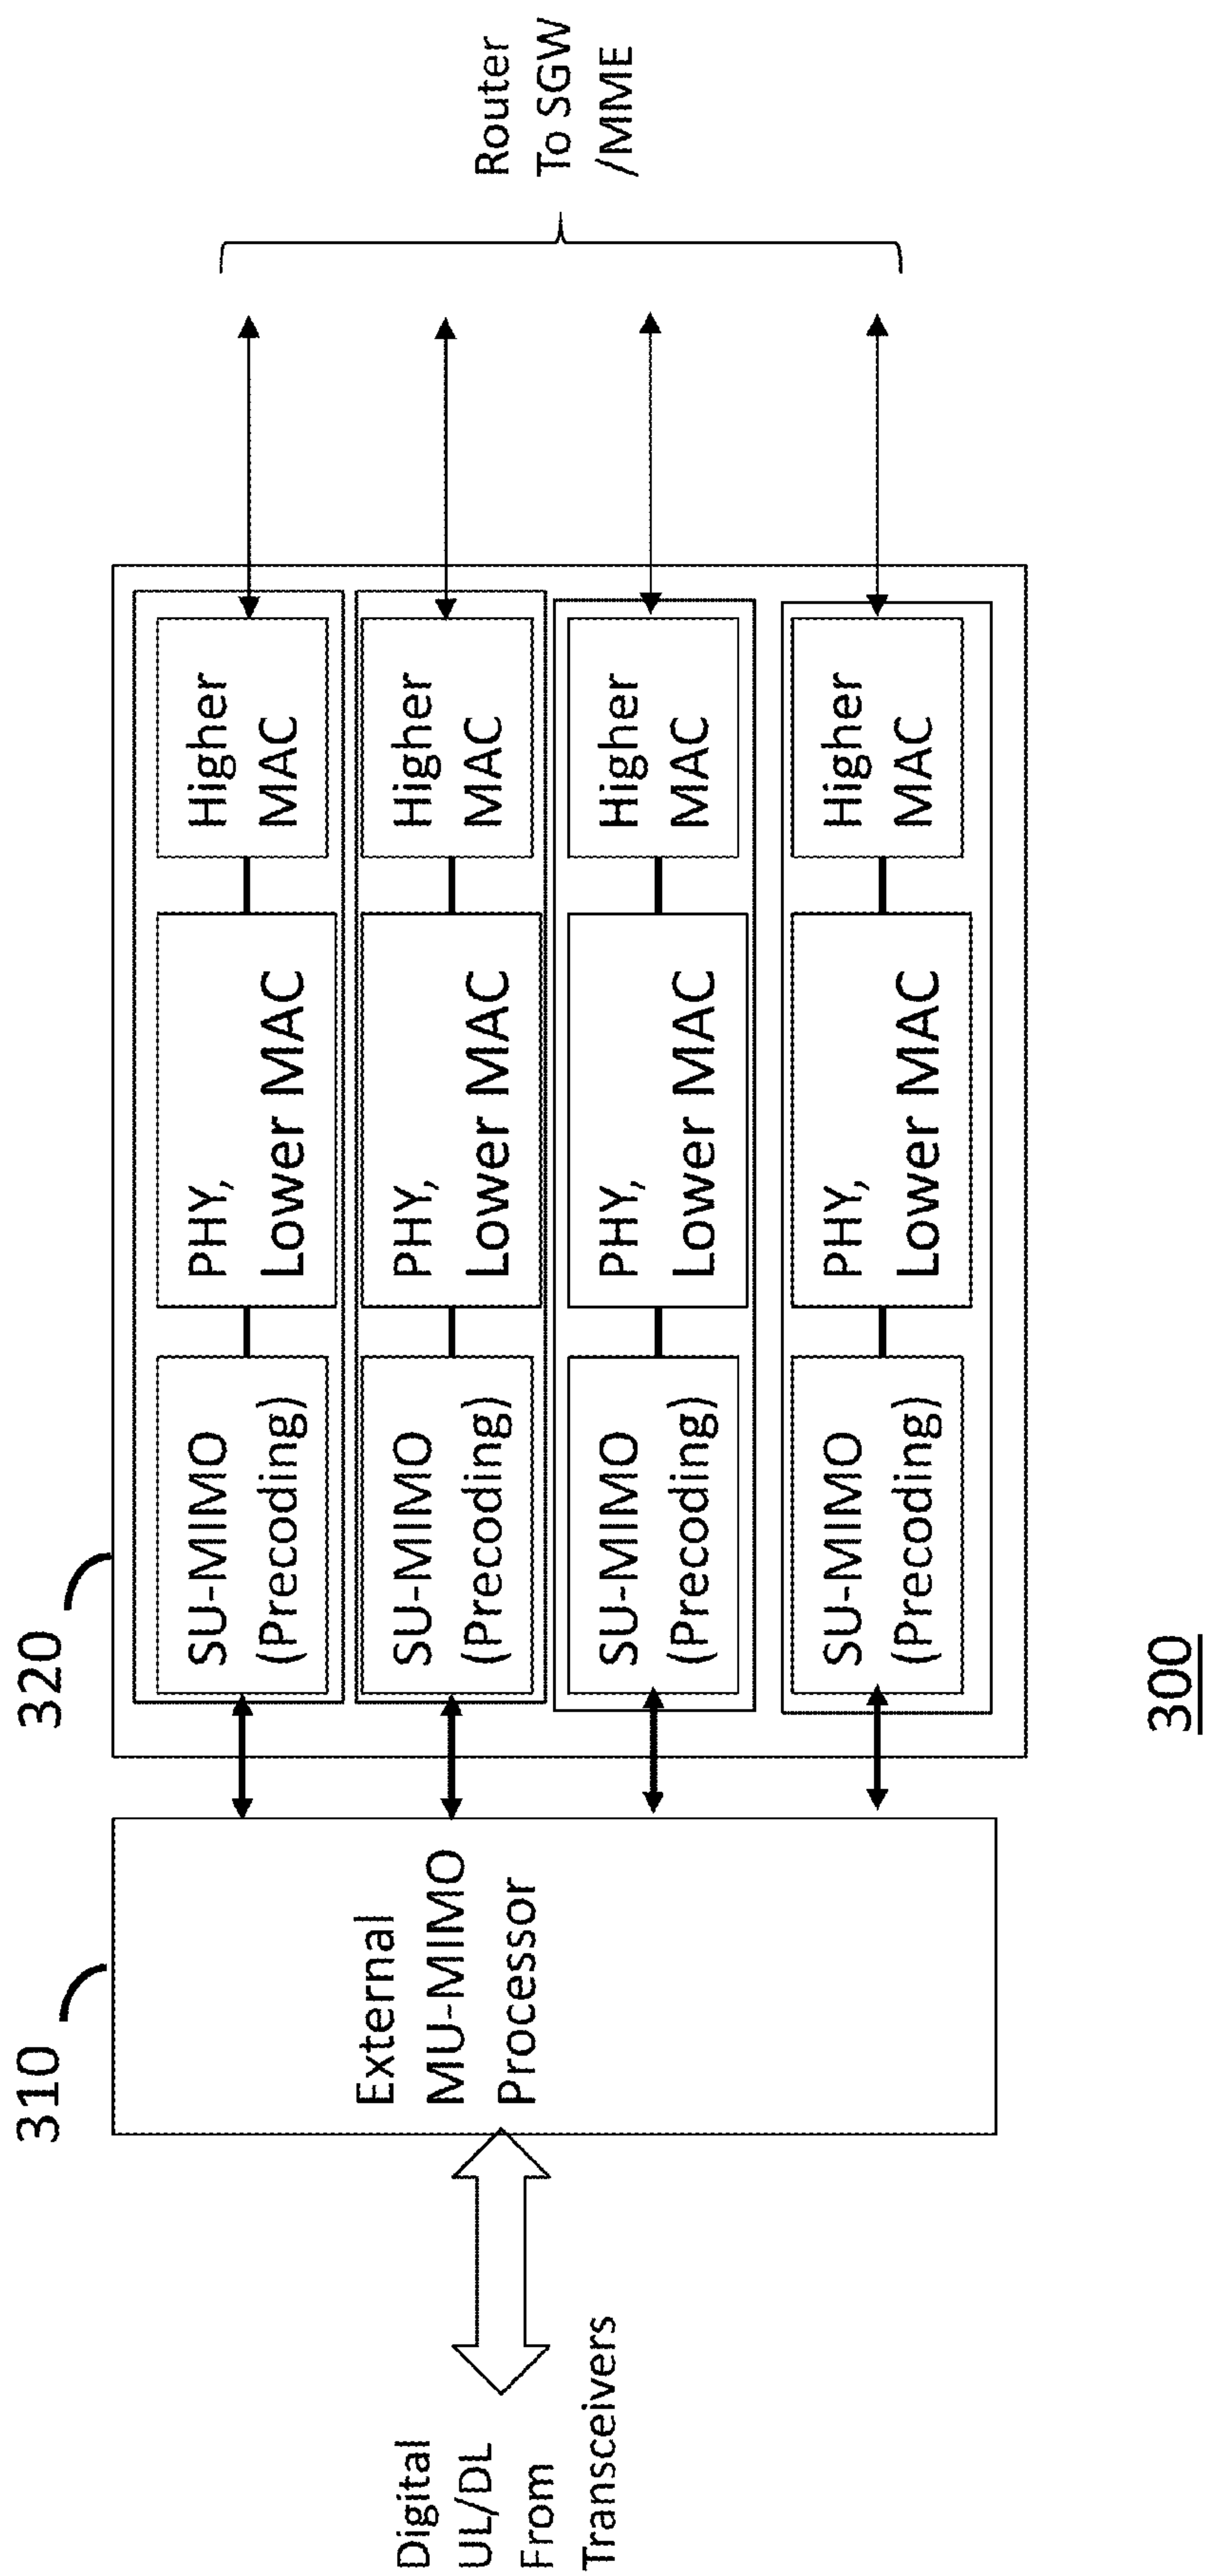


Figure 3

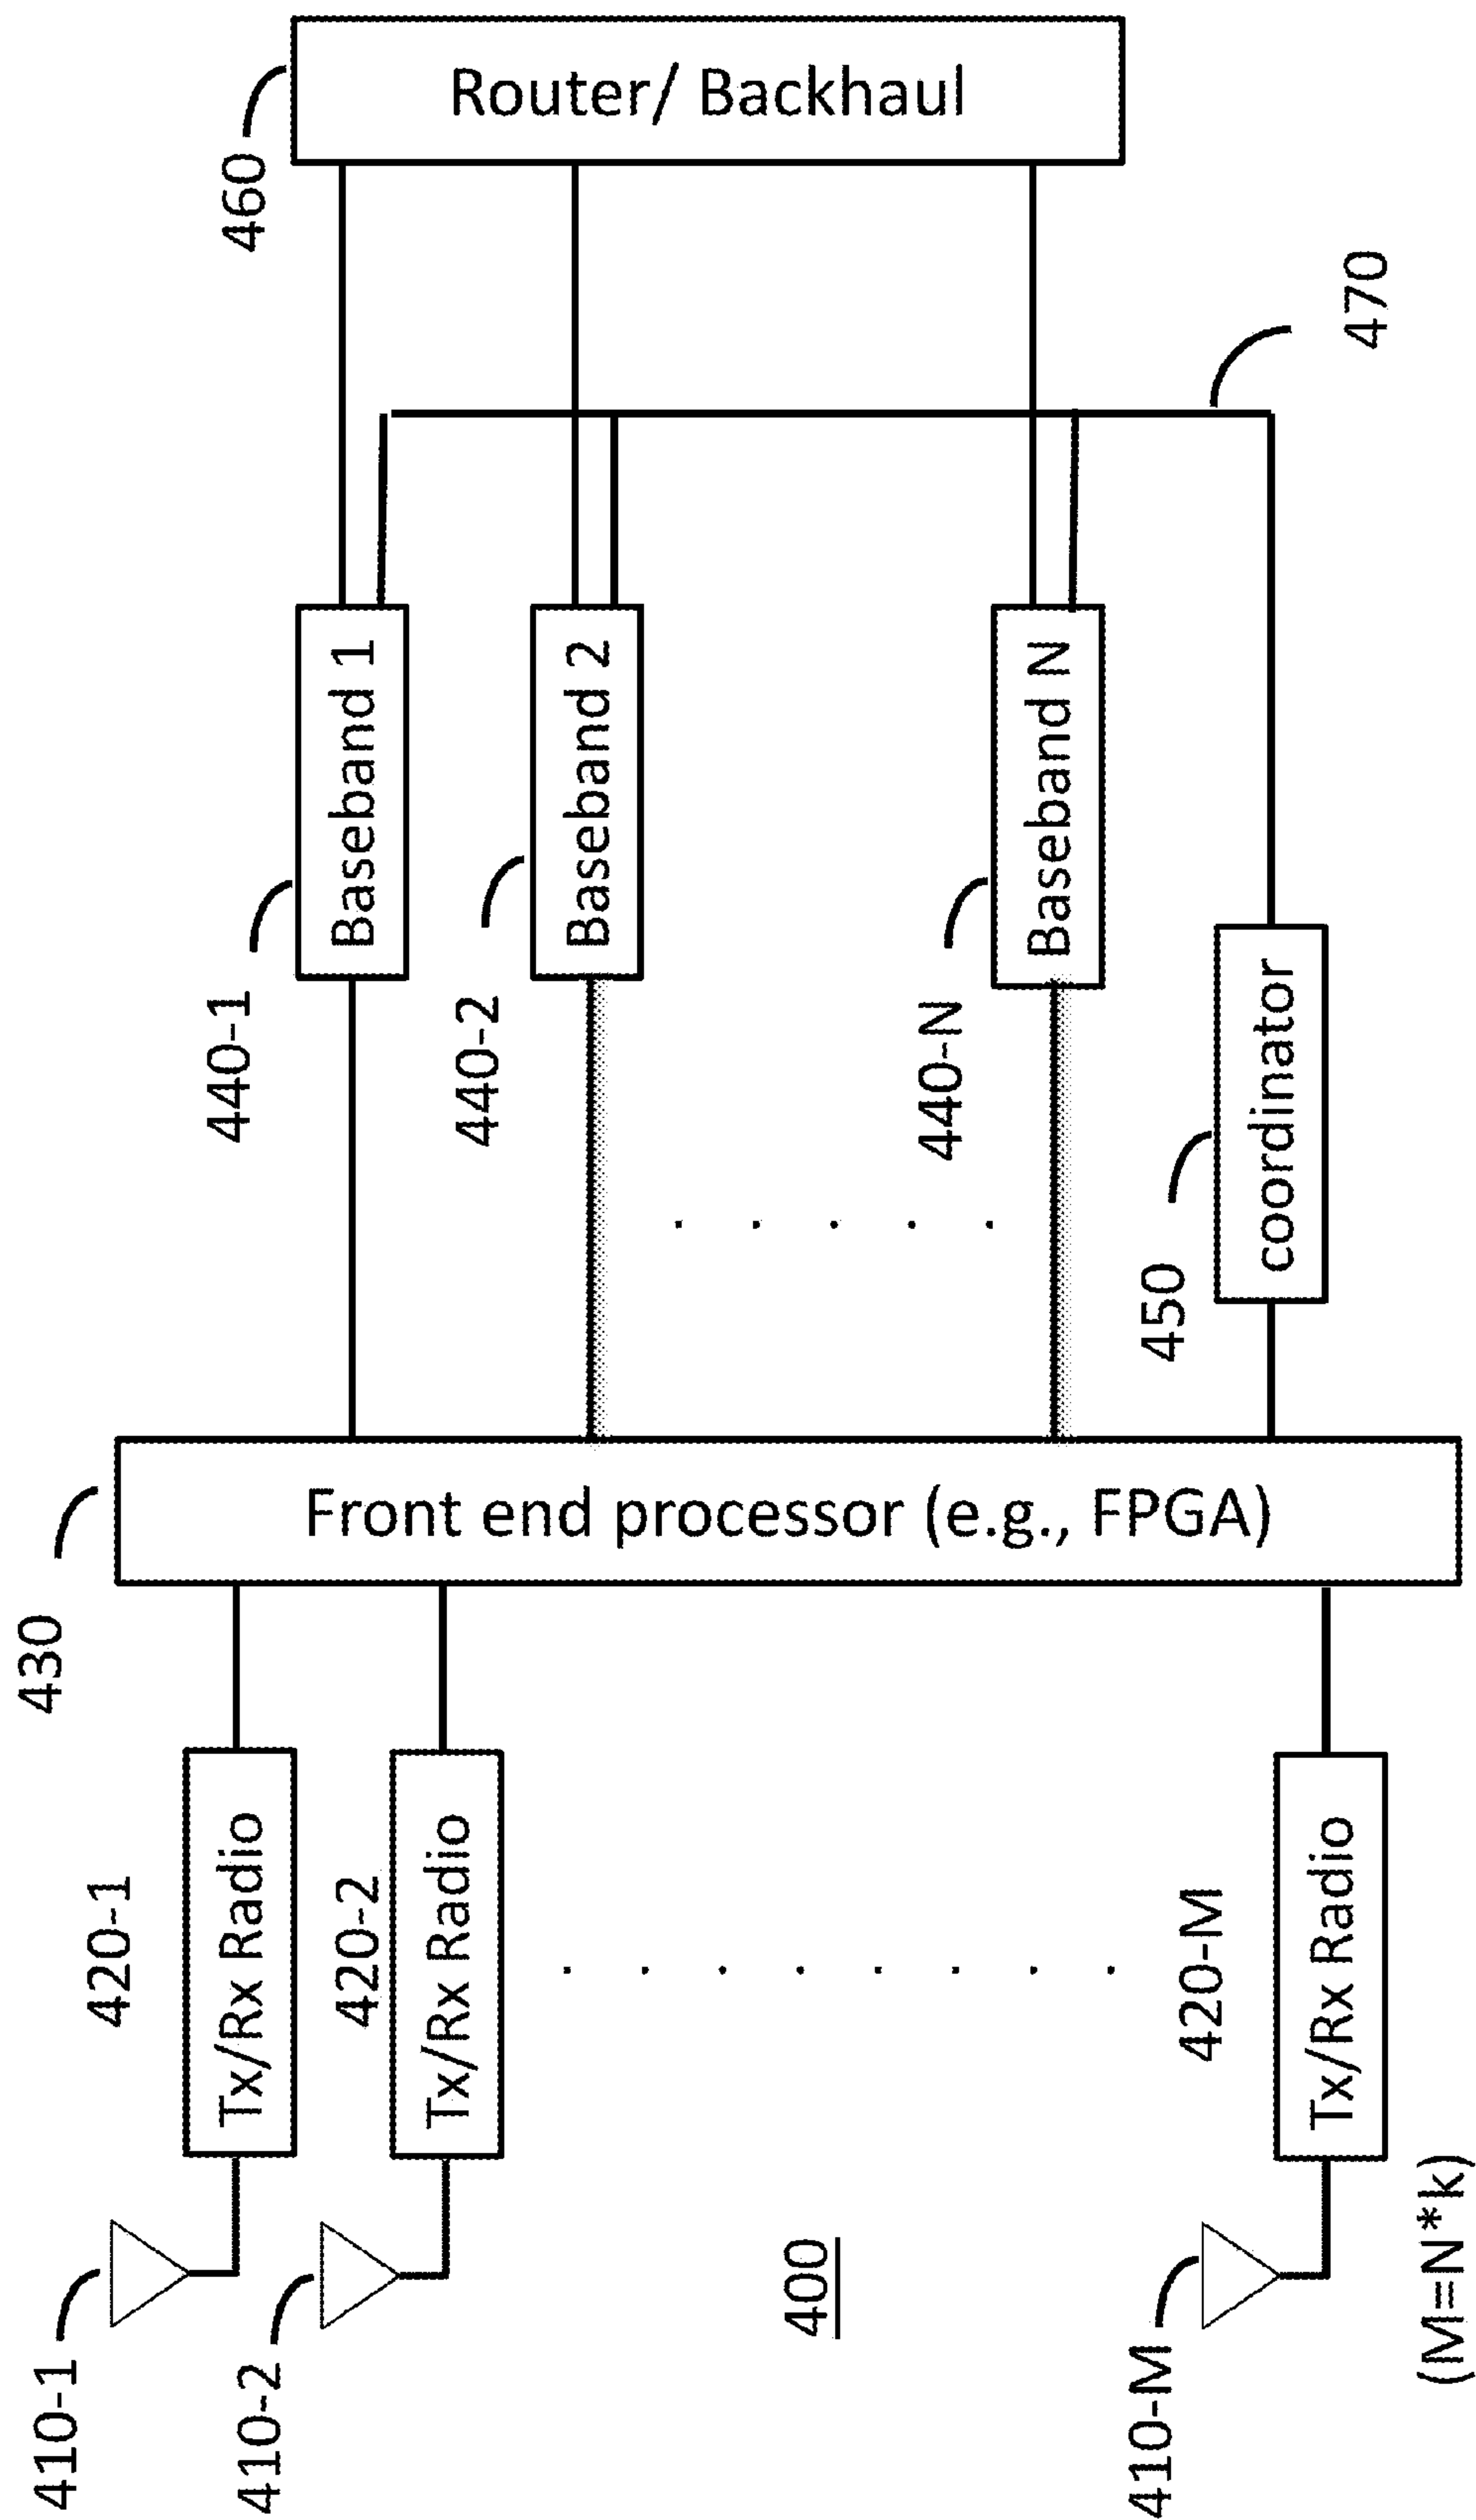


Figure 4

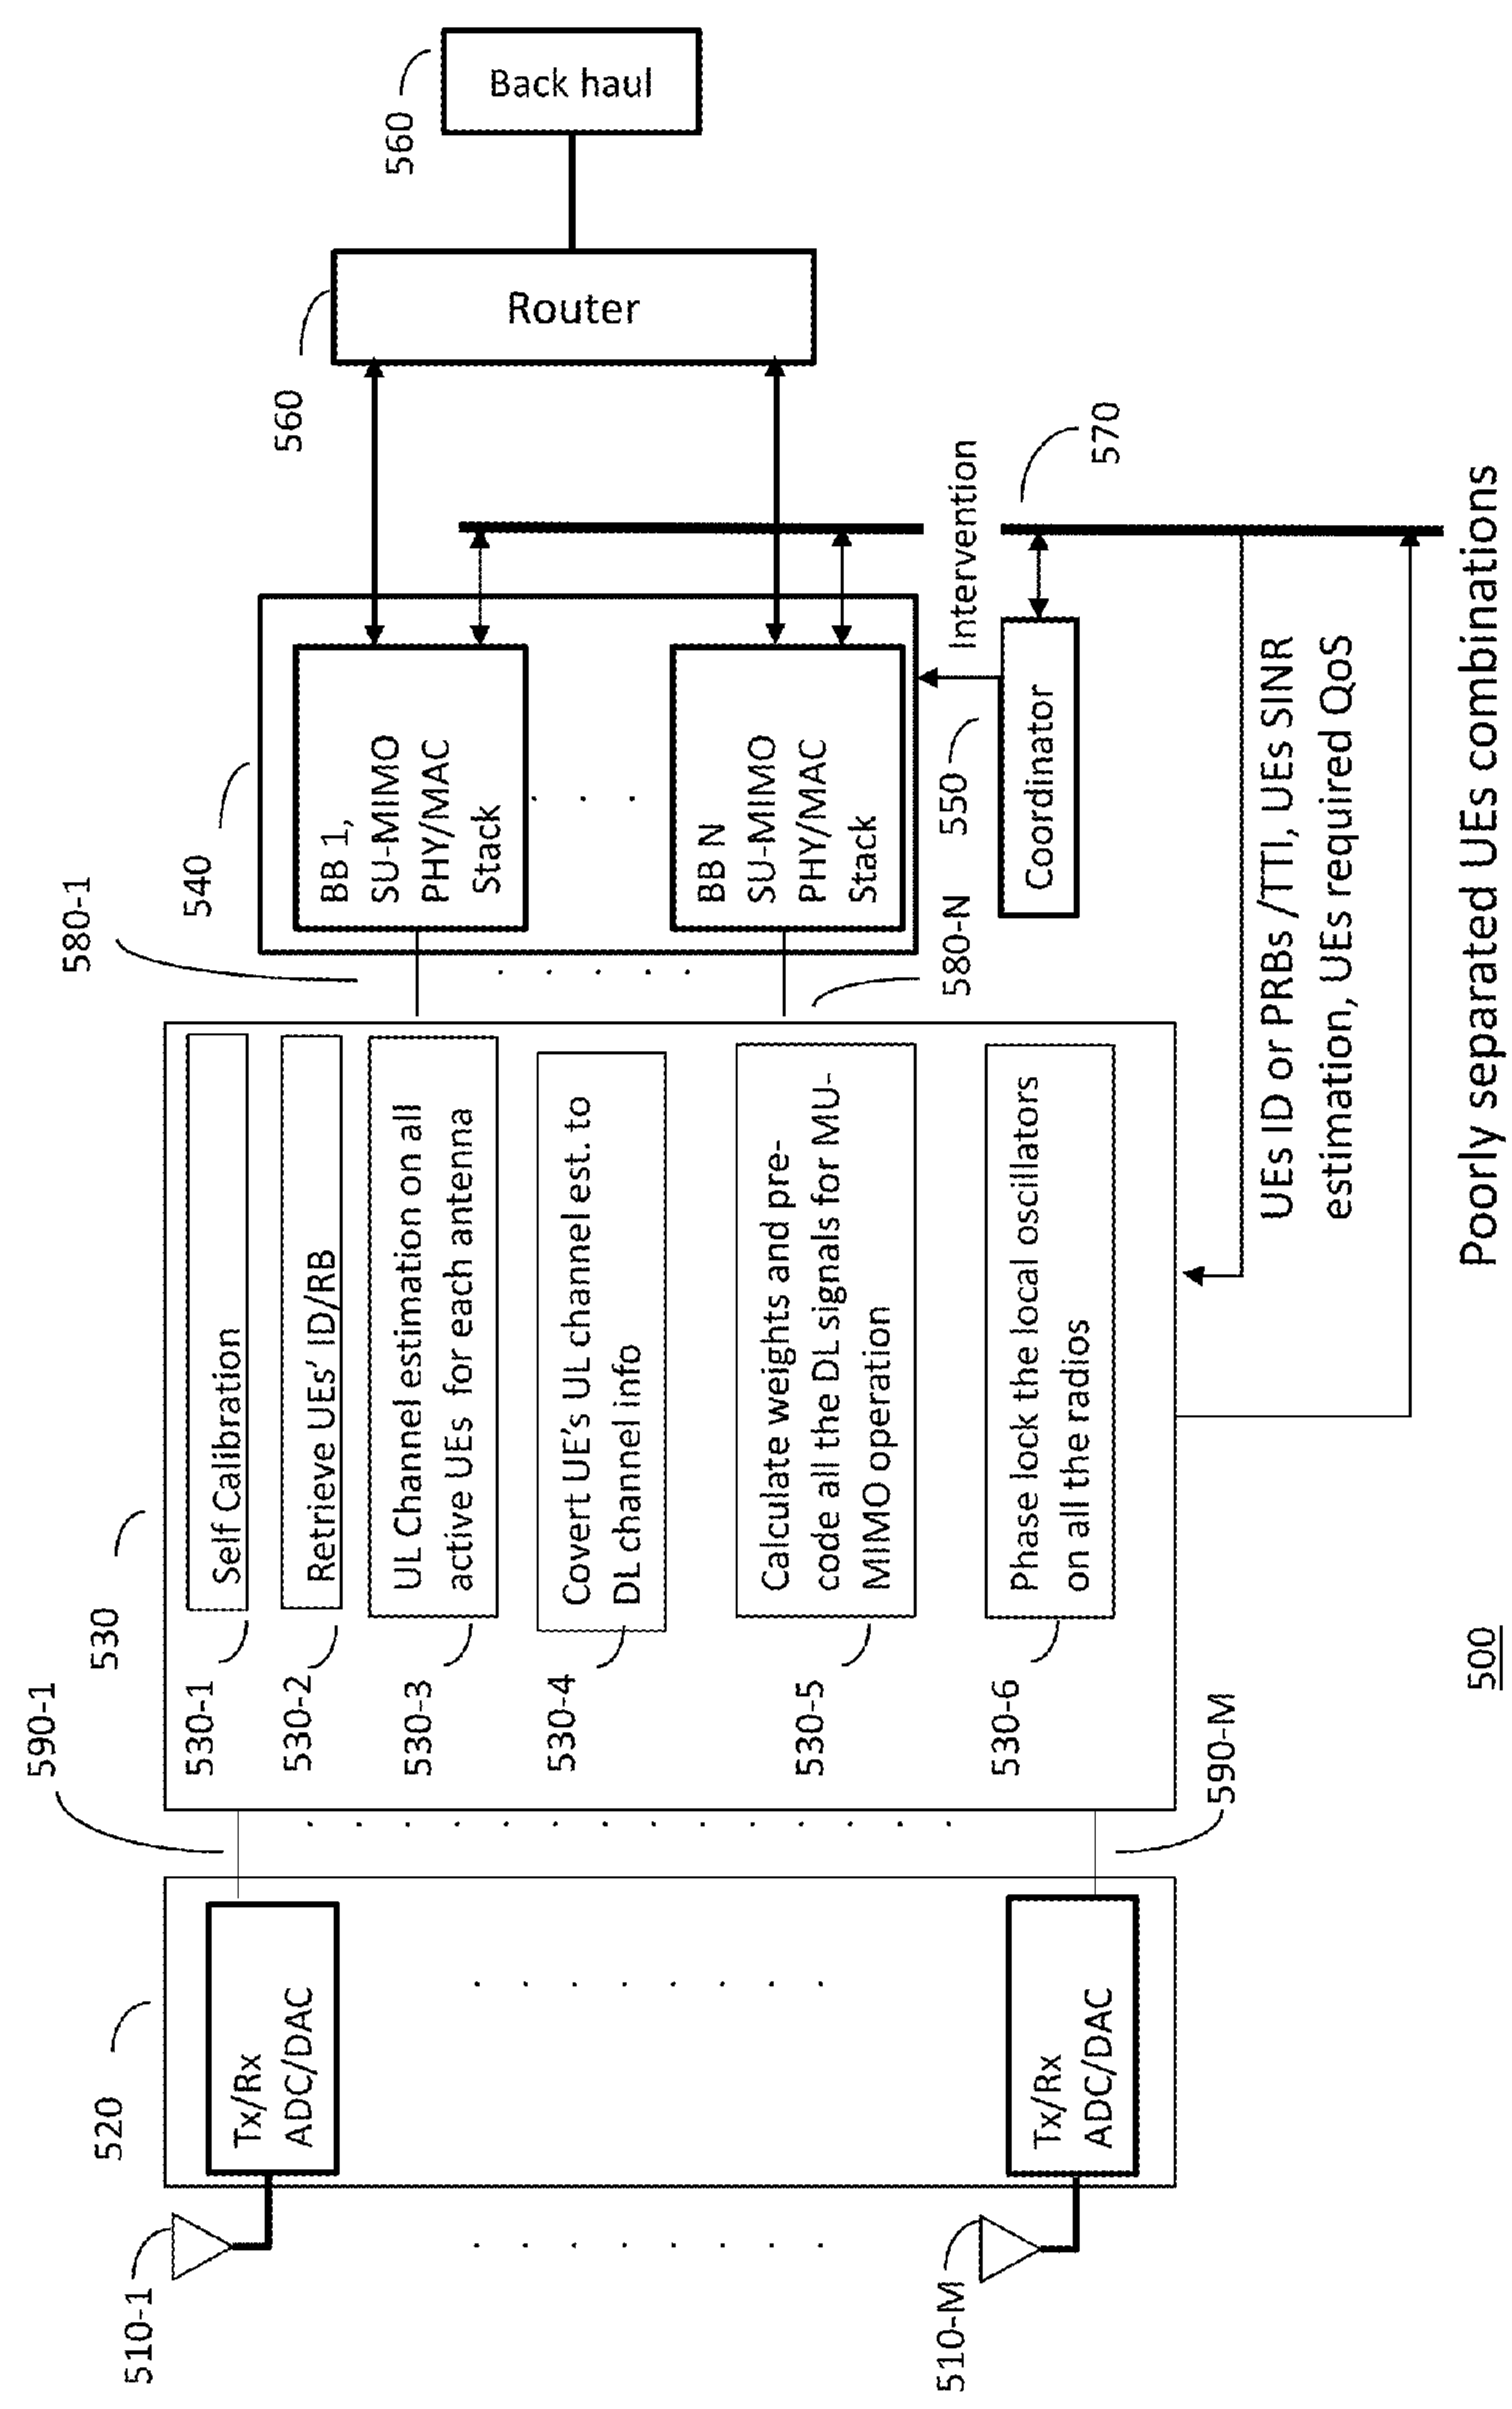
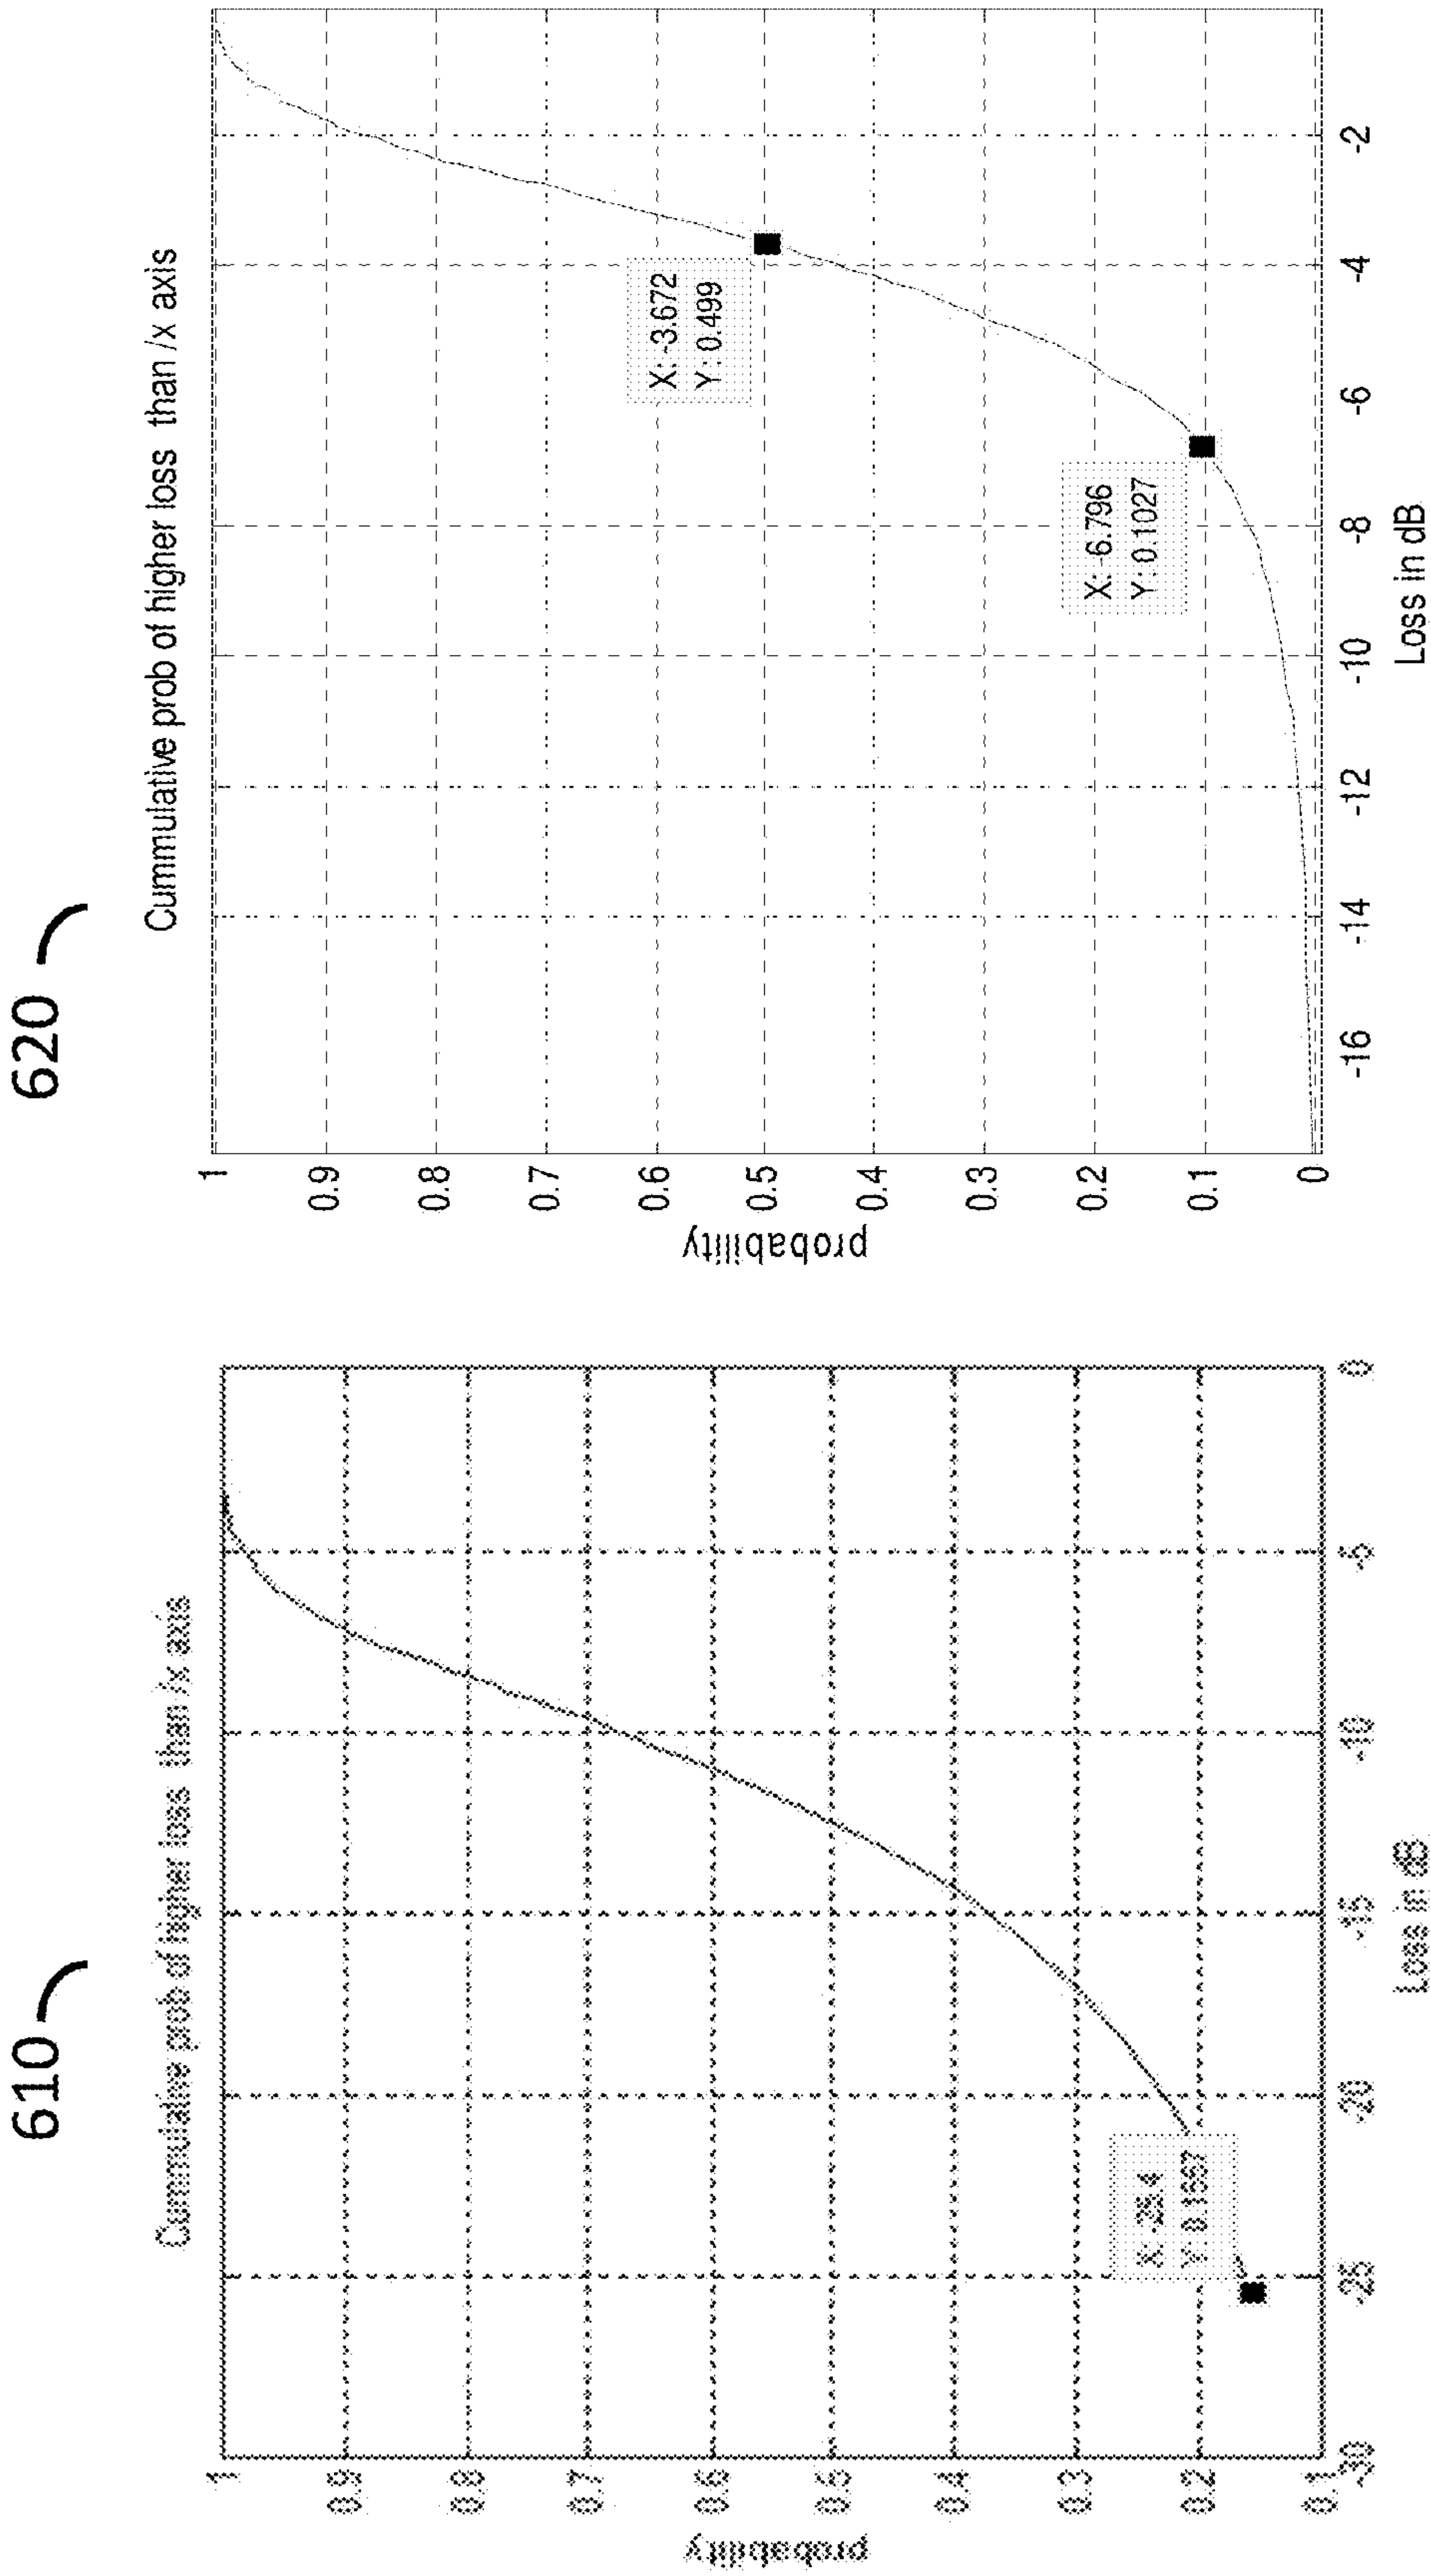


Figure 5



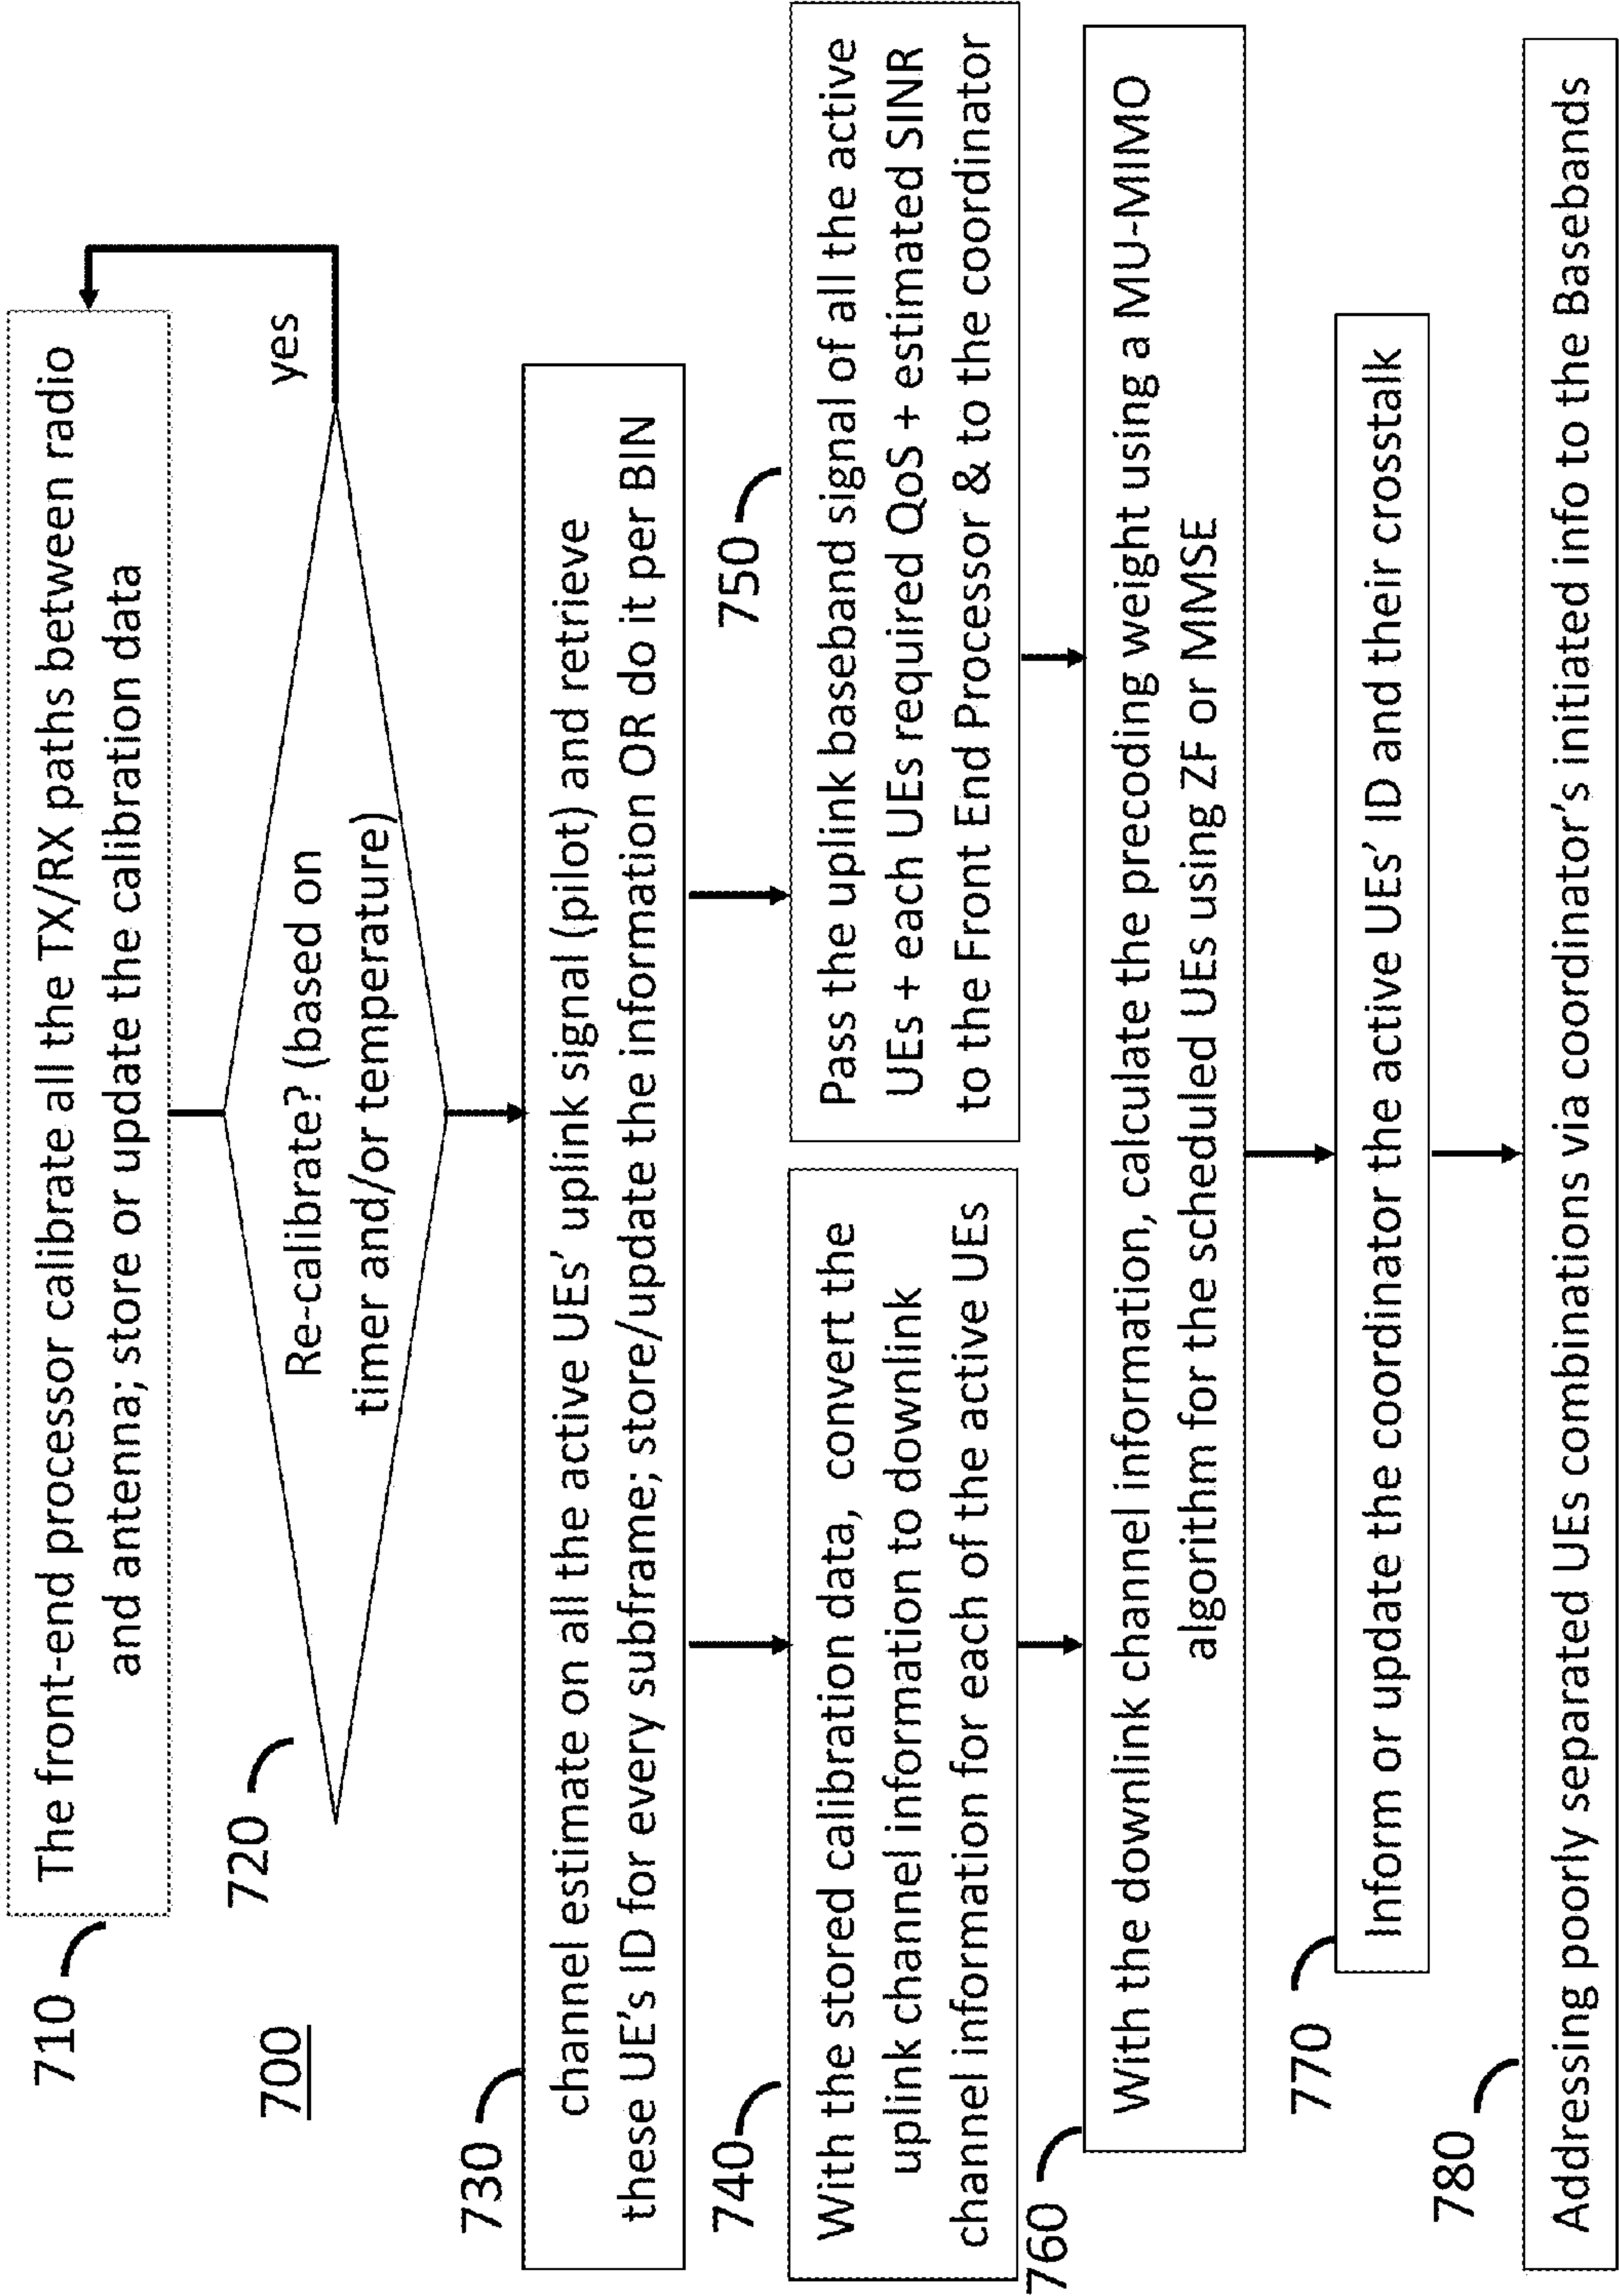


Figure 7

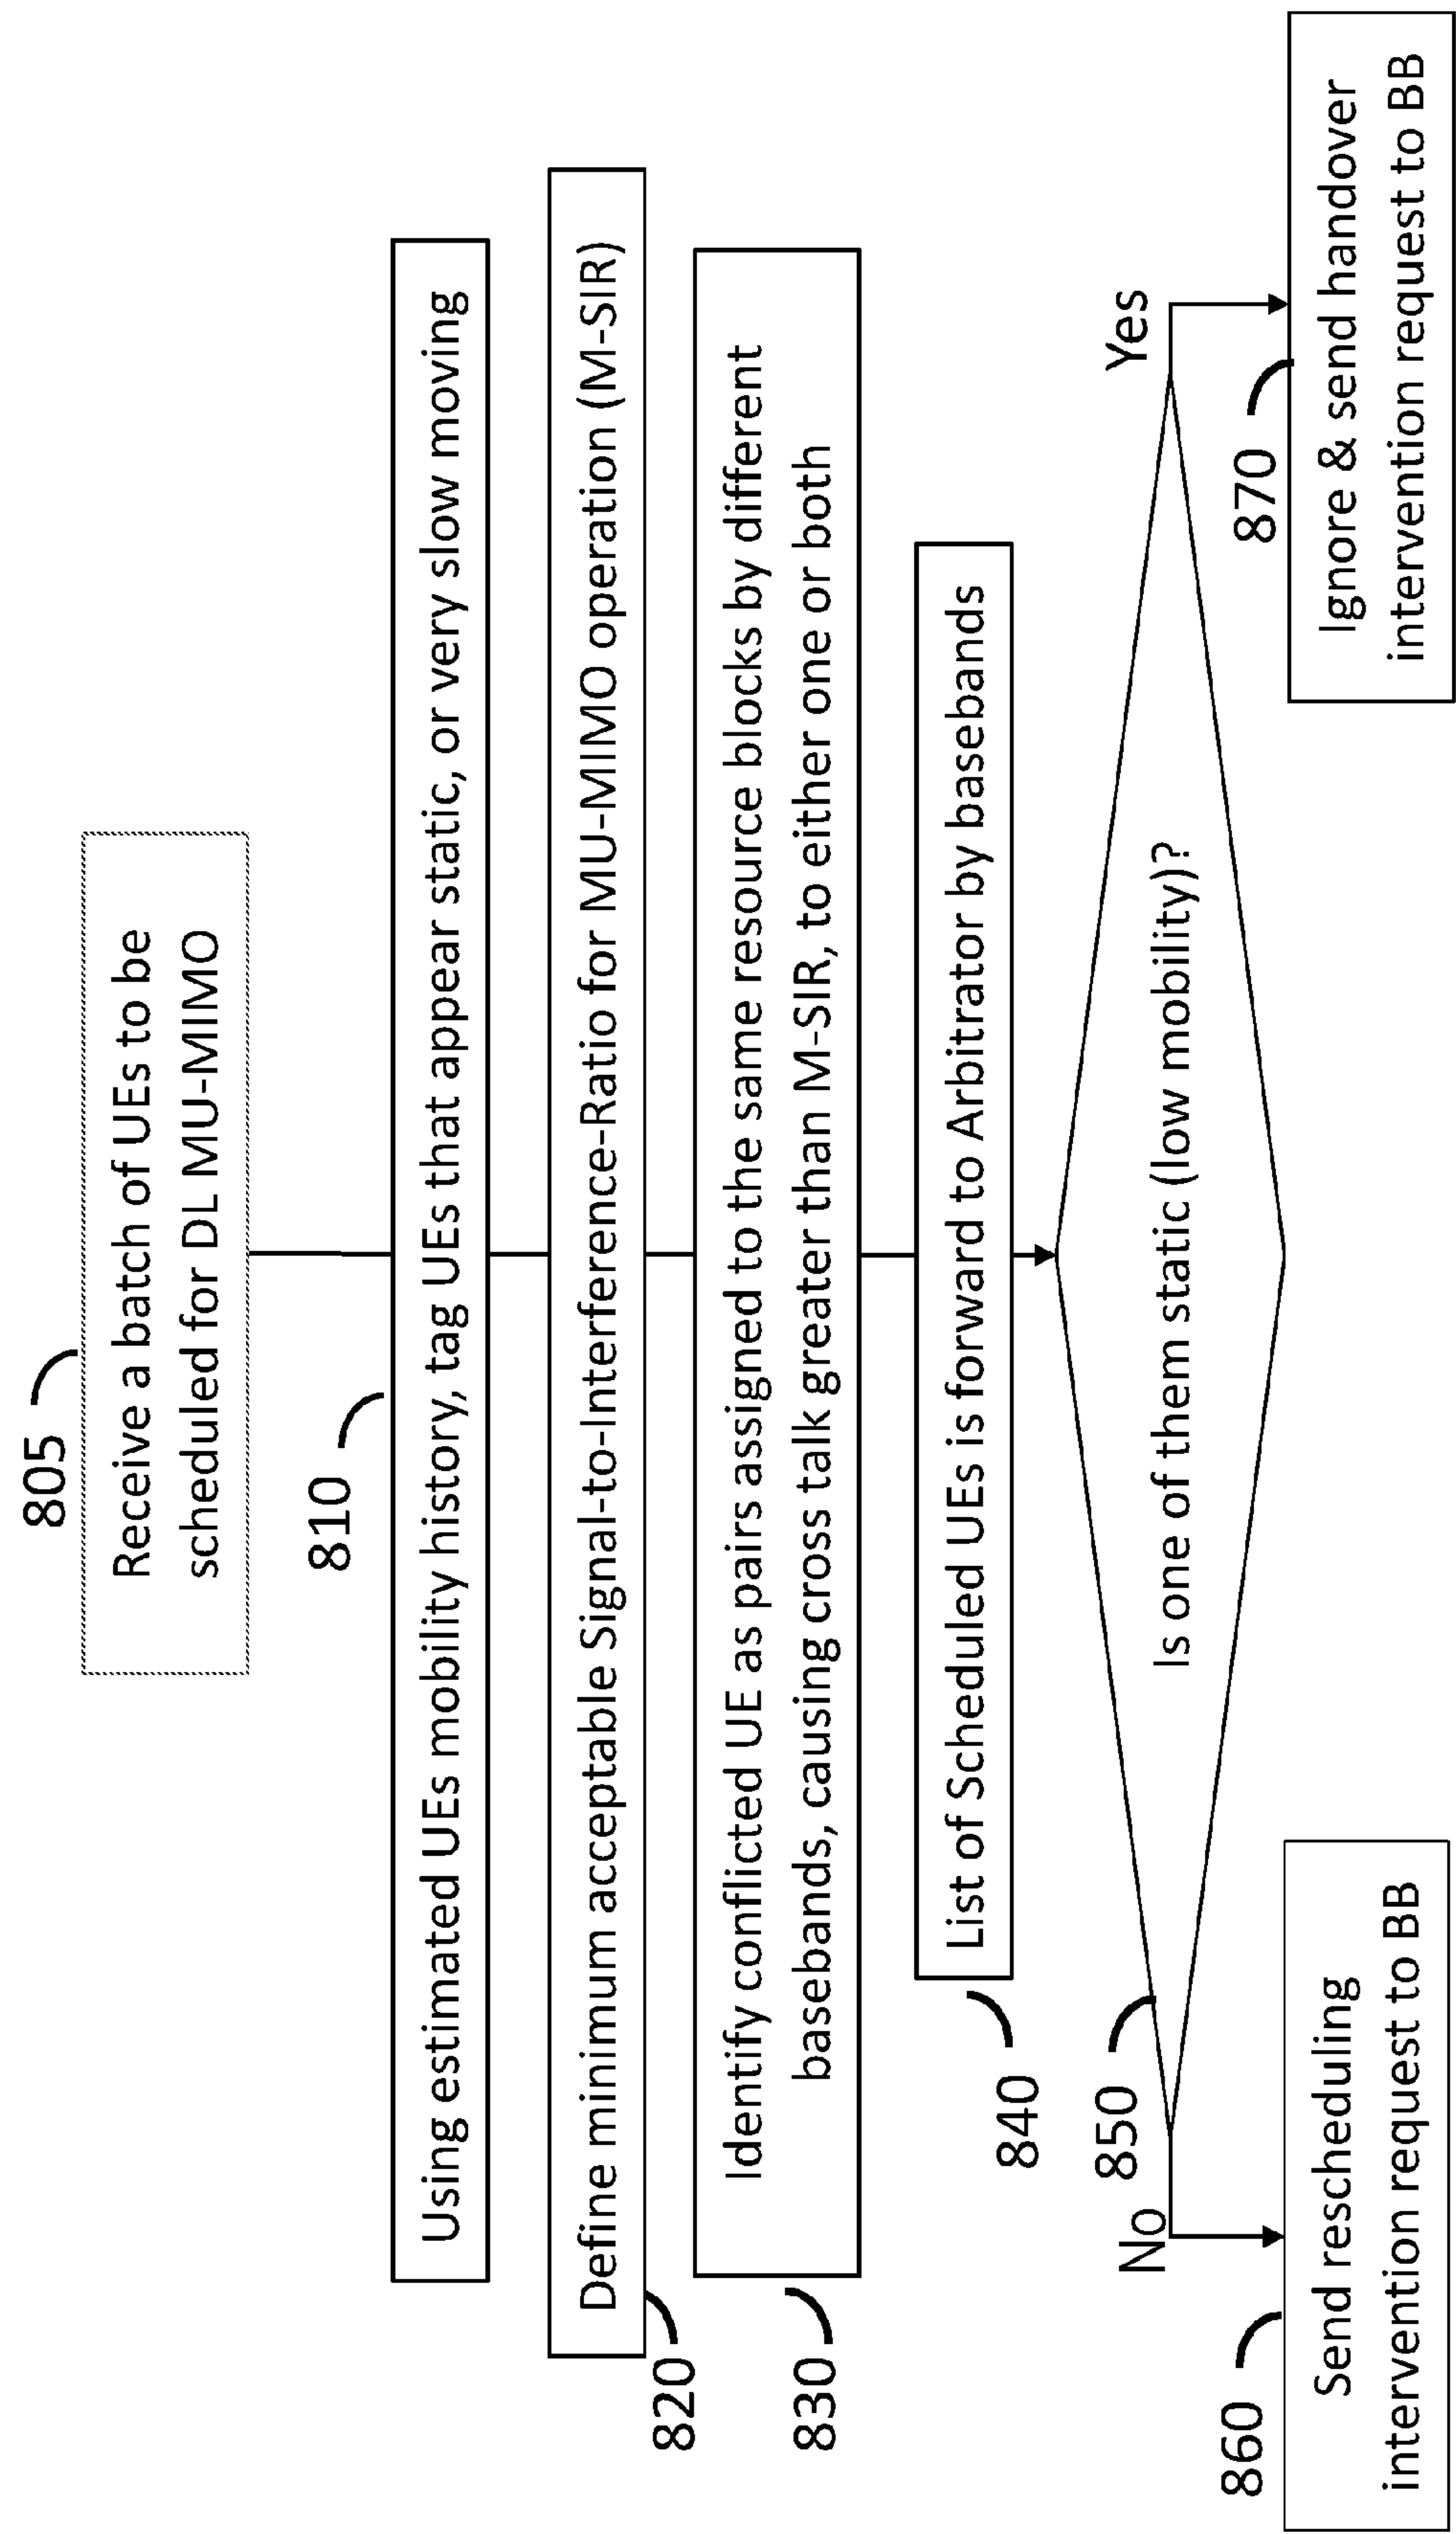


Figure 8

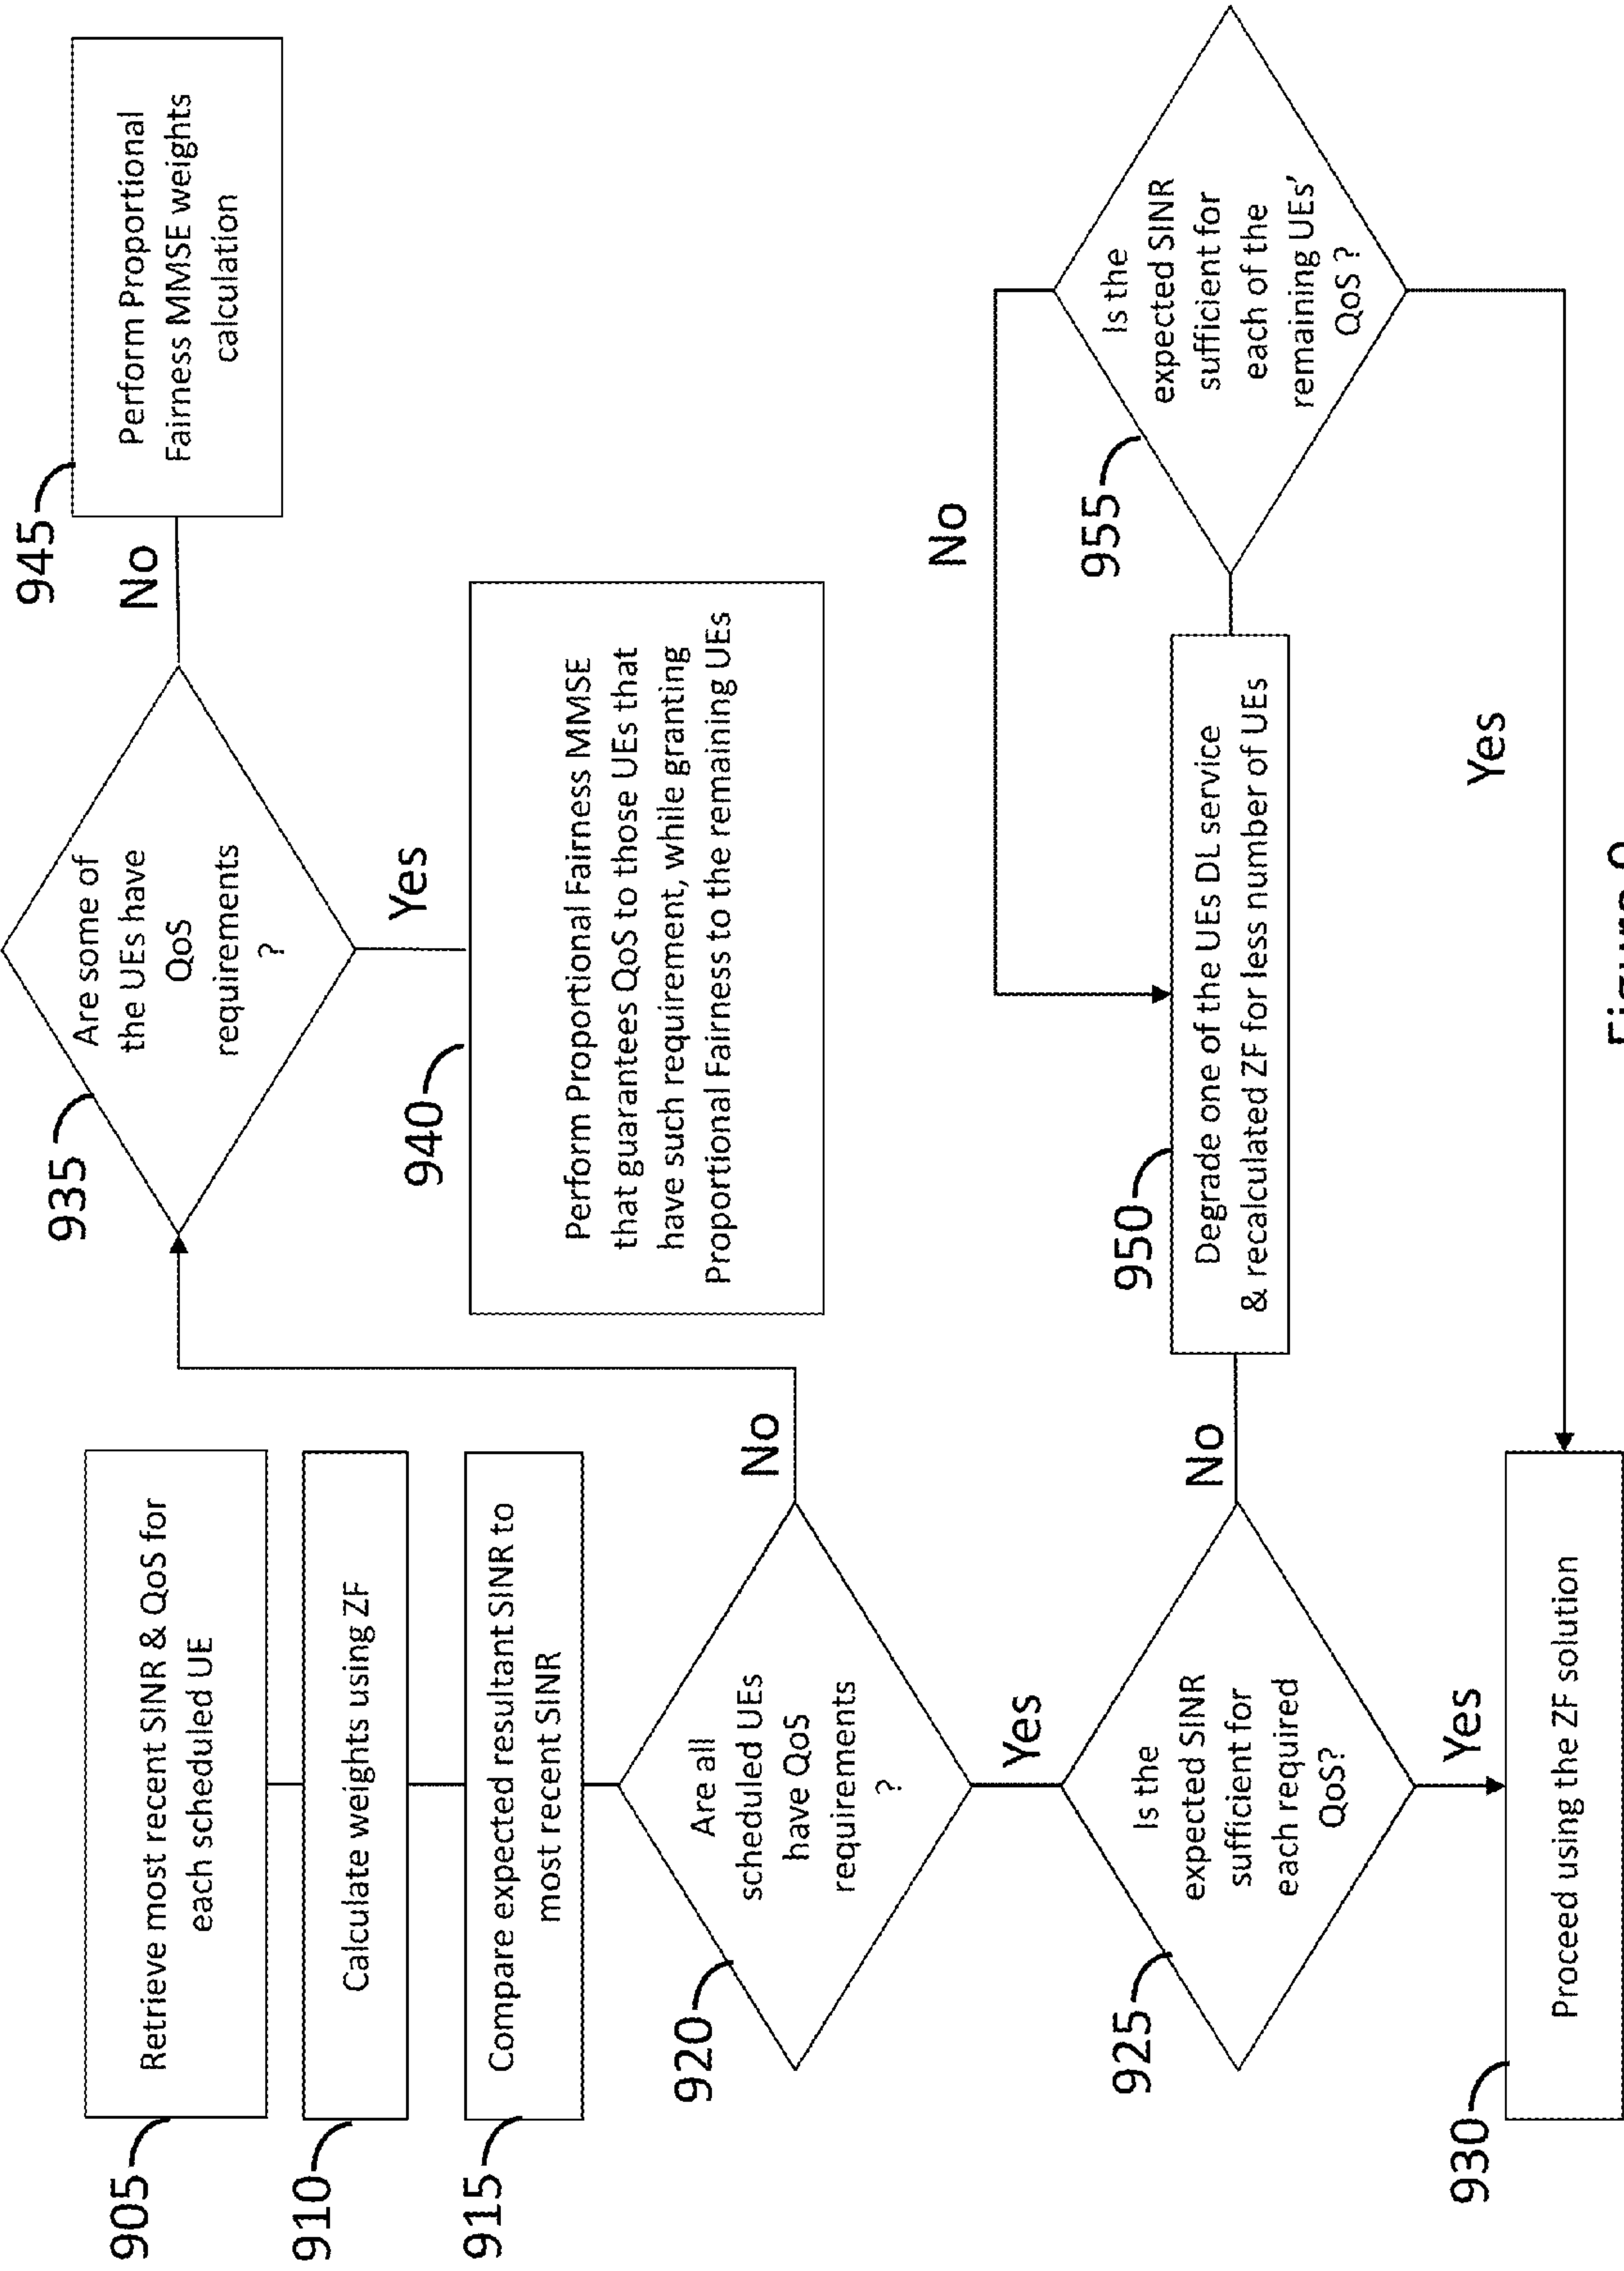


Figure 9

1

IMPLEMENTING MULTI USER MULTIPLE INPUT MULTIPLE OUTPUT (MU MIMO) BASE STATION USING SINGLE-USER (SU) MIMO CO-LOCATED BASE STATIONS

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation application of U.S. patent application Ser. No. 14/172,500, filed on Feb. 4, 2014, which is a continuation-in-part application of U.S. patent application Ser. No. 13/888,057, filed on May 6, 2013, which claims benefit of U.S. Provisional Patent Application Nos. 61/762,486, filed on Feb. 8, 2013 and 61/811,751, filed on Apr. 14, 2013; U.S. patent application Ser. No. 14/172,500 further claims benefit of U.S. Provisional Patent Application Nos. 61/845,270, filed on Jul. 11, 2013 and 61/898,817, filed on Nov. 1, 2013, all of which are incorporated in their entirety herein by reference.

FIELD OF THE INVENTION

The present invention relates generally to multi user multiple input multiple outputs (MU MIMO) base stations, and more specifically, such base stations which are implementing MU MIMO using time division duplex (TDD).

BACKGROUND OF THE INVENTION

Prior to setting forth a short discussion of the related art, it may be helpful to set forth definitions of certain terms that will be used hereinafter.

The term “Small Cell” as used herein is defined as a low-powered radio access node, or base station that operates in licensed spectrum that have a range of 10 meters to 1 or 2 kilometers, compared to a mobile macrocell which might have a range of a few tens of kilometers. Small cells are a vital element to 3G/4G data off-loading, and many mobile network operators see small cells as vital to managing Long Term Evolution (LTE) advanced spectrum more efficiently compared to using just macrocells. The primary use of small cells is to increase capacity of the traffic for the operators rather than increase the mere coverage of the network.

The term “multiple-input-multiple-output” or “MIMO” as used herein, is defined as the use of multiple antennas at both the transmitter and receiver. MIMO systems may improve communication performance by offering significant increases in data throughput and link range without additional bandwidth or increased transmit power. MIMO systems may achieve this goal by spreading the transmit power over multiple antennas to achieve spatial multiplexing that improves the spectral efficiency (more bits per second per frequency range or hertz (Hz) of bandwidth) or to achieve a diversity gain that improves the link reliability (e.g. reduced fading), or increased antenna directivity.

The term “multi-user multiple-input-multiple-output” or “MU-MIMO” as used herein is defined as a wireless communication system in which available antennas are spread over a multitude of independent access points and independent radio terminals—each having one or multiple antennas. In contrast, single-user MIMO considers a single multi-antenna transmitter communicating with a single multi-antenna receiver. To enhance the communication capabilities of all terminals, MU-MIMO applies an extended version of space-division multiple access (SDMA) to allow multiple transmitters to send separate signals and multiple receivers to receive separate signals simultaneously in the same frequency band.

2

The term “Time-division duplexing” or “TDD” as used herein is defined as is the application of time-division multiplexing to separate outward and return signals. It emulates full duplex communication over a half-duplex communication link. Time-division duplexing has a strong advantage in the case where there is asymmetry of the uplink and downlink data rates. As the amount of uplink data increases, more communication capacity can be dynamically allocated, and as the traffic load becomes lighter, capacity can be taken away. The same applies in the downlink direction. For radio systems that aren’t moving quickly, hereinafter referred to as “quasi-static” stations, another advantage is that the uplink and downlink radio paths are likely to be very similar. This means that techniques such as beamforming work well with TDD systems.

In some MU-MIMO that are already known in the art, a spatial separation mechanism creates multiple separated channels between the base station and the users or the same spectrum; sub sets of users population are assigned to these different spatial channels; a common basestation scheduler makes sure that simultaneous users that may experience MU-MIMO’s self-inflicted cross talk, are served over non overlapping PRBs, thus maintaining efficient spectrum multiplexing.

According to prior art MU-MIMO systems, the aggregated data rate of an N-user MIMO is slightly below N times the data rate of a Single-User-MIMO (SU-MIMO), due to random distribution of the users, channel estimation errors, mobility, and the projected signal levels dependence on pairing of users, which impacts MCS estimation accuracy. Such MU-MIMO base stations serve as N unified legacy base stations, sharing common channel estimation and common MIMO processing blocks, as well as common Radio Resources Control (RRC) and a common scheduler.

FIG. 1A is a block diagram of a system 100 and illustrating the function stacks of single-user MIMO system according to the prior art. FIG. 1B is a block diagram illustrating the function stacks of a multi-user MIMO system, according to the prior art. For SU-MIMO, system 100 may include: higher media access control (MAC) 110 may perform scheduling for the MIMO operation; lower MAC 120 which may handle (for example, multiplex, de-multiplex, modulation, and demodulation) the multiple data streams for the MIMO; pre-coding function 130 which may transmit each of the multiple data streams through the multiple transmit antennas according the pre-coding weight.

In order to upgrade the SU-MIMO system into a MU-MIMO system, one may modify the scheduler in higher MAC 110 to a new higher MAC 160 of system 150 to coordinate the multiple users. Additionally, one may multiply the data handling function in lower MAC 120 to newer lower MAC 170, of system 150, to accommodate more users simultaneously. Furthermore, one may modify the pre-coding function 130 to the newer one 180 as in system 150 so that each data stream from all MU-MIMO users may transmit through all the transmit antennas simultaneously.

SUMMARY OF THE INVENTION

The present invention, in embodiments thereof, may provide a system and method which may implement multi user multiple inputs multiple outputs (MU MIMO) base station using single-user (SU) MIMO co-located base stations. Embodiments of the system of the present invention may include a number N co-located single-user multiple input multiple output (SU-MIMO) bases stations each having a number K MIMO rank, wherein said N co-located SU-MIMO

base stations are configured to share a common antennas array, operating over a common frequency band; a front-end MIMO processor connected to said N co-located SU-MIMO base stations and further coupleable to said common antennas array; and a back-end coordinator configured to collaboratively assist in optimizing operation of said N co-located SU-MIMO base stations, such that said N co-located SU-MIMO base stations and said front-end MIMO processor collaboratively implement a multi-user multiple input multiple output (MU-MIMO) base station capable of or configured to dynamically (i.e., over time) separating a coverage area (being a portion of space which is covered by the communication service of a base station) into $N \times K$ spatial channels. The spatial separation is achieved by using the data from each SU-MIMO base station for making educated requests to them for a better coordination between them.

BRIEF DESCRIPTION OF THE DRAWINGS

The subject matter regarded as the invention is particularly pointed out and distinctly claimed in the concluding portion of the specification. The invention, however, both as to organization and method of operation, together with objects, features, and advantages thereof, may best be more fully understood by reference to the following detailed description when read with the accompanying drawings in which:

FIGS. 1A and 1B are SU-MIMO and MU-MIMO respectively according to the prior art;

FIG. 2 depicts the function and architecture of a MU-MIMO implementation using a front end processor, a coordinator, and 4 SU-MIMO baseband units in accordance with some embodiments of the present invention;

FIG. 3 depicts another aspect a MU-MIMO implementation using a front end processor, and four SU-MIMO baseband units in accordance with some embodiments of the present invention;

FIG. 4 illustrates a TDD MU-MIMO base station that includes N co-located k ranked SU-MIMO basebands in accordance with some embodiments of the present invention;

FIG. 5 depicts the function of the front end processor and the associated signal/data flows in accordance with some embodiments of the present invention;

FIG. 6 shows the simulated signal loss for the MU-MIMO system using a zero forcing algorithm without MU-MIMO scheduling;

FIG. 7 is a high level flowchart illustrating an aspect in accordance with some embodiments of the present invention;

FIG. 8 is a high level flowchart illustrating another aspect in accordance with some embodiments of the present invention; and

FIG. 9 is a high level flowchart illustrating yet another aspect in accordance with some embodiments of the present invention.

It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity. Further, where considered appropriate, reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

DETAILED DESCRIPTION OF THE INVENTION

In the following description, various aspects of the present invention will be described. For purposes of explanation, specific configurations and details are set forth in order to provide a thorough understanding of the present invention.

However, it will also be apparent to one skilled in the art that the present invention may be practiced without the specific details presented herein. Furthermore, well known features may be omitted or simplified in order not to obscure the present invention.

Unless specifically stated otherwise, as apparent from the following discussions, it is appreciated that throughout the specification discussions utilizing terms such as “processing,” “computing,” “calculating,” “determining,” or the like, refer to the action and/or processes of a computer or computing system, or similar electronic computing device, that manipulates and/or transforms data represented as physical, such as electronic, quantities within the computing system’s registers and/or memories into other data similarly represented as physical quantities within the computing system’s memories, registers or other such information storage, transmission or display devices.

The term “existing” as used herein relates to devices that are currently available “off the shelf” and are not modified while implemented in a system in accordance with embodiments of the present invention. Examples are existing SU-MIMO base stations which include existing baseband modules, existing schedulers, and existing radio circuits.

The term “collaborative” as used herein relates a manner in which several devices operate while taking into account the actions of the other devices, possibly through a coordinator.

The term “on-site” as used herein relates to operation of a system post deployment in the real-life environment, as opposed to a lab or a factory.

FIG. 2 shows that the functions modification needed for a MU-MIMO system **200** implementing the MU MIMO using SU-MIMO systems, in accordance with embodiments of the present invention. The MU-MIMO system may be carried by front-end processor **210** and coordinator **220** and leave the functions of the SU-MIMO systems which are co-located in one block **230** with a minimal change.

The functions that may be performed by coordinator **220** are described herein. The functions of the bank of co-located SU-MIMO basebands (or base stations) **230** are those of the SU-MIMO bases stations that are currently available. These functions of SU-MIMO may be reused for embodiments of the present invention of creating a MU-MIMO base station with a minimal modification. An interconnection device **240** (for example, a local area network) may provide the interconnection among front-end processor **210**, coordinator **220** and bank of co-located SU-MIMO base basebands (or base stations) **230**. It should be noted that for the purpose of the present application, co-located base stations are base stations modules that are electronically interconnected and usually packed on a same integrated circuit (IC) or at least same printed circuit board (PCB). Through interconnection **240**, each of the co-located basebands may send its scheduling information to the coordinator **220** in advance. Front-end processor **210** may send inseparable user equipment (UE) (not shown) identification (ID) (e.g., those UEs having the crosstalk exceeding a set threshold) to coordinator; coordinator **220** may send the MU-MIMO re-scheduling information to the engaged basebands (or base stations); coordinator **220** may request the engaged basebands (or base stations) to re-schedule their users’ assigned resource blocks.

In contrast to a MU MIMO base station that necessitates unique application specific integrated circuit (ASIC), embodiments of the present invention illustrate how it would be possible to build a MU MIMO base station using only readily available components such as SU MIMO ASICs and some logic components such as the front end processor and the back end coordinator. Such as system may include a

5

number N co-located single-user multiple input multiple output (SU-MIMO) base stations each having a number K MIMO rank, wherein said N co-located SU-MIMO base stations are configured to share a common antennas array, operating over a common (i.e. same) frequency band; a front-end MIMO processor connected to said N co-located SU-MIMO base stations and further coupleable to said common antennas array; and a back-end coordinator configured to collaboratively assist in optimizing operation of said N co-located SU-MIMO base stations, such that said N co-located SU-MIMO base stations and said front-end MIMO processor collaboratively implement a multi-user multiple input multiple output (MU-MIMO) base station capable of or configured to dynamically separating a coverage area into $N \times K$ spatial channels.

FIG. 3 shows the function stack of another MU-MIMO architecture in a system **300** implementing the MU MIMO in accordance with embodiments of the present invention. The MU-MIMO system in accordance with embodiments of the present invention may not need the coordination (i.e., scheduling) among the users for the MU-MIMO operation. External MU-MIMO processor **310** may connect to each of the co-located SU-MIMO basebands (or base stations), **320**. Unlike other external MU-MIMO architecture, The external MU-MIMO architecture in accordance with embodiments of the present invention does not equip coordinator to perform scheduling for the multiple users. The non-scheduling external MU-MIMO system may be subject to a performance loss, depending on the MU-MIMO algorithm used.

FIG. 4 illustrates system **400** implementing a TDD MU-MIMO base station that may include N co-located K ranked SU-MIMO basebands (with at least one baseband on a base station). Each of the N basebands **440-1**, **440-2** . . . **440-N** may serve many users simultaneously with different resources blocks (frequency channels/time slots). The individual user may be served by one baseband up to k -ranked MIMO (i.e., up to k data streams). These basebands share the M antennas **410-1**, **410-2**, . . . , **410-M** and M transceiver radios **420-1**, **420-2**, . . . , **420-M** through a front-end processor (for example, a Field Programmable Gate Array—FPGA) **430**. M may be larger than or equal to $N \times K$. The front end-end processor **430** may process the digital beam-forming (e.g., pre-coding) to the transmit signals and process the channel estimation on the received signal for all the users. Coordinator **450**, interconnected with all the basebands and the front-end processor **430**, may serve scheduler functions of the MU-MIMO operation for the co-located N basebands. The coordinator may be part of the front-end processor. The interconnection **470** may be served by a local area network (LAN). Basebands may connect to the backhaul **460** through interconnection **470**.

According to some embodiments of the present invention, the overall system may be operable in a Time Division Duplex (TDD) configuration, wherein each one of said N co-located SU-MIMO base stations has an existing scheduler and wherein said front-end MIMO processor is configured to carry out said dynamic separation based on the existing schedulers.

According to some embodiments of the present invention, each one of said N co-located SU-MIMO base stations has an existing radio module, wherein said front-end processor is further configured to carry out on site, periodic self-calibration on transmit and receive chains of each one of said radio modules or antennas, wherein the self-calibration is usable for establishing channel reciprocity, so that uplink channel information is mapped into downlink channel estimation in a time division duplex (TDD) system.

6

According to some embodiments of the present invention, each one of said N co-located SU-MIMO base stations has an existing baseband module configured to carry out channel estimation of the channels served by the respective SU-MIMO base stations, and wherein said front-end processor is further configured to carry out channel estimation for all the channels served by said N co-located SU-MIMO base stations.

According to some embodiments of the present invention, the front-end processor may be further configured to: derive identification for each of active user equipment (UE) and map said identifications into respective channel estimations.

According to some embodiments of the present invention, the identification derivation may be based on decoding the UE ID in the front end processor and the respective base station.

According to some embodiments of the present invention, each of said N co-located SU-MIMO base stations has an existing baseband module configured to detect uplink Physical Resource Block (PRB), each PRB being mappable to a distinct reference of frequency/time bins containing orthogonal frequency-division multiplexing OFDM symbols at a given transmit time interval (TTI), wherein said front-end processor is further configured to tag a channel estimation of a user equipment (UE) based on a bin received from said existing baseband modules. User equipment (“UE” or “a UE”) may be a device such as a cellular telephone, wireless-capable computer or laptop computer, smartphone, or other wireless or cellular capable device.

FIG. 5 depicts, in greater detail functionality of system **500** and the function of the front end processor **530** and the associated signal/data flows, according to embodiments of the present invention. The system includes a bank of M transmit/receive antennas **510-1** . . . **510-M**. Each antenna may be connected to one of the M radios **520**. Each radio may include up/down converter, digital-to-analog (DAC) and analog-to-digital (ADC) converters. The system further includes front-end processor **530**. Front-end processor may perform the self-calibration on all transmit and receive paths through the radios and antennas **530-1**. A TDD system may use the calibration information to apply the channel reciprocity. For example, the calibration information may help converting the uplink channel estimation to the downlink channel information. Front-end processor may retrieve the UEs’ Identification (MAC address) and its assigned channel (resources blocks) from the downlink baseband signals **530-2**. The UEs ID and their assigned channels are needed for performing MU-MIMO in the case that the information is not passed from baseband in advance. Front-end processor may perform the channel estimation on the uplink (received) signal for all the active UEs **530-3**. Front-end processor may convert, with the transmit/receive path calibration data, the uplink channel information (estimation) to the downlink channel information **530-4**. With the downlink channel information, the said front-end processor may calculate the downlink crosstalk (or SINR loss) among the active UEs. The said front-end processor may check if pairs of UEs are not suitable for MU-MIMO operation (e.g., their crosstalk (or signal loss) is above a pre-set threshold). Front-end processor may use, with the downlink channel information, any MU-MIMO algorithm (for example, zero-forcing (ZF), minimum mean square error (MMSE), or any proprietary or other suitable algorithm) to calculate the pre-coding weights (amplitudes and/or phases) for all the data streams and users to minimize the crosstalk in the MU-MIMO operation **530-5**. The front-end processor may apply the weights to the signals of the UEs engaged MU-MIMO operation accordingly. Front-end processor may

phase lock the local oscillators of all the radios to keep the signal coherency, which may be needed for MIMO operation **530-6**.

The bank of collocated baseband **540** is also shown with signal/data connection **580-1** . . . **580-N** between the N basebands and the said front-end processor. Each baseband may send the downlink baseband signal to and receive the uplink (received) base band signal from the front-end processor for each active UE.

Signal connection **590-1** . . . **590-M** is shown between the M radios and the front-end processor. Both uplink (received) and downlink (transmit) signals in these connections may be set in I and Q quadrature format.

Coordinator **550** may be interconnected with the front end processor and each baseband through, for example, a local area network **570**. The coordinator may receive the scheduler information (e.g., UEs' ID and their assigned resource blocks) from each baseband **540** in advance and may obtain the DL channel information of each active UE from the front-end processor **530**. With this information, the coordinator may check if there is conflict (for example, the crosstalk exceeding a certain set threshold) among the UEs scheduled for MU-MIMO operation. The said coordinator may resolve a schedule conflict by re-scheduling UEs' assigned resource blocks and inform the associated baseband to prepare the baseband signals for the UEs accordingly. The coordinator may also resolve a schedule conflict by informing the associated baseband to re-schedule the UEs' resource blocks. The function of the said coordinator may be performed by the front-end processor.

According to some embodiments of the present invention, the front-end processor is configured to derive uplink channel information relating to at least some user equipment (UE), wherein said uplink channel estimation is converted to downlink channel information by applying channel reciprocity, and further based on calibration data.

According to some embodiments of the present invention, a communication link established between each base station's baseband and the front end processor, over which schedulers plans are transferred in advance, to the front end processor, using UE ID or UE reference via bin at a given TTI, where said scheduled UEs per TTI, per PRB, are processed by the MU-MIMO mechanism

According to some embodiments of the present invention, a front-end processor is configured calculate a downlink precoding weights for at least some user equipment (UE), camped on the base station using said uplink channel information, said calibration data, and a MU-MIMO spatial multiplexing algorithm.

According to some embodiments of the present invention, a communication link between said base stations and the front end processor is used to inform it of a quality of service (QoS) and the signal to interference plus noise (SINR) of each of the scheduled UEs in both down and up links.

According to some embodiments of the present invention, the MU-MIMO processing may take into account: the quality of service (QoS) requirement and the signal to interference plus noise (SINR) levels of the UEs to be scheduled, and choose whether to use Zero Forcing or minimal mean square error (MMSE) algorithms for antennae weights calculation.

According to some embodiments of the present invention, the MU-MIMO uses Zero Forcing (ZF) whenever signal to interference plus noise SINR levels of the user equipment (UEs) to be scheduled are approximately at generic SINR level, where generic means service that could have been pro-

vided only to one UE, and the MU-MIMO processing uses minimal mean square error (MMSE) whenever Zero Forcing is not used.

According to some embodiments of the present invention, the MU-MIMO process checks quality of service (QoS) tagging of the scheduled UEs, and if none is set, an MMSE weight calculation is done based on a proportional fairness approach.

According to some embodiments of the present invention, the MU-MIMO process checks quality of service QoS of the schedules UEs, and if all are tagged for the QoS, a minimal mean square error (MMSE) calculation is performed and prospective SINRs are compared to those required by the various QoS, and if found sufficient, the weights calculation is actually used, and if not, one of the UE's service is degraded, so that the other QoS requirements are fulfilled, and if not a second UEs service is degraded.

According to some embodiments of the present invention, wherein the MU-MIMO process checks QoS of the schedules UEs, and if some of the UEs are tagged for QoS and some other are not, then the QoS ones take priority, and the non QoS tagged ones are served according to a proportional fairness approach.

According to some embodiments of the present invention, each one of said N co-located SU-MIMO base stations has an existing baseband module (i.e., the SU-MIMO base band module which is unmodified), and wherein said a back-end coordinator is further configured to receive from said front-end-processor an information regarding poorly separated user equipment (UEs) being UEs that are separated below a predefined level, and notifies at least one of the existing baseband modules to modify a schedule plan.

According to some embodiments of the present invention, wherein each one of said N co-located SU-MIMO base stations has an existing radio module having a local oscillator, wherein said front-end processor is further configured to phase lock on all said local oscillators, in order to achieve phase coherency, sufficient for beamforming.

According to some embodiments of the present invention, the front-end processor is further configured to send user equipment (UE) uplink channel information and UE identification to said back-end coordinator for checking and resolving conflicts occurring whenever a crosstalk level exceeds predefined levels.

According to some embodiments of the present invention, each of said N co-located SU-MIMO base stations has an existing scheduler (the SU-MIMO base scheduler which is unmodified) and wherein said back-end coordinator is further configured to identify poorly separated UEs and handover one or more of them to other base station in the system, and repeat this procedures for other poorly separated UEs, so the occurrence of poorly separated UEs is minimized.

According to some embodiments of the present invention, an intervention (i.e., an action carried out by a processor or a coordination in order to resolve a conflict between several devices) is achieved by allowing some schedulers to proceed as planned, while others are requested to refrain from scheduling a given UE for certain PRBs, over a given up and coming Transmission Time Interval (TTI).

According to some embodiments of the present invention, such handover events are limited to UEs whose history indicated static position, where history is measure in tens of seconds, and where static is defined as channel estimation variation that has approximately zero mean.

According to some embodiments of the present invention, wherein the antenna array comprises M antennas, serving N baseband units each supporting K grade MIMO, where

$M \geq N \times K$, i.e. the baseband population is sparse, thus increasing the MU-MIMO degrees of freedom and promoting higher and better spatial separation.

FIG. 6 shows in a pair of simulation graphs 600 that the simulated signal loss for the non-scheduling MU-MIMO operation using the publicly well-known algorithms, zero-forcing, for the case 610 of antenna numbers being equal to the supported users' data streams (e.g., base station uses 8 antennas—4 pairs of linear polarized antennas to support 4 UEs with rank 2 MIMO) and the case 620 of antenna numbers being twice of the supported data streams (e.g., base station uses 16 antennas—8 pairs linear polarized antennas to support 4 UEs with rank 2 MIMO). This system simulation is based on the use of 80 UE, each UE 2x2 MIMO; Sector of 90°; range of 150 m; NLOS Rayleigh 6 rays; UE quads selected at random; 3,000 drops (runs). The simulation result of 620 shows that 90% of the UEs (data streams) is subject to less than 6.8 dB signal loss, or half of the UEs is subject to less than 3.7 dB signal loss. The simulation results shows that the signal loss may be insignificant for certain systems without MU-MIMO scheduler, compromised for simplicity. A more complicated algorithm, like MMSE or improved proprietary algorithm, may reduce the signal loss further.

FIG. 7 700 describes the uplink part MU-MIMO procedure for said the front-end processor in the invented MU-MIMO TDD base station. Step 710 shows that the front-end processor may perform the calibration on transmit and receive paths of all radios/antennas and store or update the calibration data. This processor may repeat the calibration routinely with a pre-set timer and/or based on the temperature change and update the calibration data, shown on step 720. Step 730 shows that the processor may channel estimate on all the uplink signals (pilots) from each of the receive antennas and retrieve the UE's IDs. This information is then stored or updated with the new channel estimation (every sub-frame). With the calibration data, the processor may then convert the uplink channel information into the downlink channel information for the TDD system, shown on Step 740. In addition, step 750 shows that the processor may send the uplink baseband signals to the corresponding served baseband once the UE's IDs are retrieved. Furthermore, step 760 shows that the processor may calculate the pre-coding weights and crosstalk for all the possible UE pairs using a chosen MU-MIMO algorithm (for example, zero-forcing, MMSE, or any proprietary or other suitable algorithm) with the updated downlink channel information. Step 770 shows that the processor may inform the said coordinator the active UE's IDs and their crosstalk. Step 780 shows that poorly separated UEs combinations may be addressed via coordinator's initiated info to the Basebands.

FIG. 8 is a high level flowchart illustrating another aspect in accordance with some embodiments of the present invention. The procedure may include the following steps: Receiving a batch of UEs to be scheduled for DL MU-MIMO 805; Using estimated UEs mobility history, tag (i.e., assign with an identifier or indicator) UEs that appear static, or very slow moving 810; Defining minimum acceptable Signal-to-Interference-Ratio for MU-MIMO operation (M-SIR) 820; identifying conflicted UE as pairs assigned to the same resource blocks by different basebands, causing cross talk greater than M-SIR, to either one or both 830; List of Scheduled UEs is forward to Arbitrator by basebands 840; Is one of them static (low mobility)? 850. In case no—send rescheduling intervention request to base band 860 and in case yes—ignore and send handover intervention request to baseband 870.

FIG. 9 is a high level flowchart illustrating yet another aspect in accordance with some embodiments of the present

invention. The procedure may include the following steps: retrieve most recent SINR and QoS for each scheduled UE 905; Calculate weights using ZF 910; comparing expected resultant SINR to most recent SINR 915; checking whether all scheduled UEs have QoS requirements 920; in case yes—checking whether the expected SINR sufficient for each required QoS 925; in case yes—proceed using the zero forcing (ZF) solution. In case not all scheduled UEs have QoS requirements 920—checking whether some of the UEs have QoS requirements is carried out 935 in case no—Perform Proportional Fairness MMSE weights calculation 945. In case yes—Perform Proportional Fairness MMSE that guarantees QoS to those UEs that have such requirement, while granting Proportional Fairness to the remaining UEs 940.

After checking whether the expected SINR sufficient for each required QoS 925, if the answer is no, degrade one of the UEs DL service and recalculated ZF for less number of UEs 950 and then checking whether the expected SINR sufficient for each of the remaining UEs' QoS 955. In case no, it will repeatedly degrade one of the UEs DL service and recalculated ZF for less number of UEs 950 until the expected SINR sufficient for each of the remaining UEs' QoS. When it does, proceeding using the ZF solution is carried out 930. However, in a case that the expected SINR is sufficient for each of the remaining UEs' QoS, proceeding using the ZF solution is carried out 930.

For the case that the co-located basebands would not be modified to communicate with the said coordinator, the said front-end processor may perform MU-MIMO operation by retrieving the active UE's ID and its assigned resource blocks for a TDD system. The MU-MIMO performance may be compromised. The simulation results in 610 and 620 show that the compromise may be insignificant when the number of the antennas/radios is larger than that of basebands (e.g., $M > N$).

In the above description, an embodiment is an example or implementation of the invention. The various appearances of “one embodiment”, “an embodiment” or “some embodiments” do not necessarily all refer to the same embodiments.

Although various features of the invention may be described in the context of a single embodiment, the features may also be provided separately or in any suitable combination. Conversely, although the invention may be described herein in the context of separate embodiments for clarity, the invention may also be implemented in a single embodiment.

Embodiments of the invention may include features from different embodiments disclosed above, and embodiments may incorporate elements from other embodiments disclosed above. The disclosure of elements of the invention in the context of a specific embodiment is not to be taken as limiting their used in the specific embodiment alone.

Furthermore, it is to be understood that the invention can be carried out or practiced in various ways and that the invention can be implemented in embodiments other than the ones outlined in the description above.

The invention is not limited to those diagrams or to the corresponding descriptions. For example, flow need not move through each illustrated box or state, or in exactly the same order as illustrated and described.

Meanings of technical and scientific terms used herein are to be commonly understood as by one of ordinary skill in the art to which the invention belongs, unless otherwise defined.

While the invention has been described with respect to a limited number of embodiments, these should not be construed as limitations on the scope of the invention, but rather as exemplifications of some of the preferred embodiments. Other possible variations, modifications, and applications are

11

also within the scope of the invention. Accordingly, the scope of the invention should not be limited by what has thus far been described, but by the appended claims and their legal equivalents.

The invention claimed is:

1. A system comprising:

a number N co-located Time Division Duplex (TDD) base stations, each having a baseband module capable of a number K of multiple input multiple output (MIMO) ranks, wherein said N co-located TDD base stations are configured to share a common antenna array and a common bank of radio modules, and wherein said N co-located TDD base stations are configured to operate over a common frequency band;

a front-end MIMO processor connected to said N co-located TDD base stations and further coupled to said common antennas array; and

a back-end coordinator configured to optimize operation of said N co-located TDD base stations, such that said N co-located TDD base stations and said front-end MIMO processor implement a multi-user multiple input multiple output (MU-MIMO) base station capable of dynamically separating a coverage area into $N \times K$ spatial channels.

2. The system according to claim 1, wherein each of said N co-located TDD base stations has a scheduler and wherein said front-end MIMO processor is configured to carry out said dynamic separation based on said existing schedulers.

3. The system according to claim 1, wherein said front-end processor is further configured to carry out on-site, periodic self-calibration on transmit and receive chains of each of said radio modules or antennas, and to establish channel reciprocity based on results of said self-calibration, so that uplink channel information is mapped into downlink channel estimation.

4. The system according to claim 3, wherein said front-end processor is further configured to calculate a downlink precoding weights for at least some user equipment (UE), camped on the base station using said uplink channel information, said calibration data, and a MU-MIMO spatial multiplexing algorithm.

5. The system according to claim 1, wherein each of said N co-located TDD base stations comprises an existing baseband module configured to carry out channel estimation of the channels served by the respective TDD base stations, and wherein said front-end processor is further configured to carry out channel estimation for all the channels served by said N co-located TDD base stations.

6. The system according to claim 1, wherein said front-end processor is further configured to: derive identification for each of active user equipment (UE) and map said identifications into respective channel estimations.

7. The system according to claim 6, where the said identification derivation is based on decoding the UE ID in the front end processor and in the respective base station.

8. The system according to claim 1, wherein each of said N co-located TDD base stations has an existing baseband module configured to detect uplink Physical Resource Block (PRB), each PRB being mappable to a distinct reference of frequency/time bins containing OFDM symbols at a given TTI, wherein said front-end processor is further configured to tag a channel estimation of a user equipment (UE) based on a bin received from said existing baseband modules.

9. The system according to claim 1, wherein said front-end processor is further configured to derive uplink channel information relating to at least some user equipment (UE), wherein

12

said uplink channel estimation is converted to downlink channel information by applying channel reciprocity, and further based on calibration data.

10. The system according to claim 1, wherein a communication link established between each base station's baseband and the front end processor, over which schedulers plans are transferred in advance, to the front end processor, and to the coordinator, using UE ID or UE reference via bin at a given TTI, where said scheduled UEs per TTI, per PRB, are processed by the MU-MIMO mechanism.

11. The system according to claim 1, wherein a communication link between said base stations and the front end processor is used to inform it of a quality of service (QoS) and the signal to interference plus noise (SINR) of each of the scheduled UEs in both down and up links.

12. The system according to claim 1, wherein the MU-MIMO processing takes into account: the quality of service (QoS) and the signal to interference plus noise (SINR) levels of the UEs to be scheduled, and chooses whether to use Zero Forcing or minimal mean square error (MMSE) algorithms for antennae weights calculation.

13. The system according to claim 1, wherein the MU-MIMO uses Zero Forcing whenever signal to interference plus noise SINR levels of the user equipment (UEs) to be scheduled are approximately at generic SINR level, where generic means service that could have been provided solely to one UE.

14. The system according to claim 1, where the MU-MIMO process checks quality of service (QoS) tagging of the scheduled UEs, and if none is set, an MMSE weight calculation is done based on a proportional fairness approach.

15. The system according to claim 1, wherein the MU-MIMO process checks quality of service QoS of the scheduled UEs, and if all are tagged for the QoS, a minimal mean square error (MMSE) calculation is performed and prospective SINRs are compared to those required by the various QoS, and if found sufficient, the weights calculation is actually used, and if not, one of the UE's service is degraded, so that the other QoS requirements are fulfilled, and if not a second UEs service is degraded.

16. The system according to claim 1, wherein the MU-MIMO process checks QoS of the scheduled UEs, and if some of the UEs are tagged for QoS and some other are not, then the QoS ones take priority, and the non QoS tagged ones are served according to a proportional fairness approach.

17. The system according to claim 1, wherein each of said N co-located TDD base stations has an existing baseband module, and wherein said back-end coordinator is further configured to receive from said front-end-processor an information regarding poorly separated user equipment (UEs) being UEs that have cross talk higher than a predefined level, and notifies at least one of the existing baseband modules to modify a schedule plan.

18. The system according to claim 1, wherein each of said radio modules having a local oscillator, wherein said front-end processor is further configured to phase lock on all said local oscillators, in order to achieve phase coherency, sufficient for beamforming.

19. The system according to claim 1, wherein said front-end processor is further configured to send user equipment (UE) uplink channel information and UE identification to said back-end coordinator for checking and resolving conflicts occurring whenever a crosstalk level exceeds predefined levels by sending an intervening request to the basebands.

20. The system according to claim 19, wherein said intervention is achieved by requesting some schedulers to proceed as planned, while others are requested to refrain from sched-

uling a given UE for certain PRBs, over a given up and coming Transmission Time Interval (TTI).

21. The system according to claim **1**, wherein each of said N co-located TDD base stations has an existing scheduler and wherein said back-end coordinator is further configured to 5 identify poorly separated UEs the are either static or have low mobility, and handover one or more of them to other base station in the system, and repeat this procedures for other poorly separated UEs, so the occurrence of poorly separated UEs is minimized. 10

22. The system according to claim **1**, wherein the antenna array comprises M antennas, serving N baseband units each supporting rank-K MIMO, where $M \geq N \cdot K$, i.e. the baseband population is sparse, thus increasing the MU-MIMO degrees of freedom and promoting higher and better spatial separation. 15

23. The system according to claim **22**, such handover events are limited to UEs whose history indicated static position, where history is measure in tens of seconds, and where static is defined as channel estimation variation that has 20 approximately zero mean.

* * * * *