



US 20170262274A1

(19) **United States**

(12) **Patent Application Publication**
VANGELOV

(10) **Pub. No.: US 2017/0262274 A1**

(43) **Pub. Date: Sep. 14, 2017**

(54) **OVER-THE-AIR TRIGGER TO VEHICLE
INTERROGATOR UPDATES**

(52) **U.S. Cl.**
CPC **G06F 8/65** (2013.01)

(71) Applicant: **FORD GLOBAL TECHNOLOGIES,
LLC**, Dearborn, MI (US)

(57) **ABSTRACT**

(72) Inventor: **John Naum VANGELOV**, South Lyon,
MI (US)


(21) Appl. No.: **15/064,931**


(22) Filed: **Mar. 9, 2016**



Publication Classification

(51) **Int. Cl.**
G06F 9/445 (2006.01)

A vehicle may subscribe to a topic of a topic tree maintained by a message broker and associated with the vehicle. The vehicle may send, to a service delivery network, an interrogator log enumerating configuration information of the vehicle generated responsive to a trigger message published to the topic by the network, and retrieve a manifest indicating network locations of updates determined by the network from the interrogator log.

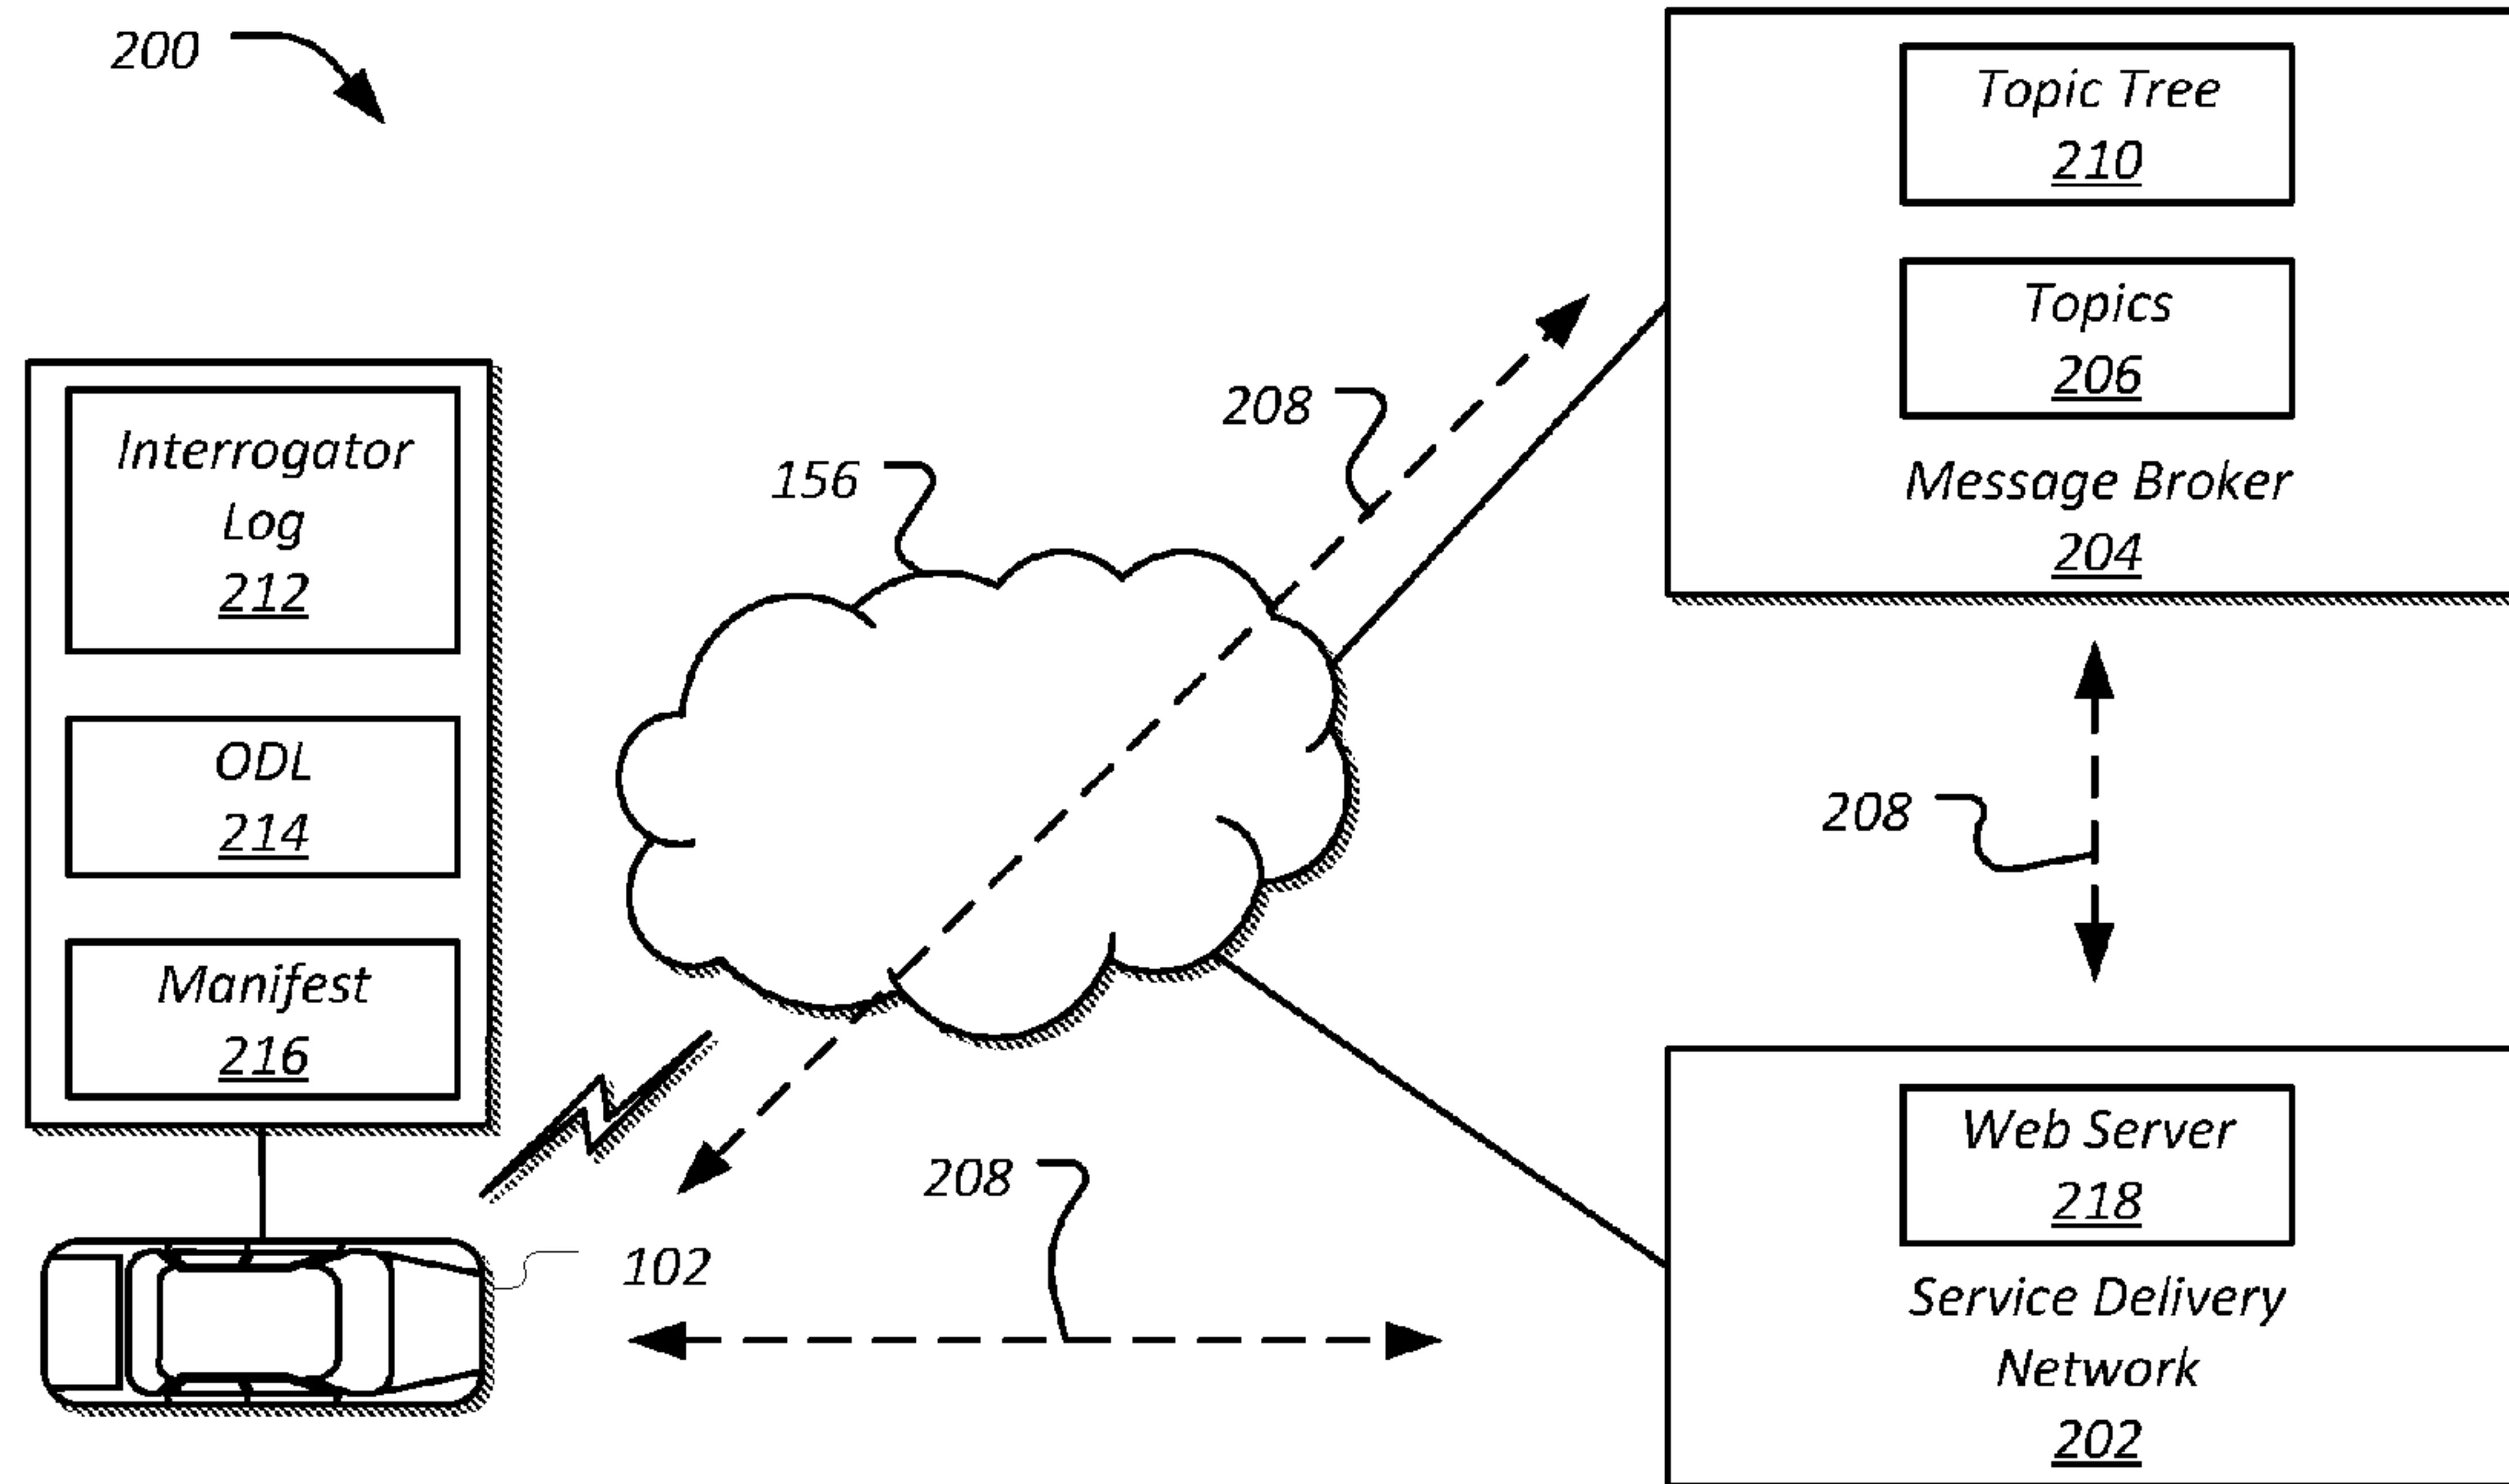

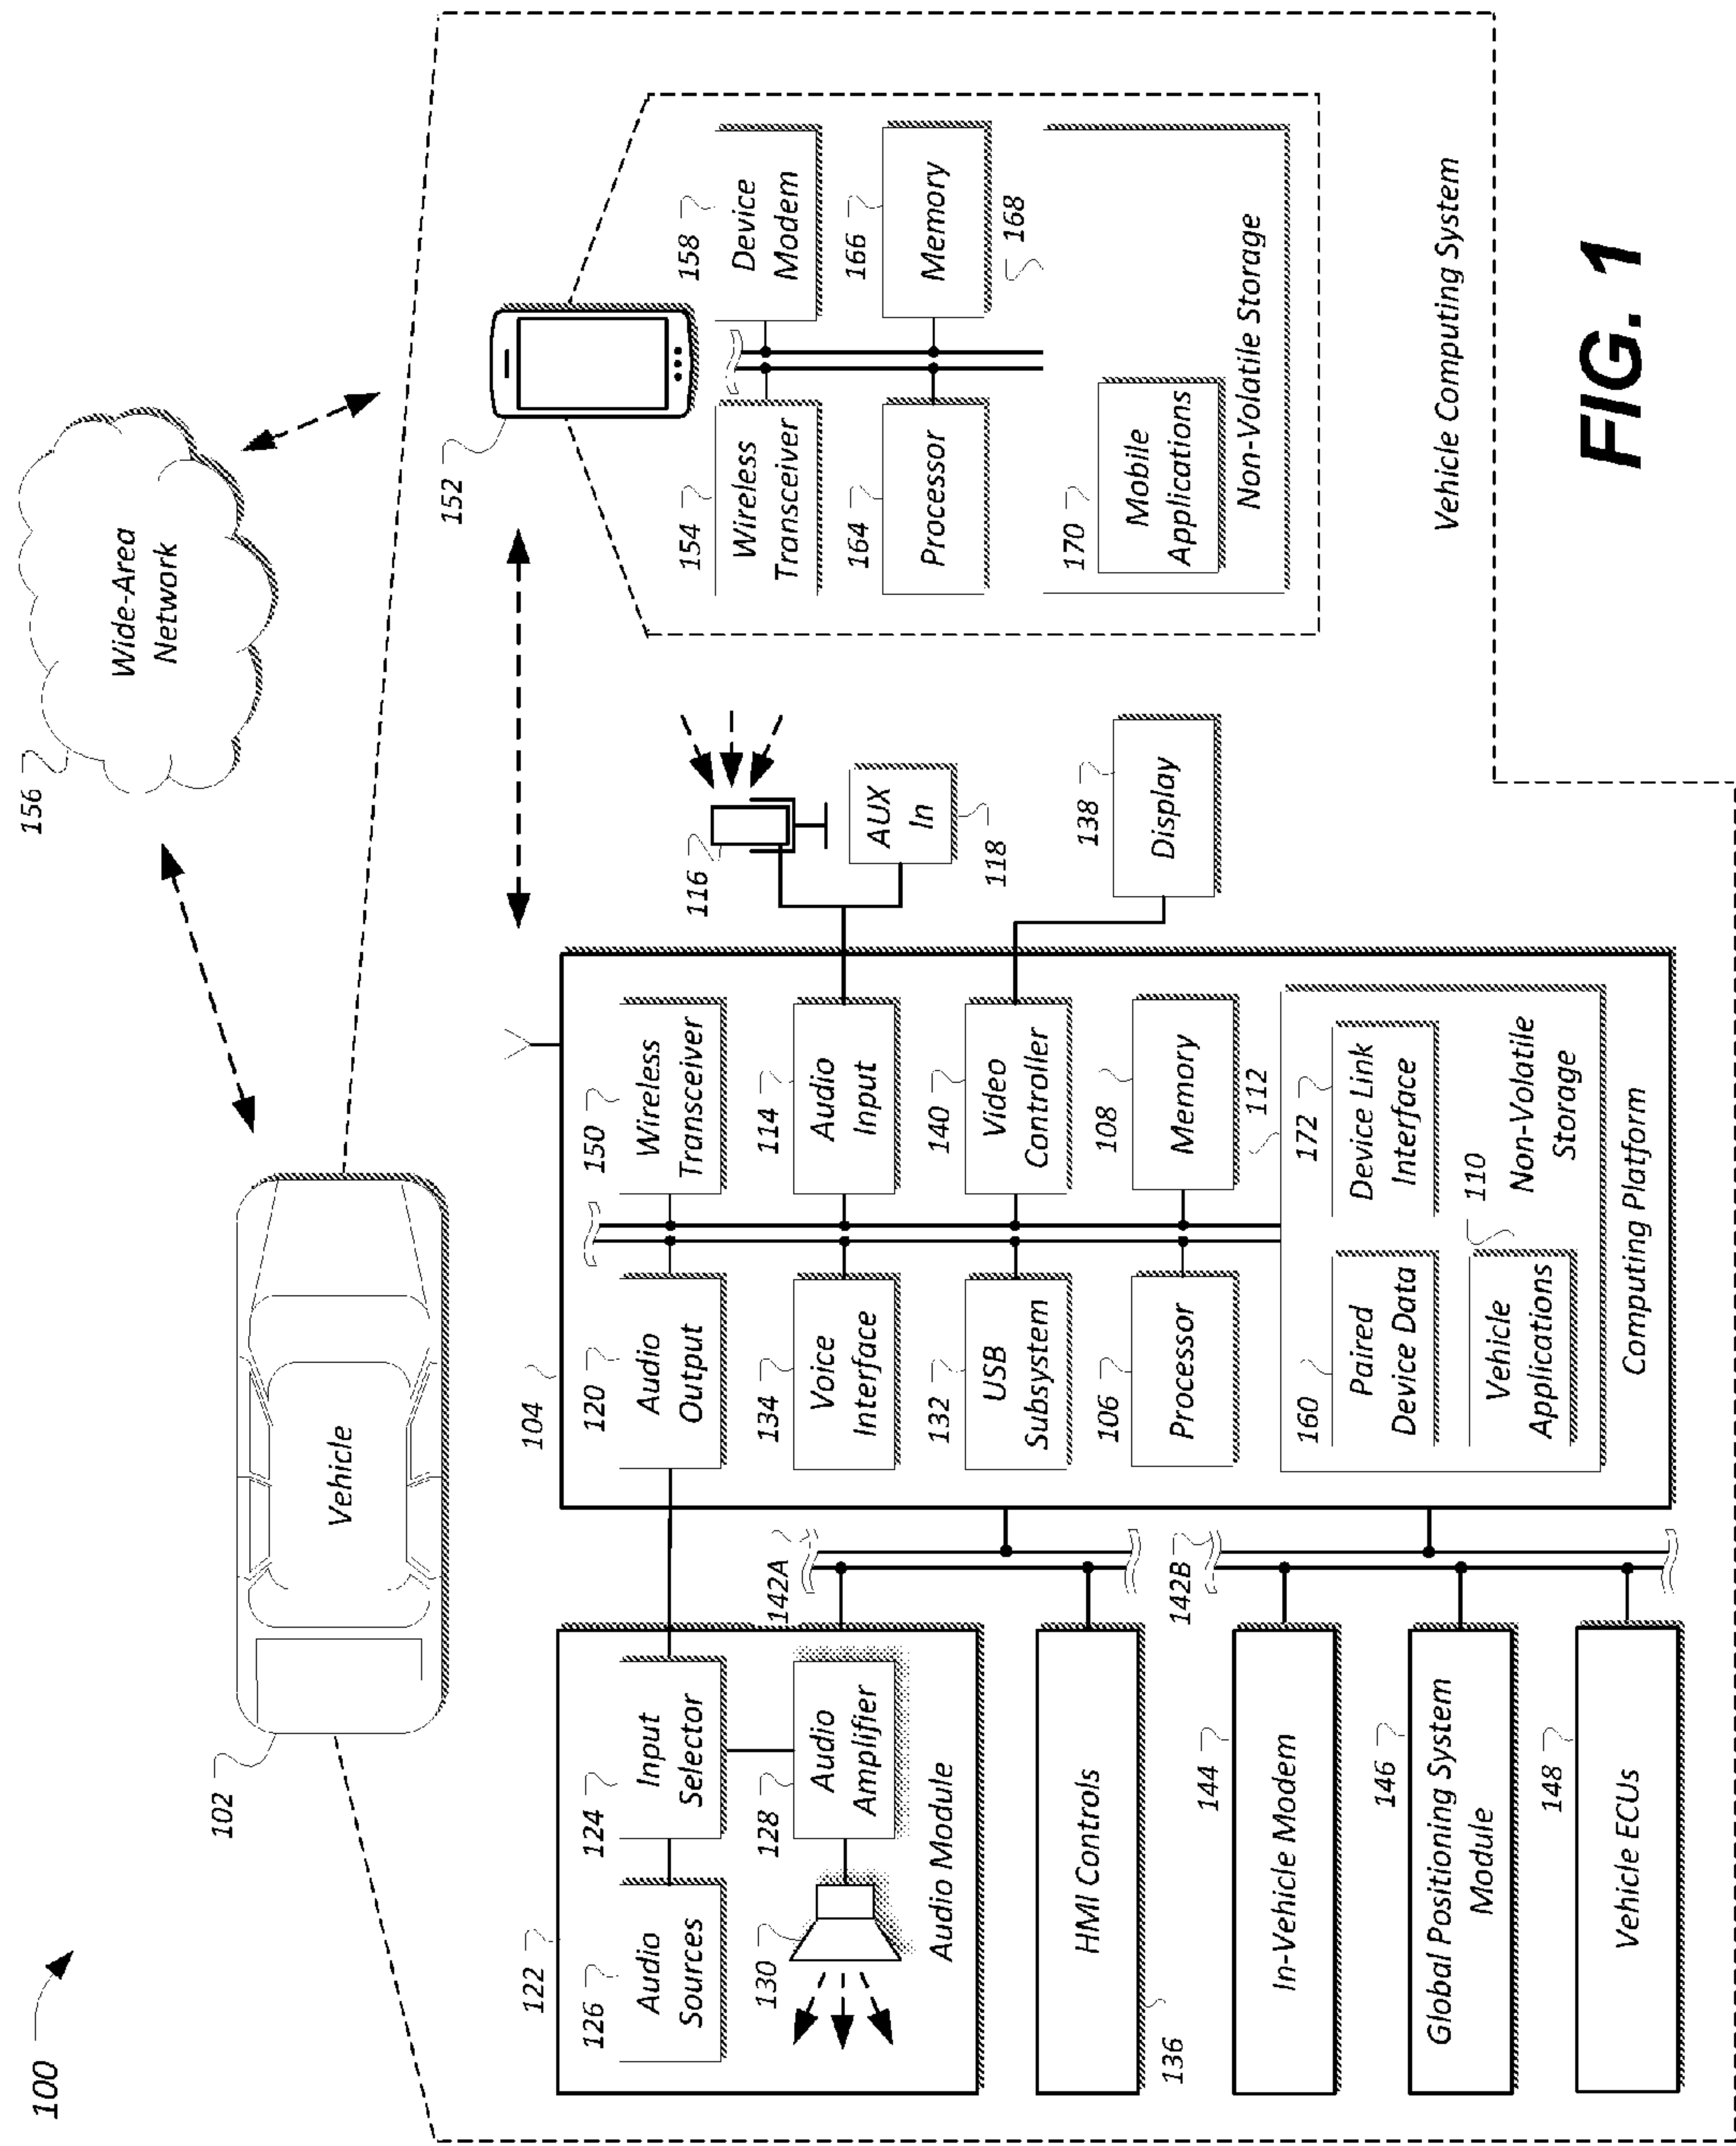

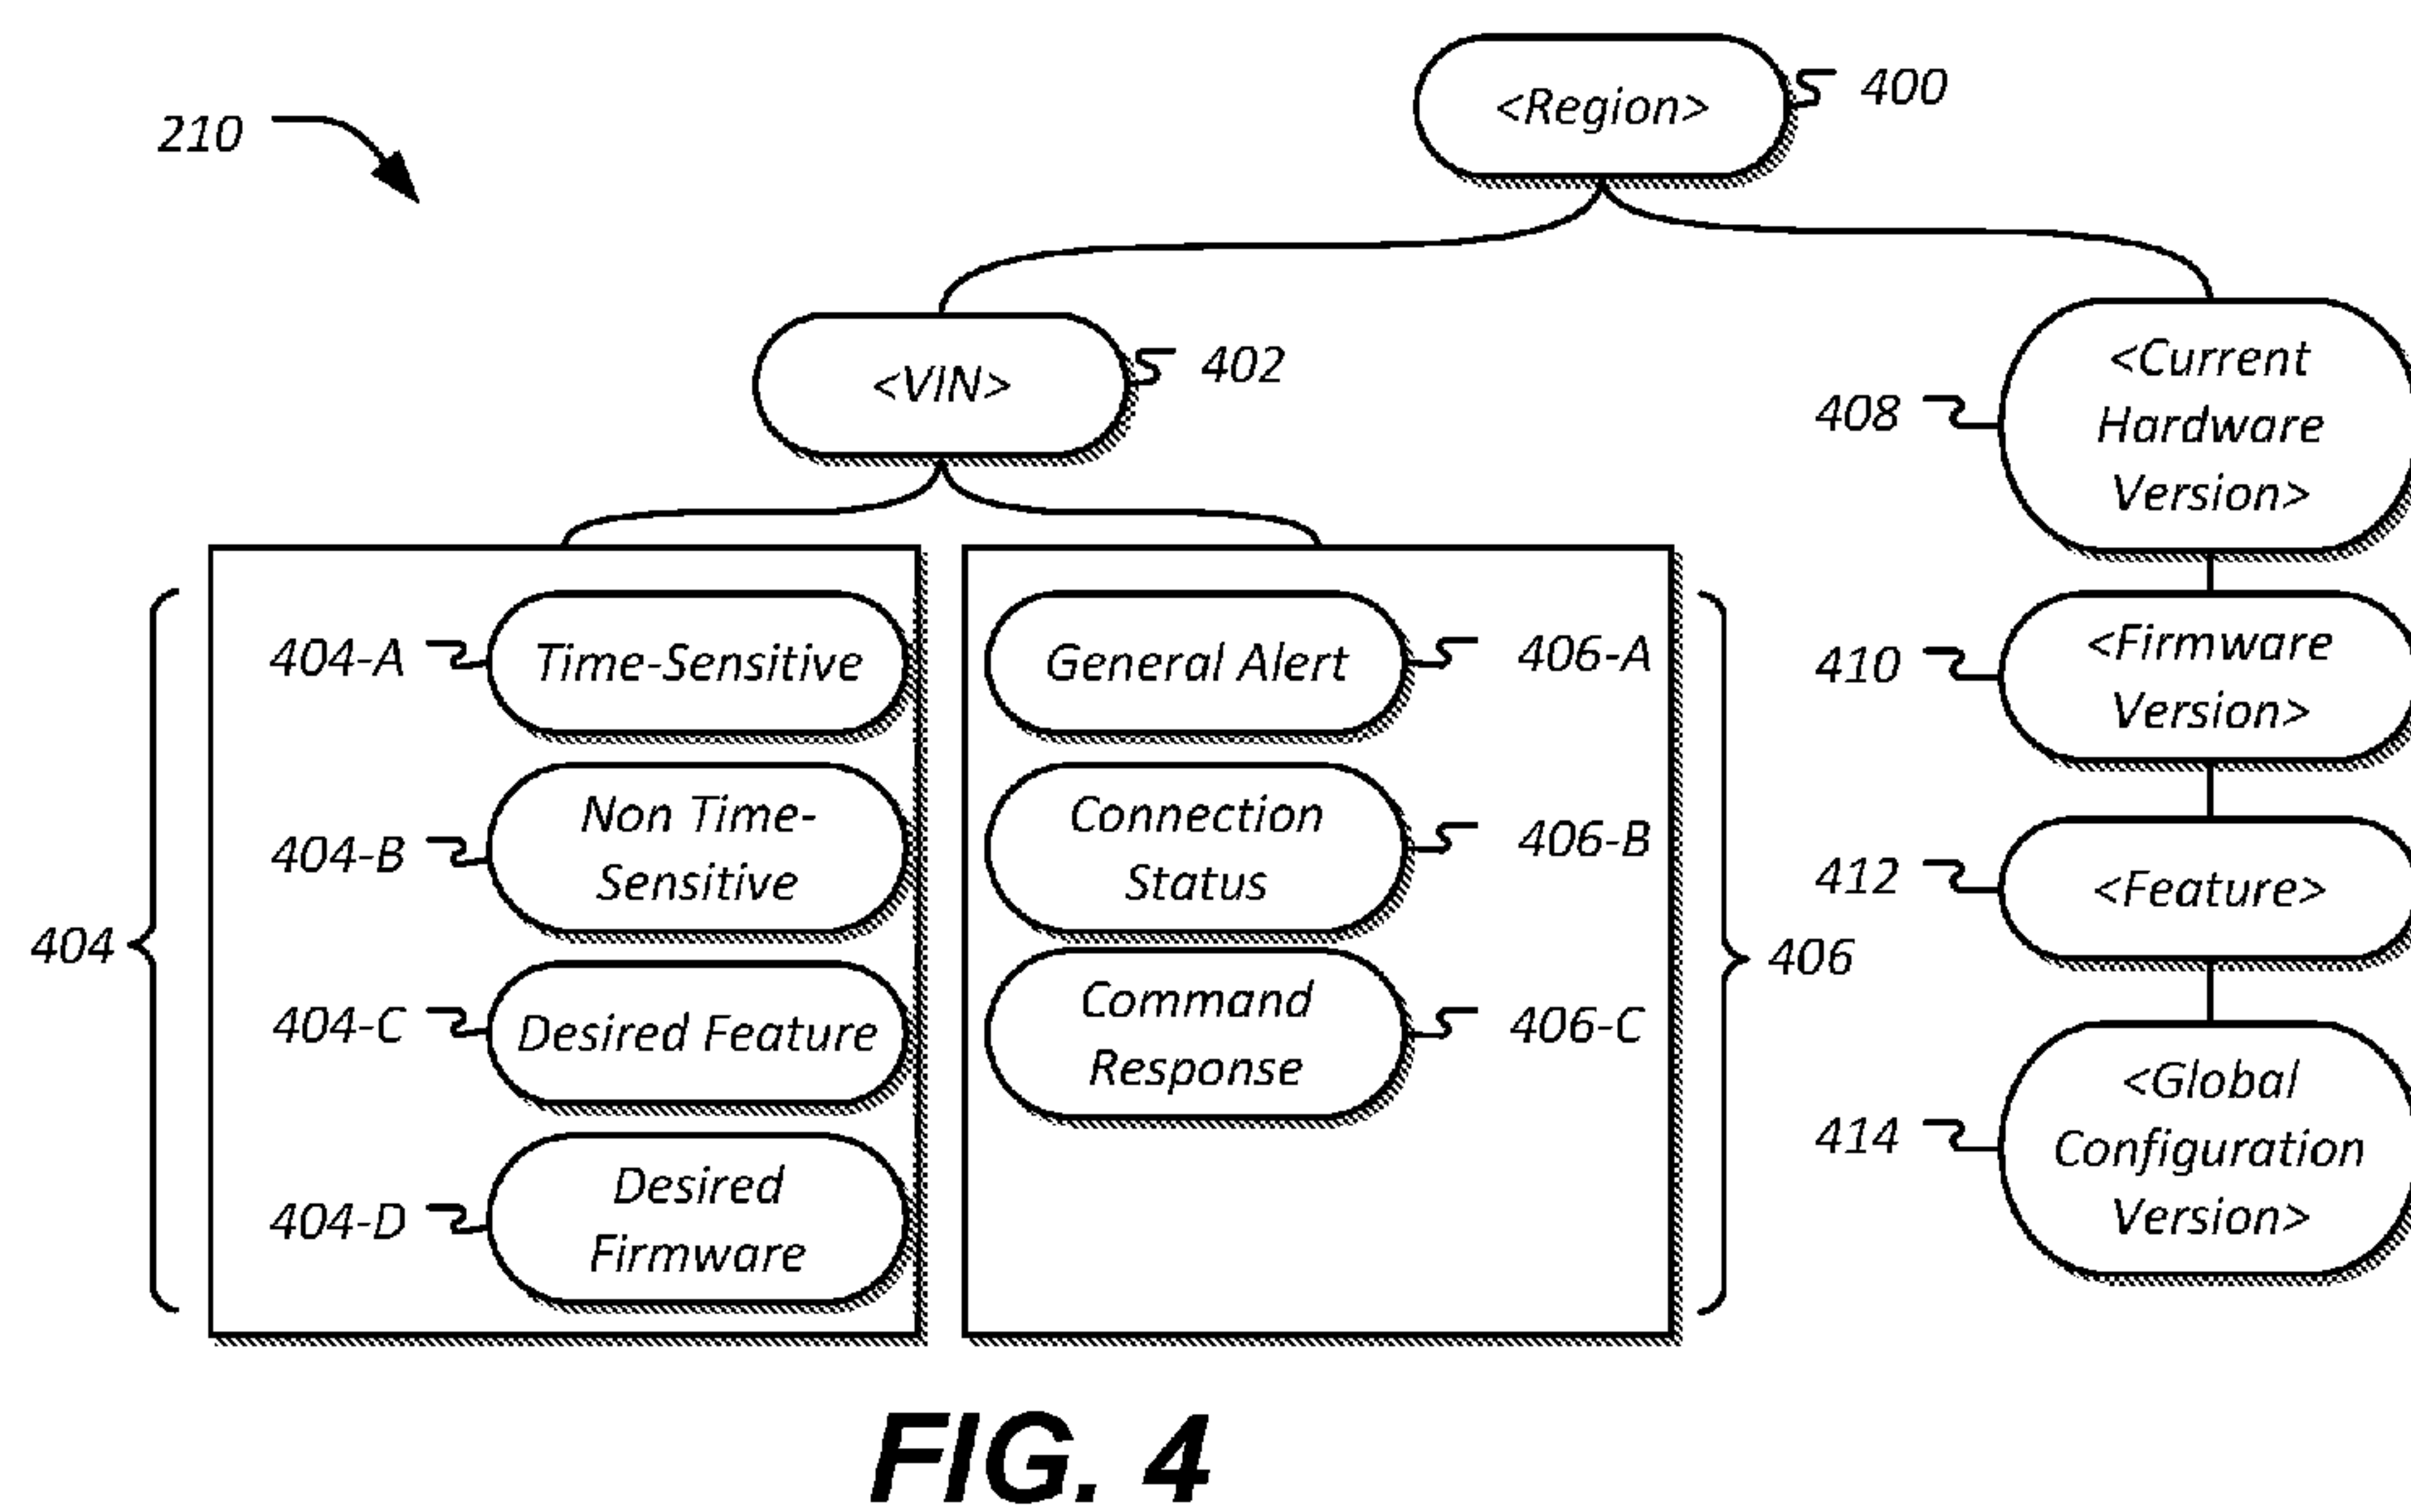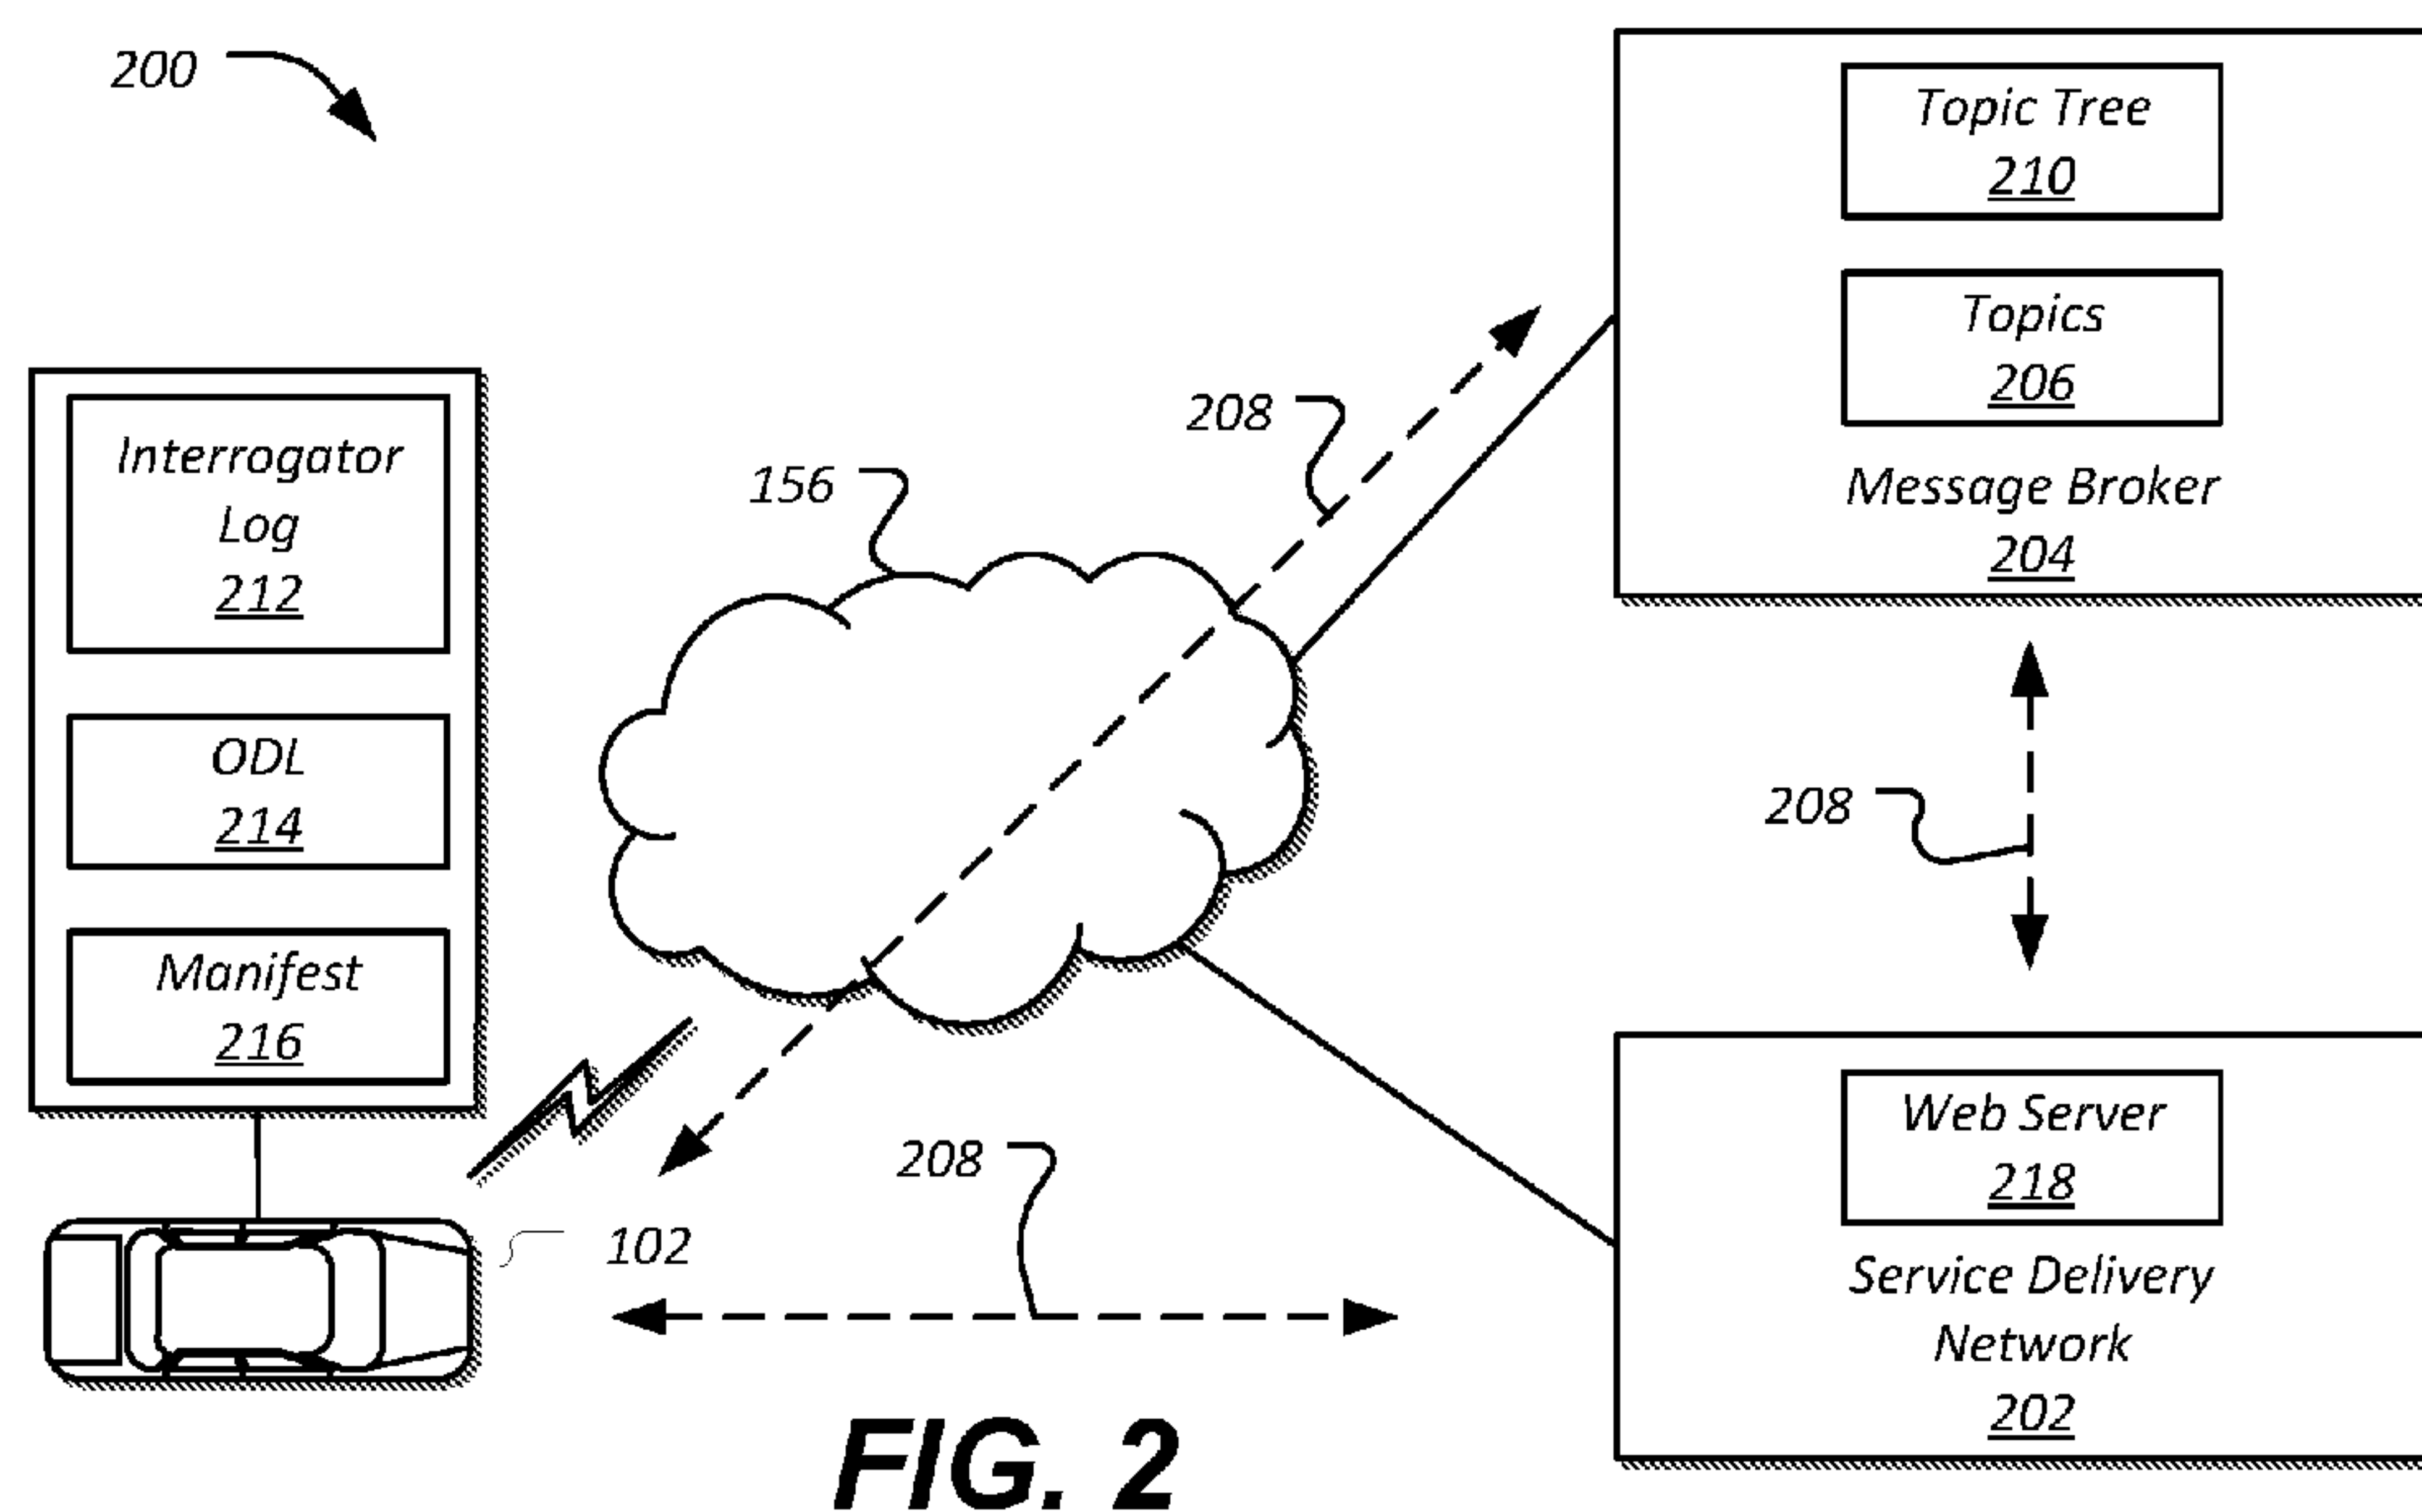

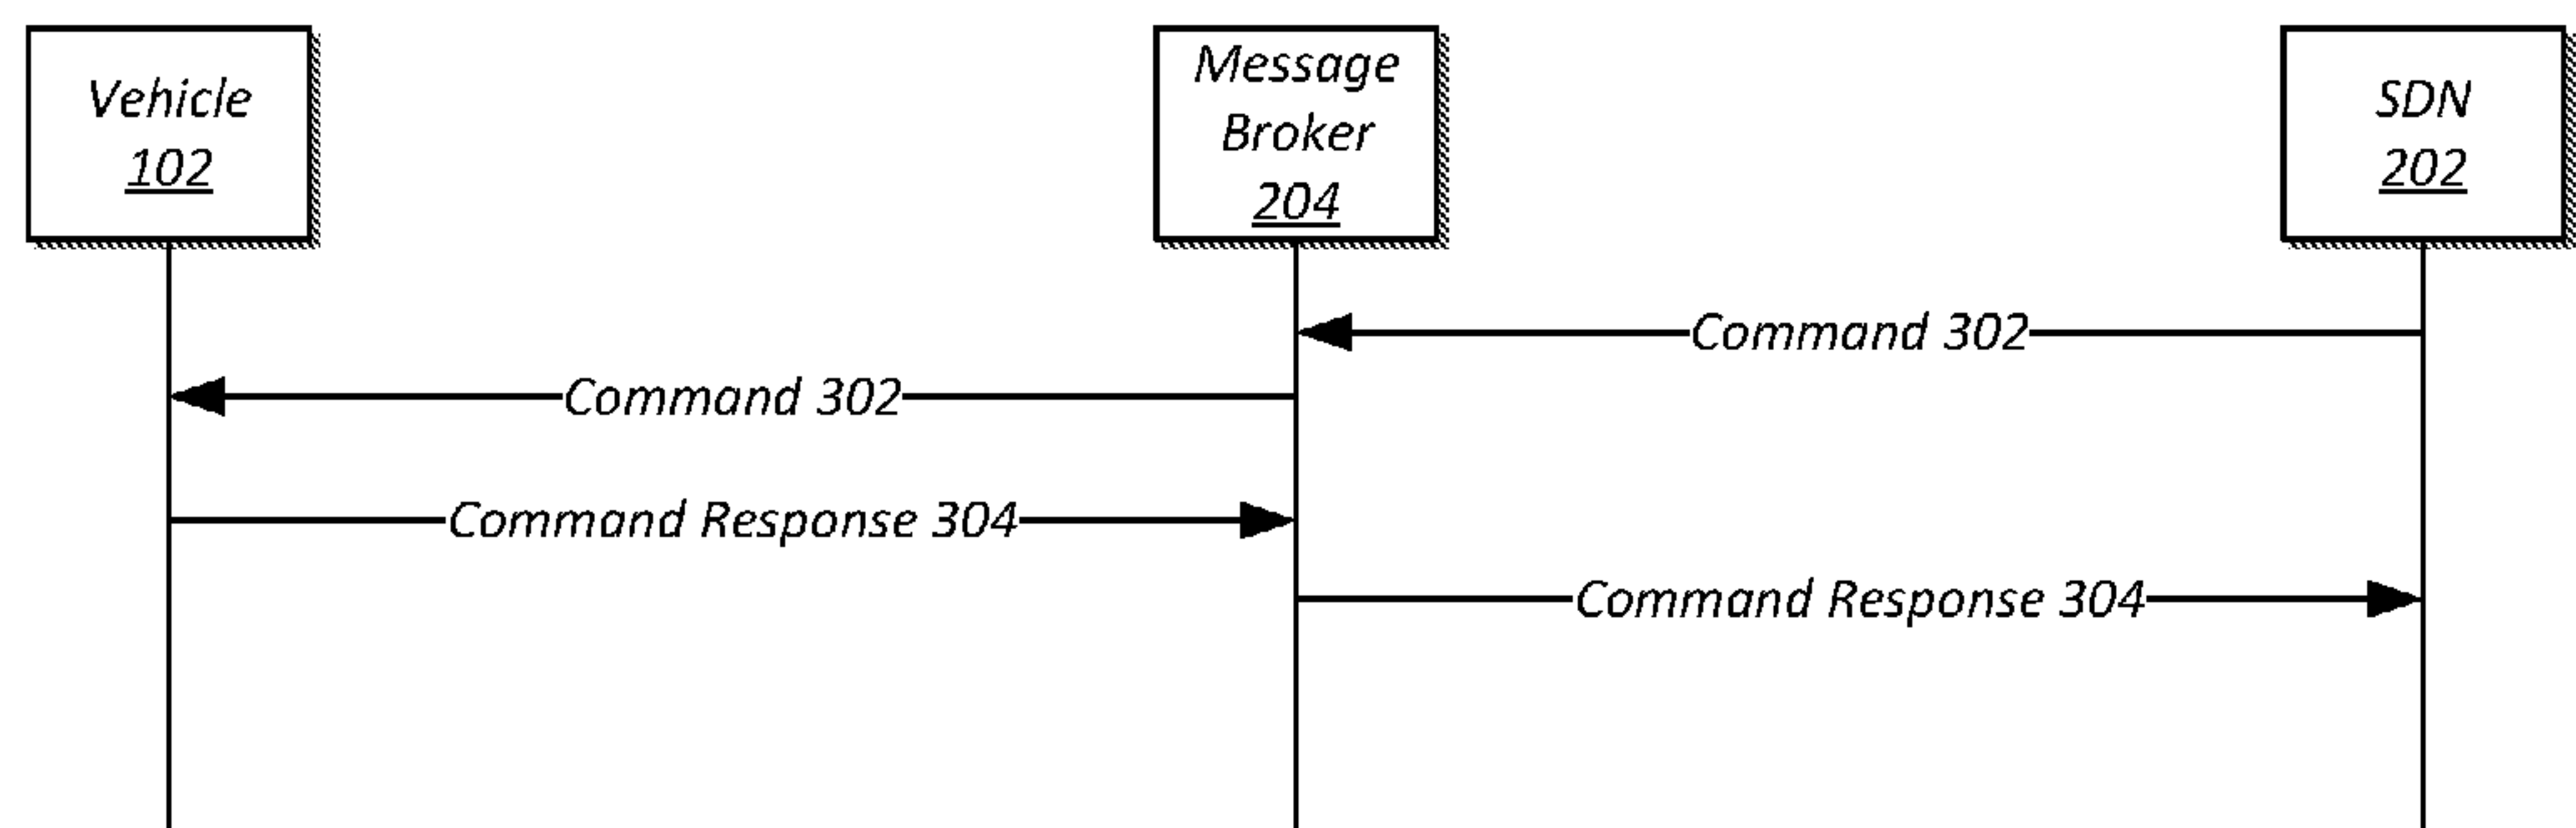


FIG. 3A

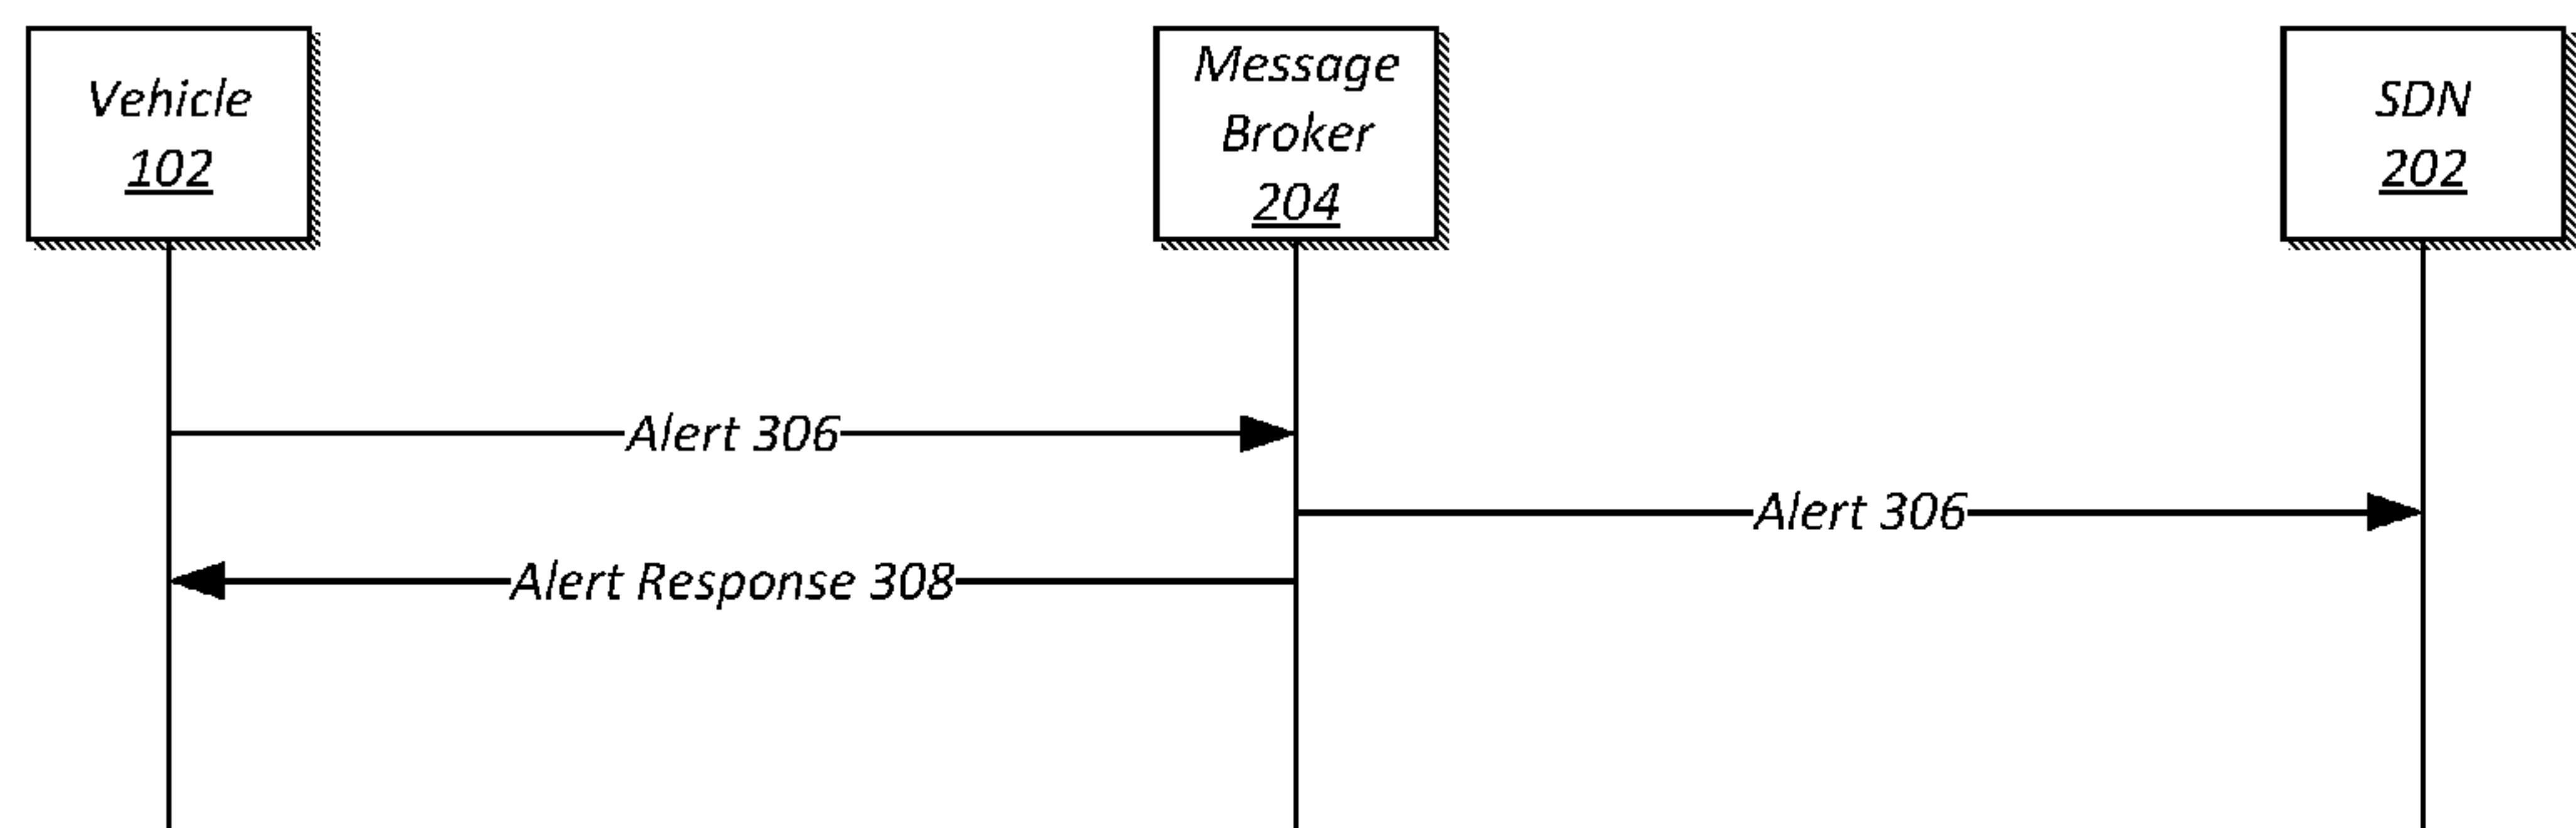


FIG. 3B

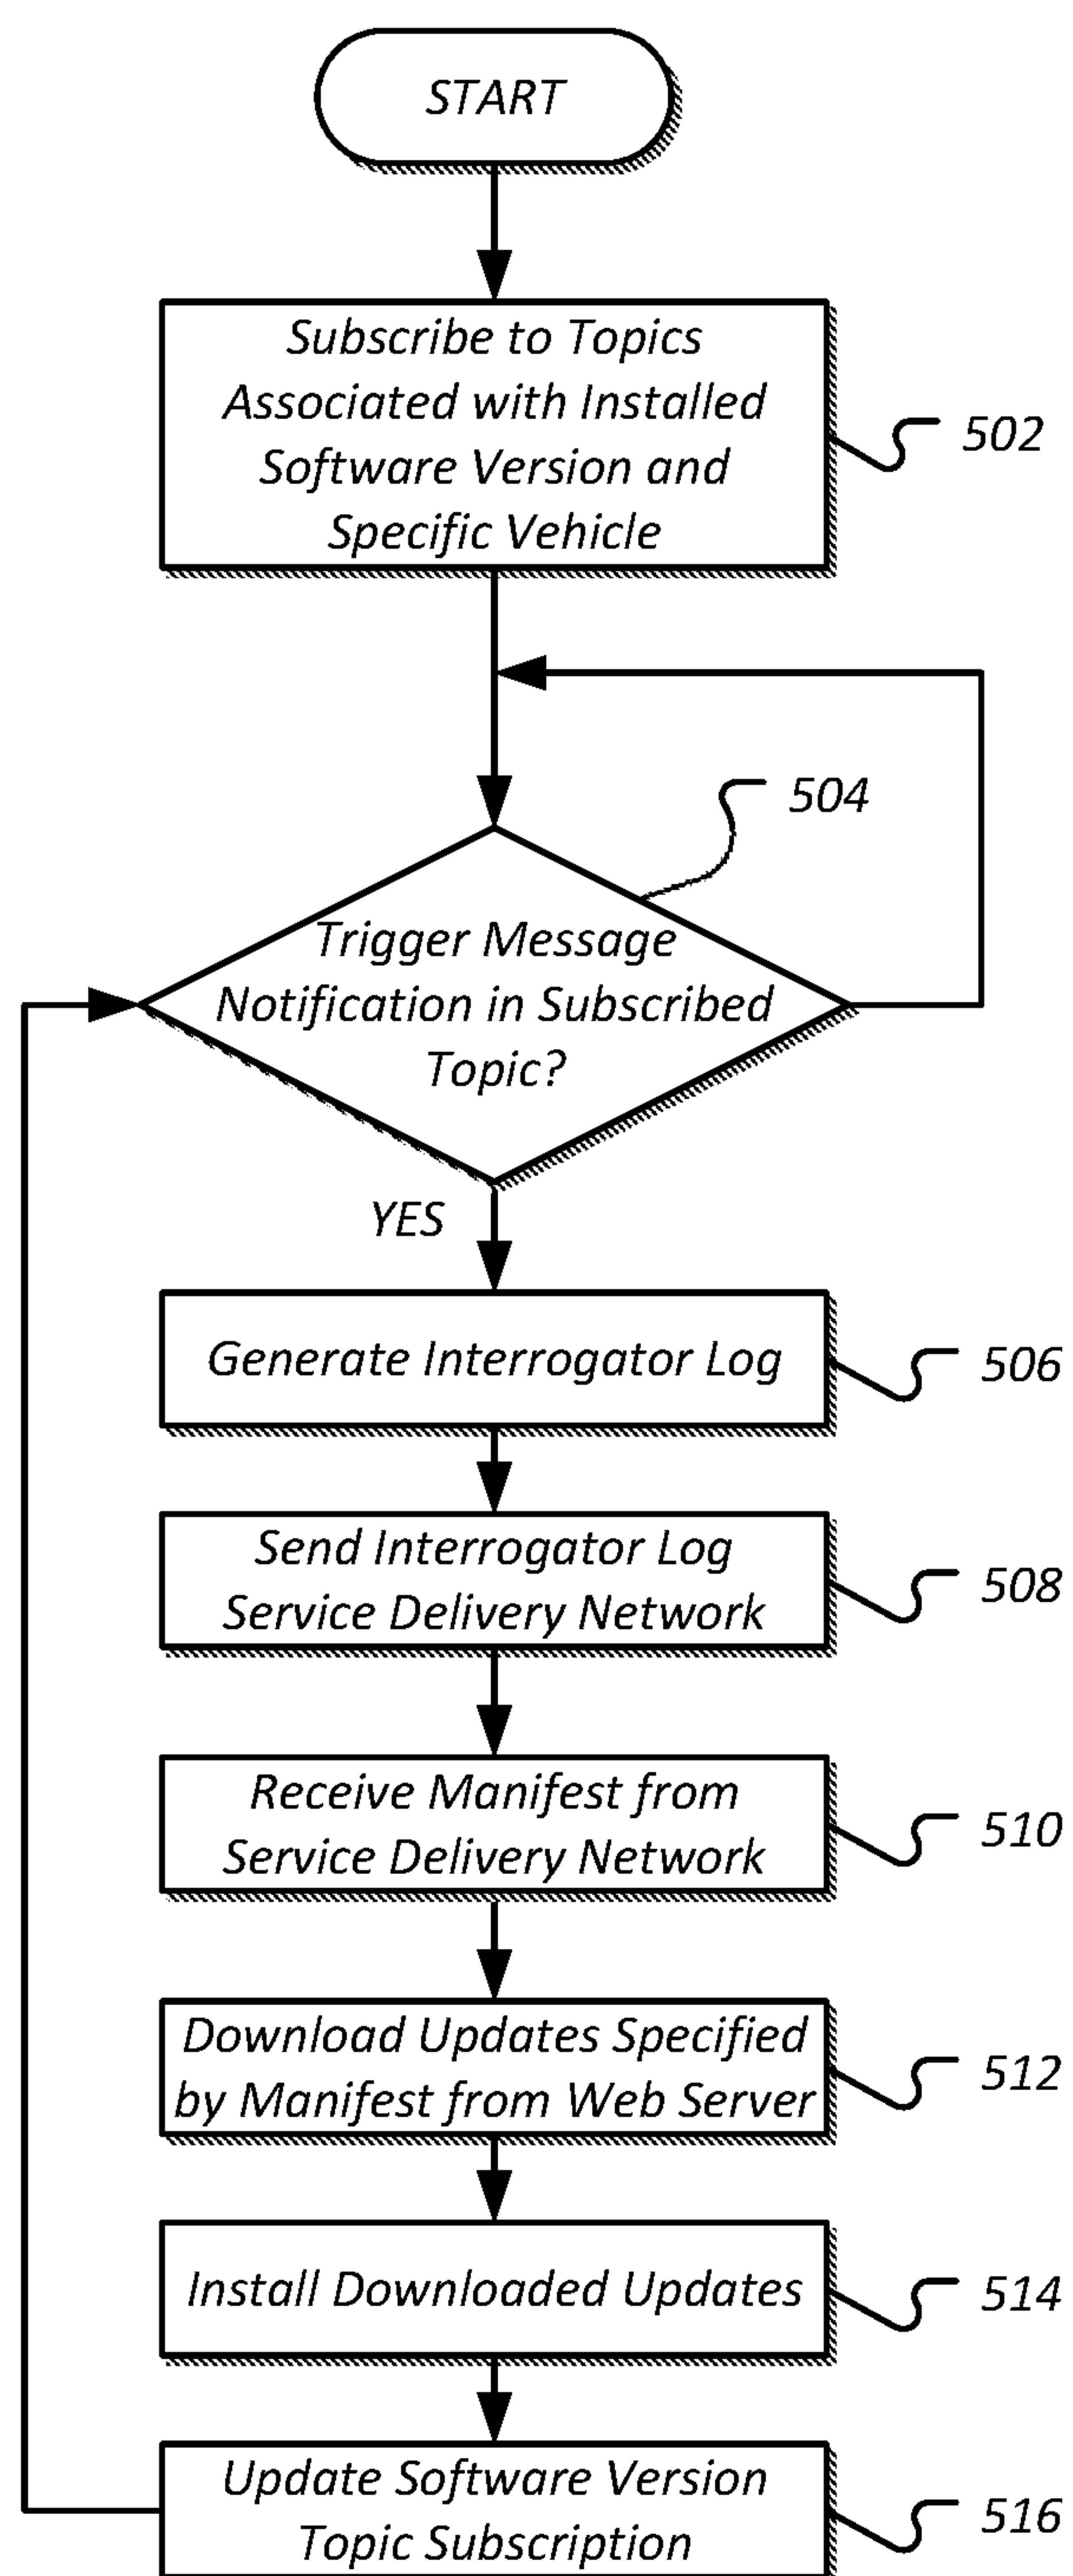


FIG. 5

OVER-THE-AIR TRIGGER TO VEHICLE INTERROGATOR UPDATES

TECHNICAL FIELD

[0001] The illustrative embodiments generally relate to a method and apparatus for performing over-the-air software updates responsive to a published over-the-air trigger to perform vehicle interrogation.

BACKGROUND

[0002] To update a software version of a component of a vehicle, the vehicle may be driven to a dealership and serviced by a technician. The technician may utilize a system that tracks the individual software levels of every component in the vehicle as well as available software updates. The technician may manually apply the software updates indicated by the system and record any changes back into the system.

[0003] Over-the-air (OTA) software updates are a technique by which software of a vehicle may be updated via a wireless connection. Using an embedded modem or other wireless data connection to the vehicle, OTA updates allow software changes on vehicle electronic control units (ECUs) without a dealership visit.

SUMMARY

[0004] In a first illustrative embodiment, a system includes a vehicle, subscribed to a topic maintained by a message broker and associated with the vehicle, including at least one controller programmed to send, to a service delivery network server, an interrogator log enumerating configuration information of the vehicle generated responsive to a trigger message published to the topic by the server, and retrieve a manifest indicating network locations of updates determined using the interrogator log.

[0005] In a second illustrative embodiment, a method includes receiving, by a vehicle processor, a message published by a service delivery network to a topic maintained by a message broker and associated with a vehicle indicating vehicle update availability; generating an interrogator log enumerating vehicle configuration information responsive to receiving the message; sending the interrogator log to the service delivery network; and retrieving, from the service delivery network, a manifest indicating network locations of updates determined using the interrogator log.

[0006] In a third illustrative embodiment, a non-transitory computer-readable medium includes instructions that when executed by a computing system of a vehicle cause the vehicle to retrieve a manifest of service delivery network locations for updates served by a web server, the updates selected based on a log having vehicle configuration information compiled by the vehicle computing system in response to receiving a message published to a vehicle-subscribed topic maintained by a message broker indicating vehicle update availability.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 illustrates an example block topology for a vehicle-based computing platform;

[0008] FIG. 2 illustrates an exemplary service delivery network in communication over the network with a vehicle having a configurable module;

[0009] FIGS. 3A and 3B illustrate exemplary communications flows of messages between the vehicle and the service delivery network via the message broker;

[0010] FIG. 4 illustrates an exemplary topic tree for use in vehicle-based computing platform to service delivery network communication; and

[0011] FIG. 5 illustrates an exemplary process for updating software of the computing platform.

DETAILED DESCRIPTION

[0012] As required, detailed embodiments of the present invention are disclosed herein; however, it is to be understood that the disclosed embodiments are merely exemplary of the invention that may be embodied in various and alternative forms. The figures are not necessarily to scale; some features may be exaggerated or minimized to show details of particular components. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a representative basis for teaching one skilled in the art to variously employ the present invention.

[0013] A software update system may utilize a publish/subscribe model to publish messages to and from vehicles. The publish/subscribe model may utilize topics, also known as logical channels, through which publishers may send messages and subscribers may receive messages. In some cases, a vehicle may be a publisher and may send vehicle alerts to a service delivery network, respond to commands from the service delivery network, or notify the service delivery network of vehicle connectivity status. In other cases, a vehicle may be a subscriber and may receive control messages or indications of available software updates from a service delivery network.

[0014] A topic tree structure may be utilized to define a structure of the topics and sub-topics used in sending messages between the vehicles and the service delivery network. A computing platform of the vehicle may subscribe to nodes of the topic tree that correspond to the installed software/firmware version of one or more modules included within the vehicle. These modules may include, as one example, a telematics unit (TCU).

[0015] A service delivery network may receive notification for a software update from a publisher. The notification may result in the service delivery network publishing a trigger notification message in a topic node corresponding to a vehicle to be updated or a version of the software to be updated. The service delivery network may further publish the software update binary to a web server at a web address specific to the update. The publisher may be a remote original equipment manufacturer (OEM) server or a third-party software provider.

[0016] The vehicle may generate an interrogator log based upon receipt of the trigger message notification in the topic tree indicating that updates are available. The interrogator log may include version information of at least one hardware or software module installed on the vehicle, and may be used to determine what modules to update. The interrogator log may include information compiled in accordance with a data identifier list defining what information to include in the interrogator log and where such information is located in the active software installation.

[0017] The vehicle may be configured to send the interrogator log to the service delivery network. In an example, the vehicle may send the interrogator log to an address of the

service delivery network over a secure hyper-text transport protocol (HTTPS) connection. The service delivery network may receive the interrogator log, and respond to the vehicle with a manifest based on the information included in the provided interrogator log. The manifest may indicate web server locations of at least one software update to be installed by the vehicle, and may be provided back to the vehicle over HTTPS.

[0018] Based on the manifest, the vehicle may be configured to install updated binaries and/or configurations retrieved from the specified web server locations. As the updates may be made available from the web server, the vehicles may be able to download the updates using resume functionality available from web server downloads. Moreover, as the interrogator log generation and upload is performed responsive to a service notification that updates are available, periodic polling by the vehicle for updates is avoided, thereby avoiding the resource use of periodically generating and uploading interrogator logs. Further aspects of the system are discussed in detail below.

[0019] FIG. 1 illustrates an example diagram of a system **100** that may be used to provide telematics services to a vehicle **102**. The vehicle **102** may be of various types of passenger vehicles, such as crossover utility vehicle (CUV), sport utility vehicle (SUV), truck, recreational vehicle (RV), boat, plane or other mobile machine for transporting people or goods. Telematics services may include, as some non-limiting possibilities, navigation, turn-by-turn directions, vehicle health reports, local business search, accident reporting, and hands-free calling. In an example, the system **100** may include the SYNC system manufactured by The Ford Motor Company of Dearborn, Mich. It should be noted that the illustrated system **100** is merely an example, and more, fewer, and/or differently located elements may be used.

[0020] The computing platform **104** may include one or more processors **106** connected with both a memory **108** and a computer-readable storage medium **112** and configured to perform instructions, commands, and other routines in support of the processes described herein. For instance, the computing platform **104** may be configured to execute instructions of vehicle applications **110** to provide features such as navigation, accident reporting, satellite radio decoding, and hands-free calling. Such instructions and other data may be maintained in a non-volatile manner using a variety of types of computer-readable storage medium **112**. The computer-readable medium **112** (also referred to as a processor-readable medium or storage) includes any non-transitory (e. g., tangible) medium that participates in providing instructions or other data that may be read by the processor **106** of the computing platform **104**. Computer-executable instructions may be compiled or interpreted from computer programs created using a variety of programming languages and/or technologies, including, without limitation, and either alone or in combination, Java, C, C++, C#, Objective C, Fortran, Pascal, Java Script, Python, Perl, and PL/SQL.

[0021] The computing platform **104** may be provided with various features allowing the vehicle occupants to interface with the computing platform **104**. For example, the computing platform **104** may include an audio input **114** configured to receive spoken commands from vehicle occupants through a connected microphone **116**, and auxiliary audio input **118** configured to receive audio signals from connected devices. The auxiliary audio input **118** may be a wired jack, such as a stereo input, or a wireless input, such

as a BLUETOOTH® audio connection. In some examples, the audio input **114** may be configured to provide audio processing capabilities, such as pre-amplification of low-level signals, and conversion of analog inputs into digital data for processing by the processor **106**.

[0022] The computing platform **104** may also provide one or more audio outputs **120** to an input of the audio playback functionality of the audio module **122**. In other examples, the computing platform **104** may provide audio output to the occupants through use of one or more dedicated speakers (not illustrated). The audio module **122** may include an input selector **124** configured to provide audio content from a selected audio source **126** to an audio amplifier **128** for playback through vehicle speakers **130**. The audio sources **126** may include, as some examples, decoded amplitude modulated (AM) or frequency modulated (FM) radio signals, and compact disc (CD) or digital versatile disk (DVD) audio playback. The audio sources **126** may also include audio received from the computing platform **104**, such as audio content generated by the computing platform **104**, audio content decoded from flash memory drives connected to a universal serial bus (USB) subsystem **132** of the computing platform **104**, and audio content passed through the computing platform **104** from the auxiliary audio input **118**.

[0023] The computing platform **104** may utilize a voice interface **134** to provide a hands-free interface to the computing platform **104**. The voice interface **134** may support speech recognition from audio received via the microphone **116** according to a grammar of available commands, and voice prompt generation for output via the audio module **122**. In some cases, the system may be configured to temporarily mute, fade, or otherwise override the audio source specified by the input selector **124** when an audio prompt is ready for presentation by the computing platform **104** and another audio source **126** is selected for playback.

[0024] The computing platform **104** may also receive input from human-machine interface (HMI) controls **136** configured to provide for occupant interaction with the vehicle **102**. For instance, the computing platform **104** may interface with one or more buttons or other HMI controls configured to invoke computing platform **104** functions (e.g., steering wheel audio buttons, a push-to-talk button, instrument panel controls, etc.). The computing platform **104** may also drive or otherwise communicate with one or more displays **138** configured to provide visual output to vehicle occupants by way of a video controller **140**. In some cases, the display **138** may be a touch screen further configured to receive user touch input via the video controller **140**, while in other cases the display **138** may be a display only, without touch input capabilities.

[0025] The computing platform **104** may be further configured to communicate with other components of the vehicle **102** via one or more in-vehicle networks **142**. The in-vehicle networks **142** may include one or more of a vehicle controller area network (CAN), an Ethernet network, or a media oriented system transfer (MOST), as some examples. The in-vehicle networks **142** may allow the computing platform **104** to communicate with other vehicle **102** systems, such as an vehicle modem **144** (which may not be present in some configurations), a global positioning system (GPS) module **146** configured to provide current vehicle **102** location and heading information, and various vehicle electronic control units (ECUs) **148** configured to

provide other types of information regarding the systems of the vehicle **102**. As some non-limiting possibilities, the vehicle ECUs **148** may include a powertrain controller configured to provide control of engine operating components (e.g., idle control components, fuel delivery components, emissions control components, etc.) and monitoring of engine operating components (e.g., status of engine diagnostic codes); a body controller configured to manage various power control functions such as exterior lighting, interior lighting, keyless entry, remote start, and point of access status verification (e.g., closure status of the hood, doors, and/or trunk of the vehicle **102**); a radio transceiver configured to communicate with key fobs or other local vehicle **102** devices; and a climate control management controller configured to provide control and monitoring of heating and cooling system components (e.g., compressor clutch and blower fan control, temperature sensor information, etc.).

[0026] As shown, the audio module **122** and the HMI controls **136** may communicate with the computing platform **104** over a first in-vehicle network **142A**, and the vehicle modem **144**, GPS module **146**, and vehicle ECUs **148** may communicate with the computing platform **104** over a second in-vehicle network **142B**. In other examples, the computing platform **104** may be connected to more or fewer in-vehicle networks **142**. Additionally or alternately, one or more HMI controls **136** or other components may be connected to the computing platform **104** via different in-vehicle networks **142** than shown, or directly without connection to an in-vehicle network **142**.

[0027] The computing platform **104** may also be configured to communicate with mobile devices **152** of the vehicle occupants. The mobile devices **152** may be any of various types of portable computing device, such as cellular phones, tablet computers, smart watches, laptop computers, portable music players, or other devices capable of communication with the computing platform **104**. In many examples, the computing platform **104** may include a wireless transceiver **150** (e.g., a BLUETOOTH® module, a ZIGBEE® transceiver, a Wi-Fi transceiver, etc.) configured to communicate with a compatible wireless transceiver **154** of the mobile device **152**. Additionally or alternately, the computing platform **104** may communicate with the mobile device **152** over a wired connection, such as via a USB connection between the mobile device **152** and the USB subsystem **132**.

[0028] The wide-area network **156** may provide communications services, such as packet-switched network services (e.g., Internet access, VoIP communication services), to devices connected to the wide-area network **156**. An example of a wide-area network **156** may include a cellular telephone network. Mobile devices **152** may provide network connectivity to the wide-area network **156** via a device modem **158** of the mobile device **152**. To facilitate the communications over the wide-area network **156**, mobile devices **152** may be associated with unique device identifiers (e.g., media access control (MAC) addresses, mobile device numbers (MDNs), Internet protocol (IP) addresses, mobile station international subscriber directory numbers (MSIS-DNs), international mobile subscriber identity (IMSI), etc.) to identify the communications of the mobile devices **152** over the wide-area network **156**. In some cases, occupants of the vehicle **102** or devices having permission to connect to the computing platform **104** may be identified by the computing platform **104** according to paired device data **160**

maintained in the storage medium **112**. The paired device data **160** may indicate, for example, the unique device identifiers of mobile devices **152** previously paired with the computing platform **104** of the vehicle **102**, secret information shared between the paired mobile device **152** and the computing platform **104** such as link keys, and/or personal identification numbers (PINs), and most recently used or device priority information, such that the computing platform **104** may automatically reconnect to the mobile devices **152** matching data in the paired device data **160** without user intervention. In some cases, the paired device data **160** may also indicate additional information or options related to the permissions or functionality of the computing platform **104** that the paired mobile device **152** is authorized to access when connected.

[0029] When a paired mobile device **152** that supports network connectivity is automatically or manually connected to the computing platform **104**, the mobile device **152** may allow the computing platform **104** to use the network connectivity of the device modem **158** to communicate over the wide-area network **156**. In one example, the computing platform **104** may utilize a data-over-voice connection over a voice call or a data connection of the mobile device **152** to communicate information between the computing platform **104** and the wide-area network **156**. Additionally or alternately, the computing platform **104** may utilize the vehicle modem **144** to communicate information between the computing platform **104** and the wide-area network **156**, without use of the communications facilities of the mobile device **152**.

[0030] Similar to the computing platform **104**, the mobile device **152** may include one or more processors **164** configured to execute instructions of mobile applications **170** loaded to a memory **166** of the mobile device **152** from storage medium **168** of the mobile device **152**. In some examples, the mobile applications **170** may be configured to communicate with the computing platform **104** or other locally-networked devices and with the wide-area network **156**.

[0031] The computing platform **104** may also include a device link interface **172** to facilitate the integration of functionality of the mobile applications **170** into the grammar of commands available via the voice interface **134**. The device link interface **172** may also provide the mobile applications **170** with access to vehicle features, such as information available to the computing platform **104** via the in-vehicle networks **142** or access to the display **138**. An example of a device link interface **172** may be the SYNC APPLINK component of the SYNC system provided by The Ford Motor Company of Dearborn, Mich.

[0032] FIG. 2 illustrates an exemplary diagram **200** of a service delivery network **202** in communication over the network **156** with a vehicle **102** by way of a message broker **204**. The vehicle **102** may be in wireless communication with the network **156** by way of the computing platform **104** of the vehicle **102**. When a vehicle **102** is assembled, the vehicle **102** may include various hardware and software components. Upon or after assembly, a computing platform **104** of the vehicle **102** may be configured to query for existence and version information for at least a portion of these hardware and software components of the vehicle **102**. Using the queried information and additional information identifying the specific vehicle **102** (e.g., vehicle identification number (VIN) information published on the car area

network (CAN) bus, subscriber identity module (SIM) information of the vehicle modem **144** such as international mobile station equipment identity (IMEI), etc.), the computing platform **104** may communicate via the network **156** and message broker **204** to establish an account with the service delivery network **202**. The service delivery network **202** may receive these communications from the vehicles **102**, and may maintain a data store of the hardware configurations and software (e.g., firmware, etc.) versions linked to identifiers of the vehicles **102**.

[0033] The message broker **204** may additionally provide publish/subscribe messaging functionality for communication between the service delivery network **202** and the vehicles **102**. The publish/subscribe model may utilize one or more topics **206**, where topics **206** are named logical channels through which publishers may send messages **208** and subscribers may receive messages **208**. Rather than receiving all the messages **208**, subscribers to the topics **206** receive the messages **208** published to the topics **206** to which they subscribe, and all subscribers to a topic **206** will receive substantially the same topic messages **208**.

[0034] FIGS. 3A and 3B illustrate exemplary communications flows of messages **208** between the vehicle **102** and the service delivery network **202** via the message broker **204**. Messages **208** may be of various categories, such as commands **302**, command responses **304**, and alerts **306**.

[0035] As shown in FIG. 3A, a command **302** may be published by the service delivery network **202** to a topic of the message broker **204** that is subscribed to by vehicle **102**. A command **302** is a type of message **208** that requests a recipient of the command **302** to perform an action specified by the command **302**. A command response **304** is a message **208** provided back to a sender responsive to receipt of a command **302**. The response **304** to the command **302** may be published by the vehicle **102** to a topic **206** subscribed to by the service delivery network **202**.

[0036] As shown in FIG. 3B, an alert **306** may be published by the vehicle **102** to a topic of the message broker **204** subscribed to by the service delivery network **202**. An alert **306** is a type of message **208** providing information from a sender to a recipient, without requesting the performance of a particular action. Responsive to the alert **306**, the message broker **204** may publish an alert response **308** to the vehicle **102**, as the service delivery network **202** is not required to provide a response to the alert **306**.

[0037] A publisher of the messages **208** may be responsible for providing messages **208** to the topics **206** that are consistent with the topic **206**. The publisher may include, for example for commands **302**, an OEM or other entity responsible for maintaining and/or updating vehicle software/firmware. In some cases, a vehicle **102** may be a publisher and may send vehicle alerts **306** to a topic **206** subscribed to by the service delivery network **202**, may use alerts **306** to notify the service delivery network **202** of vehicle **102** connectivity status to the network **156**, or may respond to messages **208** from the service delivery network **202** with command responses **304**. In other cases, a vehicle **102** may be a subscriber and may receive commands **302** or other information from a service delivery network **202** via the message broker **204**.

[0038] The messages **208** may utilize a name/value pair model allowing for data elements of the messages **208** to be defined and referenced by vehicles **102** and the service delivery network **202** by name. Each message **208** may

include certain base fields present in all messages **208**. Moreover, each category of message **208** may include a certain minimum set of data elements present in all messages **208** of that category. For example, alerts **306** or other messages **208** from the vehicle **102** to the service delivery network **202** may include a first set of common information useful for recipients of messages **208** from vehicles, and commands **302** or other messages **208** from the service delivery network **202** to the vehicle **102** may include a second set of common information useful for recipients of messages **208** from the service delivery network **202**.

[0039] Depending on the type of the message **208** (e.g., the type of command **302**), the message **208** may further include additional fields relevant to that specific message type **208**. To do so, the name/value pair model may allow for subsets of data to be defined (e.g., information to include in messages **208** from vehicles **102**, information to be included in messages **208** from the service delivery network **202**, information describing the status of the vehicle **102**, etc.) which may then be included in message **208** definitions without requiring redundant redefinition for each type of message **208** requiring the common information. Further, since the fields of the message **208** may be referenced by the vehicles **102** and service delivery network **202** by name or identifier (rather than by raw byte offset into the message **208**), the system may allow for the addition of data elements to the message **208** definitions (or to the common information definitions) without undesirably affecting deployed vehicles **102** that implement communication with the service delivery network **202** utilizing a previous version of the message **208** definitions.

[0040] With respect to the processing of the various categories of messages **208** published to the topics **206**, the vehicle **102** may be configured to execute commands **302** that it receives from the service delivery network **202** in the order in which the commands **302** were received. To do so, the vehicle **102** may be configured to maintain a command queue of received commands **302**, to allow the vehicle **102** to execute the received commands **302** from the queue in a first-in-first-out (FIFO) manner. The vehicle **102** may also be configured to execute alerts **306** in the order they take place on vehicle **102** side. To do so, the vehicle **102** may be configured to maintain an alert queue so that it may execute the alerts **306** from the queue in a last-in-first-out (LIFO) manner. In the case of a conflict between a command **302** and an alert **306**, the vehicle **102** may be configured to execute the messages **208** in the order they are received from the service delivery network **202** or took place on the vehicle **102** based on time stamps of the messages **208**.

[0041] The topics **206** may be utilized to allow the messages **208** to be published to or from the appropriate vehicles **102** and in the proper category of message **208**. To facilitate the publishing of messages **208** to appropriate topics **206**, the topics **206** may be arranged into a topic tree **210**. The topic tree **210** may be defined by the service delivery network **202** to provide a structure of the topics **206** and sub-topics **206** that are used in sending messages **208** between the vehicles **102** and the service delivery network **202**.

[0042] FIG. 4 illustrates an exemplary topic tree **210** for use in vehicle **102** to service delivery network **202** communication. A computing platform **104**, such as a telematics unit of a vehicle **102**, may subscribe to nodes of the topic tree **210** that correspond to the installed region, software/

firmware version, features, configuration file version of the vehicle **102**, etc. It should be noted that the particular layout of the exemplary topic tree **210** is for purpose of illustration only, and other layouts of topic tree **210** may be used. For example, other topic trees **210** may be used by the service delivery network **202** that have more, fewer, or different levels of categorization.

[0043] Referring to the topic tree **210** of FIG. 4, a region node **400** of the topic tree **210** may indicate a region for which the sub-topic **206** nodes under the region node **400** may relate. In some cases, the region nodes **400** may represent different regional market areas in which vehicles **102** may be sold, such as North America, Europe, and Asia Pacific. In other examples, the region nodes **400** may relate to other geographical areas, such as countries, states, postal codes, and telephone area codes. By segmenting the topic tree **210** by region, the service delivery network **202** may accordingly publish different information for vehicles **102** associated with different regions.

[0044] Under each region node **400**, the topic tree **210** may include one or more vehicle-specific nodes **402**, where each vehicle-specific node **402** relates to a vehicle **102** associated with the parent region node **400**. As one possibility, the service delivery network **202** may create vehicle-specific nodes **402** for vehicles **102** according to VIN or other unique identifier of vehicles **102** that register with the service delivery network **202** as belonging to the particular region. Sub-nodes to the vehicle-specific nodes **402** may be used to further organize topics **206** configured for communication to and from the individual vehicles **102**.

[0045] For instance, under the vehicle-specific nodes **402**, the topic tree **210** may further include one or more vehicle topic nodes **404** for communication to the specific vehicles **102**. A vehicle **102** may subscribe to the vehicle topic node **404** that correspond to the VIN or other unique identifier of the vehicle **102**, so that the vehicle **102** may be able to receive messages **208** in topics **206** that specifically relate to the vehicle **102** itself.

[0046] As one example, a vehicle **102** may subscribe to a time-sensitive update vehicle topic node **404-A** for receiving messages **208** (such as time-sensitive commands **302** as discussed in more detail below) for the particular vehicle **102** that are of a time-sensitive nature. Due to their time-sensitive nature, messages **208** posted to the time-sensitive update vehicle topic node **404-A** may time out and be removed from the topic **206** if they are not received by the vehicle **102** within an amount of time (e.g., an amount of time specified by the message **208**, an amount of time common to all time-sensitive messages **208**, etc.). As another example, a vehicle **102** may subscribe to a non-time-sensitive vehicle topic node **404-B** for receiving messages **208** for the particular vehicle **102** that are not of a time-sensitive nature (e.g., non-time-sensitive commands **302**, also discussed in more detail below).

[0047] Updates, such as calendar updates, may be posted to the non-time-sensitive vehicle topic node **404-B**, and may remain in the topic **206** until received by the subscribed vehicle **102**. As a further example, a vehicle **102** may subscribe to a feature update vehicle topic node **404-C** for receiving messages **208** in a topic **206** directed to particular vehicles **102** and relating to updates to the features of the vehicle **102**. In this content, a feature may refer to a grouping of configuration parameters applicable to the specified vehicle **102** included in the topic tree **210**. A feature may, for

example, represent settings to implement an available connected service (e.g., MY FORD MOBILE®) or a customer-specific collection of settings (e.g., a suite of features requested to be enabled and/or disabled for use by a particular fleet purchaser). As yet a further example, a vehicle **102** may subscribe to a firmware update vehicle topic node **404-D** for receiving messages **208** in a topic **206** directed to particular vehicles **102** and relating to updates to the firmware of the vehicle **102**.

[0048] The vehicle-specific nodes **402** of the topic tree **210** may further include one or more vehicle topic nodes **406** for communication from the specific vehicles **102** (e.g., to the service delivery network **202**). For example, a general alert topic node **406-A** may be used by a vehicle **102** to publish messages **208** (e.g., alerts **306**) such as indications of low fuel, erratic driving by the vehicle **102**, or periodic current vehicle **102** GPS locations. As another example, a connection status topic node **406-B** may be used by a vehicle **102** to publish messages **208** such as the connection status of the vehicle **102** (e.g., alerts **306** indicating whether the vehicle **102** was disconnected and then reconnected to the network **156**). As yet a further example, a command response alert topic node **406-C** may be used by a vehicle **102** to publish messages **208** such as alerts **306** indicating success or failure of command **302** requested by the service delivery network **202**.

[0049] Moreover, under each region node **400** the topic tree **210** may include one or more hardware version topic nodes **408**, where each hardware version topic node **408** relates to a installed vehicle **102** hardware version that may be shared by multiple vehicles **102** (e.g., a version of the computing platform **104** hardware). These hardware version topic nodes **408** and sub-topic nodes may accordingly be used to reference the vehicles **102** according to hardware version, not according to individual vehicle **102**.

[0050] Under each hardware version topic node **408**, the topic tree **210** may include one or more firmware version nodes **410**. Each firmware version node **410** may organize nodes of the topic tree **210** associated with a firmware version that may be installed on the parent tree relationship vehicle **102** hardware for a particular region.

[0051] The firmware version node **410** may further include feature nodes **412** organizing nodes of the topic tree **210** associated with a particular feature. As mentioned above, a feature may represent settings to implement an available connected service or a customer-specific collection of settings. Thus, a firmware version may support multiple different features, where different portions of functionality of the firmware are engaged or disengaged for the various features.

[0052] The feature nodes **412** may further include configuration version nodes **414**, each representing a topic **206** related to a version of a configuration file for the associated feature, firmware version, hardware version, and region. The configuration files may include setting and other information related to the parent features that they configure (e.g., for the version of firmware installed on the version of hardware for the particular region). Because settings and other options may change from version to version, the configuration files may also include a version number of the firmware for which they are compatible.

[0053] A vehicle **102** may subscribe to topics of **206** the topic tree **210** that relate to the configuration of the vehicle **102**. As one example, a vehicle may subscribe to a vehicle

topic node **404** corresponding to the VIN of the vehicle **102**, to receive any updates targeting the specific vehicle **102**. As another example, a computing platform **104** of a vehicle **102** may subscribe to a configuration version node **414** of the topic tree **210**, to receive configuration or other updates corresponding to the installed region, hardware version, firmware version, feature, and global configuration version of the vehicle **102**. The subscribed vehicle **102** may check or otherwise be informed of messages **208** published to the subscribed topics **206**.

[0054] The service delivery network **202** may publish messages **208** into topics **206** of the topic tree **210** for which updates are to be performed. As one possibility, the service delivery network **202** may publish a command **302** into a vehicle topic node **404** to cause a particular vehicle **102** to be informed that an update should be performed for the vehicle **102**. As another possibility, the service delivery network **202** may publish a command **302** into a configuration version node **414** to cause any subscribed vehicles **102** having a particular region, hardware version, firmware version, feature, and global configuration version to perform an update.

[0055] Referring back to FIG. 2, a user of the vehicle **102** may opt into software updates being performed by the vehicle **102**. To facilitate the opt-in process, in some examples the computing platform **104** may provide a prompt to the user via the display **138** and/or audio module **122** requesting the user's authorization. An exemplary prompt may request the user to consent to over-the-air updates to be performed via the in-vehicle modem **144** (or via WiFi or through a data connection of a connected mobile device **152**). The consent may be requested once, but utilized across multiple update cycles. As another possibility, the user may opt into over-the-air updates using a mobile device **152** paired or otherwise associated with the vehicle **102** (e.g., by providing consent via a mobile application executed by the mobile device **152**, via sending a short message service (SMS) message from the mobile device **152** to a specific number, by use of an authorization webpage accessible from the mobile device **152**, etc.).

[0056] Once authorized (e.g., by way of receiving button presses or spoken dialog from the user), the computing platform **104** may be configured to query for software updates of the vehicle ECUs **148**. This querying may be performed silently, without requiring user input.

[0057] The computing platform **104** may be configured to collect information related to the modules of the vehicle **102**. The process of collecting data may be referred to as interrogation, and the collected data may be referred to as an interrogator log **212**. The information to interrogate may include, as some non-limiting examples, module name, module serial number, VIN, hardware part number, MAC address, part numbers of software applications, languages, and service packs installed on the module, available storage space on the module, and status information regarding the installation of previous updates.

[0058] The computing platform **104** may be further configured to determine what information to collect by use of an optimized data identifier list (ODL) file **214** defining the specific information to interrogate and where such information may be located. Notably, the information to collect may include data elements from the vehicle ECUs **148** or other controllers of the vehicle **102**, and may be retrieved via the controller area network (CAN) or other vehicle **102** com-

munication architecture supporting data transfer between controllers. The information may also include diagnostic codes and other vehicle state information that may be collected during vehicle **102** servicing by a dealer. The information may also include analytics data including usage and logging data providing insight into usage of various vehicle features. In some cases, the ODL file **214** may be installed as part of an installation of software on the computing platform **104**, while in other cases the ODL file **214** may have been previously received according to earlier performed updates (described in greater detail below). As yet a further example, the computing platform **104** may be configured to publish an ODL request to a vehicle-specific topic **206** of the message broker **204** (e.g. the general alert topic **406-A**), and receive an ODL **214** file published in response defining what information to interrogate for the particular VIN.

[0059] The computing platform **104** may be configured to send the interrogator log **212** to the service delivery network **202**. In an example, the computing platform **104** may send the interrogator log **212** to the service delivery network **202** via HTTPS (e.g., by connection of the computing platform **104** to a predefined web address of the service delivery network **202** known to the computing platform **104**). Variations on sending the interrogator log **212** to the service delivery network **202** are possible. As another example, the computing platform **104** may be configured to publish the interrogator log **212** to a topic **206** of the message broker **204** specific to the vehicle **102**, to be retrieved by the service delivery network **202**.

[0060] The service delivery network **202** may check the topics **206** to which the vehicle **102** is subscribed. If the vehicle **102** has published the interrogator log **212**, the service delivery network **202** may review the current module configuration and current version of the computing platform **104**, and determine whether any software updates to the vehicle **102** should be installed. Based on the determination, the service delivery network **202** may identify binaries that should be installed on the vehicle **102** to perform the identified updates. These binaries may be identified in a manifest **216**. Moreover, the manifest **216** may specify network locations at which each of the specified update binaries may be retrieved. As one example, the manifest **216** may specify the network locations as URLs served by a web server **218** of the service delivery network **202**. In some cases, the binaries may include new versions of files to be installed, while in other cases, the binaries may include incremental updates to be applied to currently installed binaries to update the currently installed binaries from one version to a next version.

[0061] To identify the software updates, the service delivery network **202** may be configured to compare the current versions of modules indicated in the interrogator log **212** with the latest version of the modules compatible with the computing platform **104**. The service delivery network **202** may be further configured to identify, for any components that should be updated, any additional dependencies that those updated versions may require. Those additional dependencies may further be added to the manifest **216**.

[0062] Once complete, the service delivery network **202** may send the manifest **216** to the computing platform **104**. In an example, the service delivery network **202** may send the manifest **216** to the vehicle **102** via HTTPS (e.g., over the HTTPS connection to which the computing platform **104**

sent the interrogator log 212 to the computing platform 104, over a different connection to the same or a different a predefined web address of the service delivery network 202 known to the computing platform 104, etc.). Variations on sending the manifest 216 to the vehicle 102 are possible. For instance, the service delivery network 202 may publish the manifest 216 to a topic 206 of the message broker 204, to be retrieved by the vehicle 102. The computing platform 104 may check the topics 206 to which the vehicle 102 is subscribed.

[0063] Regardless of approach, once received, the computing platform 104 may be configured to install the updates indicated by the manifest 216. Based on the manifest 216, the computing platform 104 may be configured to download the updated binaries and/or configurations retrieved from the web server locations specified by the manifest 216. As one example, the manifest 216 may specify the network locations as URLs served by a web server 218 of the service delivery network 202, and the computing platform 104 may download the updated from the URLs specified by the manifest 216. As the updates may be made available from the web server 218 via HTTPS, the computing platform 104 may be able to download the updates using resume functionality available for downloads from web servers 218.

[0064] In some examples, to avoid disruption of the current version of software installed to the computing platform 104, the computing platform 104 may be configured to perform the installation to a second installation of the computing platform 104, other than the currently active installation from which the computing platform 104 was booted. The installation of the updates to the second installation may be performed silently, without requiring input from the user.

[0065] Upon completion of installation of the software updates specified by the manifest 216, the computing platform 104 may be configured to perform an additional interrogation of the modules of the vehicle 102 to create a new interrogator log 212. Similar to as describe above, the computing platform 104 may create the interrogator log 212, but this time utilizing the received ODL 214, providing an updated definition of what information to interrogate for the currently performed software update. Also, similar to as discussed above, the computing platform 104 may be configured to publish the interrogator log 212 to the message broker 204, to be received by the service delivery network 202. Accordingly, the service delivery network 202 may be automatically updated of the installation status of the vehicle 102, without requiring user HMI interaction.

[0066] FIG. 5 illustrates an exemplary process 500 for updating software of the computing platform 104. The process 500 may be performed, for example, by a computing platform 104 of a vehicle 102 in communication with a service delivery network 202 over a network 156.

[0067] At operation 502, the computing platform 104 subscribes to topics 206 of a topic tree 210 in which commands 302 to update the software version or configuration of one or more modules of the vehicle 102 are published. These modules may include, for example the computing platform 104 itself and/or other vehicle ECUs 148. For example, the computing platform 104 may subscribe to a desired feature node 404-C of the topic tree 210 into which vehicle-specific updates for a software component of a module of the vehicle 102 may be published by the service delivery network 202. As another example, the

computing platform 104 may subscribe to a configuration version node 414 representing a topic 206 of the topic tree 210 served by the service delivery network 202 and related to the installed version, features, and region of the component or module of the vehicle 102.

[0068] At operation 504, the computing platform 104 determines whether a trigger notification message 208 is received in one of the subscribed topics 206. As an example, the service delivery network 202 may publish a trigger notification message 208 in the desired feature node 404-C to target an update to the vehicle 102. As another example, the service delivery network 202 may publish a trigger notification message 208 in the configuration version node 414 to target vehicles 102 having a particular configuration. The vehicle 102 may be notified of or may otherwise receive the notification message 208 due to its subscription to the topics 206 of the topic tree 210. The trigger notification message 208 may indicate to the vehicle 102 that software updates are available. If a notification message 208 is received, control passes to operation 506. Otherwise, control remains at operation 504.

[0069] At operation 506, the vehicle 102 generates an interrogator log 212. The interrogator log 212 may include version information of at least one software module installed on the vehicle 102. The information to interrogate may include, as some non-limiting examples, module name, module serial number, VIN, hardware part number, MAC address, part numbers of software applications, languages, and service packs installed on the module, available storage space on the module, and status information regarding the installation of previous updates. The computing platform 104 may be configured to generate the interrogator log 212 according to an ODL 214 defining what information to interrogate and where such information may be located. The information to interrogate may include, for example, requested identifiers from the computing platform 104 and other vehicle ECUs 148 within the vehicle 102. The information may be gathered via the CAN bus or other vehicle network 142, and included in the interrogator log 212. In some cases, the ODL 214 may be received as part of an installation of software on the vehicle 102, while in other cases the ODL 214 may have been previously received according to earlier performed updates.

[0070] At operation 508, the vehicle 102 sends the interrogator log 212 to the service delivery network 202. In an example, the computing platform 104 may send the interrogator log 212 to the service delivery network 202 via HTTPS (e.g., by connection of the computing platform 104 to a predefined web address of the service delivery network 202 known to the computing platform 104). Variations on sending the interrogator log 212 to the service delivery network 202 are possible. As another example, the computing platform 104 may publish the interrogator log 212 to a topic 206 of the message broker 204 specific to the vehicle 102, to be retrieved by the service delivery network 202.

[0071] At operation 510, the vehicle 102 receives a manifest 216 from the message broker 204. The manifest 216 may indicate one or more binaries to be downloaded and installed by the vehicle 102, as well as other information to use when performing the update, such as updated ODL 214 and/or keys to decrypt the binaries to be downloaded and installed. In an example, the service delivery network 202 may send the manifest 216 to the vehicle 102 via HTTPS (e.g., over the HTTPS connection to which the computing

platform **104** sent the interrogator log **212** to the computing platform **104**, over a different connection to the same or a different a predefined web address of the service delivery network **202** known to the computing platform **104**, etc.). Variations on sending the manifest **216** to the vehicle **102** are possible. For instance, the service delivery network **202** may publish the manifest **216** to a topic **206** of the message broker **204**, to be retrieved by the vehicle **102**. The computing platform **104** may check the topics **206** to which the vehicle **102** is subscribed.

[0072] At operation **512**, the vehicle **102** downloads the binaries specified by the manifest **216**. For example, the computing platform **104** of the vehicle **102** may download the binaries from the web server **218** of the service delivery network **202** at network locations specified by the manifest **216**. The computing platform **104** may also decrypt the binaries into decrypted binaries according to the received keys.

[0073] At operation **514**, the computing platform **104** installs the software update. For example, the computing platform **104** may execute or otherwise apply the firmware update to the installed firmware version to update the firmware version. In some cases, the computing platform **104** may be further configured to publish a message **208** to a command response alert topic node **406-C** of the vehicle **102** to alert the service delivery network **202** of success or failure of the software update. Upon receiving a message **208** indicating success of the software update, the service delivery network **202** may update its records of the installed configuration status of the vehicle **102**. As another possibility, if the software update fails, the computing platform **104** may publish a failure message **208** to the command response alert topic node **406-C**, and the process **600** may end, or possibly pass control to operation **512** to retry the download and installation.

[0074] At operation **516**, the computing platform **104** updates the topic **206** subscriptions of the vehicle **102**. For example, the computing platform **104** may unsubscribe the vehicle **102** from the configuration version node **414** of the topic tree **210** and the firmware version node **410** for the old version, and subscribe to the configuration version node **414** of the topic tree **210** related to the new installed version of the firmware. Thus, the vehicle **102** may be able to receive further trigger notification messages **208** corresponding to the updated configuration of the vehicle **102**. After operation **516**, control passes to operation **504**.

[0075] Thus, a service delivery network **202** may utilize a topic tree **210** to selectively provide updates to vehicles **102** according to installed software version, such as firmware version of a module of the vehicle **102**, or a software version of an application installed on the computing platform **104**, without affecting the vehicle **102** installations of software versions on vehicles **102** of different versions. Moreover, these updates may be provided incrementally and automatically over-the-air to the vehicles **102**, without incurring manufacturer or dealer technician costs. As the updates may be made available from the web server **218**, the vehicles **102** may be able to download the updates using resume functionality available from web server **218** downloads. Moreover, as the interrogator log **212** generation and upload is performed responsive to a service notification that updates are available, periodic polling by the vehicle **102** for updates is avoided, thereby avoiding the resource use of periodically generating and uploading interrogator logs **212**.

[0076] Computing devices described herein, such as the computing platform **104**, mobile devices **152**, service delivery network **202**, and message broker **204**, generally include computer-executable instructions, where the instructions may be executable by one or more computing devices such as those listed above. Computer-executable instructions may be compiled or interpreted from computer programs created using a variety of programming languages and/or technologies, including, without limitation, and either alone or in combination, Java™, C, C++, C#, Visual Basic, Java Script, Perl, etc. In general, a processor (e.g., a microprocessor) receives instructions, e.g., from a memory, a computer-readable medium, etc., and executes these instructions, thereby performing one or more processes, including one or more of the processes described herein. Such instructions and other data may be stored and transmitted using a variety of computer-readable media.

[0077] With regard to the processes, systems, methods, heuristics, etc., described herein, it should be understood that, although the steps of such processes, etc., have been described as occurring according to a certain ordered sequence, such processes could be practiced with the described steps performed in an order other than the order described herein. It further should be understood that certain steps could be performed simultaneously, that other steps could be added, or that certain steps described herein could be omitted. In other words, the descriptions of processes herein are provided for the purpose of illustrating certain embodiments, and should in no way be construed so as to limit the claims.

[0078] While exemplary embodiments are described above, it is not intended that these embodiments describe all possible forms of the invention. Rather, the words used in the specification are words of description rather than limitation, and it is understood that various changes may be made without departing from the spirit and scope of the invention. Additionally, the features of various implementing embodiments may be combined to form further embodiments of the invention.

What is claimed is:

1. A system, comprising:
 - a vehicle, subscribed to a topic maintained by a message broker and associated with the vehicle, including at least one controller programmed to
 - send, to a service delivery network server, an interrogator log enumerating configuration information of the vehicle generated responsive to a trigger message published to the topic by the server, and
 - retrieve a manifest indicating network locations of updates determined using the interrogator log.
2. The system of claim 1, wherein the at least one controller is further programmed to include, in the interrogator log, at least one of (i) current state information of at least one software component installed on the vehicle and (ii) diagnostic codes of at least one software component installed on the vehicle.
3. The system of claim 1, wherein the at least one controller is further programmed to generate the interrogator log based on a data identifier list defining the configuration information to include in the interrogator log and on which of a plurality of vehicle electronic control units (ECUs) the information is located.
4. The system of claim 1, wherein the topic is associated with a vehicle identification number (VIN) of the vehicle.

5. The system of claim 1, wherein the at least one controller is further programmed to:

- download the updates from the network locations;
- install the updates to the vehicle;
- generate a second interrogator log responsive to completion of the install of the updates; and
- send the second interrogator log to the server.

6. The system of claim 5, wherein the at least one controller is further programmed to download the updates from the network locations over one or more secure hyper-text transport protocol (HTTPS) connections.

7. The system of claim 1, wherein the at least one controller is further programmed to:

- send the interrogator log to the service delivery network server over a secure hyper-text transport protocol (HTTPS) connection; and
- retrieve the manifest from the service delivery network server over the HTTPS connection.

8. A method comprising:

- receiving, by a vehicle processor, a message published by a service delivery network to a topic maintained by a message broker and associated with a vehicle indicating vehicle update availability;

- generating an interrogator log enumerating vehicle configuration information responsive to receiving the message;

- sending the interrogator log to the service delivery network; and

- retrieving, from the service delivery network, a manifest indicating network locations of updates determined using the interrogator log.

9. The method of claim 8, further comprising including, in the interrogator log, at least one of (i) current state information of at least one software component installed on the vehicle and (ii) diagnostic codes of at least one software component installed on the vehicle.

10. The method of claim 8, further comprising generating the interrogator log based on a data identifier list defining the configuration information to include in the interrogator log and on which of a plurality of vehicle electronic control units (ECUs) the information is located.

11. The method of claim 8, wherein the topic is associated with a vehicle identification number (VIN) of the vehicle.

12. The method of claim 8, further comprising:
 downloading the updates from the network locations;
 installing the updates to the vehicle;
 generating a second interrogator log responsive to completion of the install of the updates; and
 sending the second interrogator log to the service delivery network.

13. The method of claim 12, wherein the network locations include at least one universal resource locator (URL) served by a web server of the service delivery network.

14. A non-transitory computer-readable medium including instructions that when executed by a computing system of a vehicle cause the vehicle to:

- retrieve a manifest of service delivery network locations for updates served by a web server, the updates selected based on a log having vehicle configuration information compiled by the vehicle computing system in response to receiving a message published to a vehicle-subscribed topic maintained by a message broker indicating vehicle update availability.

15. The medium of claim 14, wherein the log includes at least one of (i) current state information of at least one software component installed on the vehicle and (ii) diagnostic codes of at least one software component installed on the vehicle.

16. The medium of claim 14, wherein the log is generated based on a data identifier list defining the configuration information to include in the log and on which of a plurality of vehicle electronic control units (ECUs) the information is located.

17. The medium of claim 14, wherein the topic is associated with a vehicle identification number (VIN) of the vehicle.

18. The medium of claim 14, further comprising instructions that, when executed by the computing system of the vehicle, cause the vehicle to:

- download the updates from the network locations;
- install the updates to the vehicle;
- generate a second log after the install; and
- publish the second log to the topic.

19. The medium of claim 18, wherein the network locations include at least one universal resource locator (URL) served by a web server of the service delivery network.

* * * * *