


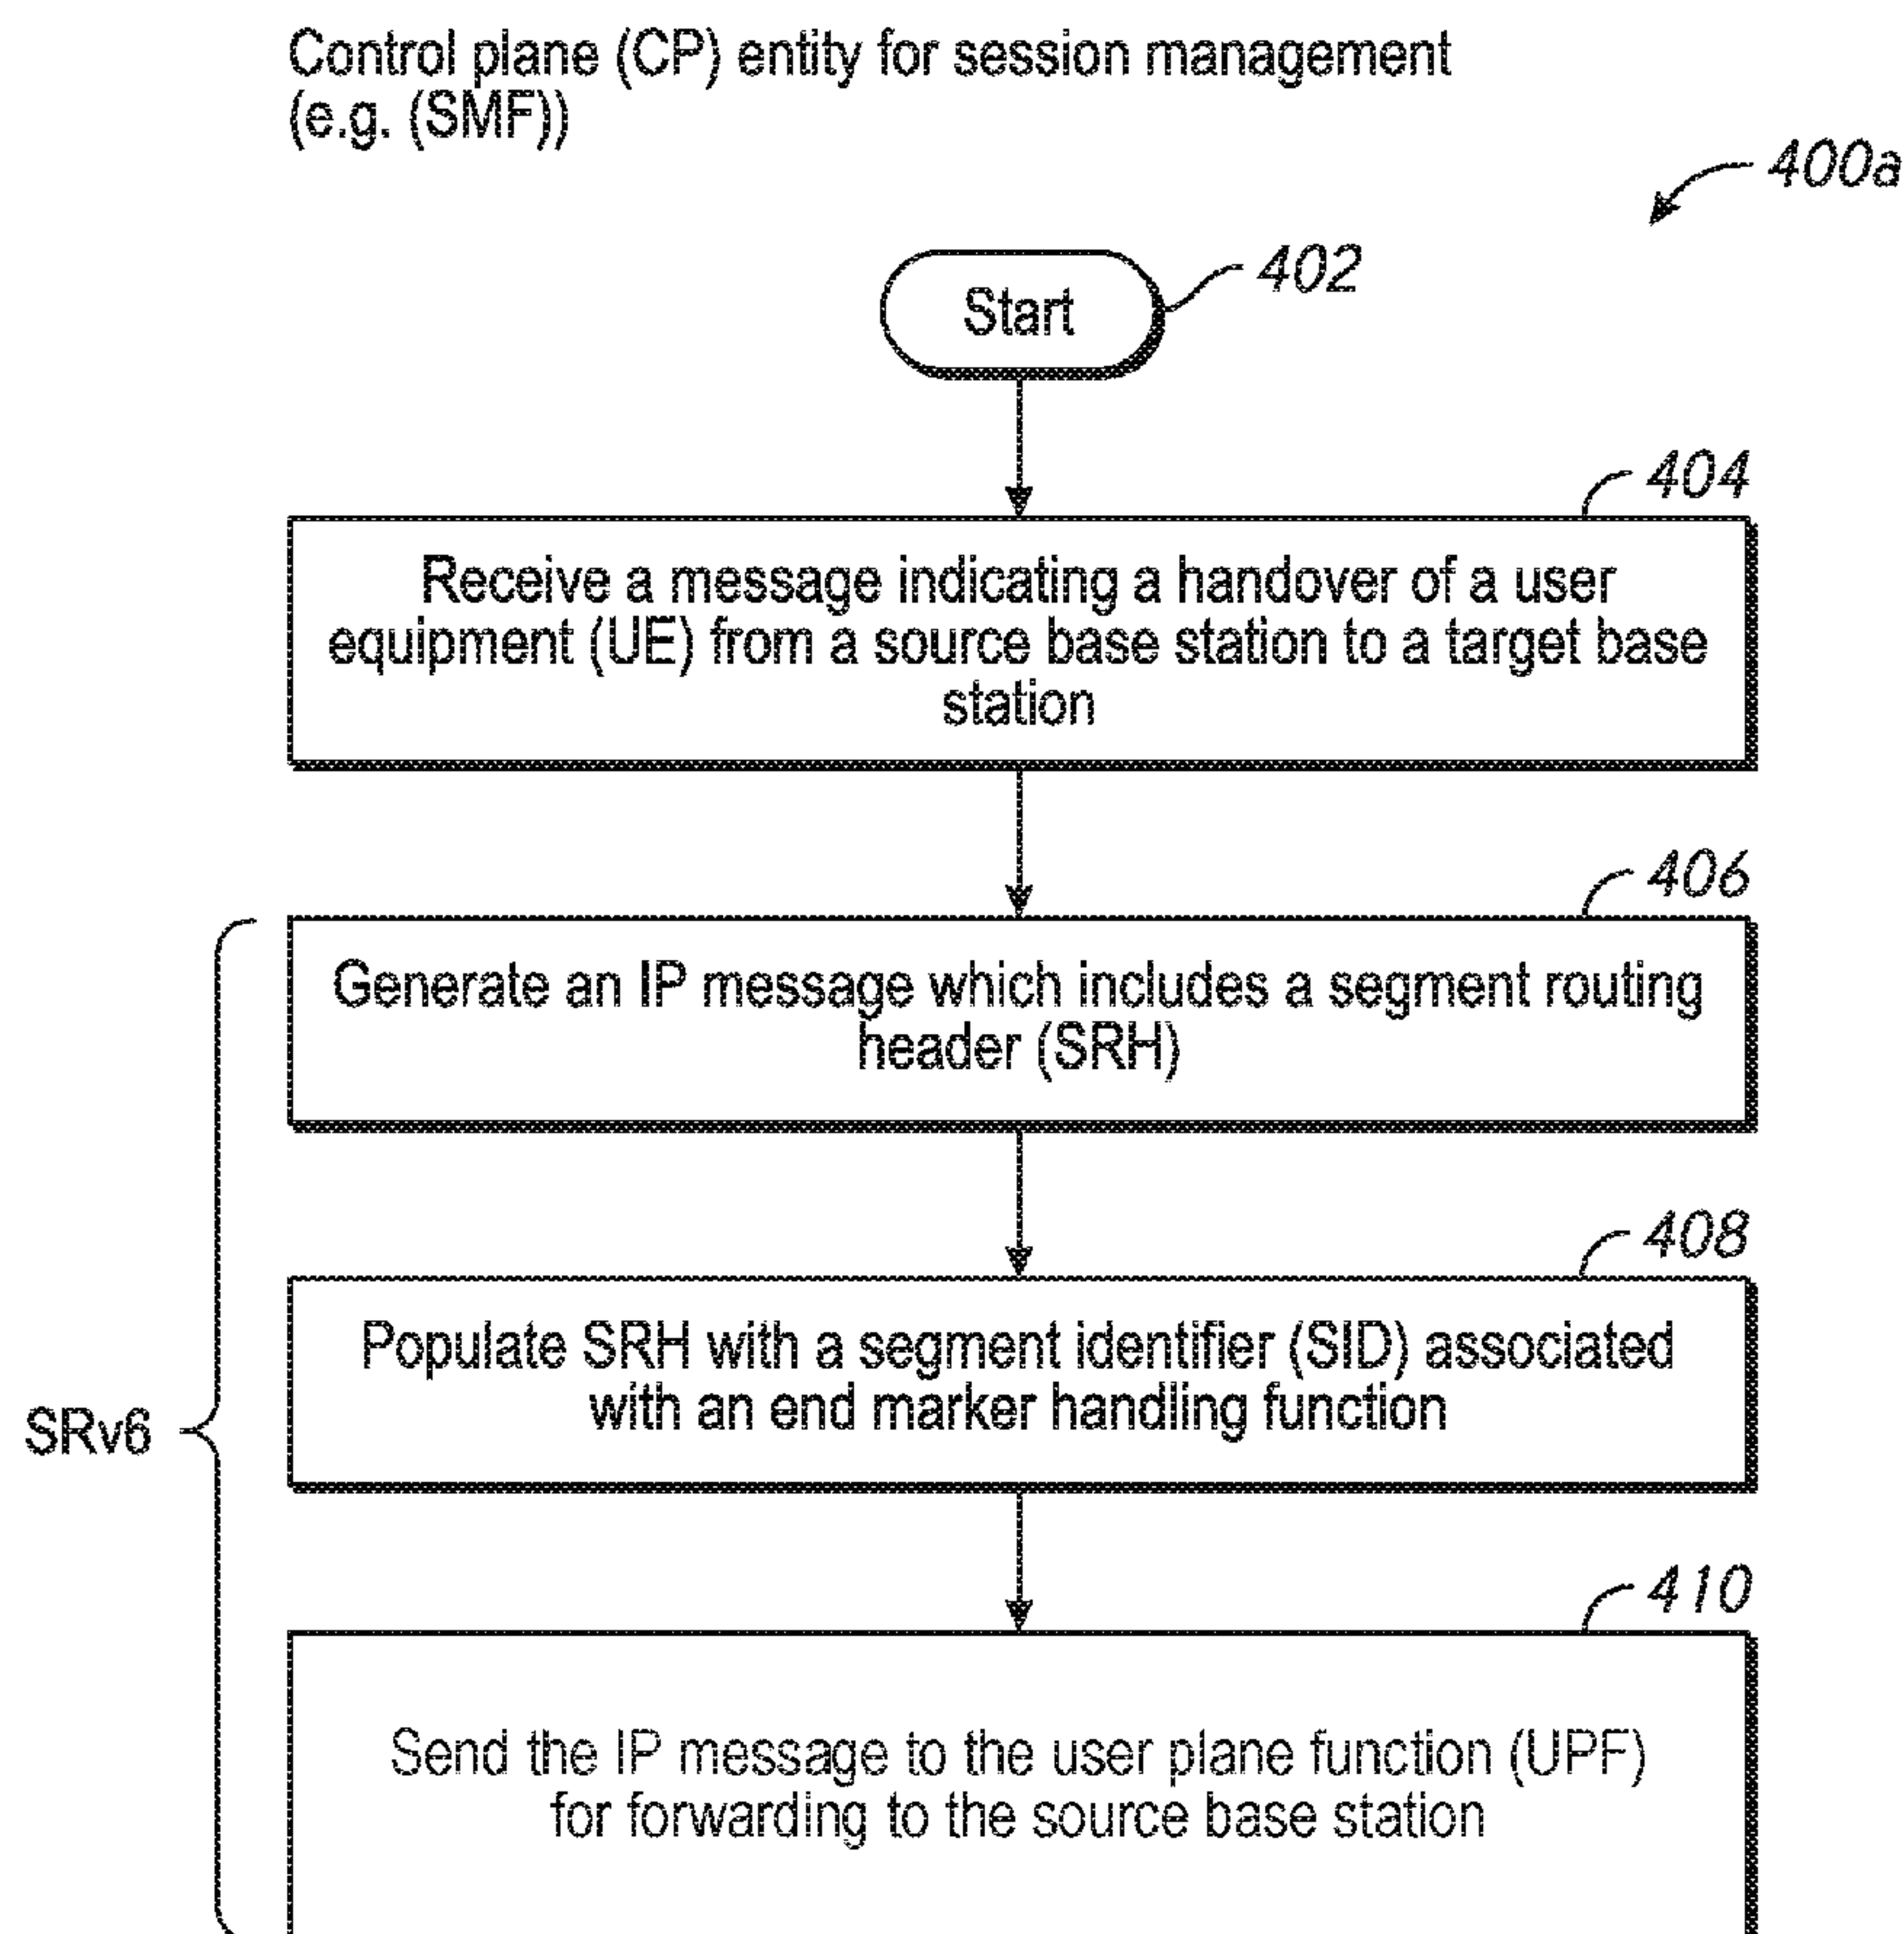

US 20190327648A1

(19) **United States**(12) **Patent Application Publication**
Gundavelli et al.(10) **Pub. No.: US 2019/0327648 A1**(43) **Pub. Date: Oct. 24, 2019**(54) **METHODS AND APPARATUS FOR
PROVIDING END MARKER
FUNCTIONALITY IN MOBILE NETWORKS
HAVING SRV6-CONFIGURED MOBILE
USER PLANES***H04W 36/02* (2006.01)*H04L 12/911* (2006.01)(52) **U.S. Cl.**CPC *H04W 36/0033* (2013.01); *H04L 47/825*
(2013.01); *H04W 36/023* (2013.01); *H04L*
45/34 (2013.01)(71) Applicant: **Cisco Technology, Inc.**, San Jose, CA
(US)(72) Inventors: **Srinath Gundavelli**, San Jose, CA
(US); **Sangram Kishore Lakkaraju**,
Bangalore (IN); **Timothy Peter**
Stammers, Raleigh, NC (US)(21) Appl. No.: **16/458,694**(22) Filed: **Jul. 1, 2019****Related U.S. Application Data**(63) Continuation of application No. 15/921,533, filed on
Mar. 14, 2018.**Publication Classification**(51) **Int. Cl.***H04W 36/00* (2006.01)*H04L 12/721* (2006.01)(57) **ABSTRACT**

End marker functionality may be provided in mobile networks having mobile user planes configured with segment routing for IPv6 (SRv6), especially suitable for 5G network migration. For example, a base station may receive an SRv6 control message from a user plane function (UPF) which carries data traffic of a data session for the UE. The base station may perform a function associated with a segment identifier (SID) identified in a segment routing header (SRH) of the SRv6 control message. The function may be an end marker handling function associated with an end marker SID. Performing the end marker handling function may cause the base station to generate a tunneling protocol message (e.g. according to GPRS tunneling protocol or GTP) comprising an end marker message and send the tunneling protocol message comprising the end marker message for receipt by the target base station.



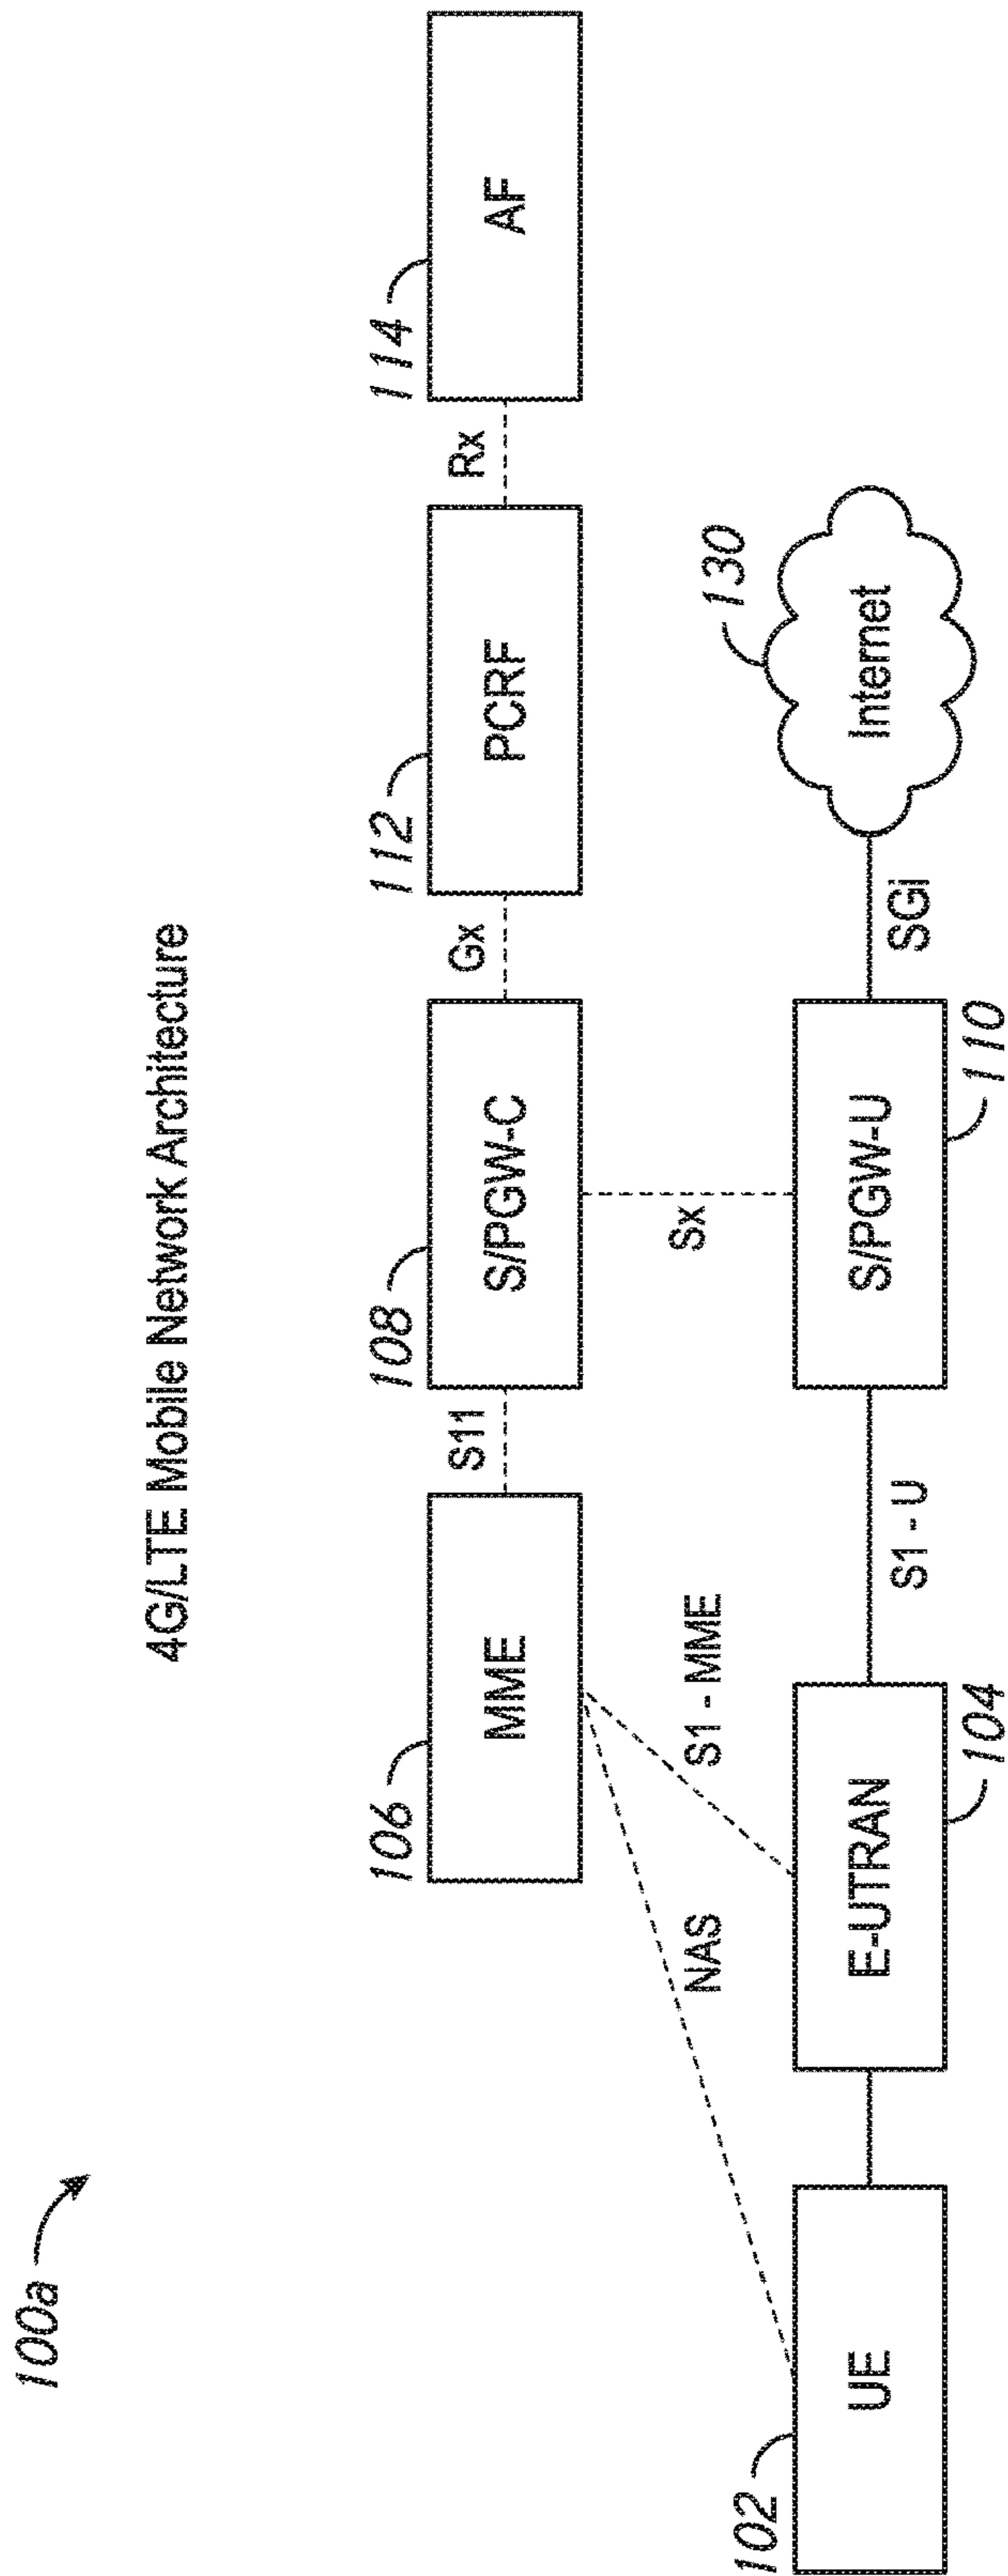


FIG. 1A

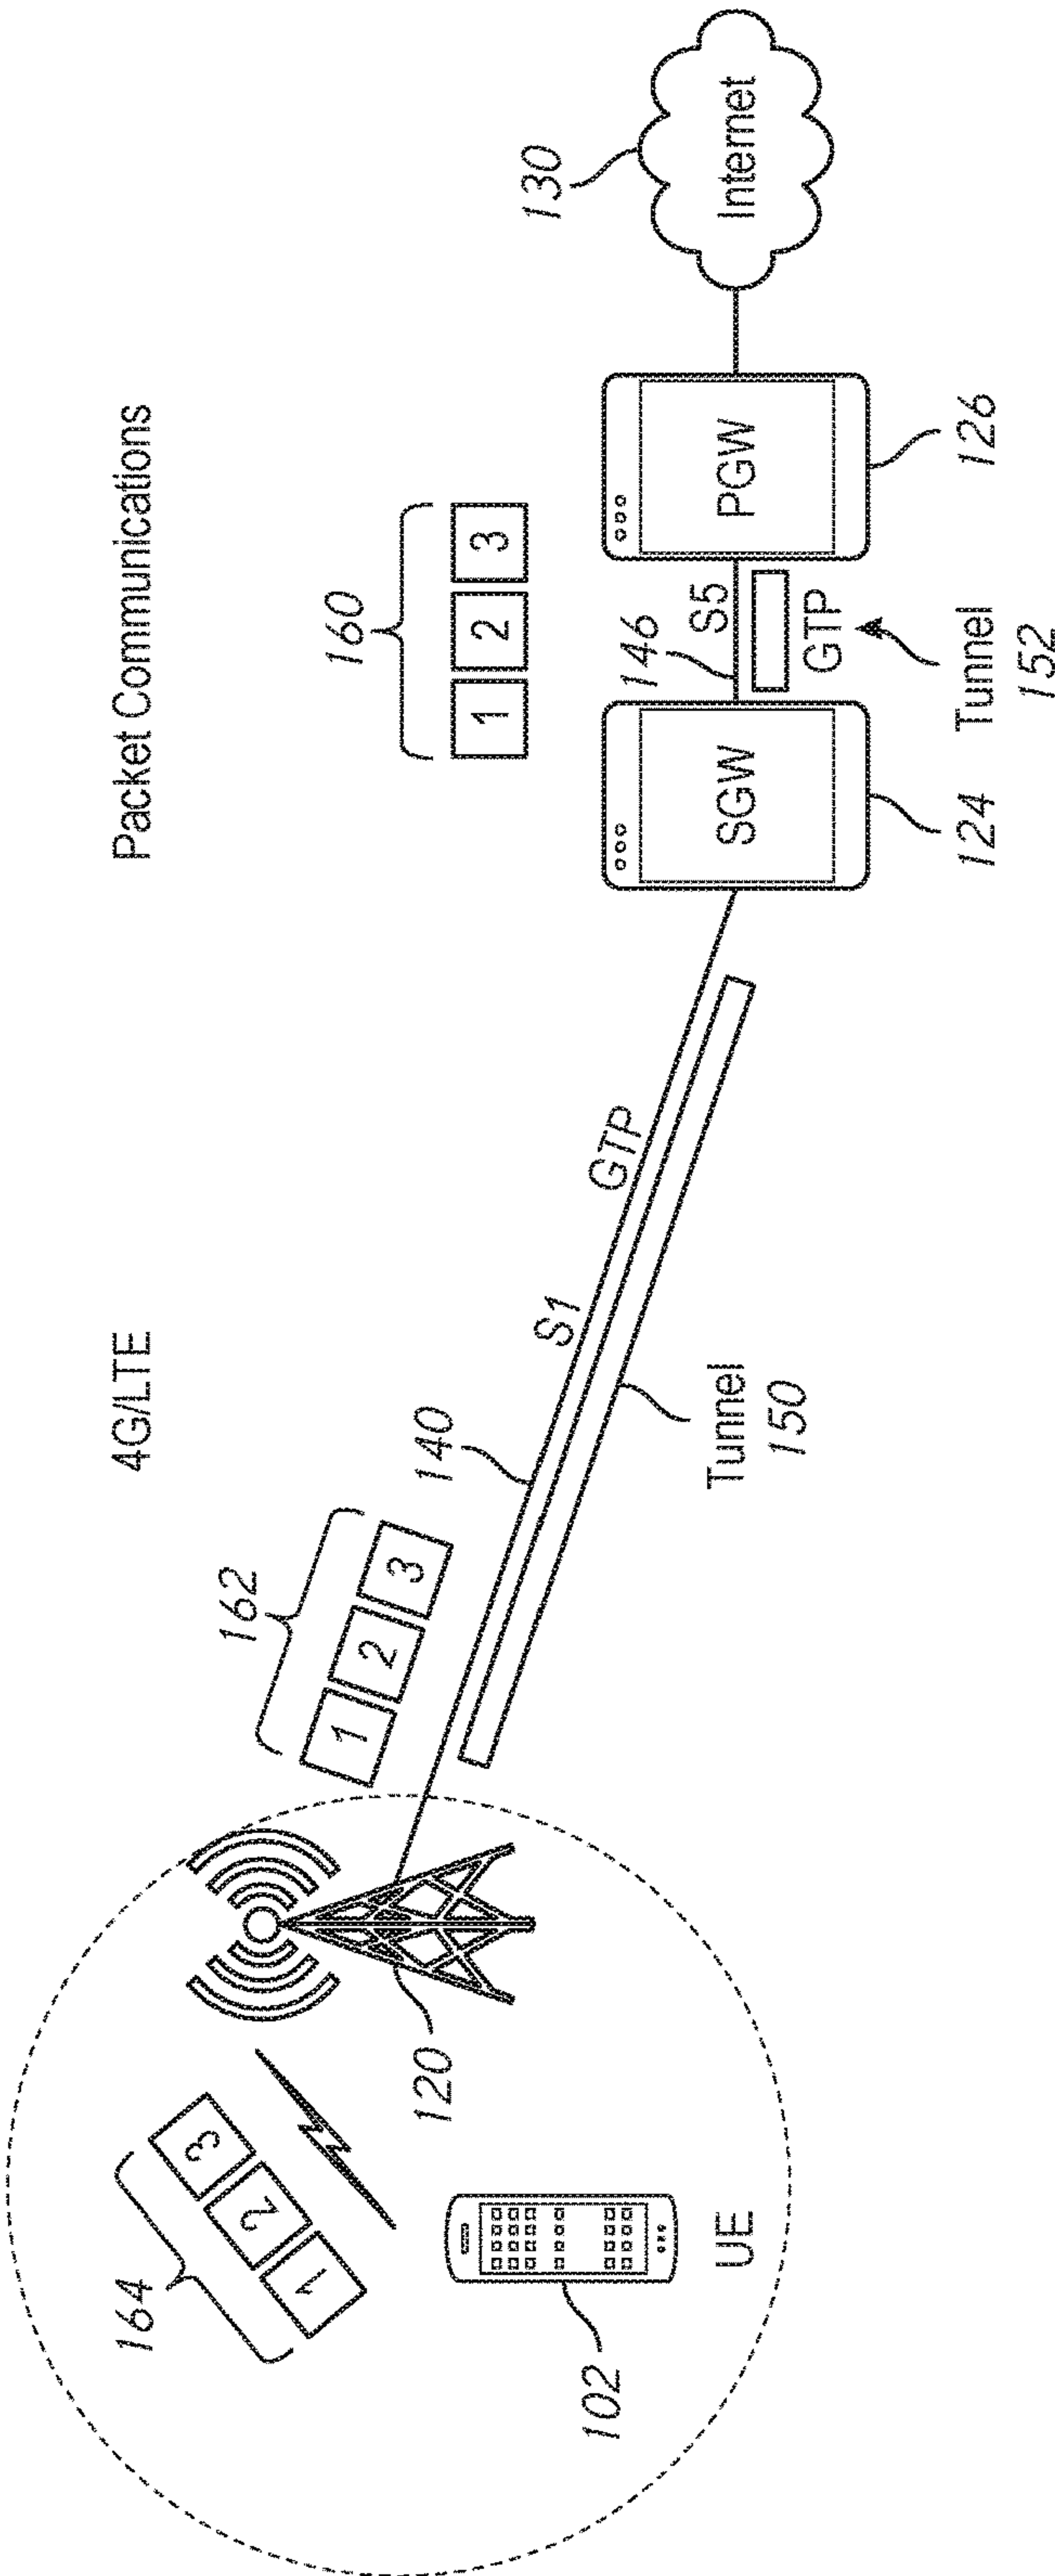


FIG. 1B

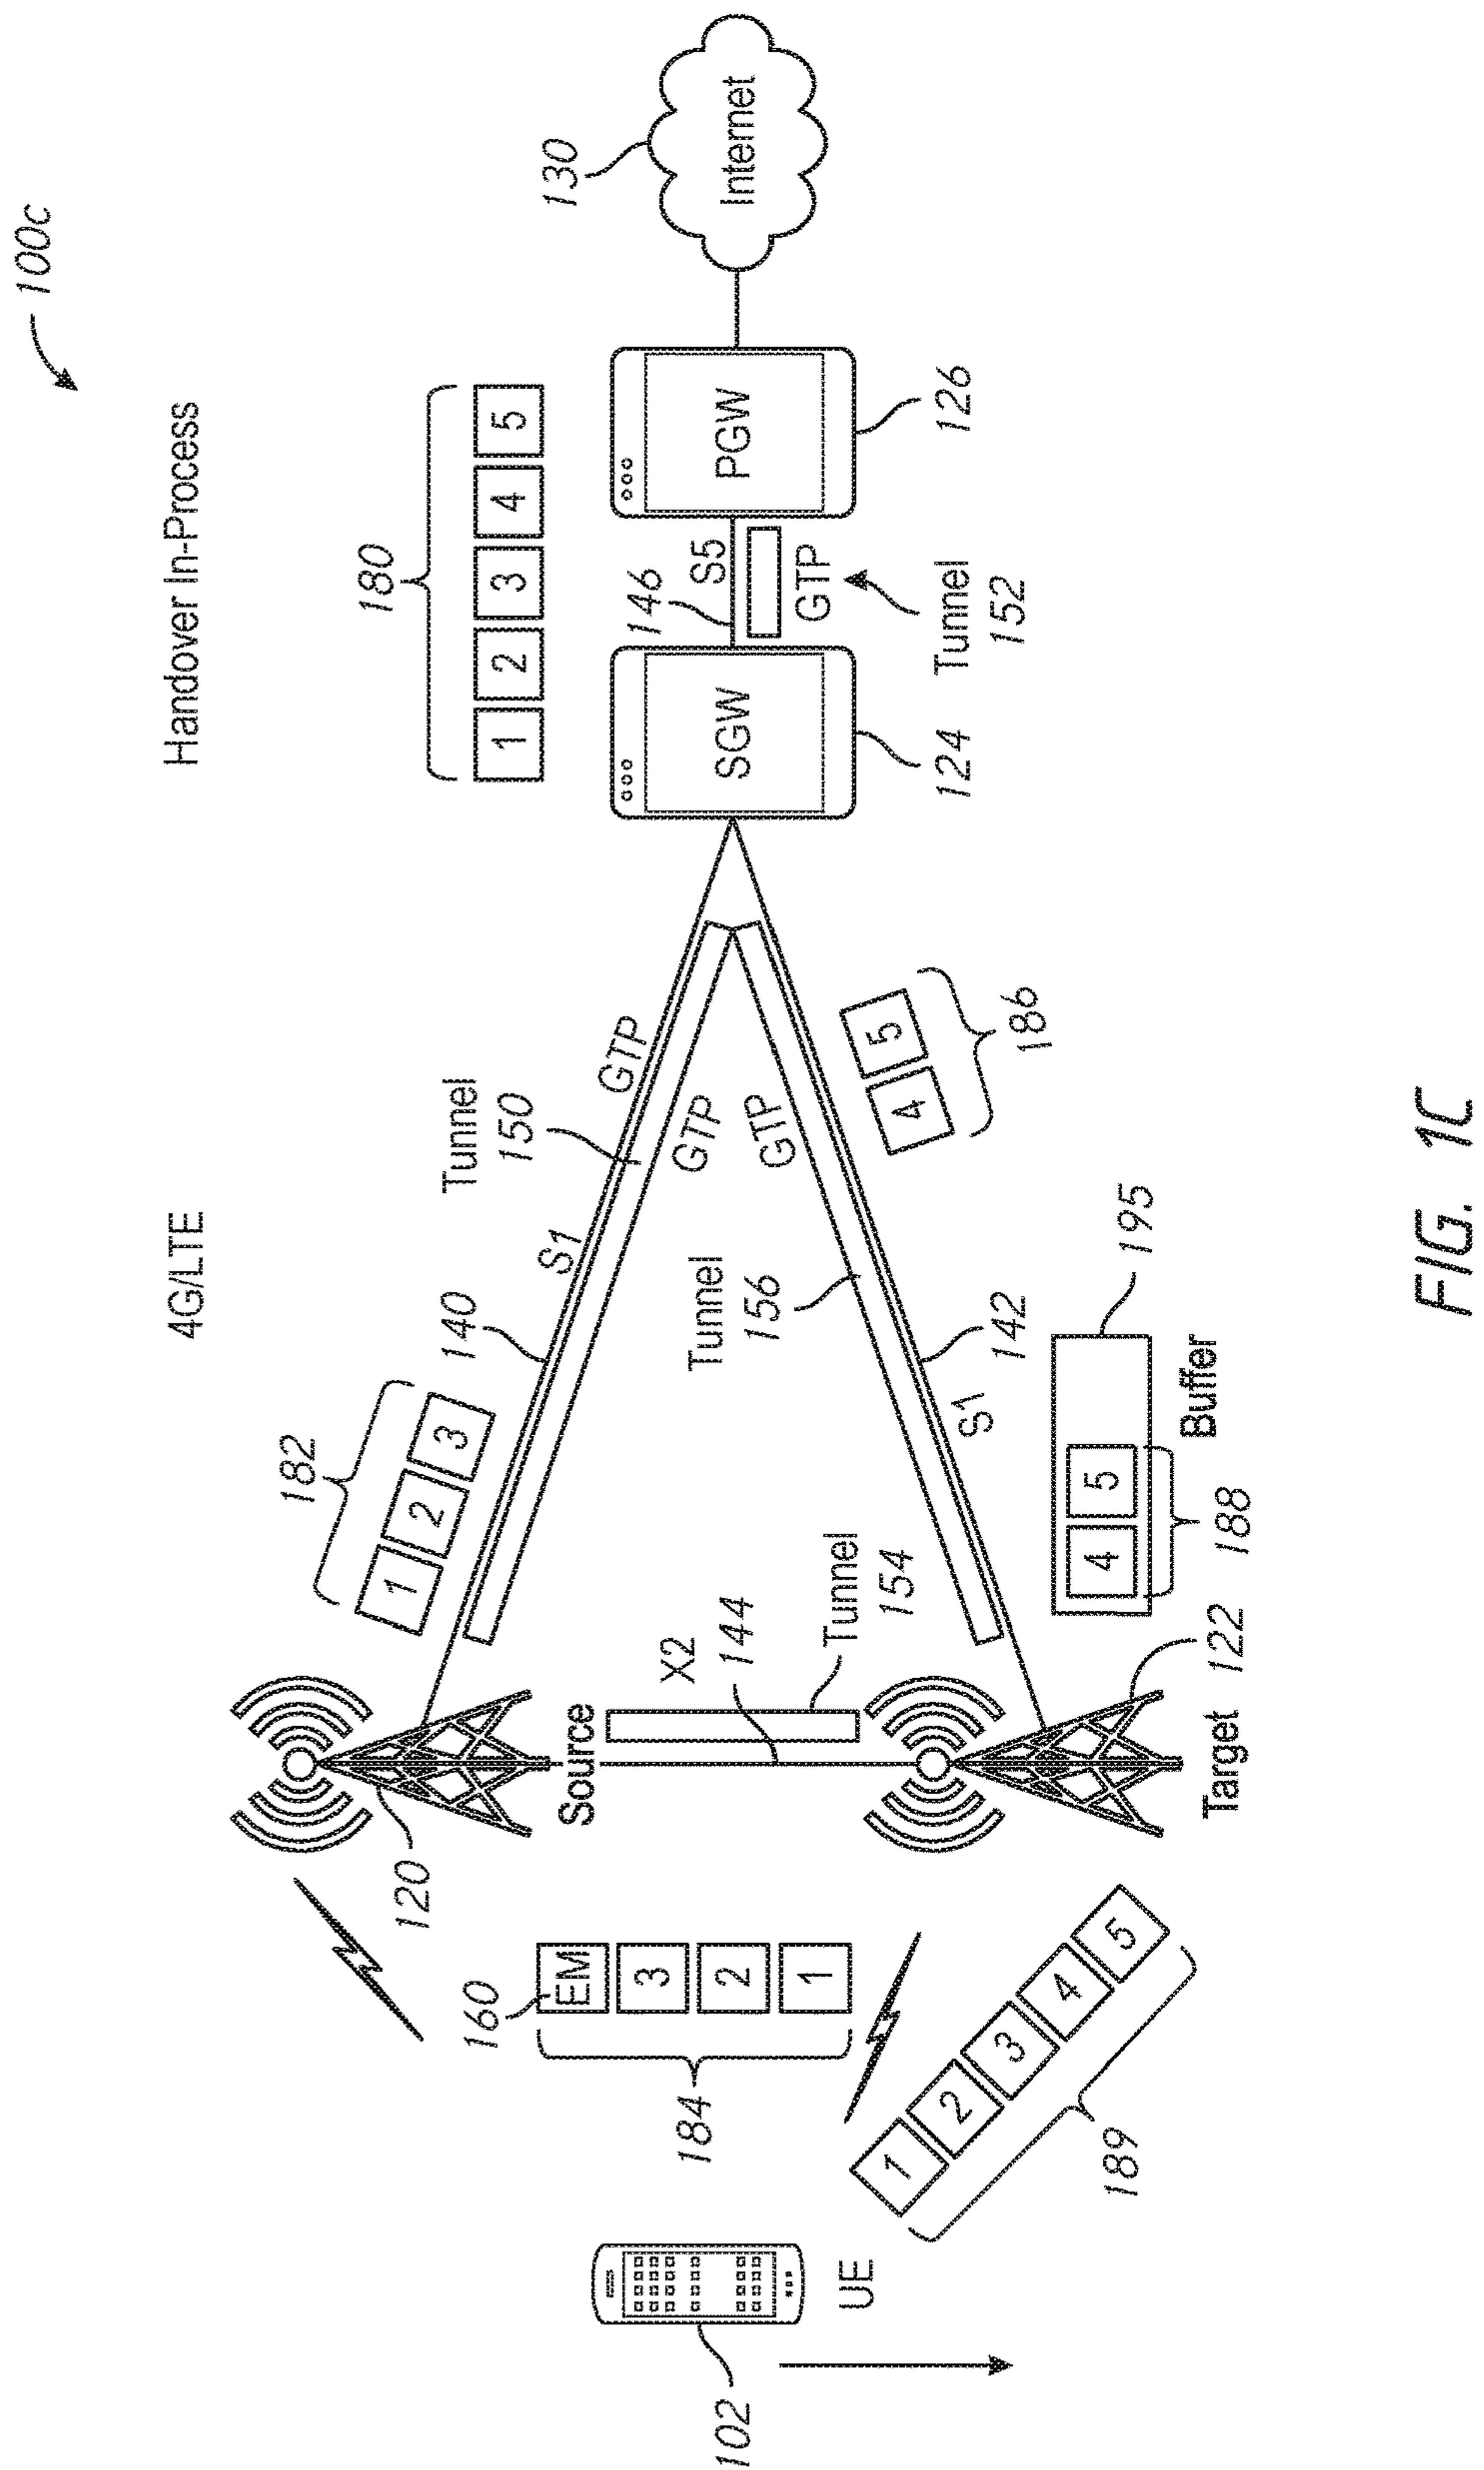
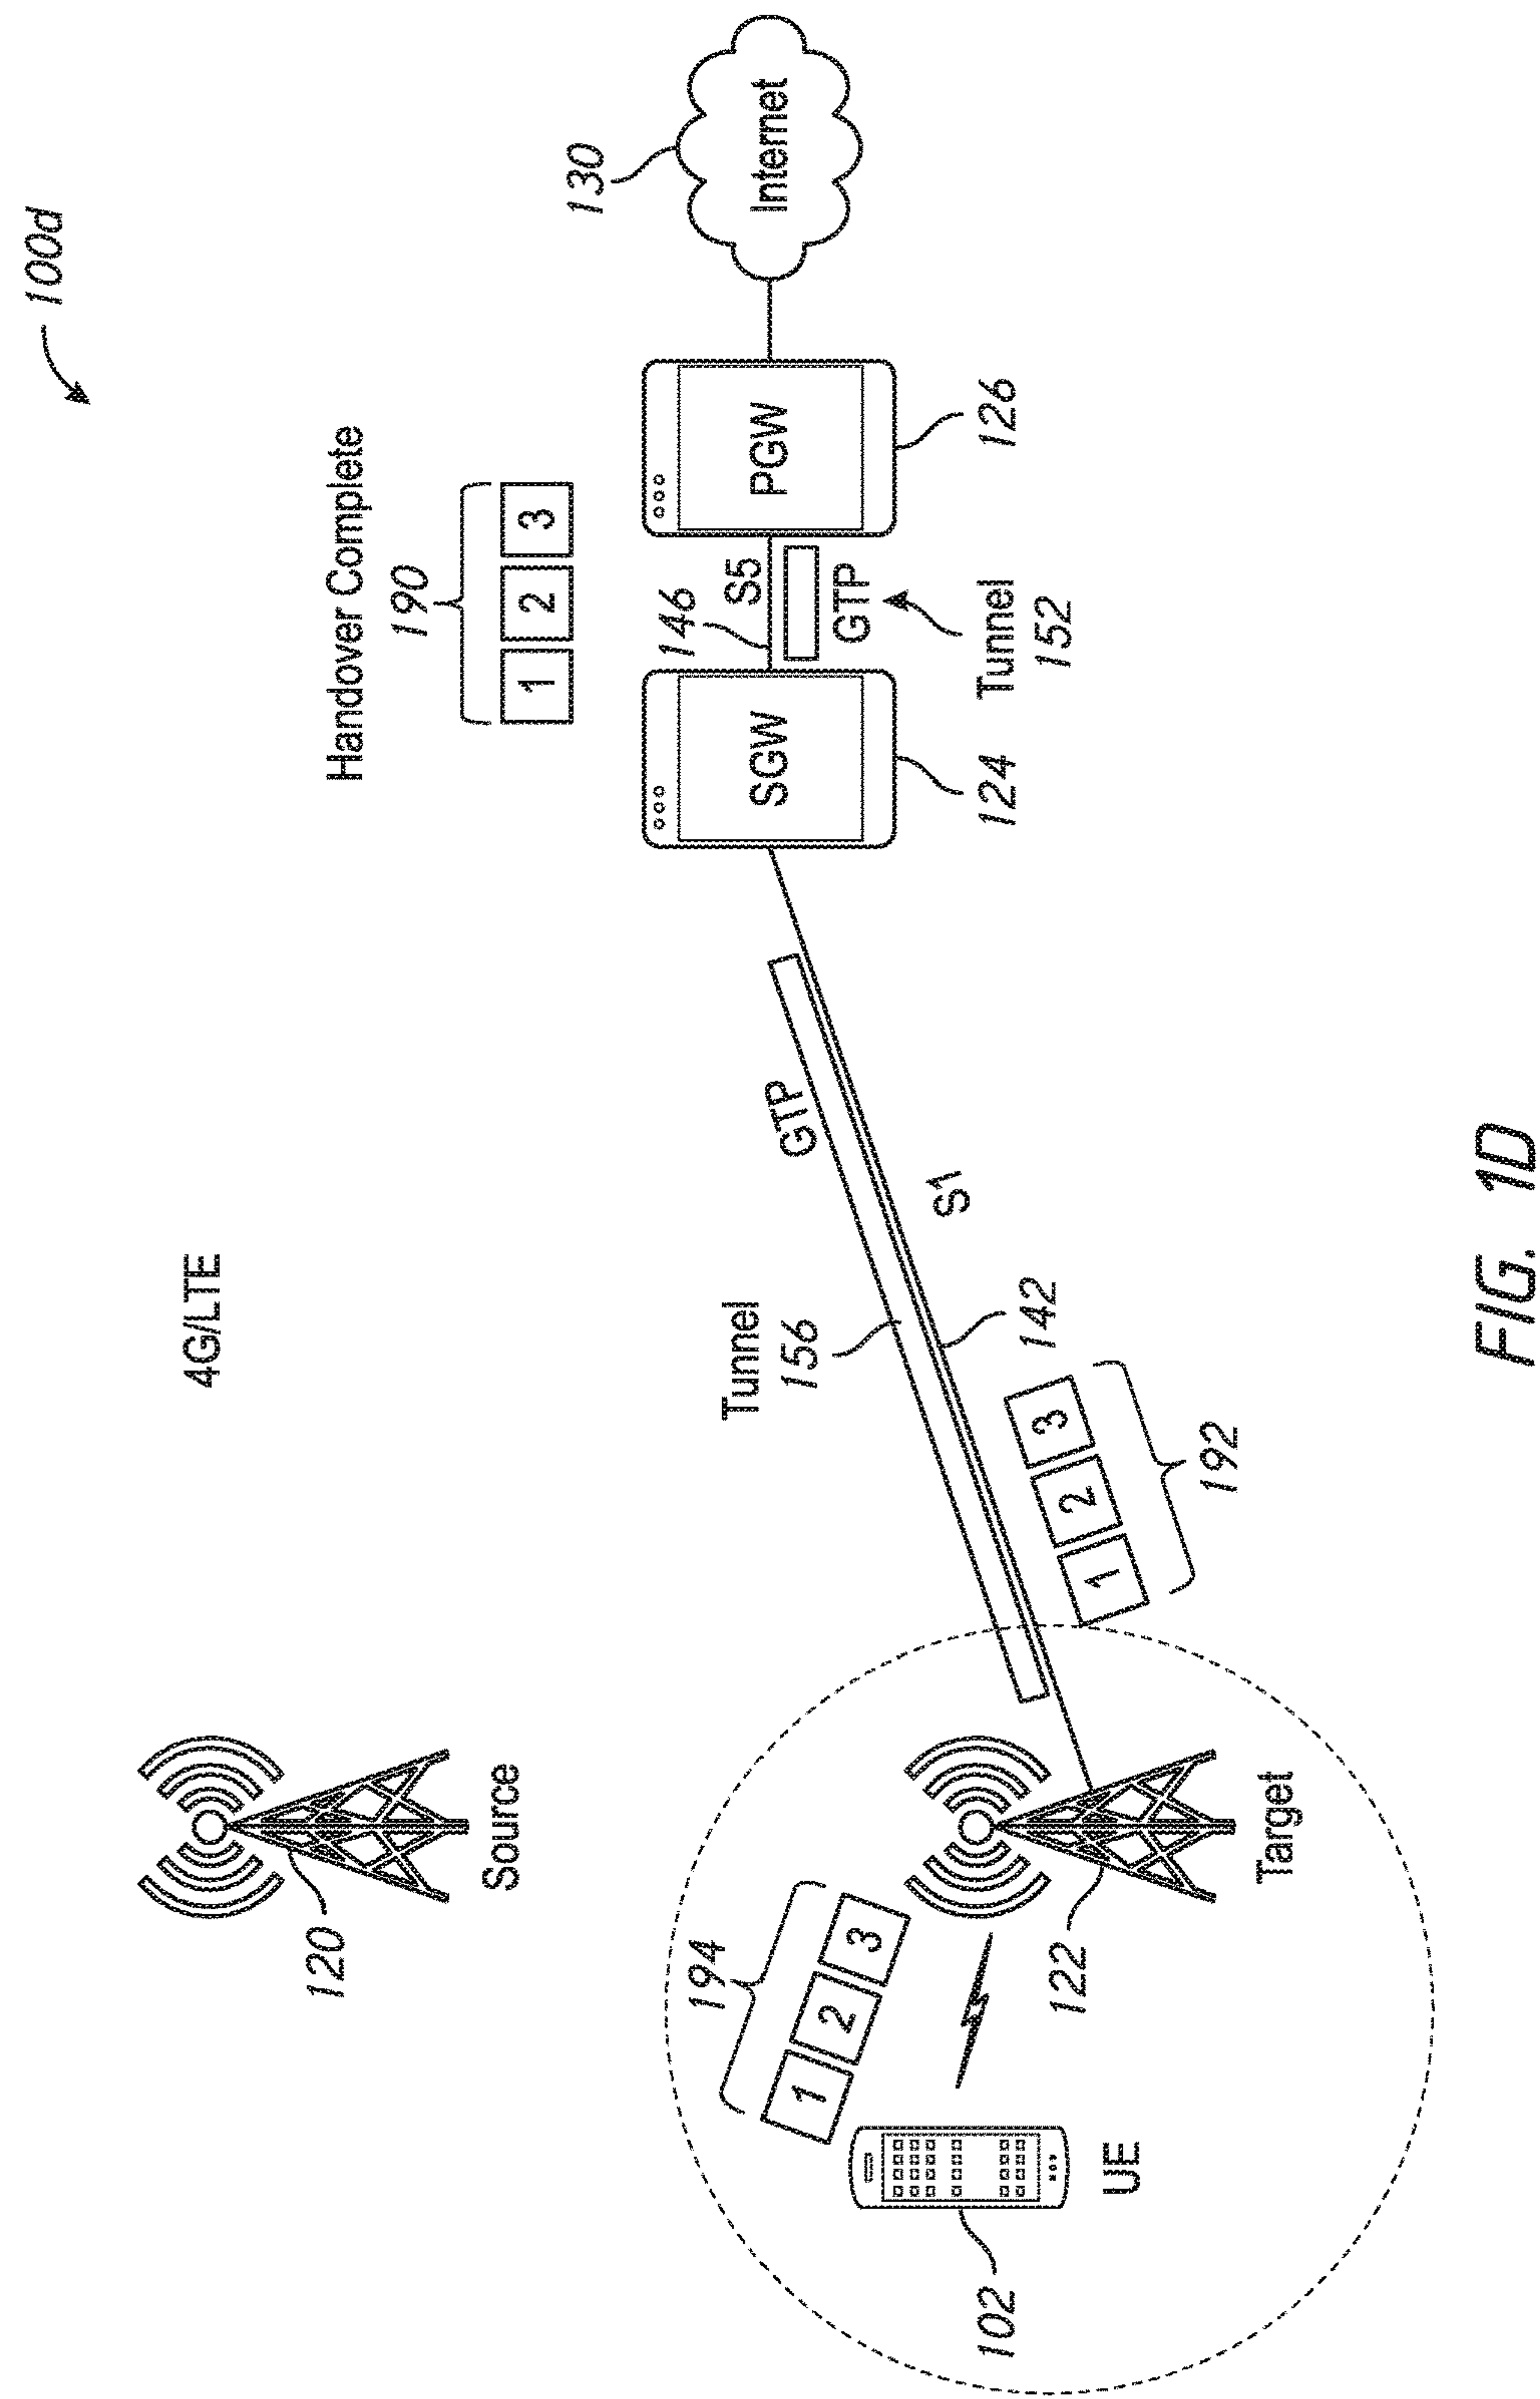


FIG. 1C



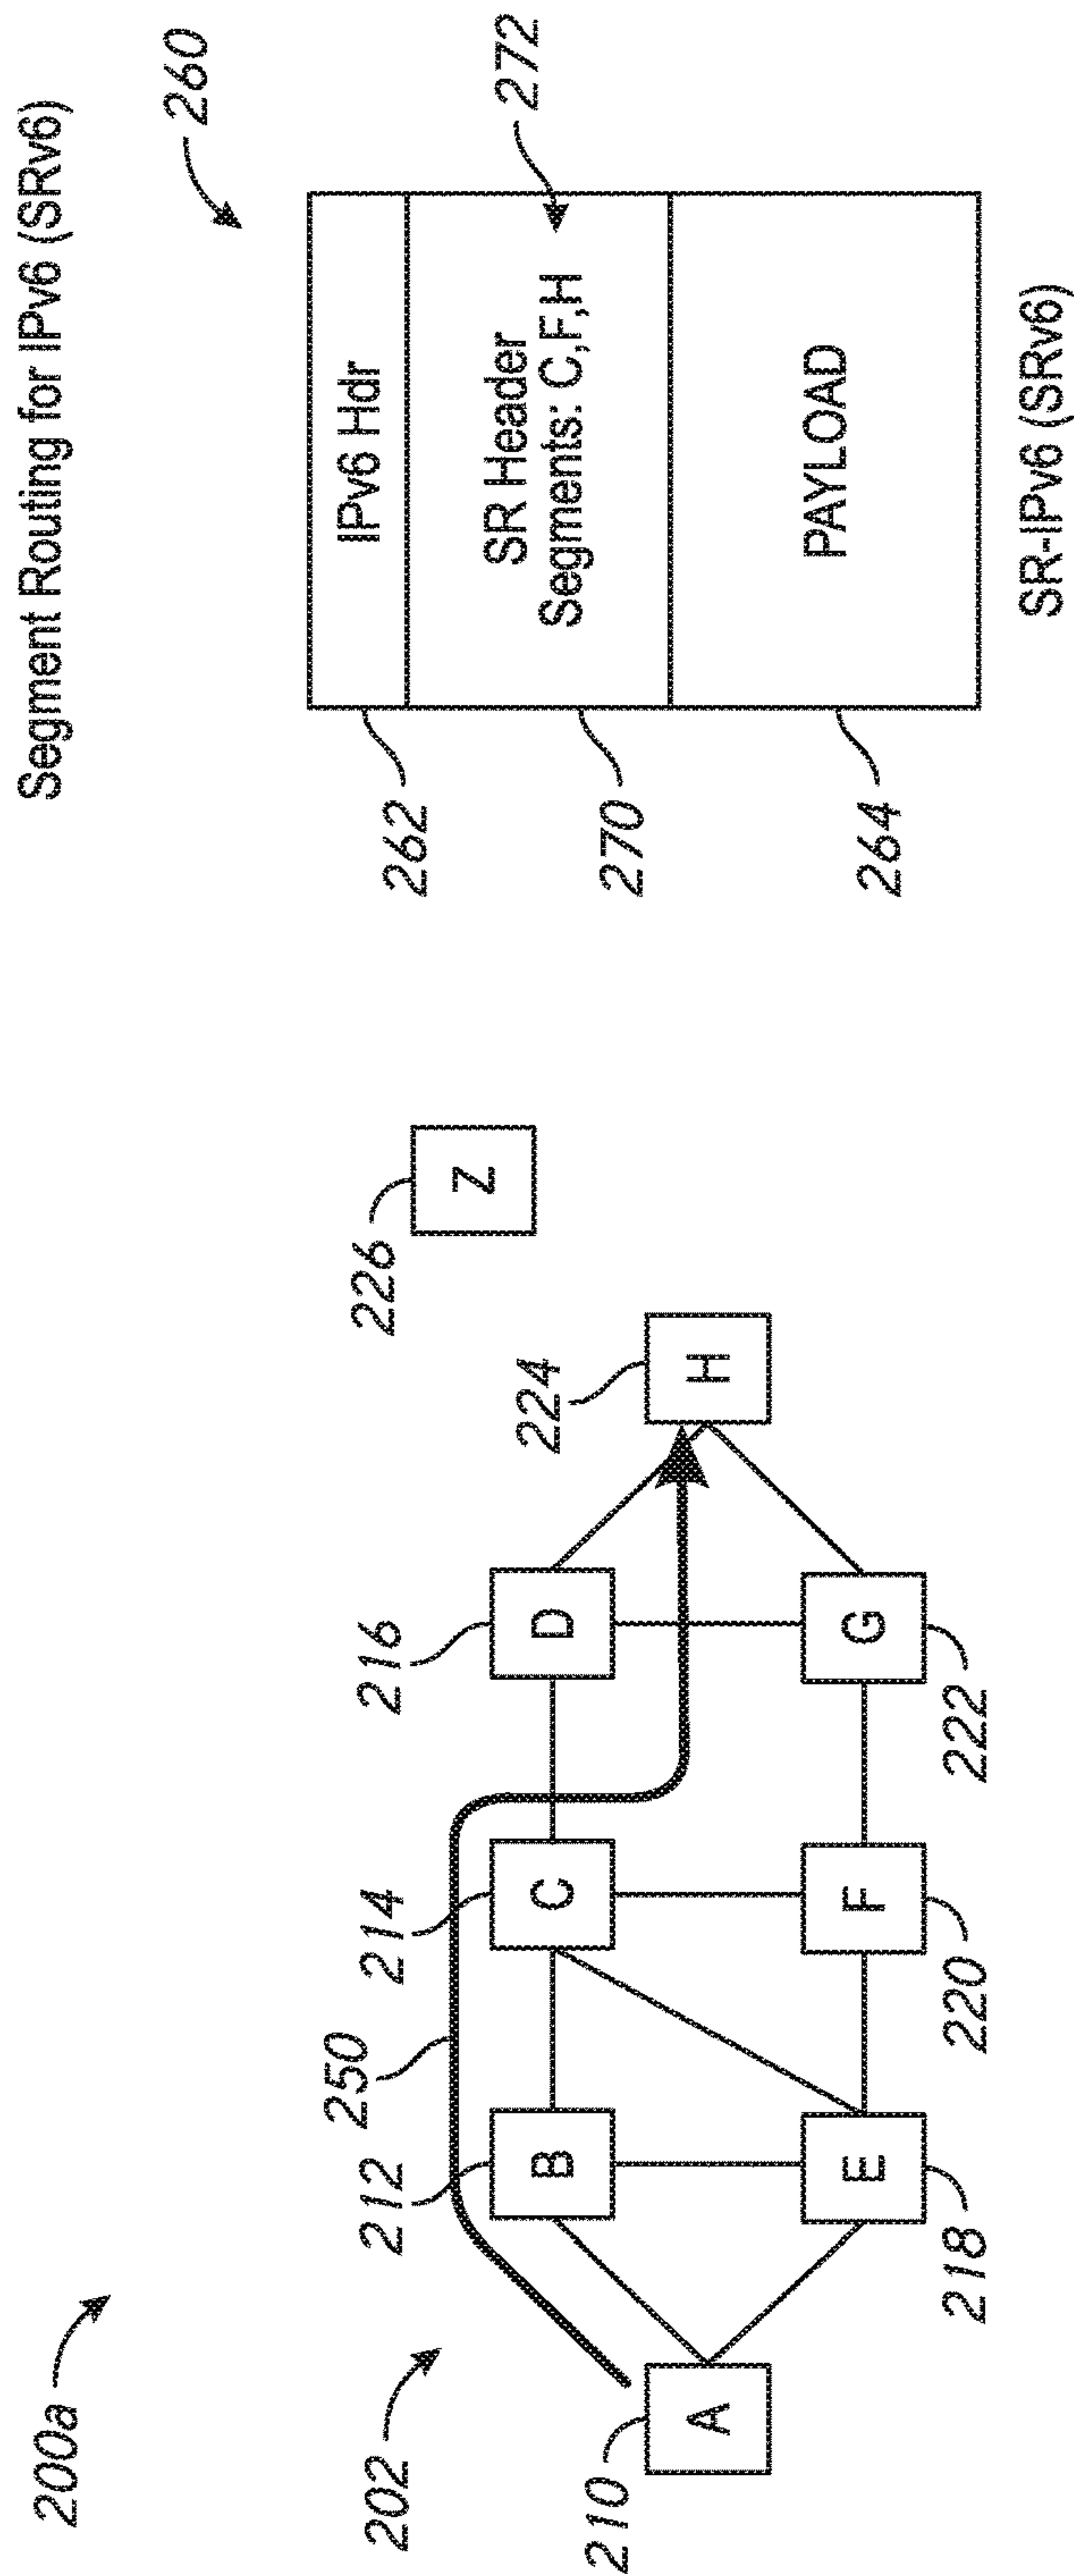


FIG. 2A

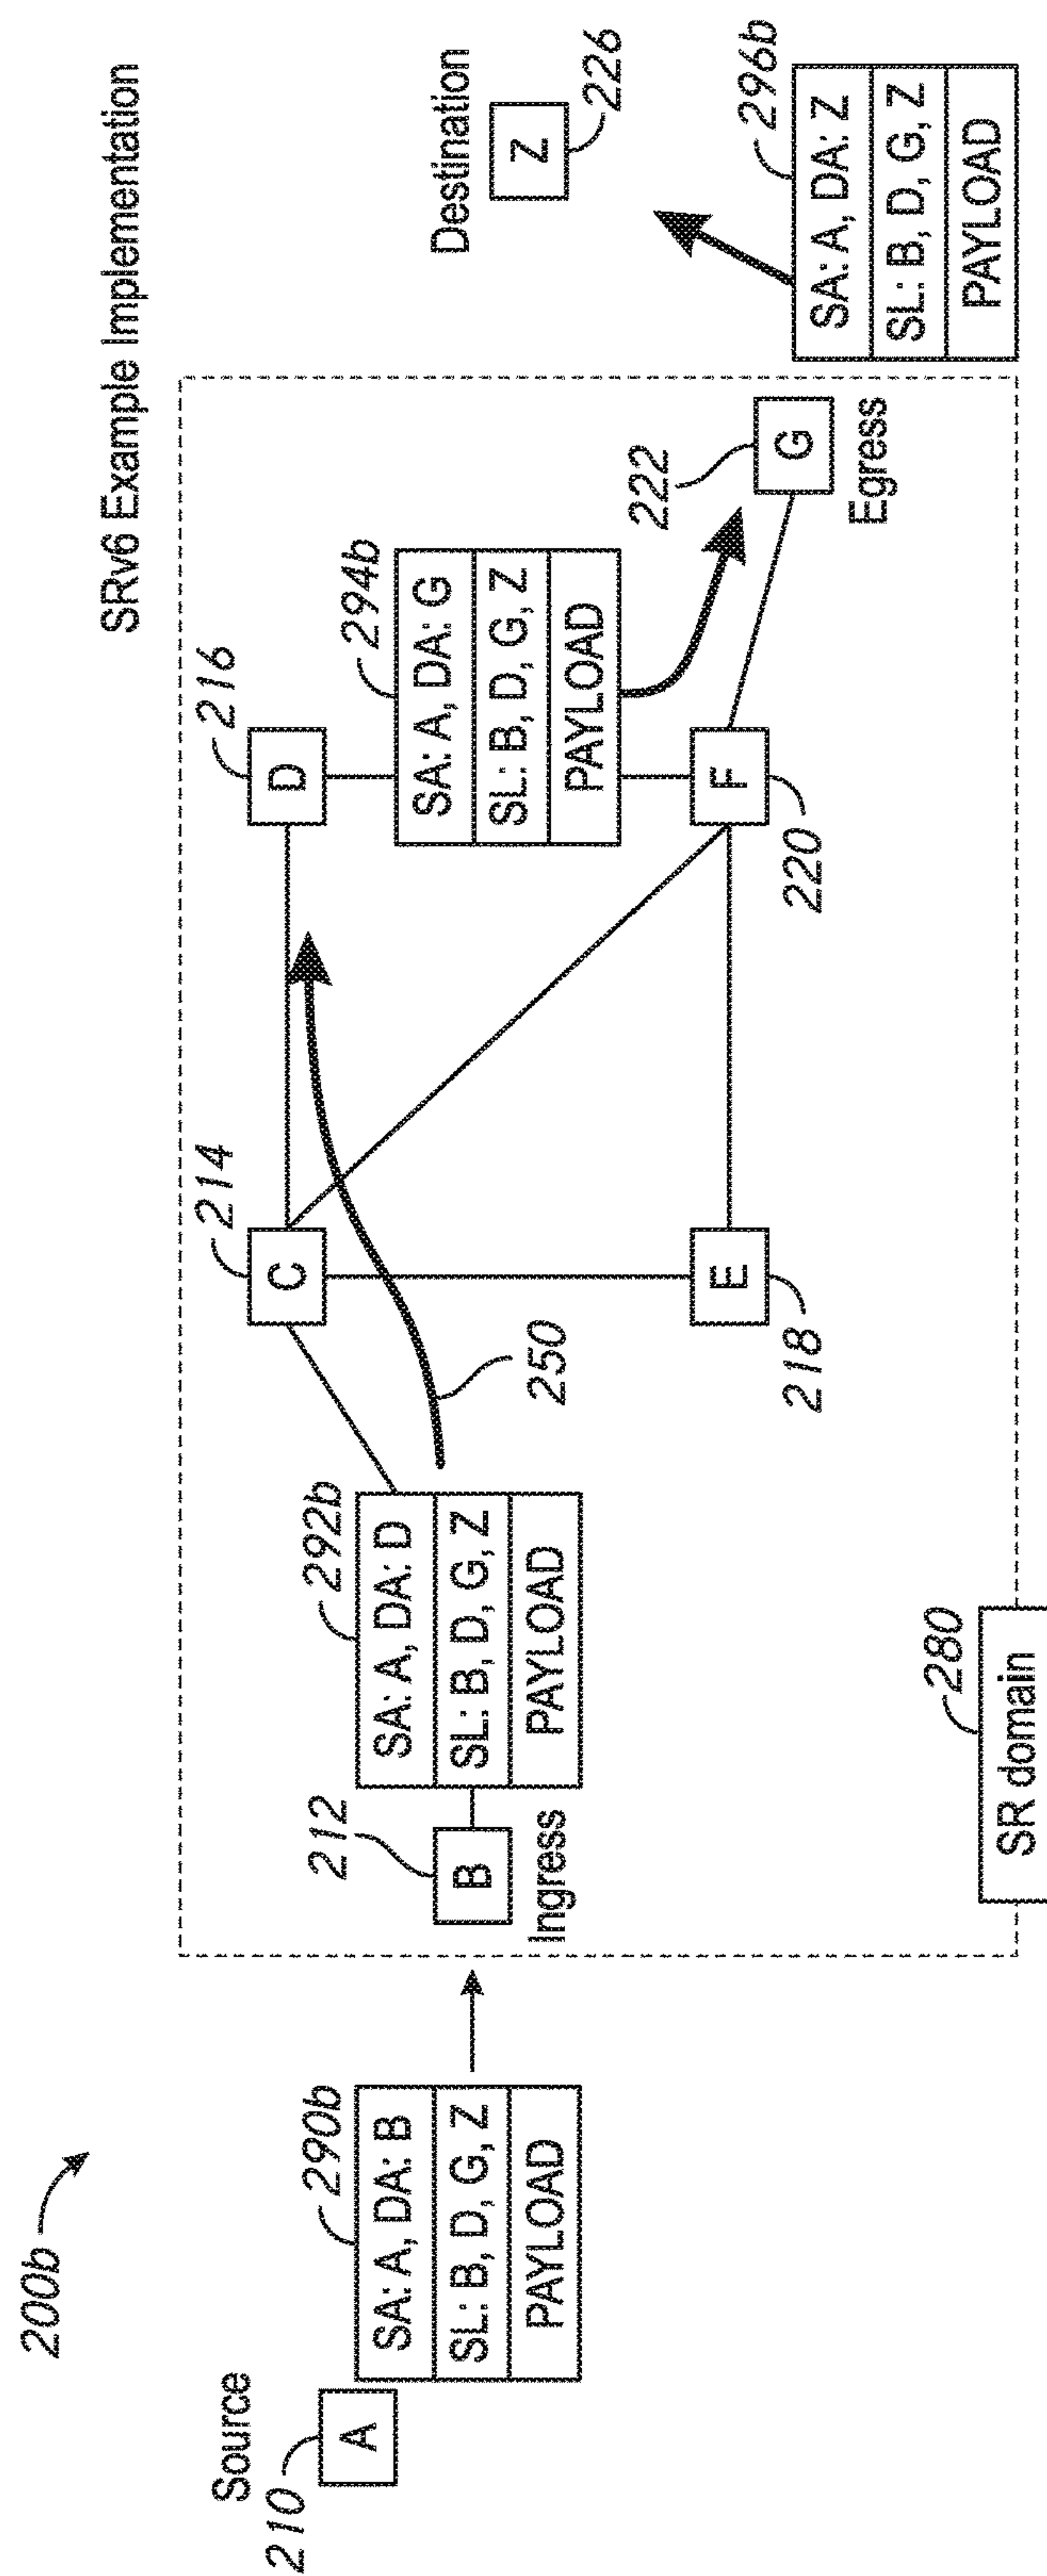


FIG. 2B

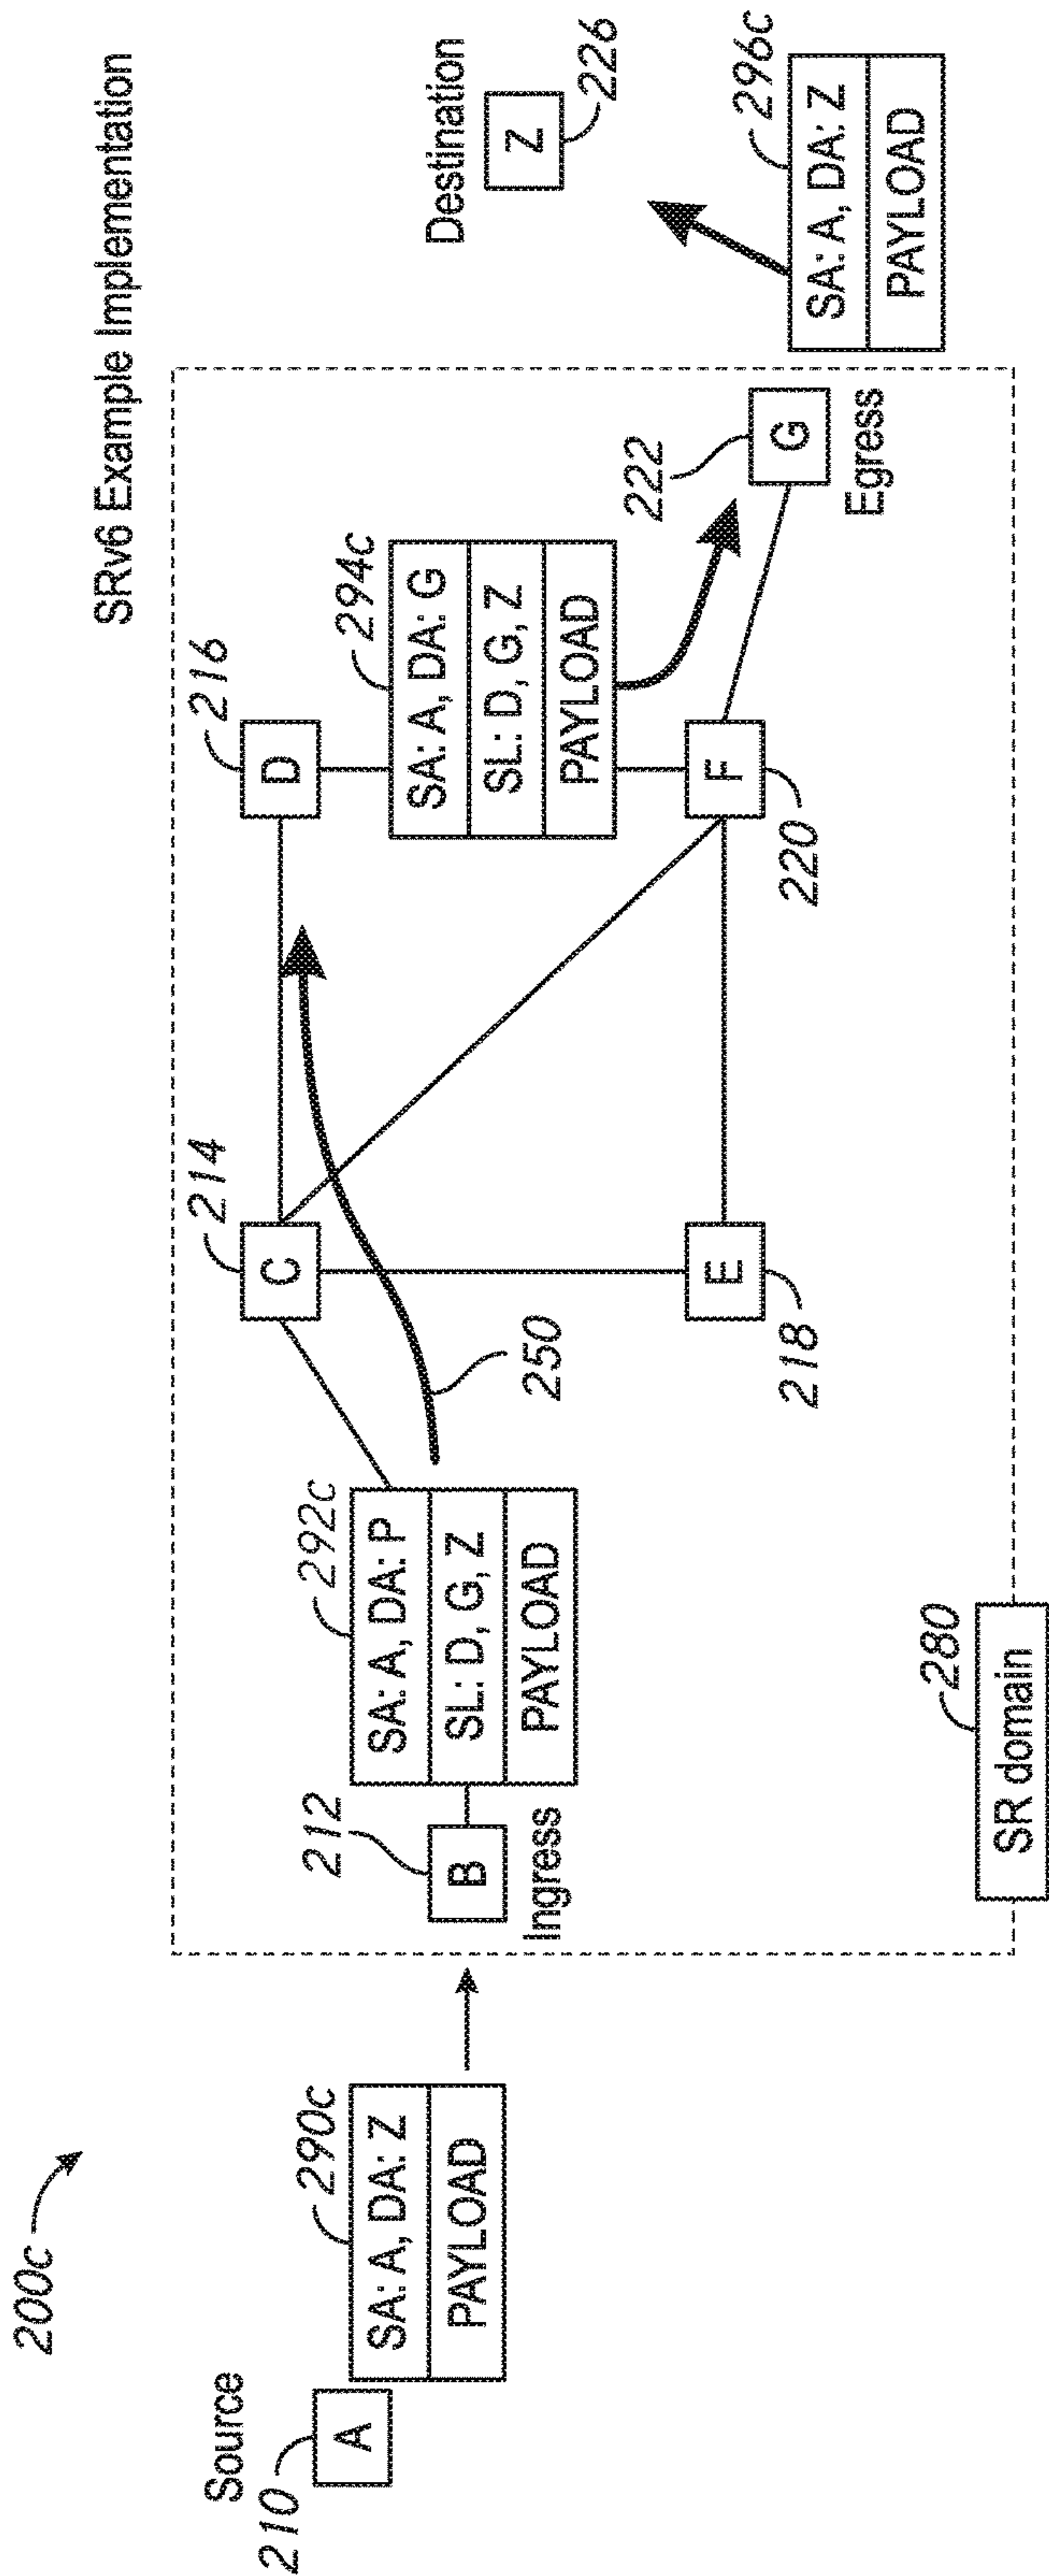


FIG. 2C

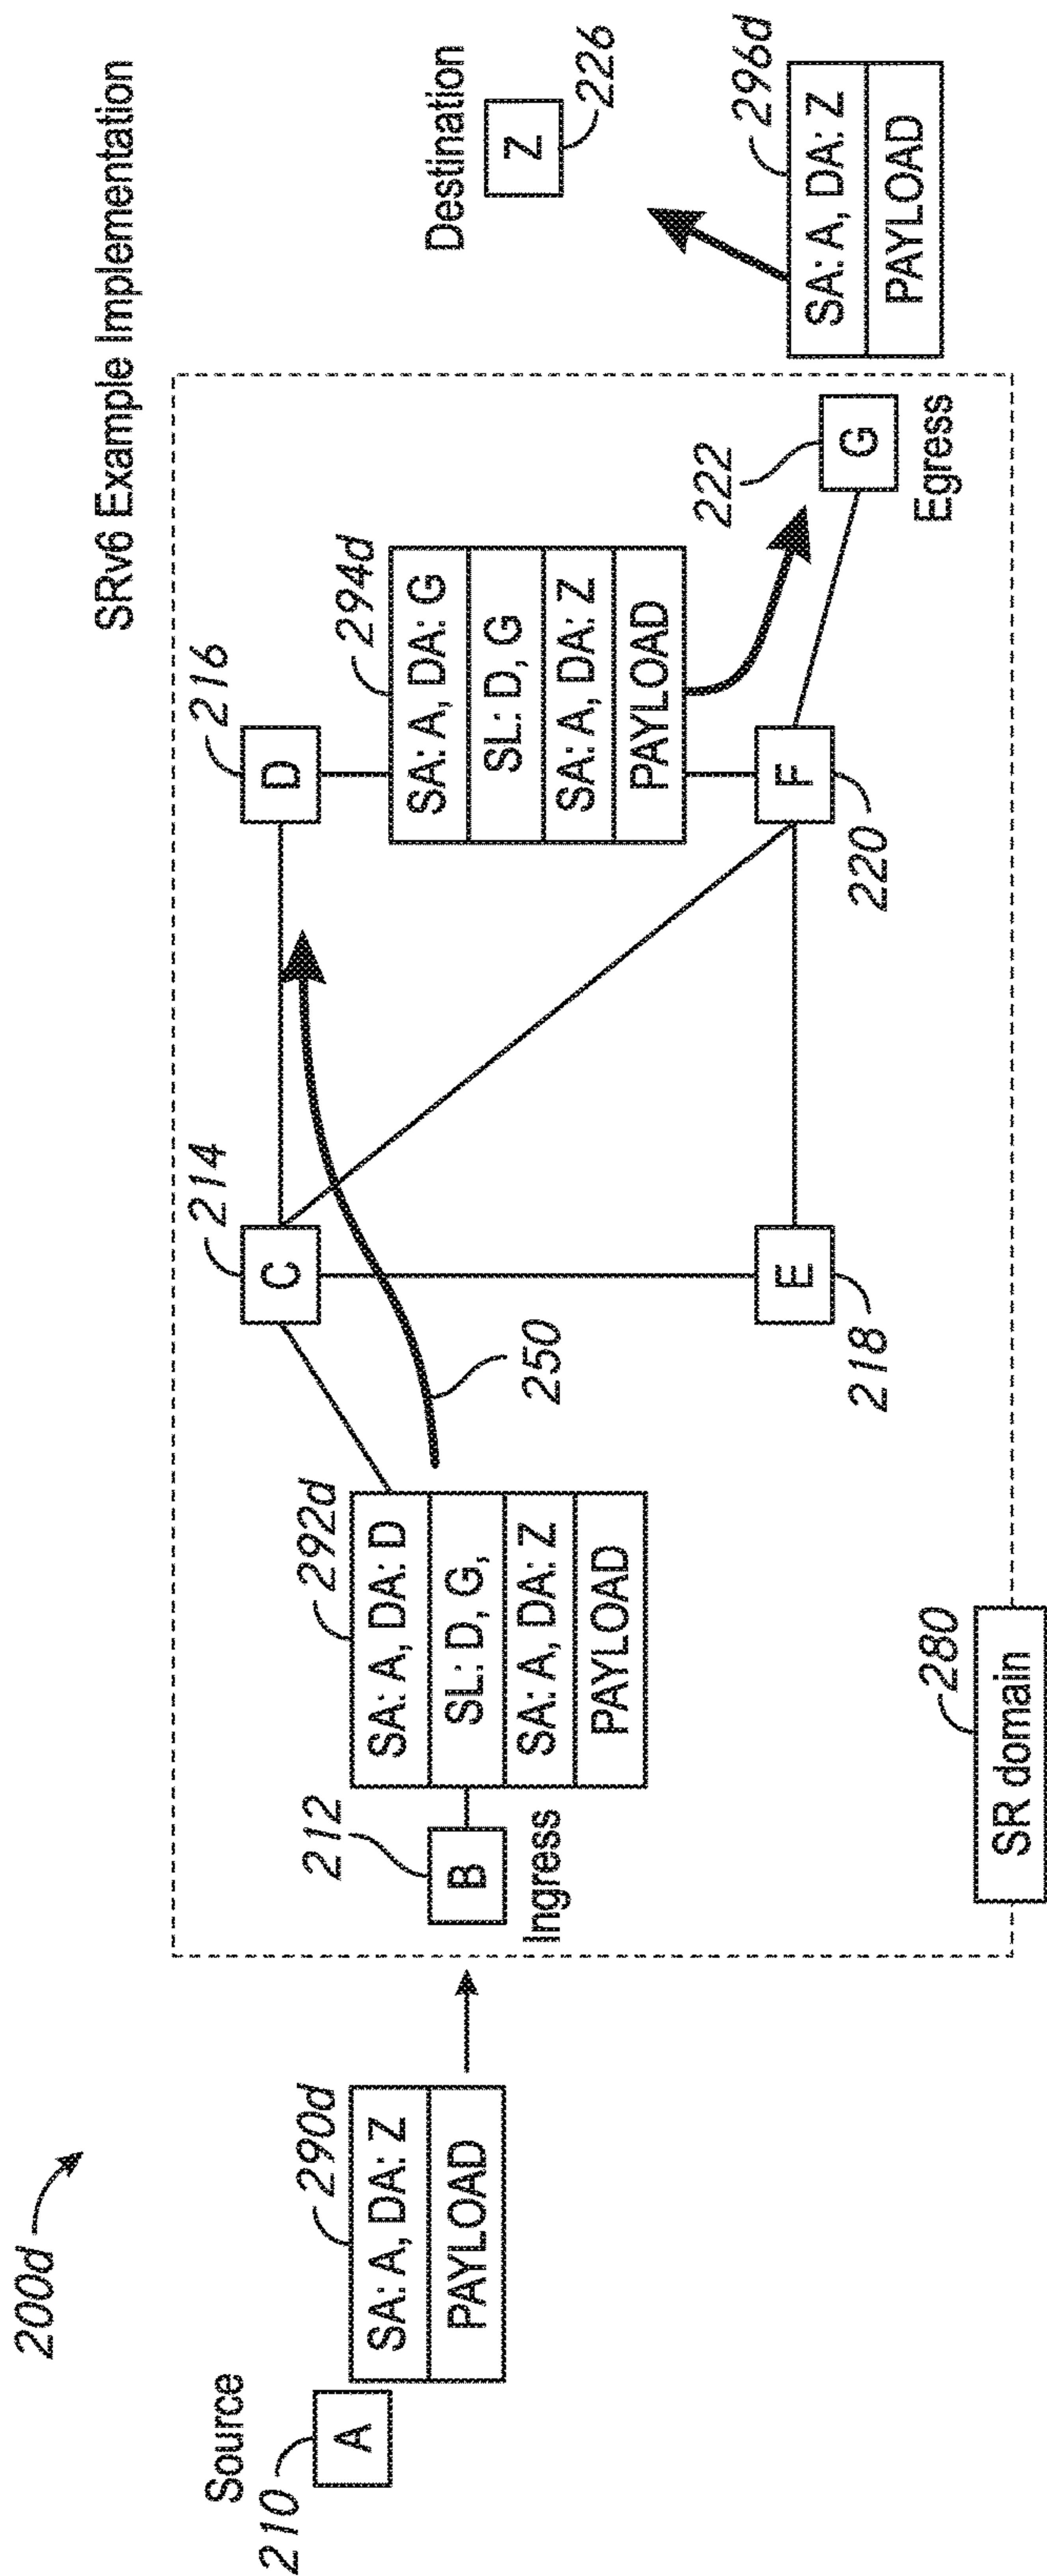


FIG. 2D

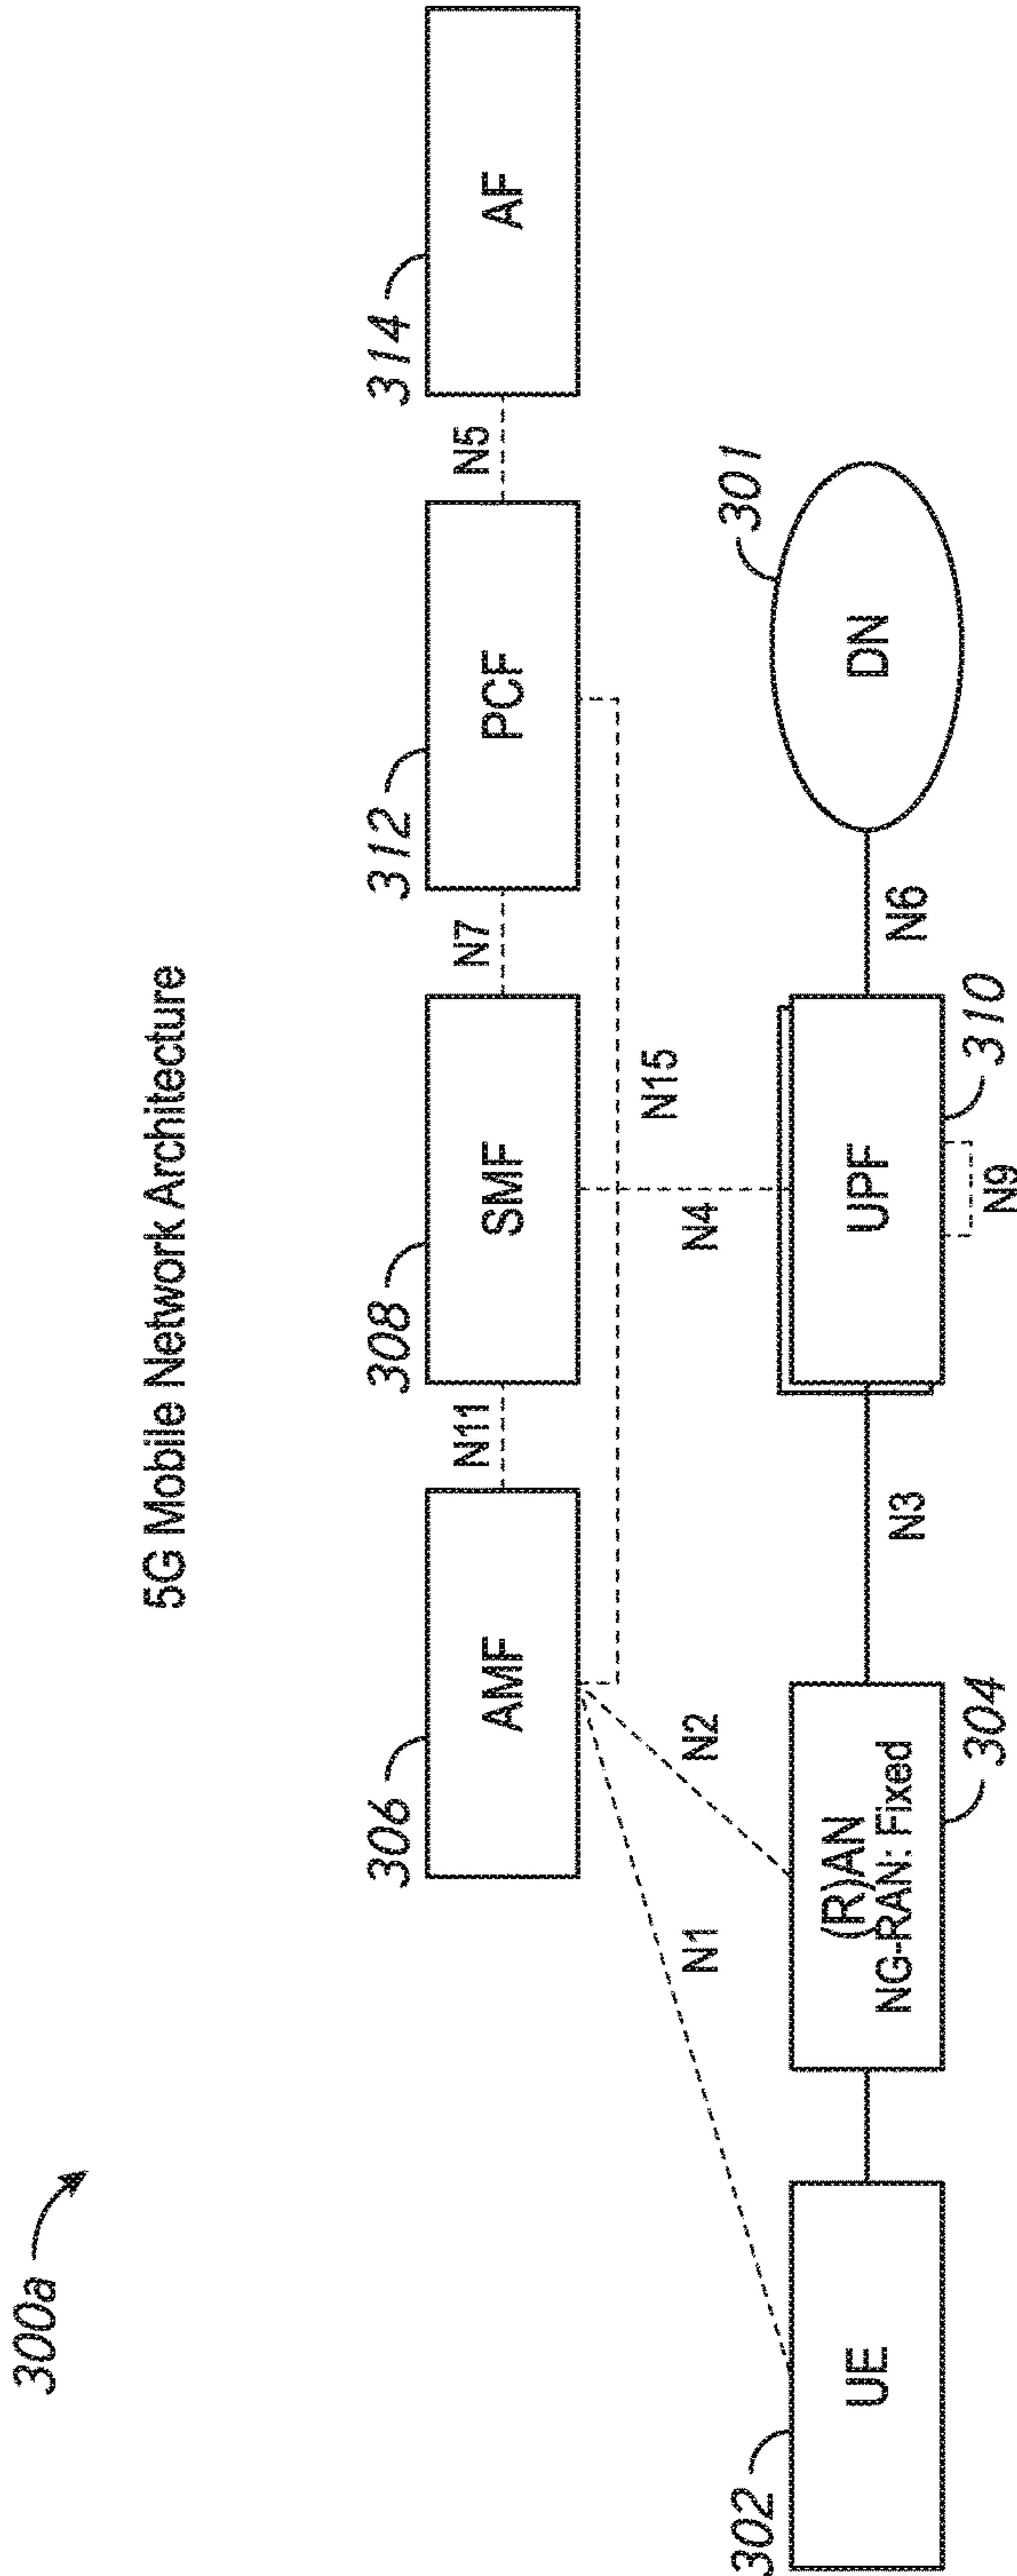


FIG. 3A

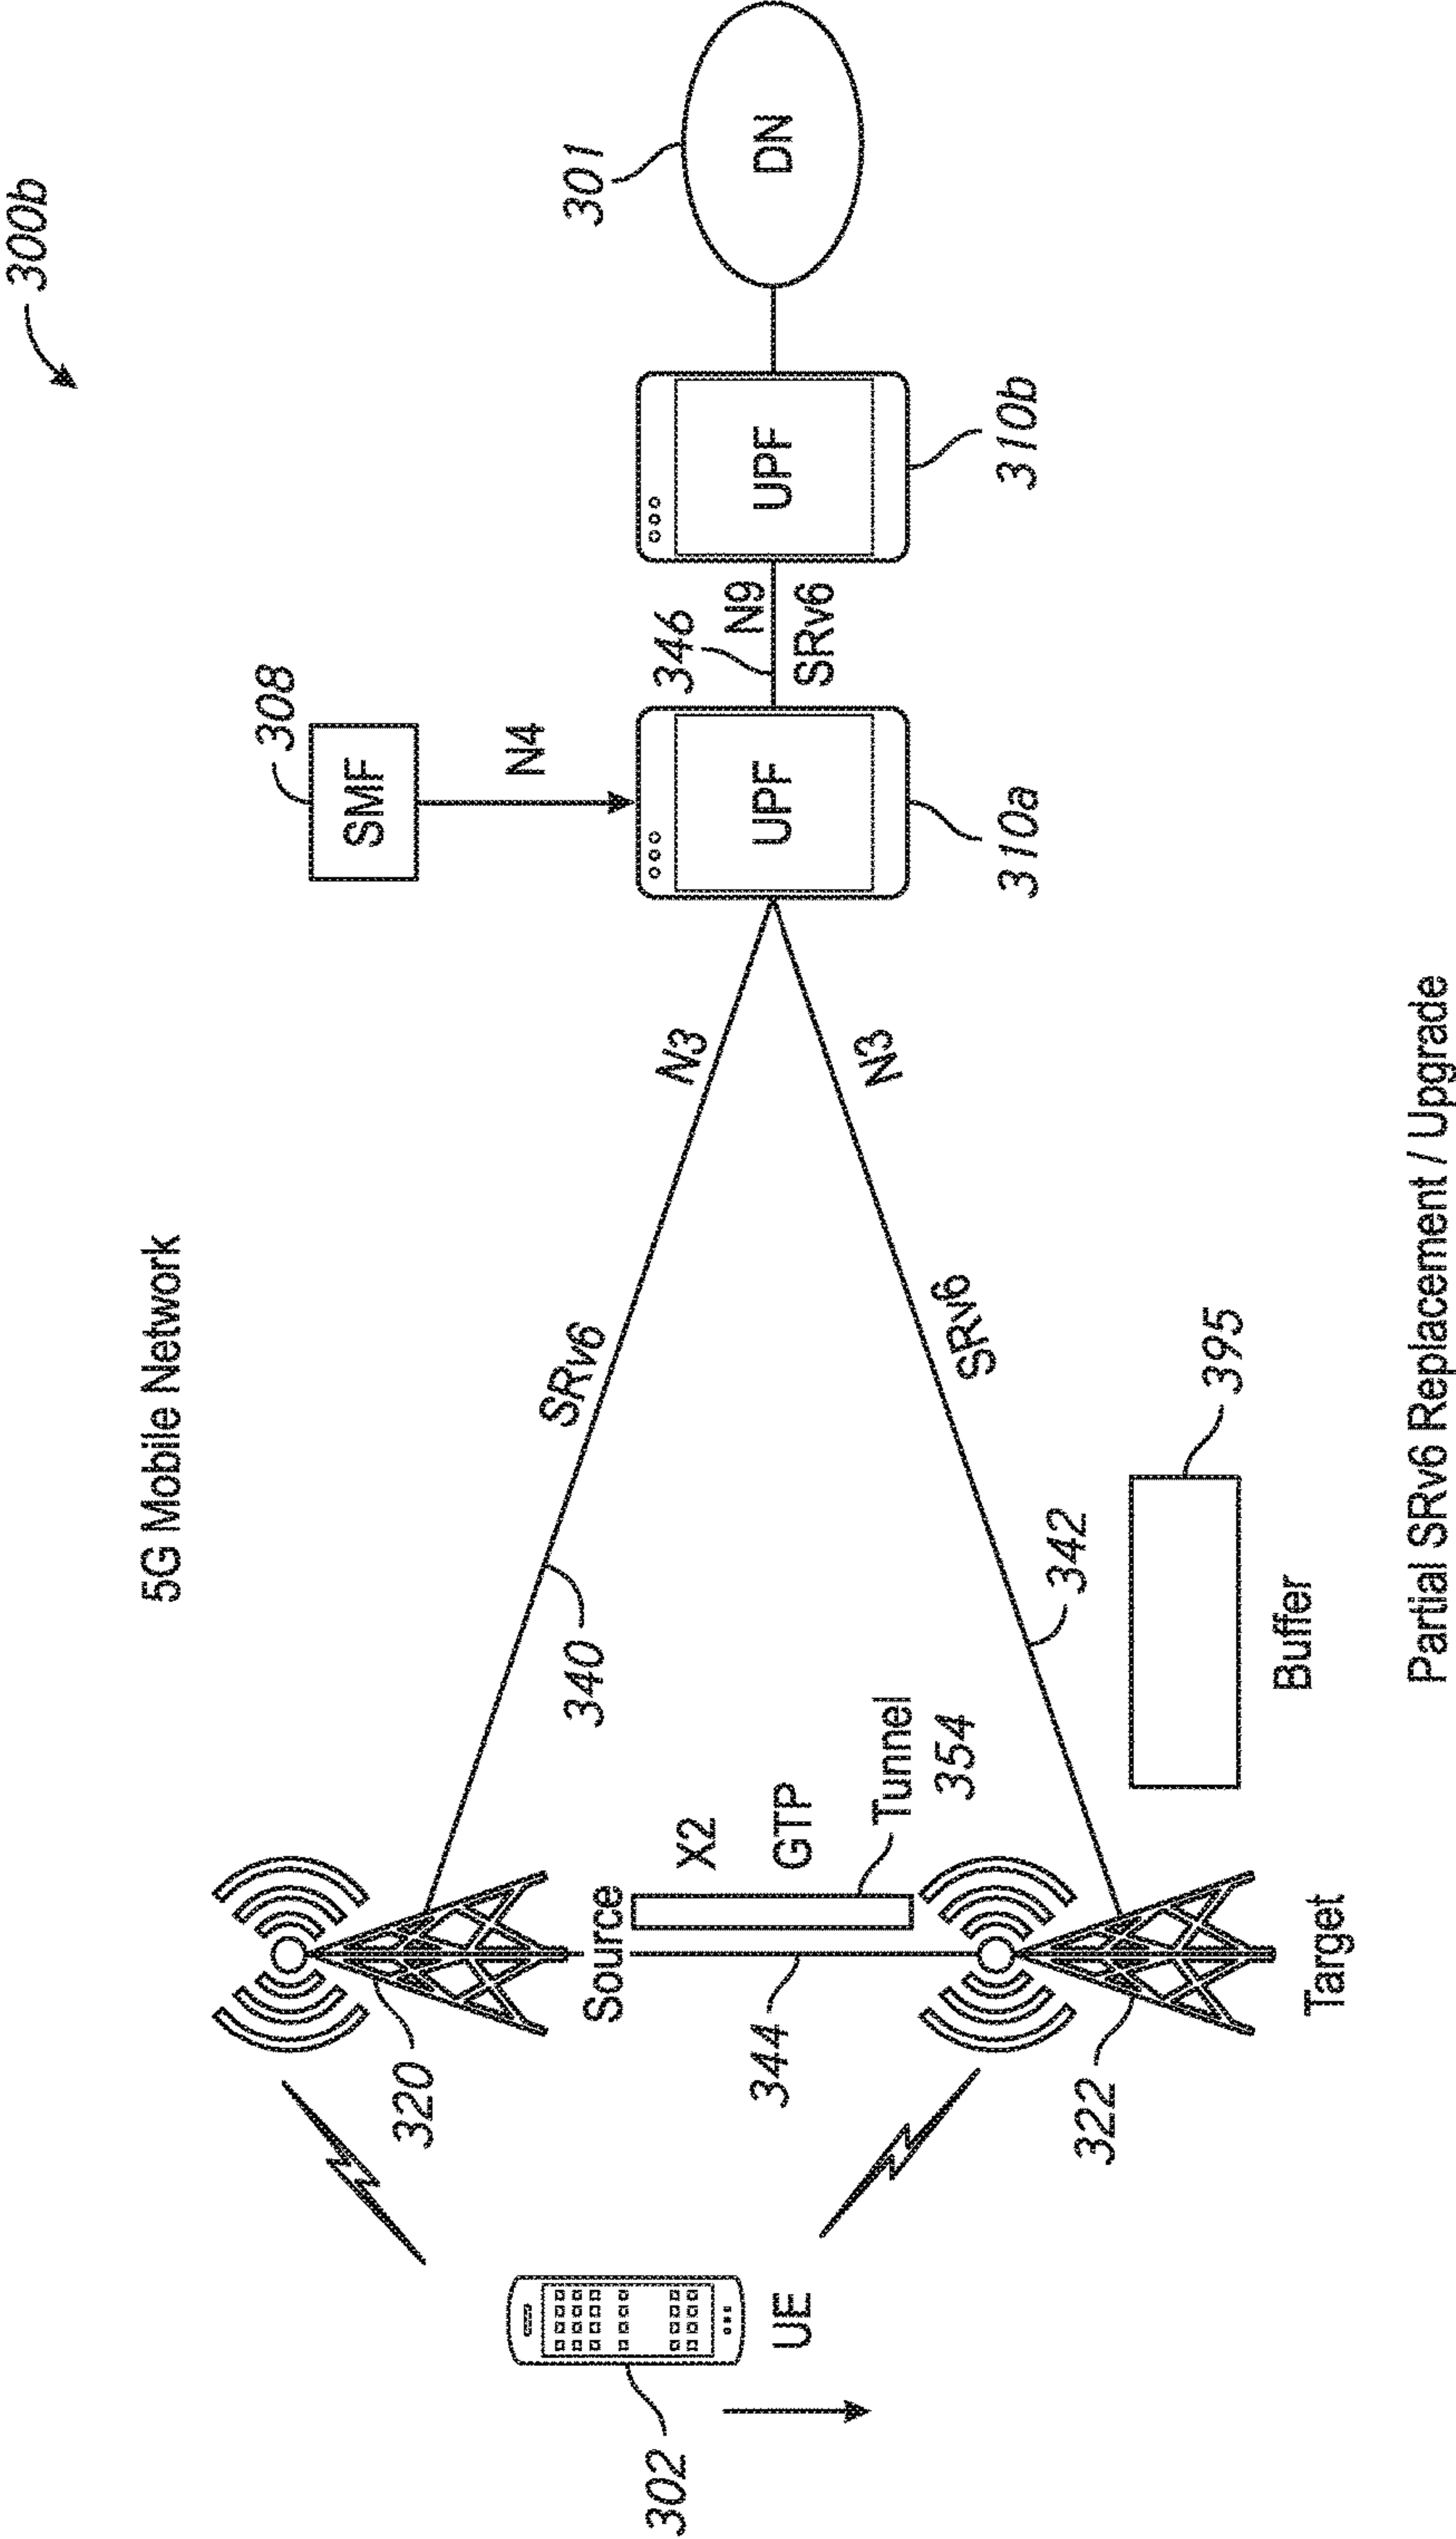


FIG. 3B

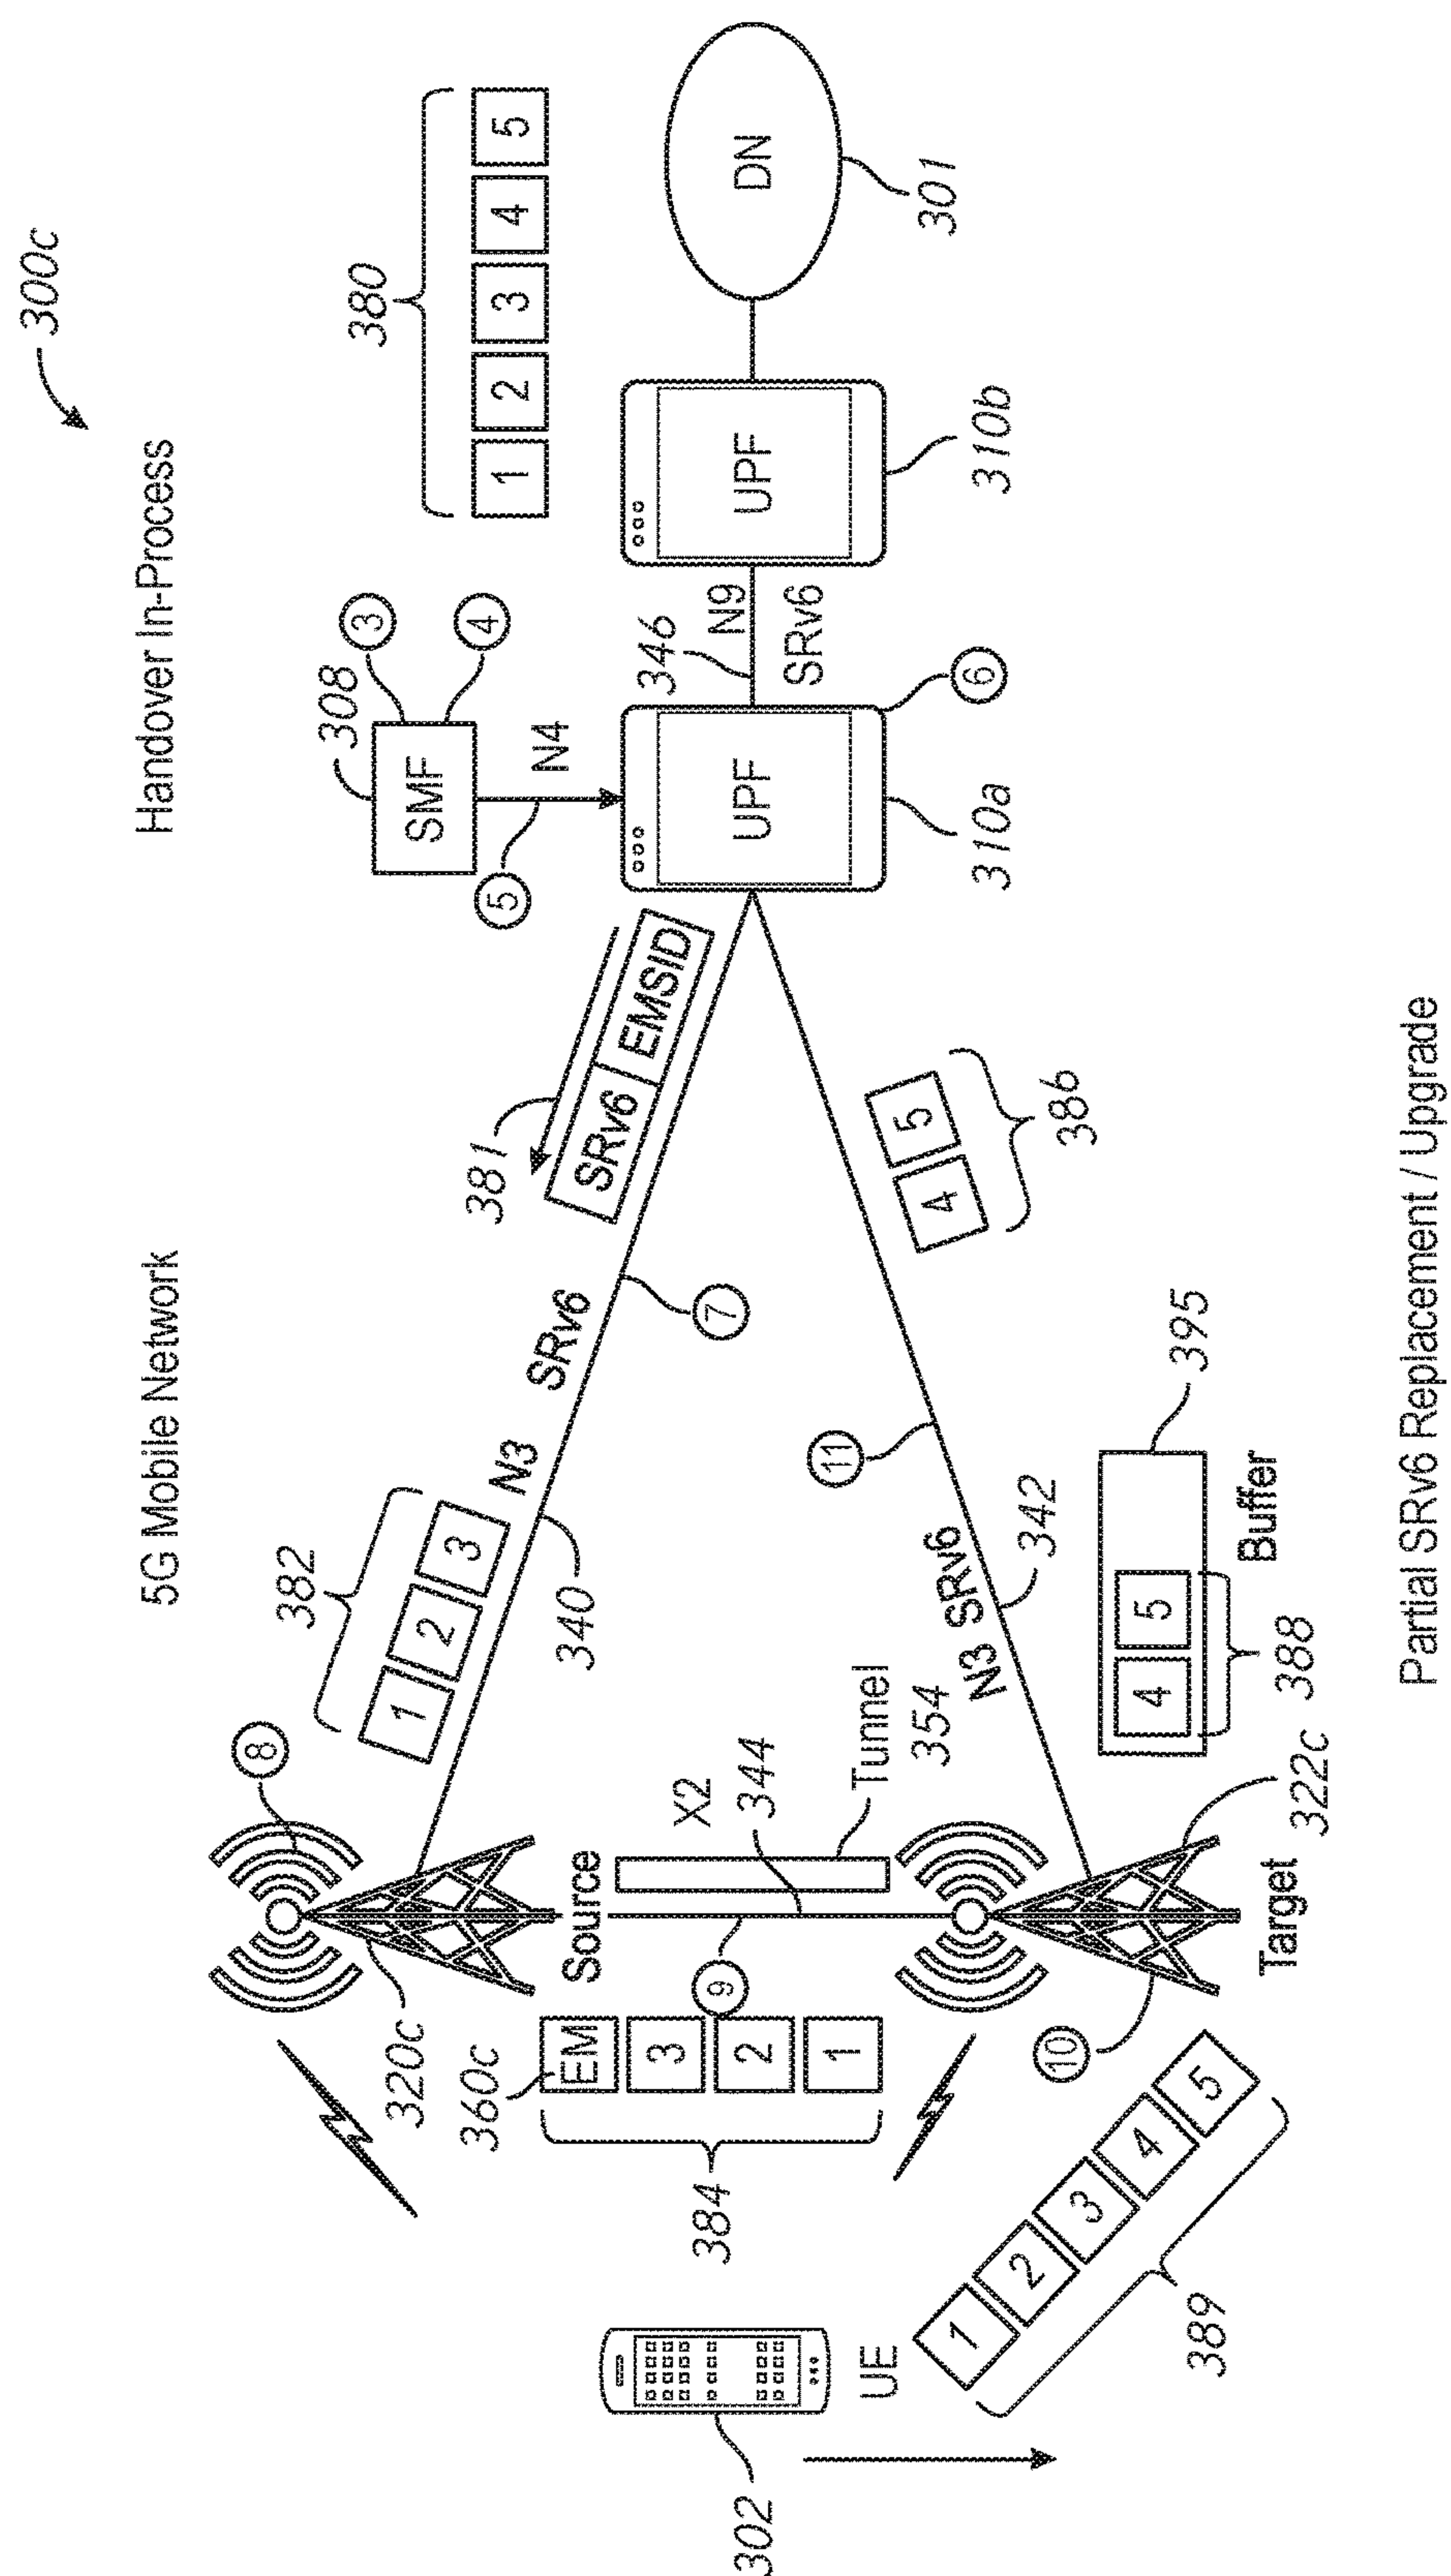


FIG. 3C

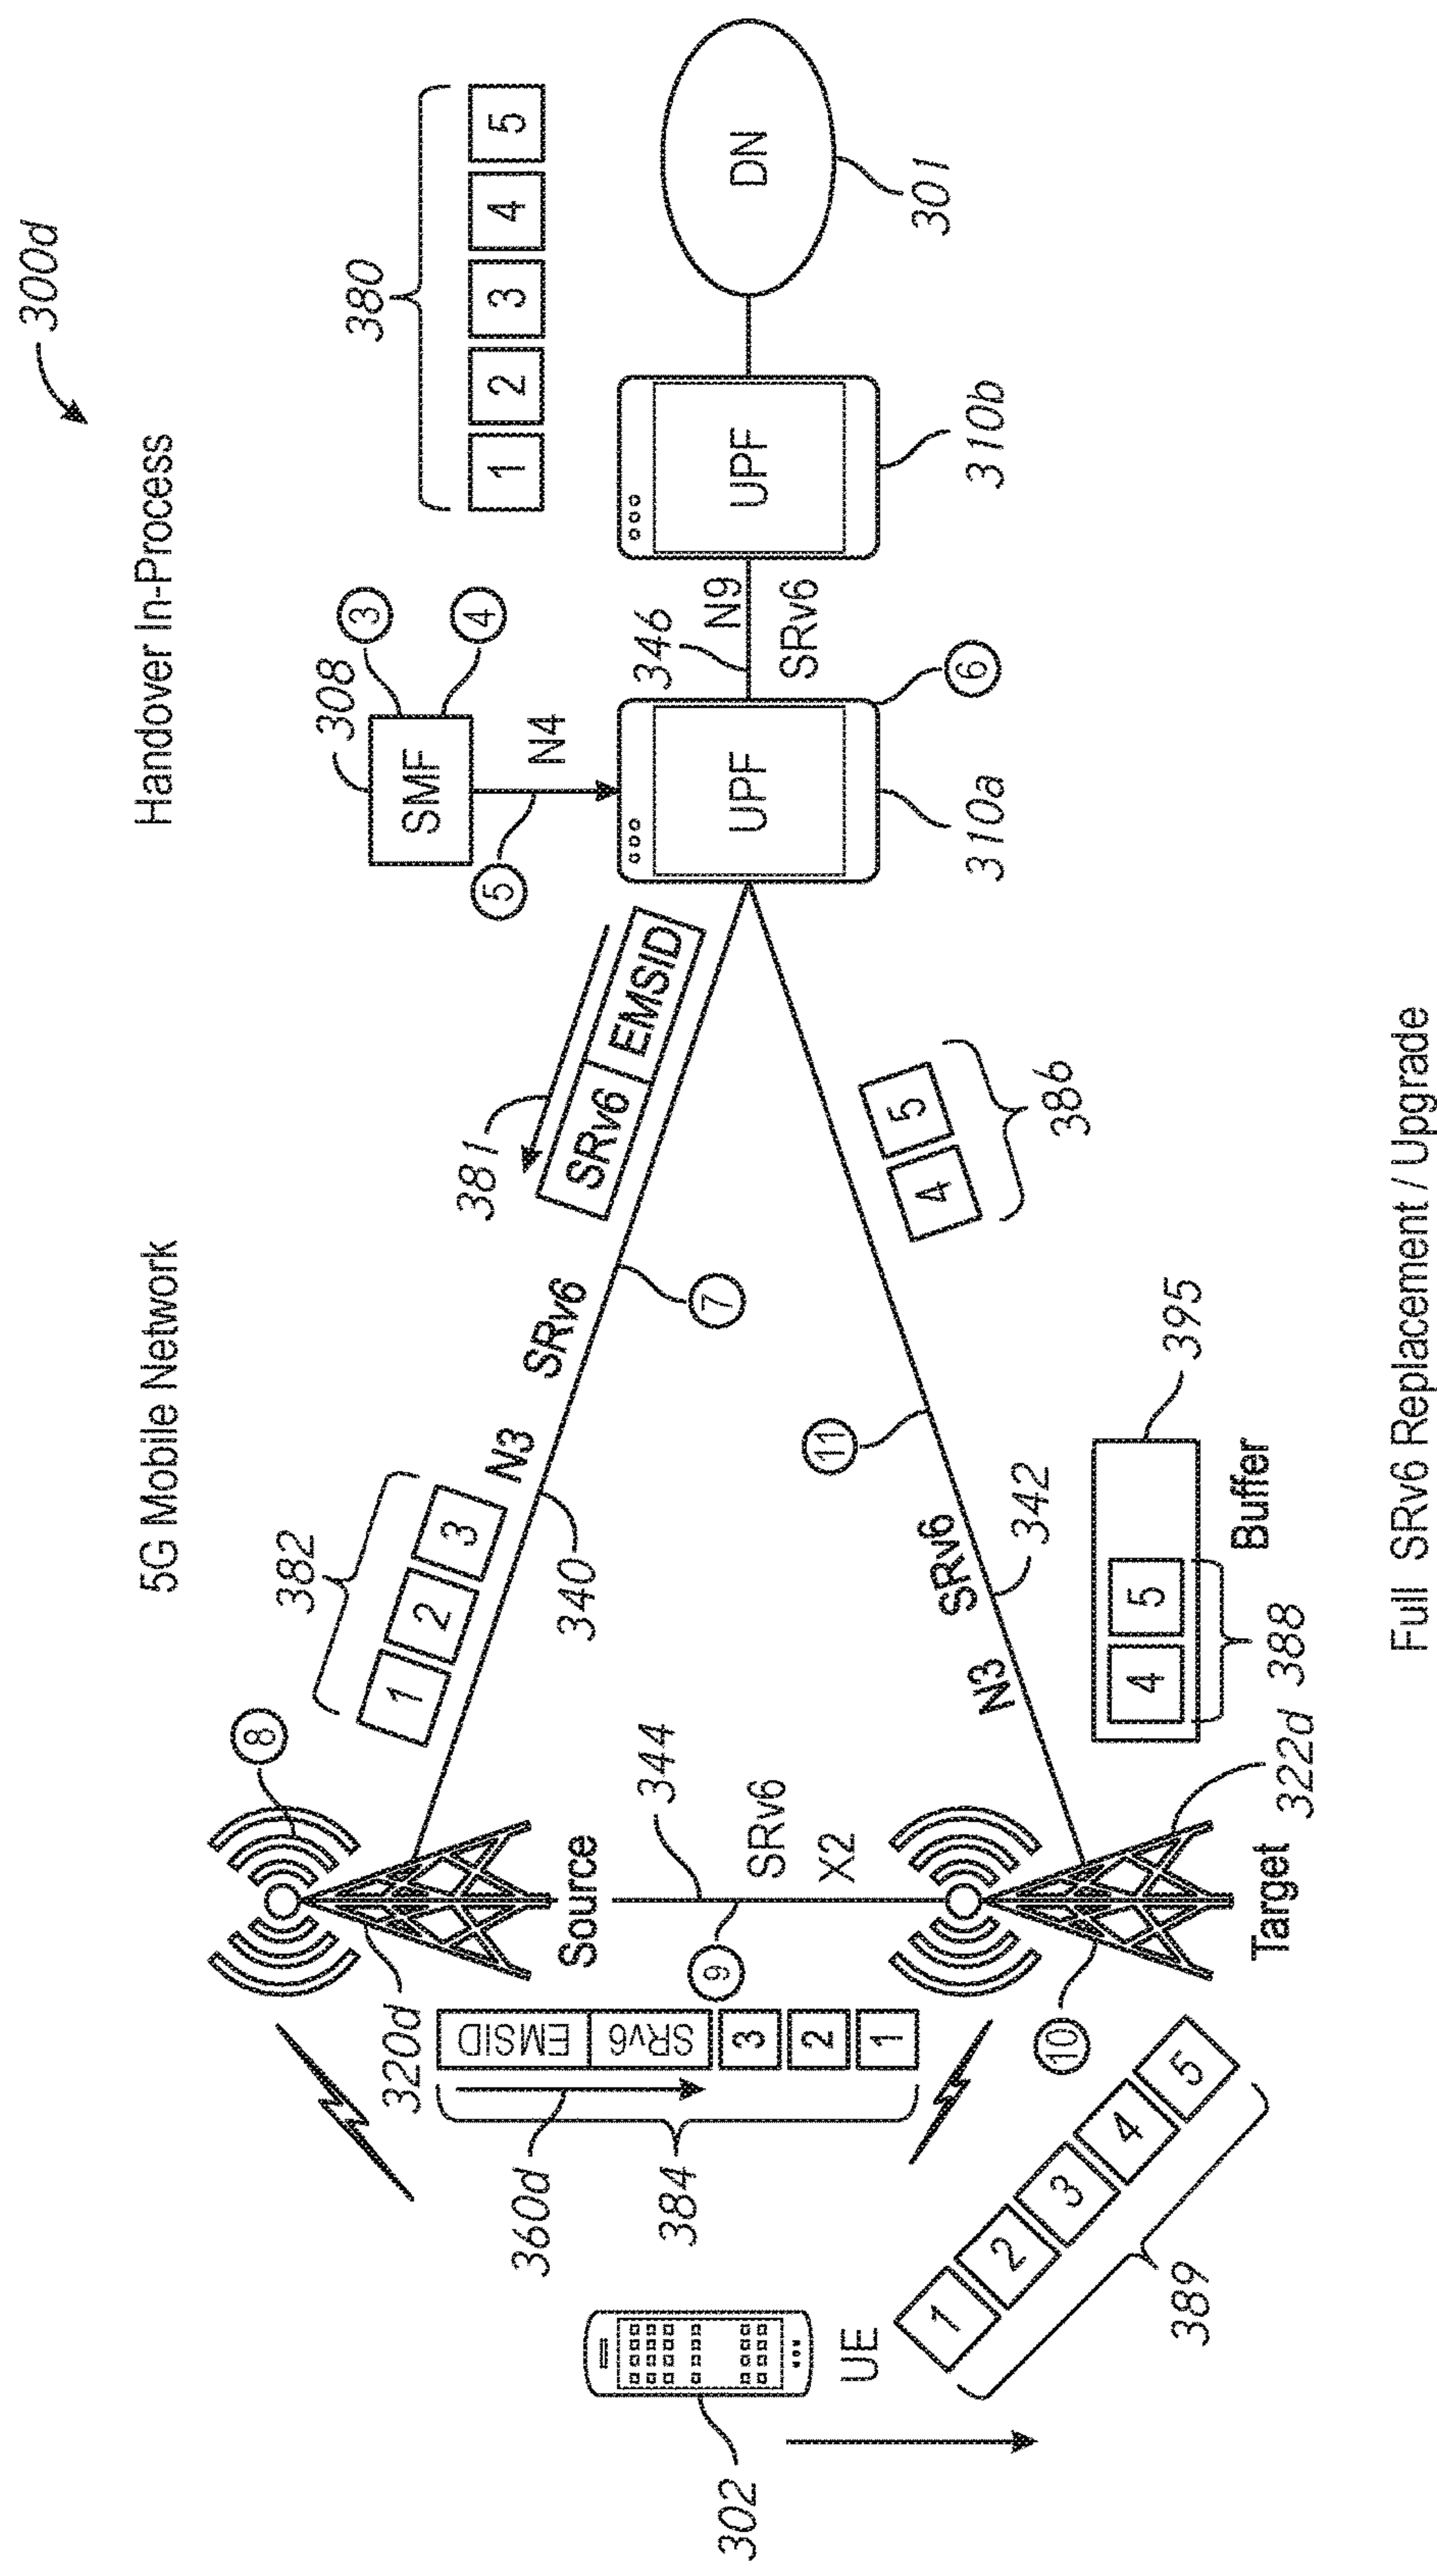


FIG. 3D

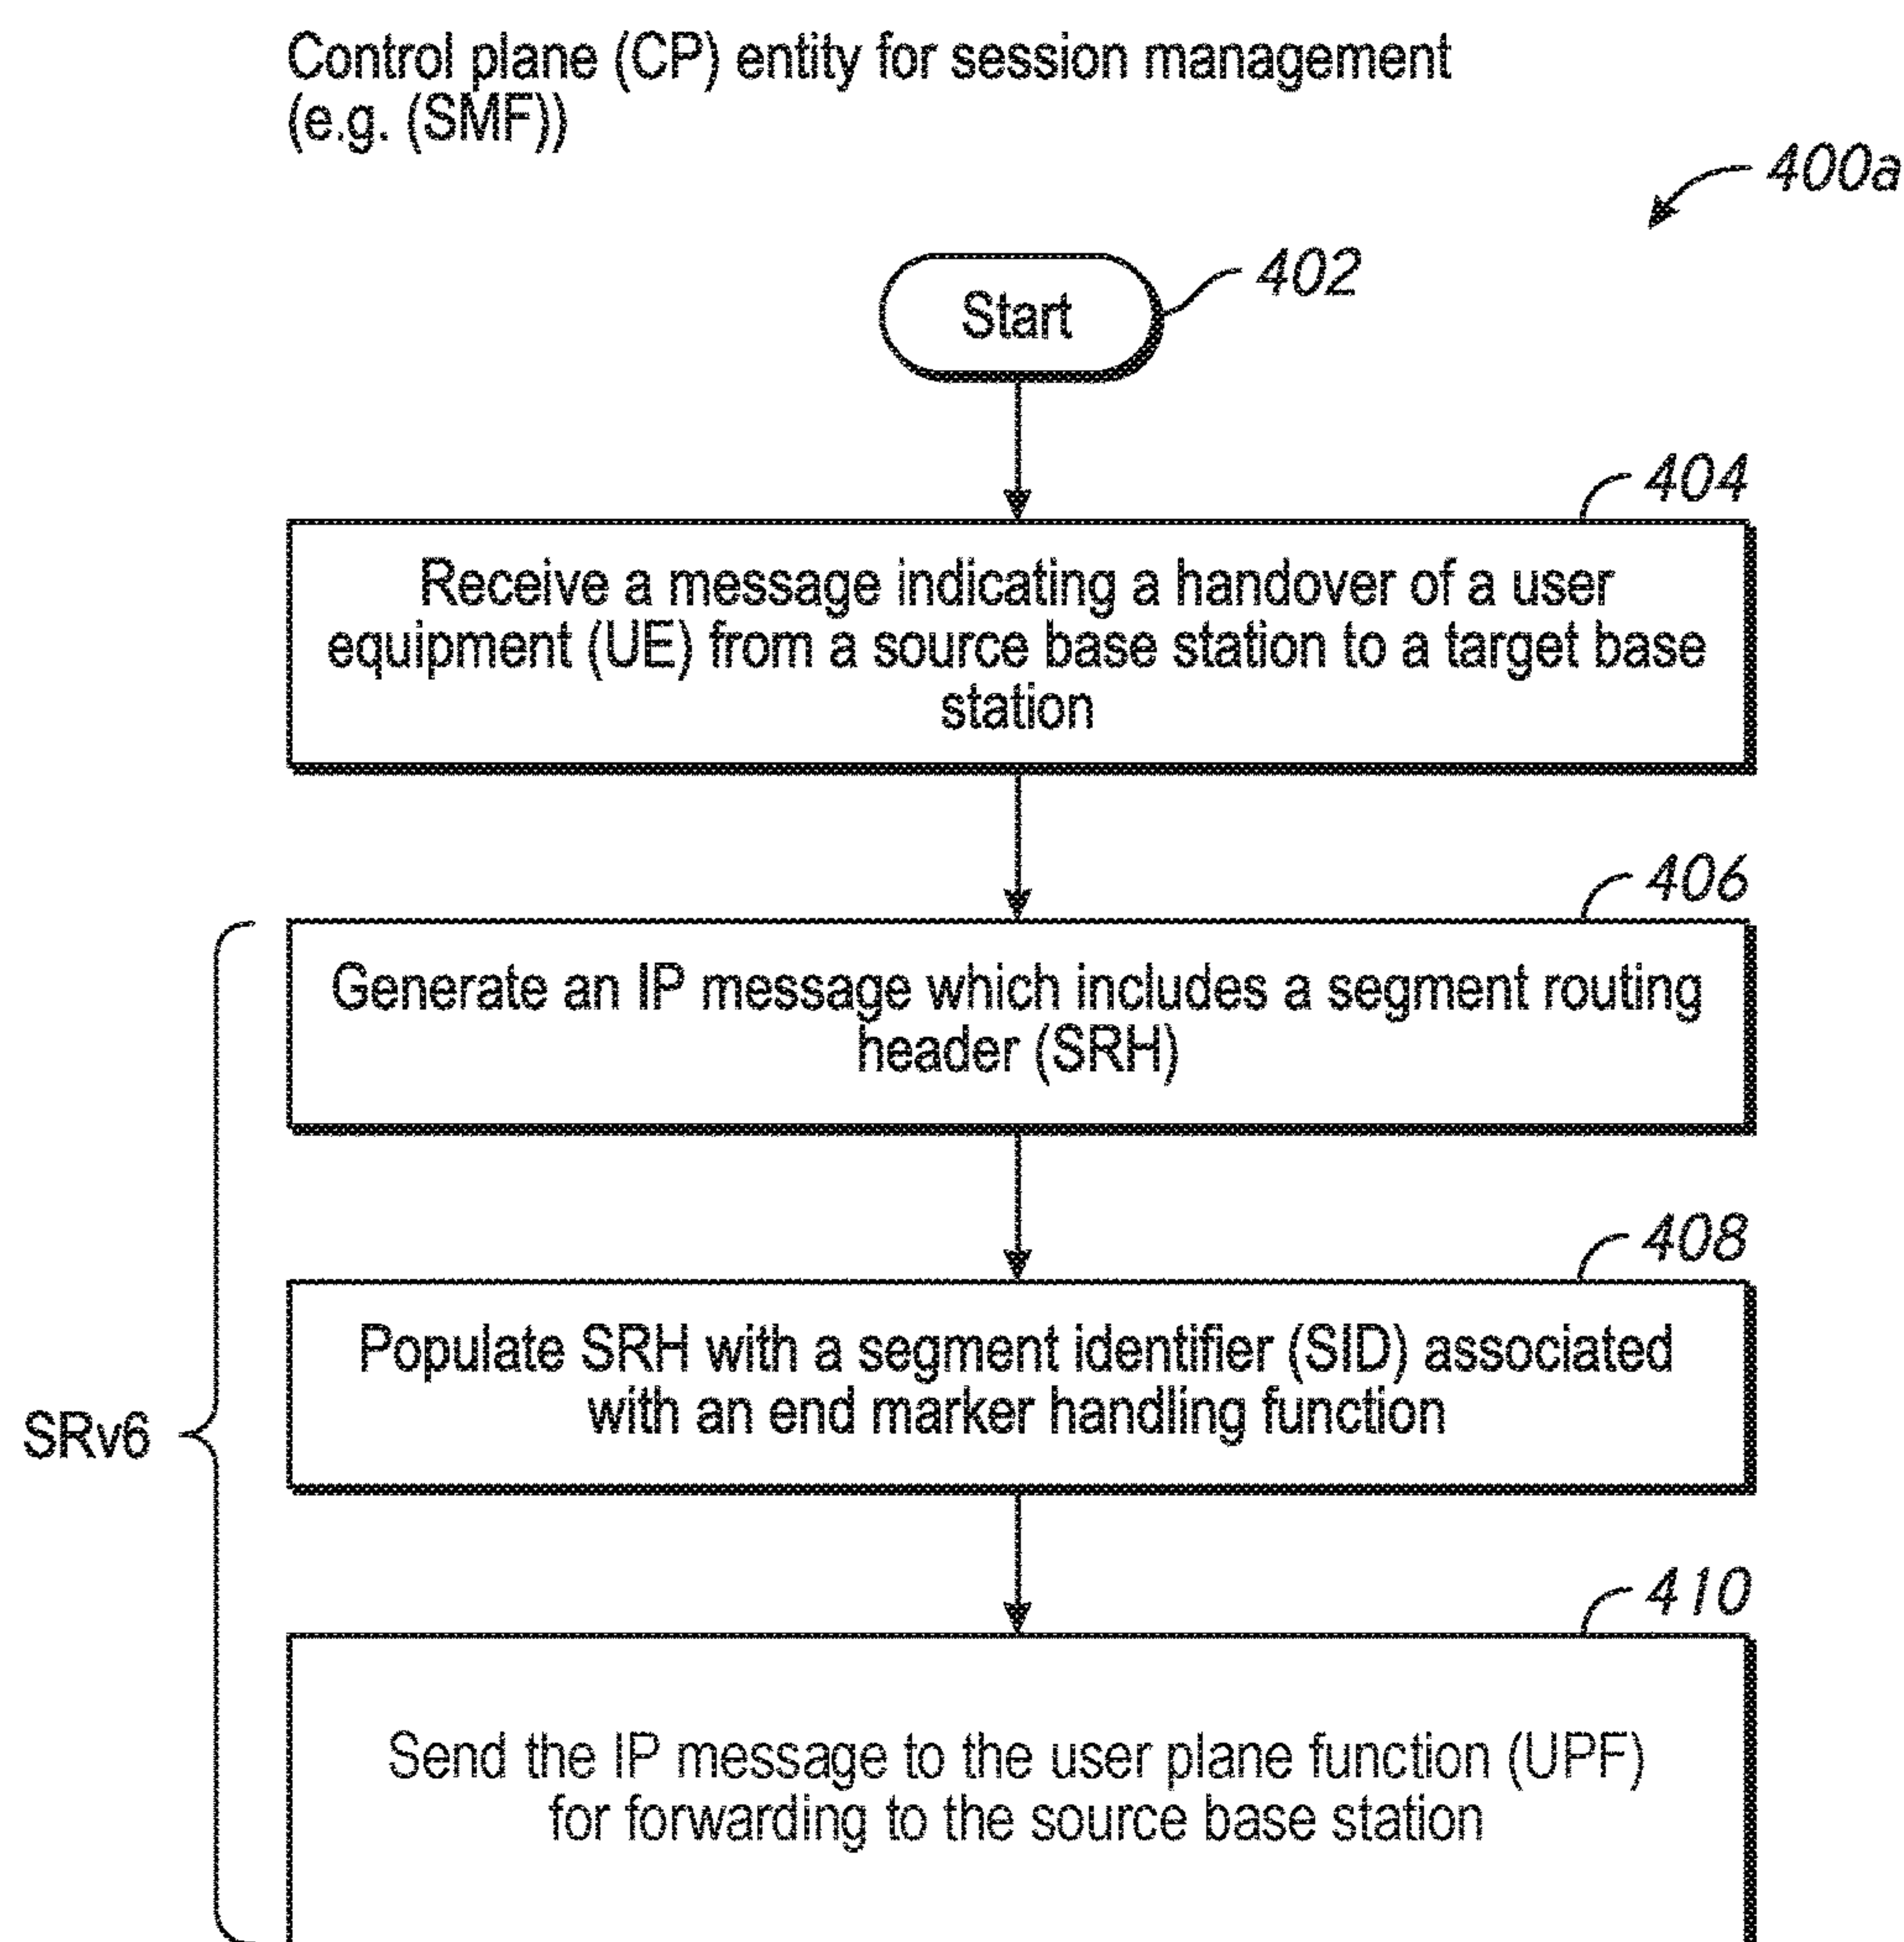


FIG. 4A

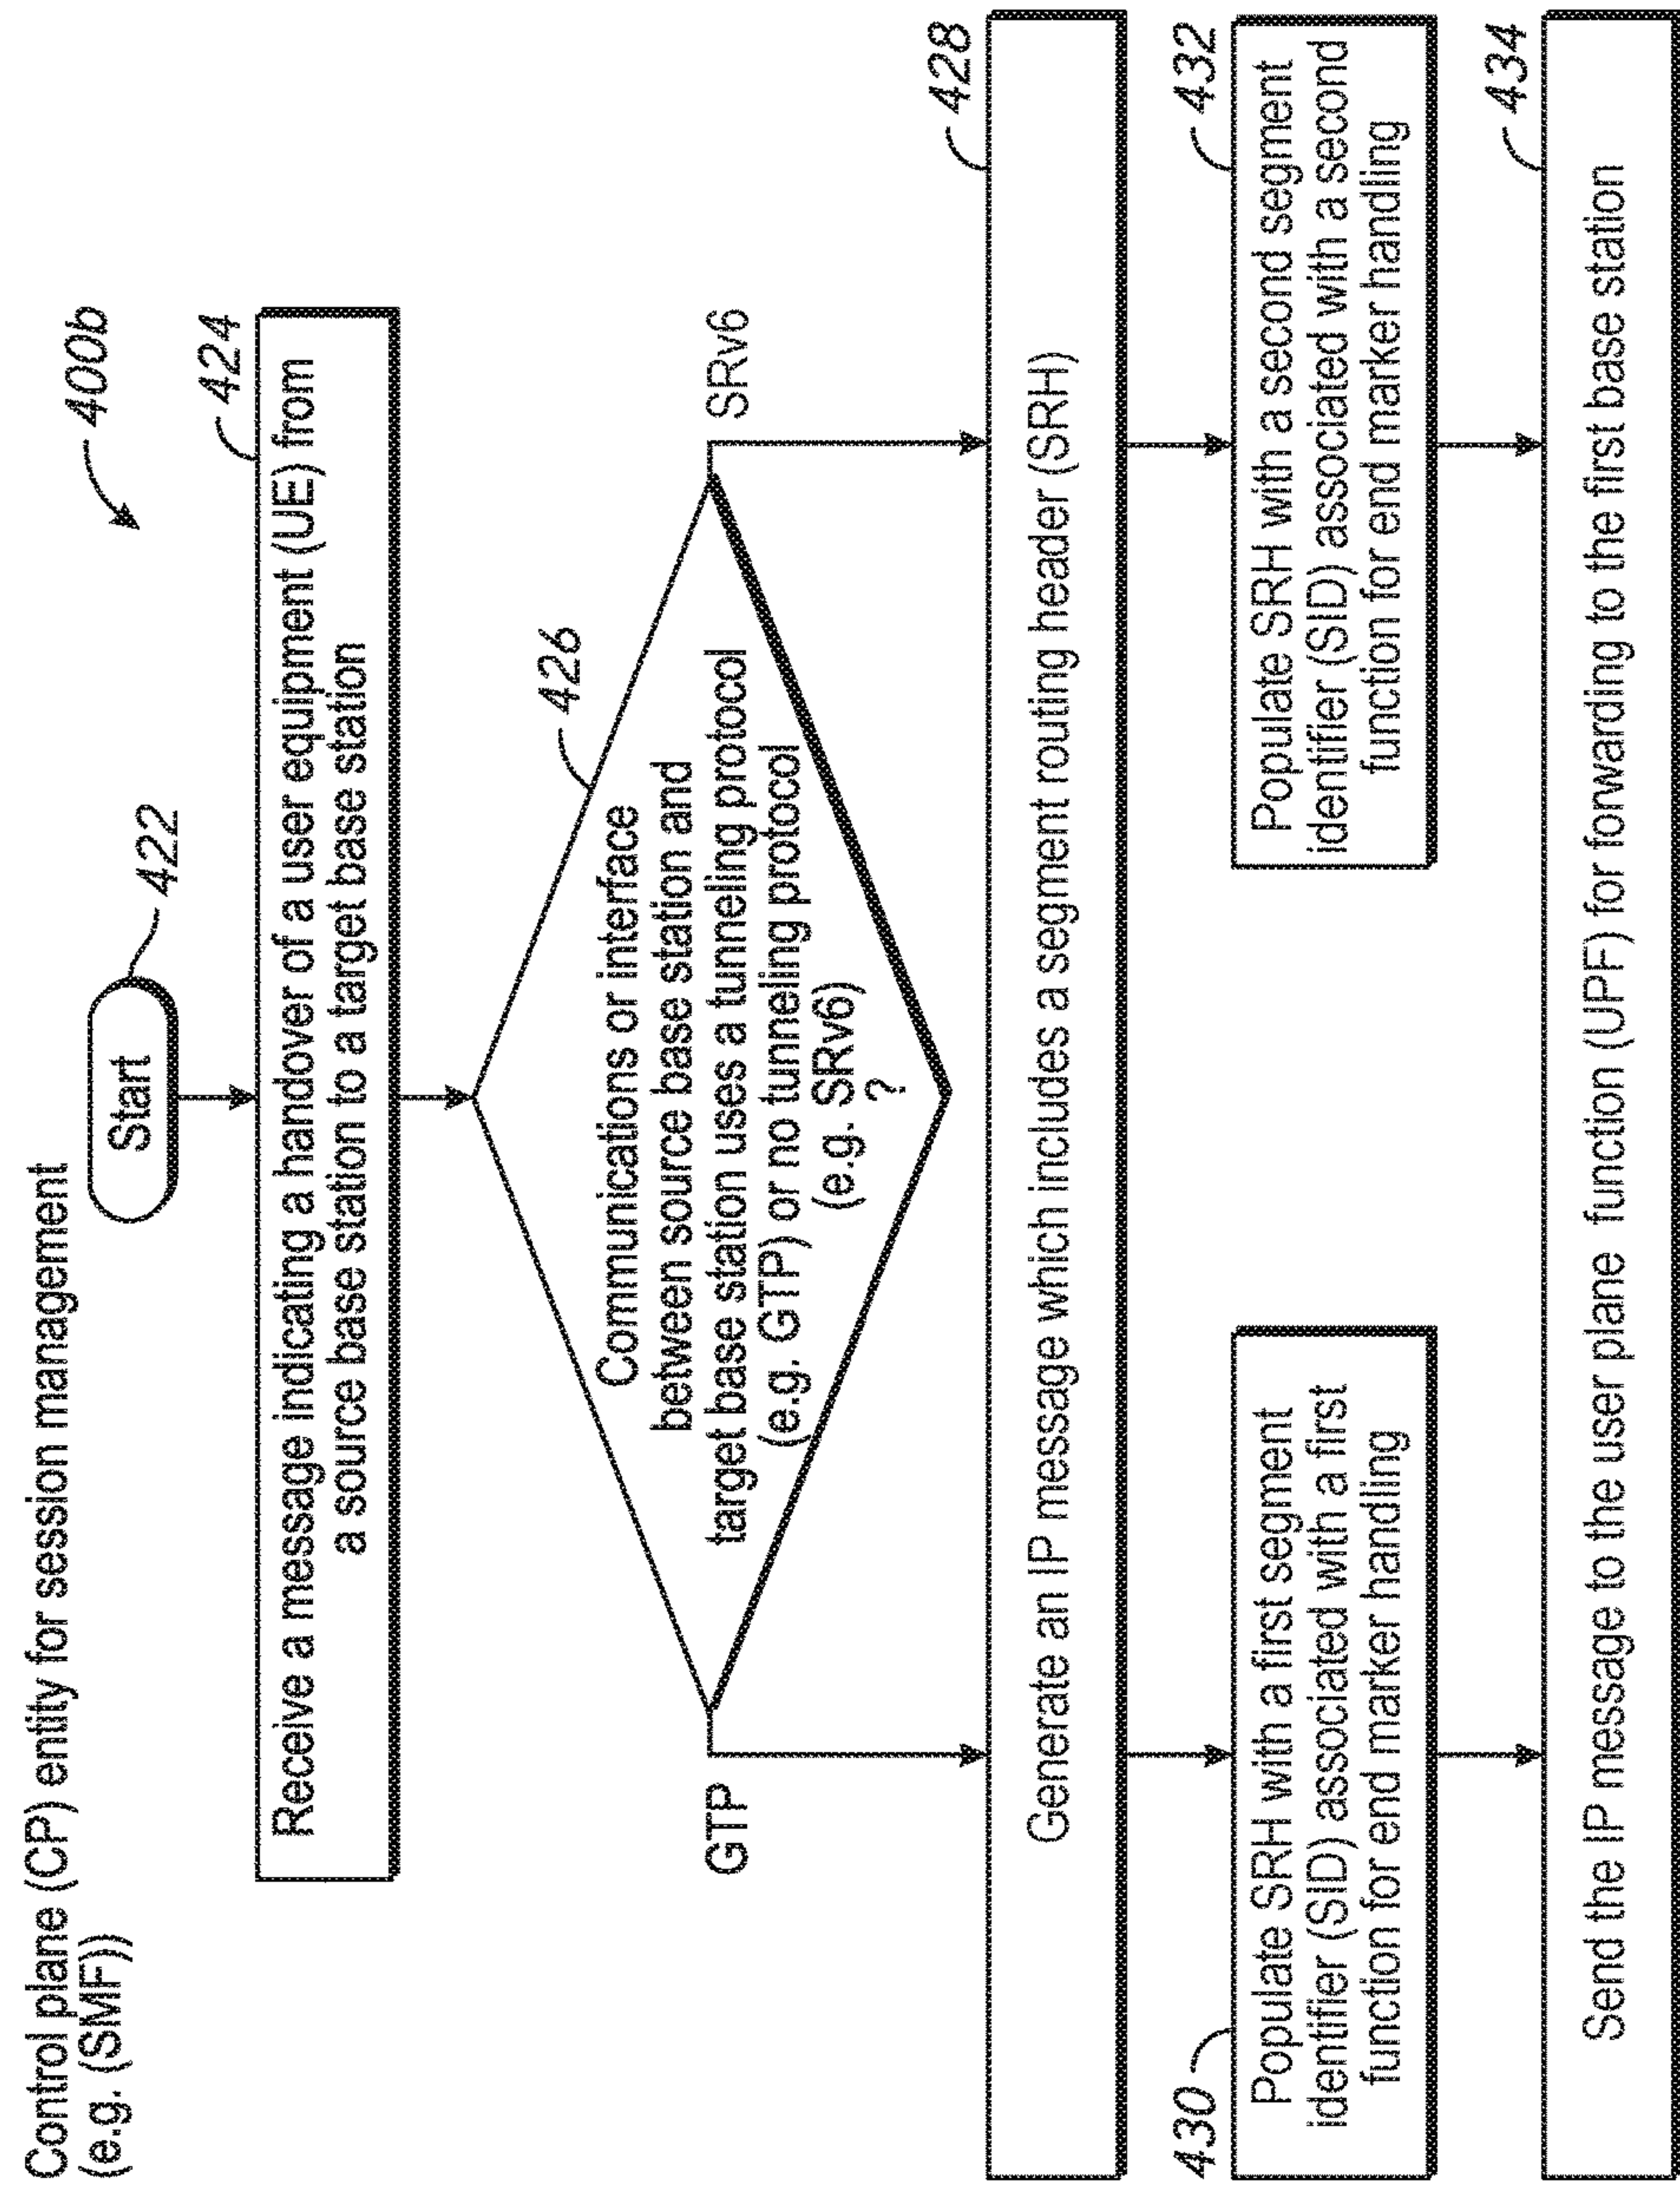


FIG. 4B

Base station (Source) =X2 interface using GTP / tunneling
(Partial SRv6 replacement / upgrade)

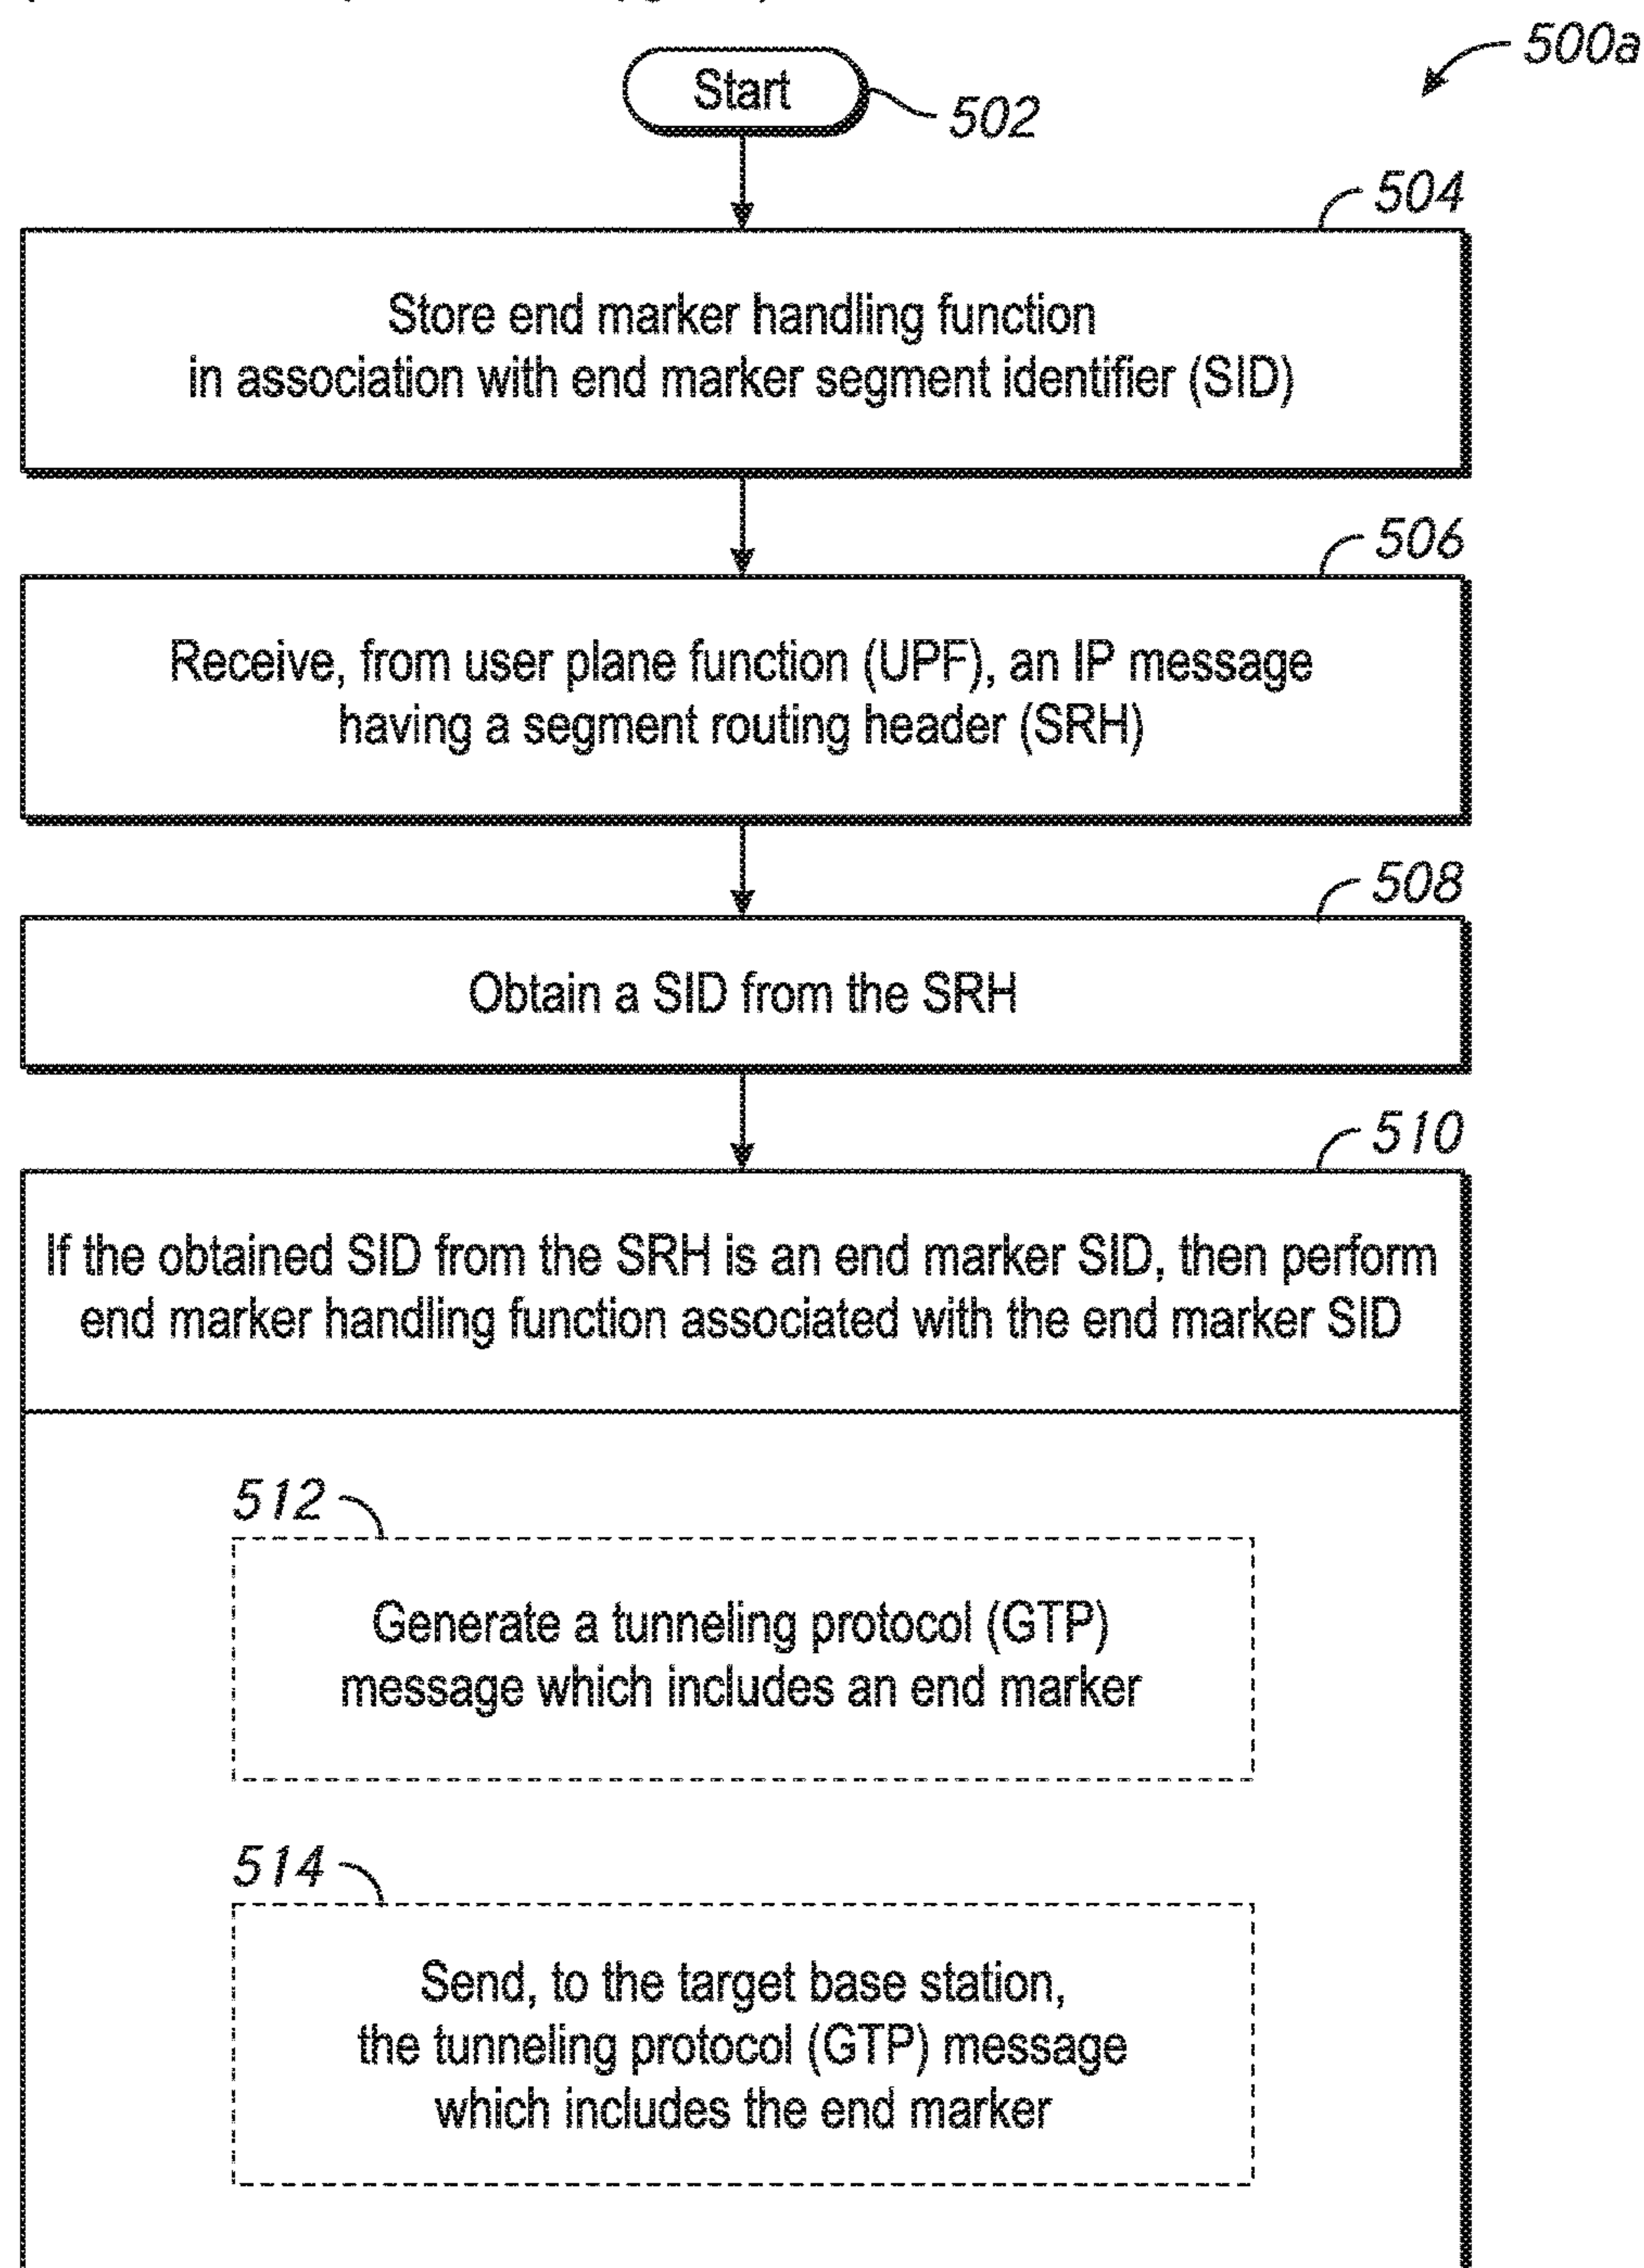


FIG. 5A

Base Station (Source) =X2 Interface using SRv6
(Full SRv6 replacement / upgrade)

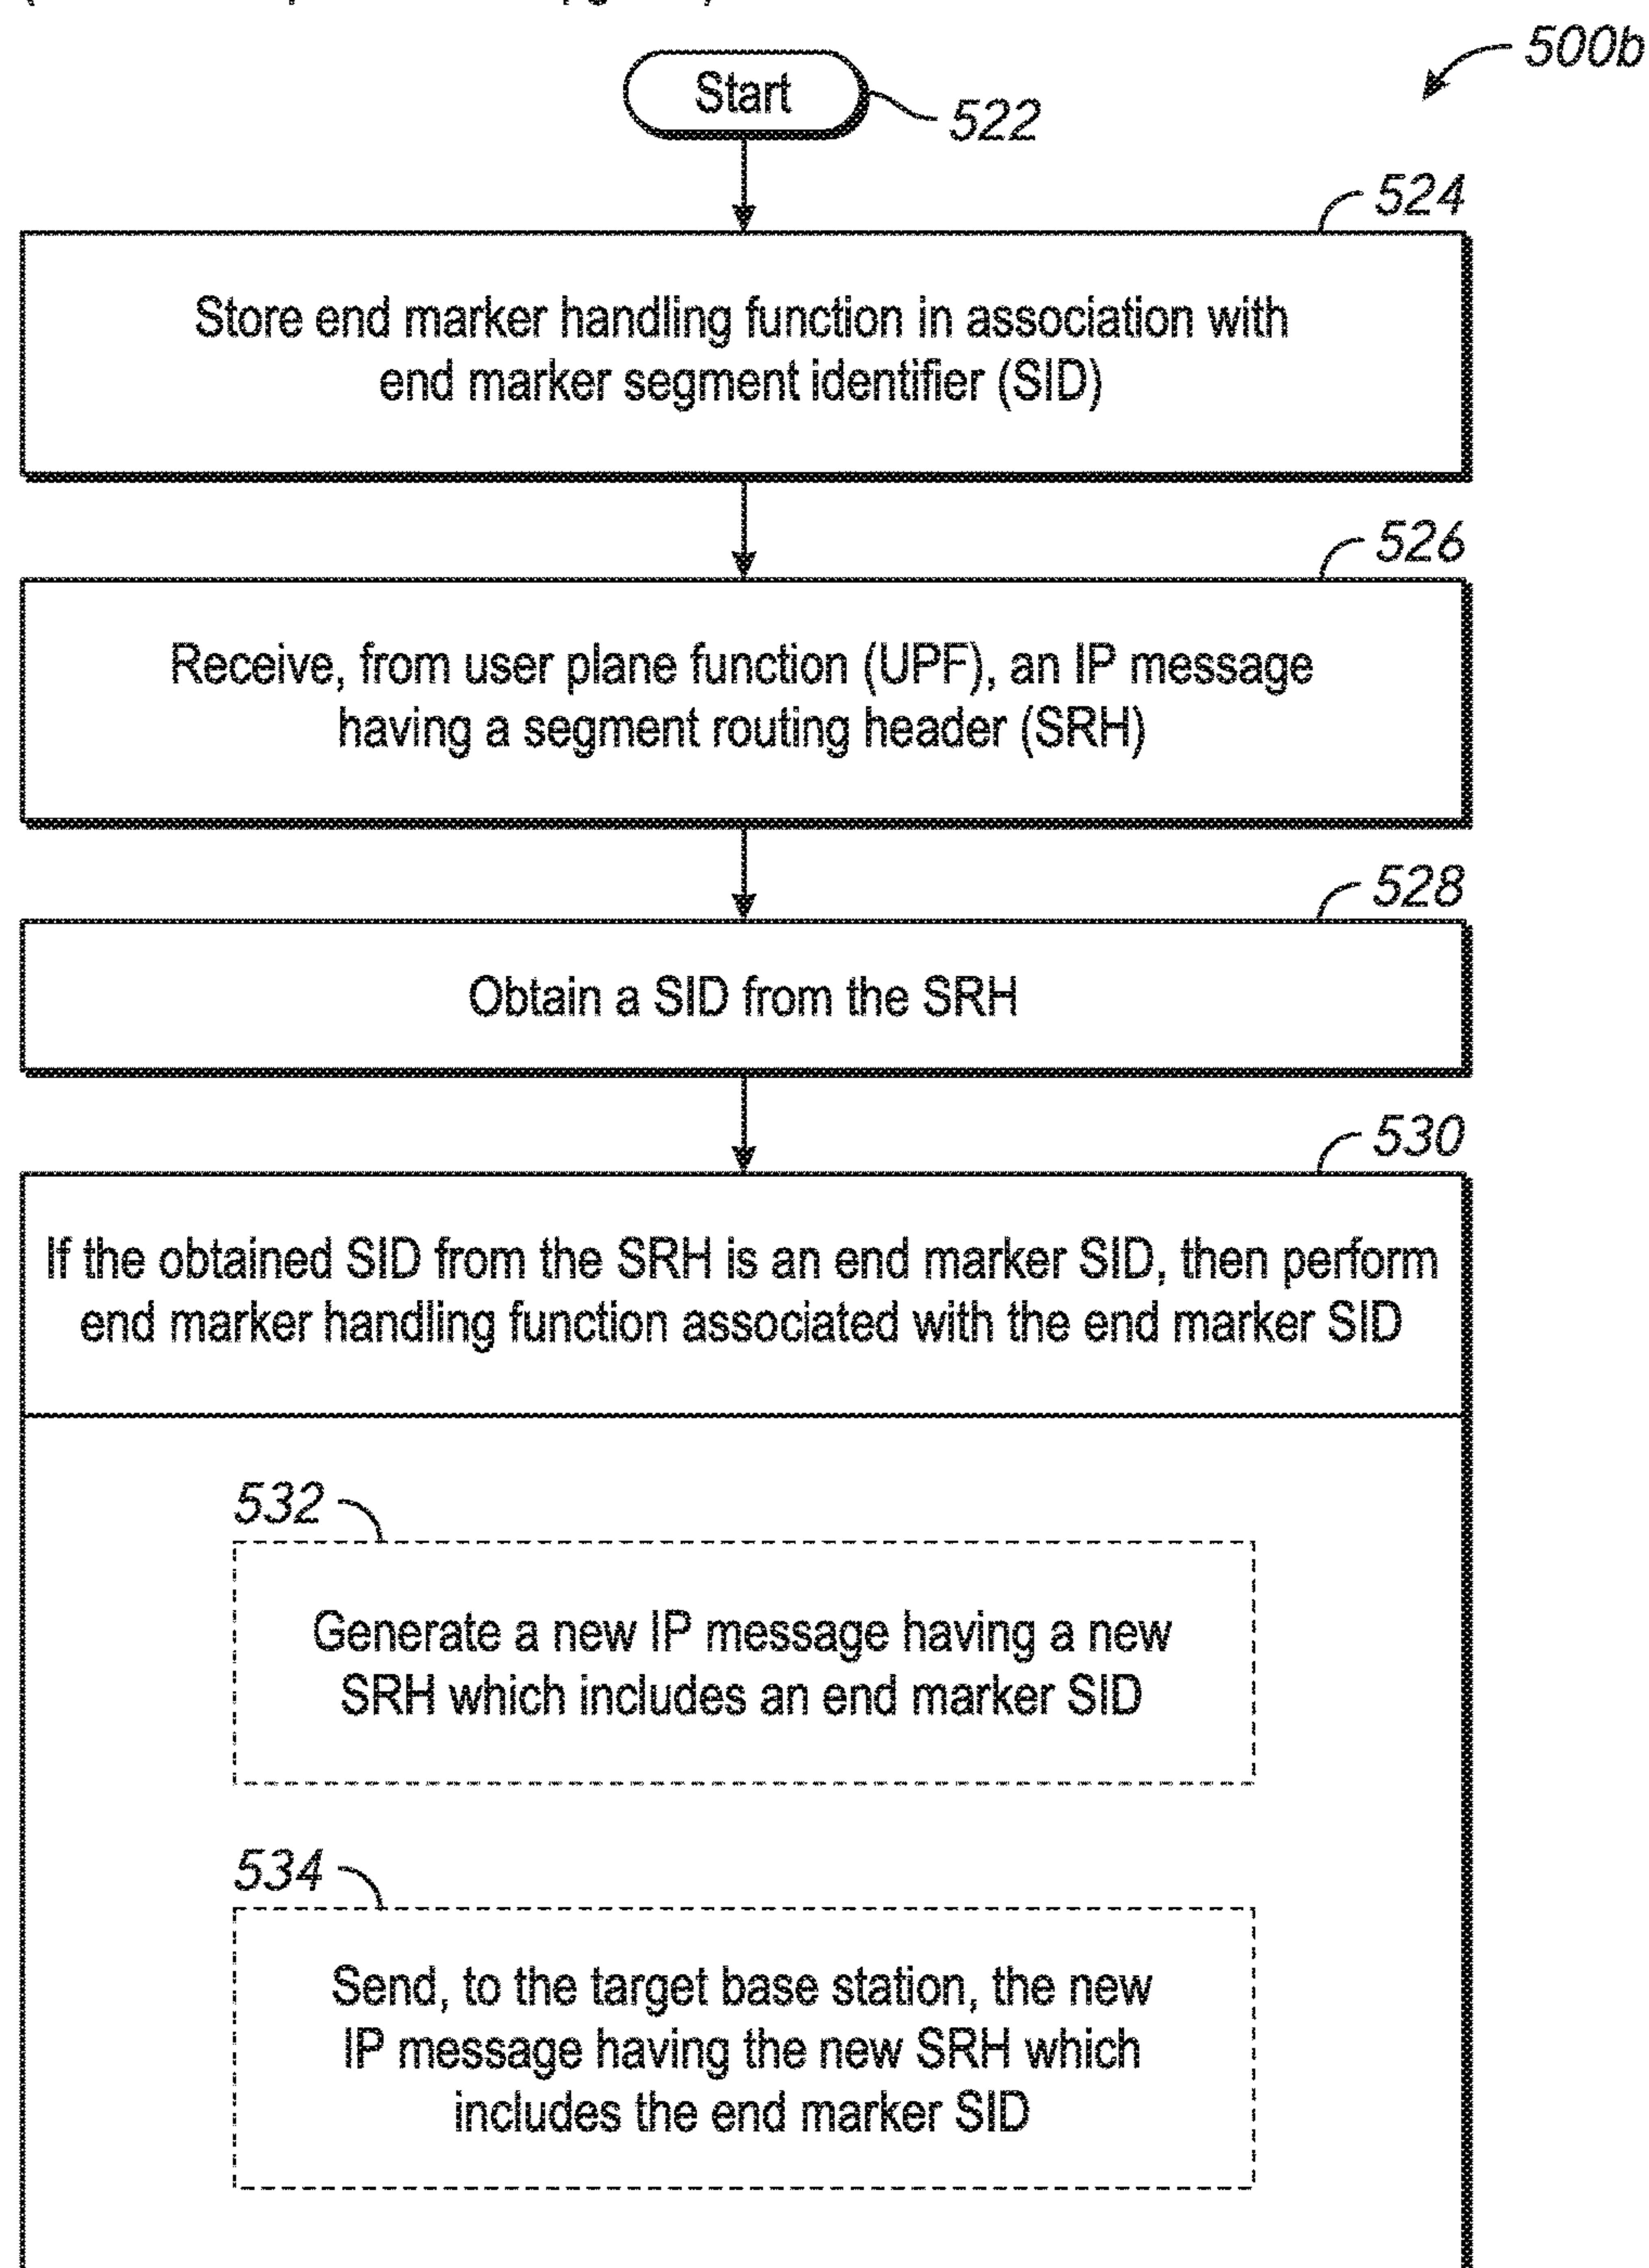


FIG. 5B



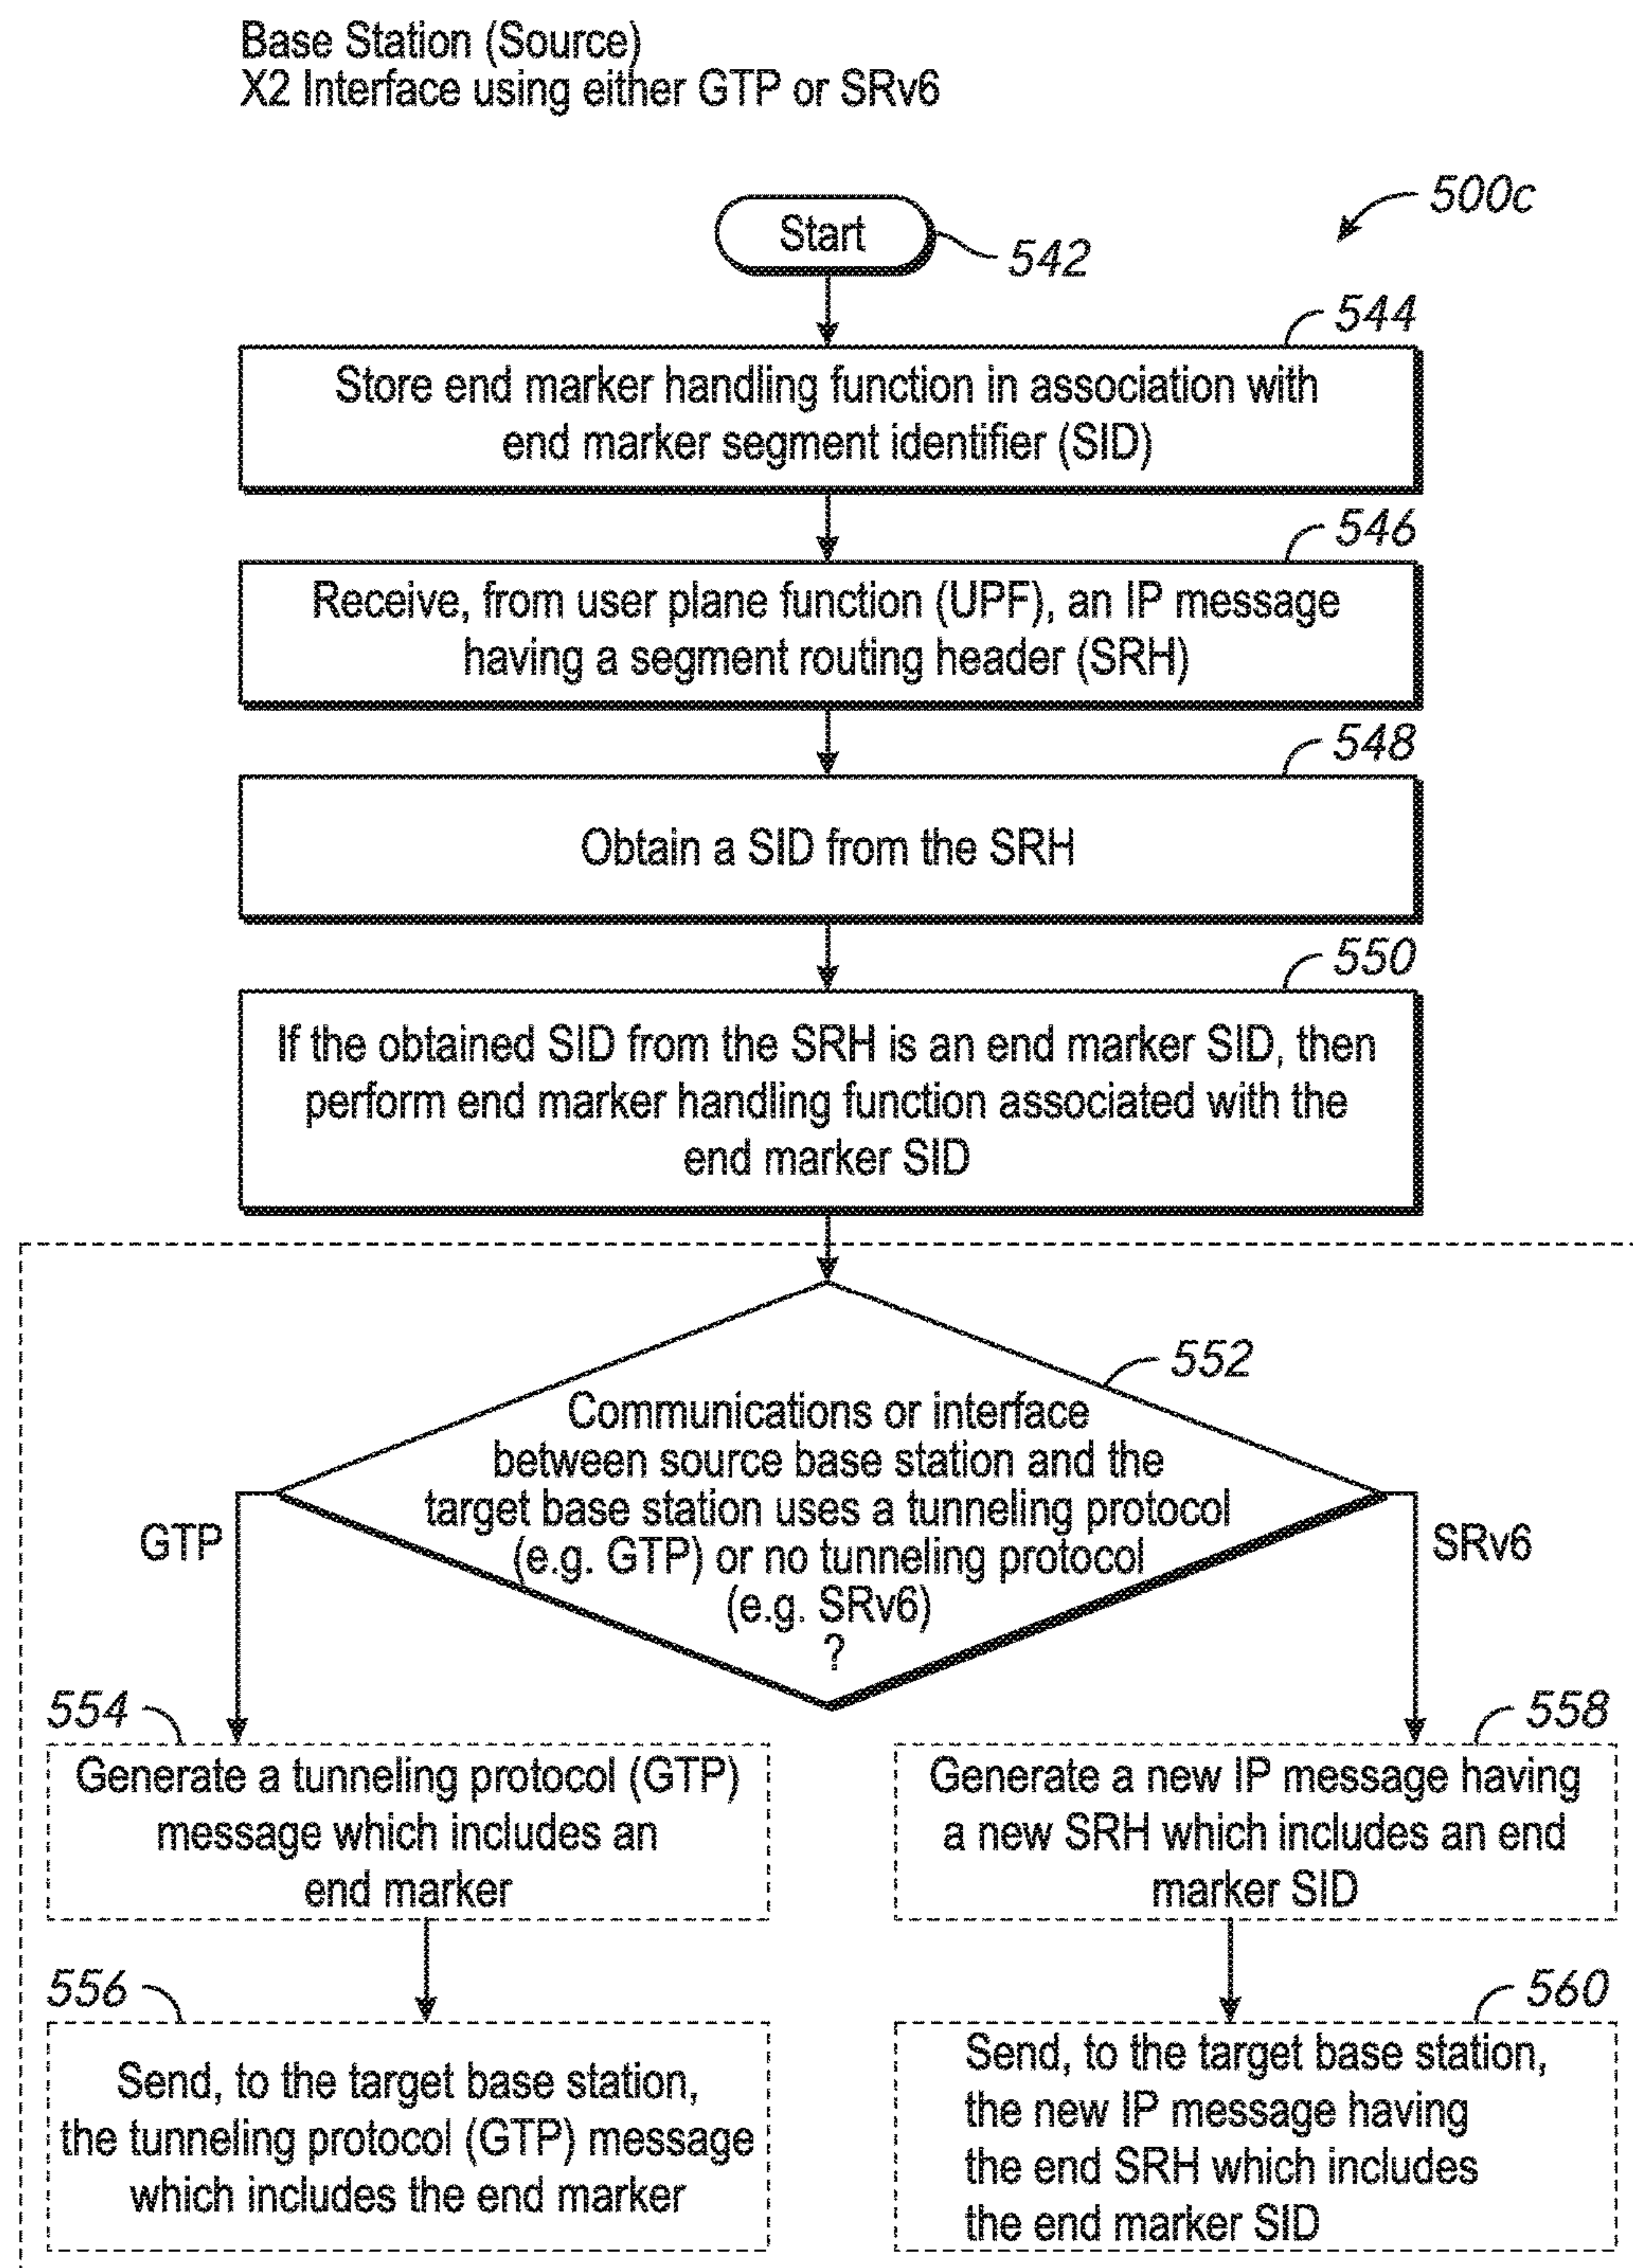


FIG. 5C

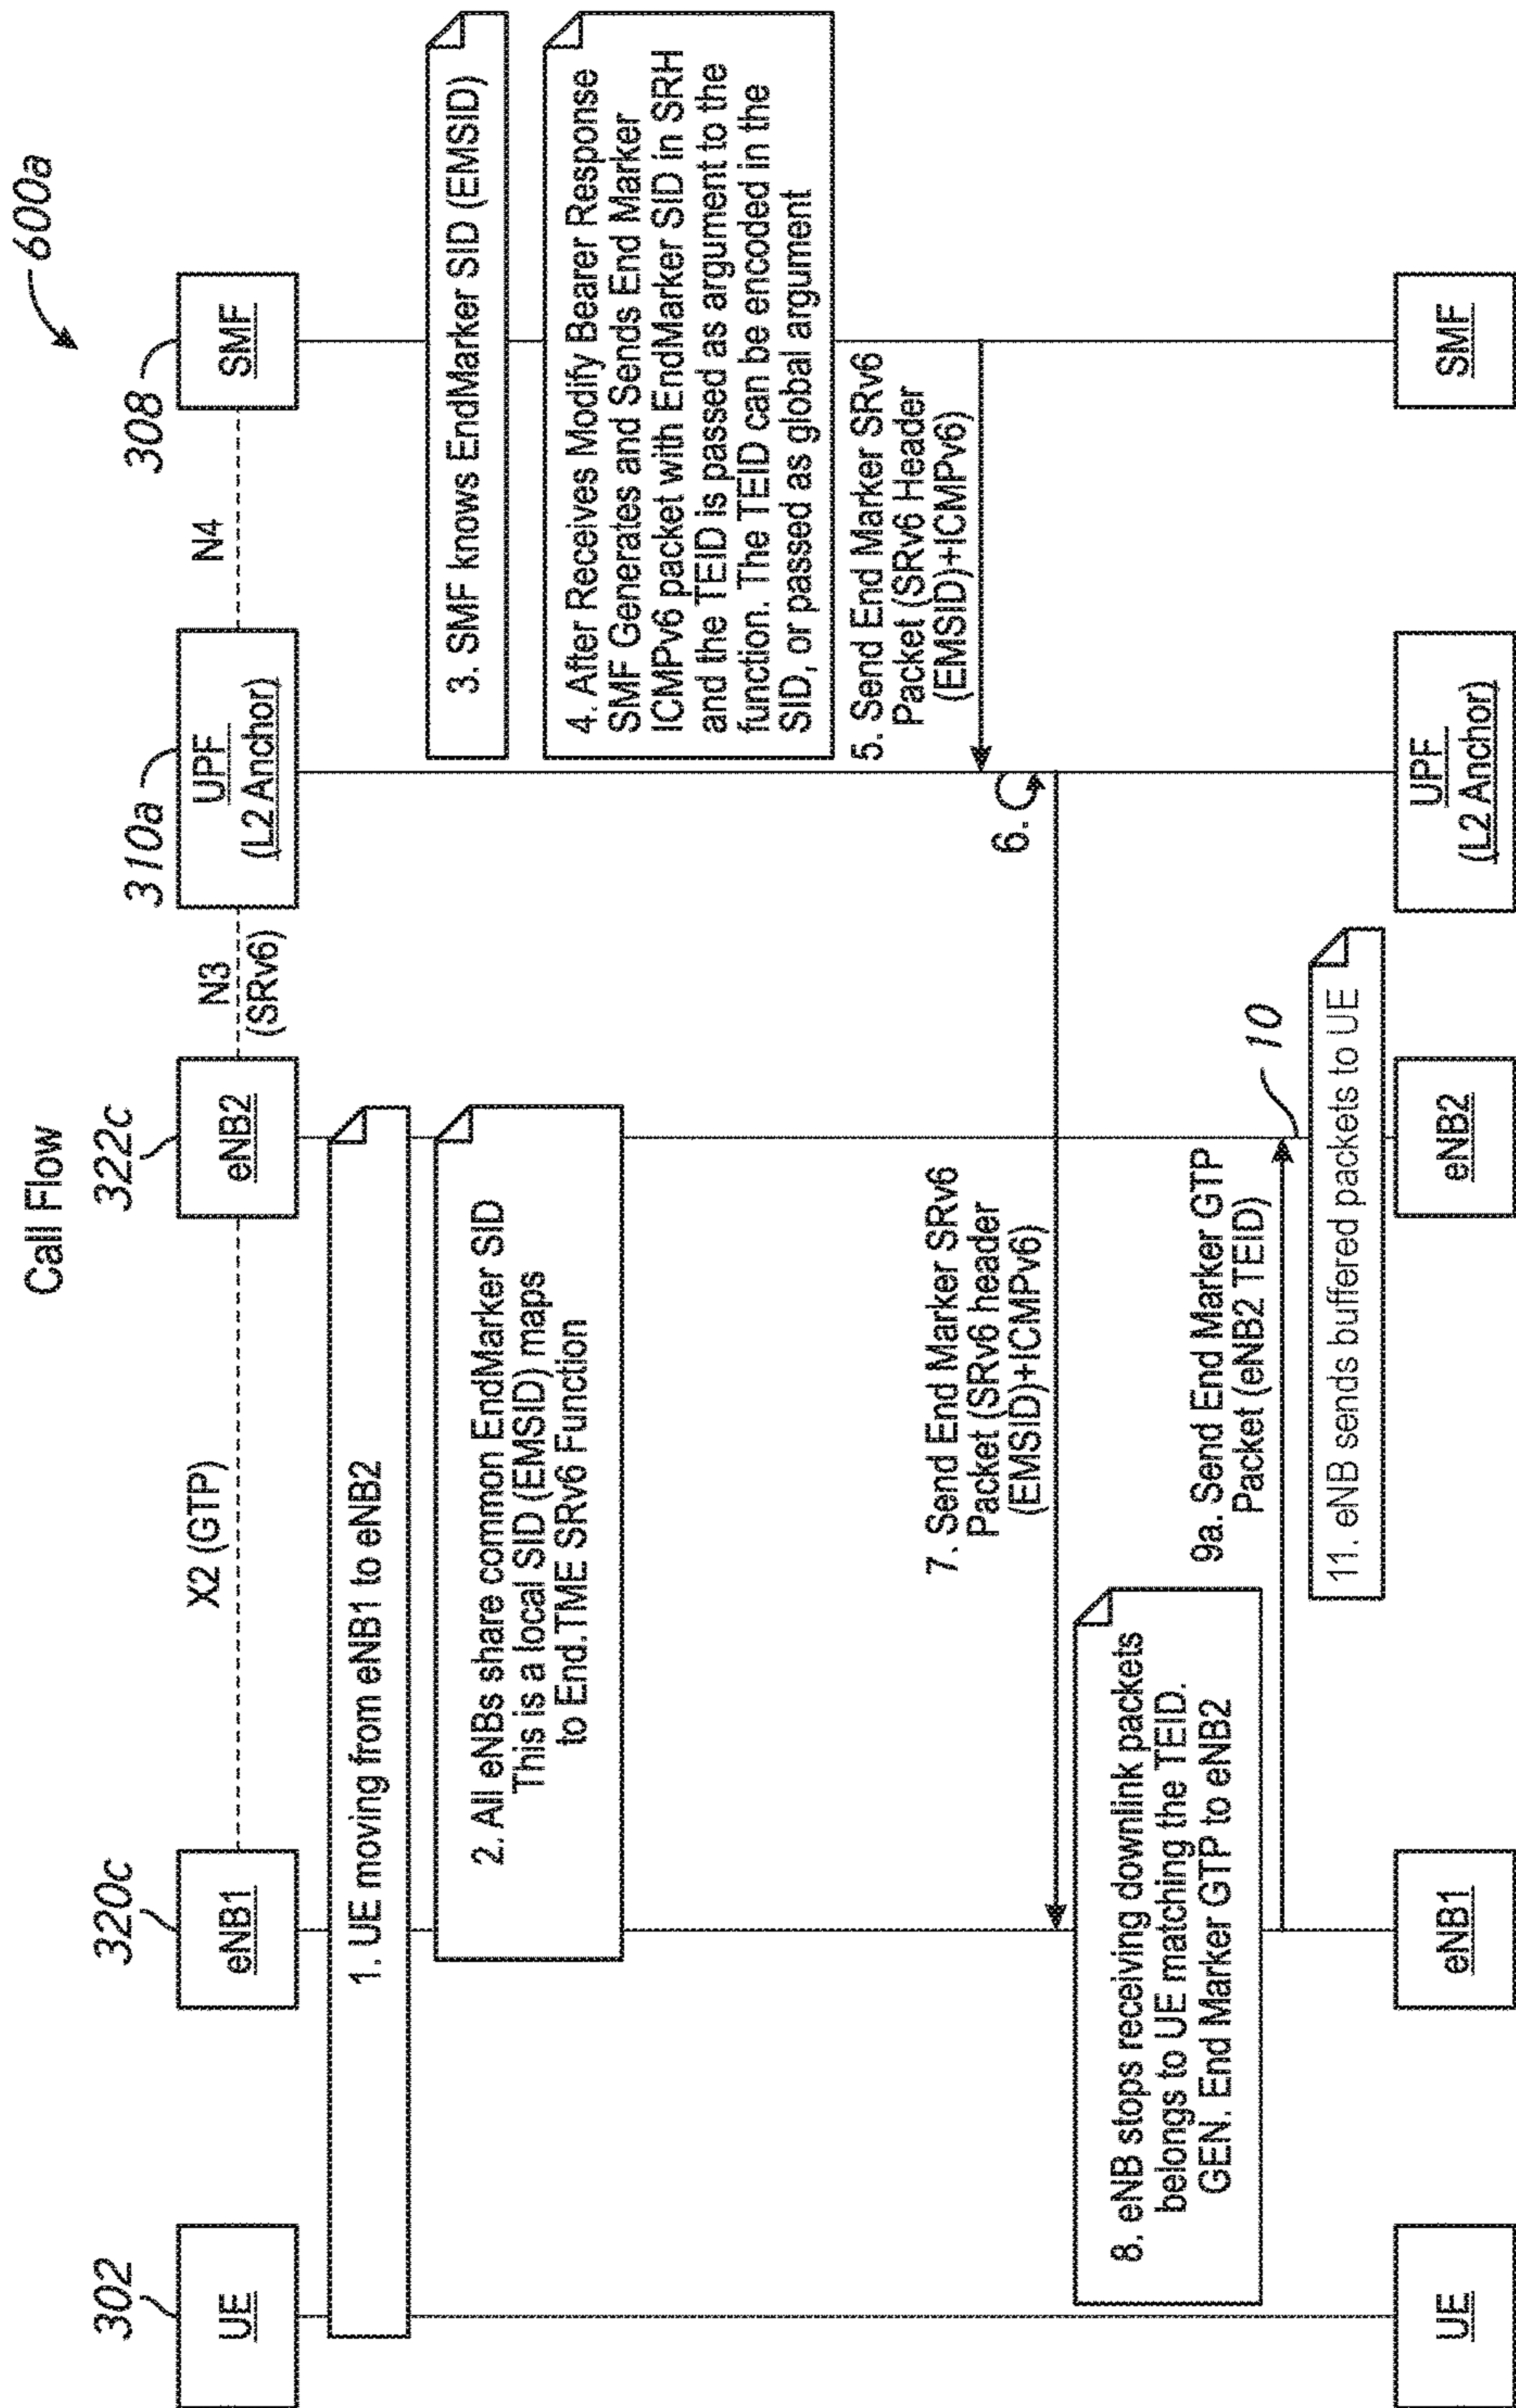

Partial SRv6 Replacement / Upgrade (See Fig. 3C)

FIG. 6A

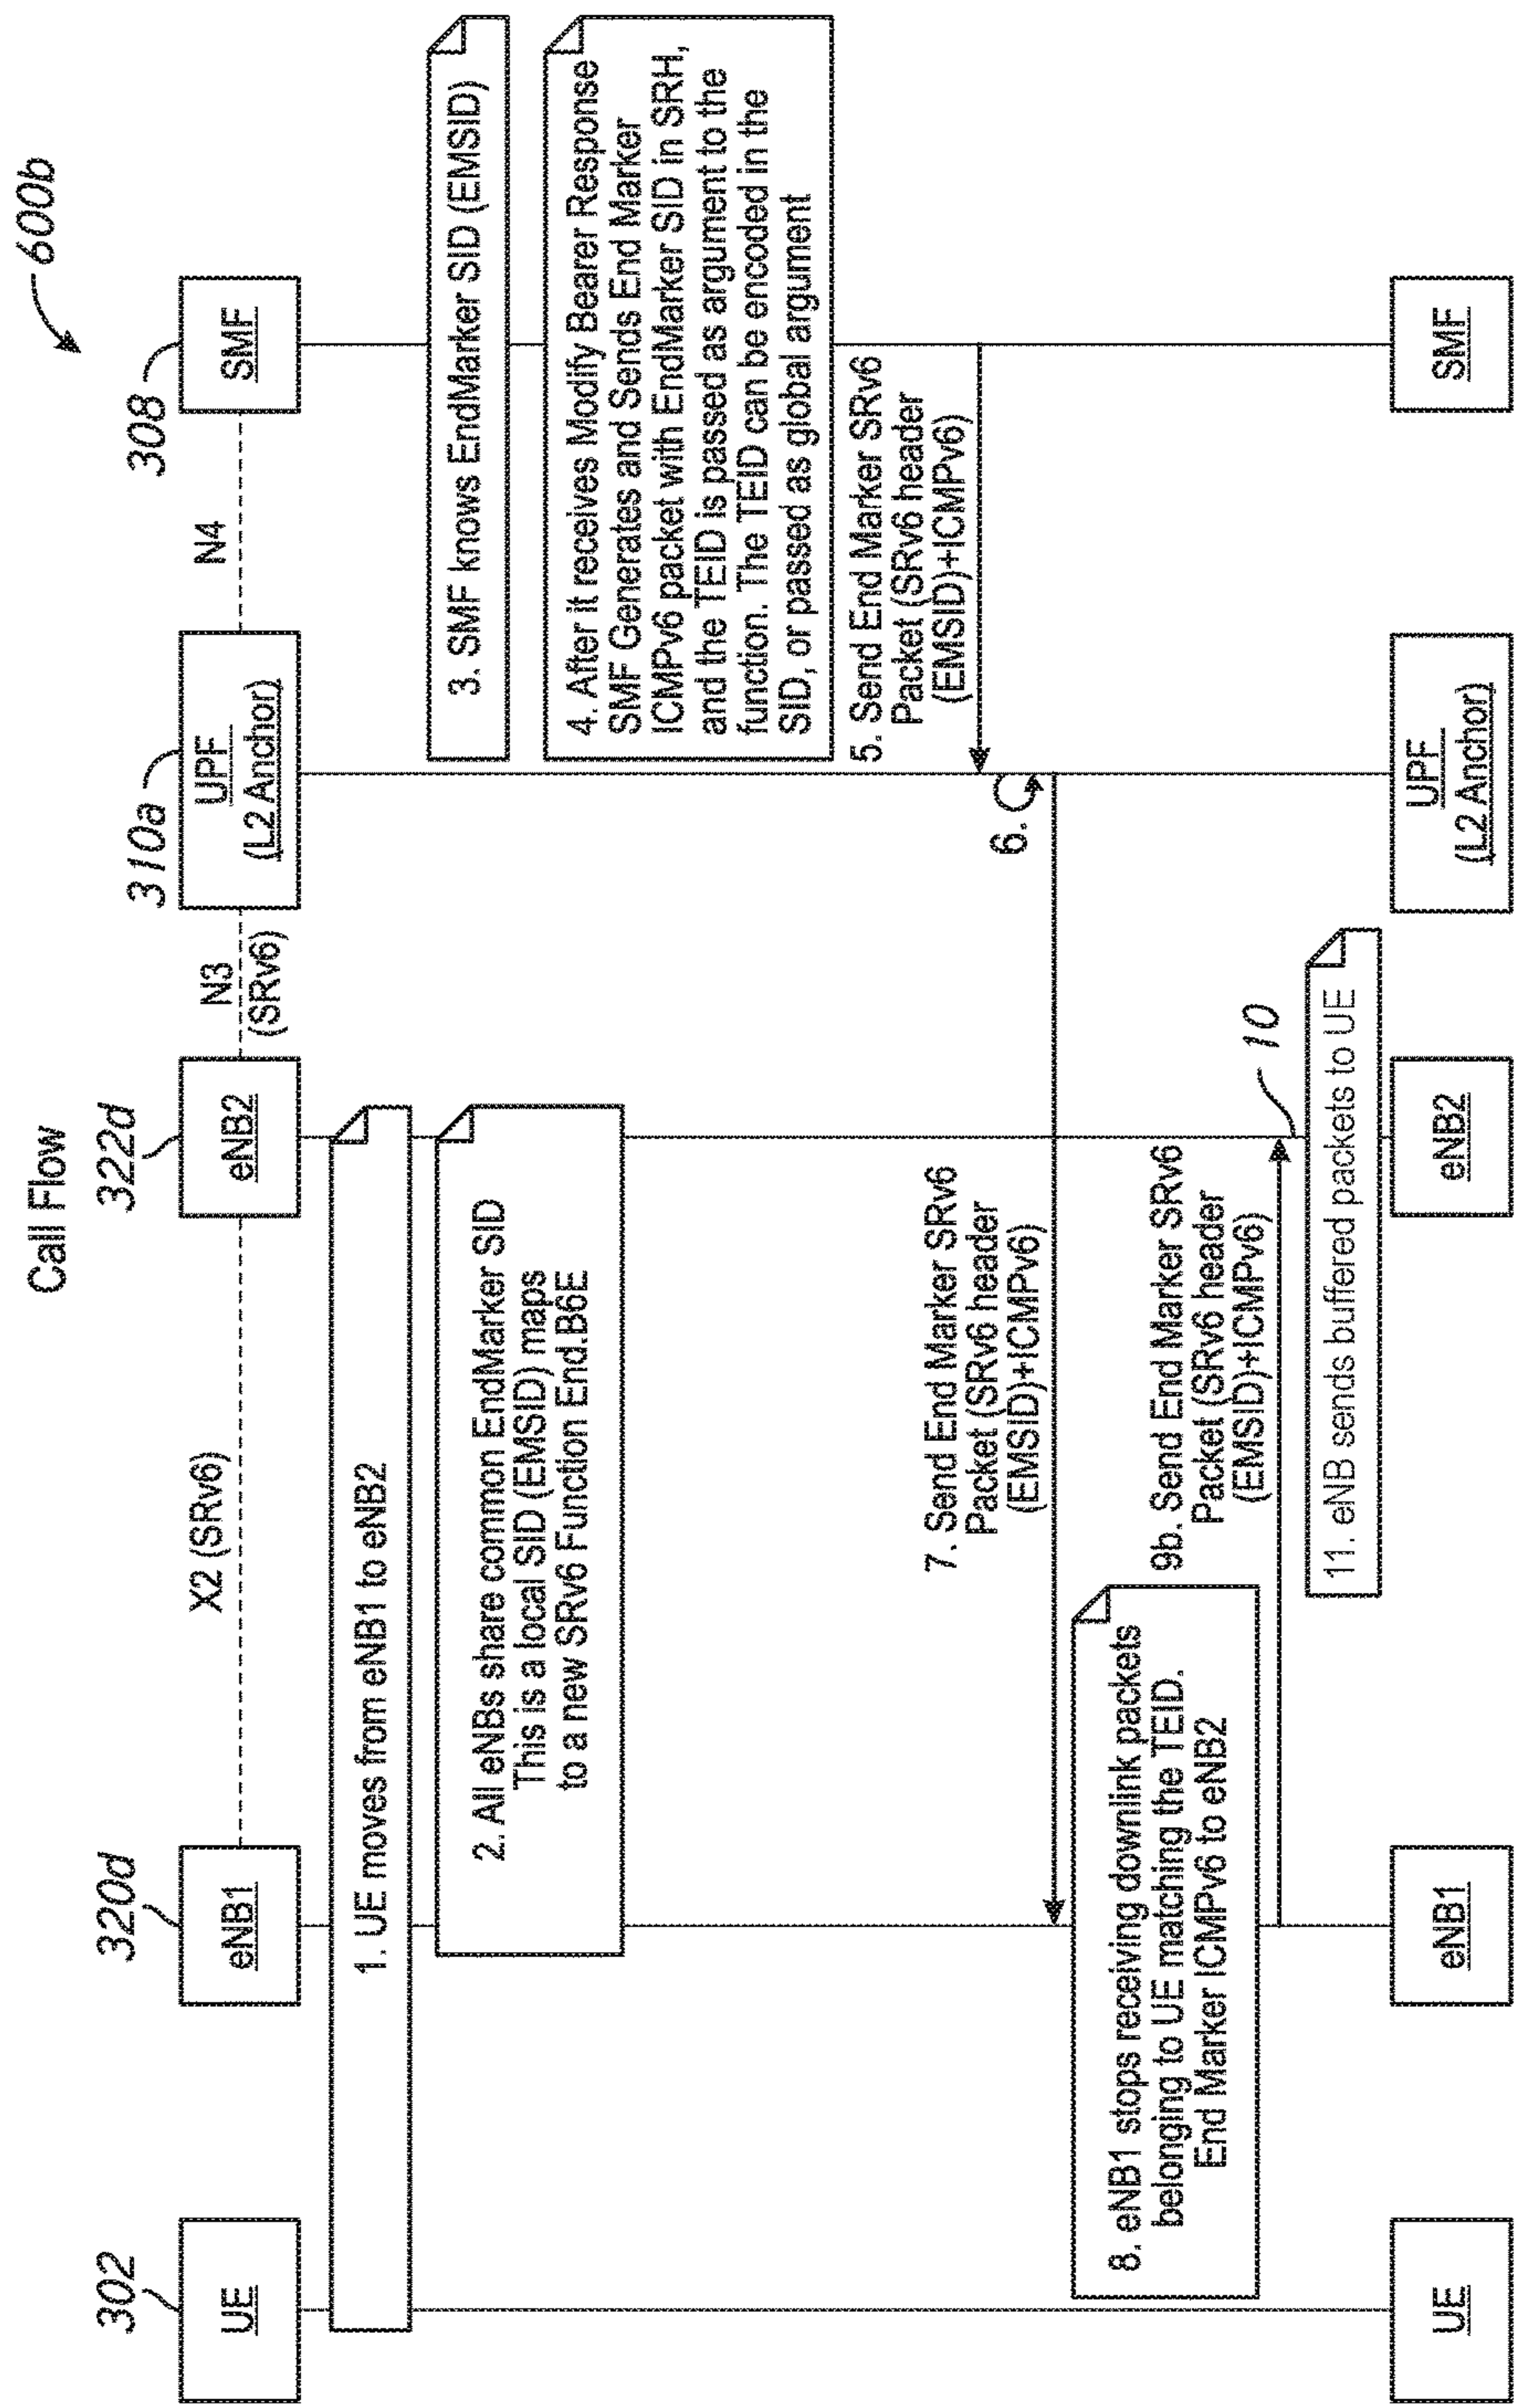

Full SRv6 Replacement / Upgrade (See Fig. 3D)

FIG. 6B

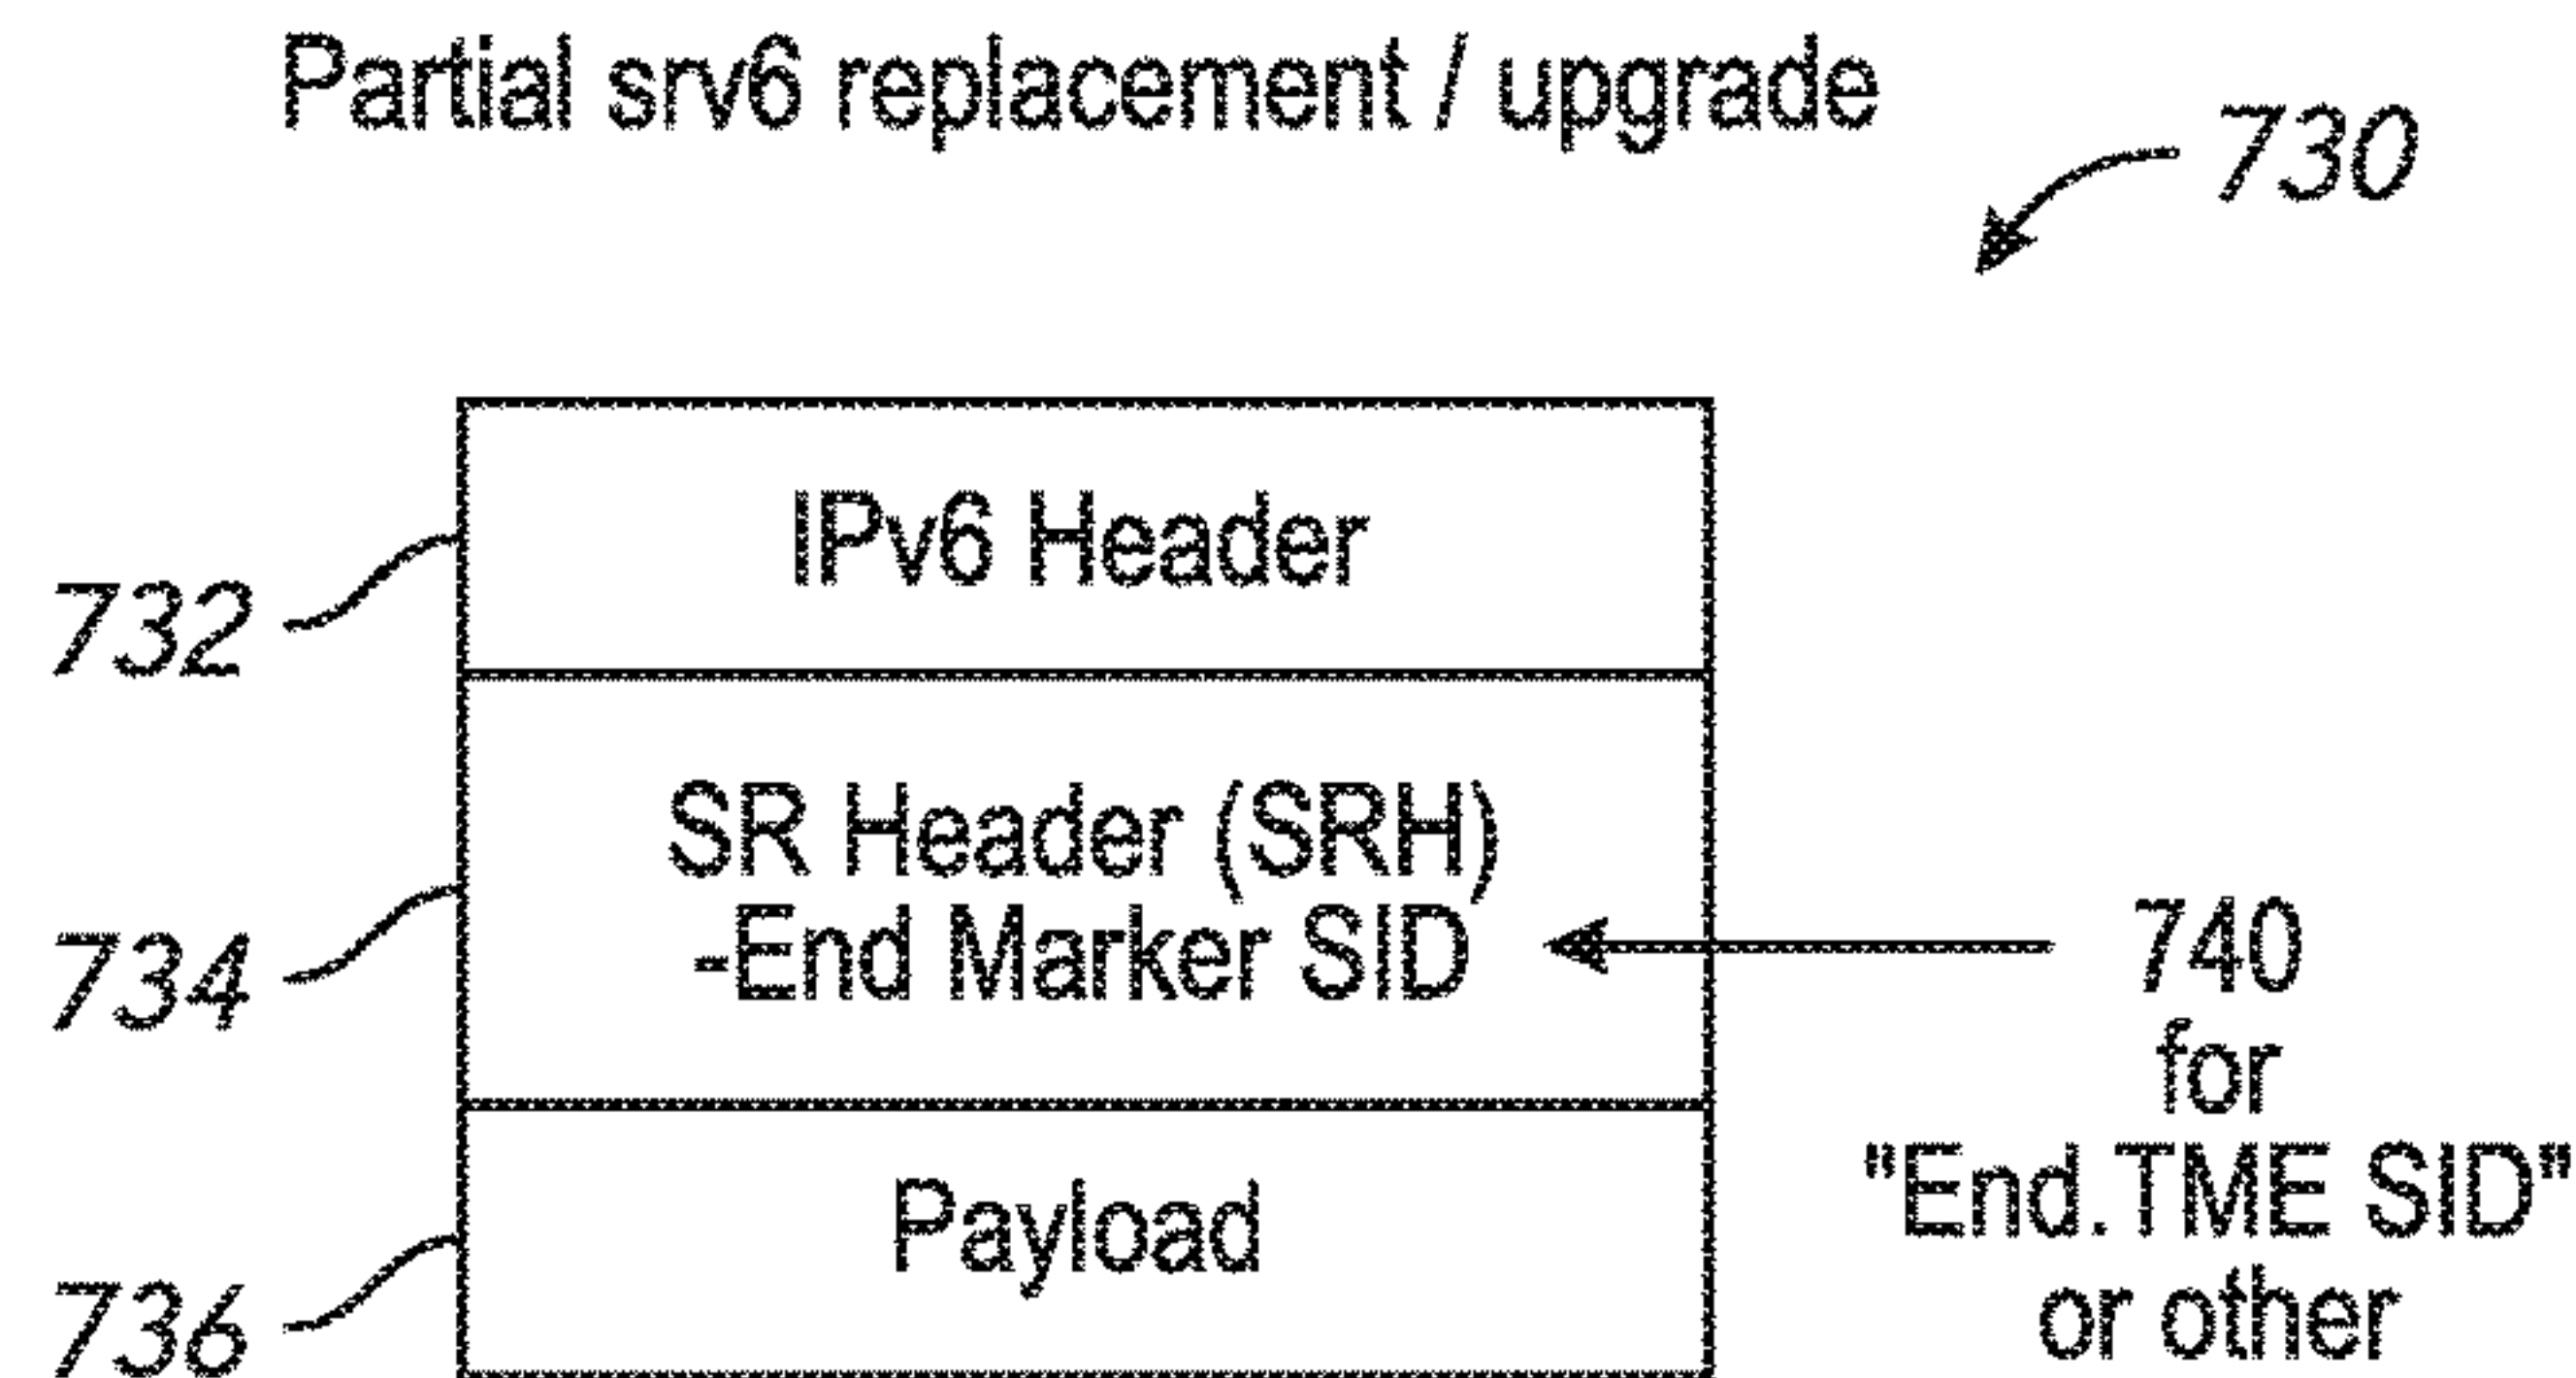


FIG. 7A

Non-routable EndMarker SID

When interworking node N receives a packet destined to S and S is a local End.TME SID

1. IF NH = SRH and SL==1
2. Stop receiving downlink packets for SRH [SL]
3. EndMarkerSID = SRH [SL]
4. Construct EndMarker packet using EndMarkerSID
5. Push header of TUN-PROTO with tunnel ID from S
6. Push outer IPv4 header with SA, DA from S
7. ELSE
8. Drop the packet

FIG. 7B

Routable SID along with the non-routable EndMarker SID

When interworking node N receives a packet destined to S and S is a local End.TME SID, N does:

1. IF NH = SRH and SL > 0 and SRH [SL] & NOTENDMARKER
2. Decrement SL
3. Update the IPv6 DA with SRH [SL]
4. Push header of TUN-PROTO with unnel ID from S
5. Push outer IPv4 header with SA, DA from S
6. ELSE IF NH = SRH and SRH [SL] & ENDMARKER and SL == 2
7. Stop receiving downlink packets for SRH [SL]
8. Decrement SL
9. EndMarkerSID = SRH [SL]
10. Construct EndMarker packet using EndMarkerSID
11. Push header of TUN-PROTO with tunnel ID from S
12. Push outer IPv4 header with SA, DA from S
13. ELSE
14. Drop the packet

FIG. 7C

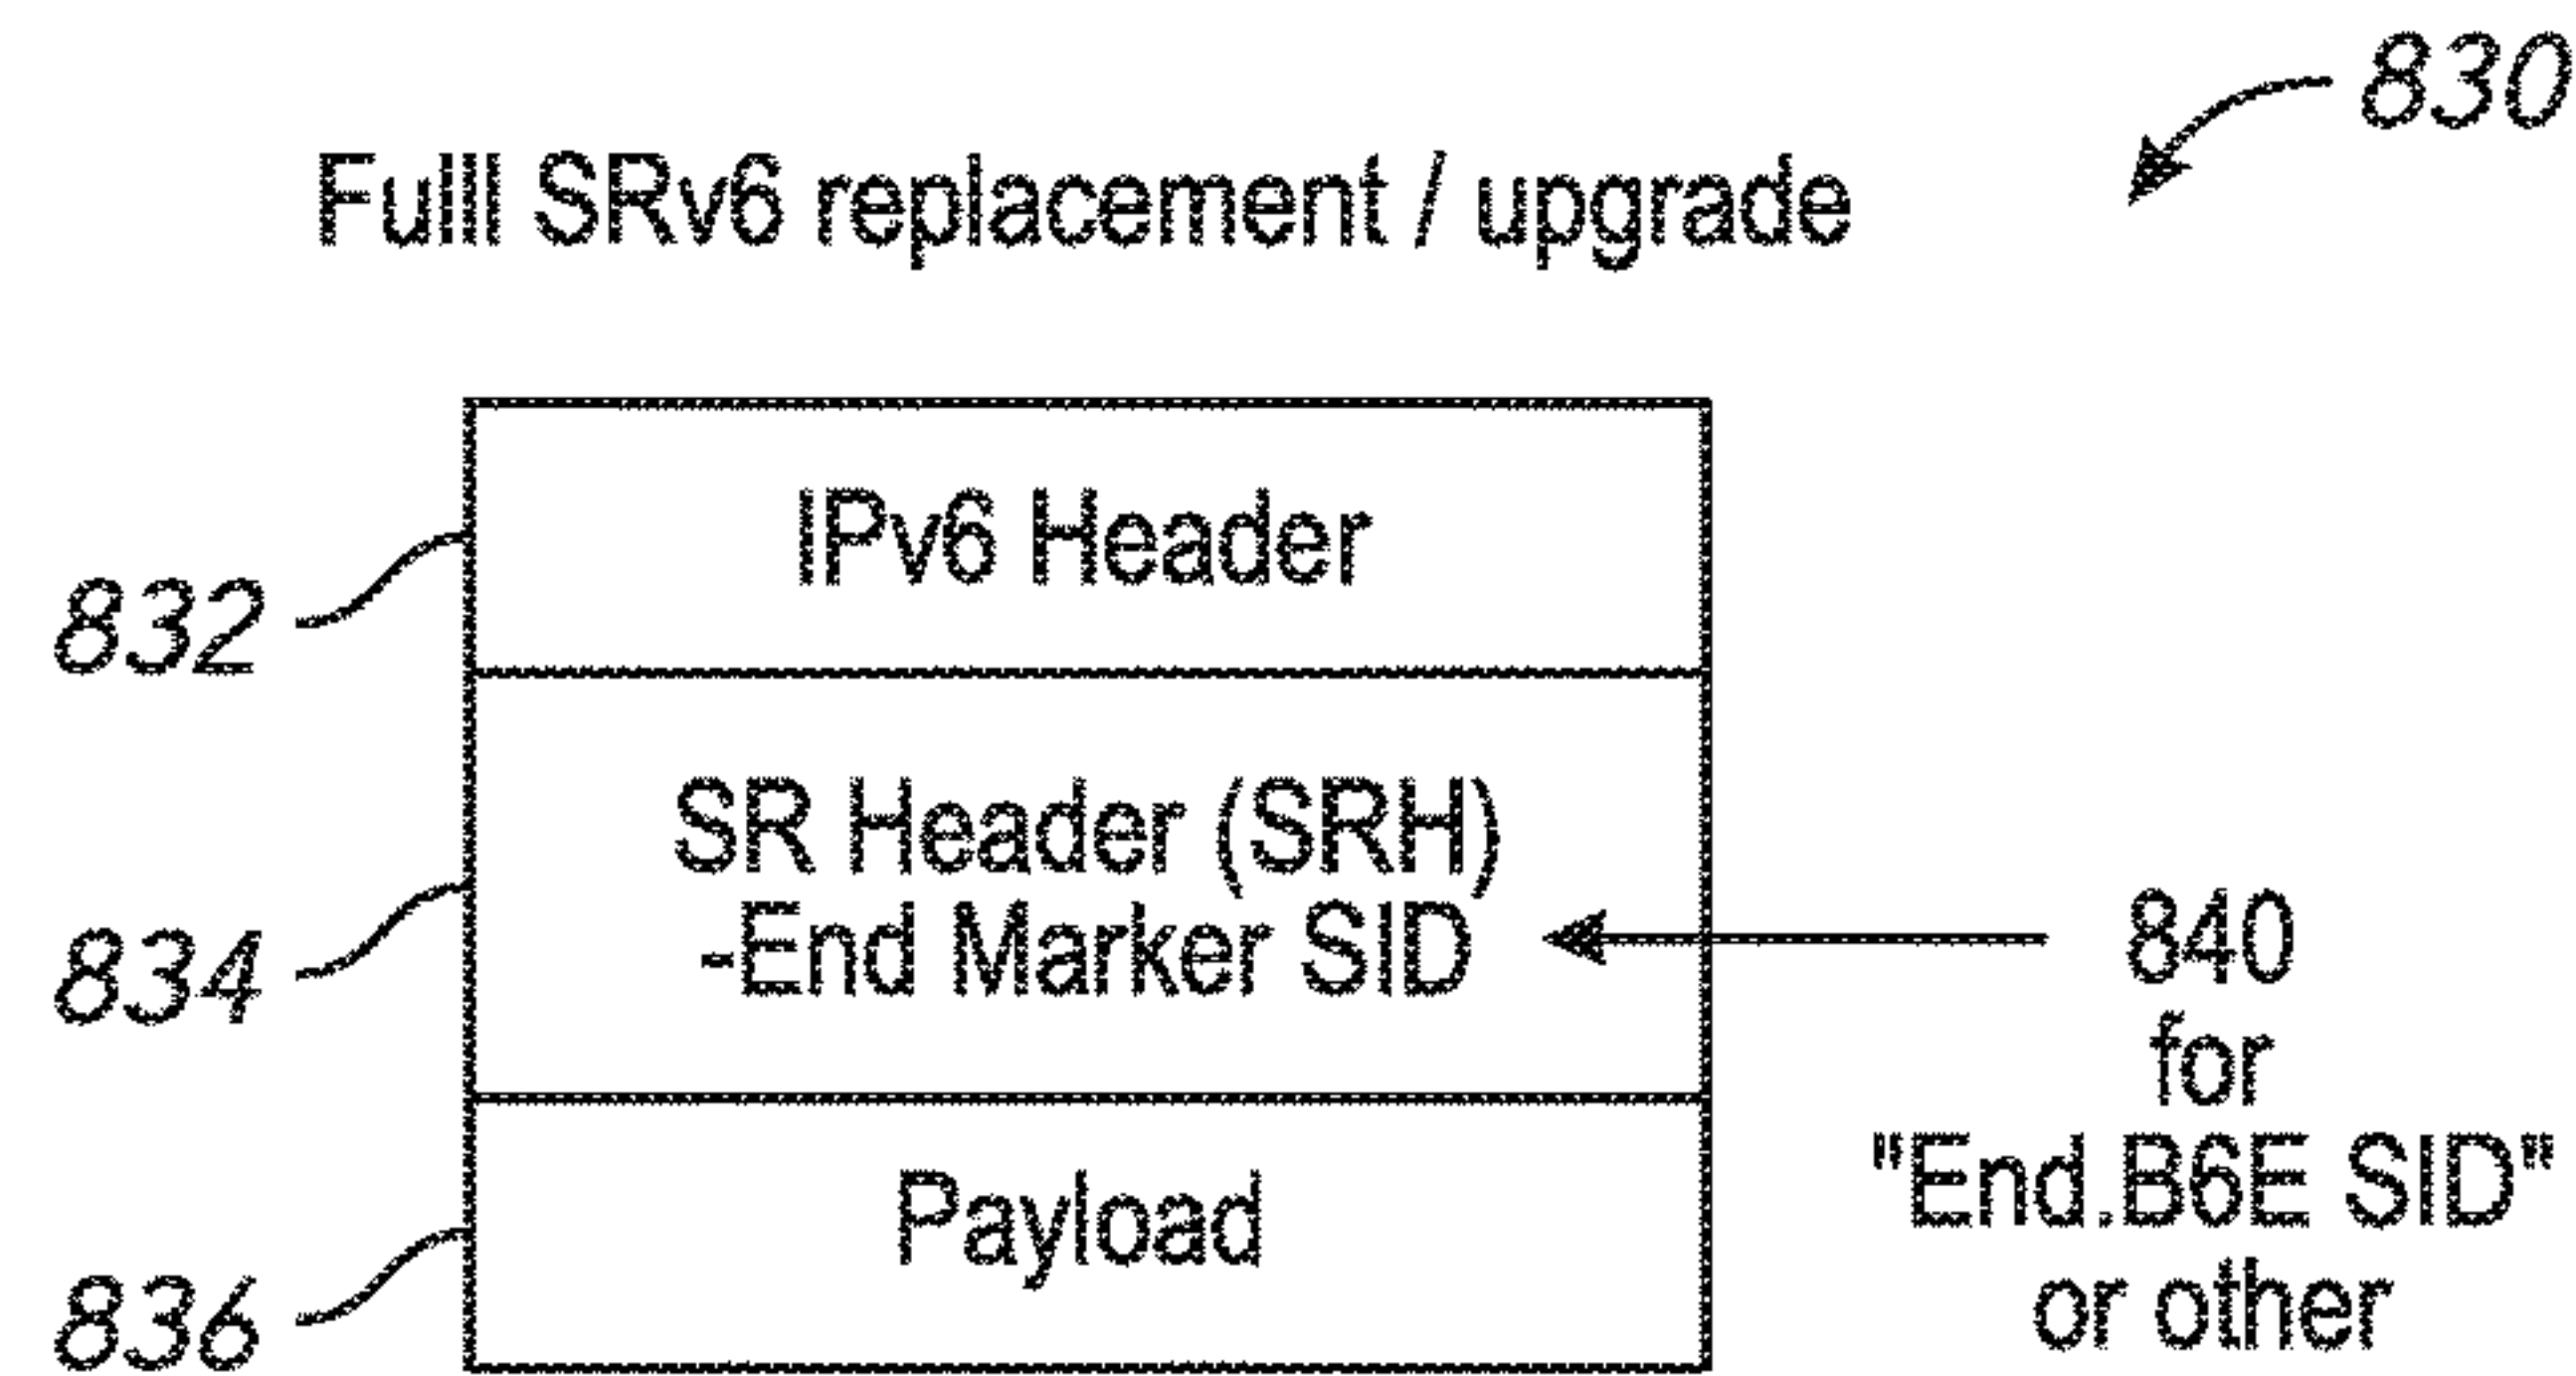


FIG. 8A

Non-routable EndMarker SID

When N receives a packet destined to S and S is a local End.B6E SID N does:

1. IF NH = SRH and SL==1
2. Stop receiving downlink packets for SRH [SL]
3. EndMarkerSID = SRH [SL]
4. Construct EndMarker packet using EndMarkerSID -- Ref1;
5. Insert new SRH
6. Set the IPv6 DA to the first segment of the SRv6 policy
7. Forward according to the first segment of the SRv6 policy
8. ELSE
9. Drop the packet

Ref1: Extract TEID in EndMarker SID and construct ICMPv6 packet with new SRv6 header

FIG. 8B

Routable SID along with the non-routable EndMarker SID

When N receives a packet destined to S and S is a local End.B6E SID, N does:

1. IF NH = SRH and SL > 0 and SRH [SL] & NOTENDMARKER
2. Do not decrement SL nor update the IPv6 DA with SRH [SL]
3. Insert a new SRH
4. Set the IPv6 DA to the first segment of the SRv6 policy
5. Forward according to the first segment of the SRv6 policy
6. ELSE IF NH = SRH and SRH [SL] & ENDMARKER and SL == 2
7. Stop receiving downlink packets for SRH [SL]
8. Decrement SL
9. EndMarkerSID = SRH [SL]
10. Construct EndMarker packet using EndMarkerSID -- Ref1;
11. Insert a new SRH
12. Set the IPv6 DA to the first segment of the SRv6 policy
13. Forward according to the first segment of the SRv6 policy
14. ELSE
15. Drop the packet

Ref1: Extract TEID in EndMarkerSID and construct ICMPv6 packet with new SRv6 header

FIG. 8C

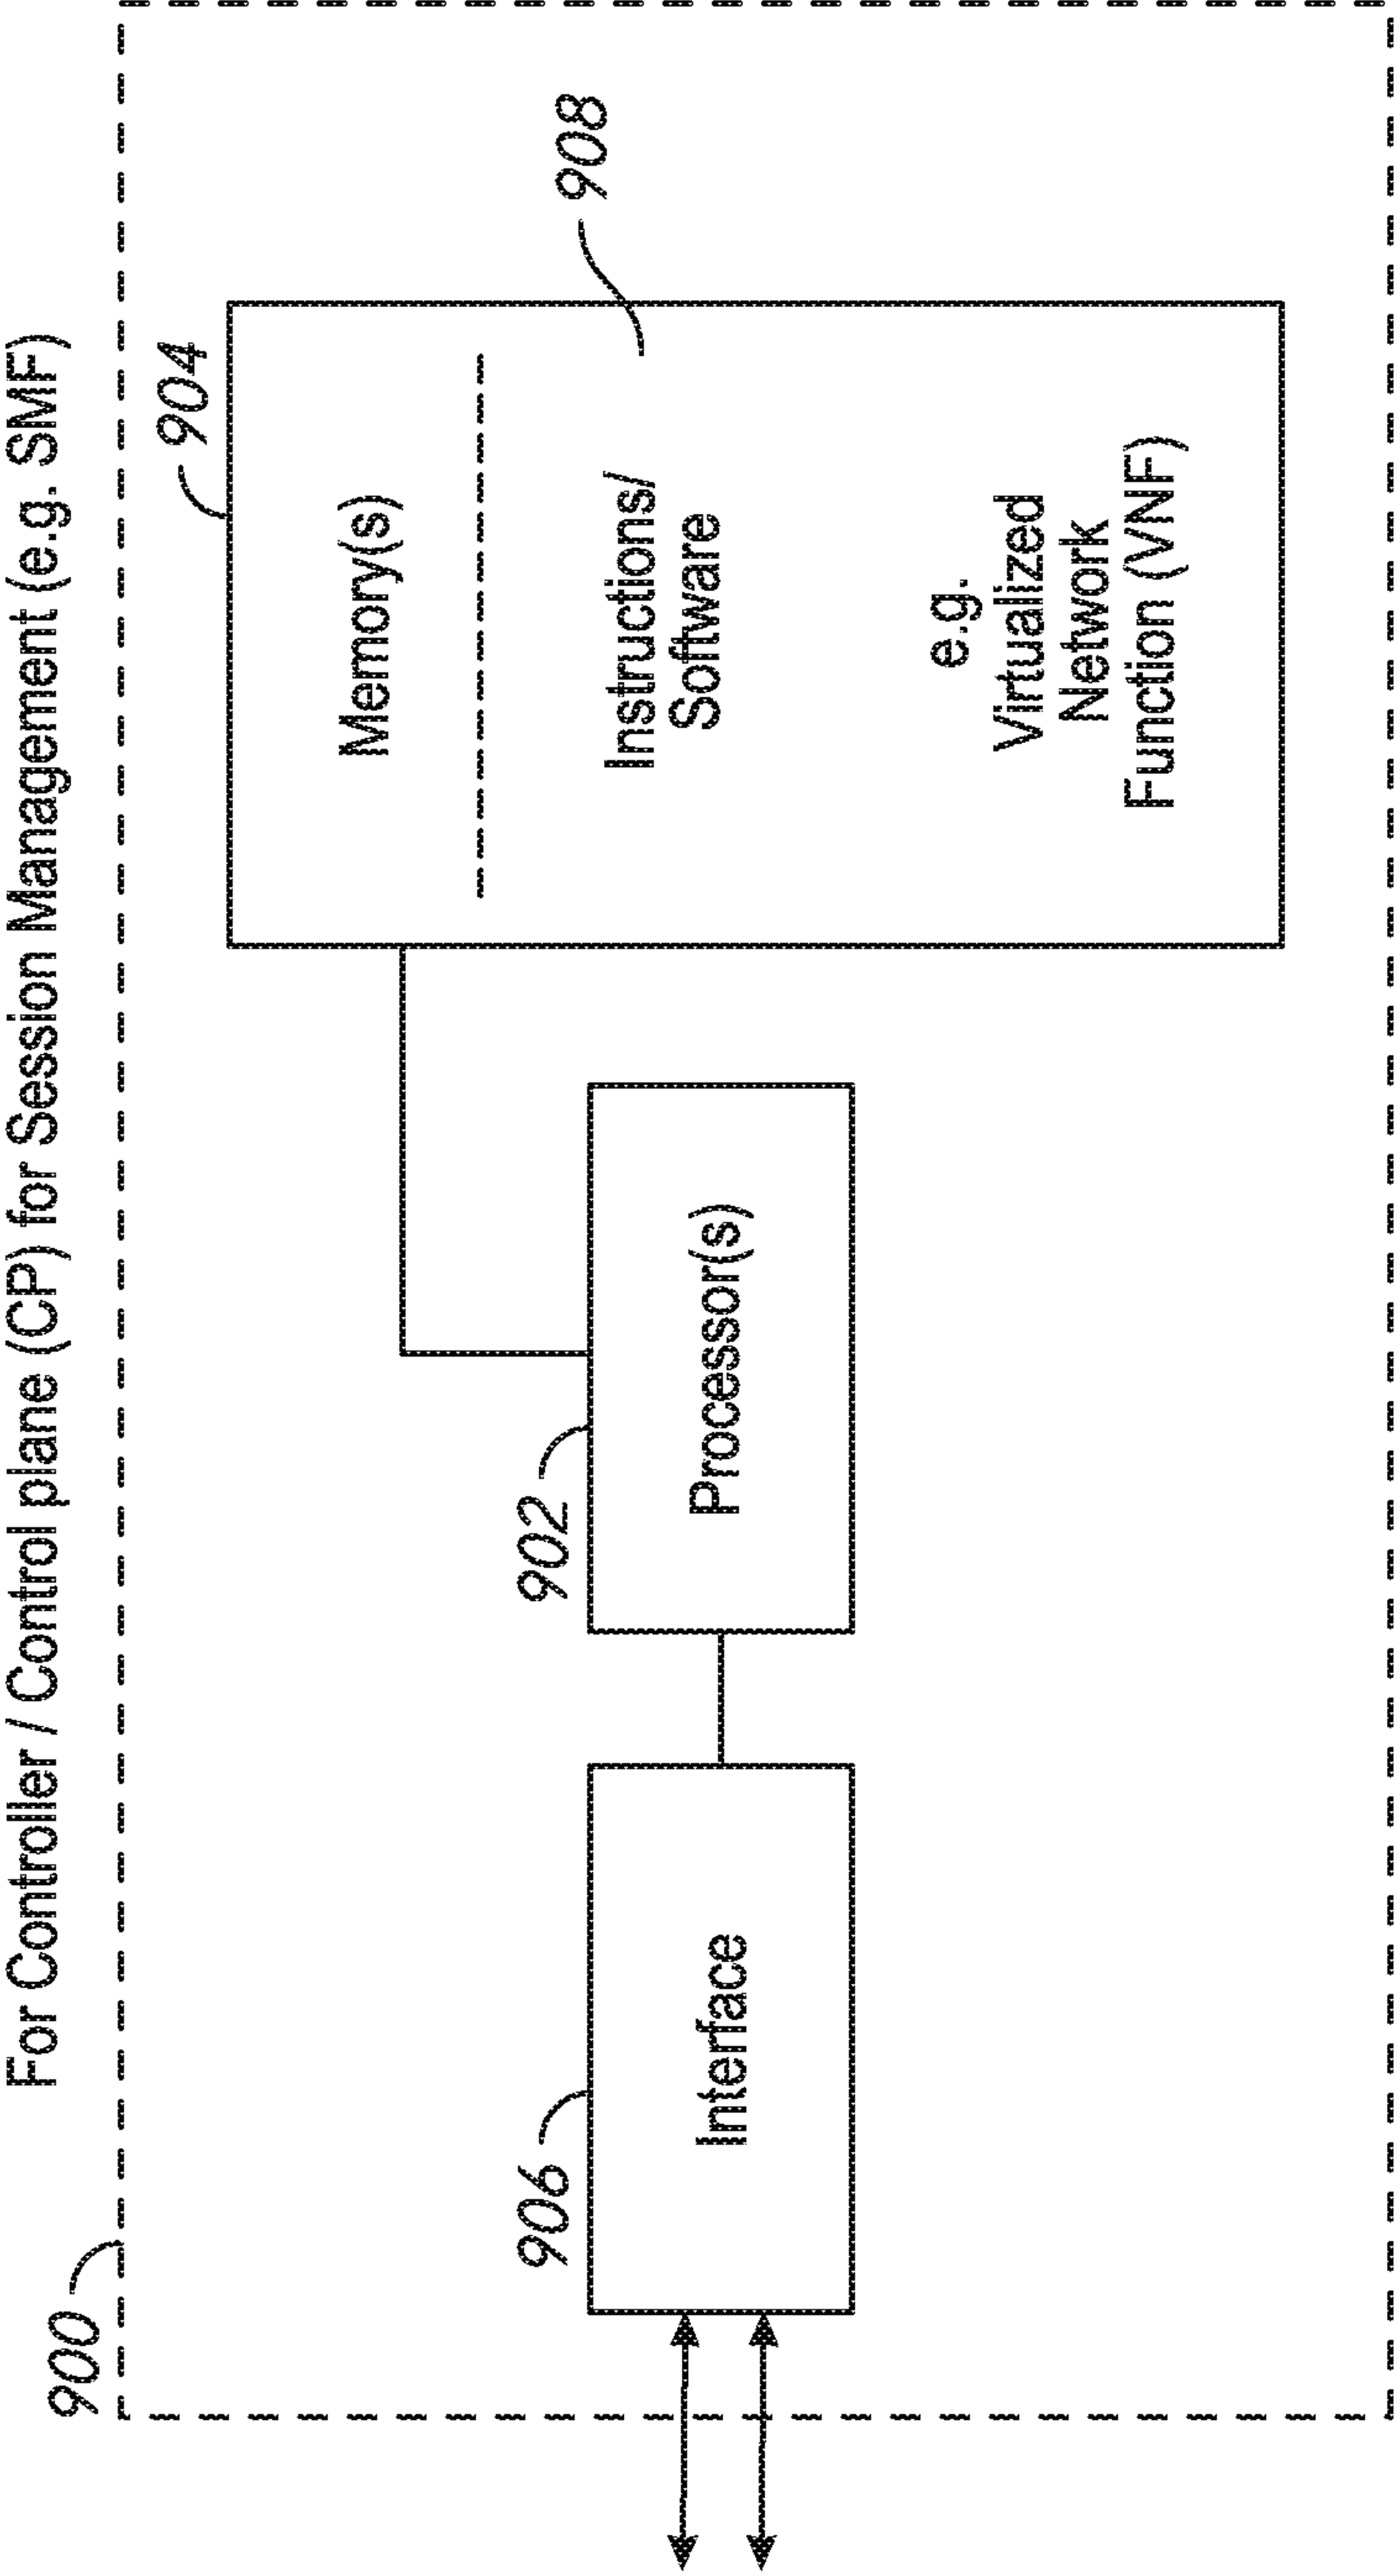


FIG. 9

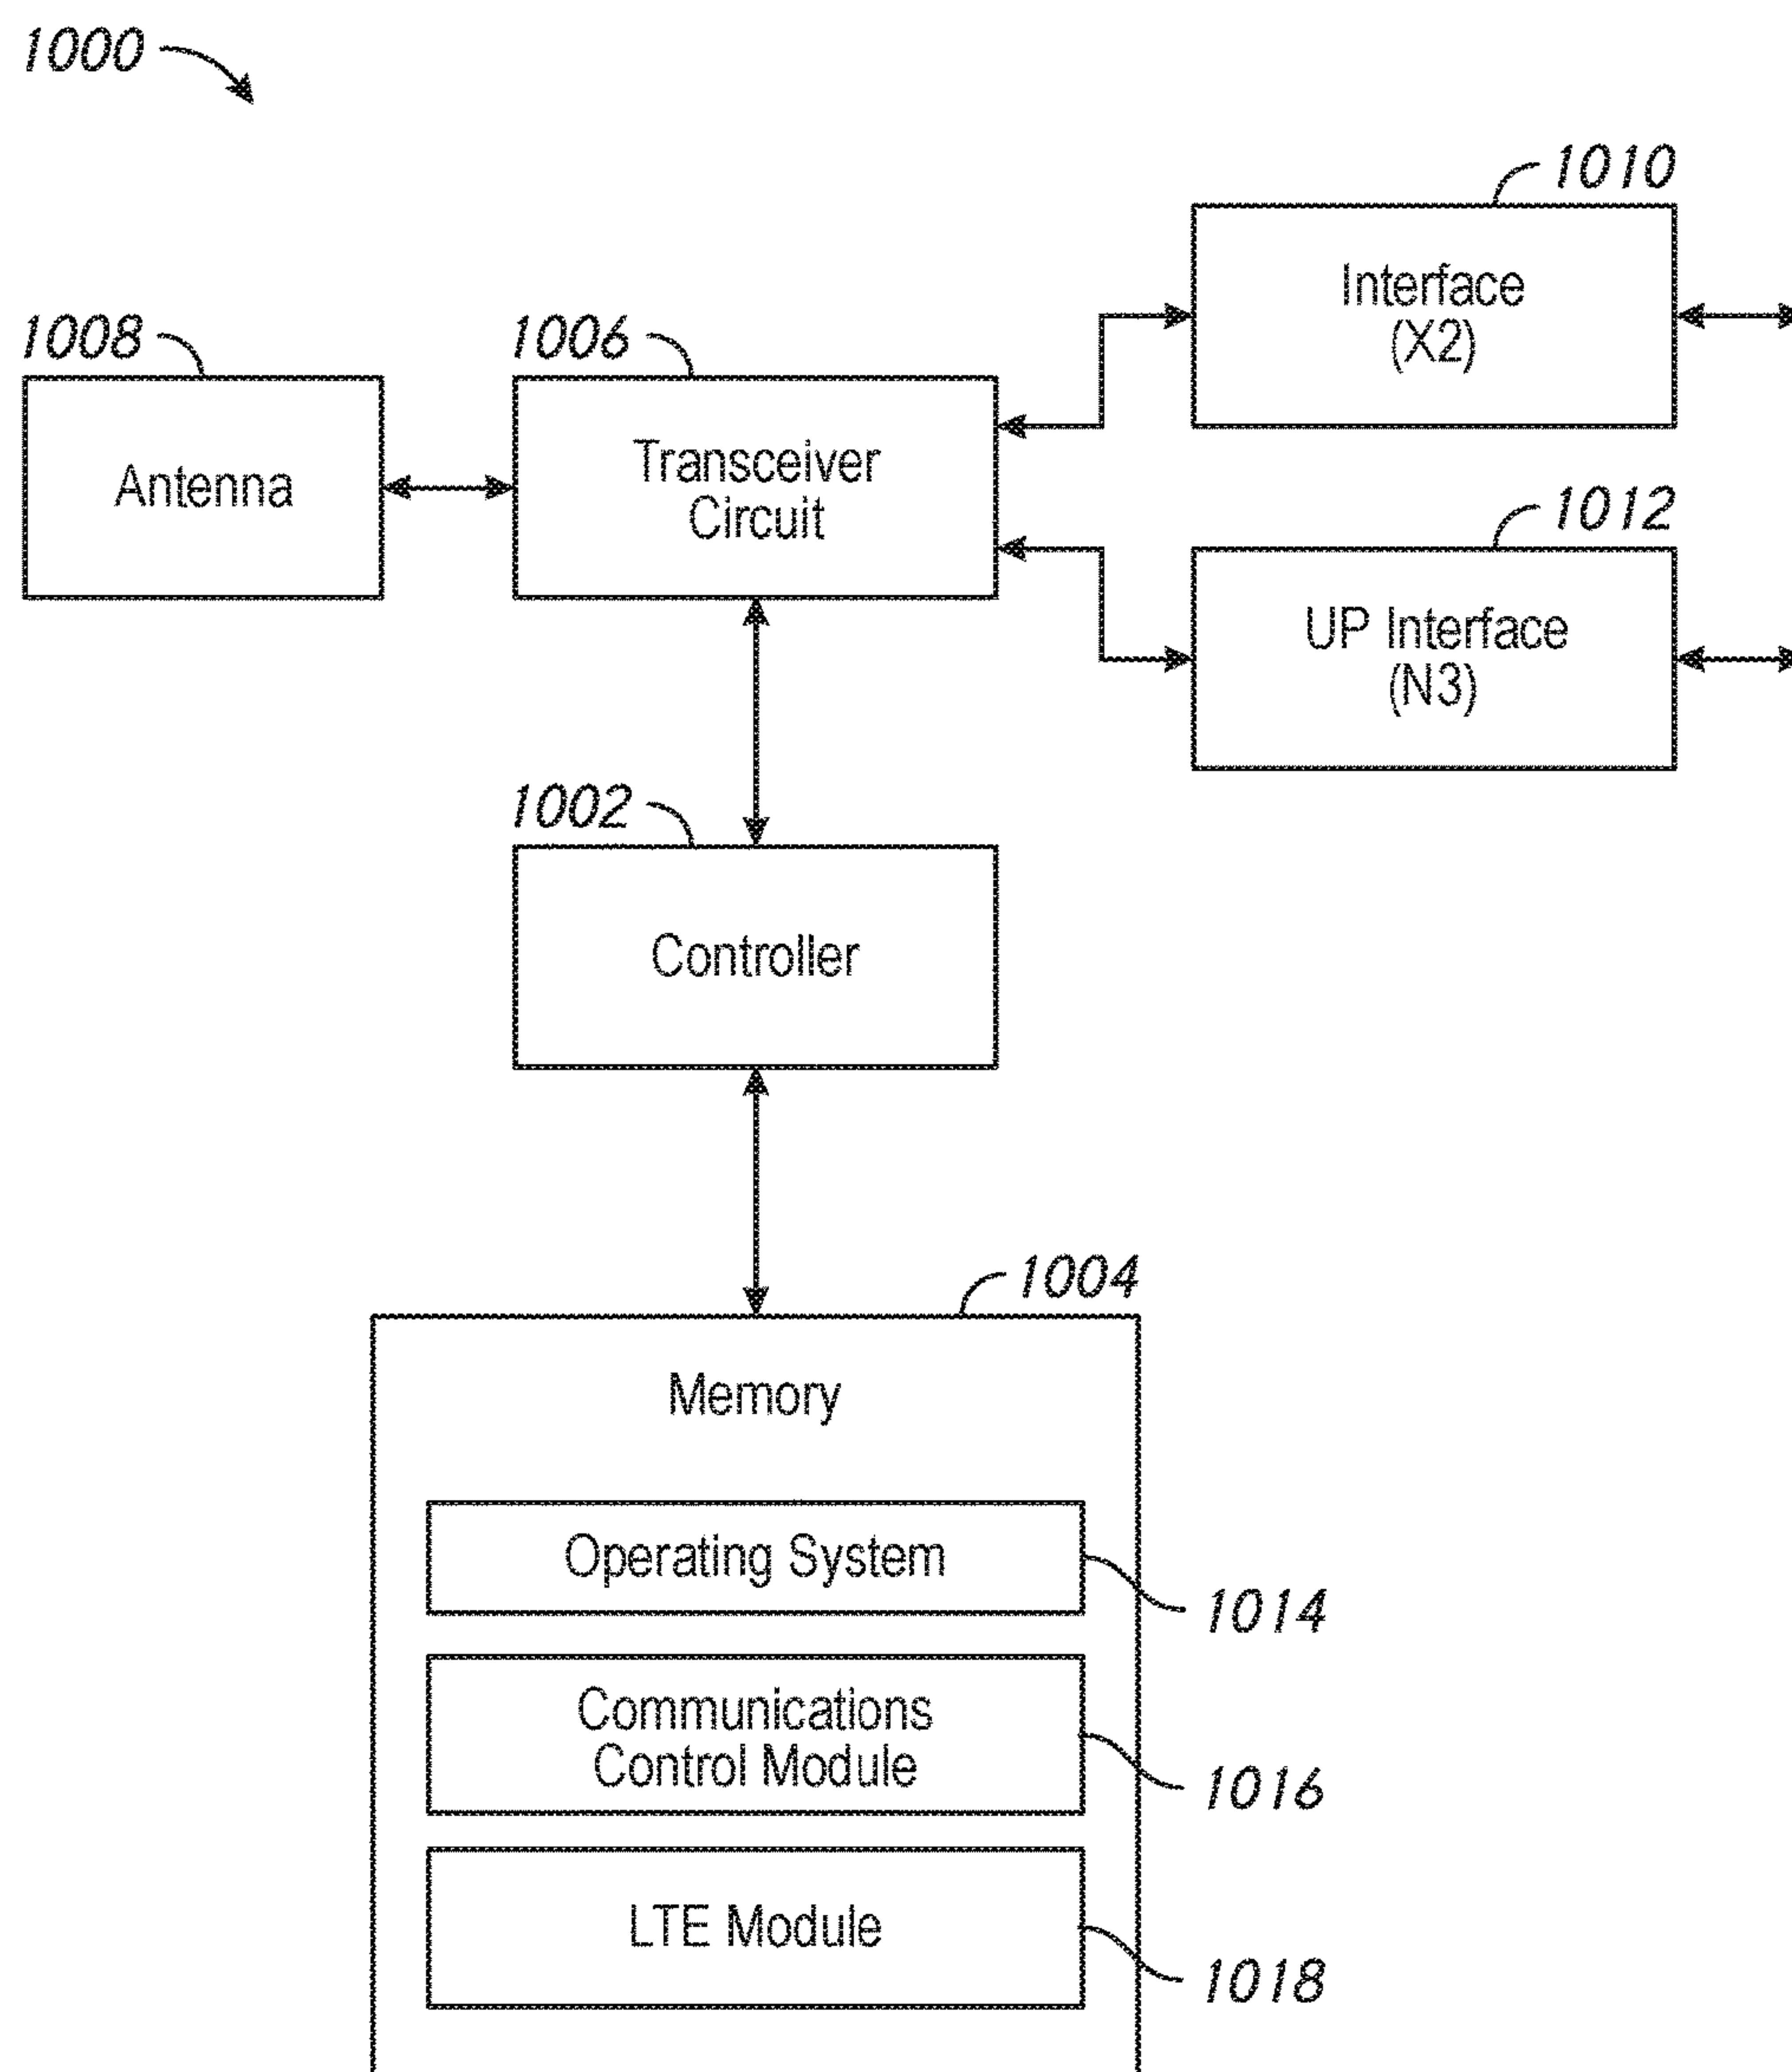


FIG. 10

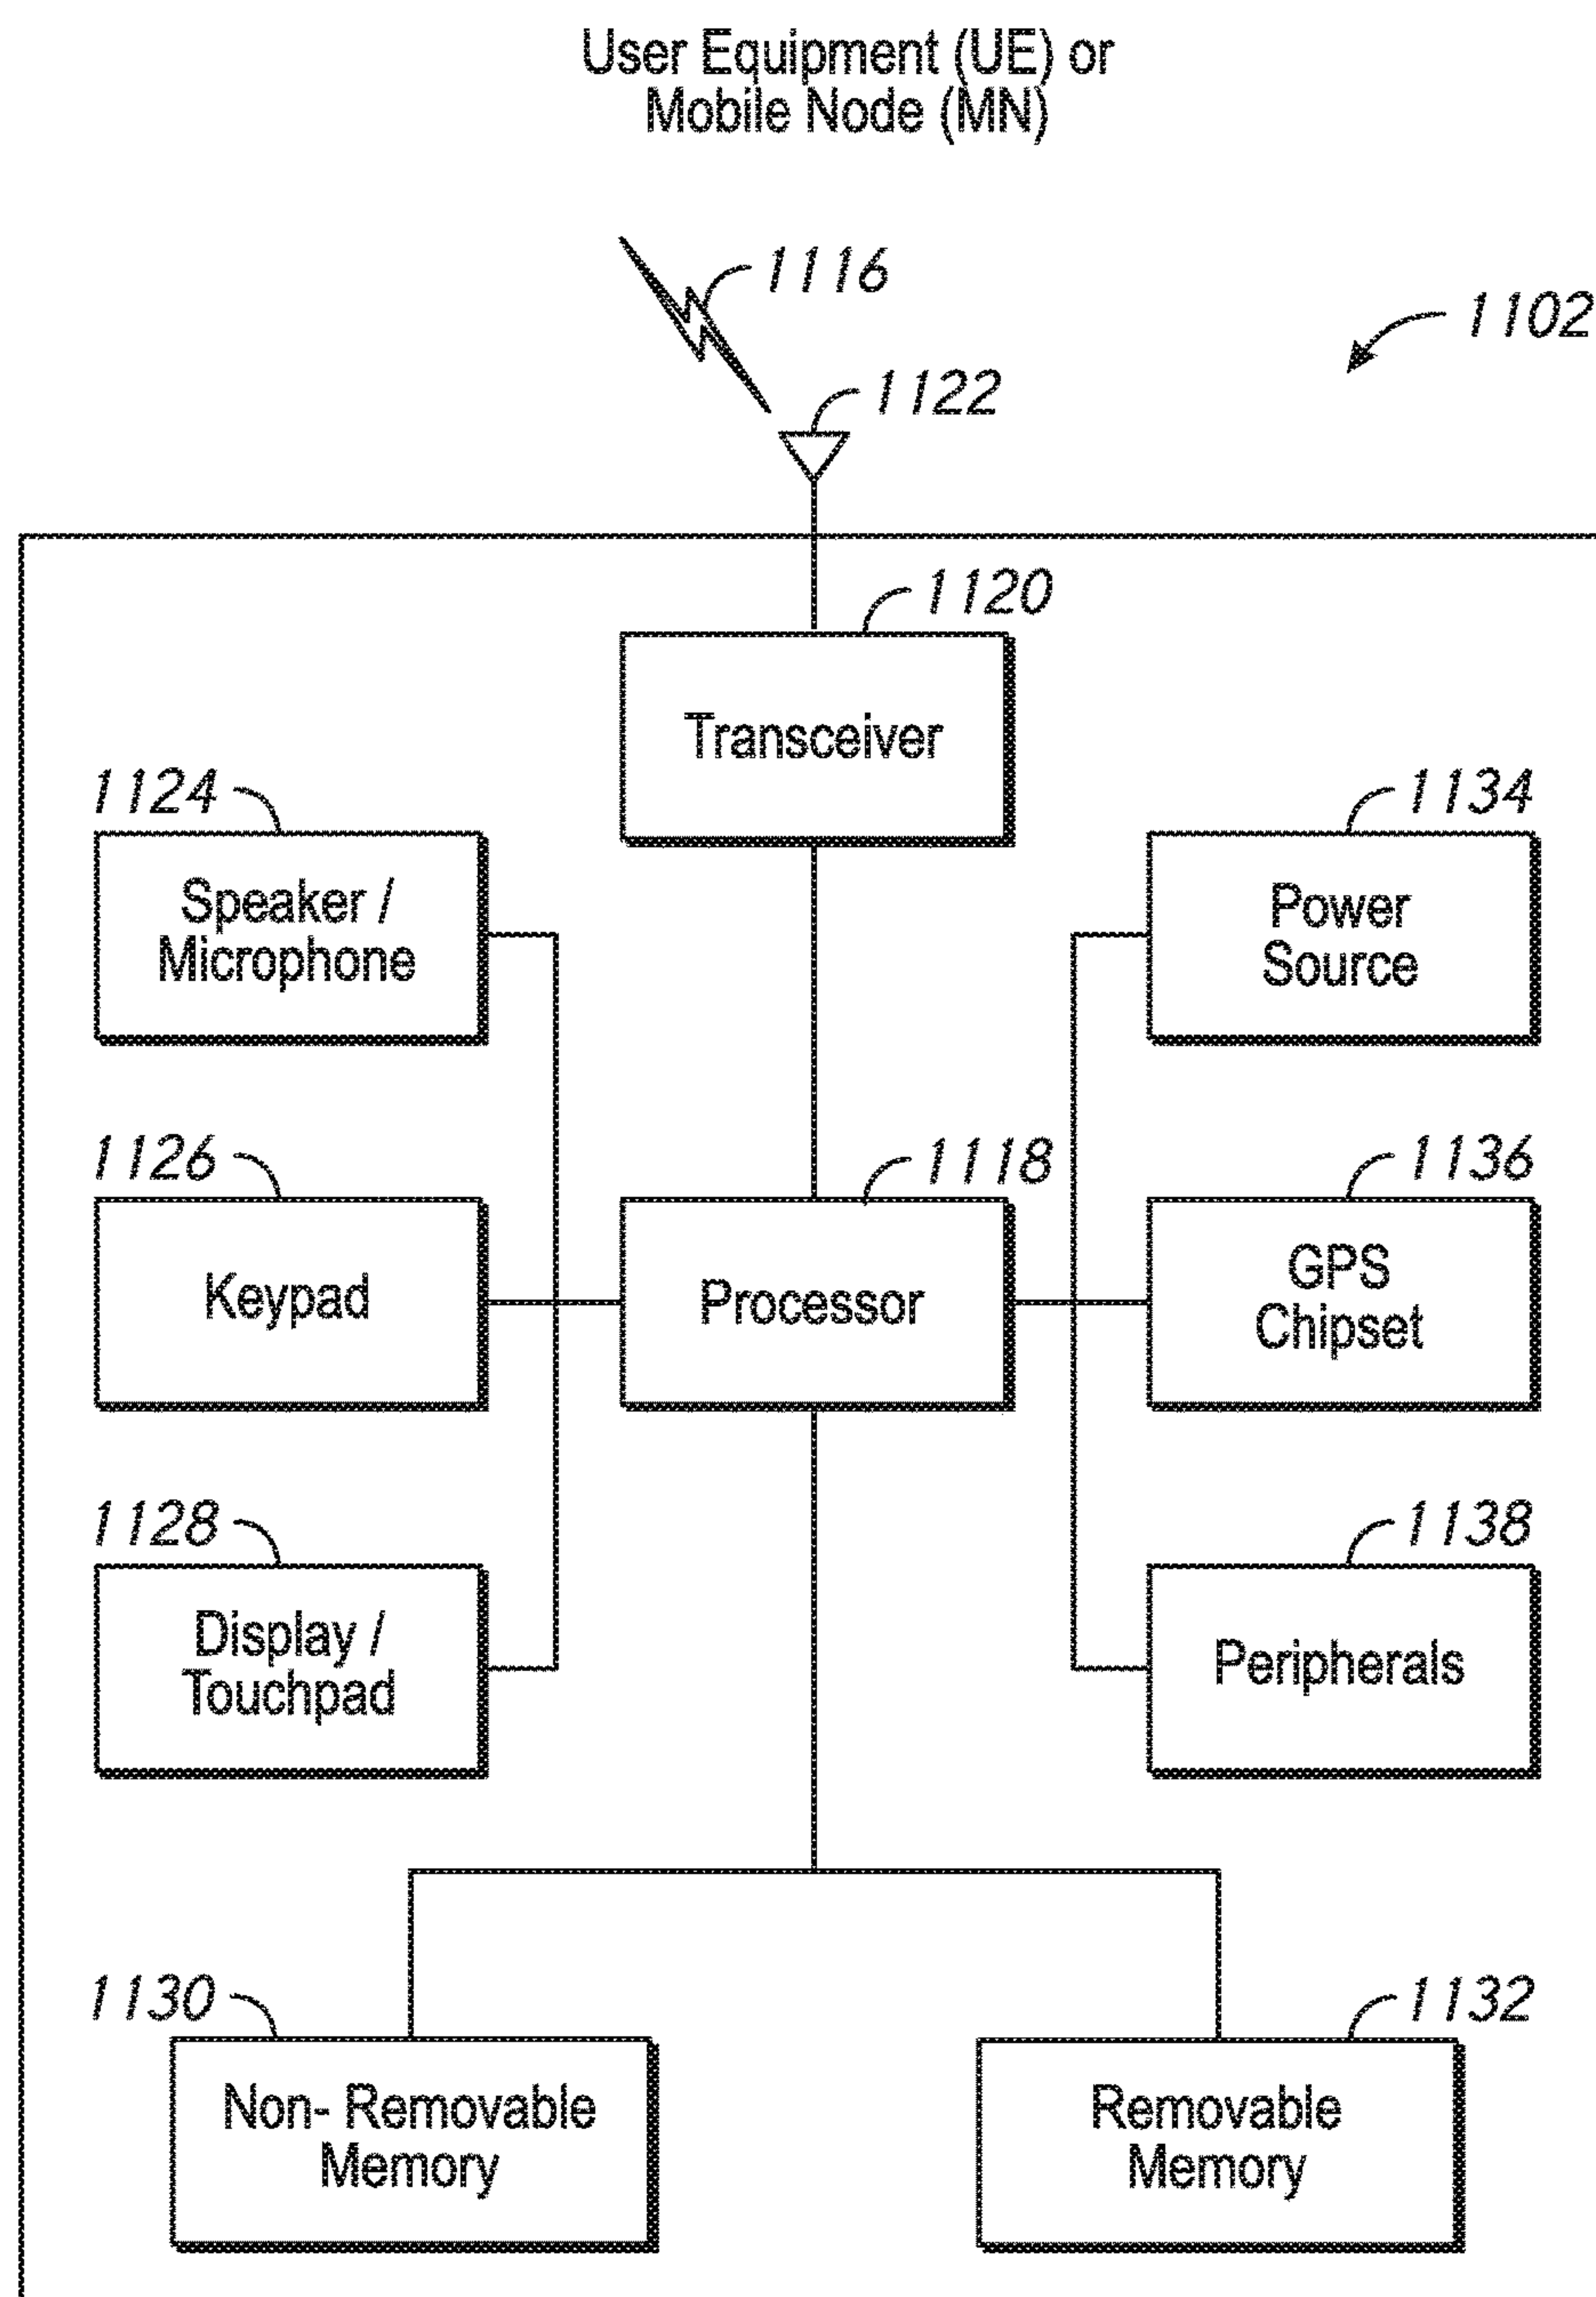


FIG. 11

**METHODS AND APPARATUS FOR
PROVIDING END MARKER
FUNCTIONALITY IN MOBILE NETWORKS
HAVING SRV6-CONFIGURED MOBILE
USER PLANES**

**CROSS-REFERENCE TO RELATED
APPLICATION**

[0001] This application is a continuation of and claims benefit to U.S. patent application Ser. No. 15/921,533, filed Mar. 14, 2018, the entire contents of which are incorporated herein by reference.

TECHNICAL FIELD

[0002] This disclosure relates generally to providing end marker functionality in mobile networks having mobile user planes configured with segment routing (SR) for IPv6 (SRv6).

BACKGROUND

[0003] There is a need to provide end marker functionality in mobile networks having mobile user planes configured with segment routing (SR) for IPv6 (SRv6), especially suitable for 5G mobile network migration.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] So that the present disclosure can be understood by those of ordinary skill in the art, a more detailed description may be had by reference to aspects of some illustrative implementations, some of which are shown in the accompanying drawings.

[0005] FIG. 1A is an illustrative representation of a network architecture of a 4G/LTE mobile network;

[0006] FIGS. 1B, 1C and 1D are illustrative network node diagrams of relevant network nodes of the 4G/LTE mobile network of FIG. 1A, for describing a technique for a user equipment (UE) handover which utilizes end marker functionality;

[0007] FIGS. 2A-2D are illustrative block diagrams of communication networks operative to route IP traffic flows with use of a segment routing (SR) for IPv6 (SRv6) protocol;

[0008] FIG. 3A is an illustrative representation of a network architecture of a 5G mobile network;

[0009] FIGS. 3B, 3C, and 3D are illustrative network node diagrams of relevant network nodes of the 5G mobile network of FIG. 3A, for describing techniques for providing the end marker functionality in mobile networks having mobile user planes configured with SRv6 in accordance with some implementations of the present disclosure;

[0010] FIGS. 4A-4B are flowcharts for describing methods for providing end marker functionality in mobile networks having mobile user planes configured with SRv6, which may be performed by a control plane (CP) entity for session management (e.g. a session management function or "SMF") in the mobile network, in accordance with some implementations of the present disclosure;

[0011] FIGS. 5A-5C are flowcharts for describing methods for providing end marker functionality in mobile networks having mobile user planes configured with SRv6, which may be performed by a (source) base station (eNodeB or gNodeB) in the mobile network, in accordance with some implementations of the present disclosure;

[0012] FIGS. 6A-6B are call flow diagrams involving relevant network nodes of the 5G mobile network of FIGS. 3A-3D, for describing methods for providing end marker functionality in mobile networks having mobile user planes configured with SRv6;

[0013] FIG. 7A is an illustrative representation of an SRv6 message which includes an end marker segment identifier (SID), and FIGS. 7B-7C are illustrative examples of SRv6 functions associated with the end marker SID (i.e. for end marker handling for GTP interface);

[0014] FIG. 8A is an illustrative representation of an SRv6 message which includes an end marker SID, whereas FIGS. 8B-8C are illustrative examples of SRv6 functions associated with the end marker SID (i.e. for end marker handling for SRv6 interface);

[0015] FIG. 9 is a schematic block diagram of basic relevant components of a server, network device, network element, or network equipment for use in a mobile network according to some implementations of the present disclosure;

[0016] FIG. 10 is a schematic block diagram of basic relevant components of a base station (e.g. an eNodeB or gNodeB) for use in a mobile network according to some implementations of the present disclosure; and

[0017] FIG. 11 shows a schematic block diagram of a UE operative in a mobile network according to some implementations of the present disclosure.

[0018] In accordance with common practice the various features illustrated in the drawings may not be drawn to scale. Accordingly, the dimensions of the various features may be arbitrarily expanded or reduced for clarity. In addition, some of the drawings may not depict all of the components of a given system, method or device. Finally, like reference numerals may be used to denote like features throughout the specification and figures.

DESCRIPTION OF EXAMPLE EMBODIMENTS

[0019] Numerous details are described in order to provide a thorough understanding of the example implementations shown in the drawings. However, the drawings merely show some example aspects of the present disclosure and are therefore not to be considered limiting. Those of ordinary skill in the art will appreciate that other effective aspects and/or variants do not include all of the specific details described herein. Moreover, well-known systems, methods, components, devices and circuits have not been described in exhaustive detail so as not to obscure more pertinent aspects of the example implementations described herein.

Overview

[0020] According to the present disclosure, end marker functionality may be provided in mobile networks having mobile user planes configured with segment routing (SR) for IPv6 (SRv6), especially suitable for 5G mobile network migration.

[0021] In one illustrative example, a base station is configured for use in a mobile network and operative as a source base station for a handover of a user equipment (UE) to a target base station. The base station may receive an SRv6 control message from a user plane (UP) entity which carries data traffic of a data session for the UE. The base station may perform a function associated with a segment identifier (SID) identified in a segment routing header (SRH) of the

SRv6 control message. The function may be an end marker handling function associated with an end marker SID.

[0022] When the source and target base stations are configured to communicate with each other according to a GPRS tunneling protocol (GTP) over a GTP tunnel, performing the end marker handling function may cause the base station to at least generate a tunneling protocol message comprising an end marker message and send the tunneling protocol message comprising the end marker message for receipt by the target base station. In response to receiving this end marker, the target base station may perform end marker functionality (e.g. release buffered data packets from the UP entity and transmit them to the UE).

[0023] When the source and target base stations are configured to communicate with each other according to SRv6, performing the end marker handling function may cause the base station to at least generate a new SRv6 control message including a new end marker SID and send the new SRv6 control message including the new end marker SID for receipt by the target base station. Again, in response to receiving this end marker, the target base station may perform end marker functionality (e.g. release buffered data packets from the UP entity and transmit them to the UE).

[0024] More detailed implementations for providing end marker functionality, especially suitable for 5G mobile network migration, are described in more detail below.

Example Embodiments

[0025] FIG. 1A is an illustrative representation of a network architecture **100a** of a 4G/LTE mobile network. Network architecture **100a** of FIG. 1A includes an evolved universal terrestrial radio access network (E-UTRAN) **104**, a mobility management entity (MME) **106**, a serving/packet data network (PDN) gateway-control plane entity (S/PGW-C) **108**, a S/PGW-user plane entity (S/PGW-U) **110**, a policy and charging rules function (PCRF) **112**, and an application function (AF) **114**.

[0026] A user equipment (UE) **102** may gain access to the mobile network via E-UTRAN **104**, which may include a plurality of base stations, such as eNodeBs. UE **102** operating in the mobile network may be any suitable type of device, such as a cellular telephone, a smart phone, a tablet device, an Internet of Things (IoT) device, and a machine-to-machine (M2M) device, to name but a few. Communications with nodes or devices on one or more data networks, such as the Internet **130**, may be provided via S/PGW-U **110**.

[0027] FIGS. 1B, 1C and 1D are illustrative network node diagrams **100b**, **100c**, and **100d**, respectively, of relevant network nodes of the 4G/LTE mobile network of FIG. 1A, for describing a technique for UE handover which utilizes end marker functionality. End marker functionality is provided in order to maintain the proper ordering of data packets sent to UE **102** during a handover. Note that end marker functionality for 4G/LTE is specified in 3GPP 29.28 (section 7.3.2).

[0028] Network node diagram **100b** of FIG. 1B illustrates UE **102**, a base station **120**, a serving gateway-user plane (SGW-U or simply “SGW”) **124**, and a PDN gateway-user plane (PGW-U or simply “PGW”) **126** for connection to the Internet **130**. In general, communication between UE **102** and base station **120** may be provided over an air (radio) interface. Communication between base station **120** and SGW **124** may be provided over an interface **140** (e.g. an S1

interface), whereas communication between SGW **124** and PGW **126** may be provided over an interface **146** (e.g. an S5 interface).

[0029] Initially in FIG. 1B, PGW **126** may send a plurality of data packets **160** (illustrated as data packets **1**, **2**, and **3**) to SGW **124** over interface **146**, communicated via a tunnel **152** using a tunneling protocol. The tunneling protocol may be a GPRS tunneling protocol (GTP). These data packets **160** may be received by SGW **124** and sent to base station **120** via interface **140** as data packets **162**, which are communicated via a tunnel **150** using a tunneling protocol (again, the GTP). Base station **120** may receive these data packets **162** and wirelessly communicate them to UE **102** over the air interface as data packets **164**.

[0030] FIG. 1C illustrates data packet communications for UE **102** during a handover of UE **102** from base station **120** (the “source” base station) to a base station **122** (the “target” base station). Communication between base station **120** and base station **122** may be provided over an interface **144** (e.g. an X2 interface), and communication between base station **122** and SGW **124** may be provided over an interface **142** (e.g. an S1 interface).

[0031] As illustrated in FIG. 1C, PGW **126** may send a plurality of data packets **180** (illustrated as data packets **1**, **2**, **3**, **4** and **5**) to SGW **124** over interface **146**, communicated via tunnel **152** using the tunneling protocol (again, the GTP). These data packets **180** may be received by SGW **124**, which distributes the data packets between base stations **120** and **122** to accommodate the UE handover. In particular, SGW **124** may send some of the data packets to base station **120** over interface **140** (e.g. data packets **182** illustrated as data packets **1**, **2**, and **3**) and some of the data packets to “target” base station **122** over interface **142** (i.e. data packets **186** illustrated as data packets **4** and **5**). Again, data packets **182** may be communicated over interface **140** via tunnel **150** using the tunneling protocol (again, the GTP), and data packets **186** may be communicated over interface **142** via a tunnel **156** using the tunneling protocol (again, the GTP).

[0032] Base station **120** may receive these data packets **182** and send them to base station **122** over interface **144** as data packets **184**, communicated via a tunnel **154** using a tunneling protocol (again, the GTP). An end marker message **160** may be inserted after the last one of transmitted data packets **184**, signifying the end of data packets **184** on the “forwarding” path to base station **122**. On the other hand, data packets **186** received by base station **122** over the “direct path” may be buffered in a buffer **195** as data packets **188**. The buffered data packets **188** are held in buffer **195** until base station **122** receives data packets **184** from base station **120** over the forwarding path to transmit to UE **102** over the air interface. Upon receipt of end marker message **160**, base station **122** may release data packets **188** from buffer **195** and transmit them to UE **102** over the air interface. Data packets **184** from the forwarding path and data packets **188** from buffer **195** over the direct path are represented together as data packets **189** transmitted over the air interface to UE **102**. As illustrated, data packets **189** are sent in their proper order to UE **102**.

[0033] FIG. 1D illustrates basic packet communications to UE **120** via base station **122** after the handover previously described in relation to FIG. 1C. Initially, PGW **126** may send a plurality of data packets **190** (illustrated as data packets **1**, **2**, and **3**) to SGW **124** over interface **146**, communicated via tunnel **152** using the tunneling protocol

(again, the GTP). These data packets **190** may be received by SGW **124** and sent to base station **122** via interface **142** as data packets **192**, which are communicated via tunnel **156** using the tunneling protocol (again, the GTP). Base station **122** may receive these data packets **192** and wirelessly communicate them to UE **102** over the air interface as data packets **194**.

[0034] Network equipment and functions associated with existing 4G/LTE mobile networks of FIGS. 1A-1D are to be replaced and/or upgraded with network equipment and functions associated with 5G mobile networks. Referring ahead to FIG. 3A, what is shown is an illustrative representation of a network architecture **300a** of a 5G mobile network. Network architecture **300a** of FIG. 3A includes a radio access network (RAN) **304**, an access and mobility management function (AMF) **306**, a session management function (SMF) **308**, a user plane function (UPF) **310**, a policy control function (PCF) **312**, and an application function (AF) **314**. A plurality of interfaces or reference points N1, N2, N3, N4, N5, N6, N7, N9, N11, and N15 of network architecture **300a** for 5G define the interfaces and/or protocols between each of the entities, as described in the relevant (evolving) standards documents for 5G (e.g. 3GPP 23.501 and 23.502). A UE **302** may gain access to the 5G mobile network via RAN **304**, which may include a plurality of base stations, such as eNodeBs or gNodeBs. UE **302** may be any suitable type of device, such as a cellular telephone, a smart phone, a tablet device, an Internet of Things (IoT) device, and a machine-to-machine (M2M) device, to name but a few. Communications with nodes or devices on one or more data networks **301**, such as the Internet, may be provided via UPF **310**.

[0035] Currently, the mobile user plane for 5G (e.g. UPF **310** of FIG. 3A) makes use of tunneling (i.e. GTP) over interfaces N3, N9, and X2. However, it may be desirable to utilize segment routing (SR) for IPv6 (SRv6) over these reference points. To illustrate a few SRv6 implementations, FIGS. 2A-2D are block diagrams of network nodes which are configured to route packets using SRv6.

[0036] With reference first to FIG. 2A, a network **200a** which includes a plurality of nodes **202** (e.g. routers, servers, base stations, gateways, CP or UP entities, etc.) is shown. In this example, the plurality of nodes **202** includes nodes **210**, **212**, **214**, **216**, **218**, **220**, **222**, **224**, and **226** which are designated as nodes A, B, C, D, E, F, G, H, and Z, respectively. Here, node **210** (i.e. node A) is considered to be a source node and node **226** (i.e. node Z) is considered to be a destination node. Nodes **212**, **214**, **216**, **218**, **220**, **222**, and **226** which correspond to nodes B, C, D, E, F, and G are part of an SR domain (i.e. nodes that are SRv6-capable nodes/SRv6-configured nodes). The source node (node **210** or A) and the destination node (node **226** or Z) are not part of or outside of the SR domain (e.g. they may or may not be SRv6-configured nodes, such as “regular” IPv6 nodes).

[0037] A basic data format of an SR-IPv6 packet **260** for use in SRv6 routing is also shown in FIG. 2A. As illustrated, the data format of SR-IPv6 packet **260** includes an IPv6 header **262** and a payload **264**. For SRv6 routing of IPv6 packet **260**, the data format of IPv6 packet **260** further includes an SR header **270** or “SRH” (i.e. an extension header for SR as defined by RFC 2460). SR header **270** may include an ordered list of segments **272** which defines a network path **250** along which the SR-IPv6 packet **260** will be communicated in network **200a**. In the example of FIG.

2A, the ordered list of segments **272** includes node **214** (“node C”), node **220** (“node F”), and node **224** (“node H”) in network path **250**. A segment is or includes an instruction (e.g. forwarding, servicing, application-specific, etc.) to be applied to the SR-IPv6 packet **260**. Thus, an SR-IPv6 packet (e.g. SR-IPv6 packet **260**) may be communicated in network **200a** from a source node (e.g. node **210** or A) to a destination node (e.g. a node **226** or Z) along a desired or predetermined network path **250**. The source node (e.g. node **210** or A) may operate to choose this network path **250** and encode it in the SR header **270** as the ordered list of segments **272**. The rest of network **200a** may operate to execute the encoded instructions without any further per-flow state.

[0038] FIG. 2B is an illustrative representation of a network **200b** which is similar to network **200a** of FIG. 2A. Here, nodes **212**, **214**, **216**, **218**, **220**, **222**, and **226** which correspond to nodes B, C, D, E, F, and G are shown to be part of an SR domain **280**. The source node (node **210** or A) and the destination node (node **226** or Z) are not part of or outside of the SR domain **280** (e.g. they may or may not be SRv6-configured nodes). In the example of FIG. 2B, node **212** or B may be considered as an ingress node of the SR domain **280** and node **222** or G may be considered as an egress node of the SR domain **280**.

[0039] Note that an SR header may be inserted in an IPv6 packet at a source node or at an ingress node, or even encapsulated at the ingress node, as a few examples. In the example shown in FIG. 2B, an SR header of an IPv6 packet is inserted at the source node (node **210** or A) to produce an SR-IPv6 packet **290b**. In this case, the source node (node **210** or A) which is SRv6-capable may originate the SR-IPv6 packet **290b**. Here, the SR header of SR-IPv6 packet **290b** includes an ordered list of segments (SL) designating nodes B, D, G, and Z to define network path **250**. Initially, a source address (SA) of SR-IPv6 packet **290b** is designated as node A and a destination address (DA) of SR-IPv6 packet **290b** is designated as node B (i.e. the first node in the SL). When SR-IPv6 packet **290b** is communicated to the ingress node (i.e. node **212** or B), the DA is modified by the ingress node to include the next or second node in the SL (i.e. node D), as indicated in SR-IPv6 packet **292b**. When SR-IPv6 packet **292b** is communicated to the node D (via node C), the DA is modified by node D to include the next or third node in the SL (i.e. node G), as indicated in SR-IPv6 packet **294b**. When SR-IPv6 packet **294b** is further communicated to the node G (via node F), the DA is modified by node G to include the next or fourth node in the SL (i.e. node Z which is the destination node), as indicated in SR-IPv6 packet **296b**.

[0040] In the example of FIG. 2C, an SR header of an IPv6 packet **290c** is inserted at the ingress node (node **212** or B) to produce an SR-IPv6 packet **292c**. Here, the SR header of SR-IPv6 packet **292c** includes an ordered list of segments (SL) designating nodes D, G, and Z to define network path **250**. In this case, the source node, which may or may not be SRv6-configured, may originate the IPv6 packet **290c** without any SR header. When SR-IPv6 packet **292c** is communicated to node D (via node C), the DA is modified by node D to include the next or second node in the SL (i.e. node G), as indicated in SR-IPv6 packet **294c**. When SR-IPv6 packet **294c** is further communicated to the node G (via node F), the DA is modified by node G to include the next or third node in the SL (i.e. node Z, which is the destination node) and the SR header is removed, as indicated in IPv6 packet **296c**.

Here, similar to the source node, the destination node may or may not be SRv6-configured.

[0041] In the example of FIG. 2D, the source node, which may or may not be SRv6-configured, originates an IPv6 packet **290d** without any SR header. The ingress node (node **212** or B) operates to encapsulate IPv6 packet **290d** with a new, outer IPv6 header followed by an SR header, to produce an SR-IPv6 packet **292d**. The SL of the SR header includes nodes D and G, but does not include the destination node (node **226** or Z). When SR-IPv6 packet **292d** is communicated to node D (via node C), the DA is modified by node D to include the next or second node in the SL (i.e. node G), as indicated in SR-IPv6 packet **294d**. When SR-IPv6 packet **294d** is further communicated to the node G (via node F), the SR-IPv6 packet **294d** is decapsulated by node G, which is represented by SR-IPv6 packet **296d**. Here, similar to the source node, the destination node may or may not be SRv6-configured.

[0042] Note that the current state of the art for SRv6 may be further described in various standards-related documents, including Internet Engineering Task Force (IETF) documents, such as “Segment Routing Architecture” identified by “draft-ietf-spring-segment-routing-14”; “IPv6 Segment Routing Header (SRH)” identified by “draft-ietf-6man-segment-routing-header-07”; and “SRv6 Network Programming” identified by “draft-filsfils-spring-srv6-network-programming-03”.

[0043] With reference again to FIG. 3A, in 5G mobile networks, it is advantageous to utilize SRv6 over interfaces that currently utilize GTP (e.g. the N3, N9, and X2 interfaces). However, ubiquitous deployment and transitioning associated with SRv6-configured mobile user planes may be provided over time, and therefore, partial replacement architectures and upgrades may exist. In some implementations of the present disclosure, replacing GTP with SRv6 may be provided in phases or stages. End marker functionality for 5G is specified in 3GPP **23.501** (section 5.8.2) and 3GPP **23.502** (section 4.9).

[0044] Accordingly, there is a need to provide end marker functionality for SRv6-configured mobile user planes, especially suitable for 5G mobile network migration.

[0045] FIGS. 3B, 3C, and 3D are illustrative network node diagrams **300b**, **300c**, and **300d**, respectively, of relevant network nodes of the 5G mobile network of FIG. 3A, for describing techniques for providing end marker functionality in mobile networks having mobile user planes configured with SRv6. In particular, FIGS. 3B-3C relate to partial SRv6 replacement/upgrades, where communication between base stations and UPFs utilize SRv6 (as does the core network) but communication between source and base stations utilize GTP. On the other hand, FIG. 3D relates to a full SRv6 replacement/upgrade, where communication between base stations and UPFs utilize SRv6 (as does the core network) and communication between source and base stations utilize SRv6.

[0046] In FIG. 3B, the relevant network nodes of the network node diagram **300b** (i.e. the partial SRv6 replacement/upgrade) include a base station **320** which communicates with a UPF **310a** over an interface **340** (e.g. an N3 interface) according to SRv6, and a base station **322** which communicates with the UPF **310a** over an interface **342** (e.g. an N3 interface) according to SRv6. FIG. 3B also illustrates UPFs **310a** and **310b** which communicate over an interface **316** (e.g. an N9 interface) according to SRv6. On the other

hand, base stations **320** and **322** communicate with each other over an interface **344** (e.g. an X2 interface) according to GTP over a (GTP) tunnel **354**.

[0047] FIG. 3C illustrates the same partial replacement/upgrade architecture as described in relation to FIG. 3B, but includes further illustration regarding data packet communication during a UE handover from a base station **320c** (the “source” base station) to a base station **322c** (the “target” base station). As illustrated in FIG. 3C, UPF **310b** may send a plurality of data packets **380** (illustrated as data packets **1**, **2**, **3**, **4** and **5**) to UPF **310b** over interface **346**, communicated via SRv6. These data packets **380** may be received by UPF **310a**, which distributes the data packets between base stations **320c** and **322c** to accommodate the UE handover. More specifically, UPF **310a** may send some of the data packets to base station **320c** over interface **340** (e.g. data packets **382** illustrated as data packets **1**, **2**, and **3**) and some of the data packets to “target” base station **322c** over interface **342** (i.e. data packets **386** illustrated as data packets **4** and **5**). Data packets **382** may be communicated over interface **340** using SRv6, and data packets **386** may be communicated over interface **342** using SRv6.

[0048] Base station **320c** may receive these data packets **382** and send them to base station **322c** over interface **344** as data packets **384**, communicated via a tunnel **354** using a tunneling protocol (again, the GTP). An end marker message **360c** may be inserted after the last one of transmitted data packets **384**, signifying the end of the data packets on the “forwarding path.” The end marker message **360c** may be generated and sent by base station **320c** in response to receiving from SMF **308** (via UPF **310a**) an IP message **381** which includes an end marker segment identifier. IP message **381** may be an SRv6 message including an end marker SID (“EM SID”). Such messaging and techniques are described in relation to FIGS. 4A, 5A, 6A, and 7A-7C, and elsewhere herein.

[0049] On the other hand, data packets **386** received by base station **322c** over the “direct path” may be buffered in a buffer **395** as data packets **388**. The buffered data packets **388** are held in buffer **395** until base station **322c** receives data packets **384** from base station **320c** over the forwarding path to transmit to UE **102** over the air interface. Upon receipt of end marker message **360c**, base station **322c** may release data packets **388** from buffer **395** and transmit them to UE **102** over the air interface. Data packets **384** from the forwarding path and data packets **388** from buffer **395** over the direct path are represented together as data packets **389** transmitted over the air interface to UE **102**. As illustrated, data packets **389** are sent in their proper order to UE **102**.

[0050] FIG. 3D illustrates the full SRv6 replacement/upgrade, where communication between base stations and UPFs utilize SRv6 (as does the core network) and communication between source and base stations utilize SRv6 (i.e. no tunneling as previously described). Illustration regarding data packet communications during a UE handover from a base station **320d** (the “source” base station) to a base station **322d** (the “target” base station) is provided.

[0051] As illustrated in FIG. 3D, UPF **310b** may send the plurality of data packets **380** (illustrated as data packets **1**, **2**, **3**, **4** and **5**) to UPF **310a** over interface **346**, communicated via SRv6. These data packets **380** may be received by UPF **310a**, which distributes the data packets between base stations **320d** and **322d** to accommodate the UE handover. More specifically, UPF **310a** may send some of the data

packets to base station **320d** over interface **340** (e.g. data packets **382** illustrated as data packets **1**, **2**, and **3**) and some of the data packets to “target” base station **322d** over interface **342** (i.e. data packets **386** illustrated as data packets **4** and **5**). Data packets **382** may be communicated over interface **340** using SRv6, and data packets **386** may be communicated over interface **342** using SRv6.

[0052] Base station **320d** may receive these data packets **382** and send them to base station **322d** over interface **344** as data packets **384**, communicated using SRv6. An IP message **360d** which includes an end marker segment identifier may be sent from base station **320d** to base station **322d**, inserted after the last one of transmitted data packets **384**, signifying the end of data packets on the forwarding path. IP message **360d** may be an SRv6 message including an end marker SID (“EM SID”). IP message **360d** may be generated and sent by base station **320d** in response to receiving from SMF **308** (via UPF **310a**) an IP message **381** which includes an end marker segment identifier. The IP message **381** may be an SRv6 message including an end marker SID (“EM SID”). Such messaging and techniques are described in relation to FIGS. **4A**, **5B**, **6B**, and **8A-8C**, and elsewhere herein.

[0053] On the other hand, data packets **386** received by base station **322d** over the “direct path” may be buffered in a buffer **395** as data packets **388**. The buffered data packets **388** are held in buffer **395** until base station **322d** receives data packets **384** from base station **320d** over the forwarding path to transmit to UE **102** over the air interface. Upon receipt of IP message **360d** including the end marker, base station **322d** may release data packets **388** from buffer **395** and transmit them to UE **102** over the air interface. Data packets **384** from the forwarding path and data packets **388** from buffer **395** over the direct path are represented together as data packets **389** transmitted over the air interface to UE **102**. As illustrated, data packets **389** are sent in their proper order to UE **102**.

[0054] FIG. **4A** is a flowchart **400a** for describing a method of providing end marker functionality in a mobile network having SRv6-configured mobile user planes according to some implementations of the present disclosure. The method may be embodied in and/or performed by a control plane (CP) entity for session management (e.g. an SMF, such as SMF **308** of FIGS. **3A-3C**). The method may be executed on a server, network device, or network equipment of the mobile network. The method may be further embodied as a computer program product including a non-transitory computer readable medium and instructions stored in the computer readable medium where the instructions are executable on one or more processors of the server, network device, or network equipment for performing the steps of the method.

[0055] In the method of FIG. **4A**, a UE may communicate in a data session via a base station of the mobile network, where a user plane (UP) entity (e.g. a UPF **310a** of FIGS. **3A-3C**) is selected to carry data traffic for the UE. Since the UE is being moved away from the base station, a handover of the UE may be performed from the base station (i.e. the “source” base station) to a “target” base station. In general, communication between the base station and the UP entity may be performed according to an SRv6 protocol; communication between the source and target base stations may be performed according to a GTP protocol or an SRv6 protocol (depending on the extent of the replacement/upgrade).

[0056] Beginning at a start block **402** of FIG. **4A**, the CP entity may receive a message indicating the handover of the UE from the source base station to the target base station (step **404** of FIG. **4A**). The message may be, for example, a message which includes a modify bearer request (MBR). In response to receiving the message, the CP entity may generate an IP message which includes a segment routing header (step **406** of FIG. **4A**) and populate the segment routing header with a segment identifier (step **408** of FIG. **4A**). The segment identifier may be associated with an end marker handling function, and may also be referred to as an end marker segment identifier. The IP message may also include a tunnel endpoint identifier (TEID) associated with the UE. The CP entity may send the IP message to the UP entity (step **410** of FIG. **4A**).

[0057] In particular, the CP entity may send the IP message to the UP entity for forwarding to the source base station, as an instruction to the source base station to perform the end marker handling function. Specifically, the CP entity may set the source address as the UP entity and the destination address as the source base station, and send the IP message to the UP entity in an N4 message over the N4 interface. The source base station may be provisioned or configured with the end marker handling function, which is triggered or performed in response to identification of the end marker segment identifier.

[0058] The IP message may be an IP control message. In preferred implementations, the IP message is an SRv6 message, where the segment routing header (SRH) has one or more segment identifiers (SIDs) which include the end marker SID. The SRH may also include the TEID associated with the UE. In some implementations, the IP control message may be an Internet Control Message Protocol (ICMP) IPv6 (ICMPv6) message having a SRH with the end marker SID. In alternative implementations, the IP control message may be an empty packet where arguments (e.g. the end marker SID and/or the TEID) may be passed as type-length-values (TLVs).

[0059] In some implementations, the source and target base stations may communicate with each other in accordance with a GTP protocol. Here, the end marker segment identifier in step **408** may be associated with end marker handling function for GTP. The end marker handling function for GTP performed at the source base station may at least involve generating a tunneling protocol message comprising an end marker message, and sending the tunneling protocol message comprising the end marker message for receipt by the target base station. The tunneling protocol message may be a conventional GTP message comprising an end marker message. The TEID in the IP message may be used to identify the tunnel and/or UE for sending the message. The target base station may perform end marker functionality in response to receiving the end marker message. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0060] In other implementations, the source and target base stations may communicate with each other in accordance with an SRv6 protocol. Here, the end marker segment identifier in step **408** may be associated with end marker handling for SRv6. The end marker handling function for SRv6 performed at the source base station may at least involve generating a new IP message having a segment

routing header which includes a segment identifier associated with a function corresponding to an end marker message, and sending the new IP message for receipt by the target base station. This new IP message may be an SRv6 message, where the SRH has one or more SIDs which include the end marker SID. In some implementations, the new SRv6 message may be an ICMPv6 message. The target base station may perform end marker functionality in response to receiving the end marker message. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0061] In yet other implementations, the CP entity may select either the end marker segment identifier for GTP or the end marker segment identifier for SRv6, based on stored information corresponding to the appropriate interface or communication between the source and target base stations (i.e. GTP or SRv6) and/or the configuration of the source and/or target base stations (see e.g. the method of FIG. 4B described later below). In yet even other implementations, the CP entity may provide an end marker segment identifier that is suitable for either GTP or SRv6, where the source base station determines and selects the appropriate functionality based on its interface or communications with the target base station (i.e. GTP or SRv6) and/or the configuration of the source and/or target base station (see e.g. the method of FIG. 4A in combination with FIG. 5C described later below).

[0062] FIG. 4B is a flowchart 400b for describing a method of providing end marker functionality in a mobile network having SRv6-configured mobile user planes according to some implementations of the present disclosure. The method may be embodied in and/or performed by a CP entity for session management (e.g. an SMF, such as SMF 308 of FIG. 3A). The method may be executed on a server, network device, or network equipment if the mobile network. The method may be further embodied as a computer program product including a non-transitory computer readable medium and instructions stored in the computer readable medium where the instructions are executable on one or more processors of the server, network device, or network equipment for performing the steps of the method.

[0063] In the method of FIG. 4B, a UE may communicate in a data session via a base station of the mobile network, where a UP entity (e.g. a UPF 310a of FIG. 3A) is selected to carry data traffic for the UE. Since the UE is being moved away from the base station, a handover of the UE may be performed from the base station (i.e. the “source” base station) to a “target” base station. In general, communication between the base station and the UP entity may be performed according to an SRv6 protocol; communication between the source and target base stations may be performed according to either a GTP protocol or an SRv6 protocol (depending on the extent of the replacement/upgrade).

[0064] Beginning at a start block 422 of FIG. 4B, the CP entity may receive a message indicating the handover of the UE from the source base station to the target base station (step 424 of FIG. 4B). The message may be, for example, a message which includes a modify bearer request (MBR). In response to receiving the message, it is identified whether the communications or interface between the source base

station and the target base station uses a tunneling protocol (e.g. GTP) or no tunneling protocol (e.g. SRv6) (step 426 of FIG. 4B).

[0065] If GTP is being utilized, the CP entity may generate an IP message which includes a segment routing header (step 428 of FIG. 4B) and populate the segment routing header with a first segment identifier (step 430 of FIG. 4B). The first segment identifier may be associated with a first end marker handling function (e.g. an end marker handling function for GTP), and may also be referred to as a first end marker segment identifier. The CP entity may then send the IP message to the UP entity (step 434 of FIG. 4B).

[0066] On the other hand, if GTP is not being utilized (e.g. SRv6 is utilized), the CP entity may generate an IP message which includes a segment routing header (step 428 of FIG. 4B) and populate the segment routing header with a second segment identifier (step 432 of FIG. 4B). The second segment identifier may be associated with a second end marker handling function (e.g. an end marker handling function for SRv6), and may also be referred to as a second end marker segment identifier. The CP entity may then send the IP message to the UP entity (step 434 of FIG. 4B).

[0067] Regarding the flowchart path involving steps 428, 430, and 434, the CP entity may generate and send the IP message to the UP entity for forwarding to the source base station, as an instruction to the source base station to perform the first end marker handling function (e.g. an end marker handling function for GTP interface). Specifically, the CP entity may set the source address as the UP entity and the destination address as the source base station, and send the IP message to the UP entity in an N4 message over the N4 interface. The source base station may be provisioned or configured with the first end marker handling function, which is triggered or performed in response to identification of the end marker segment identifier. At the source base station, the first end marker handling function (e.g. the end marker handling function for GTP interface) may at least involve generating a tunneling protocol message comprising an end marker message, and sending the tunneling protocol message comprising the end marker message for receipt by the target base station. The tunneling protocol message may be GTP message comprising a conventional end marker message. The target base station may perform end marker functionality in response to receiving the end marker message. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0068] Regarding the flowchart path involving steps 428, 432, and 434, the CP entity may generate and send the IP message to the UP entity for forwarding to the source base station, as an instruction to the source base station to perform the second end marker handling function (e.g. an end marker handling function for SRv6 interface). Specifically, the CP entity may set the source address as the UP entity and the destination address as the source base station, and send the IP message to the UP entity in an N4 message over the N4 interface. The source base station may be provisioned or configured with the second end marker handling function, which is triggered or performed in response to identification of the second end marker segment identifier. At the source base station, the second end marker handling function (e.g. the end marker handling function for SRv6 interface) may at least involve generating a new IP

message having a segment routing header which includes a segment identifier associated with a function corresponding to an end marker message, and sending the new IP message for receipt by the target base station. This new IP message may be an SRv6 message, where the SRH has one or more SIDs which include the end marker SID. In some implementations, the new SRv6 message may be an ICMPv6 message. The target base station may perform end marker functionality in response to receiving the end marker message. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0069] The IP message may be an IP control message. In preferred implementations, the IP message is an SRv6 message, where the SRH has one or more SIDs which include the end marker SID. The SRH may also include the TEID associated with the UE. In some implementations, the IP control message may be an ICMPv6 message having a SRH with the end marker SID. In alternative implementations, the IP control message may be an empty packet where the arguments (e.g. the end marker SID and/or the TEID) may be passed as TLVs.

[0070] FIG. 5A is a flowchart 500a for describing a method for providing end marker functionality in mobile networks having mobile user planes configured with SRv6 according to some implementations of the present disclosure. The method may be embodied in and/or performed by a base station (i.e. the source base station) or eNodeB in the mobile network, where the base station is configured to communicate with the target base station according to a GTP protocol. The method may be further embodied as a computer program product including a non-transitory computer readable medium and instructions stored in the computer readable medium where the instructions are executable on one or more controllers or processors of the base station for performing the steps of the method.

[0071] In the method of FIG. 5A, a UE may communicate in a data session via the base station, where a UP entity (e.g. a UPF 310a of FIG. 3A) is selected to carry data traffic for the UE. Since the UE is being moved away from the base station, a handover of the UE may be performed from the base station (i.e. the “source” base station) to a “target” base station. In general, communication between the base station and the UP entity may be performed according to an SRv6 protocol; communication between the source and target base stations may be performed according to a GTP protocol.

[0072] Beginning at a start block 502 of FIG. 5A, the base station may store or maintain access to storage of an end marker handling function in association with an end marker segment identifier (step 504 of FIG. 5A). This step 504 (i.e. the provisioning of the segment identifier and associated function) may be provided (and be the same) for each one of a plurality of different base stations (e.g. all base stations). The base station may receive from the UP entity an IP message having a segment routing header (step 506 of FIG. 5A) and obtain a segment identifier from the segment routing header (step 508 of FIG. 5A). The base station may perform a function associated with the segment identifier obtained from the segment routing header. If the obtained segment identifier matches the end marker segment identifier, the function performed may be the end marker handling function associated therewith (step 510 of FIG. 5A).

[0073] Here, the end marker handling function may at least involve generating a tunneling protocol message comprising an end marker message (step 512 of FIG. 5A), and sending the tunneling protocol message comprising the end marker message for receipt by the target base station (step 514 of FIG. 5A). The tunneling protocol message may be a conventional GTP message comprising an end marker message. A TEID in the received IP message may be used to identify the tunnel or UE for sending the message. The target base station may perform end marker functionality in response to receiving the end marker message. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0074] FIG. 5B is a flowchart 500b for describing a method for providing end marker functionality in mobile networks having mobile user planes configured with SRv6 according to some implementations of the present disclosure. The method may be embodied in and/or performed by a base station (i.e. the source base station) or eNodeB in the mobile network, where the base station is configured to communicate with the target base station according to an SRv6 protocol. The method may be further embodied as a computer program product including a non-transitory computer readable medium and instructions stored in the computer readable medium where the instructions are executable on one or more controllers or processors of the base station for performing the steps of the method.

[0075] In the method of FIG. 5B, a UE may communicate in a data session via the base station, where a UP entity (e.g. a UPF 310a of FIG. 3A) is selected to carry data traffic for the UE. Since the UE is being moved away from the base station, a handover of the UE may be performed from the base station (i.e. the “source” base station) to a “target” base station. In general, communication between the base station and the UP entity may be performed according to an SRv6 protocol; communication between the source and target base stations may be performed according to an SRv6 protocol.

[0076] Beginning at a start block 522 of FIG. 5B, the base station may store or maintain access to storage of an end marker handling function in association with an end marker segment identifier (step 524 of FIG. 5B). This step 524 (i.e. the provisioning of the segment identifier and associated function) may be provided (and be the same) for each one of a plurality of different base stations (e.g. all base stations). The base station may receive from the UP entity an IP message having a segment routing header (step 526 of FIG. 5B) and obtain a segment identifier from the segment routing header (step 528 of FIG. 5B). The base station may perform a function associated with the segment identifier obtained from the segment routing header. If the obtained segment identifier matches the end marker segment identifier, the function may be the end marker handling function associated therewith (step 530 of FIG. 5B).

[0077] Here, the end marker handling function may at least involve generating a new IP message having a segment routing header which includes a new segment identifier associated with a function corresponding to an end marker handling function (step 532 of FIG. 5B), and sending the new IP message for receipt by the target base station (step 534 of FIG. 5B). This new IP message may be an SRv6 message, where the SRH has one or more SIDs which include an end marker SID. In some implementations, the new SRv6 message may be an ICMPv6 message. The target

base station may perform end marker functionality in response to receiving the end marker message. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0078] FIG. 5C is a flowchart 500c for describing a method for providing end marker functionality in mobile networks having mobile user planes configured with SRv6 according to some implementations of the present disclosure. The method may be embodied in and/or performed by a base station (i.e. the source base station) or eNodeB in the mobile network, where the base station is configured to communicate with the target base station according to either a GTP protocol or an SRv6 protocol (e.g. selected as determined at the base station). The method may be further embodied as a computer program product including a non-transitory computer readable medium and instructions stored in the computer readable medium where the instructions are executable on one or more controllers or processors of the base station for performing the steps of the method.

[0079] In the method of FIG. 5C, a UE may communicate in a data session via the base station, where a UP entity (e.g. a UPF 310a of FIG. 3A) is selected to carry data traffic for the UE. Since the UE is being moved away from the base station, a handover of the UE may be performed from the base station (i.e. the “source” base station) to a “target” base station. In general, communication between the base station and the UP entity may be performed according to an SRv6 protocol; communication between the source and target base stations may be performed according to either a GTP protocol or an SRv6 protocol.

[0080] Beginning at a start block 542 of FIG. 5C, the base station may store or maintain access to storage of an end marker handling function in association with an end marker segment identifier (step 544 of FIG. 5C). This step 544 (i.e. the provisioning of the segment identifier and associated function) may be provided (and be the same) for each one of a plurality of different base stations (e.g. all base stations). The base station may receive from the UP entity an IP message having a segment routing header (step 546 of FIG. 5C). The base station may obtain a segment identifier from the segment routing header (step 548 of FIG. 5C). The base station may perform a function associated with the segment identifier obtained from the segment routing header. If the obtained segment identifier matches the end marker segment identifier, the function may be the end marker handling function associated therewith (step 550 of FIG. 5C). Here, it is identified whether the communications or interface with the target base station uses a tunneling protocol (e.g. GTP) or no tunneling protocol (e.g. SRv6) (step 552 of FIG. 4B). The identification may be based on information regarding the communications, interface, base station type, or an indicator in the received IP message.

[0081] If GTP is being utilized, then the end marker handling function may at least involve generating a tunneling protocol message comprising an end marker message (step 554 of FIG. 5C), and sending the tunneling protocol message comprising the end marker message for receipt by the target base station (step 556 of FIG. 5C). The tunneling protocol message may be a conventional GTP message comprising an end marker message. A TEID in the received IP message may be used to identify the tunnel or UE for sending the message. On the other hand, if GTP is not being utilized (e.g. SRv6 is utilized), the end marker handling

function may at least involve generating a new IP message having a segment routing header which includes a segment identifier associated with a function corresponding to an end marker (step 558 of FIG. 5C), and sending the new IP message for receipt by the target base station (step 560 of FIG. 5C). This new IP message may be an SRv6 message, where the SRH has one or more SIDs which include the end marker SID. In some implementations, the new SRv6 message may be an ICMPv6 message. In either case (i.e. GTP case in steps 554-556 or SRv6 case in steps 558-560), the target base station may perform end marker functionality in response to receiving the end marker indication. End marker functionality at the target base station may involve at least releasing buffered data packets received from the UP entity over the direct path for transmission to the UE.

[0082] FIGS. 6A and 6B are call flow diagrams 600a and 600b, respectively involving relevant network nodes of the mobile network, for describing methods for providing end marker functionality in mobile networks having mobile user planes configured with SRv6. In FIG. 6A, call flow diagram 600a corresponds to the techniques previously described in relation to FIGS. 3C, 4A, and 5A (partial SRv6 replacement/upgrade) and messaging/functions of FIGS. 7A-7C. In FIG. 6B, call flow diagram 600b corresponds to the techniques previously described in relation to FIGS. 3D, 4A, and 5B (full SRv6 replacement/upgrade) and messaging/functions of FIGS. 8A-8C.

[0083] Call flow diagram 600a of FIG. 6A may be viewed together with the steps as indicated in the network node diagram 300c of FIG. 3C. UE 302 may communicate in a data session via a base station 320c of the mobile network, where UPF 310a is selected to carry data traffic for UE 302. In general, communication between base station 320c and UPF 310a may be performed according to an SRv6 protocol, whereas communication between base stations 320c and 322c may be performed according to a GTP protocol. UE 302 is being moved away from base station 320c (step 1 of FIG. 6A), and therefore a handover of UE 302 may be performed from base station 320c (i.e. the “source” base station) to base station 322c (i.e. the “target” base station).

[0084] Note that a plurality of base stations (including base station 320c) may be provisioned with and share a common, end marker SID associated with the appropriate end marker handling function (step 2 of FIG. 6A). The end marker handling function may be an end marker handling function for GTP (e.g. “End.TME” associated with FIGS. 7A-7C described later below). SMF 308 may also have knowledge and store the end marker SID associated with this function (step 3 of FIG. 6A).

[0085] SMF 308 may receive a message indicating the handover of UE 302 from base station 320c to base station 322c. The message may be, for example, a message which includes a modify bearer request (MBR). In response to receiving the message, SMF 308 may generate an SRv6 message and populate its SRH with the end marker SID (step 4 of FIG. 6A). The SRv6 message may also include a TEID associated with UE 302, encoded in the end marker SID or passed as a global argument. In some implementations, the SRv6 message may be an ICMPv6 message. In alternative implementations, the SRv6 message may be an empty packet where arguments (e.g. the end marker SID and/or the TEID) may be passed as TLVs.

[0086] SMF 308 may send the SRv6 message to UPF 310a (step 5 of FIG. 6A). In particular, SMF 308 may set the

source address to UPF 310a and the destination address to base station 320c, and send the IP message to UPF 310a in an N4 message over the N4 interface. UPF 310a may receive the N4 message and remove the SRv6 message contained within it (step 6 of FIG. 6A). UPF 310a may forward or send the SRv6 message to base station 320c (step 7 of FIG. 6A). The SRv6 message is sent to base station 320c as an instruction to perform the end marker handling function for GTP. Thus, at base station 320c, the end marker handling function for GTP is triggered or performed in response to identification of the end marker SID.

[0087] The end marker handling function for GTP may at least involve generating a tunneling protocol message comprising an end marker message (step 8 of FIG. 6A) and sending the tunneling protocol message comprising the end marker message for receipt by base station 322c (step 9a of FIG. 6A). The tunneling protocol message may be a conventional GTP message comprising an end marker message. The TEID in the SRv6 message may be used to identify the tunnel and/or UE 302 for sending the message. Base station 322c may perform end marker functionality in response to receiving the end marker message (step 10 of FIG. 6A). End marker functionality at base station may involve at least releasing buffered data packets received from the UPF over the direct path for transmission to the UE (step 11 of FIG. 6A).

[0088] Moving ahead, call flow diagram 600b of FIG. 6B may be viewed together with the steps as indicated in the network node diagram 300d of FIG. 3D. UE 302 may communicate in a data session via a base station 320d of the mobile network, where UPF 310a is selected to carry data traffic for UE 302. In general, communication between base station 320d and UPF 310a may be performed according to an SRv6 protocol, and communication between base stations 320c and 322c may be performed according the SRv6 protocol. UE 302 is being moved away from base station 320d (step 1 of FIG. 6B), and therefore a handover of UE 302 may be performed from base station 320d (i.e. the “source” base station) to base station 322d (i.e. the “target” base station).

[0089] Note that a plurality of base stations (including base station 320d) may be provisioned with and share a common, end marker SID associated with the appropriate end marker handling function (step 2 of FIG. 6B). The end marker handling function may be an end marker handling function for SRv6 (e.g. “End.B6E” associated with FIGS. 8A-8C described later below). SMF 308 may also have knowledge and store the end marker SID associated with this function (step 3 of FIG. 6B).

[0090] SMF 308 may receive a message indicating the handover of UE 302 from base station 320d to base station 322d. The message may be, for example, a message which includes a modify bearer request (MBR). In response to receiving the message, SMF 308 may generate an SRv6 message and populate its SRH with the end marker SID (step 4 of FIG. 6B). The SRv6 message may also include a TEID associated with UE 302, encoded in the end marker SID or passed as a global argument. In some implementations, the SRv6 message may be an ICMPv6 message. In alternative implementations, the SRv6 message may be an empty packet where arguments (e.g. the end marker SID and/or the TEID) may be passed as TLVs.

[0091] SMF 308 may send the SRv6 message to UPF 310a (step 5 of FIG. 6B). In particular, SMF 308 may set the

source address to UPF 310a and the destination address to base station 320c, and send the IP message to UPF 310a in an N4 message over the N4 interface. UPF 310a may receive the N4 message and remove the SRv6 message contained within it (step 6 of FIG. 6B). UPF 310a may forward or send the SRv6 message to base station 320d (step 7 of FIG. 6B). The SRv6 message is sent to base station 320d as an instruction to perform the end marker handling function for SRv6. Thus, at base station 320d, the end marker handling function for SRv6 is triggered or performed in response to identification of the end marker SID.

[0092] The end marker handling function performed at base station 320d may at least involve generating a new SRv6 message having an SRH which includes a new end marker SID (step 8 of FIG. 6B), and sending the new SRv6 message for receipt by base station 322d (step 9b of FIG. 6B). In some implementations, the new SRv6 message may be an ICMPv6 message. Base station 322d may perform end marker functionality in response to receiving the end marker (step 10 of FIG. 6B). End marker functionality at base station 322d may involve at least releasing buffered data packets received from the UPF over the direct path for transmission to the UE (step 11 of FIG. 6B).

[0093] FIG. 7A is an illustrative representation of an SRv6 message 730 which includes an end marker segment identifier (SID) 740 (e.g. “End.TME” or “Encapsulation for mapped Tunnel with End Marker”), and FIGS. 7B-7C are illustrative examples of SRv6 functions 710 and 720 corresponding to the end marker SID 740. These examples may be suitable for use in the techniques described above in relation to any of the previous flowcharts and call flows, especially FIGS. 4A, 5A, and partial SRv6 replacement architecture of FIG. 3C.

[0094] A basic data format of SRv6 message 730 of FIG. 7A includes an IPv6 header 732 and a payload 736. For SRv6 routing of SRv6 message 730, the data format further includes an SR header 734 or “SRH” (i.e. an extension header for SR as defined by RFC 2460). SRH 734 may include an ordered list of segments which defines a network path along which the SRv6 message 730 will be communicated. SRH 734 may further include the end marker SID 740 associated with end marker handling for GTP (e.g. “End.TME”). Note that end marker SID 740 may include parameters to identify the appropriate X2 path; alternatively, a context identifier may be included as a TLV field in the SRH 734.

[0095] Each one of SRv6 functions 710 and 720 of FIGS. 7B and 7C, respectively, is an example of an end marker handling function for GTP (e.g. End.TME). SRv6 function 710 is associated with end marker SID 740 which is a non-routable SID, whereas SRv6 function 720 is for use with a routable SID which precedes a non-routable, end marker SID 740. When using the routable SID along with the non-routable SID, the routable SID may include a predetermined argument to override or bypass its default behavior and activate the function associated with the non-routable SID (i.e. the end marker SID). In some alternative implementations, the existing function “End.TM” (Encapsulation for mapped Tunnel) specified in IETF 1-D, Section 5.4.1, may be updated and used accordingly.

[0096] FIG. 8A is an illustrative representation of an SRv6 message 830 which includes end marker SID 840 (e.g. “End.B6E” or “End.B6 with end marker enhancements”), and FIGS. 8B-8C are illustrative examples of SRv6 func-

tions **810** and **820** corresponding to the end marker SID **840**. These examples may be suitable for use in the techniques described above in relation to any of the previous flowcharts and call flows, especially FIGS. **4A**, **5B**, and full SRv6 replacement architecture of FIG. **3D**.

[0097] A basic data format of SRv6 message **830** of FIG. **8A** includes an IPv6 header **832** and a payload **836**. For SRv6 routing of SRv6 message **830**, the data format further includes an SR header **834** or “SRH” (i.e. the extension header for SR as defined by RFC 2460). SRH **834** may include an ordered list of segments which defines a network path along which the SRv6 message **830** will be communicated. SRH **834** may further include the end marker SID **840** associated with end marker handling for SRv6 (e.g. “End.B6E”). End.B6E may be viewed as an extension to the existing END.B6 function with extended functionality for handling lookups to the UE’s mapping on the X2 interface, as well as for generating the appropriate arguments for executing the new function. Note that end marker SID **840** may include parameters to identify the appropriate X2 path; alternatively, a context identifier may be included as a TLV field in the SRH **834**.

[0098] Each one of SRv6 functions **810** and **820** of FIGS. **8B** and **8C**, respectively, is an example of an end marker handling function for SRv6 (e.g. End.B6E). SRv6 function **810** is associated with end marker SID **840** which is a non-routable SID, whereas SRv6 function **820** for use with a routable SID which precedes a non-routable, end marker SID **840**. When using the routable SID along with the non-routable SID, the routable SID may include a predetermined argument to override or bypass its default behavior and activate the function associated with the non-routable SID (i.e. the end marker SID). In some alternative implementations, “End.B6E” may be realized by extending the existing END.T function, and may be referred to as “End.TE”.

[0099] Reference is now made to FIG. **9**, which shows an example of basic relevant components of a server, network device, network element, or network equipment **900** for use in a mobile network according to some implementations of the present disclosure. Such network equipment **900** may be for use, for example, in association with a control plane (CP) entity, such as a CP entity for session management or a session management function (SMF). The components may include one or more processors **902** coupled to one or more memories **904** and to a network interface **906**. Interface **906** may be configured to connect to a network for communications. The one or more processors **902** are configured to operate in accordance with program instructions/software **908** (e.g. one or more virtualized network functions (VNFs) or network function virtualizations (NFVs) stored in the one or more memories **904**, in order to perform basic operations as well as to perform techniques of the present disclosure. Relatedly, a computer program product may include a non-transitory computer-readable medium (e.g. memory, a computer disk, etc.) and program instructions (e.g. one or more VNFs or NFVs) stored in the non-transitory computer-readable medium such that, when executed by one or more processors **902**, may perform the techniques of the present disclosure.

[0100] Reference is now made to FIG. **10**, which shows an example schematic block diagram of basic relevant components of a base station **1000** (e.g. an eNodeB or gNodeB) for use in a mobile network according to some implementations

of the present disclosure. As shown, base station **1000** has a transceiver circuit **1006** for transmitting signals to and for receiving signals from the communication devices (such as UEs) via one or more antennas **1008**, an interface **1010** (e.g. an X2 interface) for transmitting signals to and for receiving signals from other base stations, and an interface **1012** (e.g. an N3 interface) for transmitting signals to and for receiving signals from a UP entity (such as a UPF). Base station **1000** also has a controller **1002** to control the operation of the base station.

[0101] Controller **1002** is associated with a memory **1004**. Base station **5** may, of course, have all the typical functionality of a (cellular telephone) network base station, and this may be provided by any one or any combination of hardware, software and firmware, as appropriate. Software may be pre-installed in memory **1004** and/or may be downloaded via the network or from a removable data storage device, for example. Controller **1002** may be configured to control the overall operation of base station **1000** by, in this example, program instructions or software instructions stored within memory **1004**. As shown, these software instructions include, among other things, an operating system **1014**, a communications control module **1016**, an LTE/5G module **1018**, and further instructions for use providing the techniques of the present disclosure.

[0102] In basic operation, transceiver circuit **1006** is configured to provide wireless communications with UEs. Communications control module **1016** is configured to control the communication between base station **1000** and UEs and other network entities that are connected to base station **1000**. Communications control module **1016** also controls the separate flows of downlink user traffic (via associated data radio bearers) and control data to be transmitted to UEs associated with base station **1000** including, for example, control data for core network services and/or mobility of UEs. LTE/5G module **1018** is configured to communicate with compatible communication devices and network nodes using one or more appropriate protocols.

[0103] Reference is now made to FIG. **11**, which shows an example schematic block diagram of a user equipment (UE) **1102** (i.e. the UE **302** of the previous figures) according to some implementations. UE **1102** may be, for example, a user equipment (UE), a cellular telephone, a smart phone, a tablet, a laptop computer, etc. As shown in FIG. **11**, UE **1102** may include a processor **1118**, a transceiver **1120**, a transmit/receive element **1122**, a speaker/microphone **1124**, a keypad **1126**, a display/touchpad **1128**, non-removable memory **1106**, removable memory **1132**, a power source **1134**, a global positioning system (GPS) chipset **1136**, and other peripherals **1138**. It will be appreciated that the UE **1102** may include any sub-combination of the foregoing elements while remaining consistent with an embodiment.

[0104] Processor **1118** may be a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Array (FPGAs) circuits, any other type of integrated circuit (IC), a state machine, and the like. Processor **1118** may perform signal coding, data processing, power control, input/output processing, and/or any other functionality that enables UE **1102** to operate in a wireless environment. Processor **1118** may be coupled to transceiver **1120**, which

may be coupled to the transmit/receive element **1122**. While FIG. **11** depicts the processor **1118** and the transceiver **1120** as separate components, it will be appreciated that the processor **1118** and the transceiver **1120** may be integrated together in an electronic package or chip.

[0105] Transmit/receive element **1122** may be configured to transmit signals to, or receive signals from, a base station over an air interface **1116**. For example, in one embodiment, transmit/receive element **1122** may be an antenna configured to transmit and/or receive RF signals. In another embodiment, transmit/receive element **1122** may be an emitter/detector configured to transmit and/or receive IR, UV, or visible light signals, for example. In yet another embodiment, transmit/receive element **1122** may be configured to transmit and receive both RF and light signals. It will be appreciated that transmit/receive element **1122** may be configured to transmit and/or receive any combination of wireless signals.

[0106] In addition, although transmit/receive element **1122** is depicted in FIG. **11** as a single element, UE **1102** may include any number of transmit/receive elements **1122**. More specifically, UE **1102** may employ MIMO technology. Thus, in one embodiment, UE **1102** may include two or more transmit/receive elements **1122** (e.g., multiple antennas) for transmitting and receiving wireless signals over air interface **1116**.

[0107] Transceiver **1120** may be configured to modulate the signals that are to be transmitted by transmit/receive element **1122** and to demodulate the signals that are received by transmit/receive element **1122**. As noted above, UE **1102** may have multi-mode capabilities. Thus, transceiver **1120** may include multiple transceivers for enabling UE **1102** to communicate via multiple RATs, such as UTRAN and IEEE 802.11, for example.

[0108] Processor **1118** of UE **1102** may be coupled to, and may receive user input data from, speaker/microphone **1124**, keypad **1126**, and/or display/touchpad **1128** (e.g., a liquid crystal display (LCD) display unit or organic light-emitting diode (OLED) display unit). Processor **1118** may also output user data to speaker/microphone **1124**, keypad **1126**, and/or display/touchpad **1128**. In addition, processor **1118** may access information from, and store data in, any type of suitable memory, such as non-removable memory **1106** and/or removable memory **1132**. Non-removable memory **1106** may include random-access memory (RAM), read-only memory (ROM), a hard disk, or any other type of memory storage device. The removable memory **1132** may include a subscriber identity module (SIM) card, a memory stick, a secure digital (SD) memory card, and the like. In other embodiments, processor **1118** may access information from, and store data in, memory that is not physically located on UE **1102**, such as on a server or a home computer (not shown).

[0109] Processor **1118** may receive power from power source **1134**, and may be configured to distribute and/or control the power to the other components in the UE **1102**. Power source **1134** may be any suitable device for powering UE **1102**. For example, power source **1134** may include one or more dry cell batteries (e.g., nickel-cadmium (NiCd), nickel-zinc (NiZn), nickel metal hydride (NiMH), lithium-ion (Li-ion), etc.), solar cells, fuel cells, and the like.

[0110] Processor **1118** may also be coupled to GPS chipset **1136**, which may be configured to provide location information (e.g., longitude and latitude) regarding the current

location of UE **1102**. In addition to, or in lieu of, the information from the GPS chipset **1136**, UE **1102** may receive location information over air interface **1116** from a base station and/or determine its location based on the timing of the signals being received from two or more nearby base stations. It will be appreciated that UE **1102** may acquire location information by way of any suitable location-determination method while remaining consistent with an embodiment.

[0111] Processor **1118** may further be coupled to other peripherals **1138**, which may include one or more software and/or hardware modules that provide additional features, functionality and/or wired or wireless connectivity. For example, peripherals **1138** may include an accelerometer, an e-compass, a satellite transceiver, a digital camera (for photographs or video), a universal serial bus (USB) port, a vibration device, a television transceiver, a hands free headset, a Bluetooth® module, a frequency modulated (FM) radio unit, a digital music player, a media player, a video game player module, an Internet browser, and the like.

[0112] Note that the components and techniques shown and described in relation to the separate figures may indeed be provided as separate components and techniques, and alternatively one or more (or all of) the components and techniques shown and described in relation to the separate figures are provided together for operation in a cooperative manner.

[0113] While various aspects of implementations within the scope of the appended claims are described above, it should be apparent that the various features of implementations described above may be embodied in a wide variety of forms and that any specific structure and/or function described above is merely illustrative. Based on the present disclosure one skilled in the art should appreciate that an aspect described herein may be implemented independently of any other aspects and that two or more of these aspects may be combined in various ways. For example, an apparatus may be implemented and/or a method may be practiced using any number of the aspects set forth herein. In addition, such an apparatus may be implemented and/or such a method may be practiced using other structure and/or functionality in addition to or other than one or more of the aspects set forth herein.

[0114] It will also be understood that, although the terms “first,” “second,” etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another. For example, a first message could be termed a second message, and, similarly, a second message could be termed a first message, without changing the meaning of the description, so long as all occurrences of the “first message” are renamed consistently and all occurrences of the “second message” are renamed consistently. The first message and the second messages are both messages, but they are not the same messages.

[0115] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the claims. As used in the description of the embodiments and the appended claims, the singular forms “a,” “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that the term “and/or” as used herein refers to and encompasses any and all possible combinations of one or more of the associated listed items. It will be

further understood that the terms “comprises” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0116] As used herein, the term “if” may be construed to mean “when” or “upon” or “in response to determining” or “in accordance with a determination” or “in response to detecting,” that a stated condition precedent is true, depending on the context. Similarly, the phrase “if it is determined [that a stated condition precedent is true] or “if [a stated condition precedent is true] may be construed to mean “upon determining” or “in response to determining” or “in accordance with a determination” or “upon detecting” or “in response to detecting” that the stated condition precedent is true, depending on the context.

What is claimed is:

1. A method comprising:
 - obtaining, at a source base station of a mobile network, an Internet Protocol (IP) message from a user plane (UP) entity which carries data traffic of a data session for a user equipment (UE); and
 - performing a function associated with a segment identifier identified in a segment routing header (SRH) of the IP message, the function comprising an end marker handling function associated with the segment identifier.
2. The method of claim 1, wherein the IP message comprises a segment routing (SR) for IP version 6 (IPv6) (SRv6) message, the segment identifier comprises an end marker segment identifier (SID), and the end marker handling function comprises an SRv6 function which is provisioned at the source base station.
3. The method of claim 2, wherein the source base station communicates with a target base station for a handover of the UE in accordance with a General Packet Radio Service (GPRS) tunneling protocol (GTP), and wherein performing the end marker handling function comprises:
 - generating a tunneling protocol message comprising an end marker message; and
 - providing the tunneling protocol message comprising the end marker message for receipt by the target base station.
4. The method of claim 3, wherein generating and providing the tunneling protocol message further comprises generating and sending a General Packet Radio Service (GPRS) tunneling protocol (GTP) message comprising the end marker message over a tunnel comprising a GTP tunnel.
5. The method of claim 4, wherein generating the end marker message includes using a tunnel endpoint identifier (TEID) identified in the SRv6 message.
6. The method of claim 3, wherein the tunneling protocol message comprising the end marker message causes the target base station to release buffered data packets from the UP entity for transmission to the UE.
7. The method of claim 2, wherein the source base station communicates with a target base station for a handover of the UE in accordance with SRv6, and performing the end marker handling function comprises:
 - generating a new IP message having a segment routing header which includes a segment identifier associated with a function comprising an end marker message function; and

providing the new IP message for receipt by the target base station.

8. The method of claim 2, wherein the end marker handling function associated with the end marker SID is provisioned at each one of a plurality of base stations which includes the base station.

9. The method of claim 2, wherein the end marker SID comprises a non-routable SID.

10. The method of claim 2, wherein the SRH includes a routable SID which precedes a non-routable SID which comprises the end marker SID.

11. The method of claim 2, further comprising:

when an interface or communications between the source base station and a target base station associated with a handover of the UE comprises a General Packet Radio Service (GPRS) tunneling protocol (GTP), performing the end marker handling function comprising generating a tunneling protocol message comprising an end marker message and providing the tunneling protocol message comprising the end marker message for receipt by the target base station; or when the interface or communications between the source base station and a target base station associated with a handover of the UE comprises an SRv6 protocol, performing the end marker handling function comprising generating a new IP message having a segment routing header which includes a segment identifier associated with a function comprising an end marker message function, and providing the new IP message for receipt by the target base station.

12. The method of claim 1, wherein obtaining the IP message from the UP entity comprises obtaining the IP message from a user plane function (UPF) configured for segment routing (SR) for IP version 6 (IPv6) (SRv6).

13. One or more non-transitory computer readable storage media encoded with instructions that, when executed by a processor, cause the processor to perform operations, comprising:

obtaining, at a source base station of a mobile network, an Internet Protocol (IP) message from a user plane (UP) entity which carries data traffic of a data session for a user equipment (UE); and

performing a function associated with a segment identifier identified in a segment routing header (SRH) of the IP message, the function comprising an end marker handling function associated with the segment identifier.

14. The media of claim 13, wherein the IP message comprises a segment routing (SR) for IP version 6 (IPv6) (SRv6) message, the segment identifier comprises an end marker segment identifier (SID), and the end marker handling function comprises an SRv6 function which is provisioned at the source base station.

15. The media of claim 14, wherein the end marker SID comprises a non-routable SID.

16. The media of claim 14, wherein the SRH includes a routable SID which precedes a non-routable SID which comprises the end marker SID.

17. An apparatus comprising:

at least one memory for storing data; and

at least one processor for executing instructions associated with the data, wherein executing the instructions causes the apparatus to perform operations, comprising:

obtaining an Internet Protocol (IP) message from a user plane (UP) entity which carries data traffic of a data session for a user equipment (UE); and
performing a function associated with a segment identifier identified in a segment routing header (SRH) of the IP message, the function comprising an end marker handling function associated with the segment identifier.

18. The apparatus of claim **17**, wherein the IP message comprises a segment routing (SR) for IP version 6 (IPv6) (SRv6) message, the segment identifier comprises an end marker segment identifier (SID), and the end marker handling function comprises an SRv6 function which is provisioned at the apparatus.

19. The apparatus of claim **18**, wherein the end marker SID comprises a non-routable SID.

20. The apparatus of claim **18**, wherein the SRH includes a routable SID which precedes a non-routable SID which comprises the end marker SID.

* * * * *