

(12) **United States Patent**
Wu et al.

(10) **Patent No.:** US 10,642,313 B1
(45) **Date of Patent:** May 5, 2020

(54) **FOLDABLE DISPLAY DEVICE AND OPERATION METHOD OF ELECTRONIC DEVICE**

(71) Applicant: **InnoLux Corporation**, Miao-Li County (TW)

(72) Inventors: **Yuan-Lin Wu**, Miao-Li County (TW);
Kuan-Feng Lee, Miao-Li County (TW)

(73) Assignee: **InnoLux Corporation**, Miao-Li County (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/218,488**

(22) Filed: **Dec. 13, 2018**

(51) **Int. Cl.**
G06F 3/045 (2006.01)
G06F 1/16 (2006.01)
G06K 9/00 (2006.01)
G06F 3/041 (2006.01)
G06F 3/044 (2006.01)

(52) **U.S. Cl.**
CPC **G06F 1/1652** (2013.01); **G06F 3/044** (2013.01); **G06F 3/0416** (2013.01); **G06K 9/0002** (2013.01)

(58) **Field of Classification Search**
CPC G06F 1/1652; G06F 3/0416; G06F 3/044; G06K 9/0002
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,229,481 B2 * 1/2016 Jinbo G06F 1/1652
9,710,033 B2 * 7/2017 Yamazaki G06F 1/1635

9,927,839 B2 * 3/2018 Kummer G06F 1/1647
10,367,173 B1 * 7/2019 Wu H01L 51/0097
10,379,573 B2 * 8/2019 Park G06F 1/1677
10,416,719 B2 * 9/2019 Chun G09G 5/006
2010/0058205 A1 * 3/2010 Vakil G06F 1/1616
715/761
2011/0216064 A1 * 9/2011 Dahl G06F 1/1616
345/428
2012/0066591 A1 * 3/2012 Hackwell G06F 3/03547
715/702
2014/0285476 A1 * 9/2014 Cho G06F 1/1601
345/204
2014/0362513 A1 * 12/2014 Nurmi G06F 1/1652
361/679.27
2015/0227271 A1 * 8/2015 Kang G06F 3/0488
715/781
2016/0026381 A1 * 1/2016 Kim G06F 3/04817
715/761
2016/0132074 A1 * 5/2016 Kim G06F 1/1652
715/769
2016/0291642 A1 * 10/2016 Kwak G06F 1/1692
2017/0003793 A1 * 1/2017 Gao G06F 1/1641

* cited by examiner


Primary Examiner — Joe H Cheng

(74) Attorney, Agent, or Firm — Winston Hsu

(57) **ABSTRACT**

A foldable display device includes a first display region, a second display region, and a foldable region connecting the first display region and the second display region. The foldable display device includes a flexible substrate, a display layer disposed on the flexible substrate, and a biometric sensing structure disposed in the first display region, the second display region, and the foldable region. The biometric sensing structure has a biometric sensing region. A ratio of an area of the biometric sensing region to an area of the flexible substrate is in a range from 0.6 to 1.

19 Claims, 14 Drawing Sheets

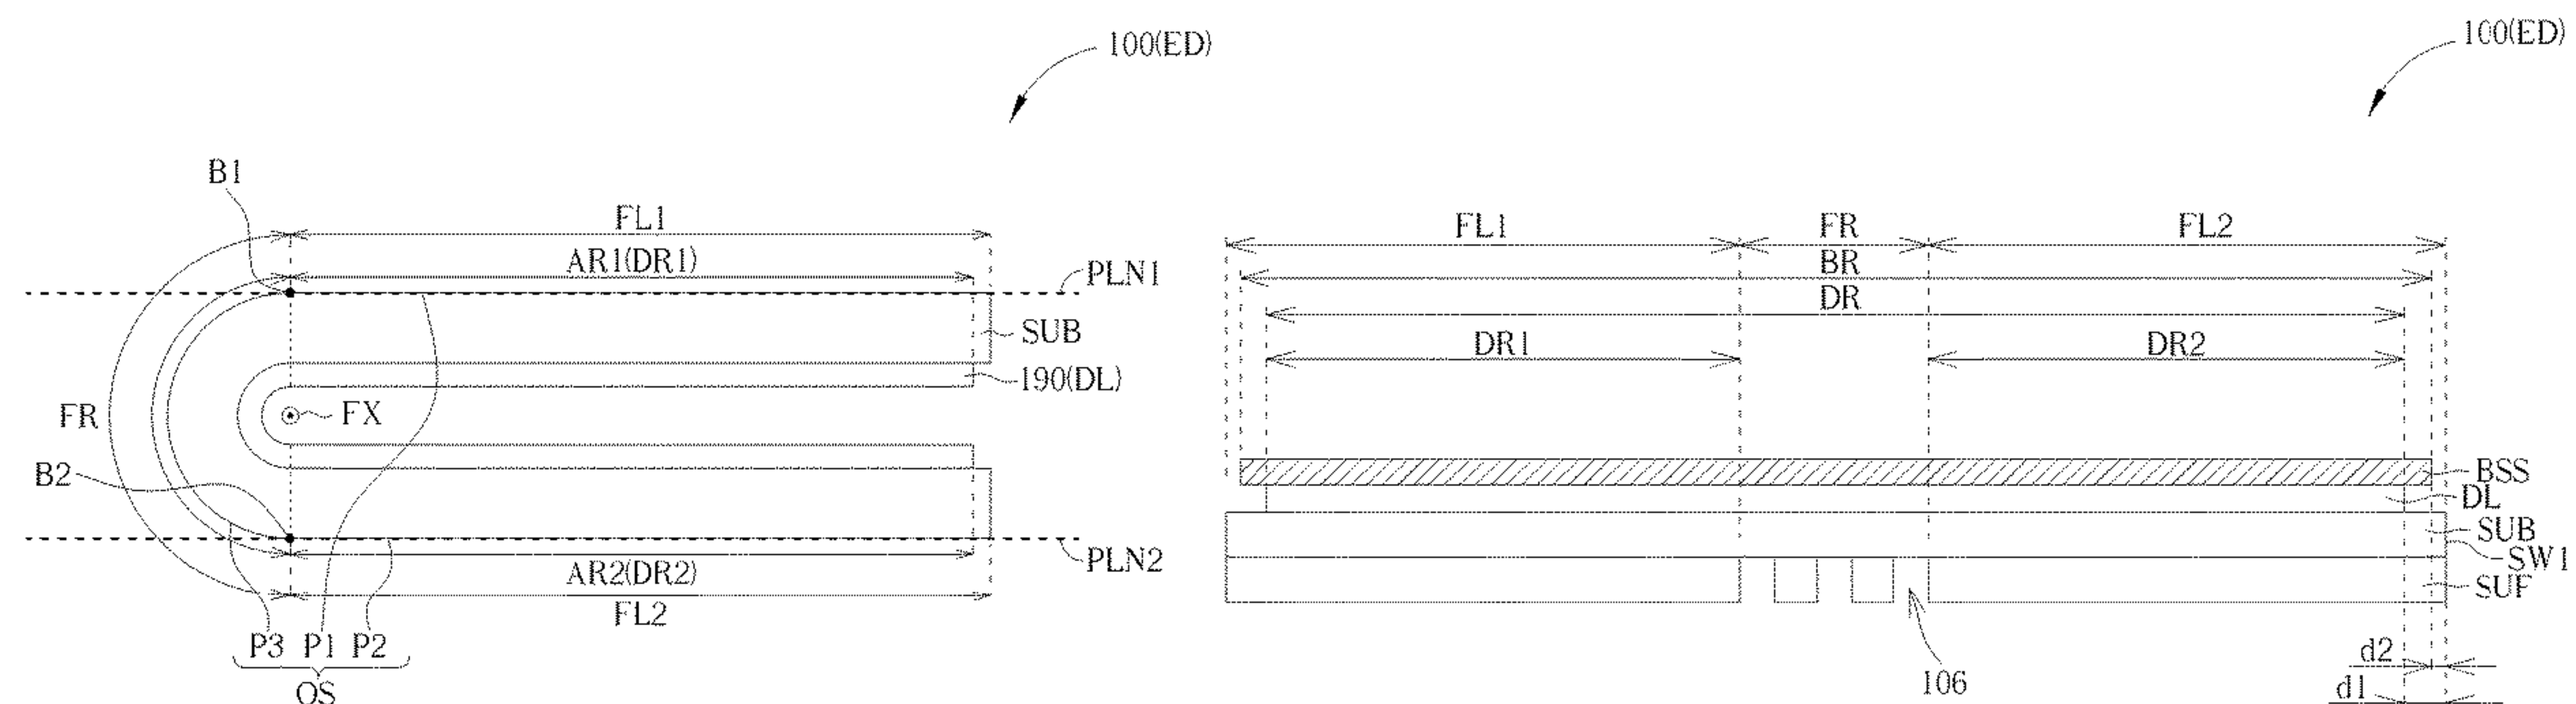

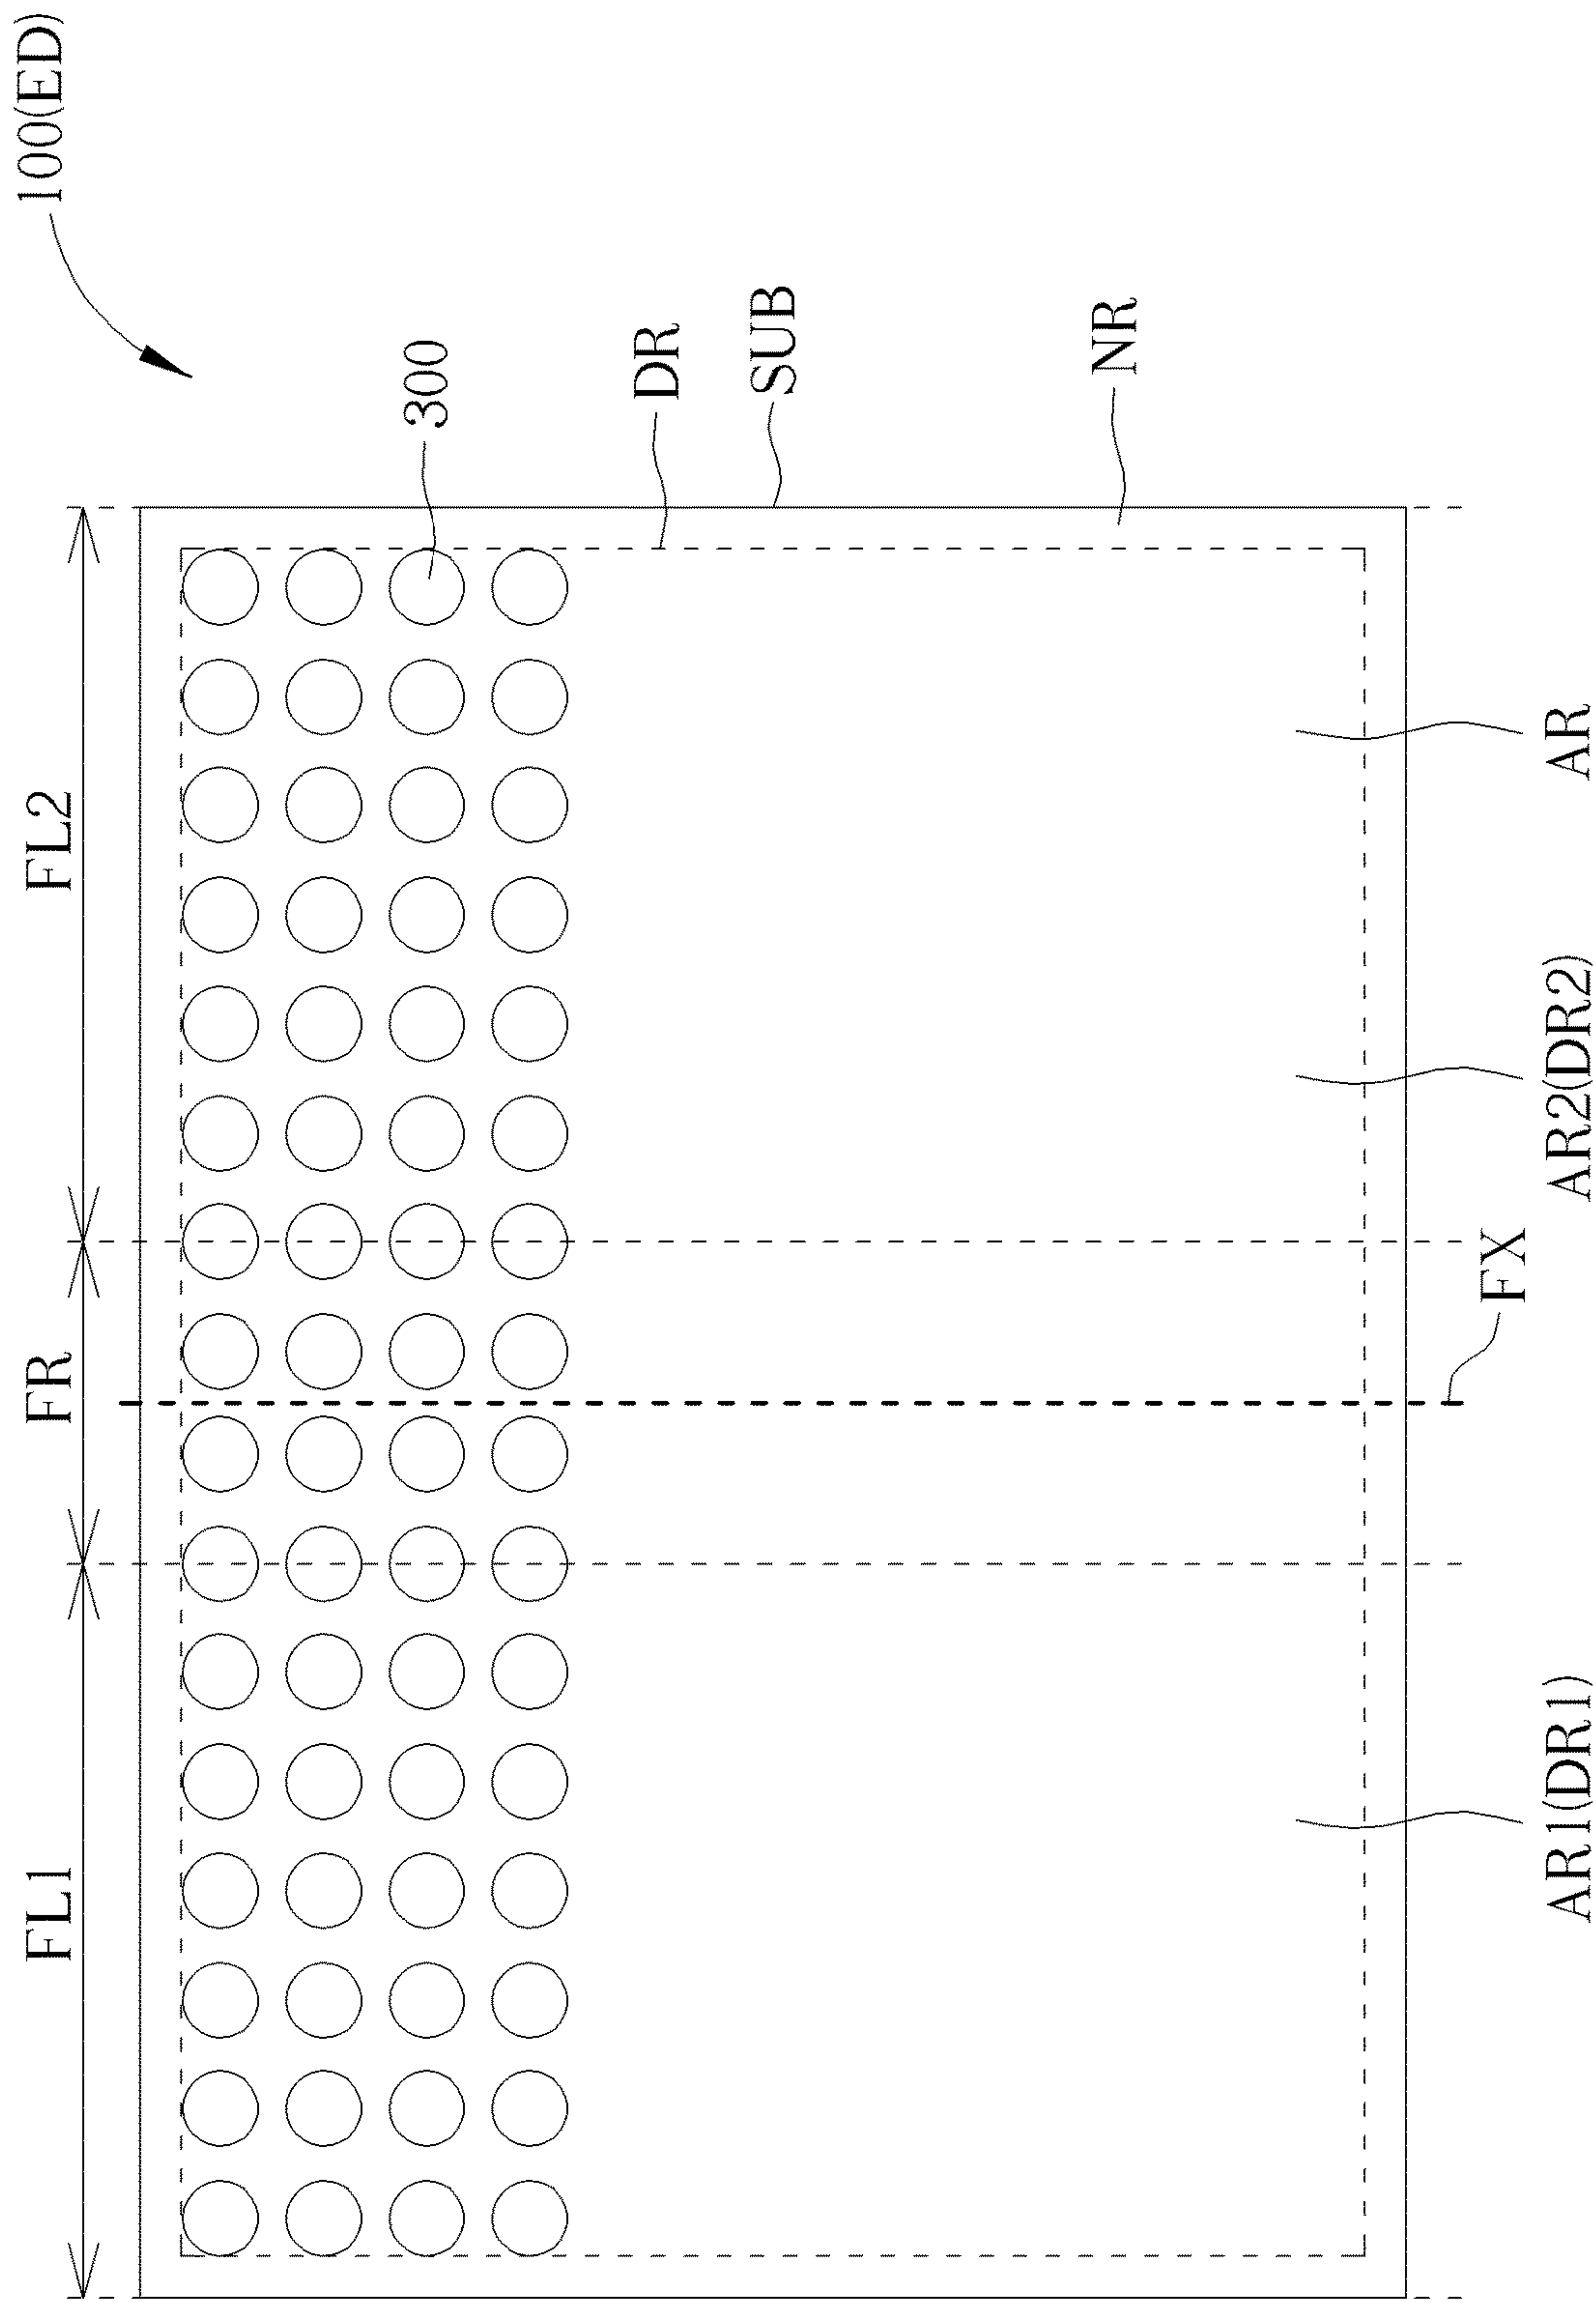


FIG. 1

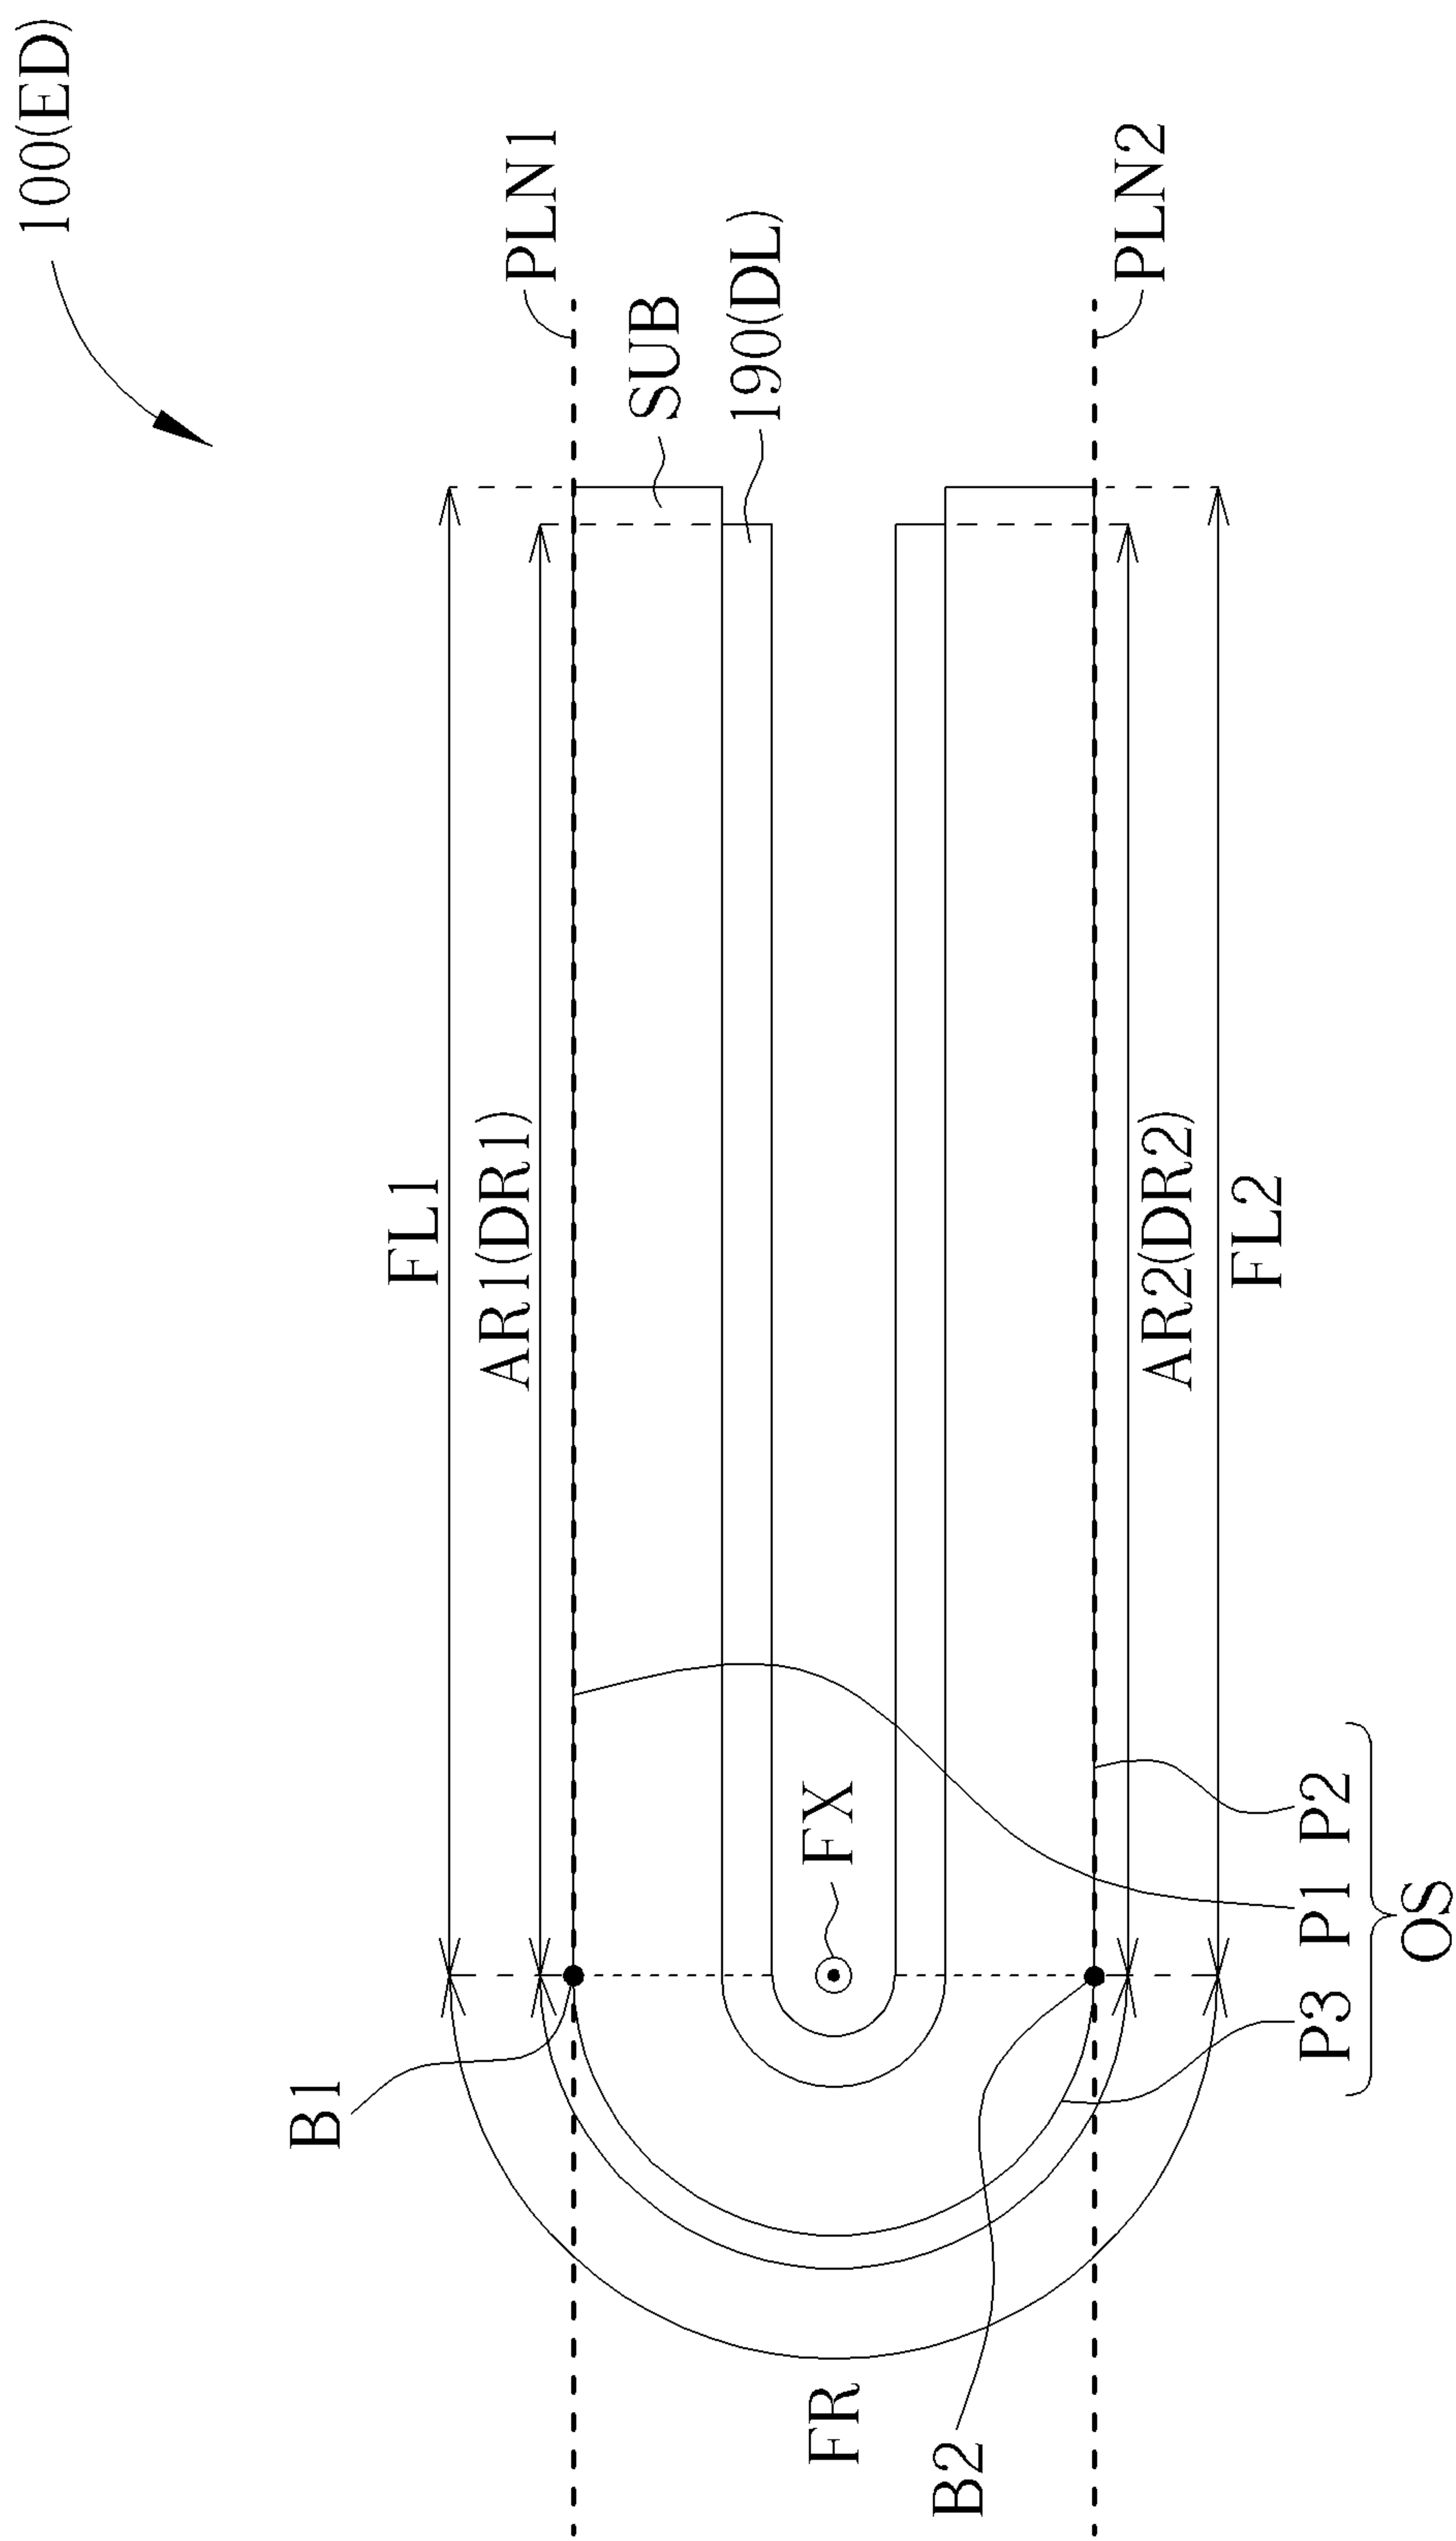


FIG. 2

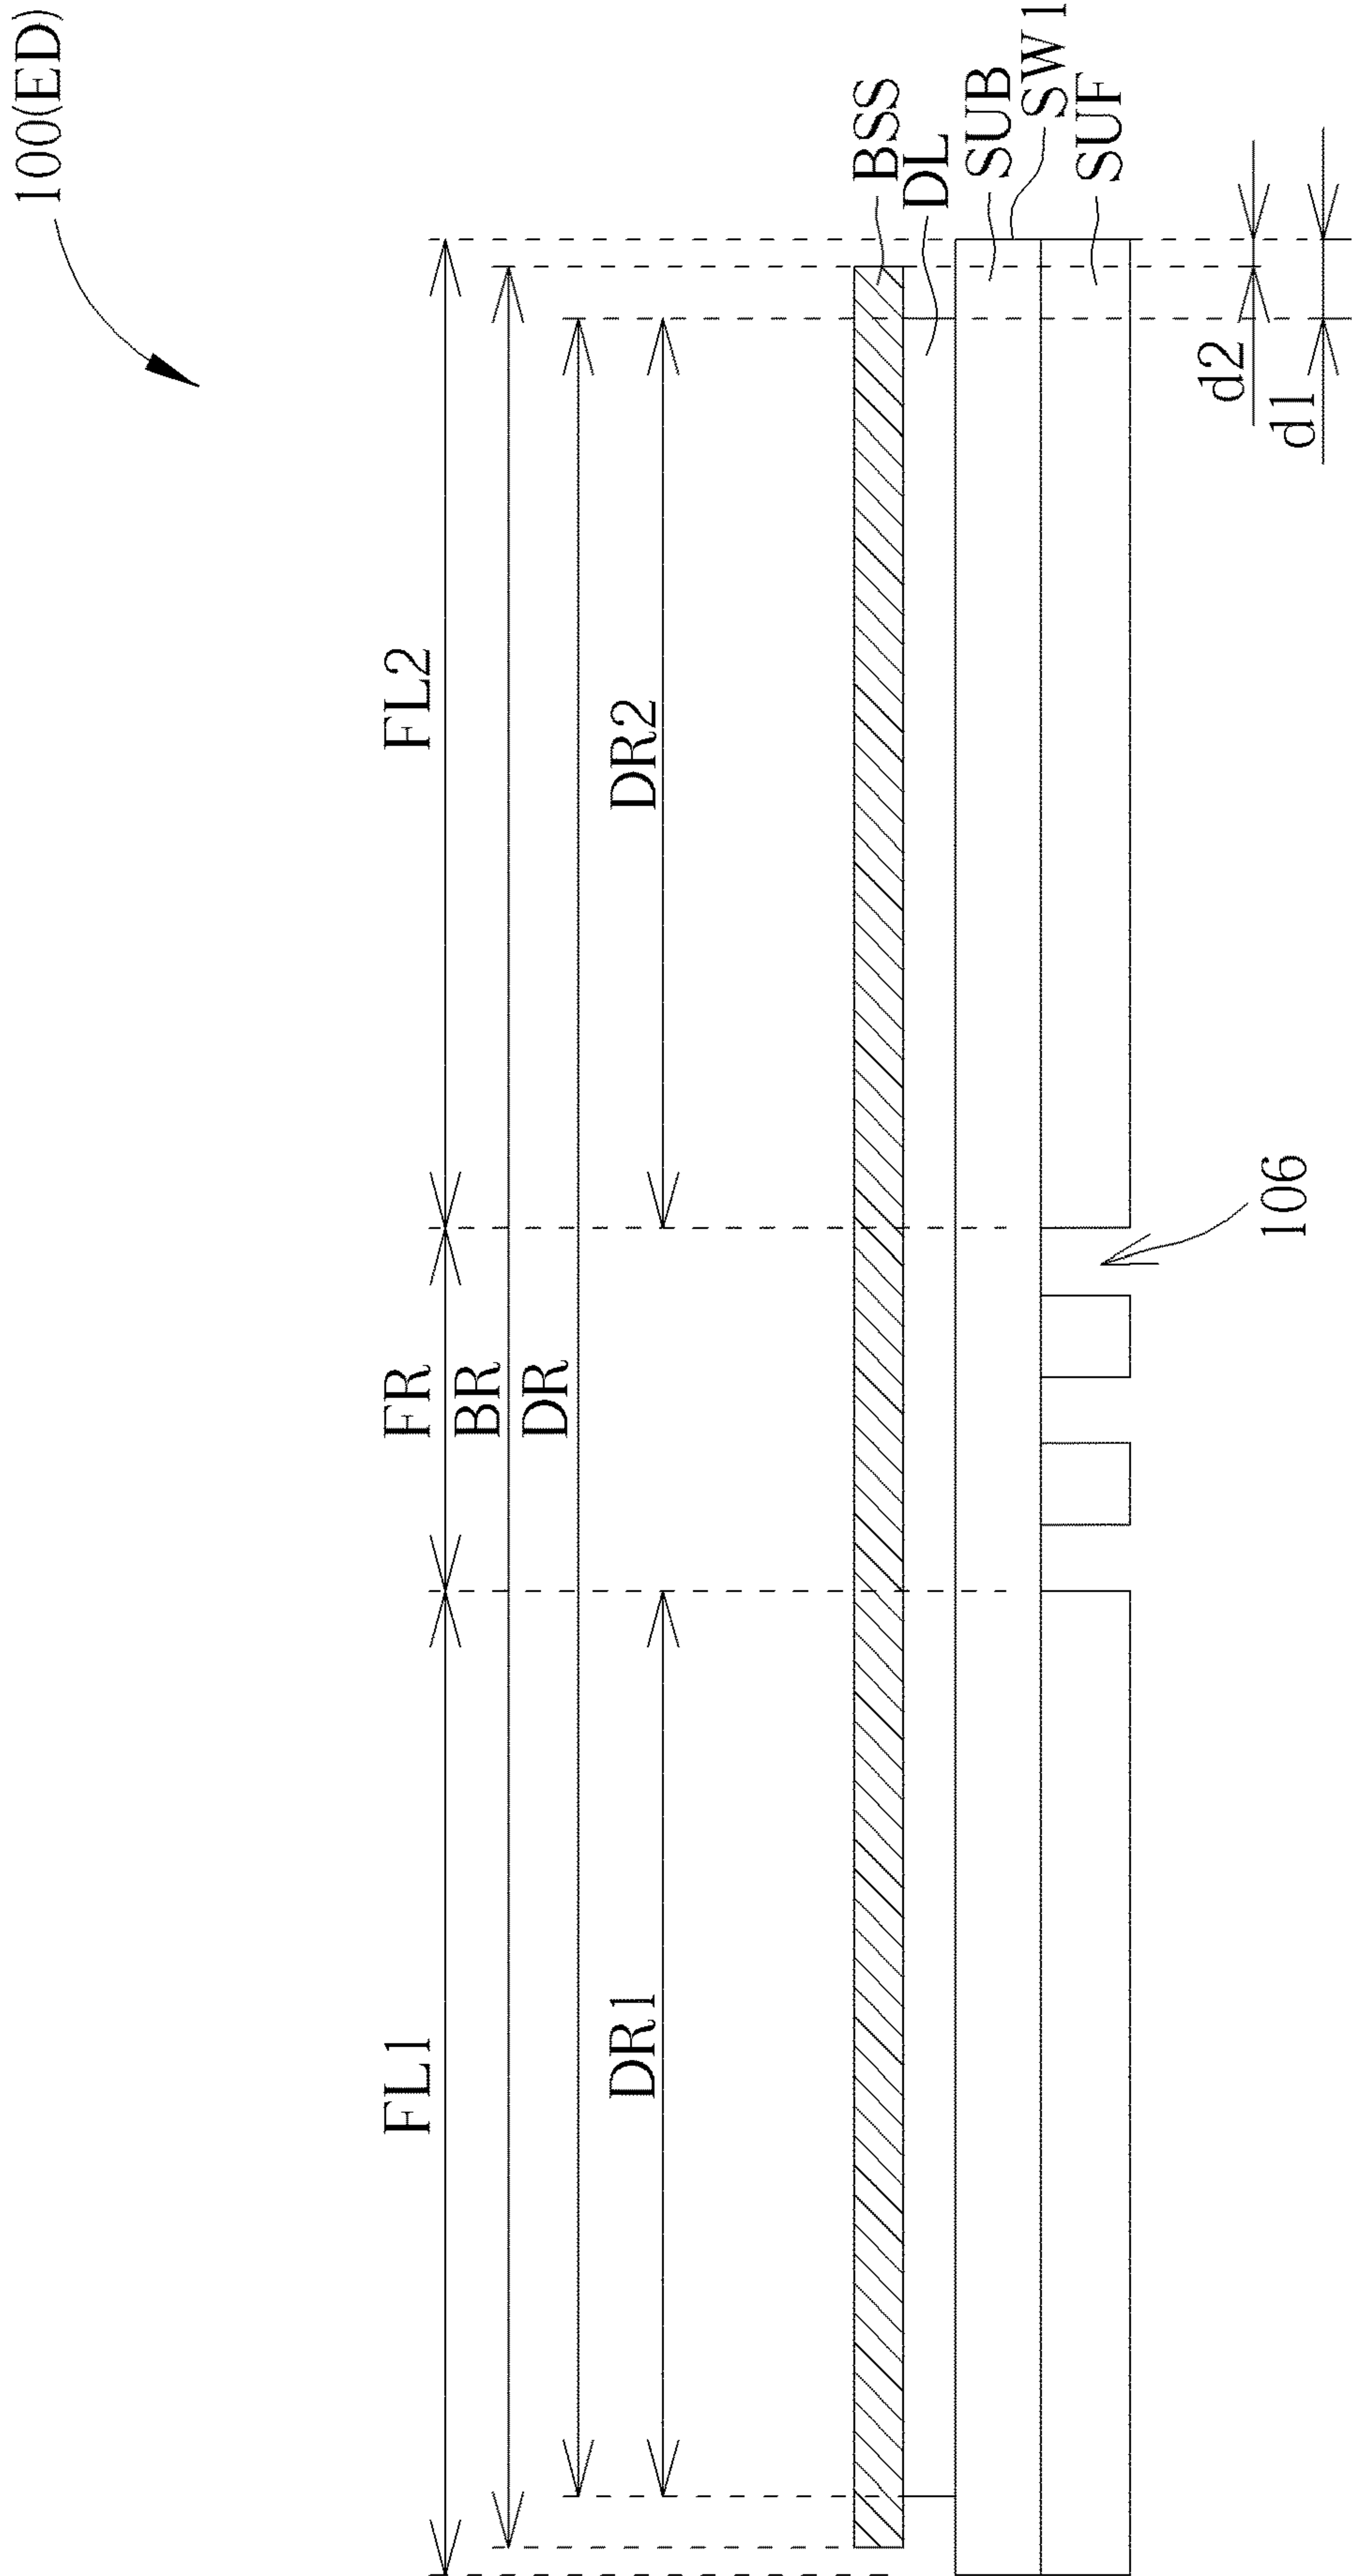


FIG. 3

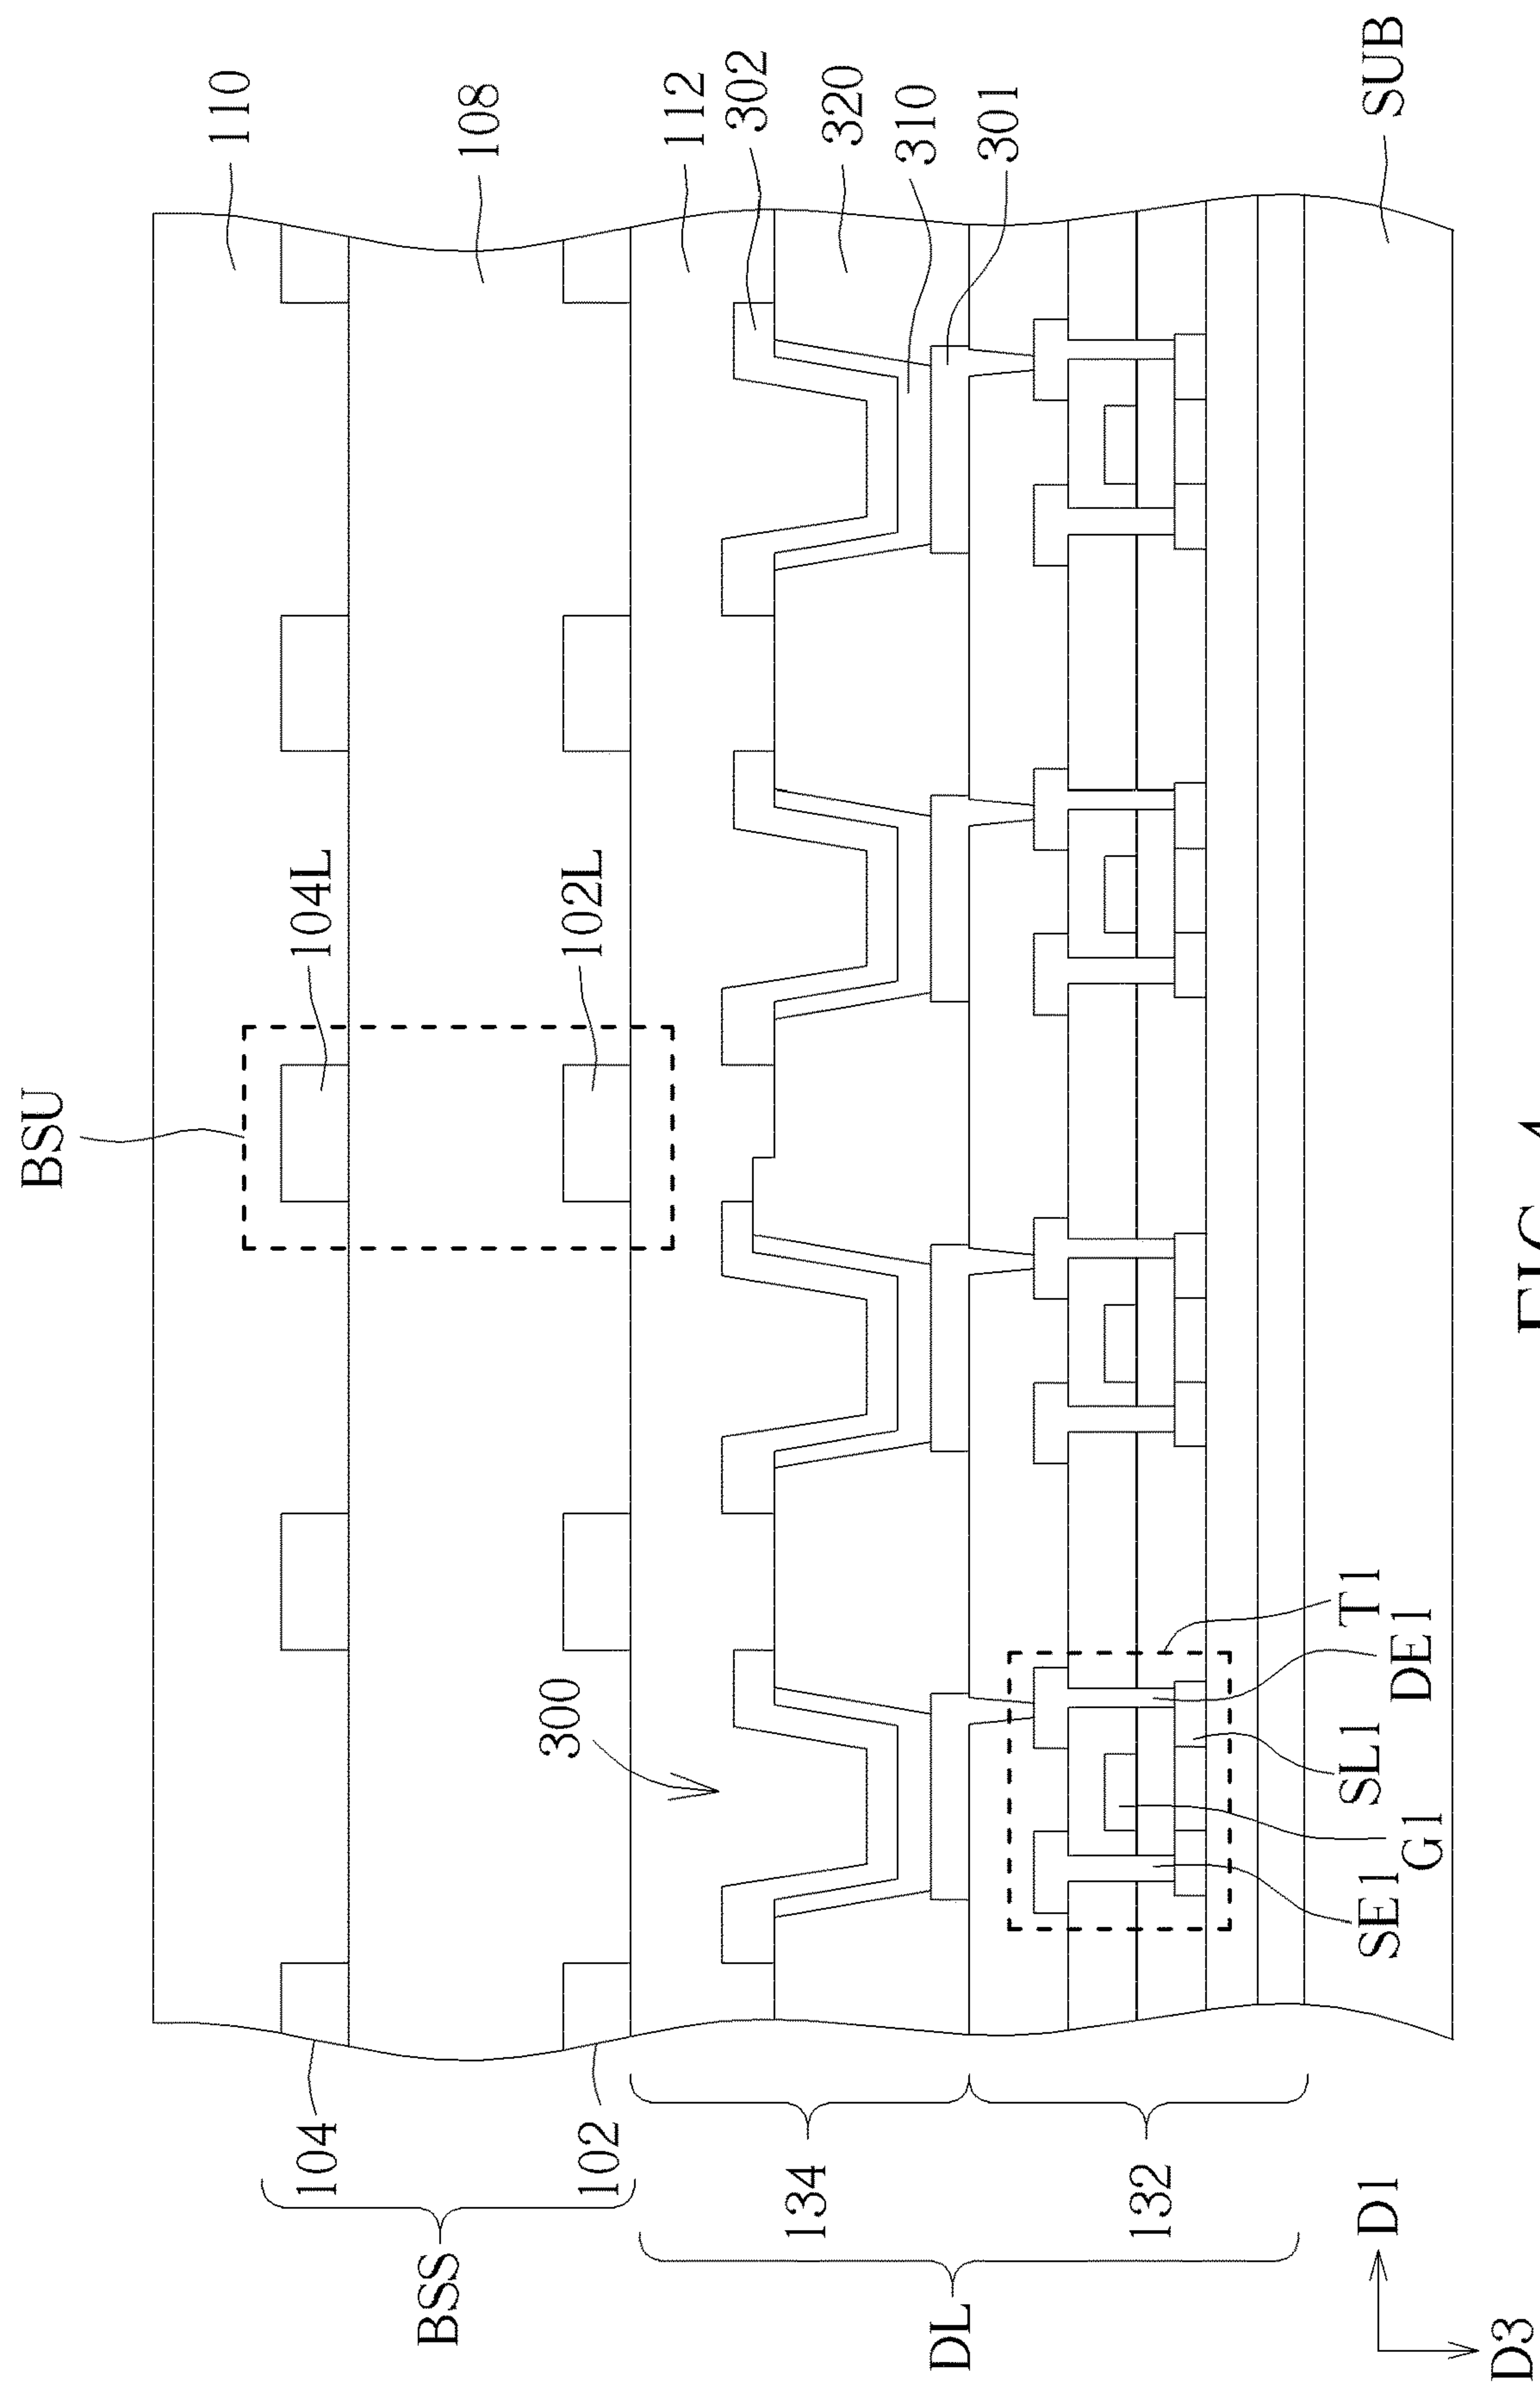


FIG. 4

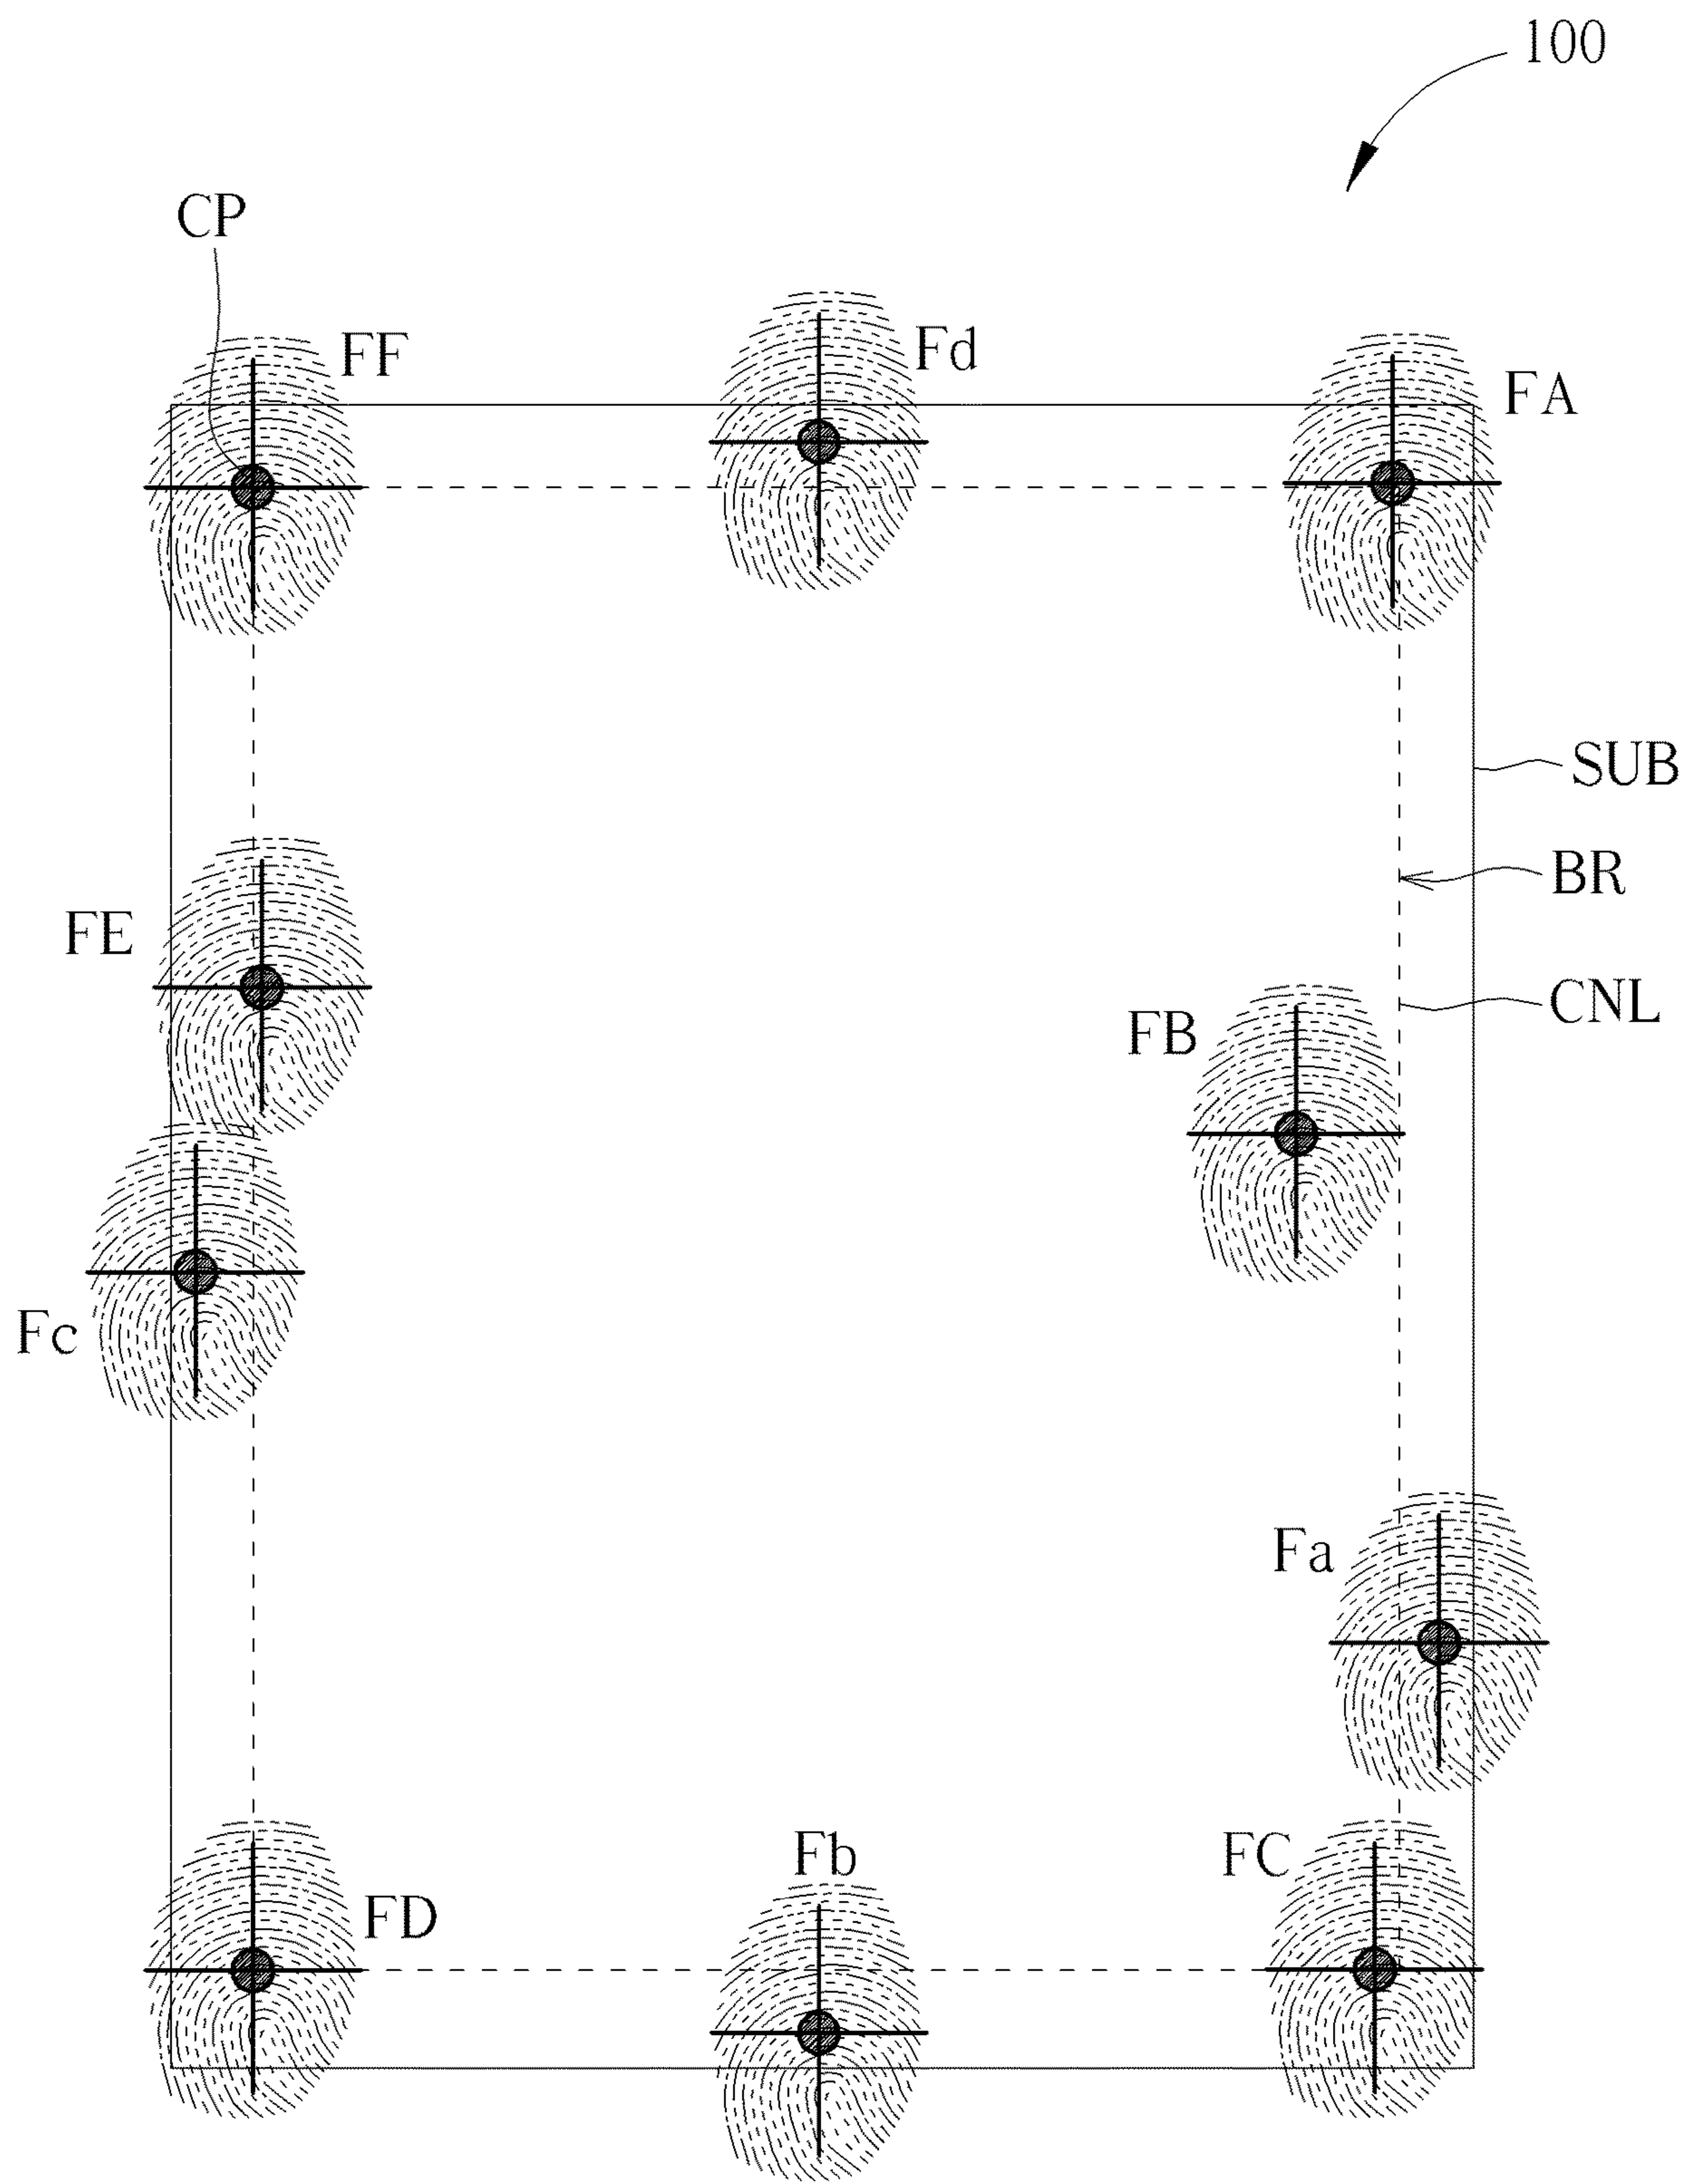


FIG. 5

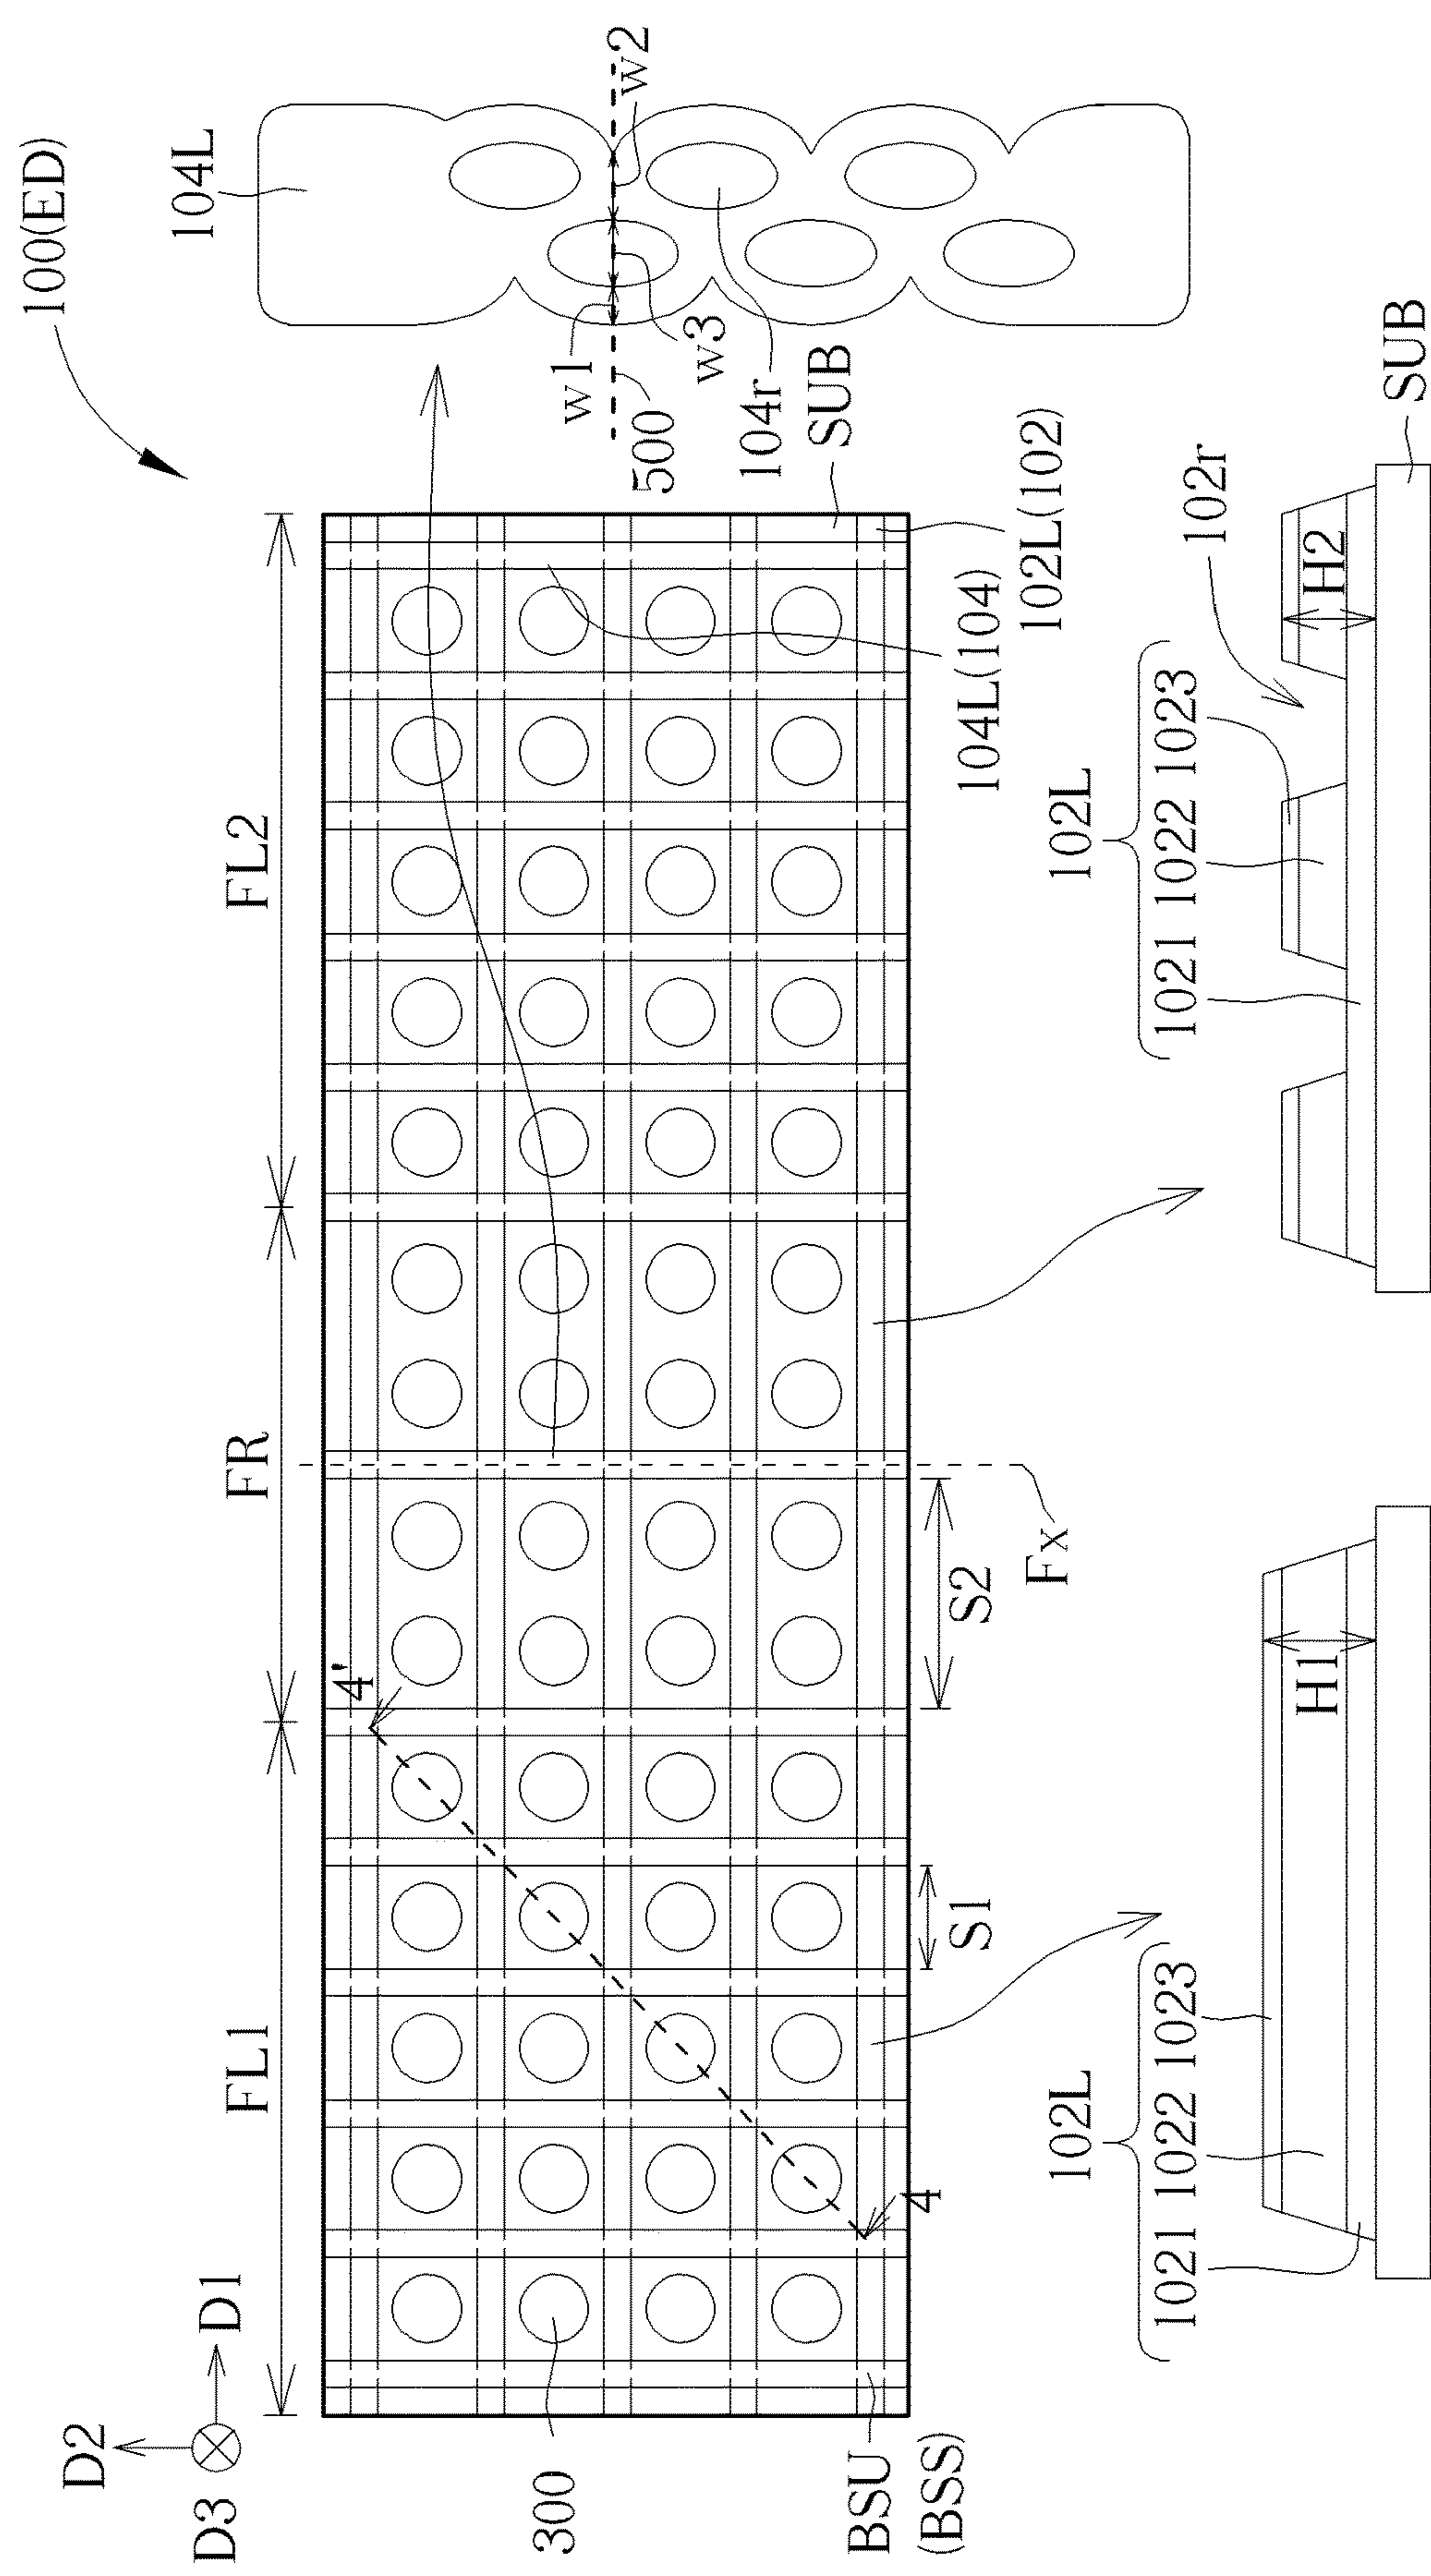


FIG. 6

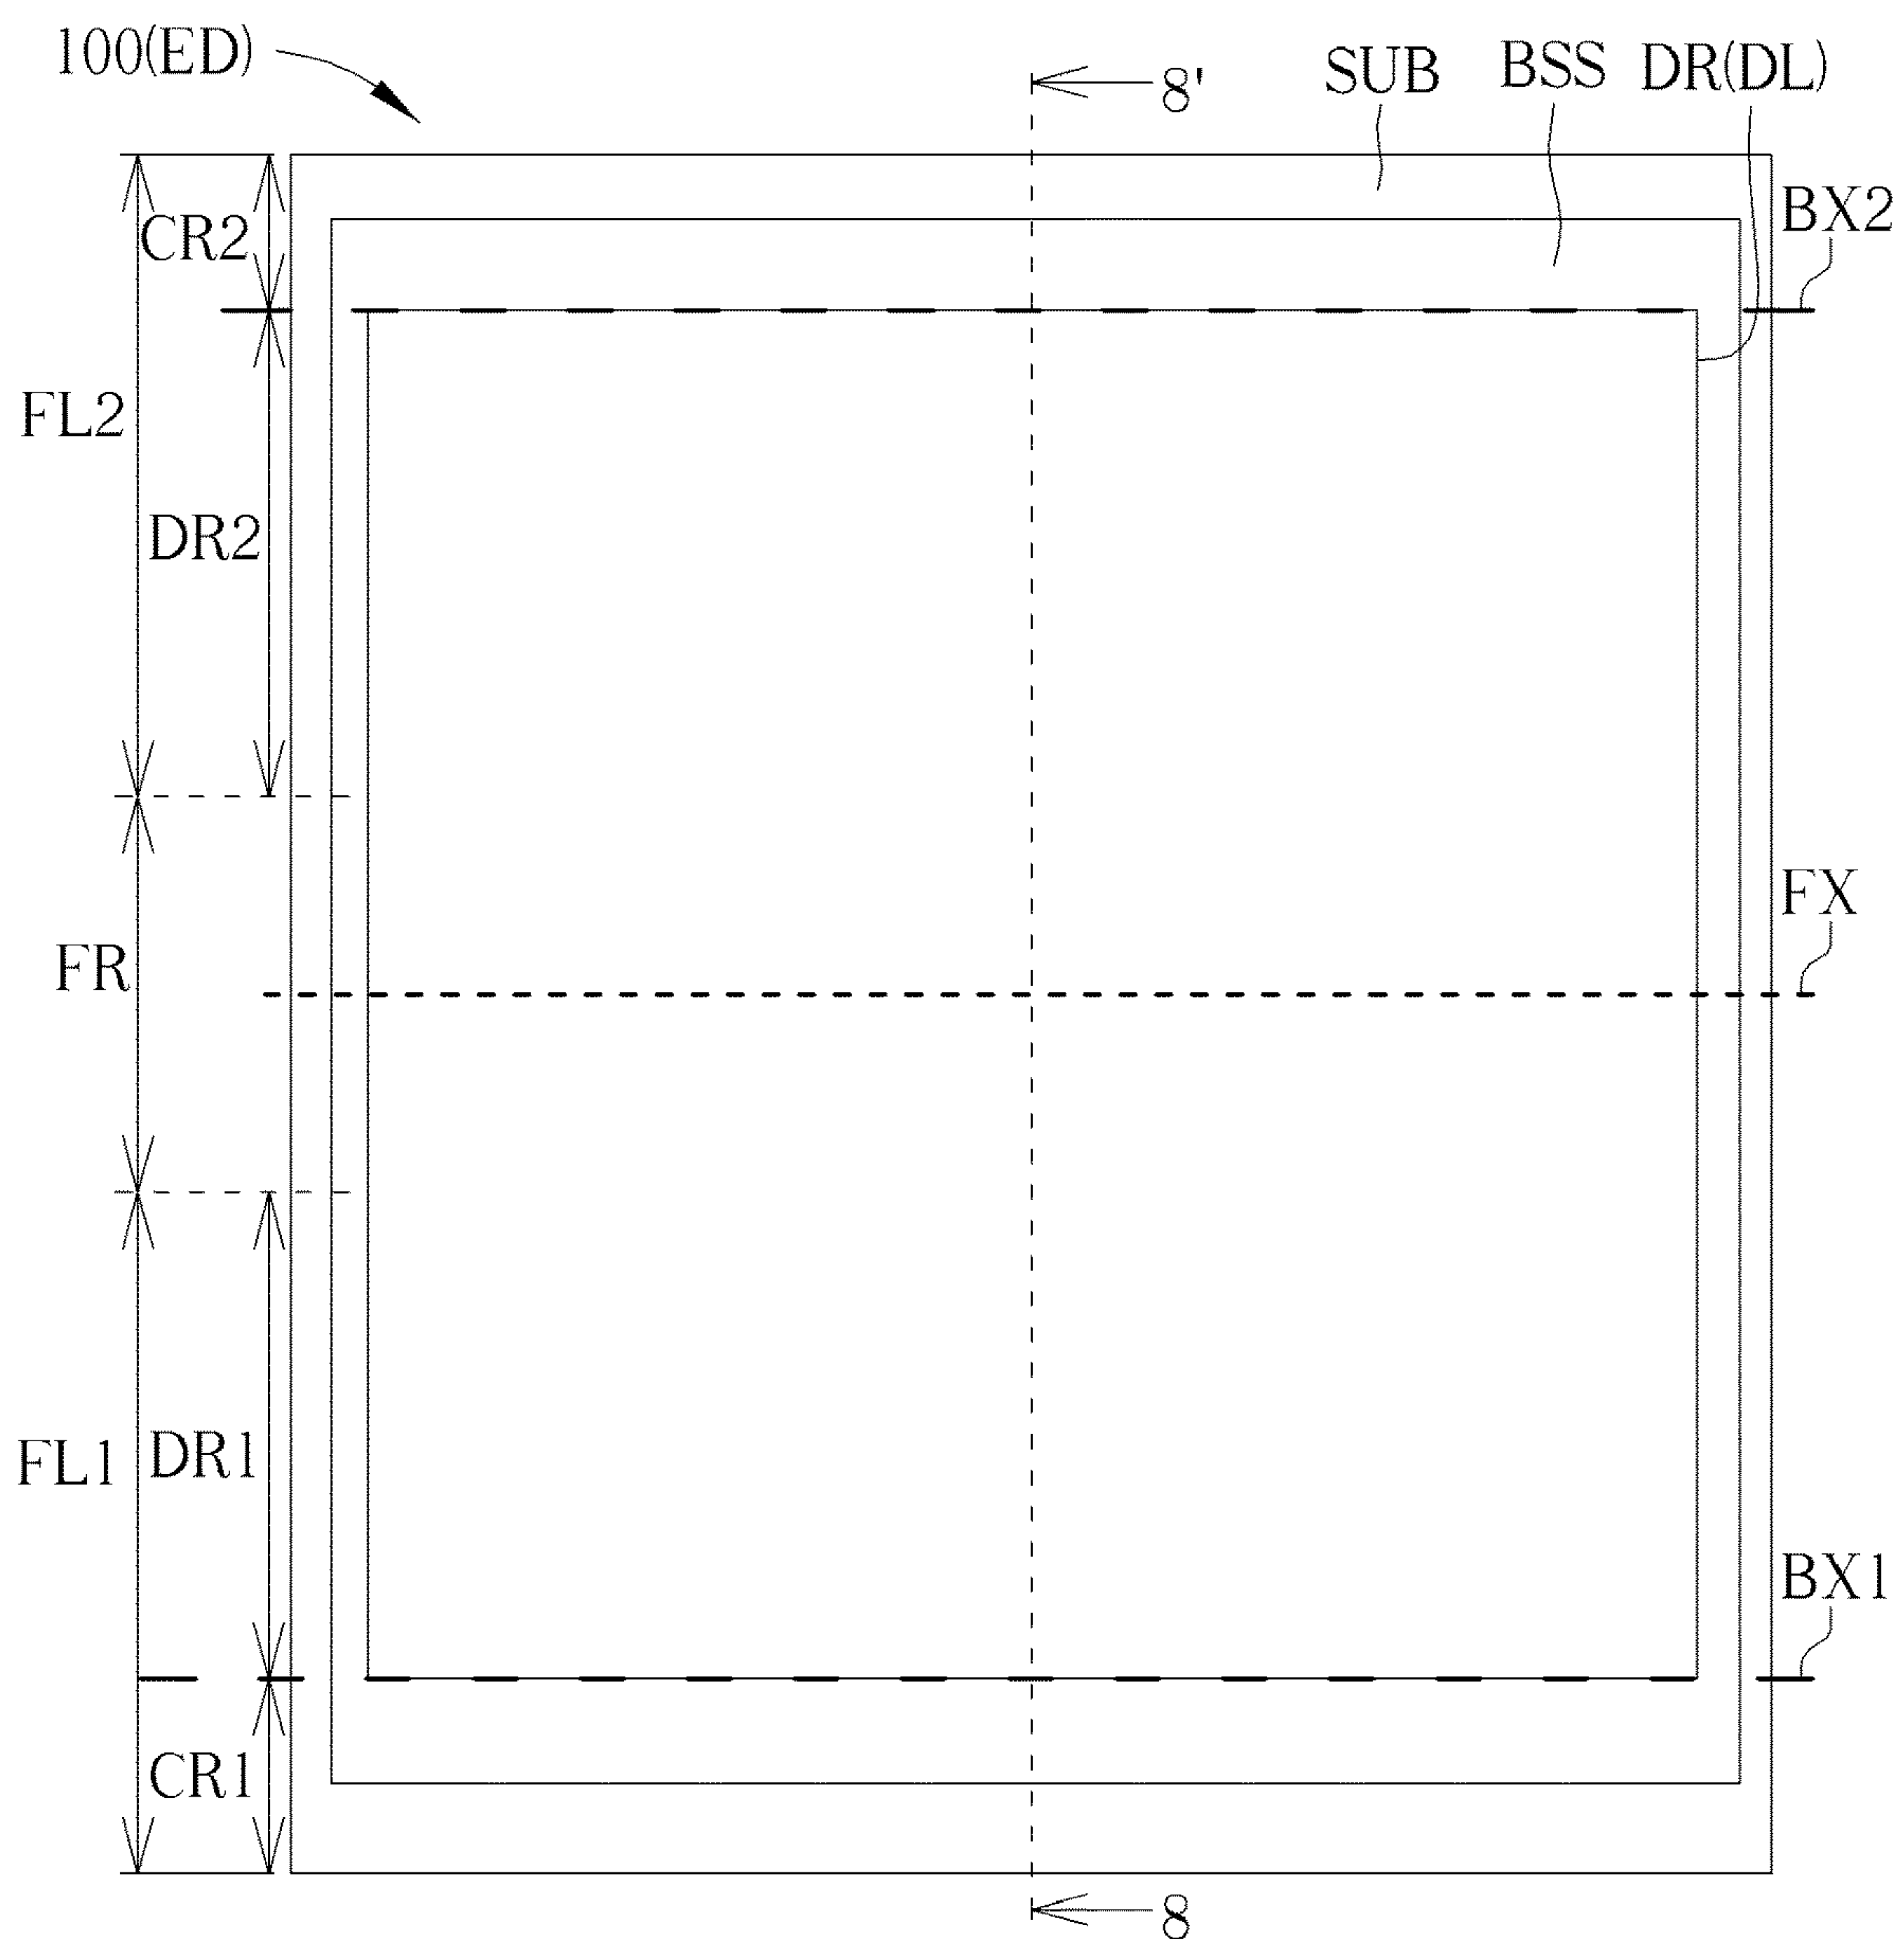


FIG. 7

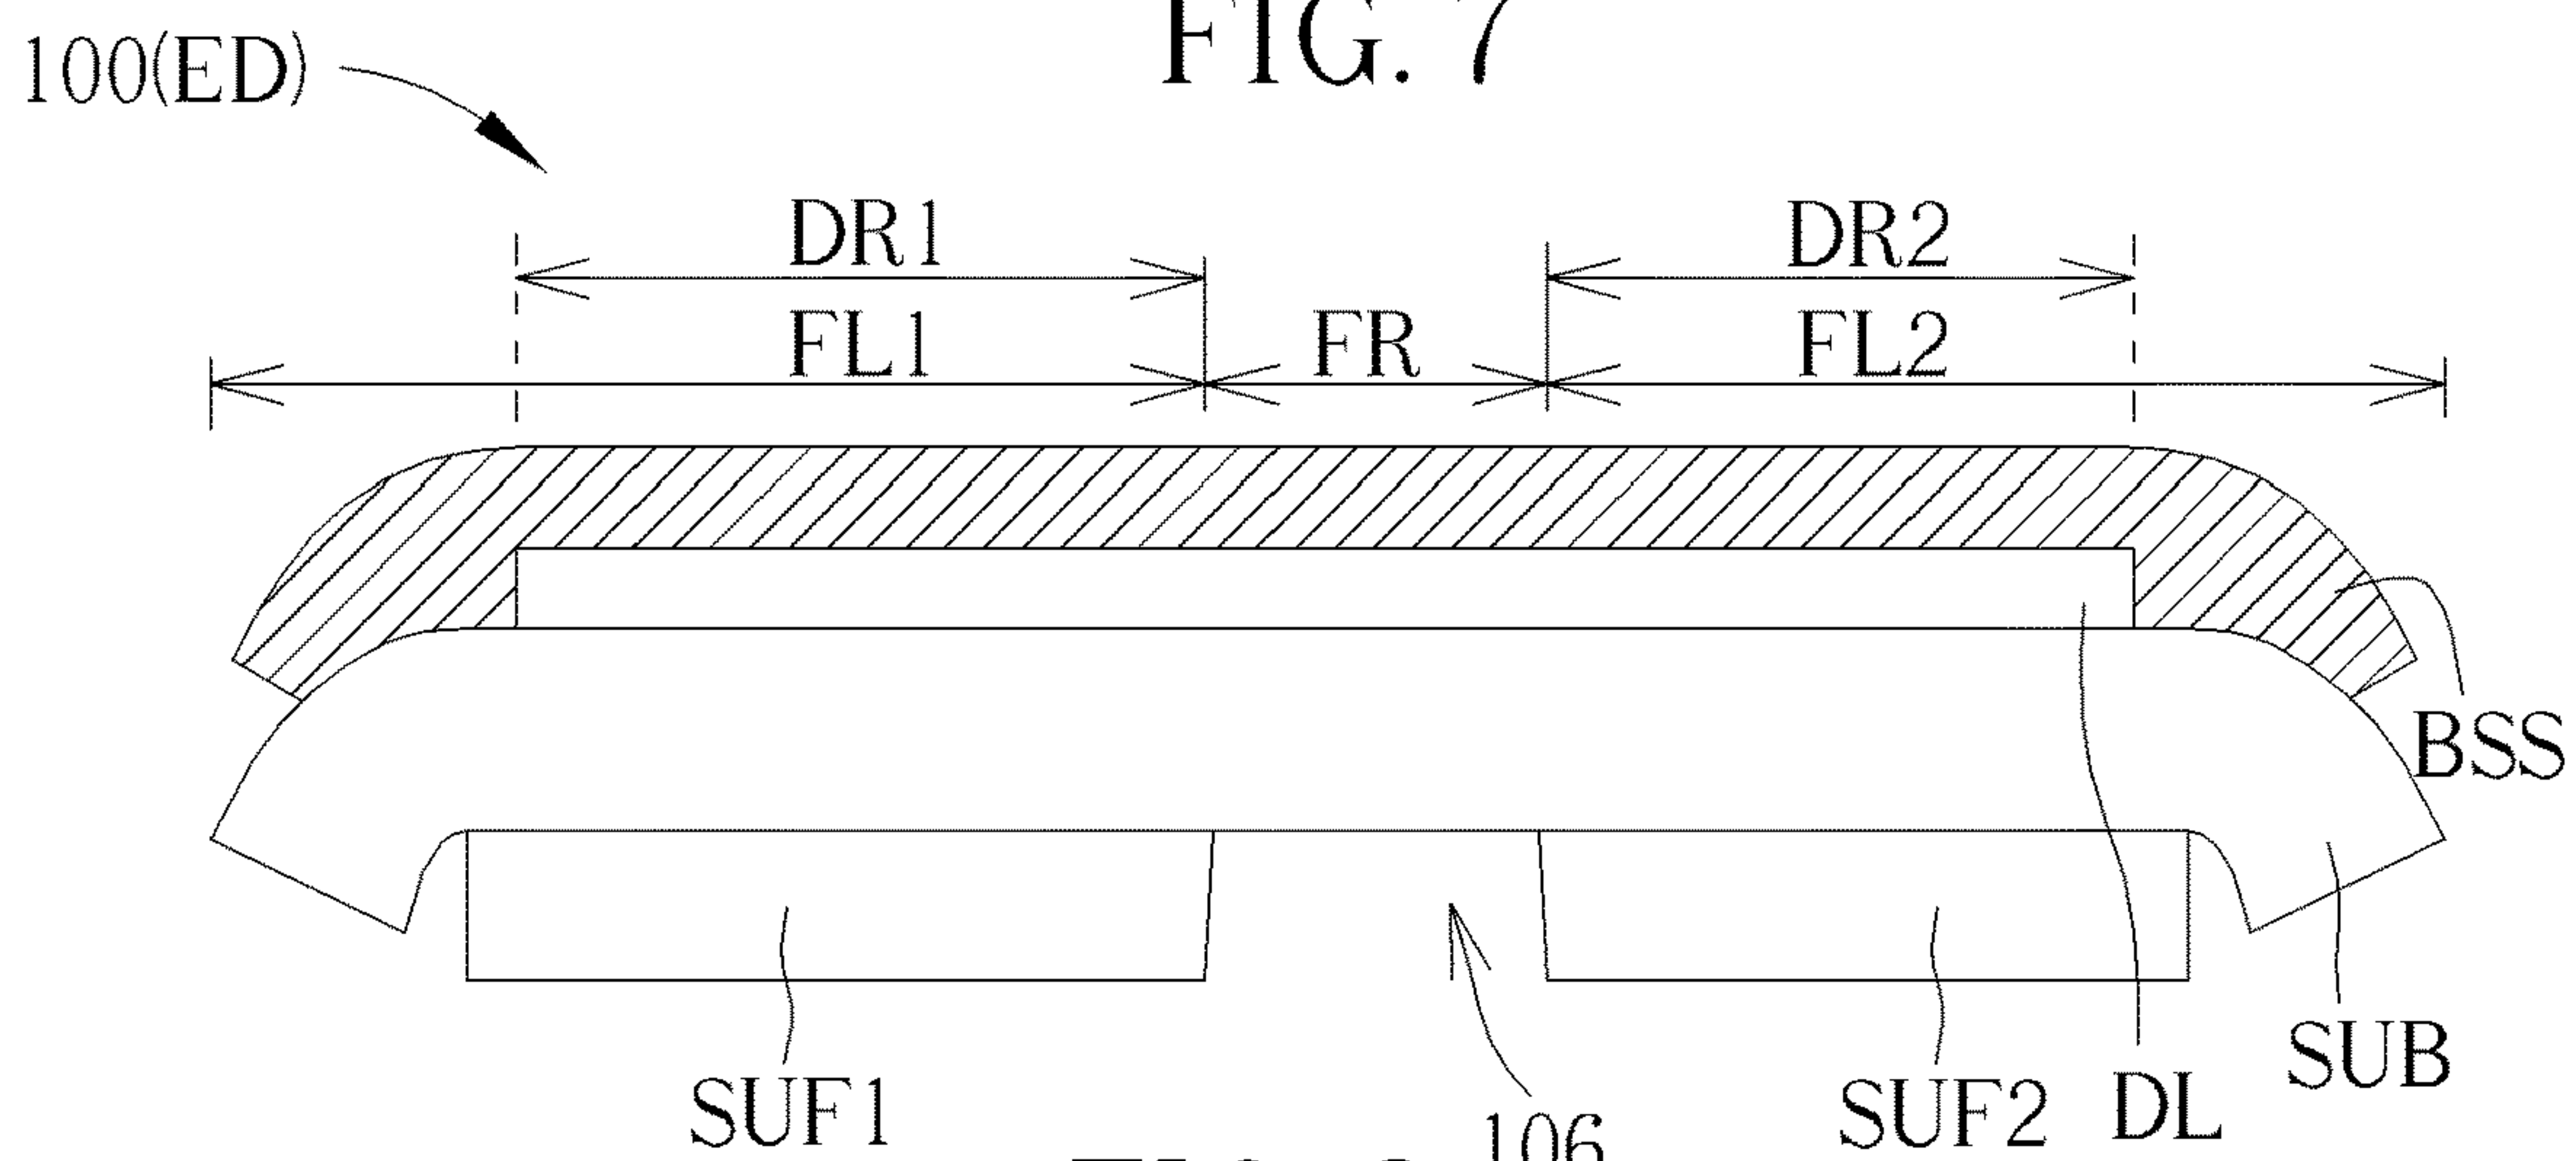


FIG. 8

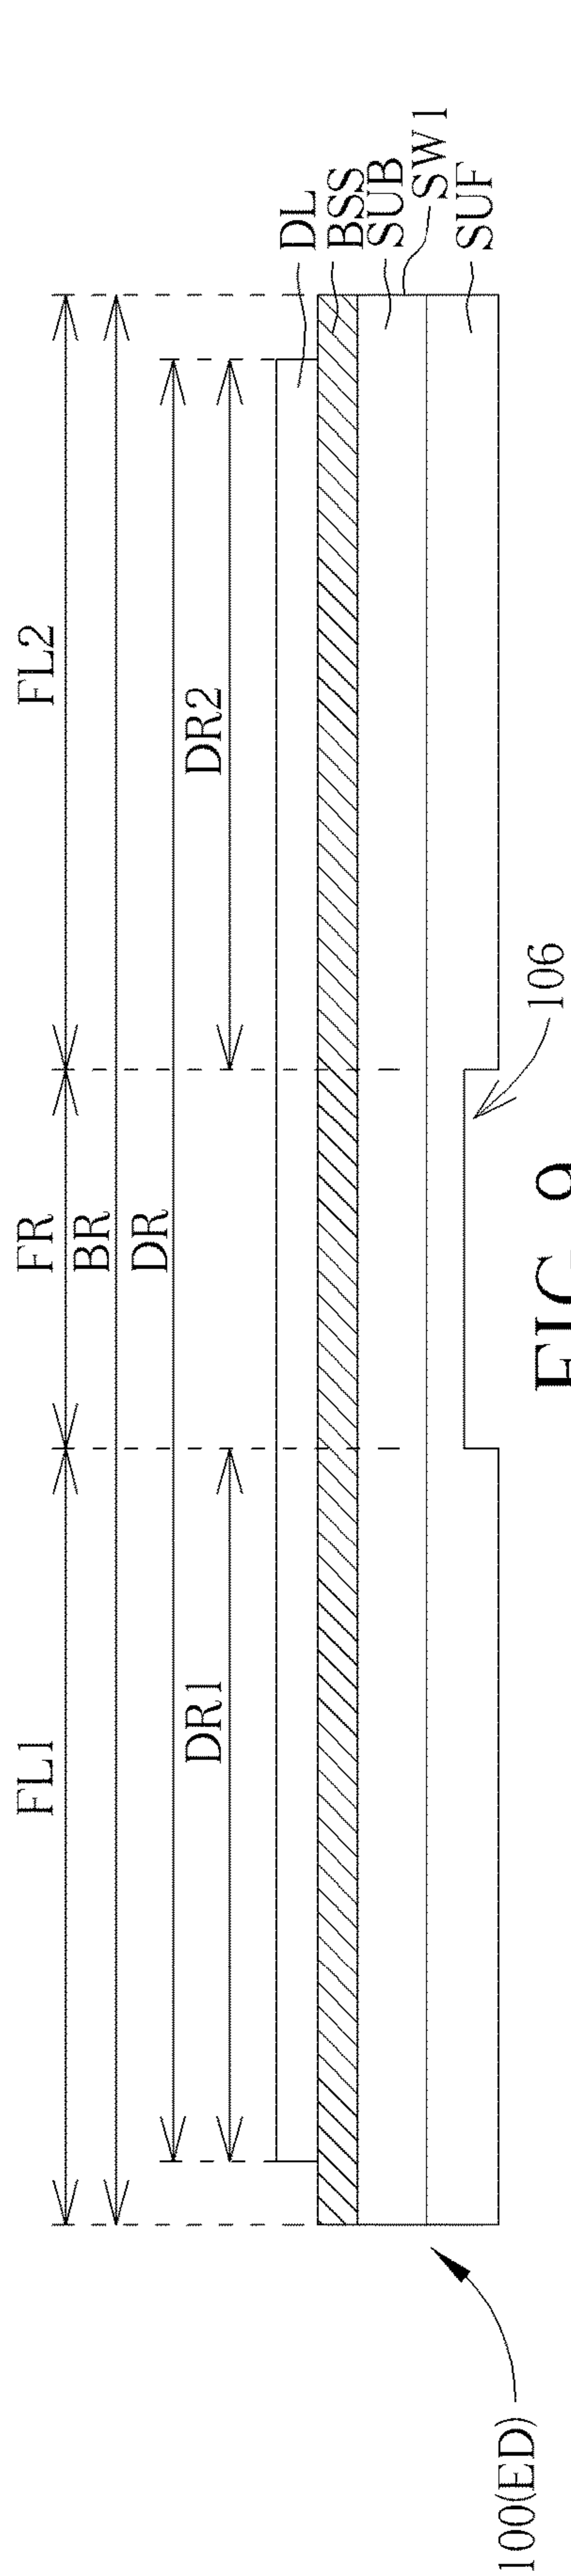


FIG. 9

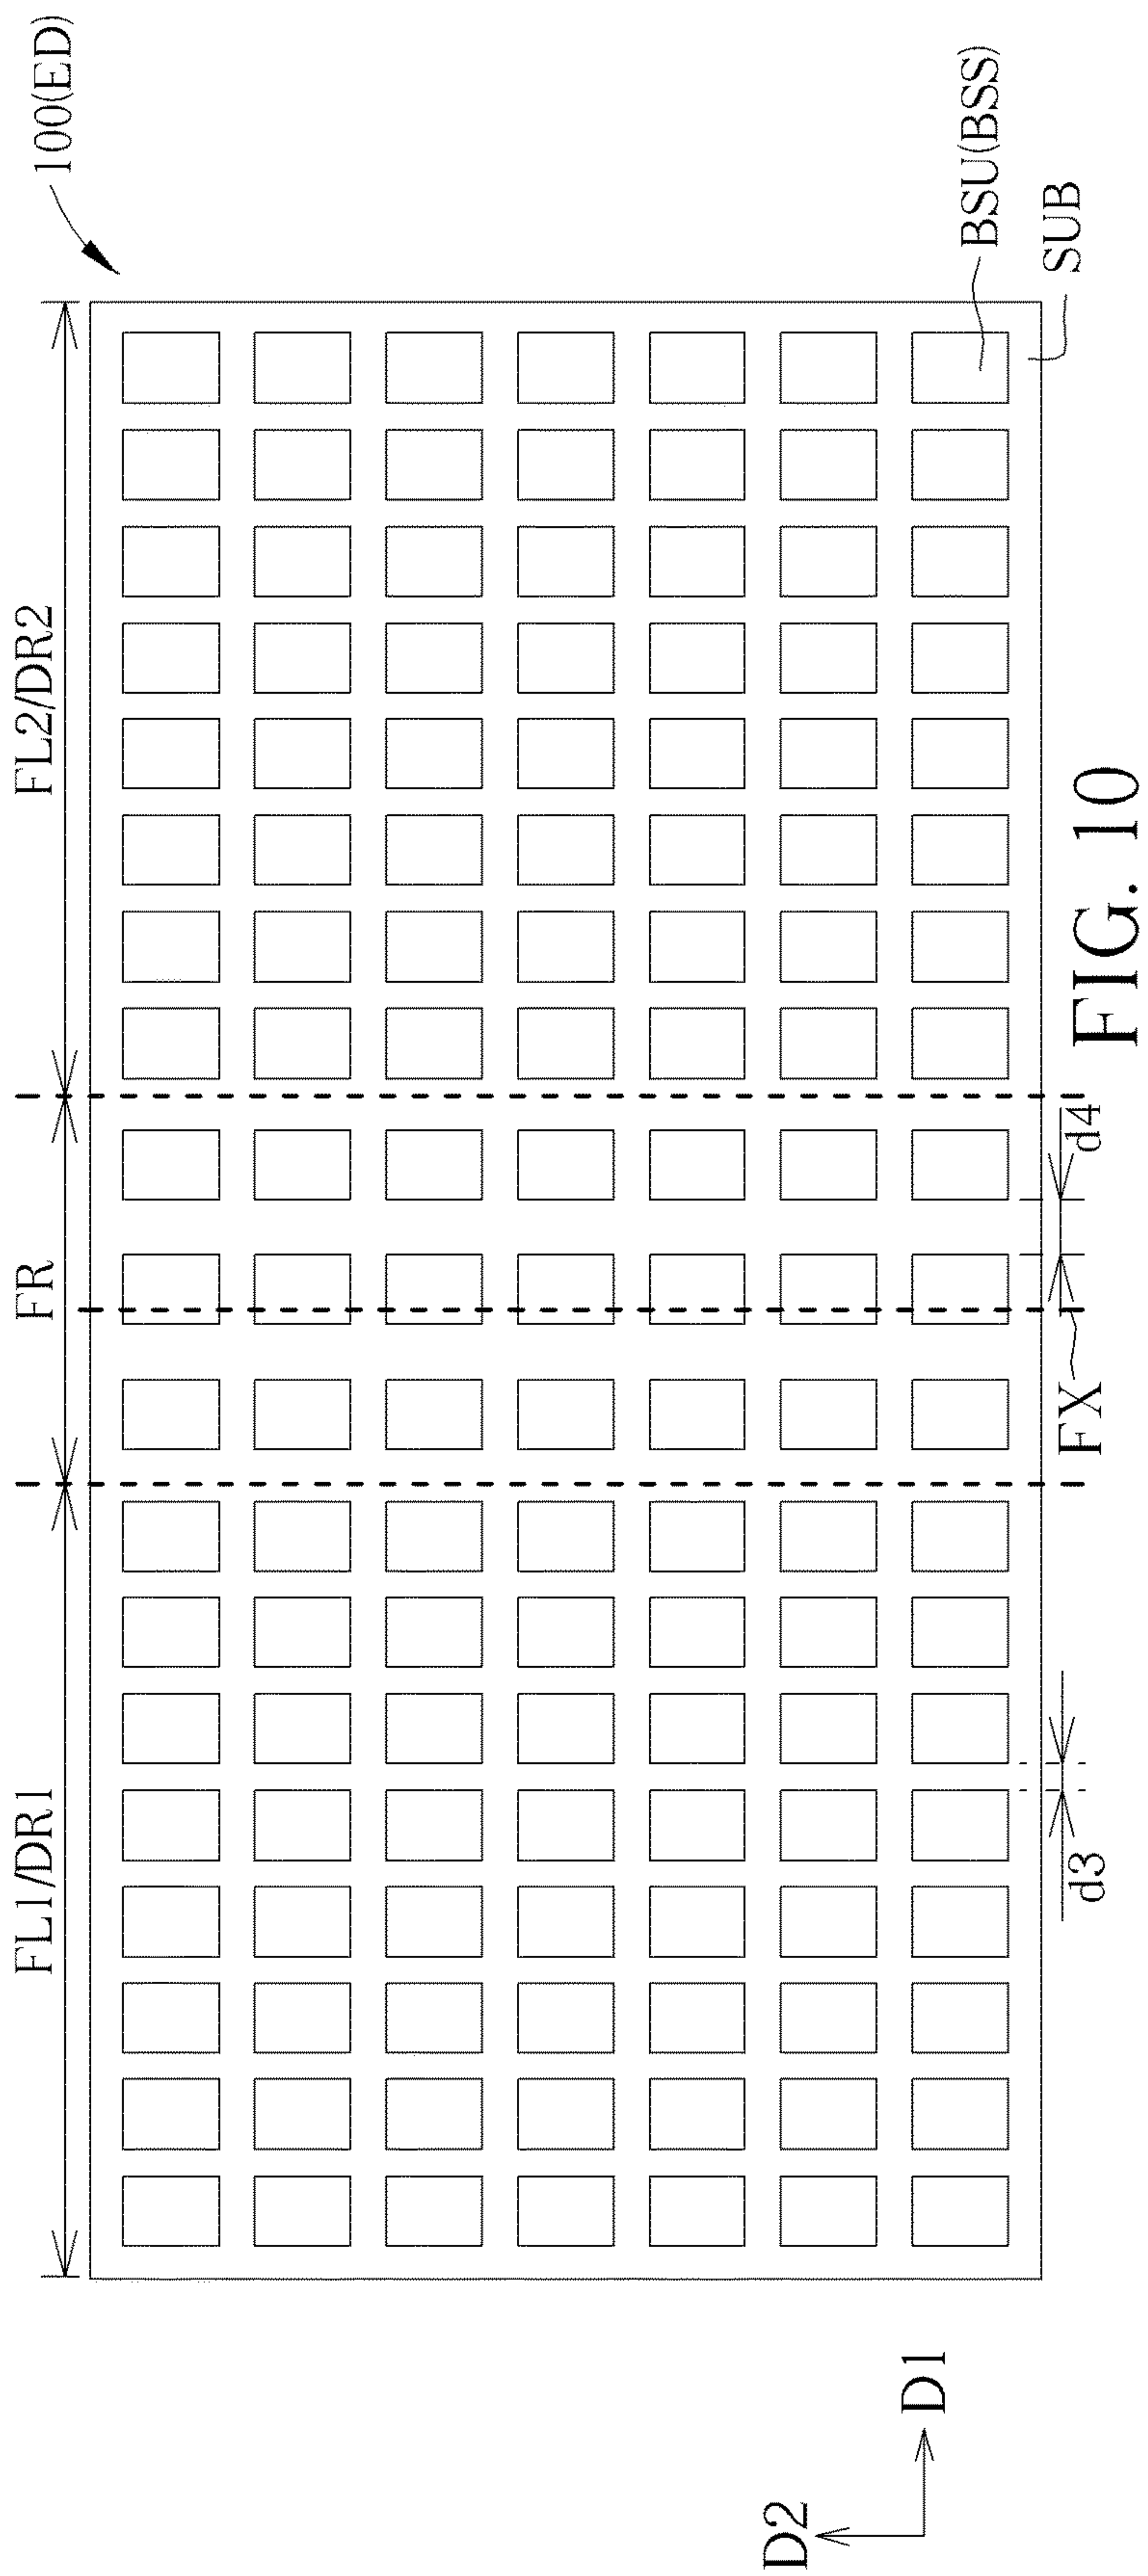
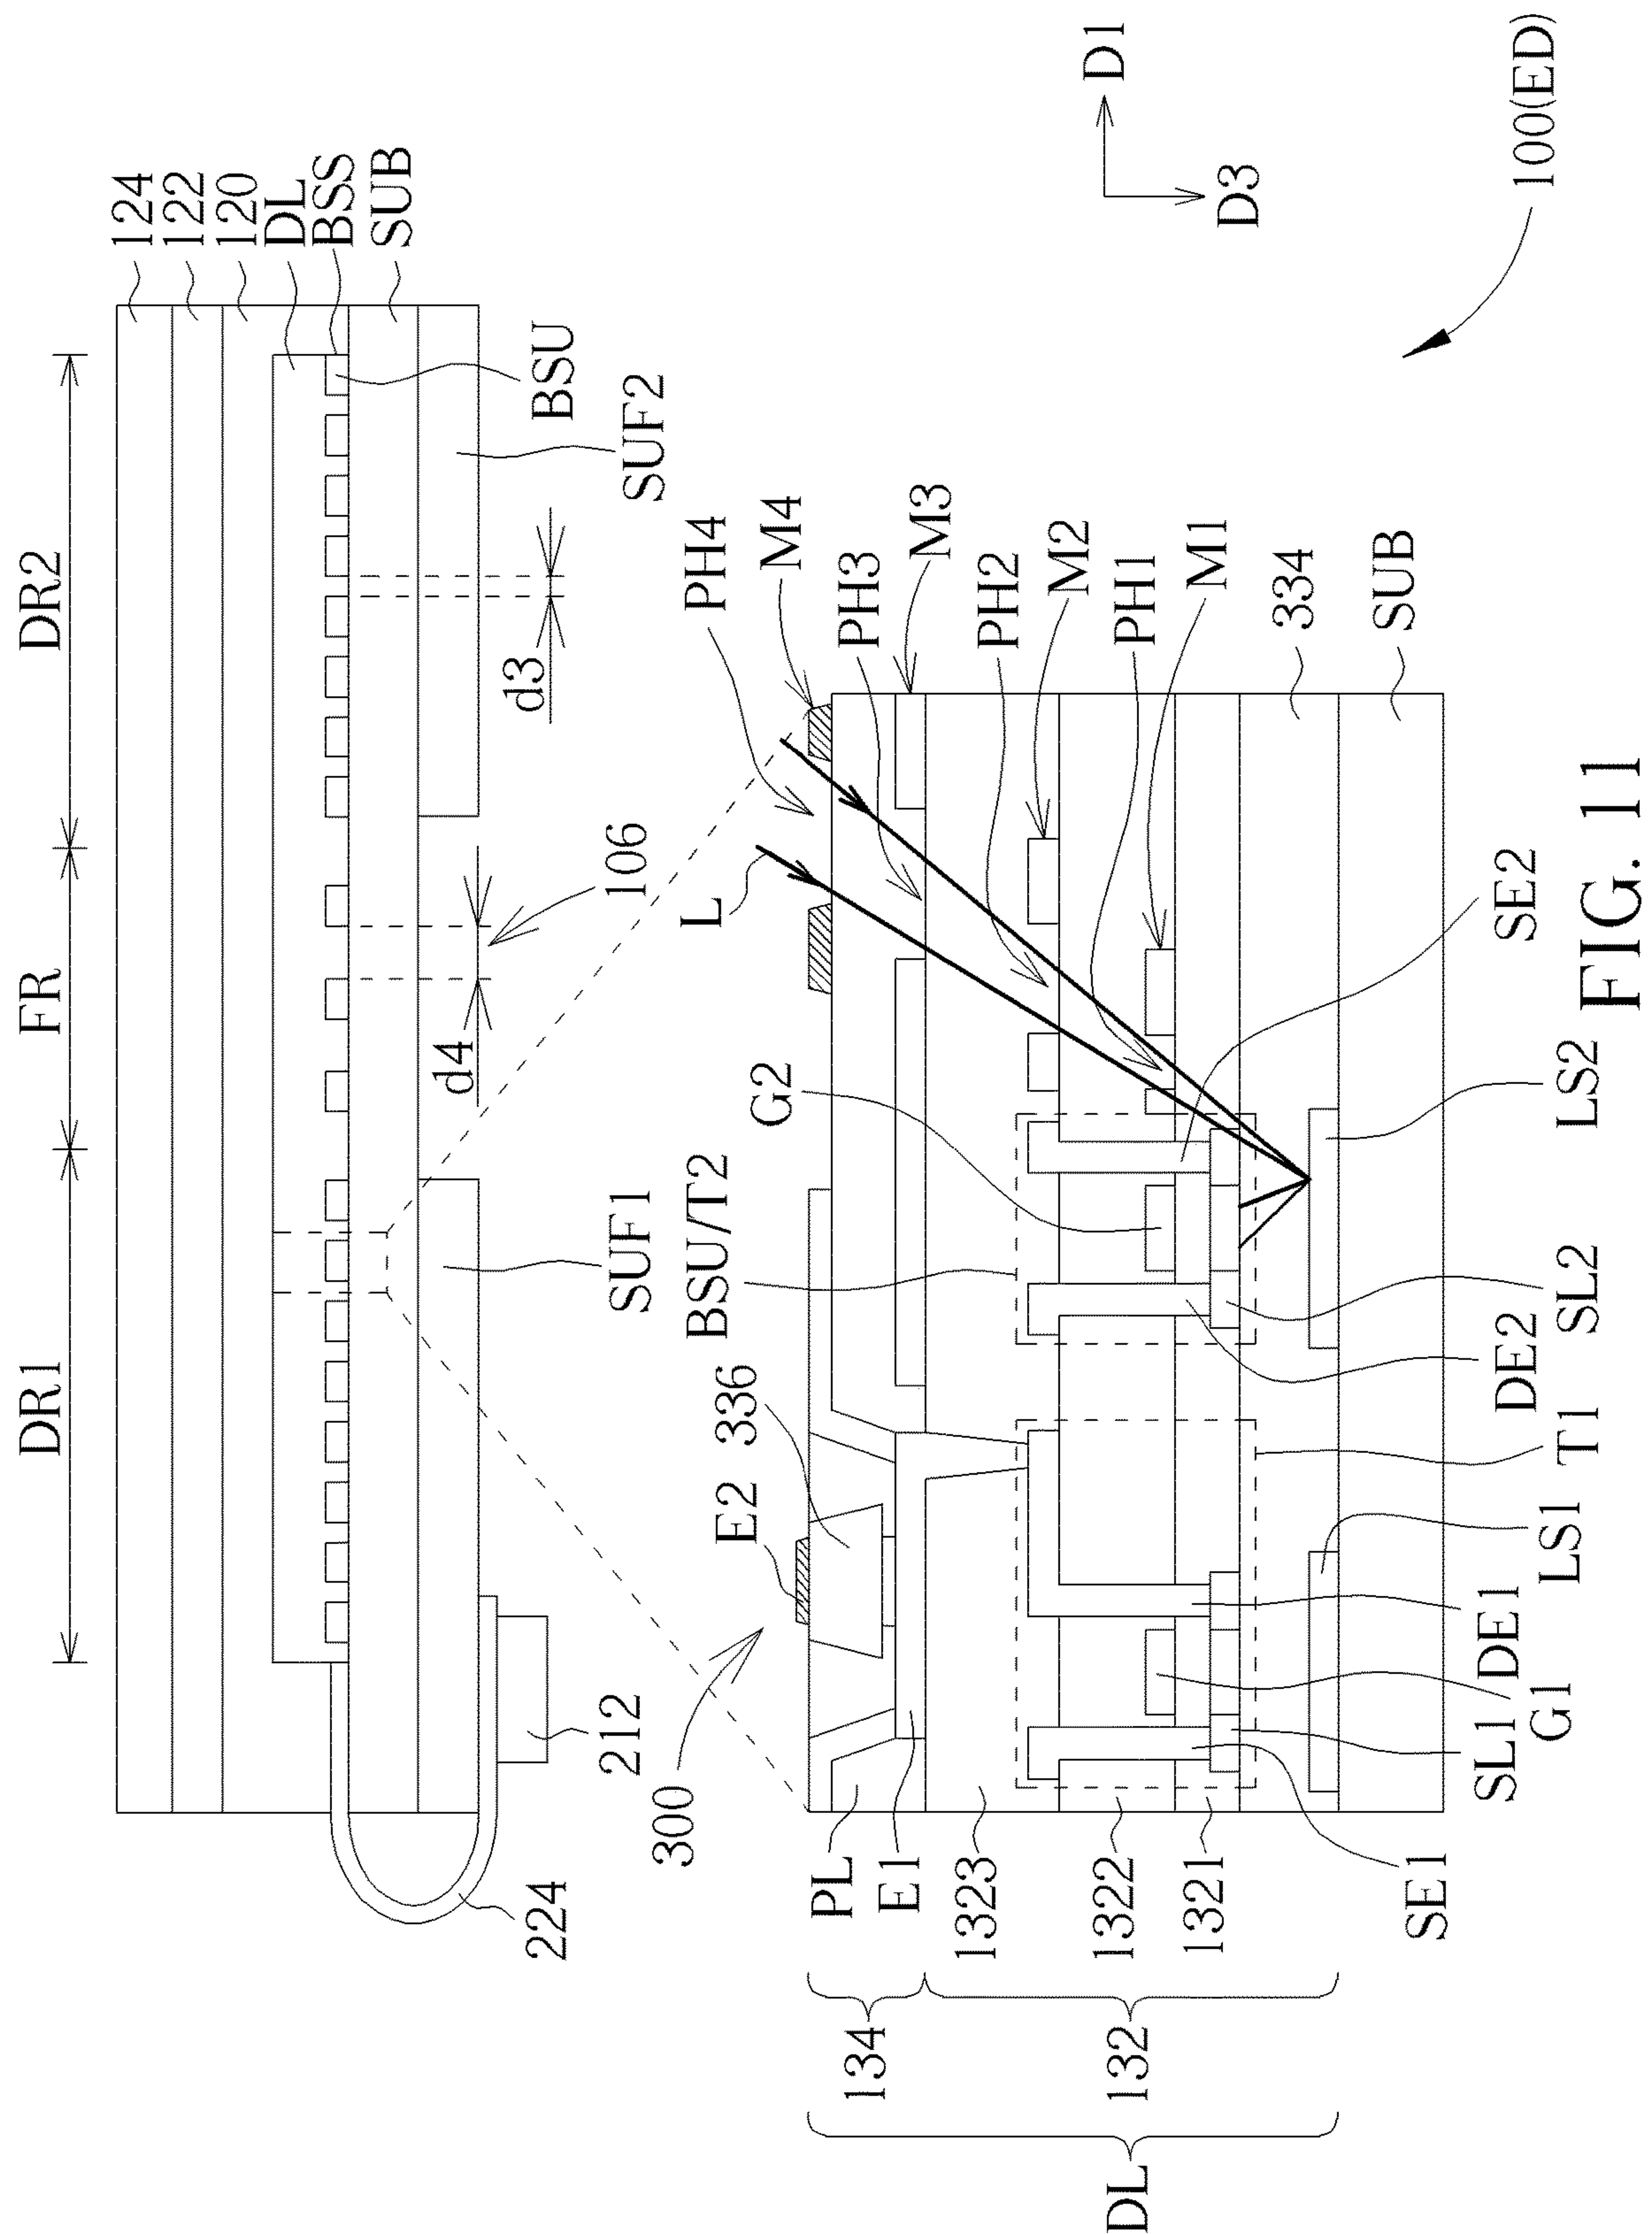


FIG. 10



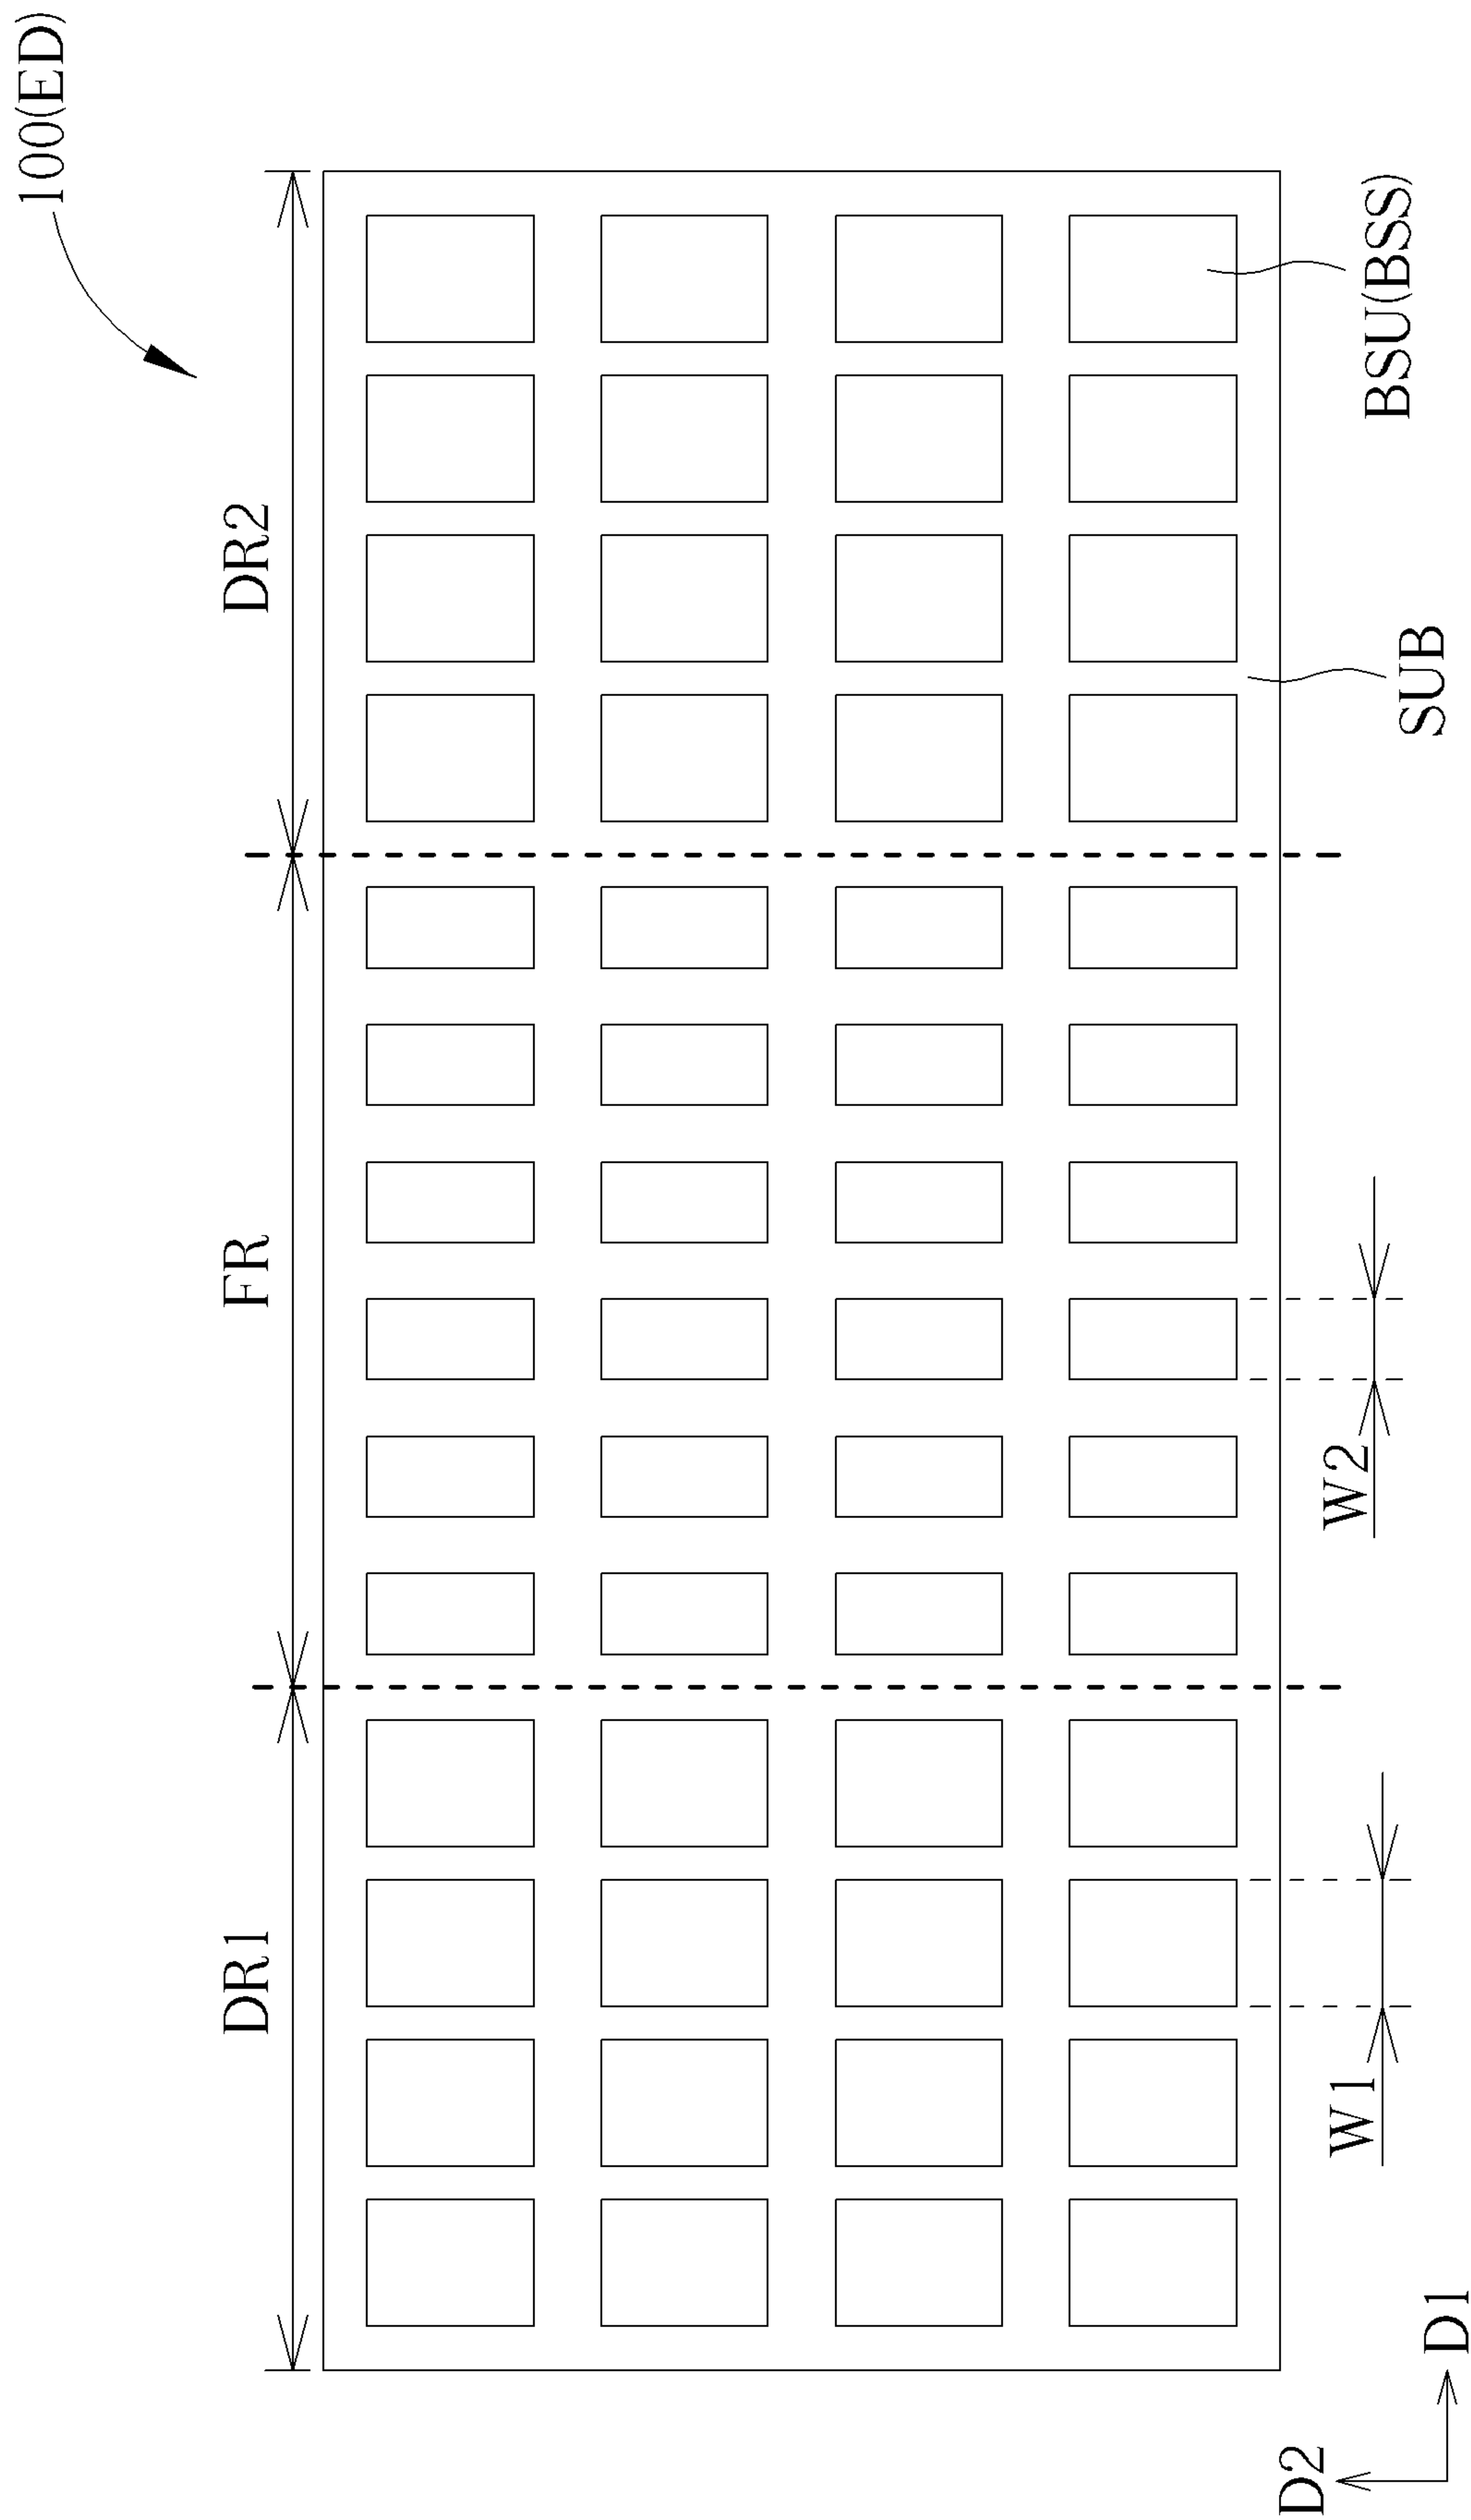


FIG. 12

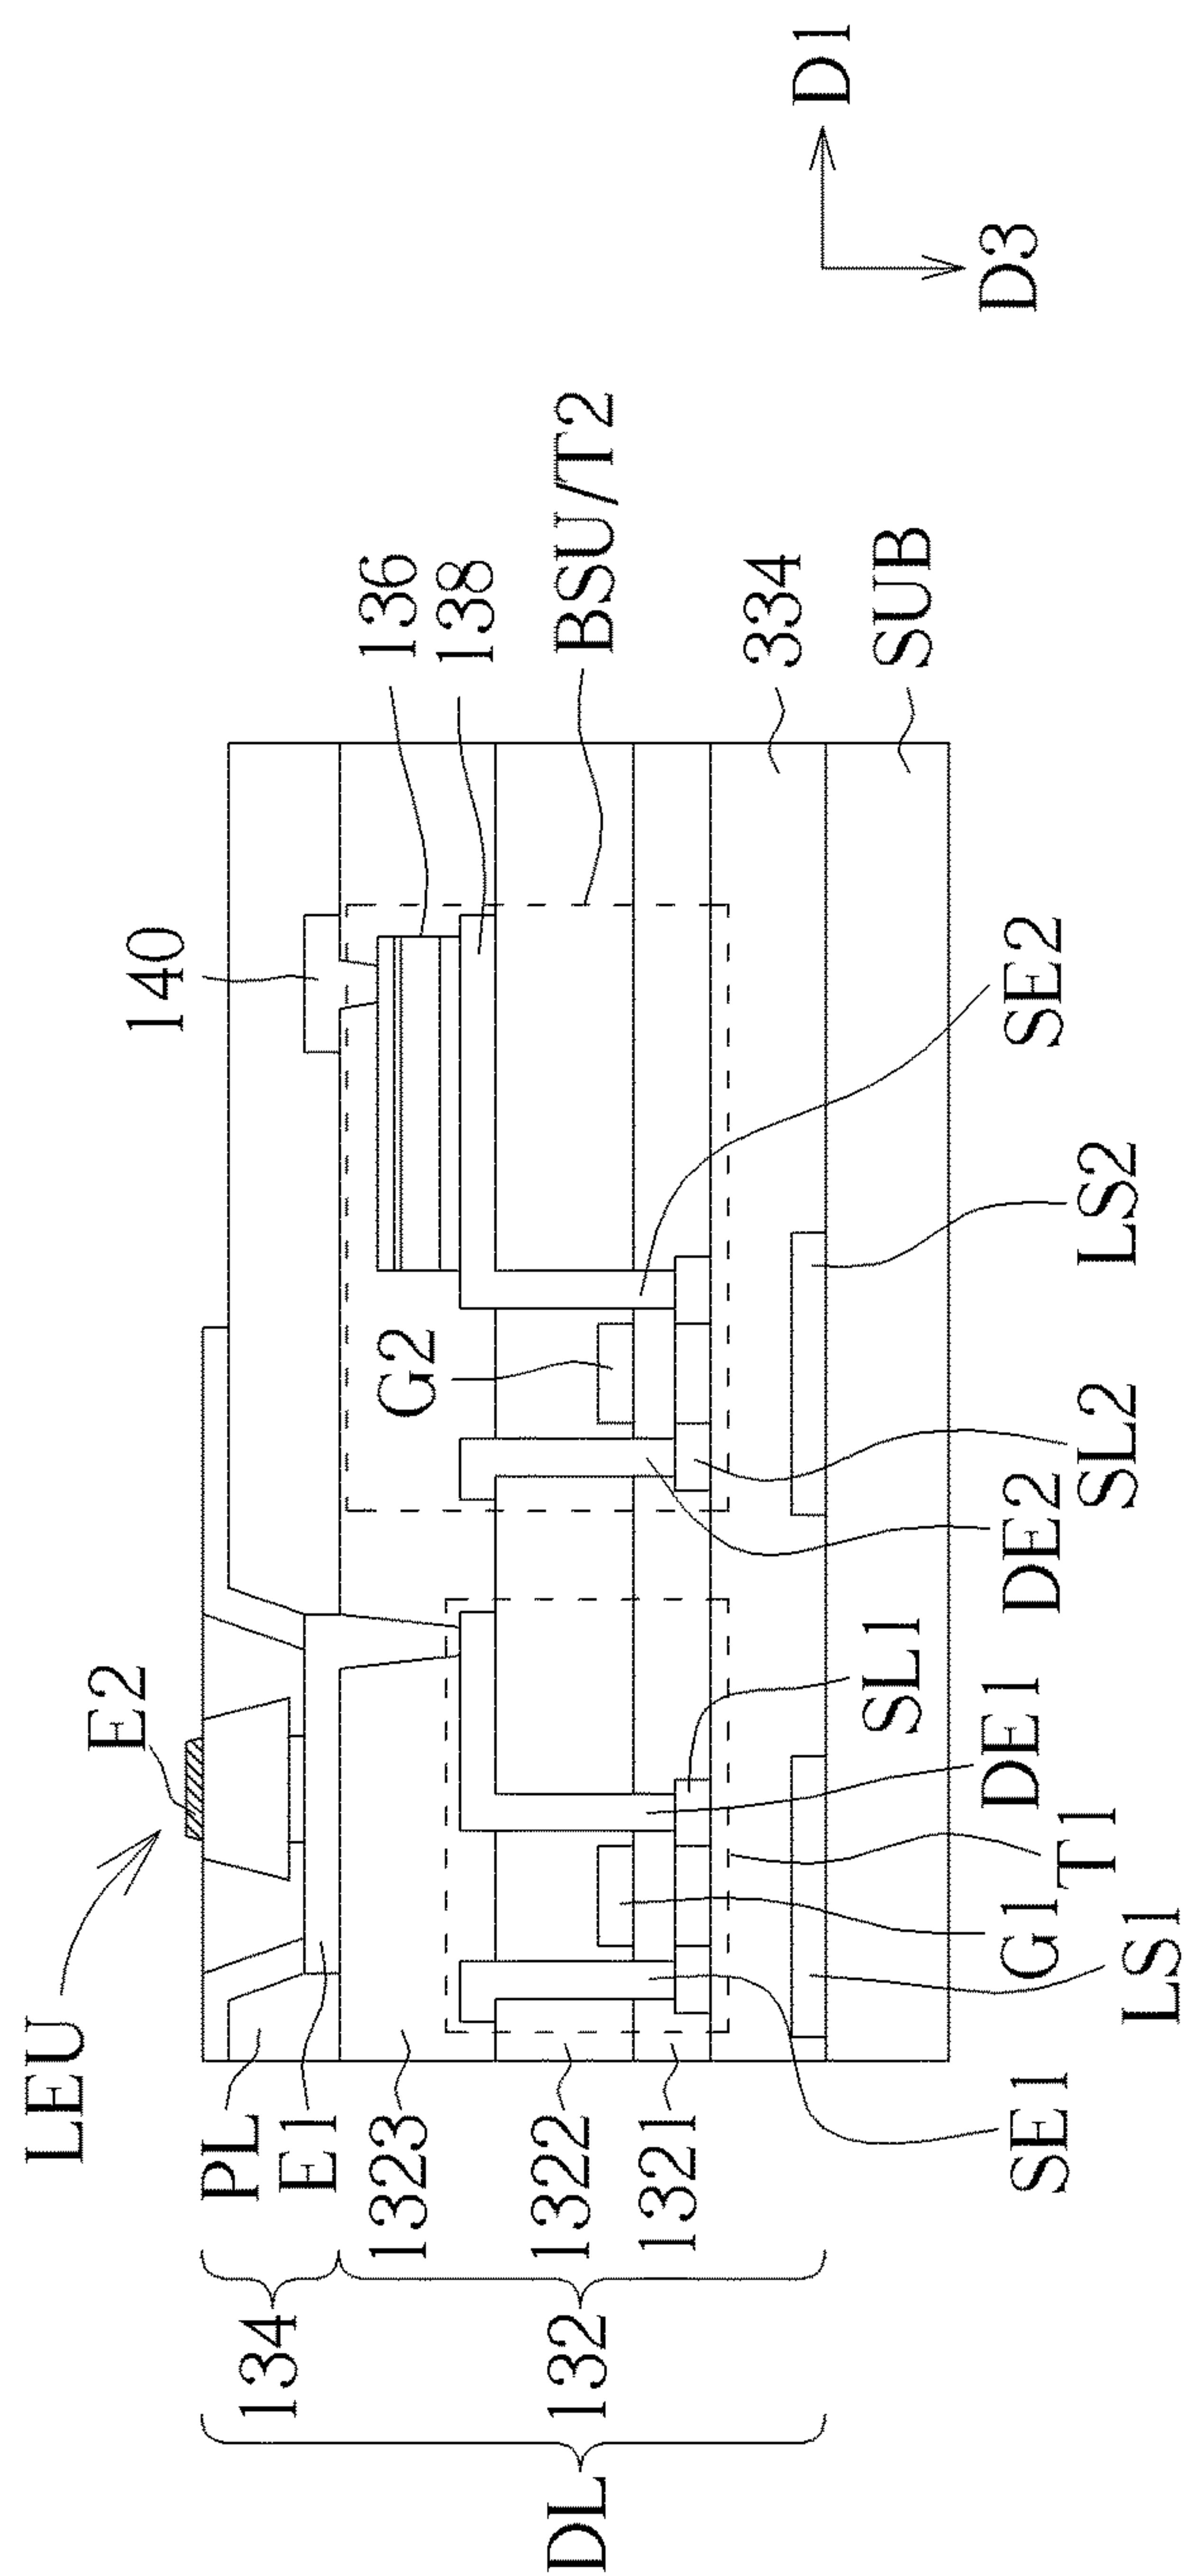


FIG. 13

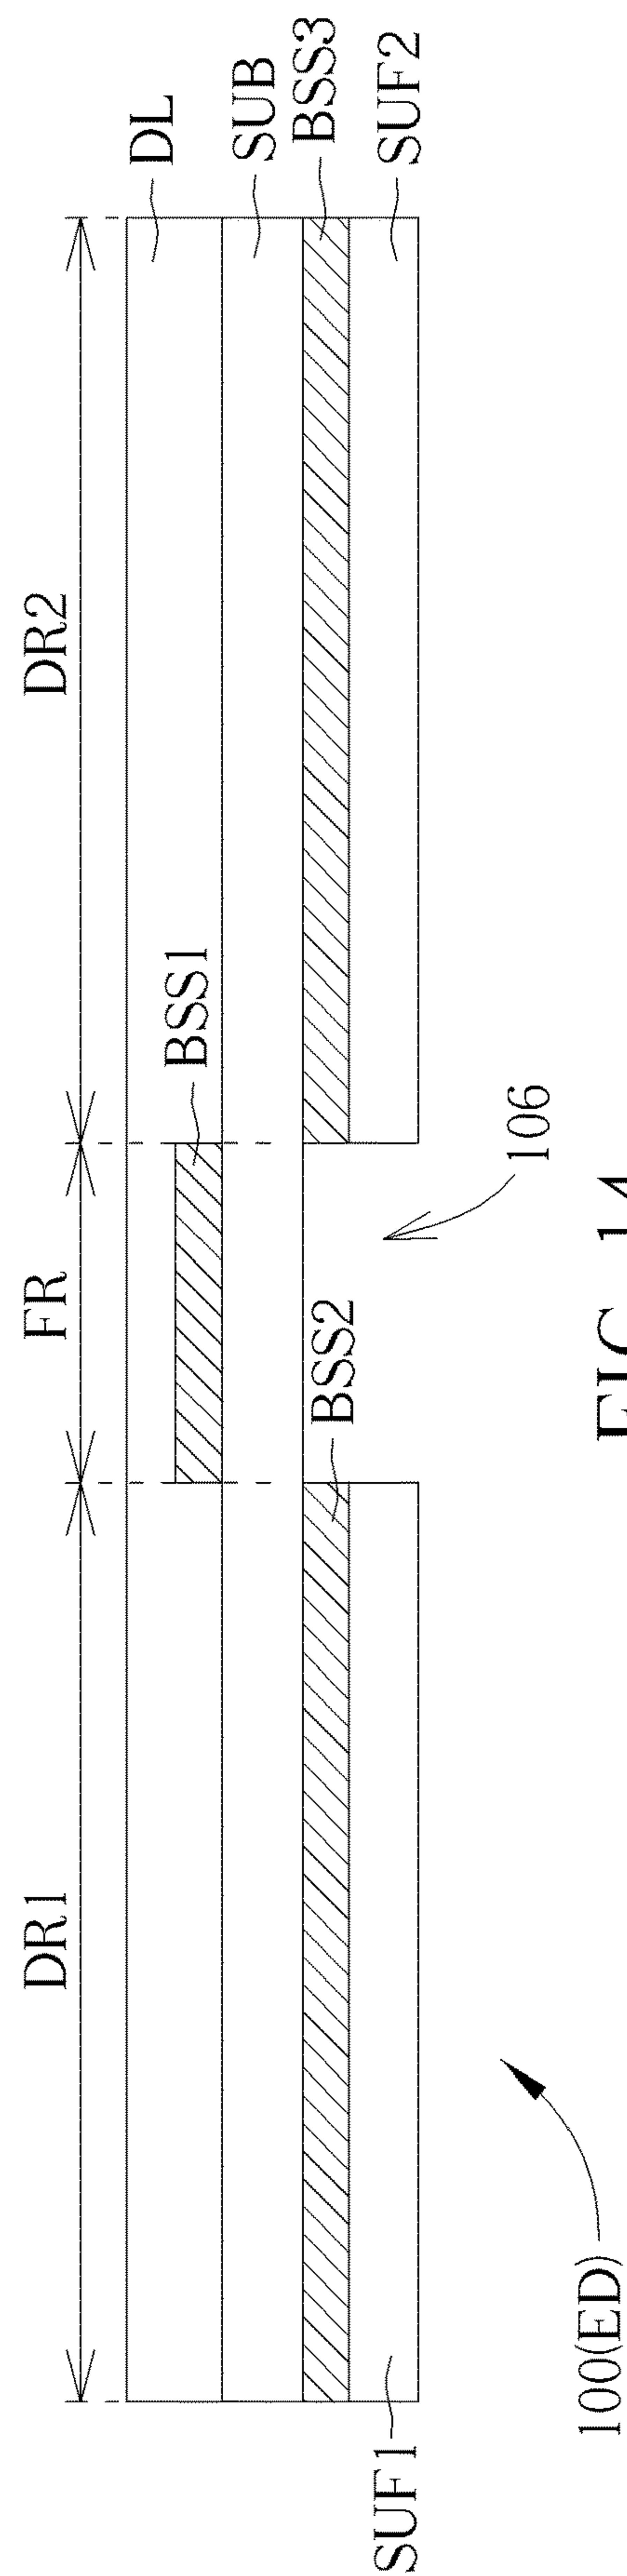


FIG. 14

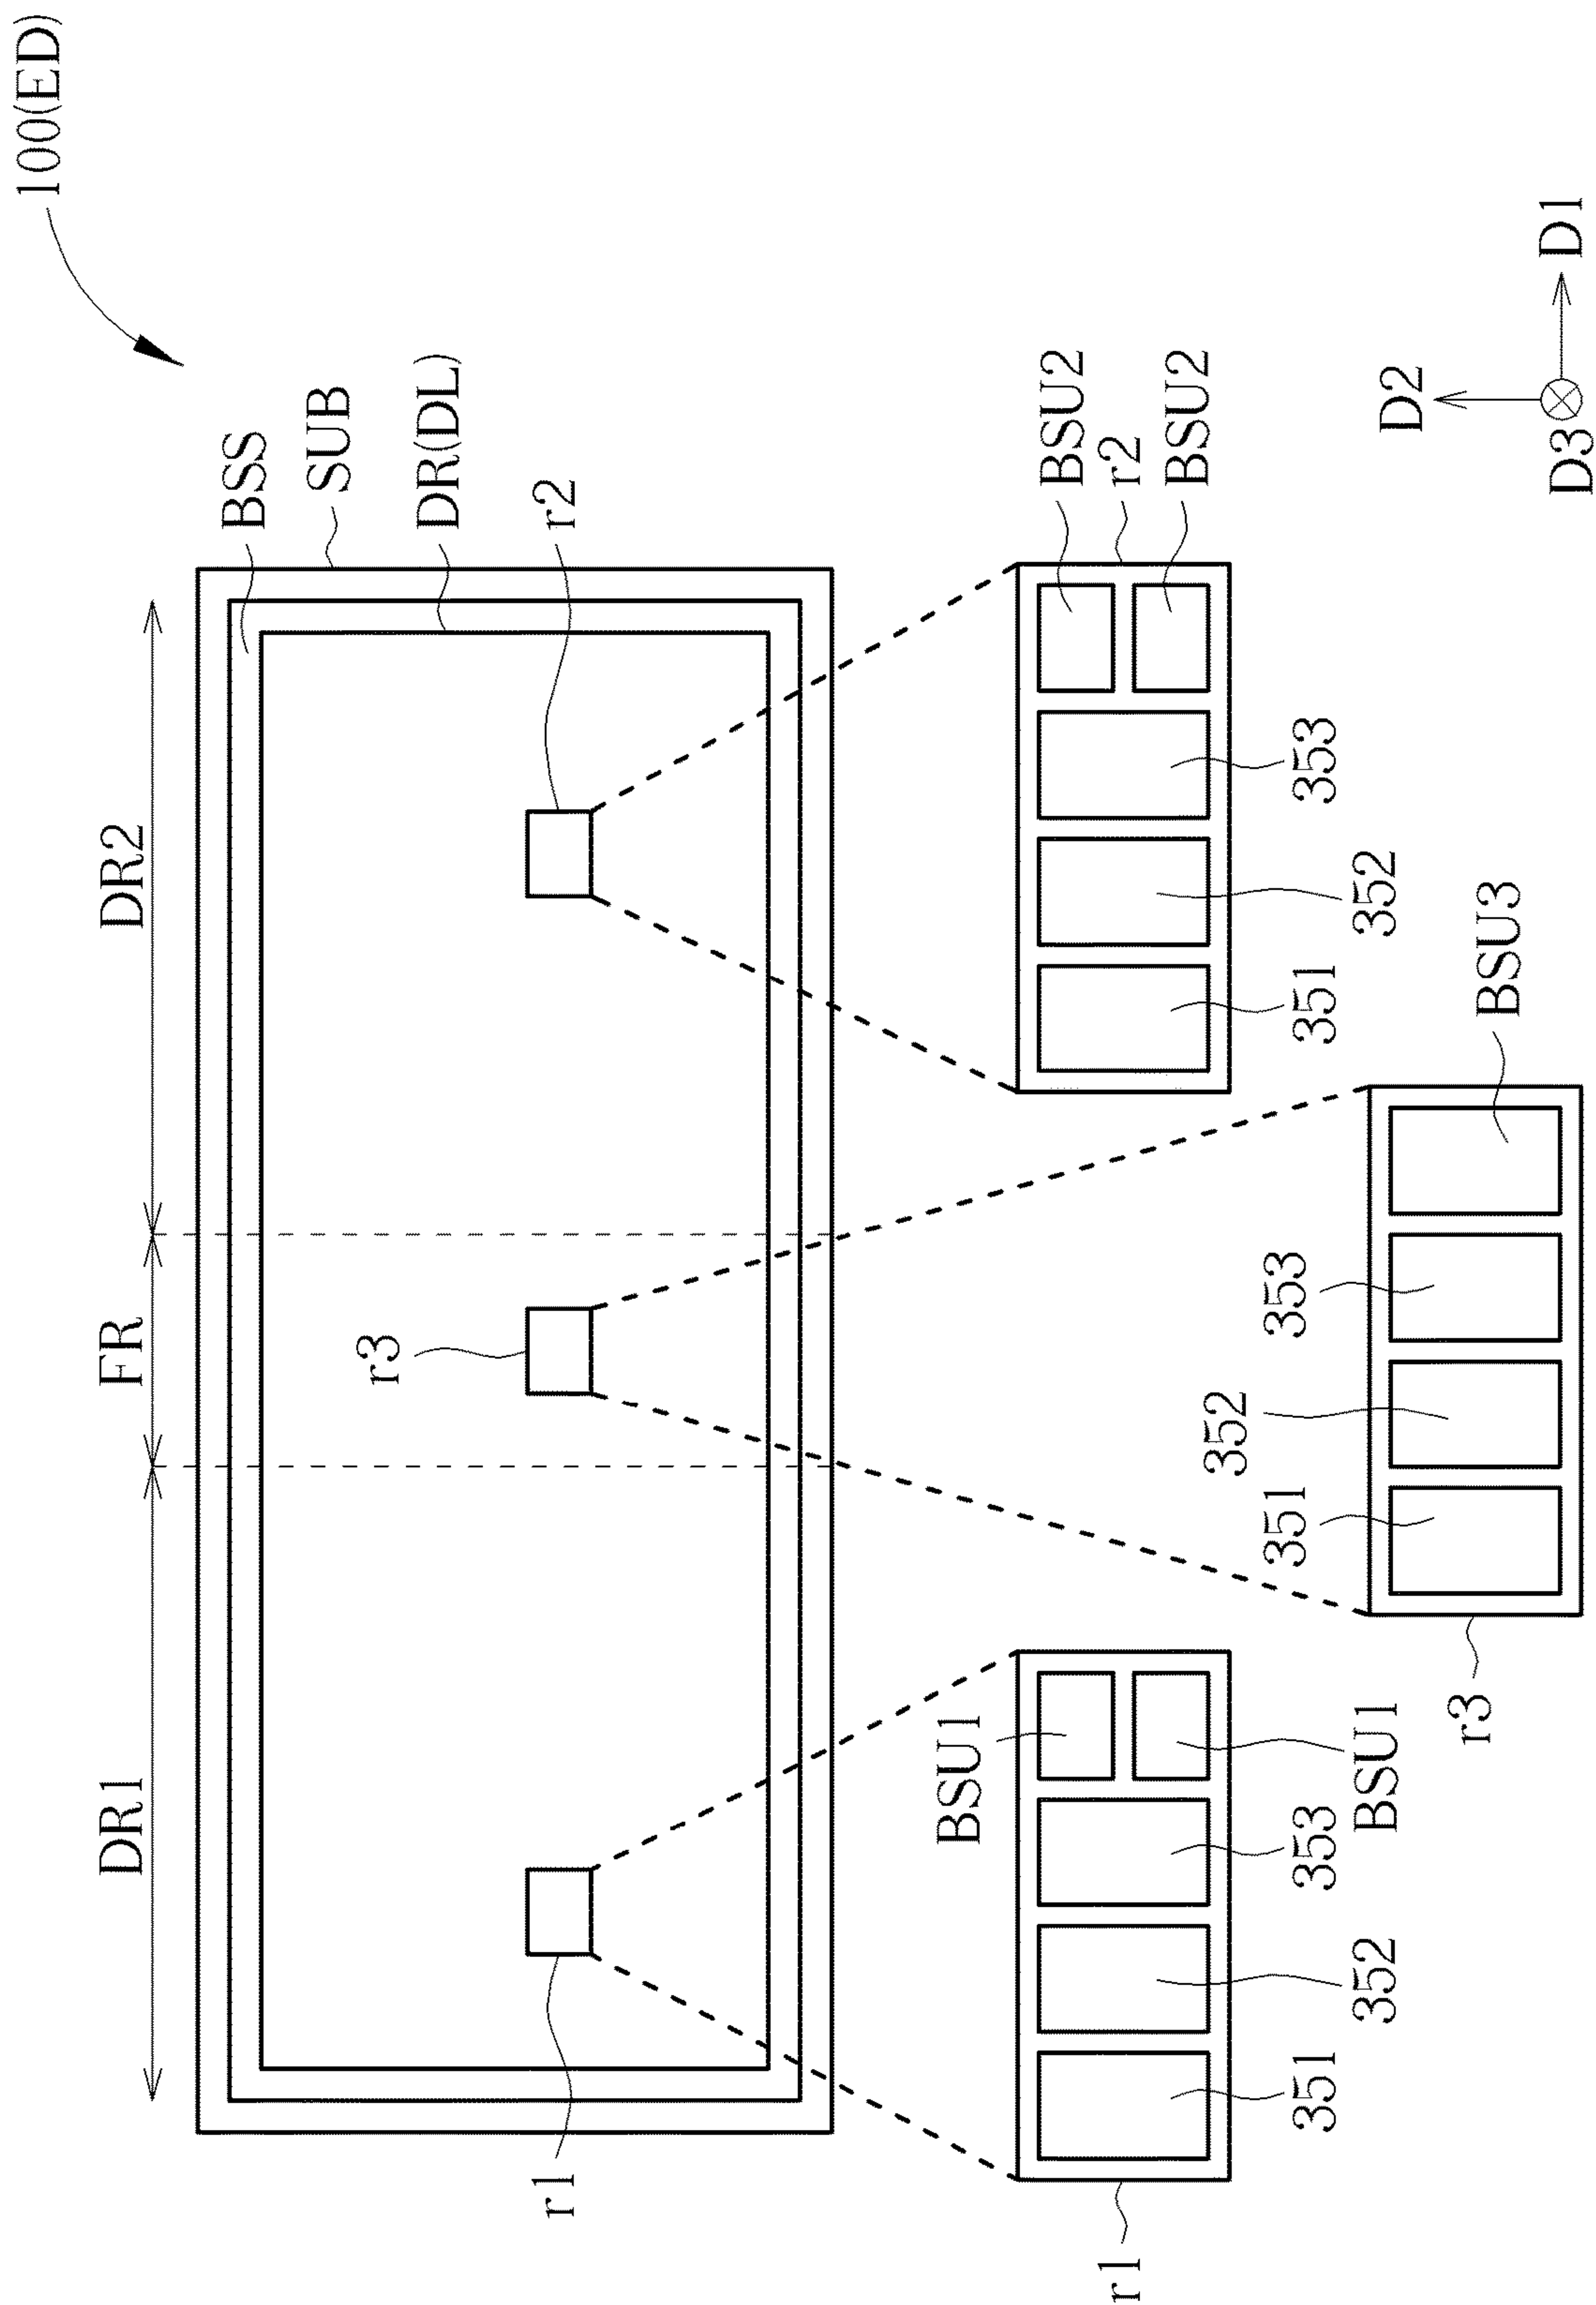


FIG. 15

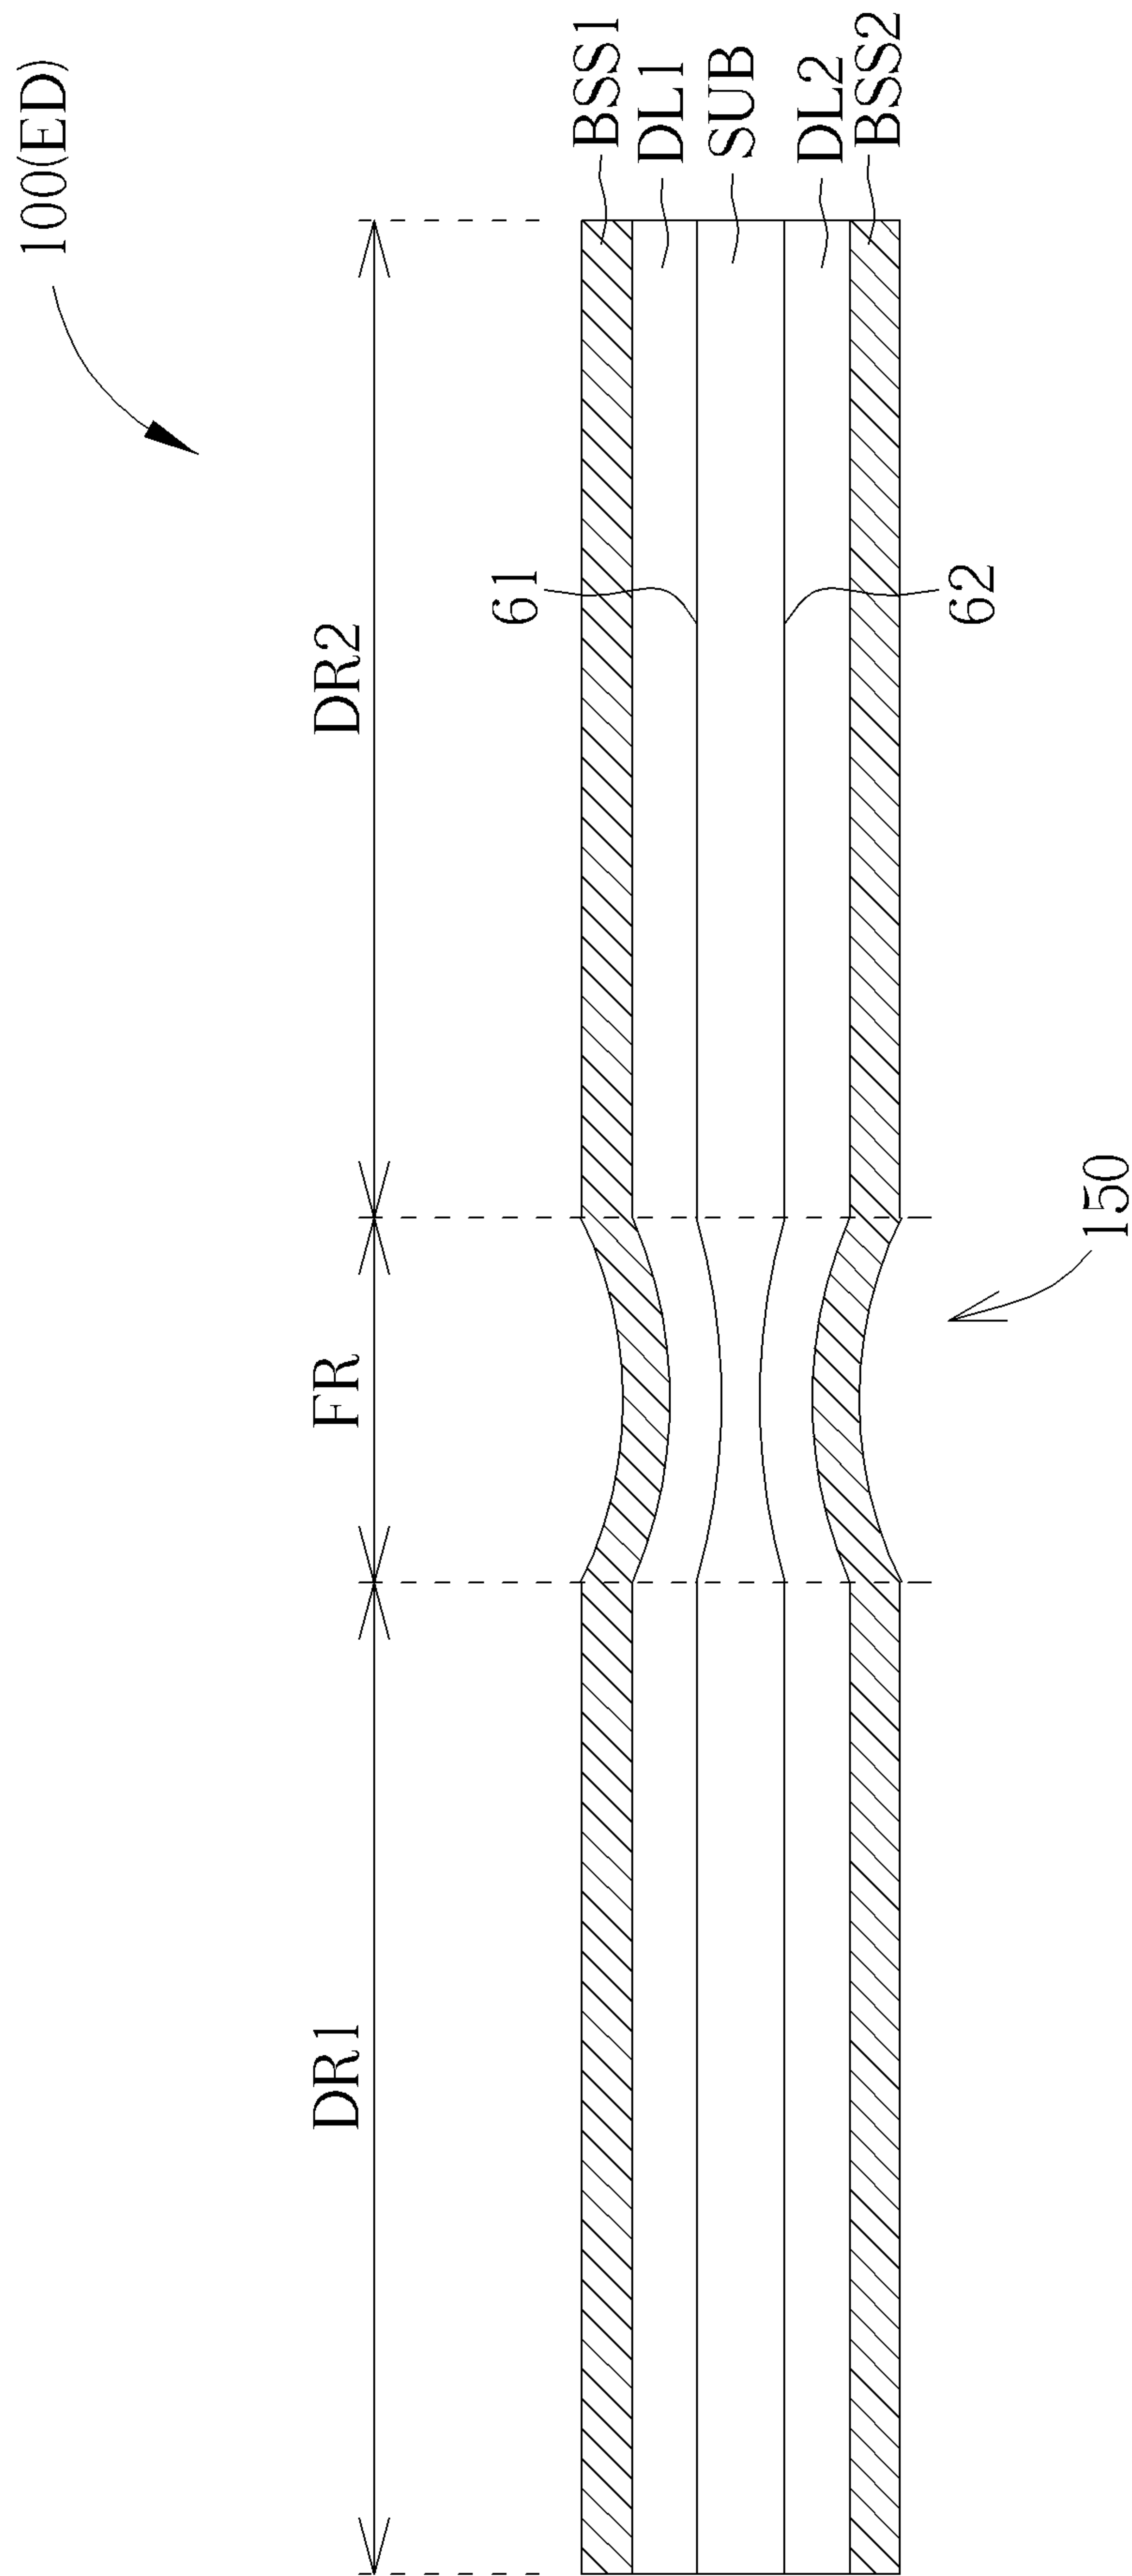


FIG. 16

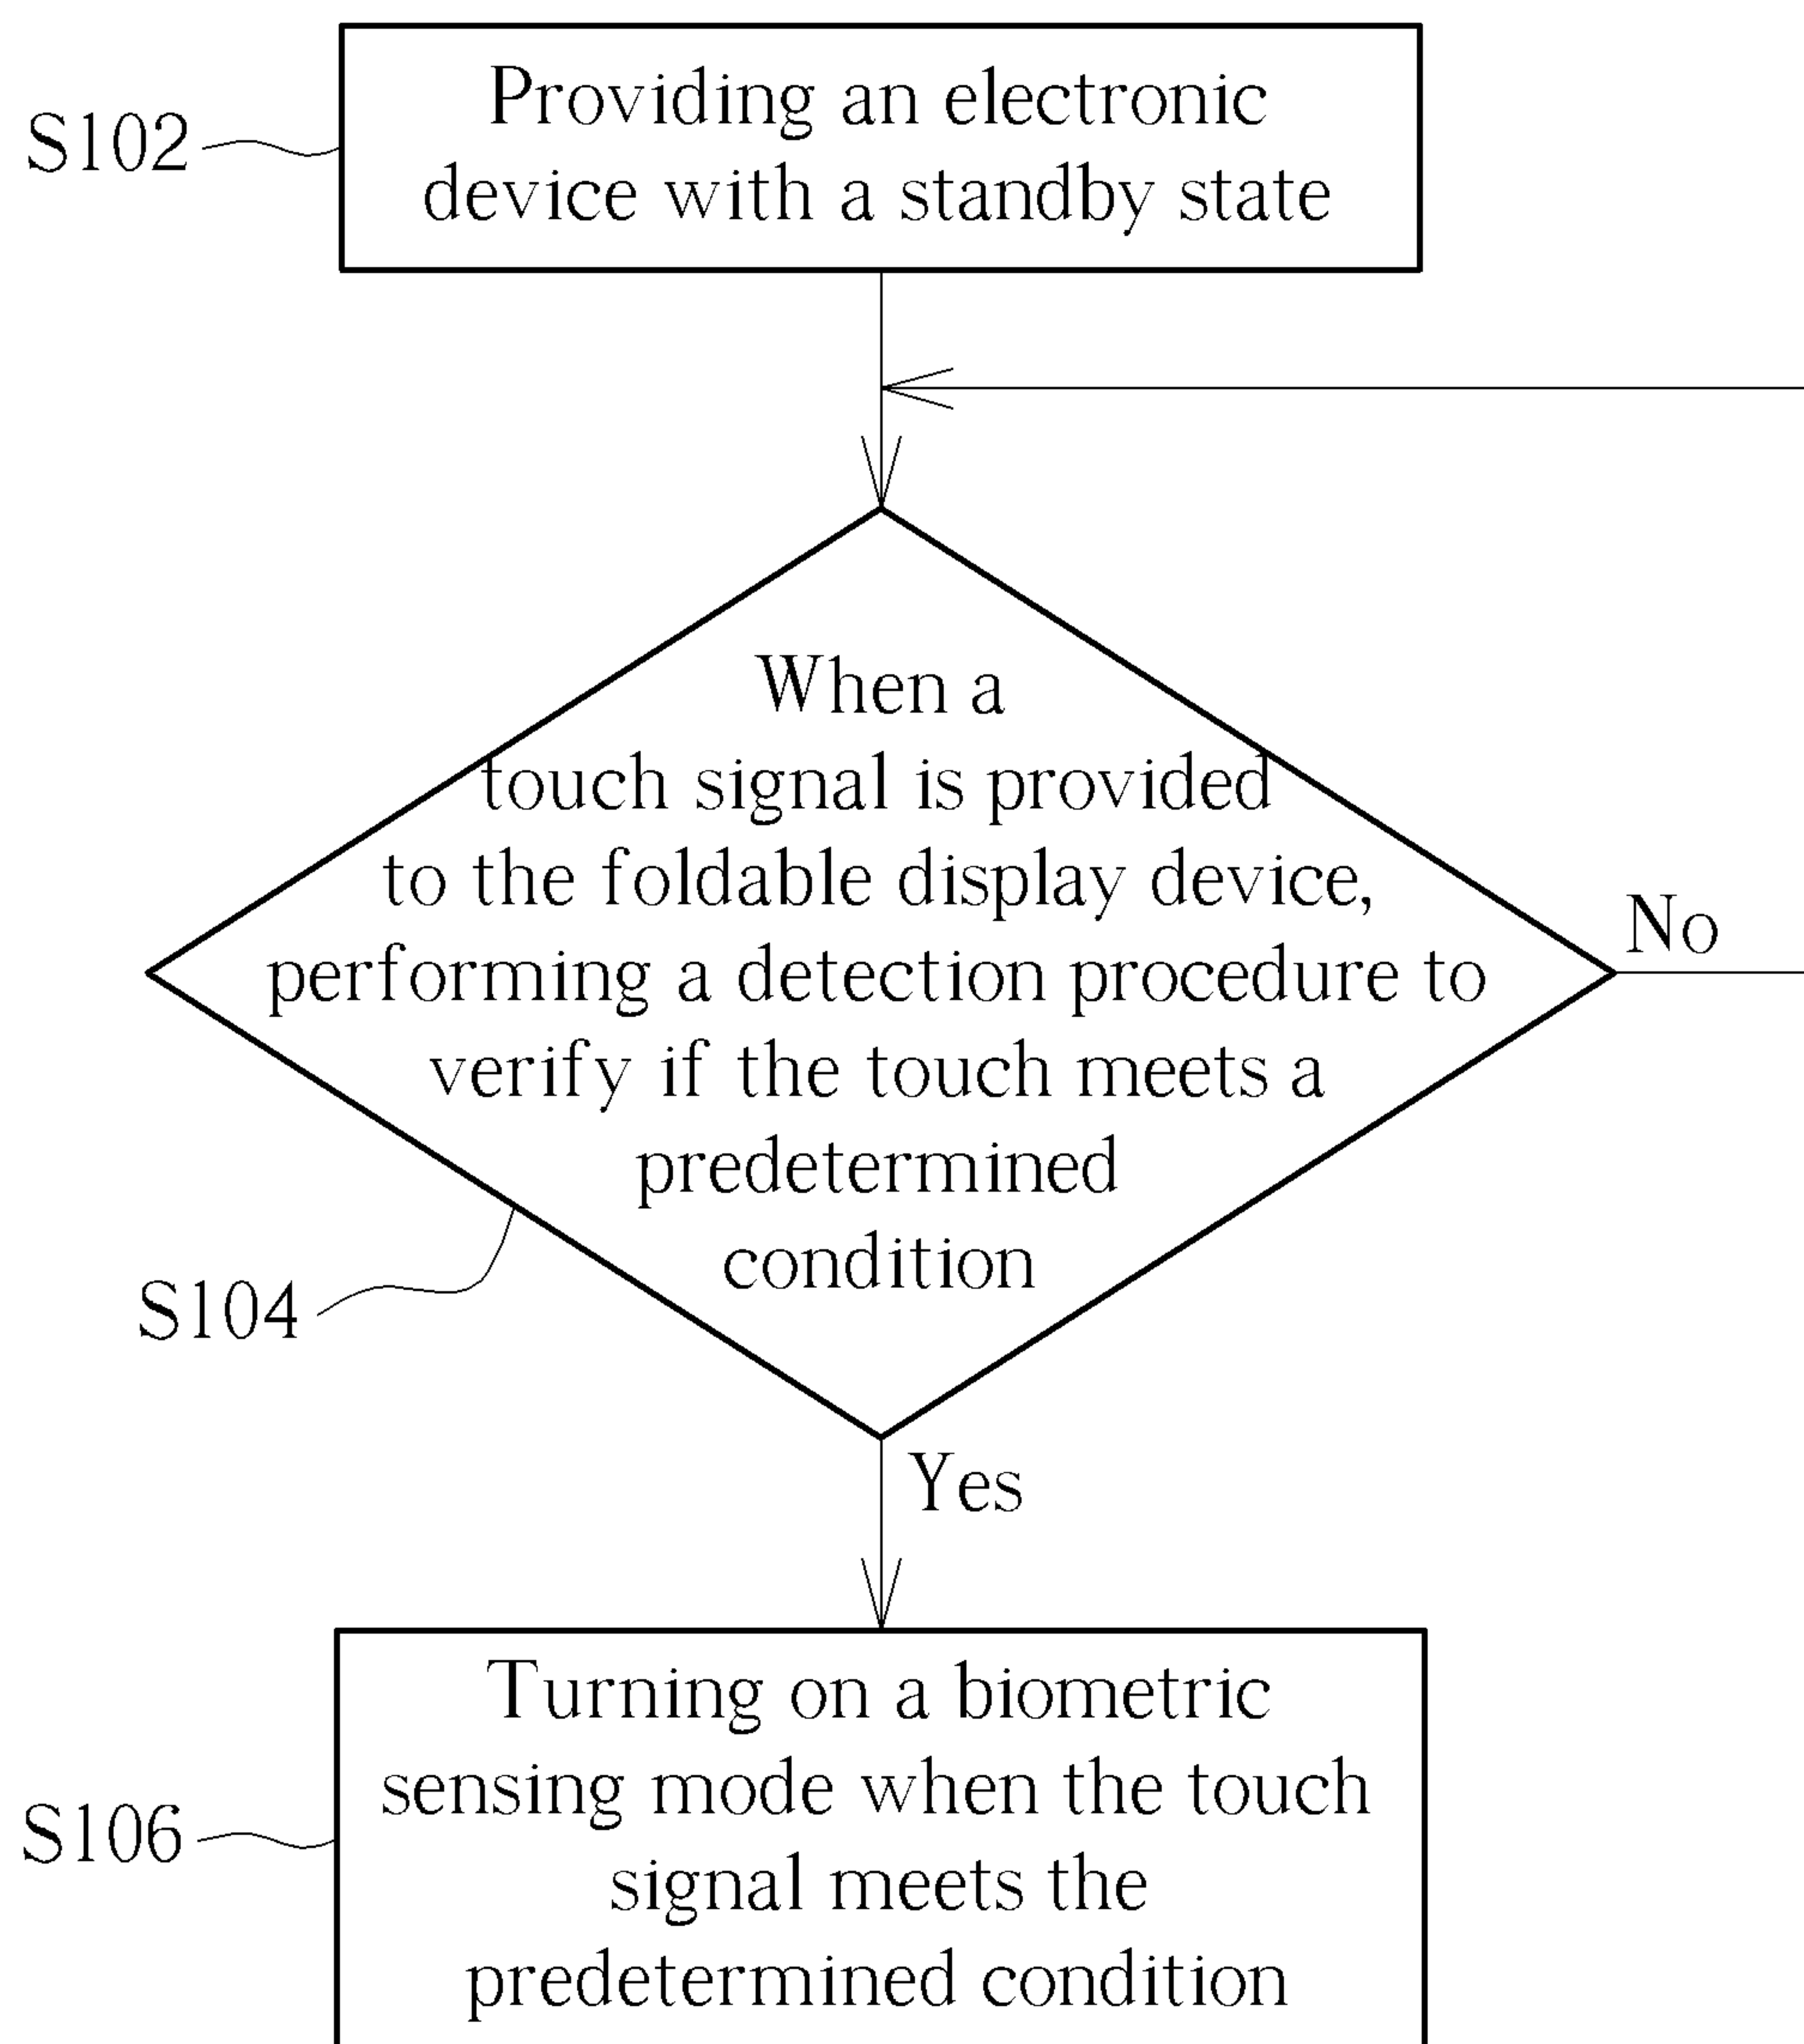


FIG. 17

1

FOLDABLE DISPLAY DEVICE AND OPERATION METHOD OF ELECTRONIC DEVICE

BACKGROUND OF THE DISCLOSURE

1. Field of the Disclosure

The present disclosure is related to a foldable display device and an operation method of related electronic device, and more particular to a foldable display device including a biometric sensing structure and related electronic device.

2. Description of the Prior Art

In recent years, foldable electronic device has become one of next generation technologies. The foldable electronic device offers portability when in a folded state and expands into a relatively large sized display when in an unfolded state, and accordingly, the foldable electronic device may have various applications in electronic displays used in televisions, monitors, mobile computing devices, such as smartphones, tablet computers, mobile personal computers (PCs), and electronic book readers, and wearable devices, such as smart watches. For this reason, the foldable electronic device may store a lot of information including personal private information. For securing the private information, biometric recognition is developed. However, in the conventional technique, only a small amount of biometric sensors may be integrated in the electronic device, and therefore the sensing area is limited and may be restricted within a small certain region. The limited amount and/or disposition area of the biometric sensor restricts the use and the security application in the conventional foldable electronic devices. As a result, the protection of information with different security level stored in the electronic device is limited, and to increase access restriction approach is still in need.

SUMMARY OF THE DISCLOSURE

One of the objectives of the present disclosure is to provide a foldable display device and related operation method, wherein the foldable display device includes a biometric sensing structure.

In one embodiment, the present disclosure provides a foldable display device including a first display region, a second display region, and a foldable region connecting the first display region and the second display region. The foldable display device includes a flexible substrate, a display layer disposed on the flexible substrate, and a biometric sensing structure disposed in the first display region, the second display region, and the foldable region. The biometric sensing structure has a biometric sensing region. A ratio of an area of the biometric sensing region to an area of the flexible substrate is in a range from 0.6 to 1.

In one embodiment, the present disclosure provides a foldable electronic device including a first region, a second region, and a foldable region connecting the first region and the second region. The foldable electronic device includes a flexible substrate, an electronic layer disposed on the flexible substrate, and a biometric sensing structure disposed in the first region, the second region, and the foldable region. The biometric sensing structure has a biometric sensing region BR. A ratio of an area of the biometric sensing region to an area of the flexible substrate is in a range from 0.6 to 1.

2

In one embodiment, the present disclosure provides an operation method of the electronic device which includes following steps: (a) providing an electronic device with a standby state, wherein the electronic device comprises a foldable display device including a flexible substrate, a display layer disposed on the flexible substrate, and a biometric sensing structure disposed on the flexible substrate; (b) when a touch signal is provided to the foldable display device, performing a detection procedure to verify if the touch meets a predetermined condition; and (c) turning on a biometric sensing mode when the touch signal meets the predetermined condition. A ratio of an area of a biometric sensing region of the biometric sensing structure to an area of the flexible substrate is in a range from 0.6 to 1.

These and other objectives of the present disclosure will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a top view of an electronic device according to a first embodiment of the present disclosure.

FIG. 2 is a schematic diagram of a sectional view of the electronic device shown in FIG. 1.

FIG. 3 is a schematic diagram of a sectional view with more details of the electronic device shown in FIG. 1.

FIG. 4 is a partial-enlargement schematic diagram of a sectional view of the electronic device shown in FIG. 1.

FIG. 5 is a schematic diagram illustrating the biometric sensing region of the electronic device shown in FIG. 1.

FIG. 6 is a schematic diagram of a top view of an electronic device according to a first embodiment of the present disclosure.

FIG. 7 is a schematic diagram of a top view of an electronic device according to a second embodiment of the present disclosure.

FIG. 8 is a schematic diagram of a sectional view of the electronic device shown in FIG. 7.

FIG. 9 is a schematic diagram of a sectional view of an electronic device according to a third embodiment of the present disclosure.

FIG. 10 is a schematic diagram of a top view of the electronic device shown in FIG. 9.

FIG. 11 is a schematic diagram of a sectional view of the electronic device shown in FIG. 10 with more detailed elements and partial enlarged illustration.

FIG. 12 is a schematic diagram of a top view of the electronic device according to a first variant embodiment of the third embodiment of the present disclosure.

FIG. 13 is a schematic diagram of a partial enlarged sectional view of the electronic device according to a second variant embodiment of the third embodiment of the present disclosure.

FIG. 14 is a schematic diagram of a sectional view of an electronic device according to a fourth embodiment of the present disclosure.

FIG. 15 is a schematic diagram of a top view of an electronic device according to a fifth embodiment of the present device.

FIG. 16 is a schematic diagram of a sectional view of an electronic device according to a sixth embodiment of the present disclosure.

FIG. 17 is a flow chart of an operation method of an electronic device according to a seventh embodiment of the present disclosure.

DETAILED DESCRIPTION

The present disclosure may be understood by reference to the following detailed description, taken in conjunction with the drawings as described below. It is noted that, for purposes of illustrative clarity and being easily understood by the readers, various drawings of this disclosure show a portion of the display device, and certain elements in various drawings may not be drawn to scale. In addition, the number and dimension of each device shown in drawings are only illustrative and are not intended to limit the scope of the present disclosure.

Certain terms are used throughout the description and following claims to refer to particular components. As one skilled in the art will understand, electronic equipment manufacturers may refer to a component by different names. This document does not intend to distinguish between components that differ in name but not function. In the following description and in the claims, the terms “include”, “comprise” and “have” are used in an open-ended fashion, and thus should be interpreted to mean “include, but not limited to . . .”.

It will be understood that when an element or layer is referred to as being “on” or “connected to” another element or layer, it can be directly on or directly connected to the other element or layer, or intervening elements or layers may be presented. In contrast, when an element is referred to as being “directly on” or “directly connected to” another element or layer, there are no intervening elements or layers presented.

It should be noted that the technical features in different embodiments described in the following can be replaced, recombined, or mixed with one another to constitute another embodiment without departing from the spirit of the present disclosure.

Referring to FIG. 1 to FIG. 6, FIG. 1 is a schematic diagram of a top view of an electronic device according to a first embodiment of the present disclosure, FIG. 2 is a schematic diagram of a sectional view of the electronic device shown in FIG. 1, FIG. 3 is a schematic diagram of a sectional view with more details of the electronic device shown in FIG. 1, FIG. 4 is a partial-enlargement schematic diagram of a sectional view of the electronic device shown in FIG. 1, FIG. 5 is a schematic diagram illustrating the biometric sensing region of the electronic device shown in FIG. 1, and FIG. 6 is a schematic diagram of a top view of the electronic device according to the first embodiment of the present disclosure, which shows the arrangement of the display units and the biometric sensing structure.

As shown in FIG. 1 and FIG. 2, the electronic device ED of the present disclosure can be a foldable electronic device ED, which can be folded along a folding axis FX between 180° to -180°. For example, the foldable electronic device ED in FIG. 2 shows the inwardly folding state and the folding angle is 180°. The foldable electronic device ED includes a first flat region FL1, a second flat region FL2, and a foldable region FR connecting the first flat region FL1 and the second flat region FL2. The foldable electronic device ED in the foldable region FR is capable of being curved, bent, and/or folded. In some embodiments, the foldable electronic device ED can include more than one foldable region FR. In addition, the electronic device ED can be divided into an active region AR and a non-active region NR

adjacent to, for example, surrounding the active region AR. The active region AR can include a first active region AR1 in the first flat region FL1, a second active region AR2 in the second flat region FL2, and the foldable region FR.

Referring to FIG. 2, the foldable electronic device ED of the present disclosure can include a flexible substrate SUB, and an electronic layer 190 disposed on the flexible substrate SUB. According to some embodiments, the electronic layer 190 can be a display layer DL. According to some embodiments, the electronic layer 190 can have no display function; for example, can include an antenna, for example a liquid crystal antenna. In such situation, the electronic layer 190 may include a medium layer and a circuit layer. The medium layer can be a liquid crystal layer or other suitable medium materials, the circuit layer can be fabricated by thin film processes, and can optionally include switches (ex. TFTs), and thus the foldable electronic device ED can be a foldable antenna, for example a foldable liquid crystal antenna. For example, the electronic layer 190 can include a plurality of antenna units disposed in the active region. Electromagnetic wave can be emitted from or received by the antenna units.

The foldable electronic device ED has an outer surface OS, which includes a first surface part P1 defining the first flat region FL1, a second surface part P2 defining the second flat region FL2, and a third surface part P3 defining the foldable region FR. When the foldable electronic device ED is expanded to an unfolded state, the first surface part P1, the second surface part P2 and the third surface part P3 are in level with the same plane. When the foldable electronic device ED is folded to an folded state as shown in FIG. 2, the first surface part P1 is flat and in level with a plane PLN1, the second surface part P2 is flat and in level with another plane PLN2, and the third surface part P3 is bent and not in level with the above-mentioned planes. Accordingly, when the foldable electronic device ED is at the folded state, the third surface part P3 can be defined between the plane PLN1 and the plane PLN2. In detail, a first boundary B1 is defined at a position departing away from the first surface part P1, and a second boundary B2 is defined at a position departing away from the second surface part P2. In other words, the foldable region FR can be defined by a region between the first boundary B1 and the second boundary B2.

According to some embodiments, the electronic layer 190 can be a display layer DL. For easy explanation, some examples are taken when the foldable electronic device ED is the foldable display device 100 in the following embodiments when the electronic layer 190 is a display layer DL. The display layer DL can be disposed in a display region DR and include a plurality of display units. For example, as shown in FIG. 4, the display units 300 can be OLED units. Thus, the foldable electronic device ED is a foldable display device 100, and the active region AR is the display region DR. Referring to FIG. 1, thus, the display region DR can include a first display region DR1 located in the first flat region FL1, a second display region DR2 located in the second flat region FL2, and the foldable region FR. The foldable region FR connects the first display region DR1 and the second display region DR2. FIG. 1 shows the top view when the foldable display device 100 is turned on and display image. The display region DR can be defined by connecting outer sides of the outmost display units 300, for example, by connecting outer sides of the light emitting regions of outmost display units 300. In some embodiments, as shown in FIG. 1, the display units 300 can be disposed in the foldable region FR. Alternatively, in some embodiments, none of the display units 300 may be disposed in the foldable region FR.

5

The foldable display device **100** can include a flexible substrate **SUB**, a display layer **DL** disposed on the flexible substrate **SUB**, and a biometric sensing structure **BSS** (shown in FIG. **3** and FIG. **4**, but omitted in FIG. **1** and FIG. **2**) disposed in the first display region **DR1**, the second display region **DR2**, and the foldable region **FR**. The biometric sensing structure **BSS** can include a capacitive-type sensing structure, an optical-type sensing structure, an ultrasonic type sensing structure, or a combination thereof.

The flexible substrate **SUB** may be a plastic substrate, for example, a polyimide (PI) substrate, a polycarbonate (PC) substrate or a polyethylene terephthalate (PET) substrate, but not limited thereto. The display layer **DL** can include multiple layers. According to some embodiments, the display layer **DL** can include signal lines, thin film transistors, display units, insulating layers and/or circuits, which can be used for controlling display image. Display units can include any suitable display elements, such as organic light emitting diodes (OLEDs), micro LEDs (light-emitting diodes), mini LEDs, quantum dot LEDs, or a liquid crystal layer. In some embodiments, the chip size of a mini-LED can be in a range from 100 μm to 300 μm . In an embodiment, the chip size of a micro-LED can be in a range from 1 μm to 100 μm .

FIG. **4** shows a detailed structure of the display layer **DL** and the biometric sensing structure **BSS**. The display layer **DL** may include a circuit layer **132** and a light emitting structure **134** disposed on the circuit layer **132**. The light emitting structure **134** can include a plurality of display units **300**. The circuit layer **132** may include driving elements and/or switch elements for driving the display units **300**. For example, the circuit layer **132** includes a plurality of driving elements (such as thin film transistors, TFT) electrically connected to and driving the corresponding display units **300**. The thin film transistor used for driving the display units **300** are represented as driving TFT **T1** hereinafter. Each driving TFT **T1** may include a source electrode **SE1**, a drain electrode **DE1**, a gate electrode **G1**, and a semiconductor layer **SL1** and may be electrically connected to the bottom electrode of the corresponding display unit **300**. The display units **300** can be organic light-emitting diode (OLED) in this embodiment.

For example, as shown in FIG. **4**, one display unit **300** can include a first electrode **301** (which may serve as the bottom electrode electrically connected to the thin film transistor), a second electrode **302** (which may serve as the top electrode), and a light emitting layer **310** disposed between the first electrode **301** and the second electrode **302**. The first electrode **301** may be an anode and the second electrode **302** may be a cathode, but not limited thereto. The light emitting region of each display unit **300** can be defined by a dielectric layer **320**, which may serve as a pixel defining layer (PDL). The light emitting layer **310** may include one or more layers of emissive material, and can be organic material. Different display units **300** can emit lights with different colors, such as red, green and blue colors. For example, the light emitting layer **310** indifferent display units **300** can be made of different materials for emitting light of red, green, and blue. The first electrode **301** and the second electrode **302** may include metal or transparent conductive material, but not limited thereto. Examples of the metal material of the electrodes may include Mg, Ca, Al, Ag, W, Cu, Ni, Cr, or an alloy of one or more of the above-mentioned material. Examples of the transparent conductive material may include indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide, or indium oxide.

The biometric sensing structure **BSS** can detect or identify the biometric characteristics, such as fingerprint, palm print,

6

face feature, or iris feature, but not limited thereto. As an example, the biometric sensing structure **BSS** can detect fingerprint in this embodiment. Referring to FIG. **4**, the biometric sensing structure **BSS** of this embodiment is a capacitive-type sensing structure and is disposed on the display layer **DL**. In other words, the display layer **DL** is disposed between the biometric sensing structure **BSS** and the flexible substrate **SUB** in this embodiment. The capacitive-type biometric sensing structure **BSS** may include a first conductive layer **102**, a second conductive layer **104** disposed on the first conductive layer **102**, and a dielectric layer **108** disposed between the first conductive layer **102** and the second conductive layer **104**. Another dielectric layer or a protection layer **110** may cover the second conductive layer **104**. Referring to FIG. **4** and FIG. **6**, in which FIG. **4** shows a sectional view along the cross-line 4-4' shown in FIG. **6**, the first conductive layer **102** includes a plurality of first conductive lines **102L** extending along a direction **D1** parallel to the surface of the flexible substrate **SUB**, and the second conductive layer **104** includes a plurality of second conductive lines **104L** extending along another direction **D2** parallel to the surface of the flexible substrate **SUB**. The direction **D1** and the direction **D2** can be different, and can be perpendicular. The direction **D1** may be perpendicular to the folding axis **FX**, and the direction **D2** may be parallel to the folding axis **FX**. In some embodiments, the first conductive lines **102L** and the second conductive lines **104L** can be in a linear shape (as shown in FIG. **6**). In some embodiments, the first conductive lines **102L** and the second conductive lines **104L** can be in a non-linear shape, for example, a wavy shape or a zigzag shape, or can include a curved shape. Thus, the plurality of first conductive lines **102L** and the plurality of second conductive lines **104L** intersect each other to form a plurality of sensing units **BSU**. The biometric sensing structure **BSS** includes a plurality of sensing units **BSU**, which is formed at the overlapping portion of the first conductive lines **102L** and the second conductive lines **104L**. In other words, one sensing unit **BSU** is defined by an overlapping portion of one first conductive line **102L** and one second conductive line **104L**, together with the dielectric layer **108** corresponding to the overlapping portion. In this embodiment, the sensing units **BSU** may be disposed between two display units **300** respectively and do not cover the light-emitting region of the display units **300**.

Referring to FIG. **3**, the biometric sensing structure **BSS** has a biometric sensing region **BR**, and a first ratio of an area of the biometric sensing region **BR** to an area of the flexible substrate **SUB** is in a range from 0.6 to 1. Since the display region **DR** is smaller than the flexible substrate **SUB**, a second ratio of an area of the biometric sensing region **BR** to an area of the display region **DR** may be greater than the first ratio and may be greater than 0.6 or even greater than 1. In some embodiments, the area of the display region **DR** is smaller than the area of the biometric sensing region **BR**, as shown in FIG. **3**. A minimum distance **d1** between the boundary of the display region **DR** of the display layer **DL** and an edge **SW1** of the flexible substrate **SUB** is greater than a minimum distance **d2** between the boundary of the biometric sensing structure **BSS** and the edge **SW1** of the flexible substrate **SUB**. The first display region **DR1**, the foldable region **FR**, and the second display region **DR2** may be total covered by the biometric sensing region **BR**. The above-mentioned range of the first ratio of the area of the biometric sensing region **BR** to the area of the flexible substrate **SUB** may also be applied to other embodiments and variant embodiments of the present disclosure, which will not be redundantly repeated. According to the present

disclosure, the biometric sensing region BR of the biometric sensing structure BSS occupies a relatively large area of the foldable display device **100**, thus improving the function of biometric sensing. The sensing area is not limited in a small area of the foldable display device **100**. Therefore, to perform the biometric sensing by the foldable display device **100** of the present disclosure may be more convenient. The types of performing the biometric sensing may be various. According to some other embodiments, at least a portion of the biometric sensing region BR extends to the display region DR. For example, at the edge SW1, a portion of the biometric sensing region BR may protrude from a portion of the display region DR, but at another edge, a portion of the biometric sensing region BR may not protrude from a portion of display region DR. In other words, the distance between the boundary of the display region DR and the edge of the flexible substrate SUB may be greater than, equal to, or smaller than the distance between the boundary of the biometric sensing structure BSS and the edge of the flexible substrate SUB in different parts of the foldable display device **100**. Thus, not all of the display region DR overlaps the biometric sensing region BR.

In detail, the measurement method of the area of the biometric sensing region BR may include the following steps. As shown in FIG. 5, first, an object with imitating-fingerprint characteristic or with fingerprint characteristic can be used to touch the foldable display device **100** with multiple times, such that multiple sensing result patterns may occur on the foldable display device **100**. Some of these multiple sensing result patterns may be correct sensing results, such as the sensing result patterns FA, FB, FC, FD, FE, FF. Some other multiple sensing result patterns may be failed or incorrect sensing results, such as the sensing result patterns Fa, Fb, Fc, Fd. Second, an identify procedure is carried out to find out and determine the correct sensing result patterns FA, FB, FC, FD, FE, FF. Third, the biometric sensing region BR can be defined by the largest area enclosed by the connection lines CNL between the center points CP of the correct sensing result patterns FA, FB, FC, FD, FE, FF. If the defined boundary of the biometric sensing region BR from the third step is irregular, it is suggested to find out at least one correct sensing result per centimeter (cm) so as to define one center point CP per centimeter, in order to obtain the connection lines CNL and define the more accurate boundary of the biometric sensing region BR. In other words, the maximum distances between two adjacent center points CP of the correct sensing result patterns FA, FB, FC, FD, FE, FF in the connection lines CNL is less than or equal to 1 cm.

In addition, referring to FIG. 3, the foldable display device **100** may further include a supporting film SUF disposed in the first display region DR1, the second display region DR2, and the foldable region FR. The supporting film SUF can be attached to (or adhered onto) the flexible substrate SUB and opposite to the display layer DL. The supporting film SUF may include one or more recess portion **106** in the foldable region FR. The design of the recess portion **106** of the supporting film SUF can improve the folding performance of the foldable display device **100**. In this embodiment, a ratio of an area of the biometric sensing region BR to a total area of the supporting film SUF is in a range from 1 to 1.5. The above-mentioned ratio of area can influence the sensing accuracy of the biometric sensing structure BSS. The supporting film SUF with the area meeting the above-mentioned range can provide a good supporting functionality to the biometric sensing structure BSS. If the area of the supporting film SUF is too small, it

may not provide enough support and then the sensing error of the biometric sensing structure BSS may be increased.

Further referring to FIG. 6, as mentioned above, one sensing unit BSU is formed at the overlapping portion of one of the first conductive lines **102L** and one of the second conductive lines **104L**. In this embodiment, a spacing S1 between two adjacent sensing units BSU of the plurality of sensing units BSU in the first display region DR1 or in the second display region DR2 is less than a spacing S2 between two adjacent sensing units BSU of the plurality of sensing units BSU in the foldable region FR. In other words, the distribution density of the sensing units BSU in the first display region DR1 or the second display region DR2 is greater than the distribution density of the sensing units BSU in the foldable region FR. The distribution density means the number of units (for example, sensing units) in a given area. Specifically, in a given area, the number of sensing units BSU in the first display region DR1 or the second display region DR2 is greater than the number of sensing units BSU in the foldable region FR. Specifically, in this embodiment, the distance between two adjacent second conductive lines **104L** in the first display region DR1 and the second display region DR2 is less than the distance between two adjacent second conductive lines **104L** in the foldable region FR, as shown in FIG. 6, such that the spacing between two adjacent sensing units BSU in the foldable region FR is greater. In some embodiments, the distance between two adjacent first conductive lines **102L** in the first display region DR1 and the second display region DR2 is less than the distance between two adjacent first conductive lines **102L** in the foldable region FR. In some embodiments, both the distance between two adjacent first conductive lines **102L** and the distance between two adjacent second conductive lines **104L** in the foldable region FR are greater than those in the first display region DR1 and the second display region DR2. In addition, the height (or thickness) of the conductive layers (**102**, **104**) in the first display region DR1 and in the second display region DR2 may be greater than that of the conductive layers in the foldable region FR. Taking the first conductive layer **102** as an example, the height H1 of the first conductive layer **102** (the first conductive line **102L**) disposed in the first display region DR1 is greater than the height H2 of the first conductive layer **102** (the first conductive line **102L**) disposed in the foldable region FR, as shown in the partial enlarged sectional views of the first conductive layer **102** in the lower part of FIG. 6 (layers between the flexible substrate SUB and the first conductive layer **102** are omitted for simplicity). For examples, the first conductive layer **102** may include a first layer **1021**, a second layer **1022** and a third layer **1023** to form a composite stacking layer, wherein the three layers may include Mo/Al/Mo or Ti/Al/Ti materials, but not limited thereto. In some embodiments, the first conductive lines **102L** and/or the second conductive lines **104L** can respectively include a plurality of openings. When the first conductive line **102L** includes multiple layers, the openings **102r** may penetrate through all of the multiple layers, or may penetrate through the topmost first or two layers to expose at least one lower layer. Taking one of the first conductive lines **102L** for an example, in the foldable region FR, a plurality of openings **102r** penetrate through the topmost first or two layers **1023** and **1022** to expose the lower layer **1021**. In detail, the openings **102r** may be formed in the second layer **1022** and the third layer **1023** of the first conductive layer **102**. The openings **102r** may improve the folding stress distribution or release the folding stress when the foldable display device **100** is in a folded state, so as to decrease the damage possibility of the first

conductive layer **102** in the folded state or in the state of being folded. As shown in FIG. 6, for the same first conductive line **102L**, the openings **102r** may be formed in the foldable region **FR**, but the portion of the first conductive line **102L** in the first display region **DR1** may not include openings. In some embodiments, the first conductive line **102L** may also include openings in the first display region **DR1** and/or the second display region **DR2**, as well as the foldable region **FR**, but the openings of the first conductive line **102L** in the first display region **DR1** and/or the second display region **DR2** may be smaller than the openings of the first conductive line **102L** in the foldable region **FR**. In some embodiments, the openings of the first conductive line **102L** in the first display region **DR1** and/or the second display region **DR2** may have less distribution density than the openings of the first conductive line **102L** in the foldable region **FR**.

In some embodiments, the conductive lines may further include curved edges and/or curved openings. For example, the second conductive line **104L** disposed in the foldable region **FR** may include a plurality of curved openings **104r**, as shown in the partial enlarged top-view of the second conductive line **104L** in the right part of FIG. 6. The openings **104r** can provide the function to release folding stress when the foldable display device **100** is in the folded state. The openings **104r** may include a curved shape, and may be in an oval shape. Similar to the first conductive line **102L** as mentioned above, when the second conductive line **104L** includes multiple layers, the openings **104r** may penetrate through all of the multiple layers, or may penetrate through the topmost first or two layers to expose at least one lower layer. In addition, one opening **104r** may have a first distance **w1** and a second distance **w2** from the two adjacent edges of the second conductive line **104L** in a same straight line, such as in the dotted line **500** along the direction **D1**, and the opening **104r** has a width **w3** in the same dotted line **500**. In some embodiments, the relation of the first distance **w1**, the second distance **w2**, and the third distance **w3** meets at least one of the following equations:

$$w3 \leq (w1 + w2)$$

$$0.2 \leq (w2 - w1) / (w1 + w2) \leq 0.6$$

$$w1 \neq w2.$$

The electronic device and foldable display device of the present disclosure are not limited by the aforementioned embodiment, and may have other different embodiments and variant embodiments. To simplify the description, the identical components in each of the following embodiments are marked with identical symbols. For making it easier to compare the difference between the embodiments, the following description will detail the dissimilarities among different embodiments and the identical features will not be redundantly described.

Referring to FIG. 7 and FIG. 8, FIG. 7 is a schematic diagram of a top view of an electronic device according to a second embodiment of the present disclosure, and FIG. 8 is a schematic diagram of a sectional view of the electronic device along sectional-line 8-8' shown in FIG. 7. This embodiment is mainly different from the previous embodiments in that the electronic device **ED** in FIG. 7 and FIG. 8 has curved surface. In detail, the flexible substrate **SUB** has a curvature portion **CR1** and a curvature portion **CR2** in the first display region **DR1** and the second display region **DR2** respectively. The curvature portion **CR1** and the curvature portion **CR2** are positioned near an edge of the flexible

substrate **SUB**. The electronic device **ED** is bent along a bending axis **BX1** to form the curvature portion **CR1** and bent along a bending axis **BX2** to form the curvature portion **CR2**. The biometric sensing structure **BSS** covers at least a portion of the curvature portion **CR1** and at least a portion of the curvature portion **CR2** in this embodiment. In addition, in this embodiment, the area of the display layer **DL** may be less than that of the biometric sensing structure **BSS**, and the area of the biometric sensing structure **BSS** may be less than that of the flexible substrate **SUB**. However, in some other embodiments, the areas of the display layer **DL** (which may indicate the display region) and the biometric sensing structure **BSS** may be approximately the same as the flexible substrate **SUB**. In still some other embodiments, the area of the display layer **DL** may be greater than the area of the biometric sensing structure **BSS**. Further, in this embodiment, the foldable display device **100** has a first supporting film **SUF1** disposed in the first display region **DR1** and a second supporting film **SUF2** disposed in the second display region **DR2**. The first supporting film **SUF1** and the second supporting film **SUF2** are attached to the flexible substrate **SUB** and opposite to the display layer **DL**. The first supporting film **SUF1** can be not connected to the second supporting film **SUF2**, and a recess portion **106** is formed between the first supporting film **SUF1** and the second supporting film **SUF2**. In some embodiments, the first supporting film **SUF1** can be connected to the second supporting film **SUF2** in some portion in the foldable region **FR** (not shown in FIG. 8). The first supporting film **SUF1** and the second supporting film **SUF2** may have inclined sidewalls facing the recess portion **106** in this embodiment, as shown in FIG. 8. Further, a ratio of the area of the biometric sensing region of the biometric sensing structure **BSS** to a sum of the area of the first supporting film **SUF1** and the area of the second supporting film **SUF2** can be in a range from 1 to 1.5 in this embodiment.

Referring to FIG. 9 to FIG. 11, FIG. 9 is a schematic diagram of a sectional view of an electronic device according to a third embodiment of the present disclosure, FIG. 10 is a schematic diagram of a top view of the electronic device shown in FIG. 9, and FIG. 11 is a schematic diagram of a sectional view of the electronic device shown in FIG. 10 with more detailed elements and partial enlarged illustration. Wherein, FIG. 10 only shows the flexible substrate **SUB** and the biometric sensing structure **BSS** and other components of the foldable display device **100** are omitted for simplifying the figure. In this embodiment, the spacing **d3** along the direction **D1** between two adjacent sensing units **BSU** in the first display region **DR1** or in the second display region **DR2** is less than the spacing **d4** along the direction **D1** between two adjacent sensing units **BSU** in the foldable region **FR**. The direction **D1** can be perpendicular to the folding axis **FX**. In other words, the distribution density of the sensing units **BSU** in the first display region **DR1** or in the second display region **DR2** is greater than the distribution density of the sensing units **BSU** in the foldable region **FR**.

As shown in FIG. 11, the display layer **DL** may include a circuit layer **132** and a light emitting structure **134** disposed on the circuit layer **132**. The circuit layer **132** may include a plurality of switch elements or driving elements (such as driving TFT **T1**) and a plurality of conductive lines. The light emitting structure **134** may include a plurality of display units **300** electrically connected to the corresponding driving elements. The driving TFT **T1** for serving as the driving element of one display unit **300** may include a source electrode **SE1**, a drain electrode **DE1**, a gate electrode **G1**

11

and a semiconductor layer SL1. The biometric sensing structure BSS of this embodiment is an optical-type sensing structure, and the biometric sensing structure BSS is disposed between the display layer DL and the flexible substrate SUB. In detail, the sensing units BSU of the biometric sensing structure BSS may be embedded in the display layer DL. In other words, at least a part of the sensing unit BSU may be formed in the display layer DL. For example, the sensing units BSU may be formed with thin film transistors disposed in the display layer DL. As shown in the enlarged part in FIG. 11, the thin film transistor structure (labeled as sensor TFT T2) of one sensing unit BSU may include a gate electrode G2, a source electrode SE2, a drain electrode DE2 and a semiconductor layer SL2. The semiconductor layer SL1, gate electrode G1, source electrode SE1 and drain electrode DE1 of the driving TFT T1 for driving the display unit 300 and the semiconductor layer SL2, gate electrode G2, source electrode SE2 and drain electrode DE2 of the sensor TFT T2 of the sensing unit BSU may be formed of the same material or layer respectively. A first insulating layer 1321 may be disposed on the semiconductor layer SL2. The gate electrode G2 may be disposed on the first insulating layer 1321 and on the semiconductor layer SL2. The gate electrode G2 may be formed of a first metal layer M1 in the circuit layer 132. A second insulating layer 1322 may be disposed on the first metal layer M1. The source electrode SE2 and the drain electrode DE2 may be disposed on the second insulating layer 1322 and penetrate through the second insulating layer 1322 and the first insulating layer 1321 to contact two ends of the semiconductor layer SL2. The source electrode SE2 and the drain electrode DE2 may be formed of the same second metal layer M2 of the circuit layer 132. A planarization layer 1323 may be disposed on the second metal layer M2 and the second insulating layer 1322. For preventing ambient light from illuminating the semiconductor layers SL1 and SL2, the circuit layer 132 may include light-shielding portions LS1, LS2 between the semiconductor layer SL1 or SL2 and the flexible substrate SUB. The light-shielding portions LS1, LS2 may be formed of a metal layer, and a third insulating layer 334 may be disposed between the metal layer and the semiconductor layers SL1, SL2. Light L penetrating through the inner surface of the foldable display device 100 may be reflected by the light-shielding portion LS1 to the semiconductor layer SL2, and the semiconductor layer SL2 can receive light signal. In some embodiments, the first metal layer M1 and the second metal layer M2 may include pin holes PH1, PH2 for allowing the light L penetrating through.

The light emitting structure 134 may include a plurality of light-emitting diodes 336 serving as the display units 300, a third metal layer M3, a partition layer PL and a fourth metal layer M4. The third metal layer M3 may include an electrode E1 penetrating through the planarization layer 1323 for electrically connecting one corresponding light-emitting diode 336 to the corresponding driving TFT T1. The partition layer PL may have a cup structure for disposing the corresponding light-emitting diode 336. The fourth metal layer M4 may include another electrode E2 on the corresponding light-emitting diode 336. Also, for allowing the light L penetrating through the third metal layer M3 and the fourth metal layer M4, the third metal layer M3 and the fourth metal layer M4 may further include pin holes PH3, PH4. In a top view direction D3, one sensing unit BSU can be implemented as a thin-film transistor element (sensor TFT T2) and may be disposed at a side of one light-emitting diode 336, along the longitudinal direction D1, for sensing the light signal. Accordingly, the biometric sensing region of

12

the biometric sensing structure BSS can be defined by the connecting lines of the outer sides of the outmost sensing units BSU, that is, by the connecting lines of the outer sides of the outmost sensors TFT. Thus, the area of biometric sensing region can be defined by the area of an inner region surrounded by the connecting lines of the outer sides of the outmost sensors TFT. In another aspect, the display region of the display layer DL may be defined by connecting the outer sides of the outmost light-emitting diodes 336. The structures of the display layer DL and the biometric sensing structure BSS are not limited to the mentioned above. In another embodiment, the optical-type biometric sensing structure BSS may be disposed between the supporting film SUF and the flexible substrate SUB.

In this embodiment, referring to FIG. 11, a protective layer 120 may cover the display layer DL and the biometric sensing structure BSS. An over-coating adhesive 122 may be disposed on the protective layer 120 for attaching a cover layer 124 on the protective layer 120, as shown in FIG. 11. In addition, the foldable display device 100 may further include a flexible circuit board 224 for electrically connecting the biometric sensing structure BSS to a control unit 212, wherein the flexible circuit board 224 may be a flexible printed circuit (FPC) and the control unit 212 may be an integrated circuit (IC) package, but not limited thereto.

Referring to FIG. 12, FIG. 12 is a schematic diagram of a top view of the electronic device according to a first variant embodiment of the third embodiment of the present disclosure. This embodiment is different from the third embodiment in that the area of the sensing units BSU disposed in the first display region DR1 and in the second display region DR2 is different from the area of the sensing units BSU disposed in the foldable region FR. In detail, the width W1 measured along the direction D1 of one of the sensing units BSU disposed in the first display region DR1 or in the second display region DR2 may be greater than the width W2 measured along the direction D1 of one of the sensing units BSU disposed in the foldable region FR. Accordingly, the area of the sensing unit BSU disposed in the first display region DR1 or in the second display region DR2 may be greater than the area of the sensing unit BSU disposed in the foldable region FR.

Referring to FIG. 13, FIG. 13 is a schematic diagram of a partial enlarged sectional view of the electronic device according to a second variant embodiment of the third embodiment of the present disclosure. FIG. 13 illustrates another type of optical sensor of the sensing unit BSU. The sensing unit BSU includes a sensor TFT T2 and a diode layer, for example, a PIN layer 136. The PIN layer 136 include an N+ type semiconductor layer, an intrinsic semiconductor layer, and a P type semiconductor layer stacked sequentially, for example, stacked from bottom to top. A bottom electrode 138 positioned below the PIN layer 136 is electrically connected to the source electrode SE2 of the sensor TFT T2, and a top electrode 140 is disposed on the PIN layer 136. When light enters the PIN layer 136, it can produce current to send signals through the electrically connected thin-film transistor element.

Referring to FIG. 14, FIG. 14 is a schematic diagram of a sectional view of an electronic device according to a fourth embodiment of the present disclosure. The biometric sensing structure of this embodiment is a hybrid-type sensing structure, and it may include two or more of ultrasonic sensing structure, capacitive type sensing structure and optical type sensing structure. As shown in FIG. 14, the biometric sensing structure include a first biometric sensing structure BSS1 disposed in the foldable region FR, a second

biometric sensing structure BSS2 disposed in the first display region DR1, and a third biometric sensing structure BSS3 in the second display region DR3. The structure or type of the first biometric sensing structure BSS1 may be different from that of the second biometric sensing structure BSS2 and the third biometric sensing structure BSS3. The first biometric sensing structure BSS1 is positioned between the display layer DL and the flexible substrate SUB and may include an optical type sensor or a capacitive type sensor, but not limited thereto. The second biometric sensing structure BSS2 and the third biometric sensing structure BSS3 are positioned between the flexible substrate SUB and the supporting film SUF and may include an optical type sensor or an ultrasonic type sensor, but not limited thereto.

Referring to FIG. 15, FIG. 15 is a schematic diagram of a top view in the direction D3 of the electronic device according to a fifth embodiment of the present disclosure. The arrangement of the sensing units of the biometric sensing structure BSS may be various. Partial enlargement of three regions r1, r2, r3 in the first display region DR1, the second display region DR2 and the foldable region FR are shown in the bottom part of FIG. 15. The display units 351, 352, 353 may represent three display units for producing different color lights, such as blue light, red light, and green light, but not limited thereto. In the region r1, three display units 351, 352, 353 are arranged side by side along the direction D1, two sensing units BSU1 are disposed side by side along the direction D2, and the sensing units BSU1 are both disposed at a same side of the display unit 353. That is, in the first display region DR1, the arrangement is that three display units are combined with two sensing units as a repeating unit. The similar arrangement is shown in the region r2. However, in the region r3, only one sensing unit BSU3 is disposed at a side of the display unit 353 along the direction D1. That is, in the foldable region FR, the arrangement is that three display units are combined with one sensing unit as a repeating unit. Accordingly, the sensing units in the foldable region FR have a less distribution density than the sensing units in the first display region DR1 and/or in the second display region DR2. In some embodiments, although not shown in figures, the sensing units BSU1 in the region r1 or the sensing units BSU2 in the region r2 may be disposed at a side of the three display units 351, 352, 353 along the direction D2, and the sensing units BSU3 in region r3 are positioned at a side of the display units 351, 352, 353 along the direction D1. The arrangement of the display units 351, 352, 353 and the sensing units BSU1, BSU2, BSU3 are not limited to the above description.

Referring to FIG. 16, FIG. 16 is a schematic diagram of a sectional view of an electronic device according to a sixth embodiment of the present disclosure. The electronic device ED is a foldable double-side display device that can display images at two opposite sides. The electronic device ED includes a flexible substrate SUB having a first side 61 and a second side 62 opposite to the first side 62. Further, a first display layer DL1 and a first biometric sensing structure BSS1 are disposed on the first side 61, and a second display layer DL2 and a second biometric sensing structure BSS2 are disposed on the second side 62. According to some embodiments, the first display layer DL1 can be disposed between the flexible substrate SUB and the first biometric sensing structure BSS1, and the second display layer DL2 can be disposed between the flexible substrate SUB and the second biometric sensing structure BSS2. In order to improve the folding performance and decrease the damage possibility of the elements in the foldable region FR of the

electronic device ED, the electronic device ED may include a recess 150 in the foldable region FR. Specifically, the thickness of the flexible substrate SUB in the foldable region FR may be reduced compared with that in the first display region DR1. Thus, the total thickness of the flexible substrate SUB, the first and second display layers DL1, DL2, and the first and second biometric sensing structures BSS1, BSS2 may be reduced in the foldable region FR. Thus, the recess 150 is formed in the foldable region FR, which can be at one side or both sides of the foldable display device 100. In this embodiment, the first display layer DL1 and the second display layer DL2 may have the same area as the area of the first biometric sensing structure BSS1 or the area of the second biometric sensing structure BSS2, but not limited thereto.

Referring to FIG. 17, FIG. 17 is a flow chart of an operation method of an electronic device according to a seventh embodiment of the present disclosure. The operation method of the electronic device comprises following steps:

Step 102: Providing an electronic device with a standby state, wherein the electronic device comprises a foldable display device including a flexible substrate, a display layer disposed on the flexible substrate, and a biometric sensing structure disposed on the flexible substrate;

Step 104: When a touch signal is provided (for example, by a user) to the foldable display device, performing a detection procedure to verify if the touch signal meets a predetermined condition; and

Step 106: Turning on a biometric sensing mode when the touch signal meets the predetermined condition. In other words, if the result of the verification in Step 104 is "Yes", the biometric sensing mode will be turned on; if the result of the verification in Step 104 is "No", the biometric sensing mode will not be turned on and the electronic device will be stayed in a standby state without performing biometric sensing process.

According to the present disclosure, a ratio of the area of the biometric sensing region of the biometric sensing structure to the area of the flexible substrate is in a range from 0.6 to 1, which is the "first ratio" mentioned above. In some embodiments, the predetermined condition may relate to a touching duration of the touch signal. For example, the predetermined condition may be that the touching duration is equal to or greater than 0.3 seconds and equal to or less than 3 seconds, and the biometric sensing mode will be turned on when the duration time of the touch signal (for example, provided by the user) is in the above-mentioned range. In some embodiments, the predetermined condition may relate to a touching area. For example, the predetermined condition may be that the touching area is greater than 50 mm², and the biometric sensing mode will be turned on when the touching area of the touch provided by the user is greater than 50 mm². In some other embodiments, the predetermined condition may relate to an operation state of a specific application stored in the electronic device. If the specific application stored in the electronic device is turned on, the predetermined condition is met and then the biometric sensing mode will be turned on.

According to the present disclosure, in the foldable display device, the biometric sensing structure occupies a large ratio (0.6 to 1) based on the area of the flexible substrate. The biometric sensing structure can be disposed in the first display region, the second display region, and the foldable region. The biometric sensing performance may be improved.

15

Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the disclosure. Accordingly, the above disclosure should be construed as limited only by the metes and bounds of the appended claims.

What is claimed is:

1. A foldable display device including a first display region, a second display region, and a foldable region connecting the first display region and the second display region, the foldable display device comprising:

- a flexible substrate;
- a display layer disposed on the flexible substrate; and
- a biometric sensing structure disposed in the first display region, the second display region, and the foldable region, and having a biometric sensing region,

wherein a ratio of an area of the biometric sensing region to an area of the flexible substrate is in a range from 0.6 to 1.

2. The foldable display device as claimed in claim 1, wherein the biometric sensing structure is disposed between the flexible substrate and the display layer.

3. The foldable display device as claimed in claim 1, wherein the display layer is disposed between the flexible substrate and the biometric sensing structure.

4. The foldable display device as claimed in claim 1, further comprising:

- a first supporting film disposed in the first display region; and
- a second supporting film disposed in the second display region, wherein the first supporting film and the second supporting film are attached to the flexible substrate and opposite to the display layer.

5. The foldable display device as claimed in claim 4, wherein a ratio of an area of the biometric sensing region to a sum of an area of the first supporting film and an area of the second supporting film is in a range from 1 to 1.5.

6. The foldable display device as claimed in claim 1, comprising a supporting film disposed in the first display region, the second display region, and the foldable region, wherein the supporting film is attached to the flexible substrate and opposite to the display layer.

7. The foldable display device as claimed in claim 6, wherein the supporting film includes a recess portion in the foldable region.

8. The foldable display device as claimed in claim 1, wherein an area of the display layer is less than the area of the biometric sensing region.

9. The foldable display device as claimed in claim 1, wherein a minimum distance between a boundary of a display region of the display layer and an edge of the flexible substrate is greater than a minimum distance between a boundary of the biometric sensing structure and the edge of the flexible substrate.

10. The foldable display device as claimed in claim 1, wherein the flexible substrate has a curvature portion positioned near an edge of the flexible substrate, and the biometric sensing structure covers at least a portion of the curvature portion.

11. The foldable display device as claimed in claim 1, wherein the biometric sensing structure comprises a plurality of sensing units, and an area of one of the plurality of

16

sensing units disposed in the first display region is greater than an area of one of the plurality of sensing units disposed in the foldable region.

12. The foldable display device as claimed in claim 1, wherein the biometric sensing structure comprises a plurality of sensing units, and a first width of one of the plurality of sensing units disposed in the first display region is greater than a second width of one of the plurality of sensing units disposed in the foldable region, and wherein the first width and the second width are measured along the same direction.

13. The foldable display device as claimed in claim 1, wherein the biometric sensing structure comprises a plurality of sensing units, and a spacing between two adjacent sensing units of the plurality of sensing units in the first display region is less than a spacing between two adjacent sensing units of the plurality of sensing units in the foldable region.

14. The foldable display device as claimed in claim 1, wherein the biometric sensing structure comprises a plurality of sensing units, and a distribution density of the plurality of sensing units in the first display region is greater than a distribution density of the plurality of sensing units in the foldable region.

15. The foldable display device as claimed in claim 1, wherein the biometric sensing structure includes a capacitive-type sensing structure, an optical-type sensing structure, an ultrasonic type sensing structure, or a combination thereof.

16. An operation method of an electronic device comprising following steps:

- (a) providing an electronic device with a standby state, wherein the electronic device comprises a foldable display device including a flexible substrate, a display layer disposed on the flexible substrate, and a biometric sensing structure disposed on the flexible substrate;
 - (b) when a touch signal is provided to the foldable display device, performing a detection procedure to verify if the touch signal meets a predetermined condition; and
 - (c) turning on a biometric sensing mode when the touch signal meets the predetermined condition,
- wherein a ratio of an area of a biometric sensing region of the biometric sensing structure to an area of the flexible substrate is in a range from 0.6 to 1.

17. The operation method of an electronic device as claimed in claim 16, wherein the predetermined condition includes that a touching duration is equal to or greater than 0.3 seconds and equal to or less than 3 seconds.

18. The operation method of an electronic device as claimed in claim 16, wherein the predetermined condition includes that a touching area is greater than 50 mm².

19. A foldable electronic device including a first region, a second region, and a foldable region connecting the first region and the second region, the foldable electronic device comprising:

- a flexible substrate;
- an electronic layer disposed on the flexible substrate; and
- a biometric sensing structure disposed in the first region, the second region, and the foldable region, and having a biometric sensing region,

wherein a ratio of an area of the biometric sensing region to an area of the flexible substrate is in a range from 0.6 to 1.

* * * * *