


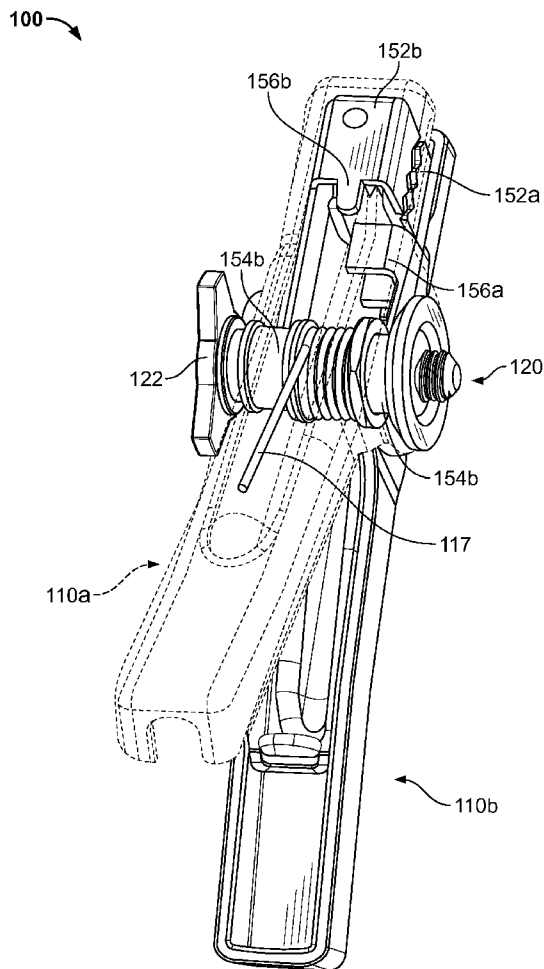

US 20090247020A1

(19) **United States**(12) **Patent Application Publication**
Gathman et al.(10) **Pub. No.: US 2009/0247020 A1**(43) **Pub. Date: Oct. 1, 2009**(54) **BATTERY CLAMP FOR USE WITH TOP POST
AND SIDE POST BATTERIES AND METHODS
FOR USING THE SAME****Publication Classification**(51) **Int. Cl.**
H01R 4/48 (2006.01)(52) **U.S. Cl. 439/759**(75) Inventors: **Michael R. Gathman**, Genoa, IL
(US); **Richard S. Smith**, Sycamore,
IL (US)(57) **ABSTRACT**Correspondence Address:
NIXON PEABODY, LLP
300 S. Riverside Plaza, 16th Floor
CHICAGO, IL 60606 (US)

A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections includes a first jaw handle and a second jaw handle. The jaw handles each have a handle portion and a clamping portion. The jaw handles are pivotally coupled to each other and are biased with the clamping portions in a closed position. The battery clamp further includes a first jaw member and a second jaw member. The jaw members have a jaw clamp portion, a jaw pivot portion, and a jaw wire portion. The jaw pivot portion of the first jaw member and the jaw pivot portion of the second jaw member are both pivotally coupled to the jaw handles. The battery clamp further includes a load pad and a volt rod. The load pad has an aperture and is coupled to the first jaw member. The volt rod is coupled to the second jaw member and protrudes through the aperture of the load pad.

(73) Assignee: **Auto Meter Products, Inc.**,
Sycamore, IL (US)(21) Appl. No.: **12/411,845**(22) Filed: **Mar. 26, 2009****Related U.S. Application Data**(60) Provisional application No. 61/040,039, filed on Mar.
27, 2008, provisional application No. 61/091,964,
filed on Aug. 26, 2008.

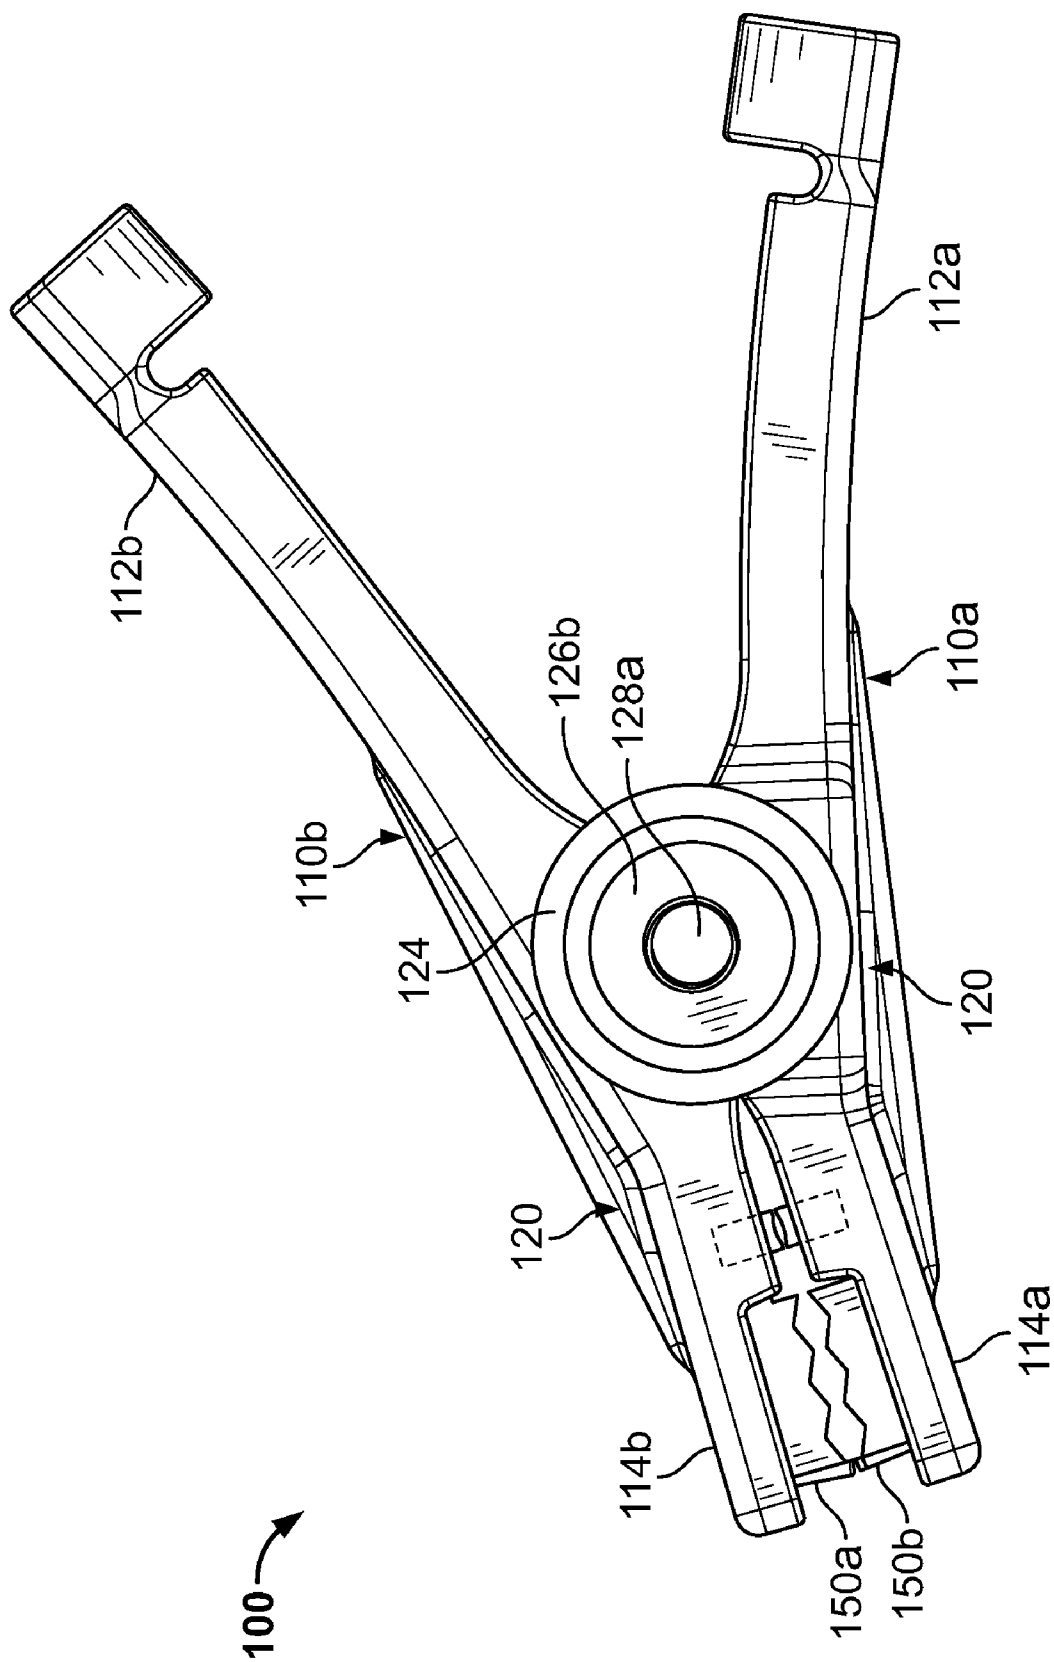


FIG. 1A

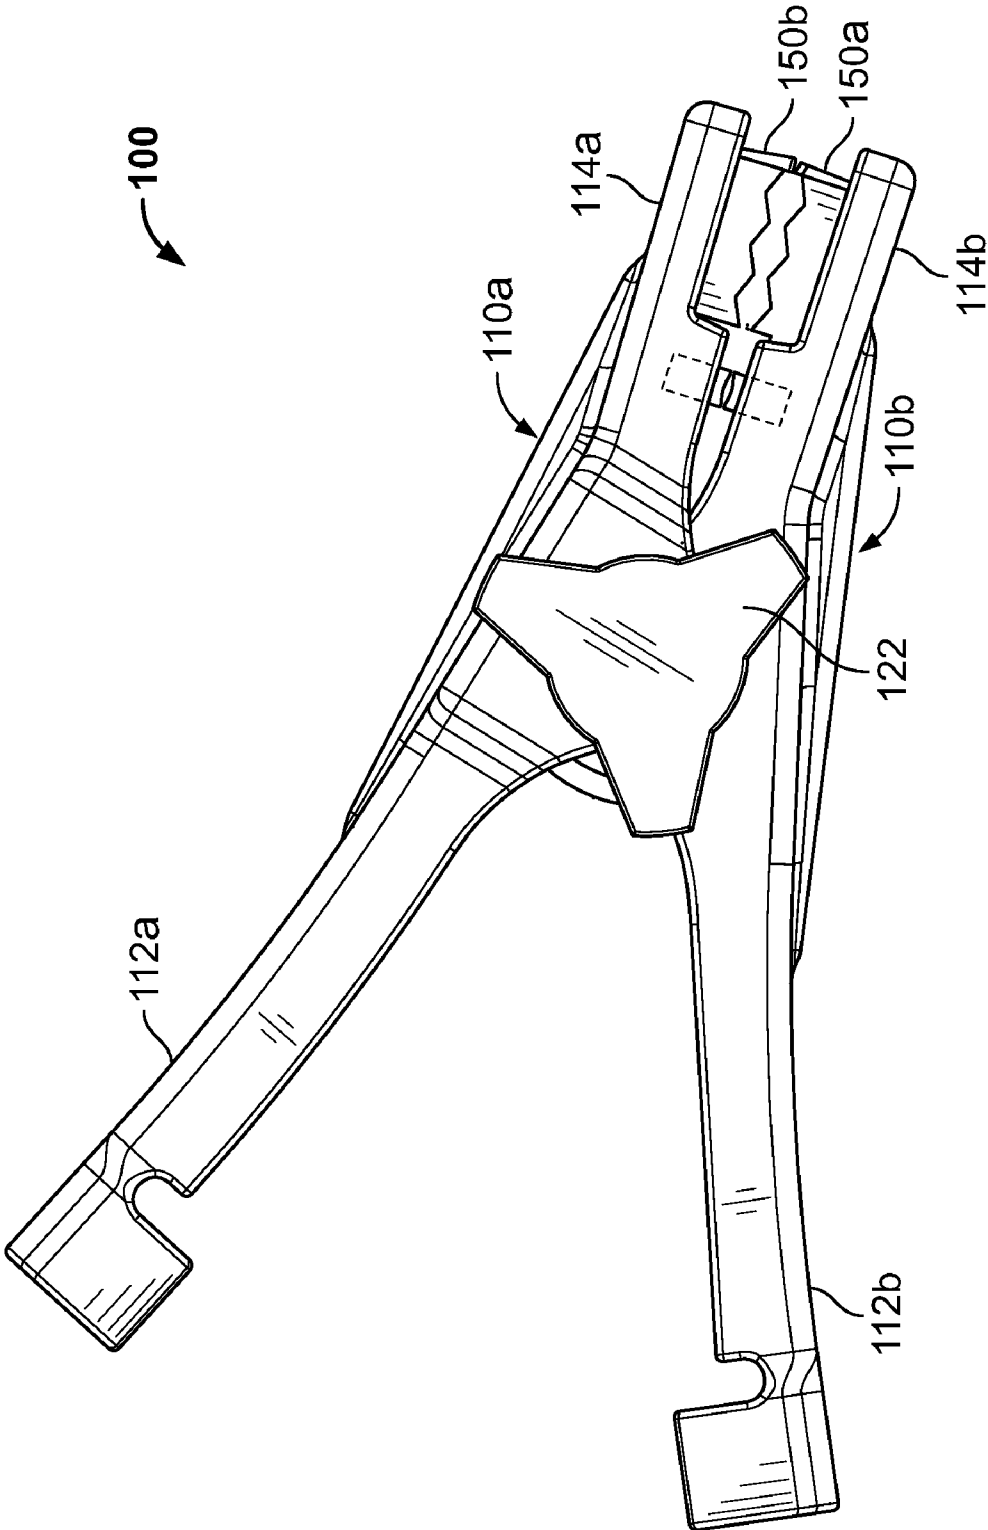


FIG. 1B

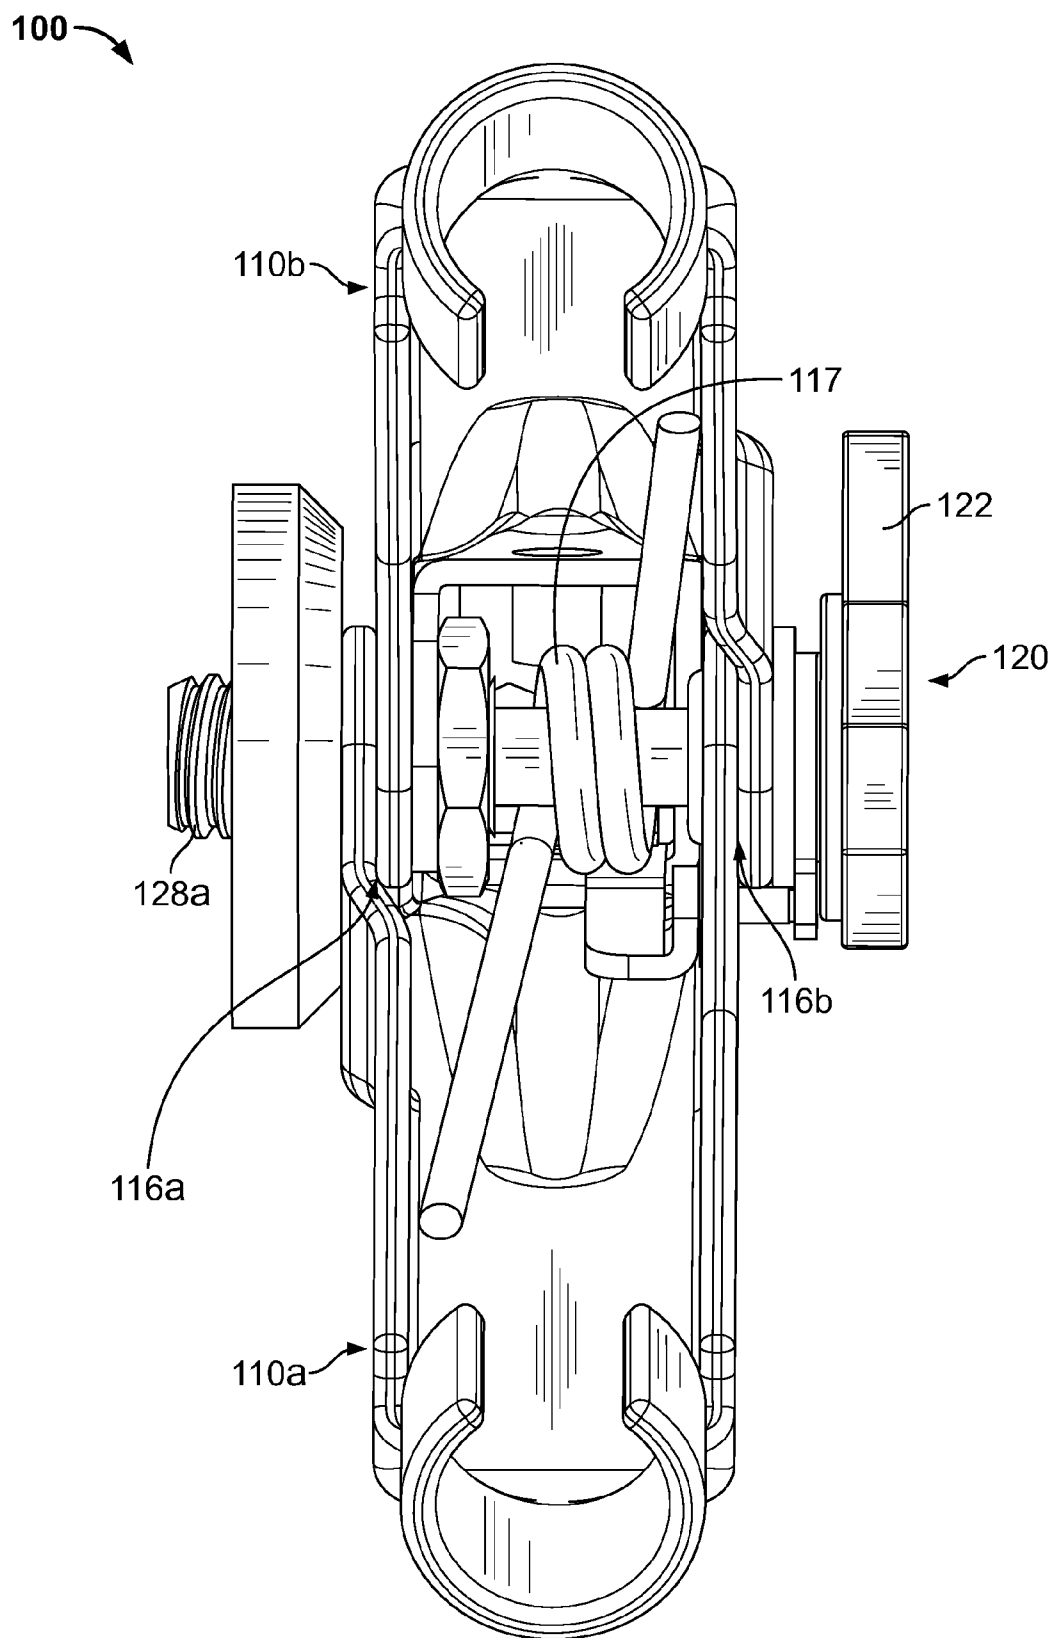


FIG. 1C

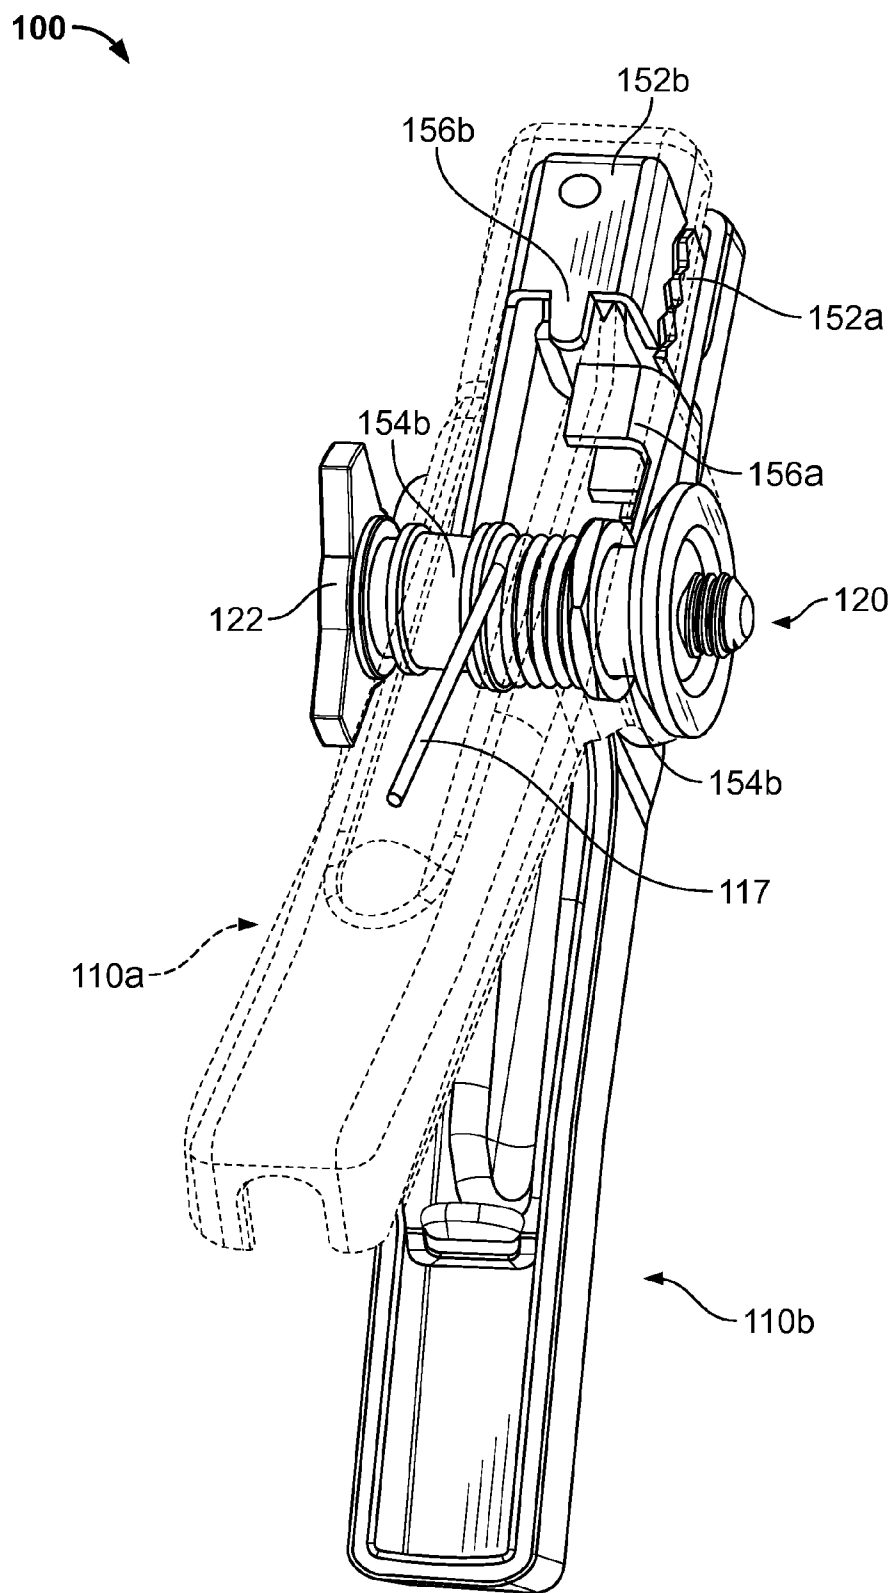


FIG. 1D

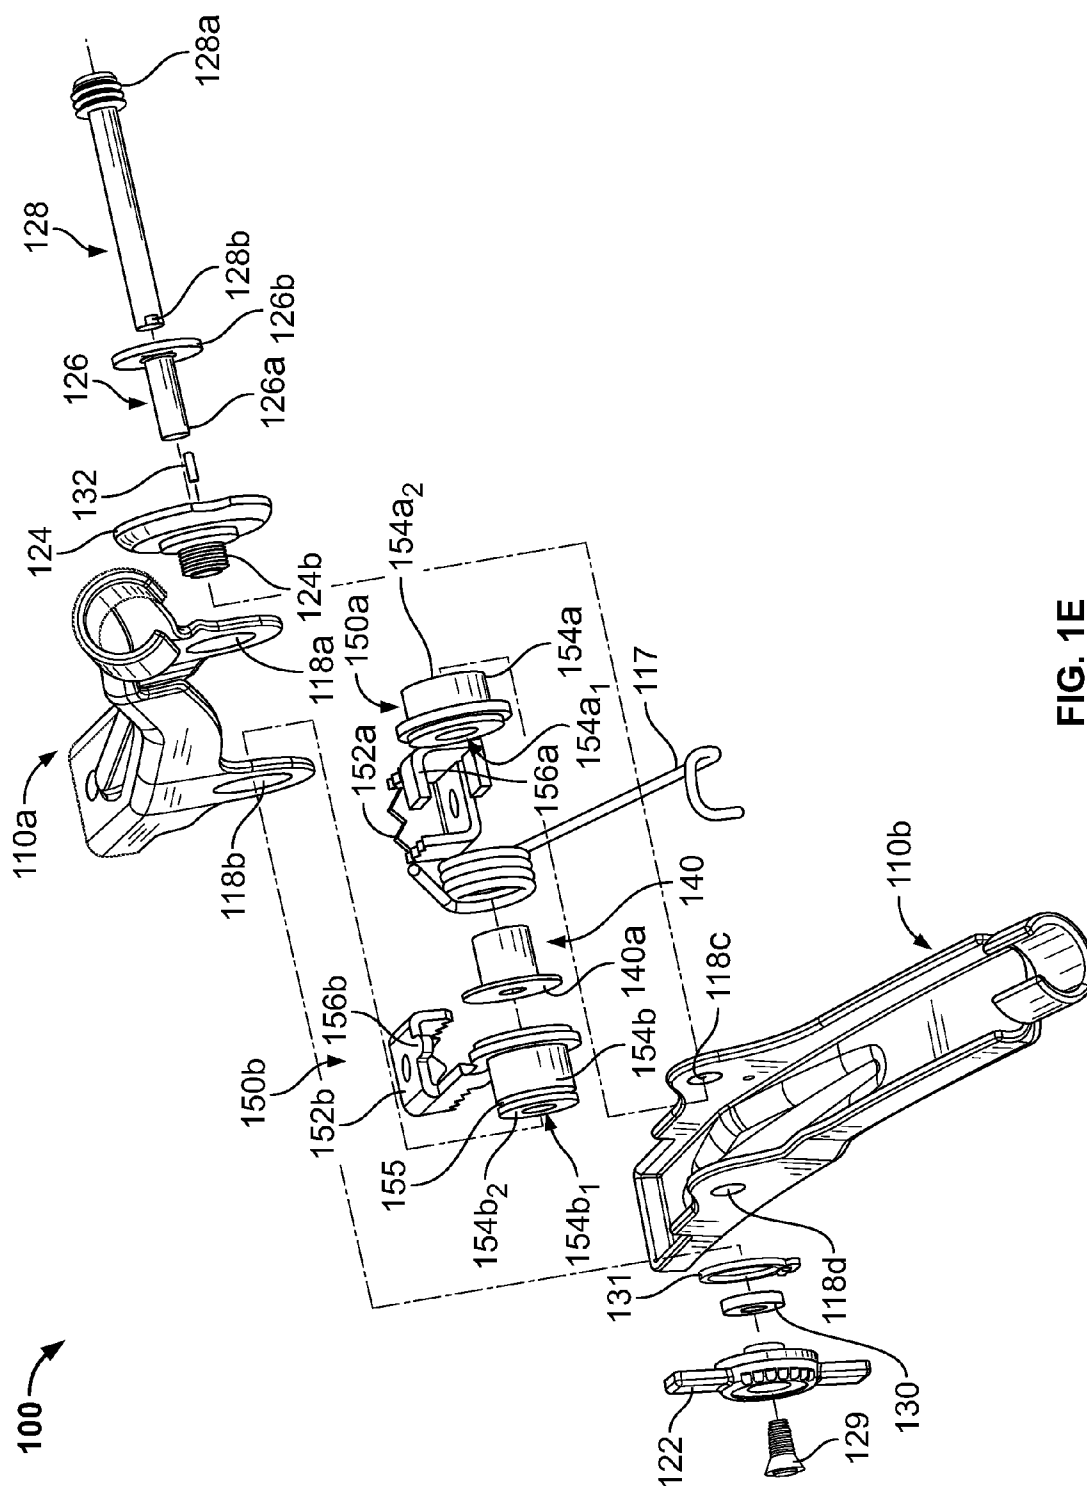


FIG. 1E

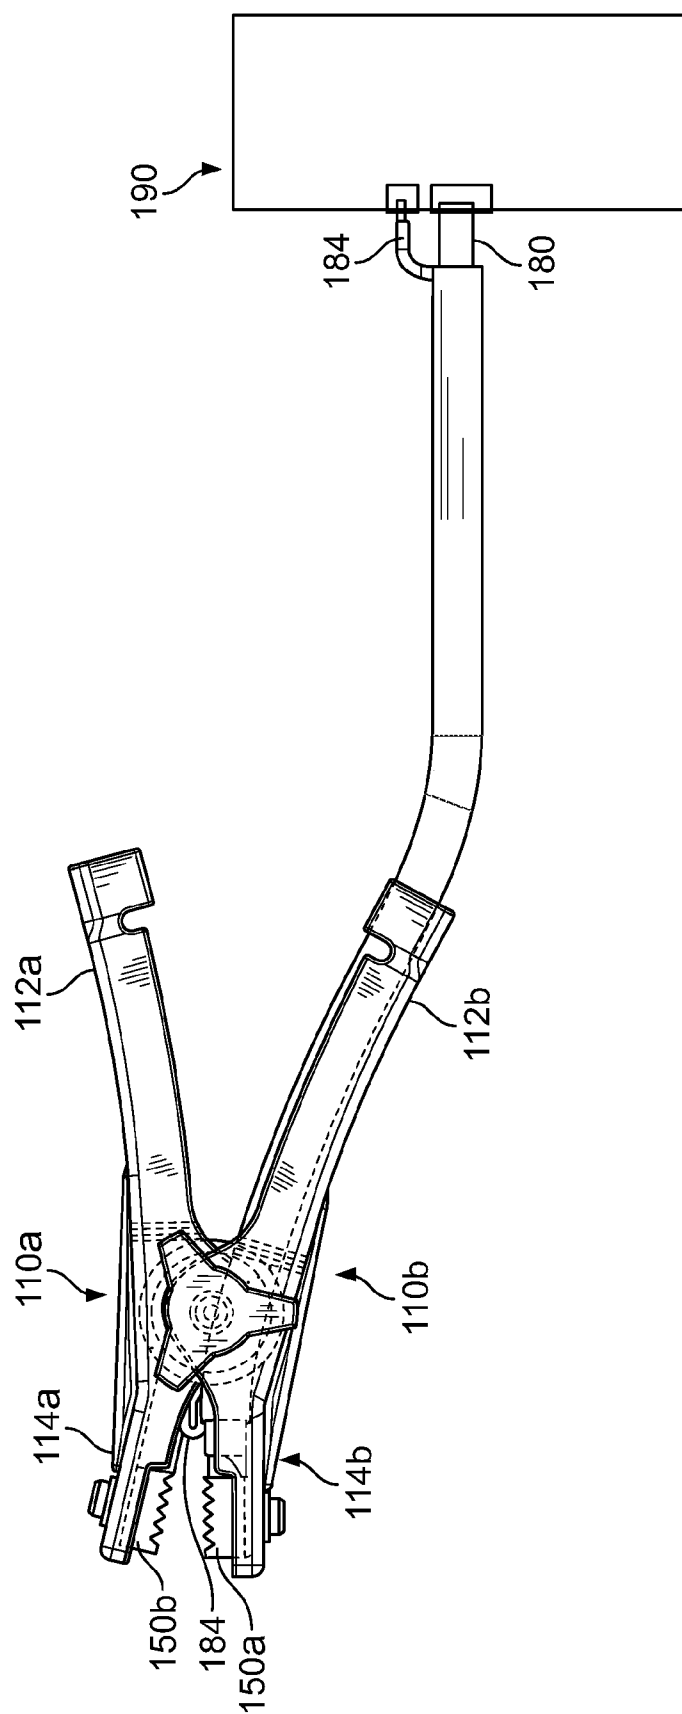


FIG. 1F

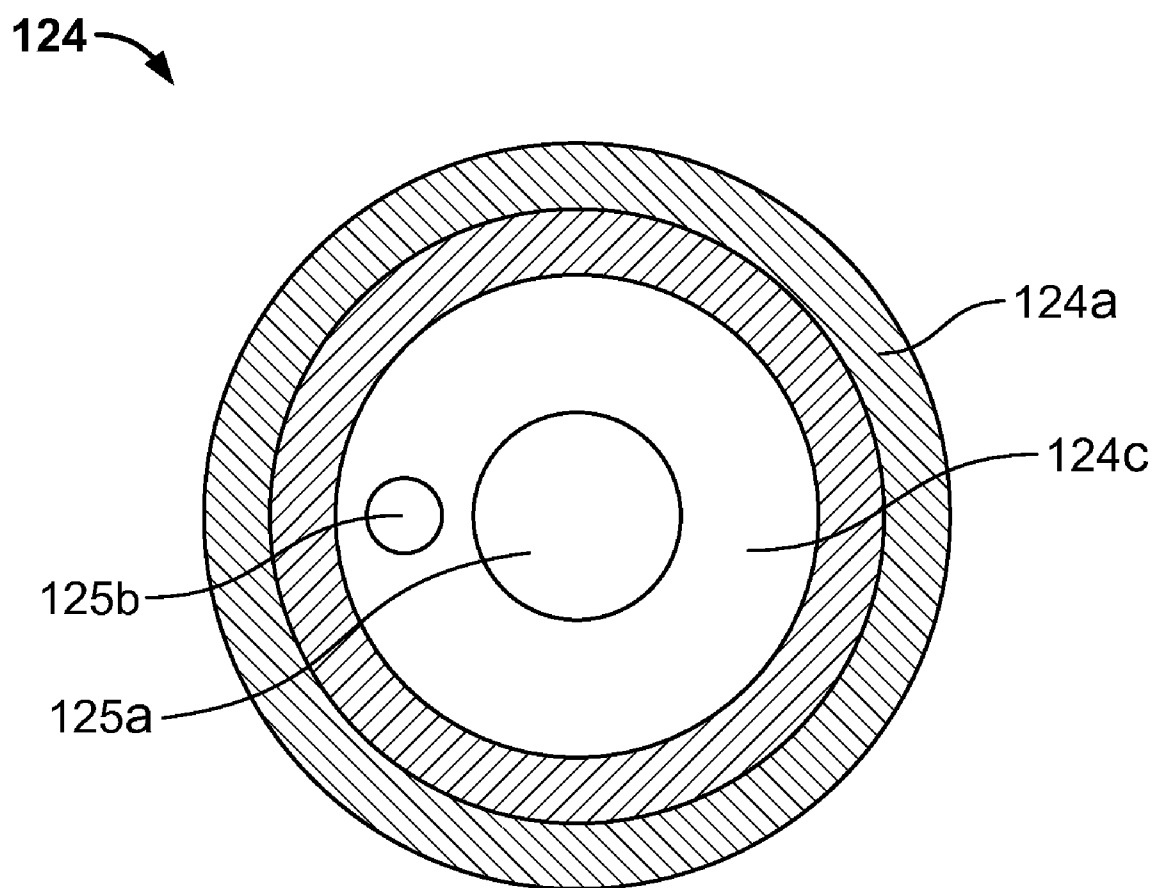


FIG. 1G

200

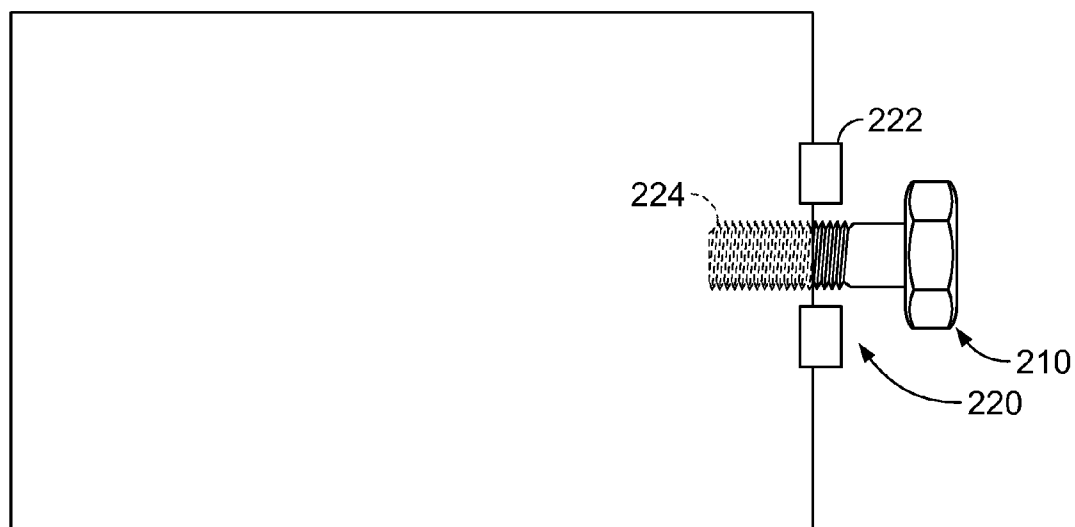


FIG. 2A

230

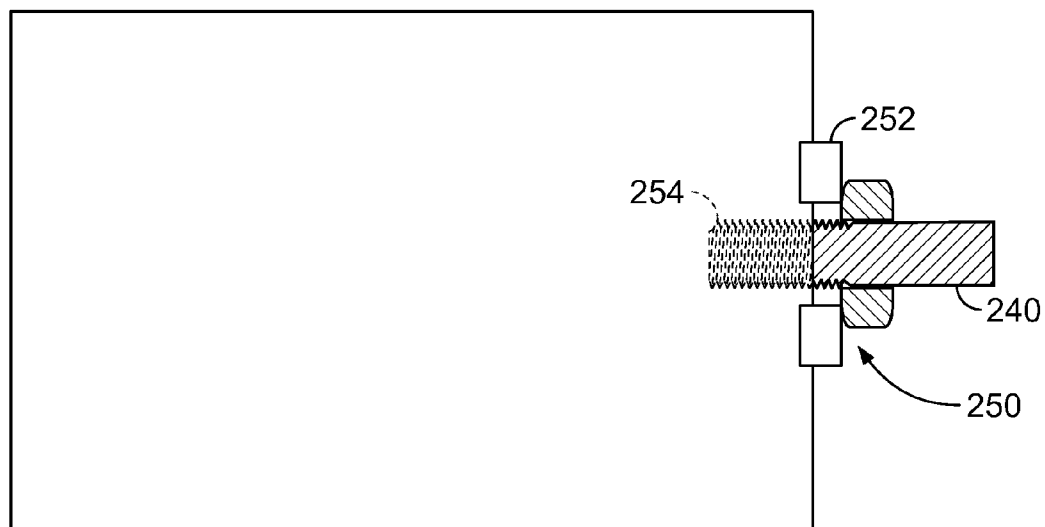


FIG. 2B

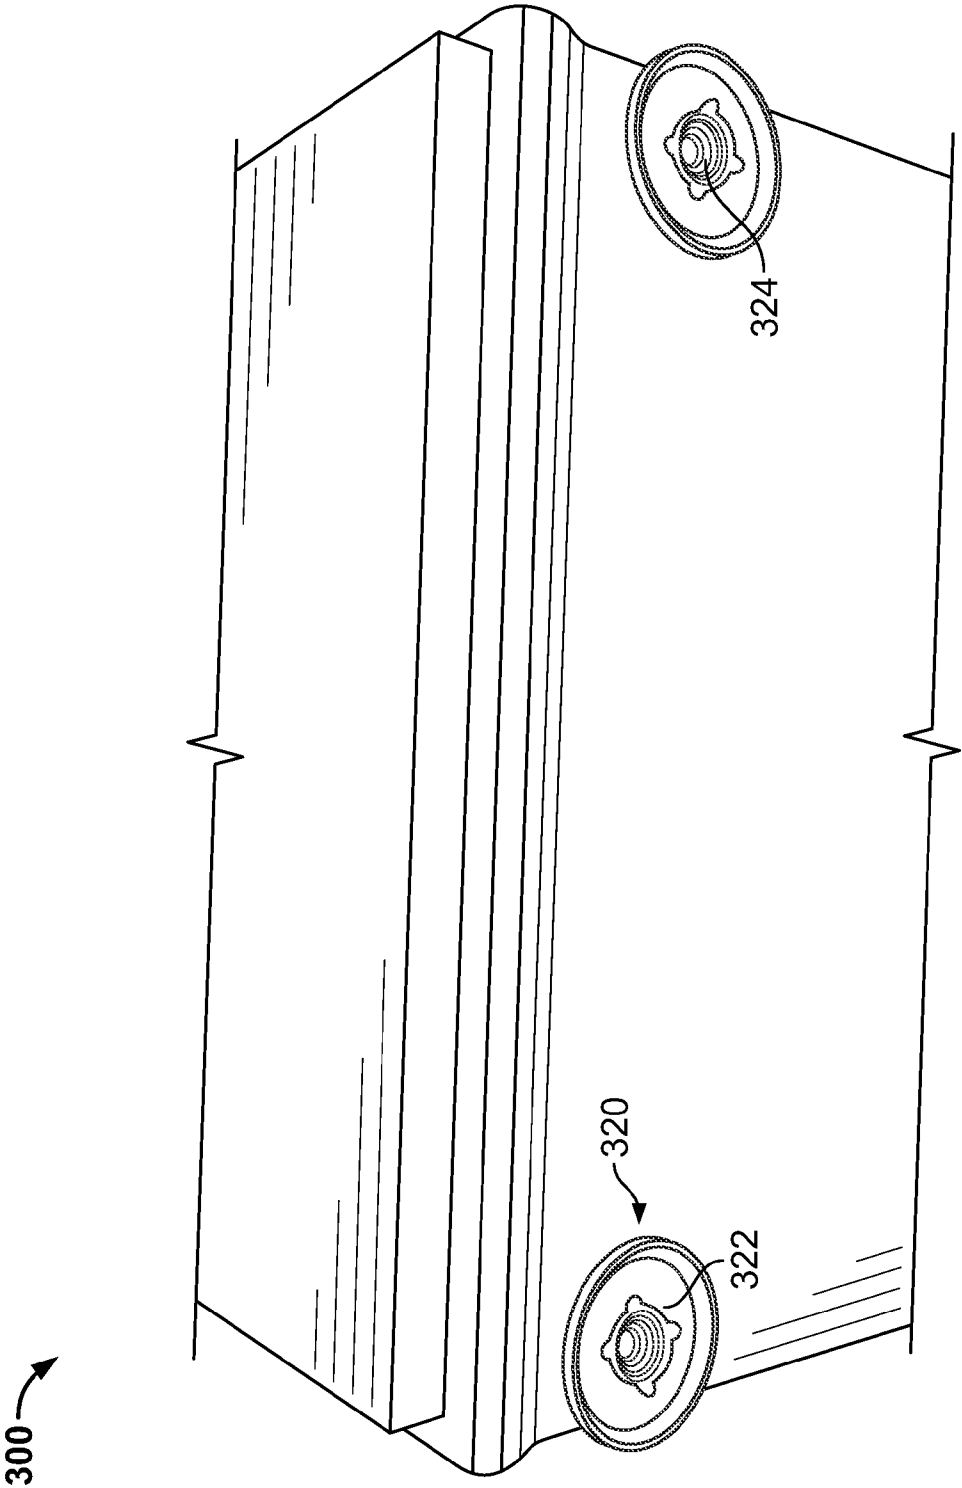


FIG. 3

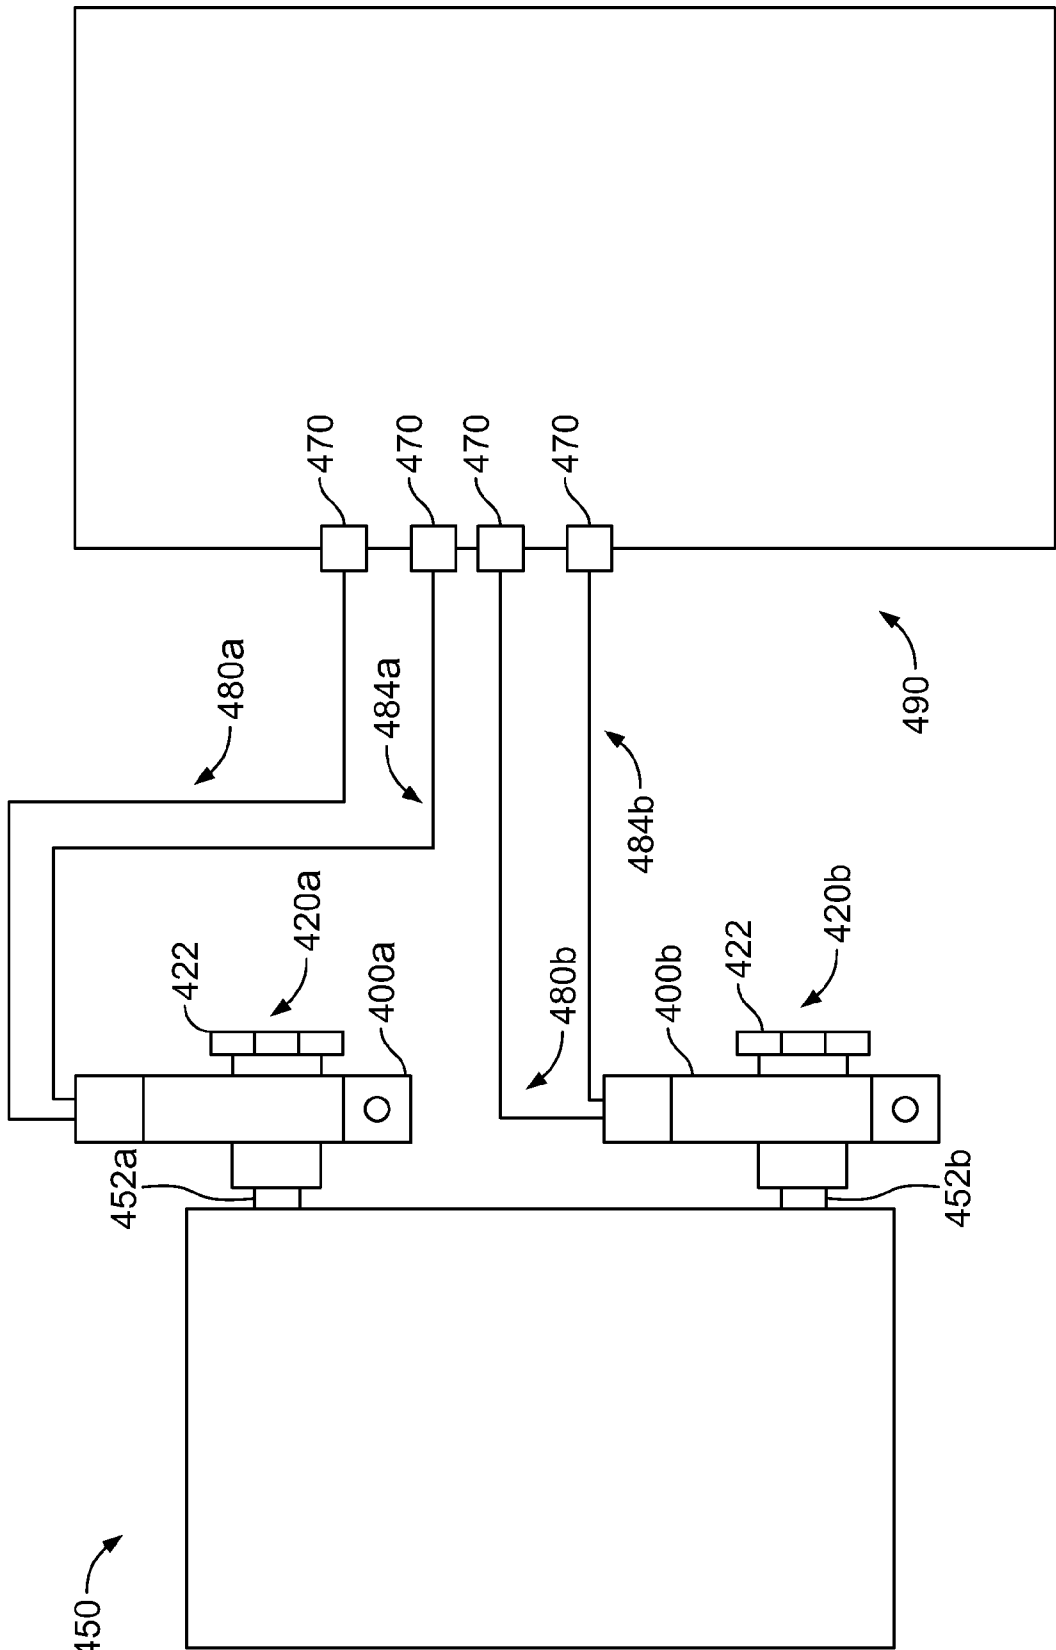


FIG. 4

500

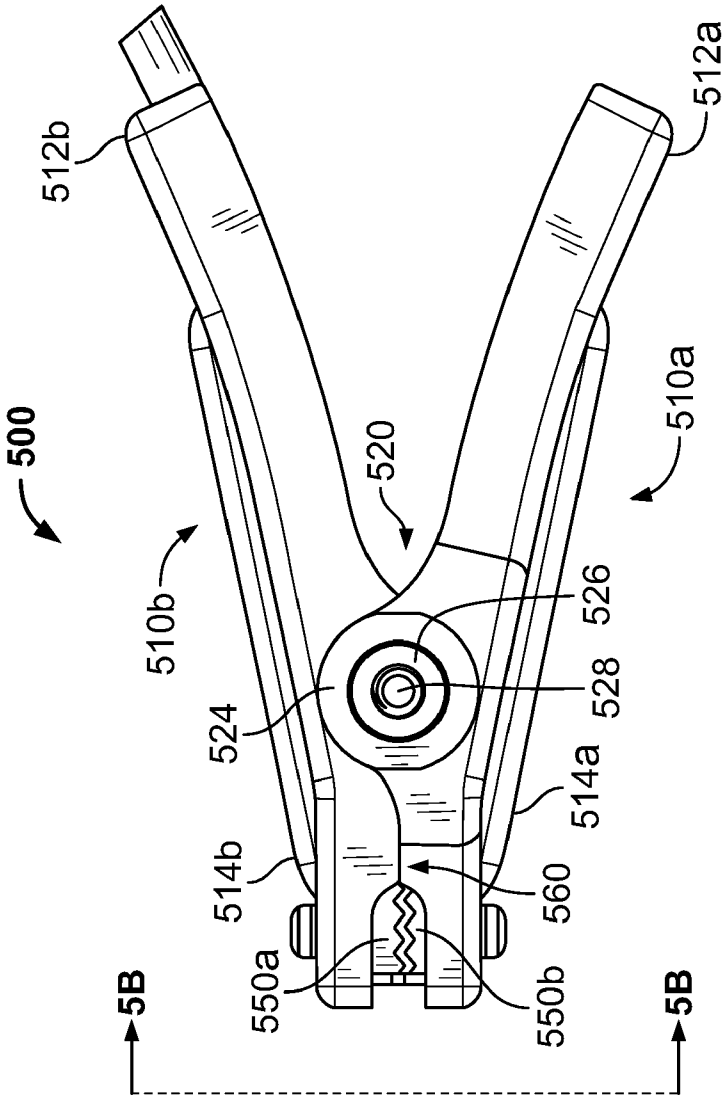


FIG. 5A

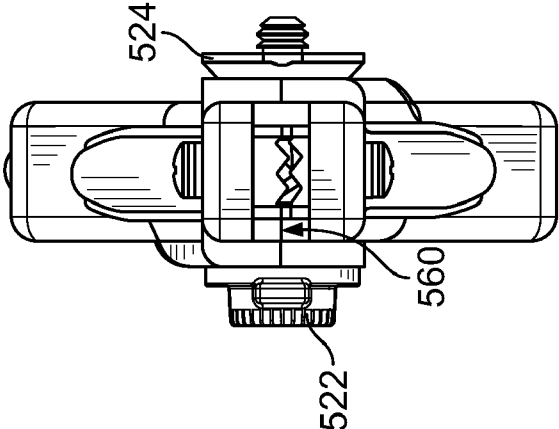


FIG. 5B

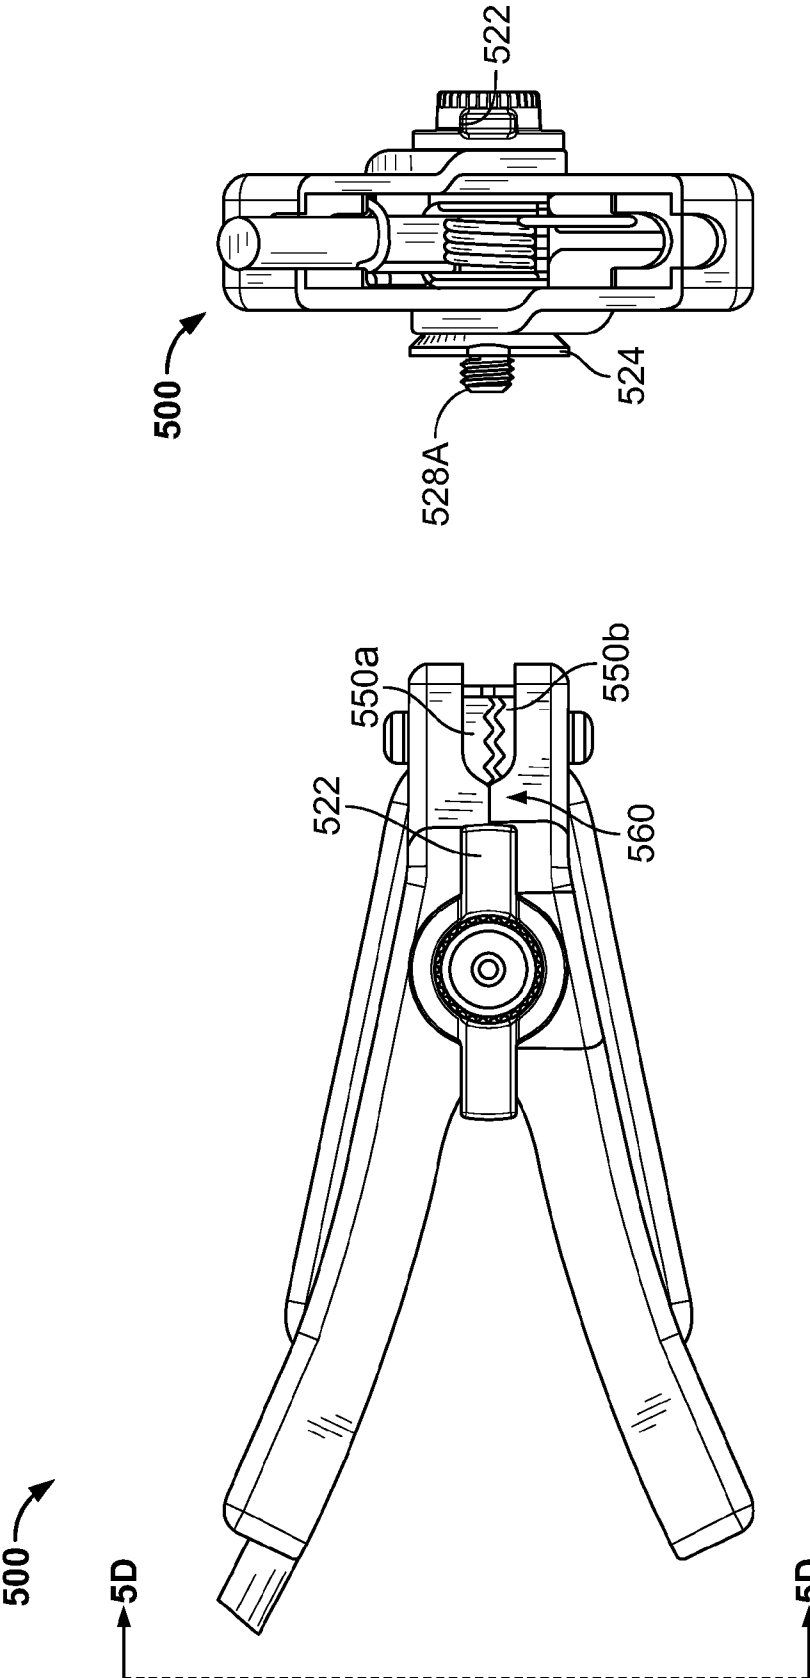


FIG. 5D

FIG. 5C

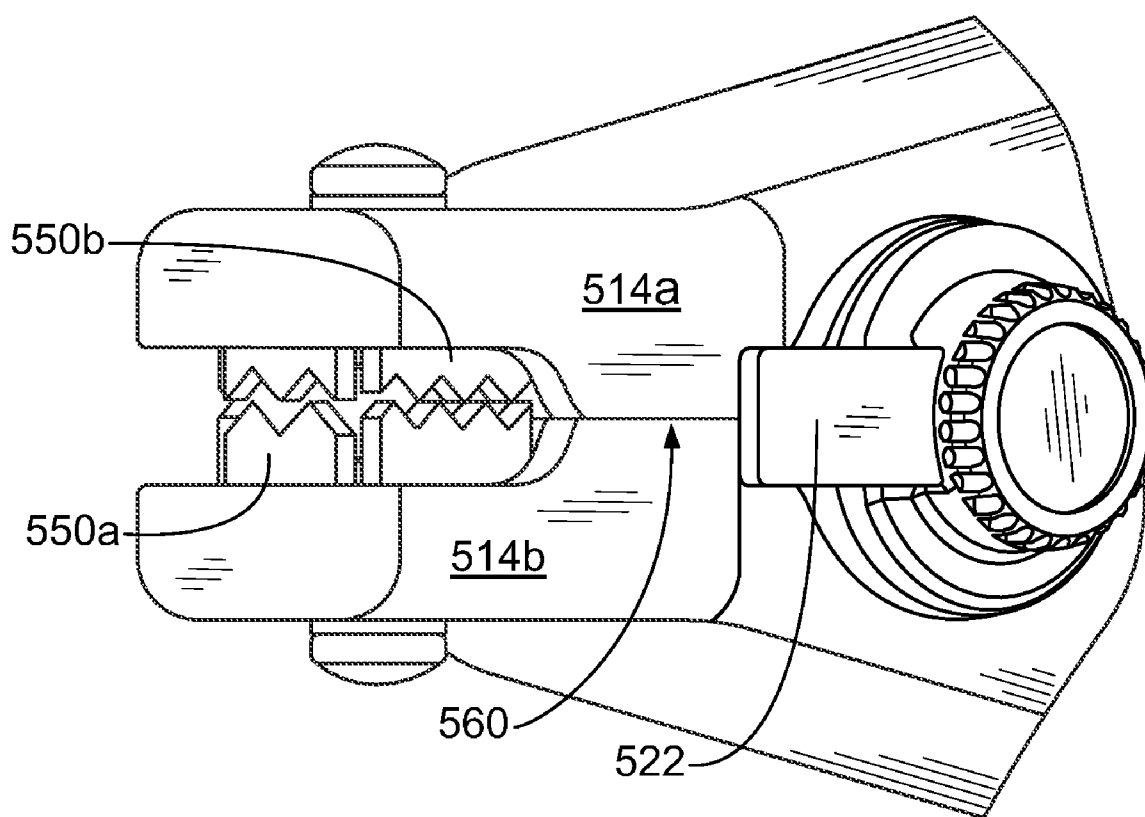
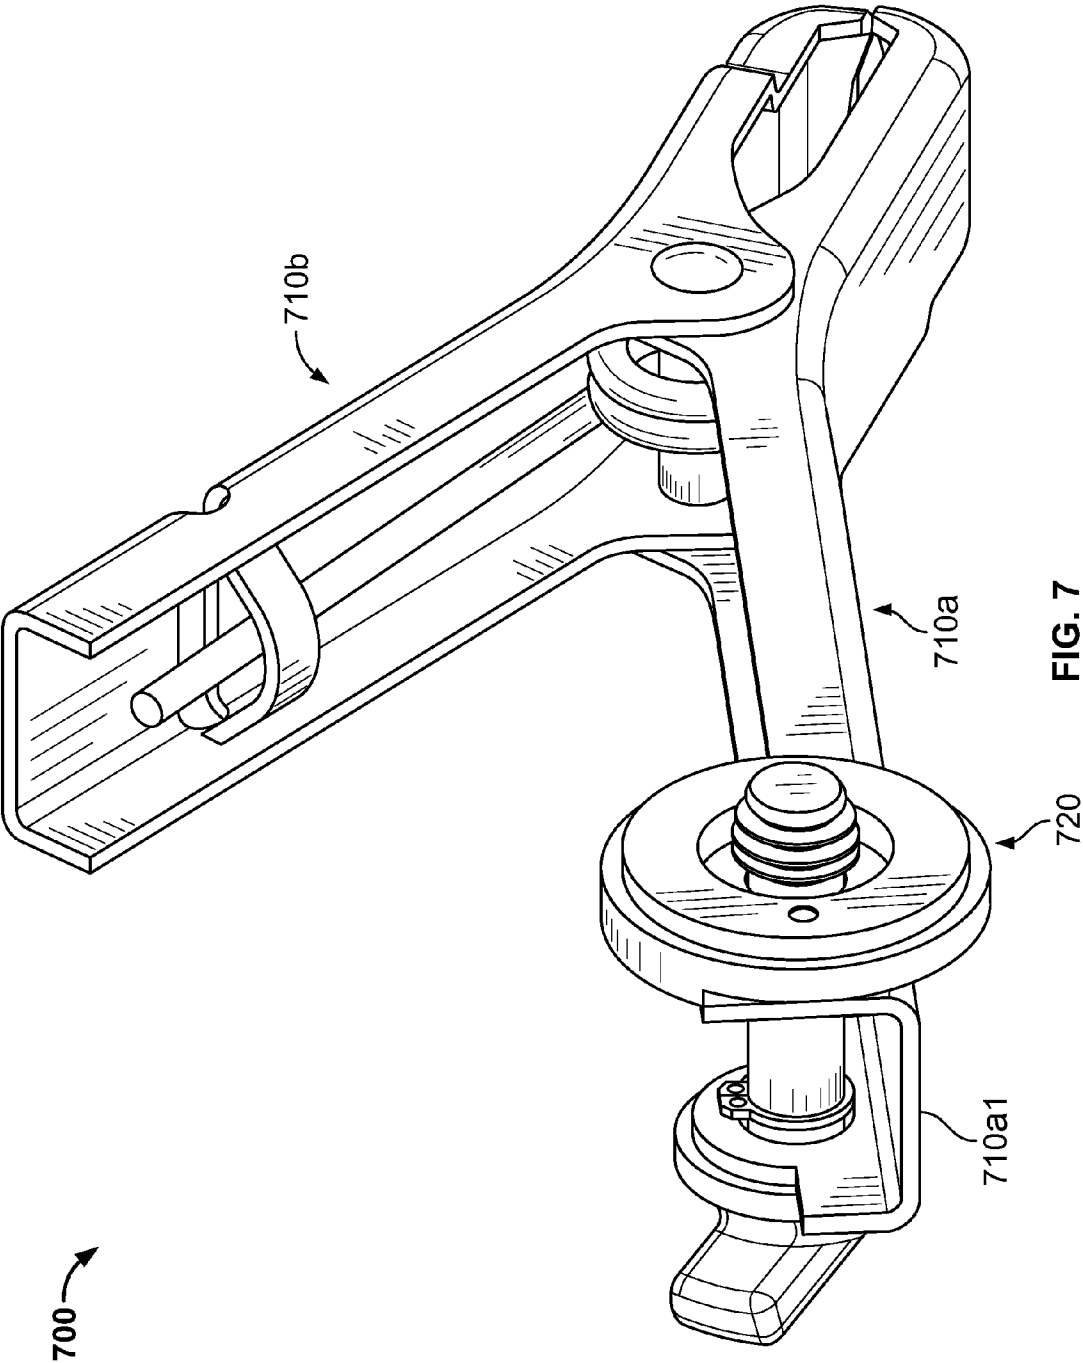
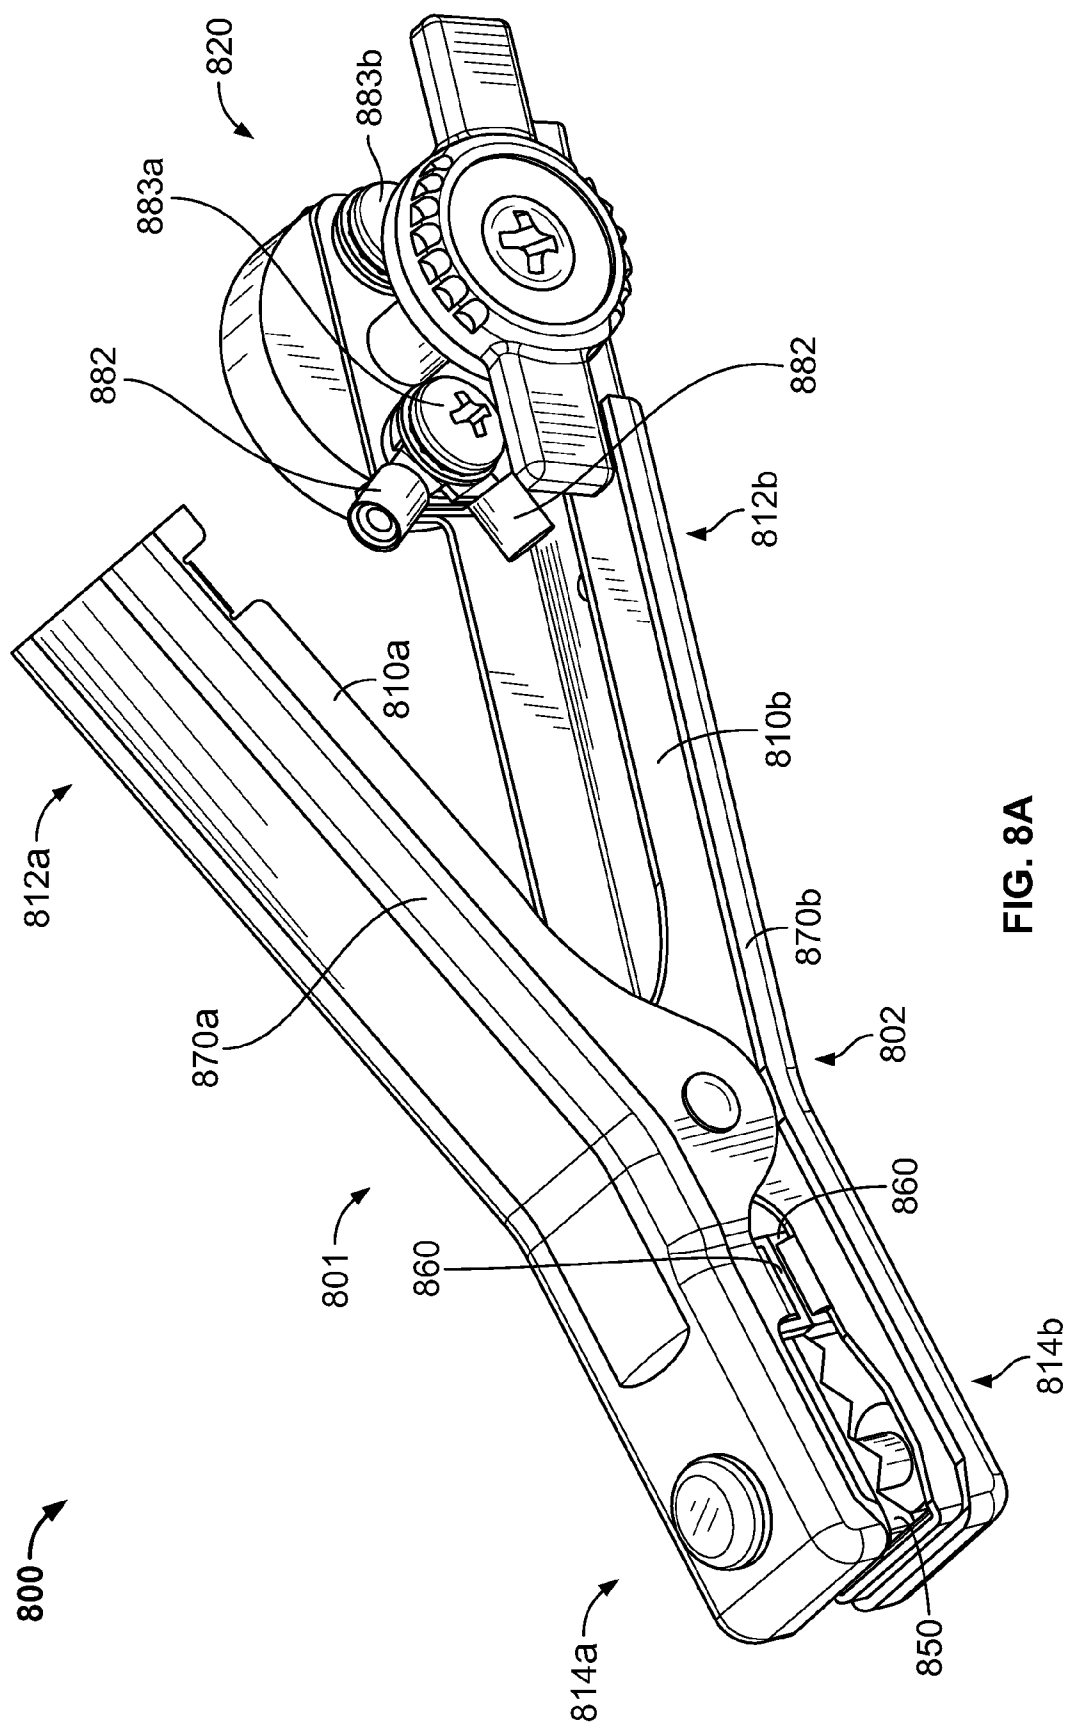


FIG. 6





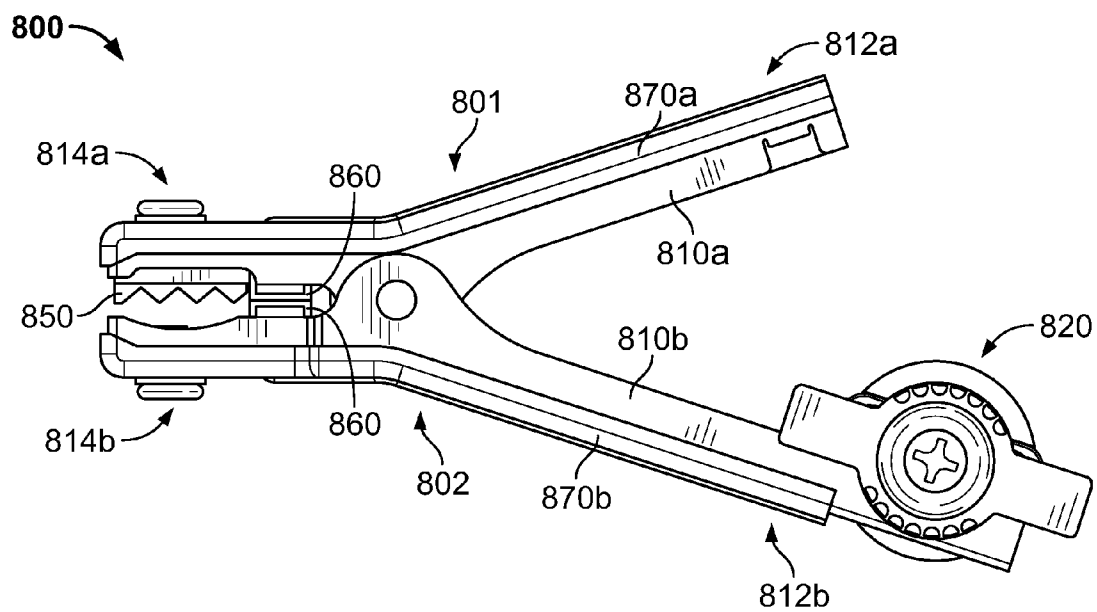


FIG. 8B

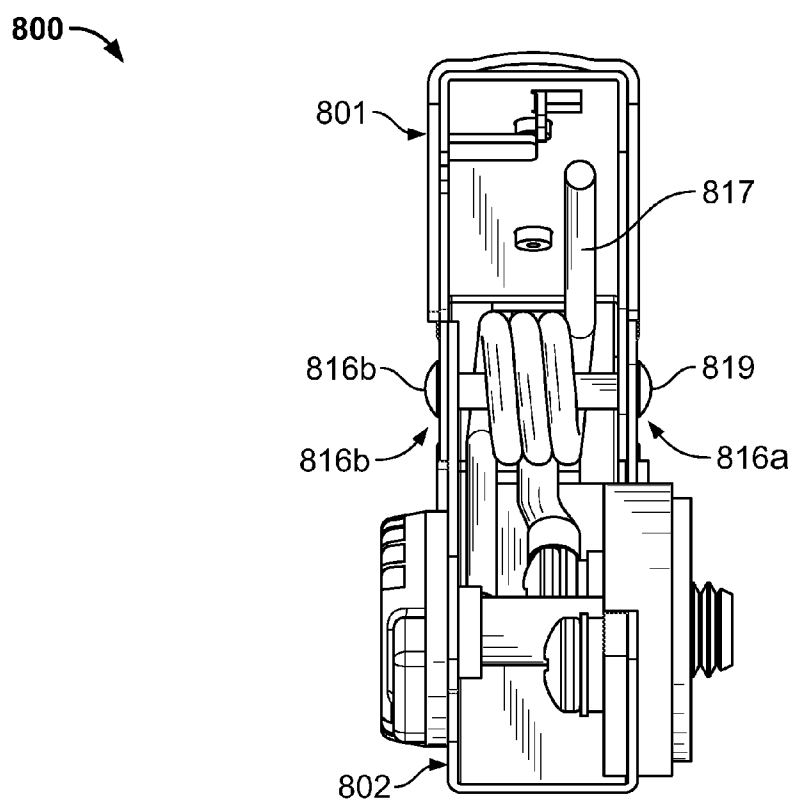


FIG. 8C

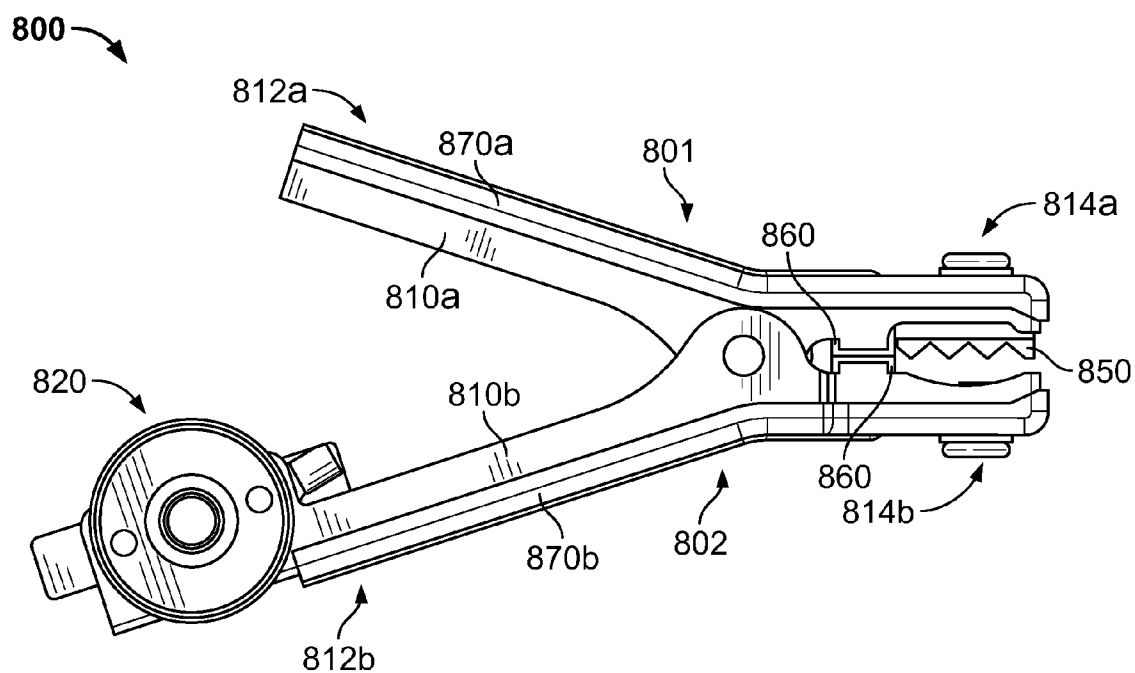


FIG. 8D

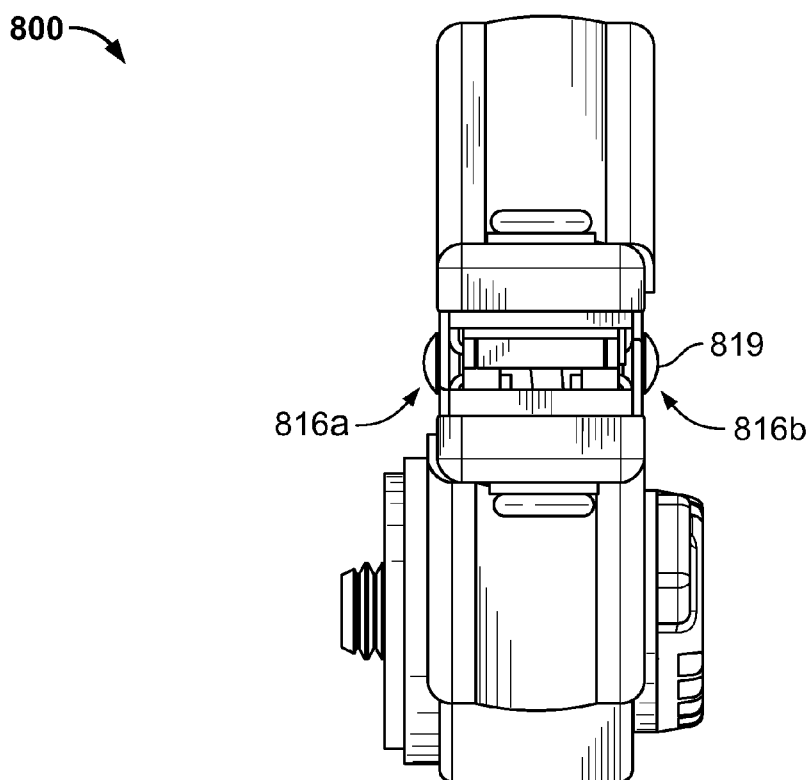
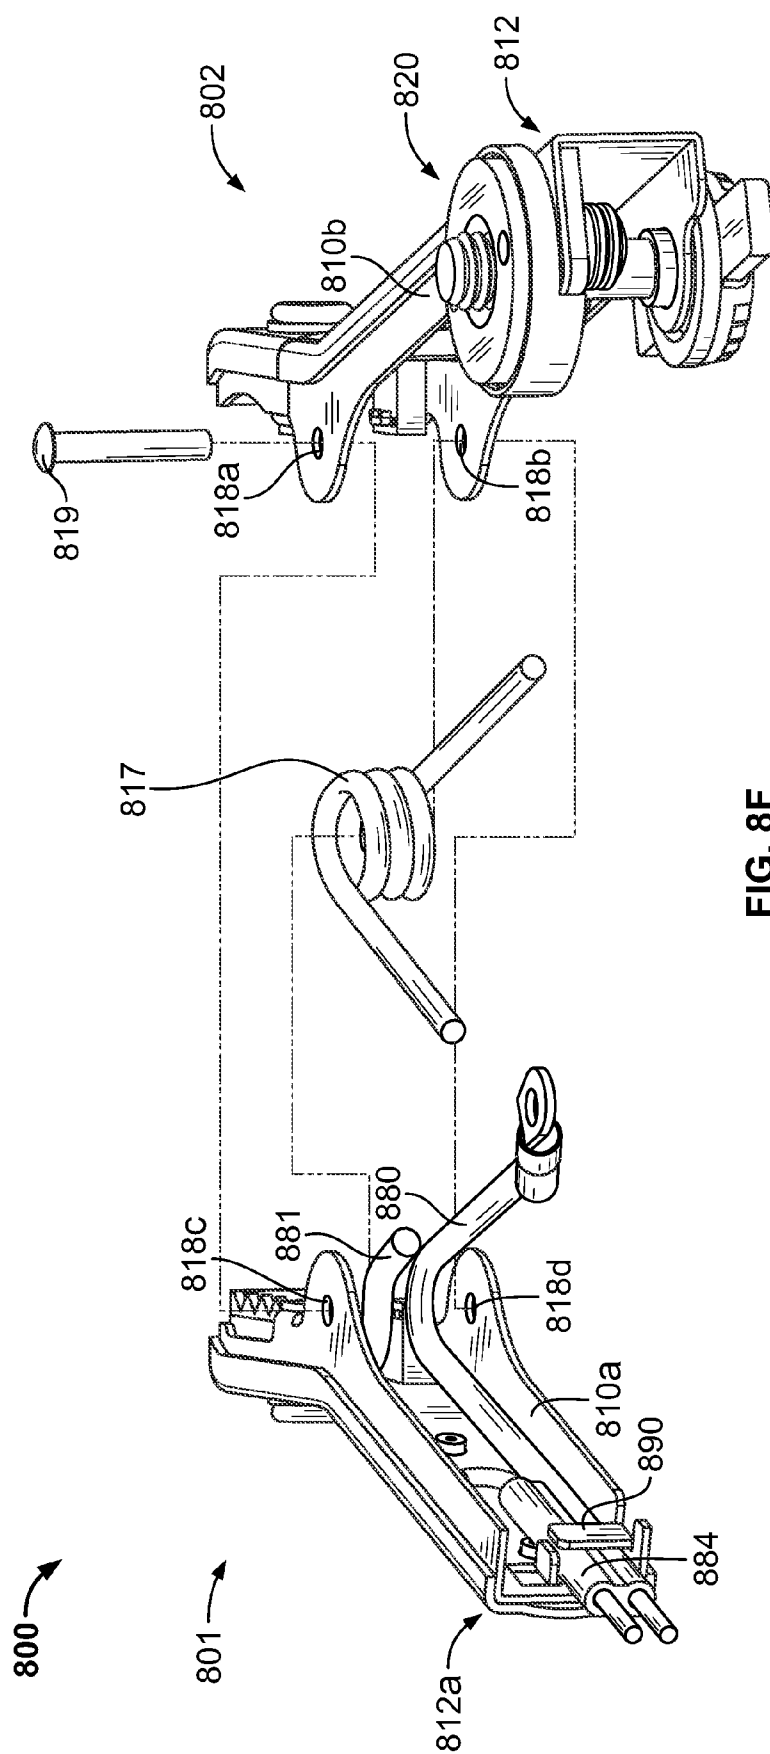


FIG. 8E



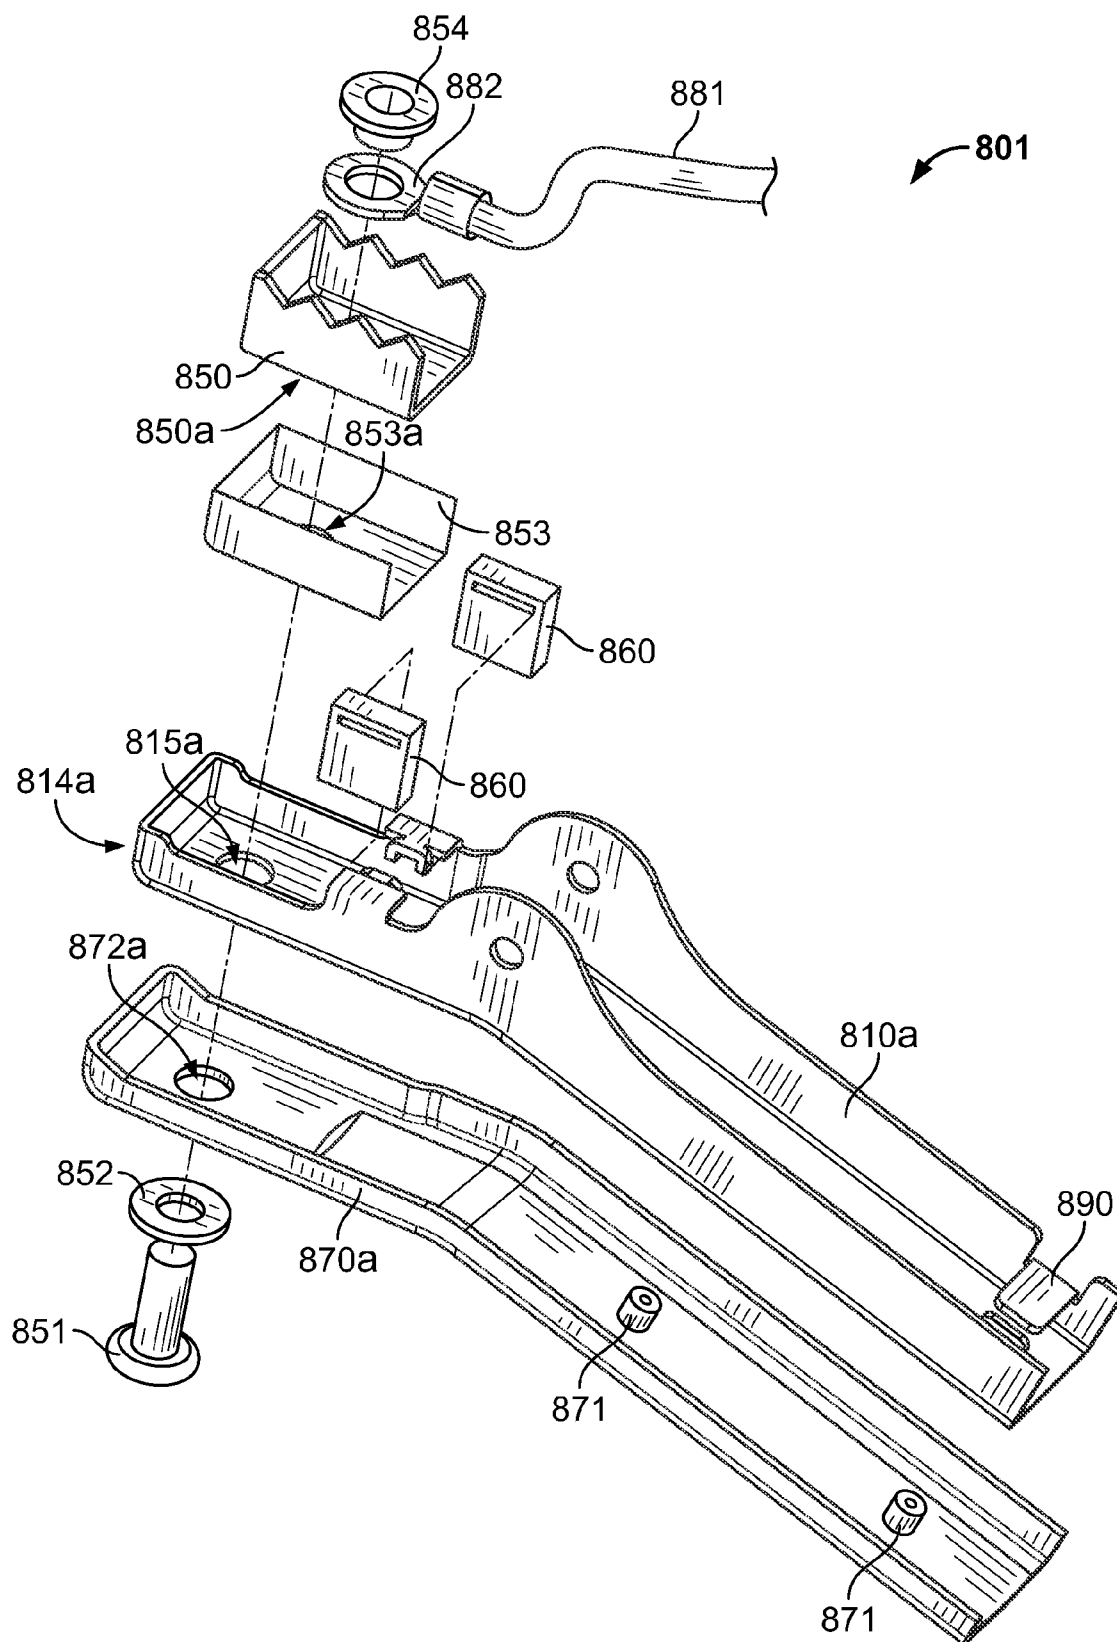


FIG. 8G

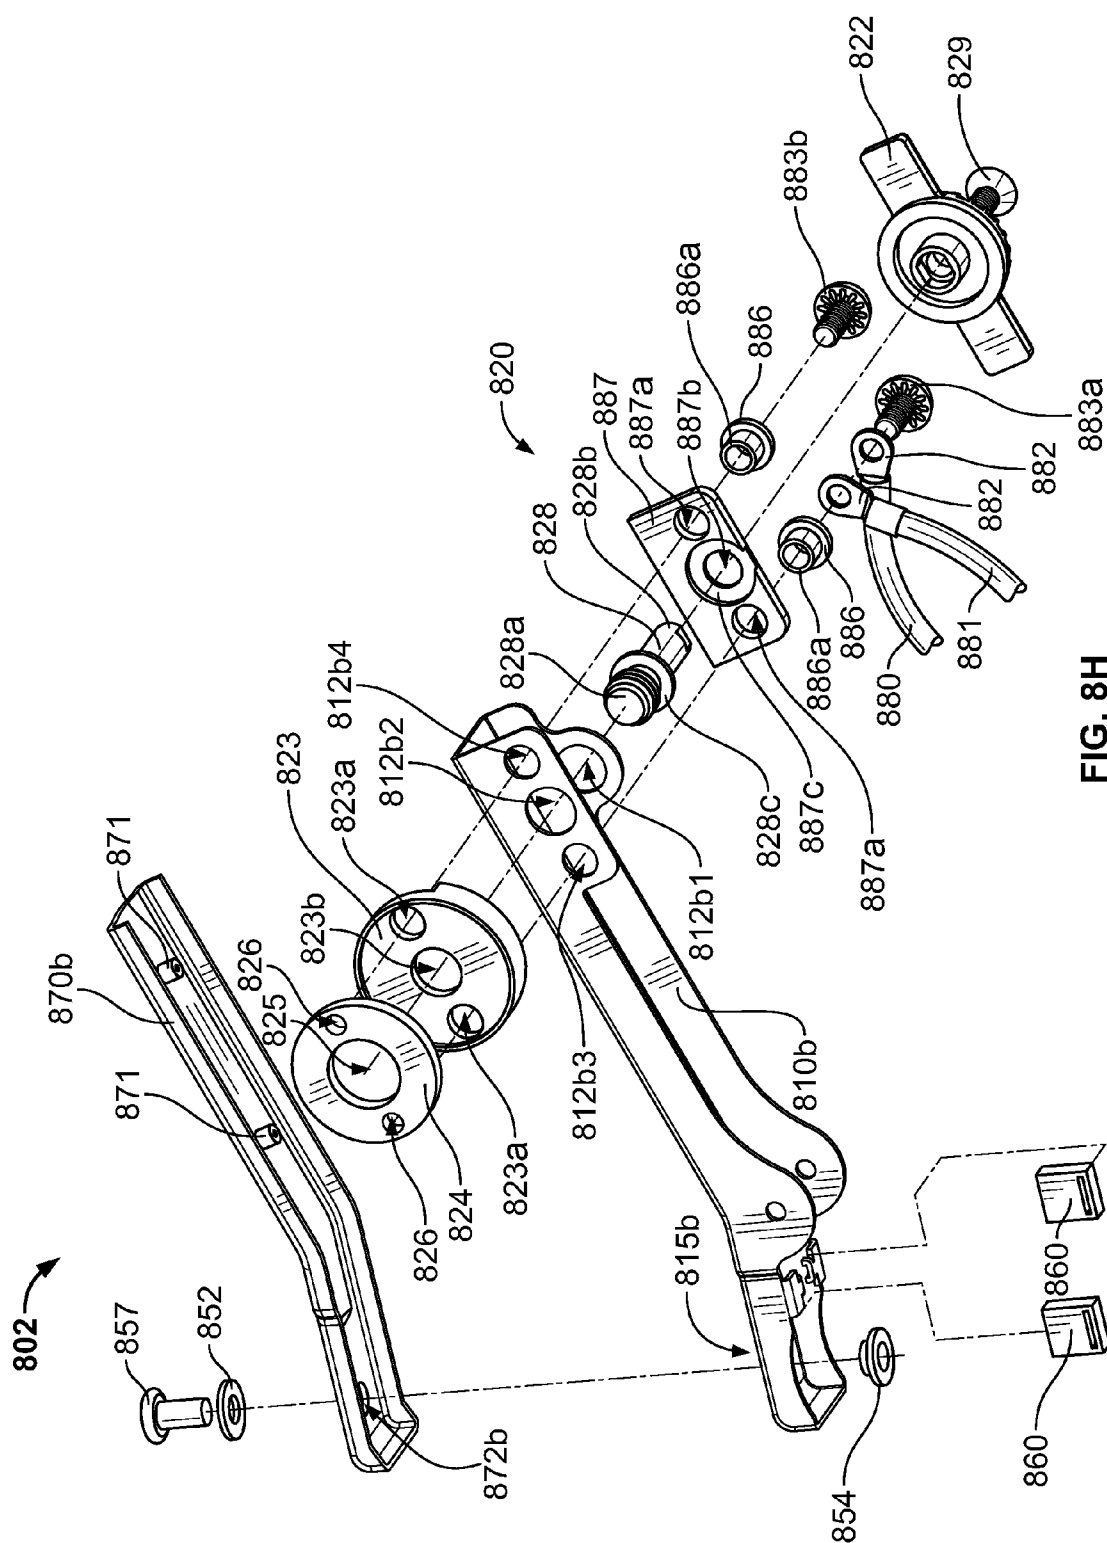
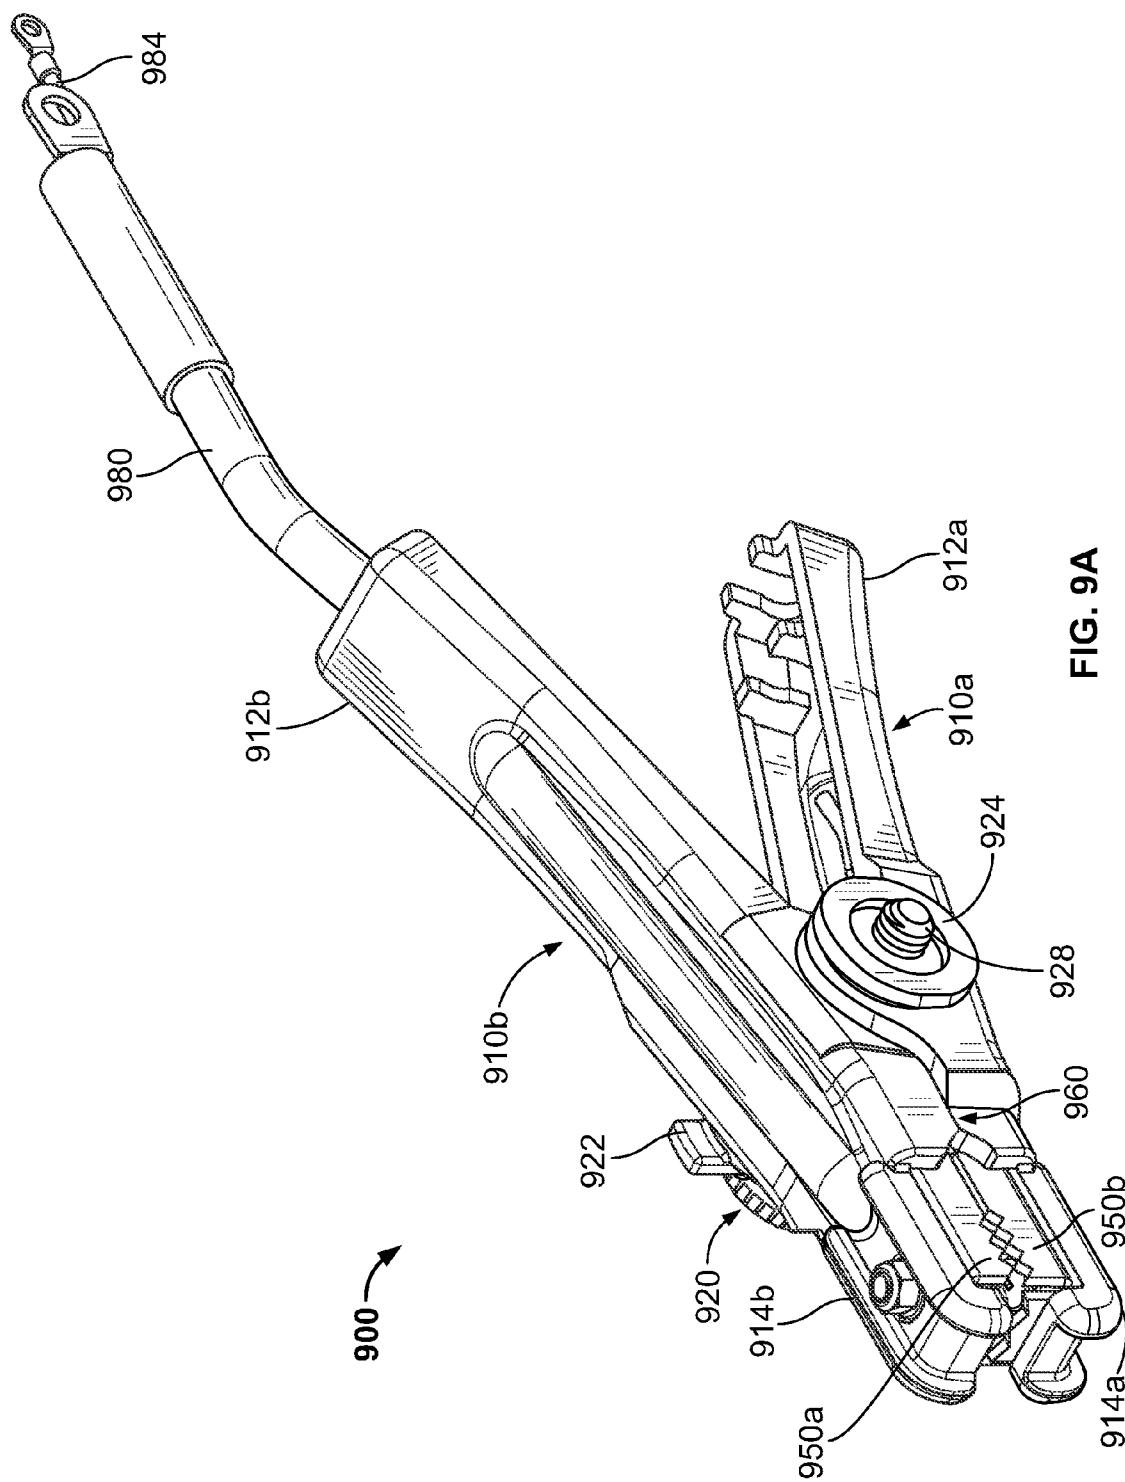


FIG. 8H



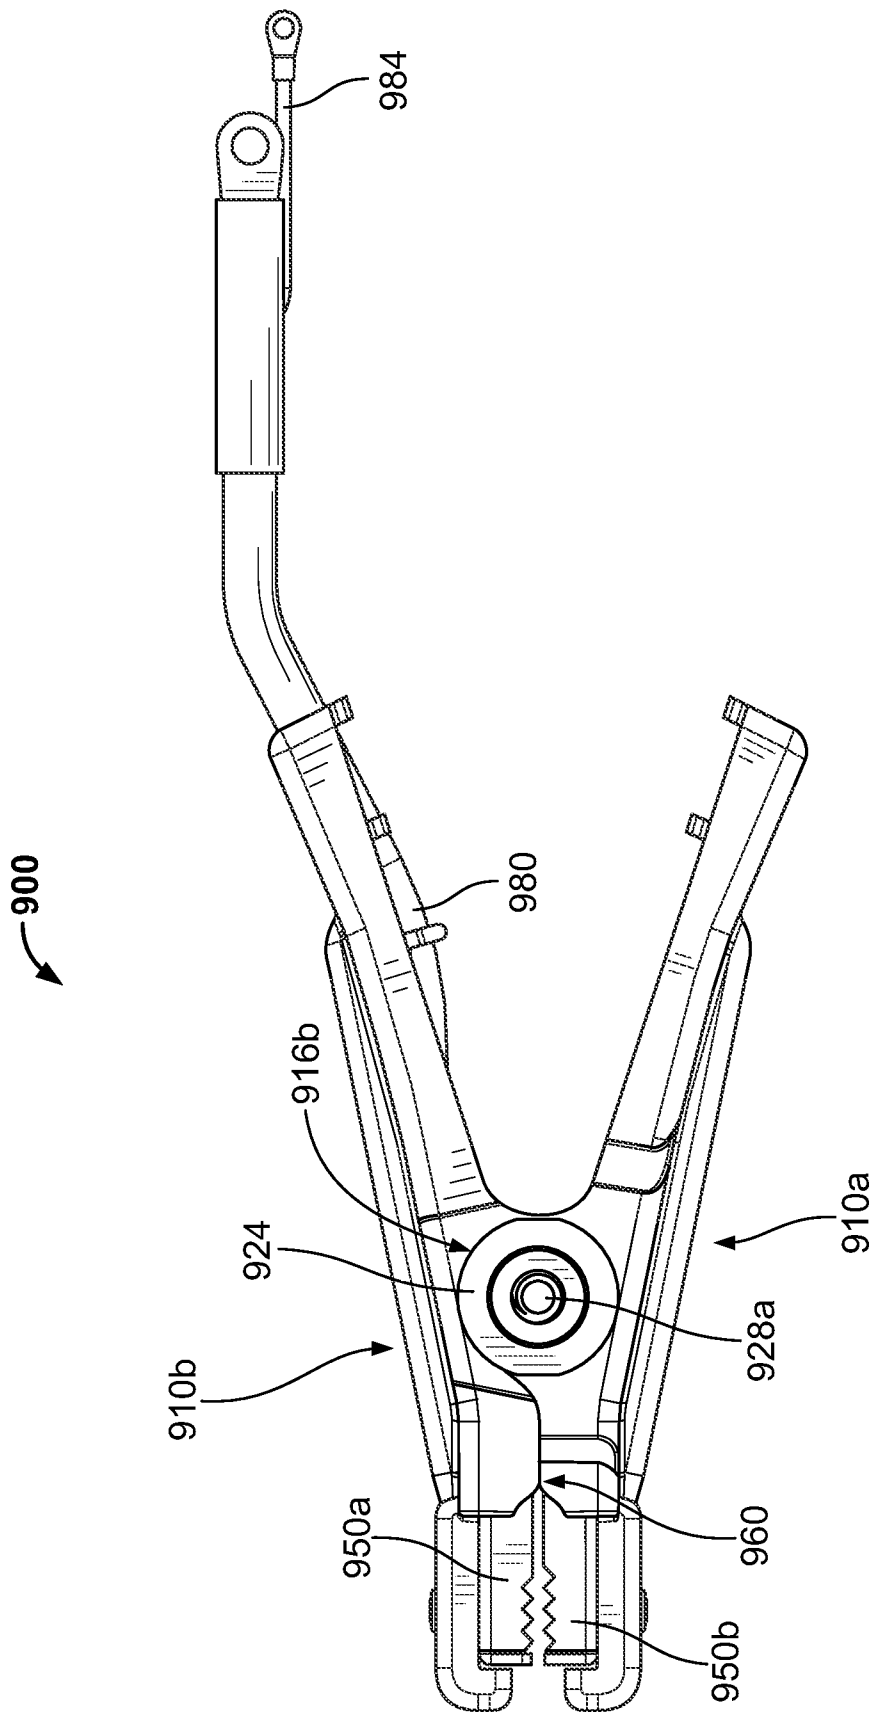


FIG. 9B

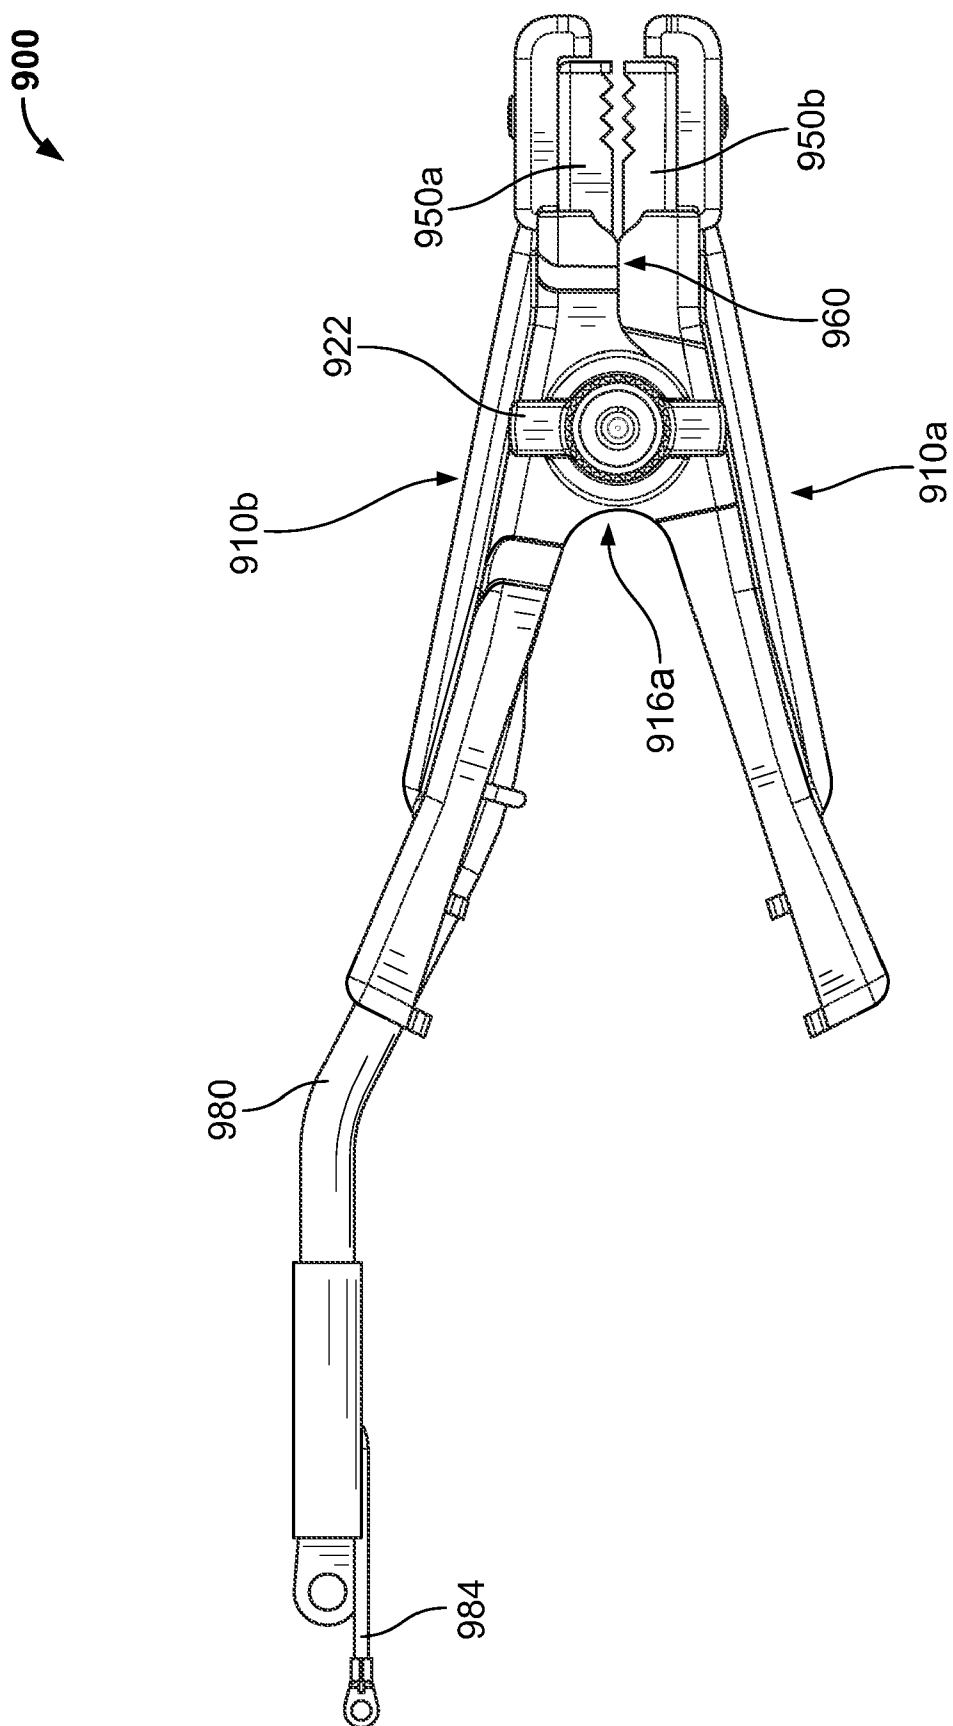


FIG. 9C

FIG. 9D

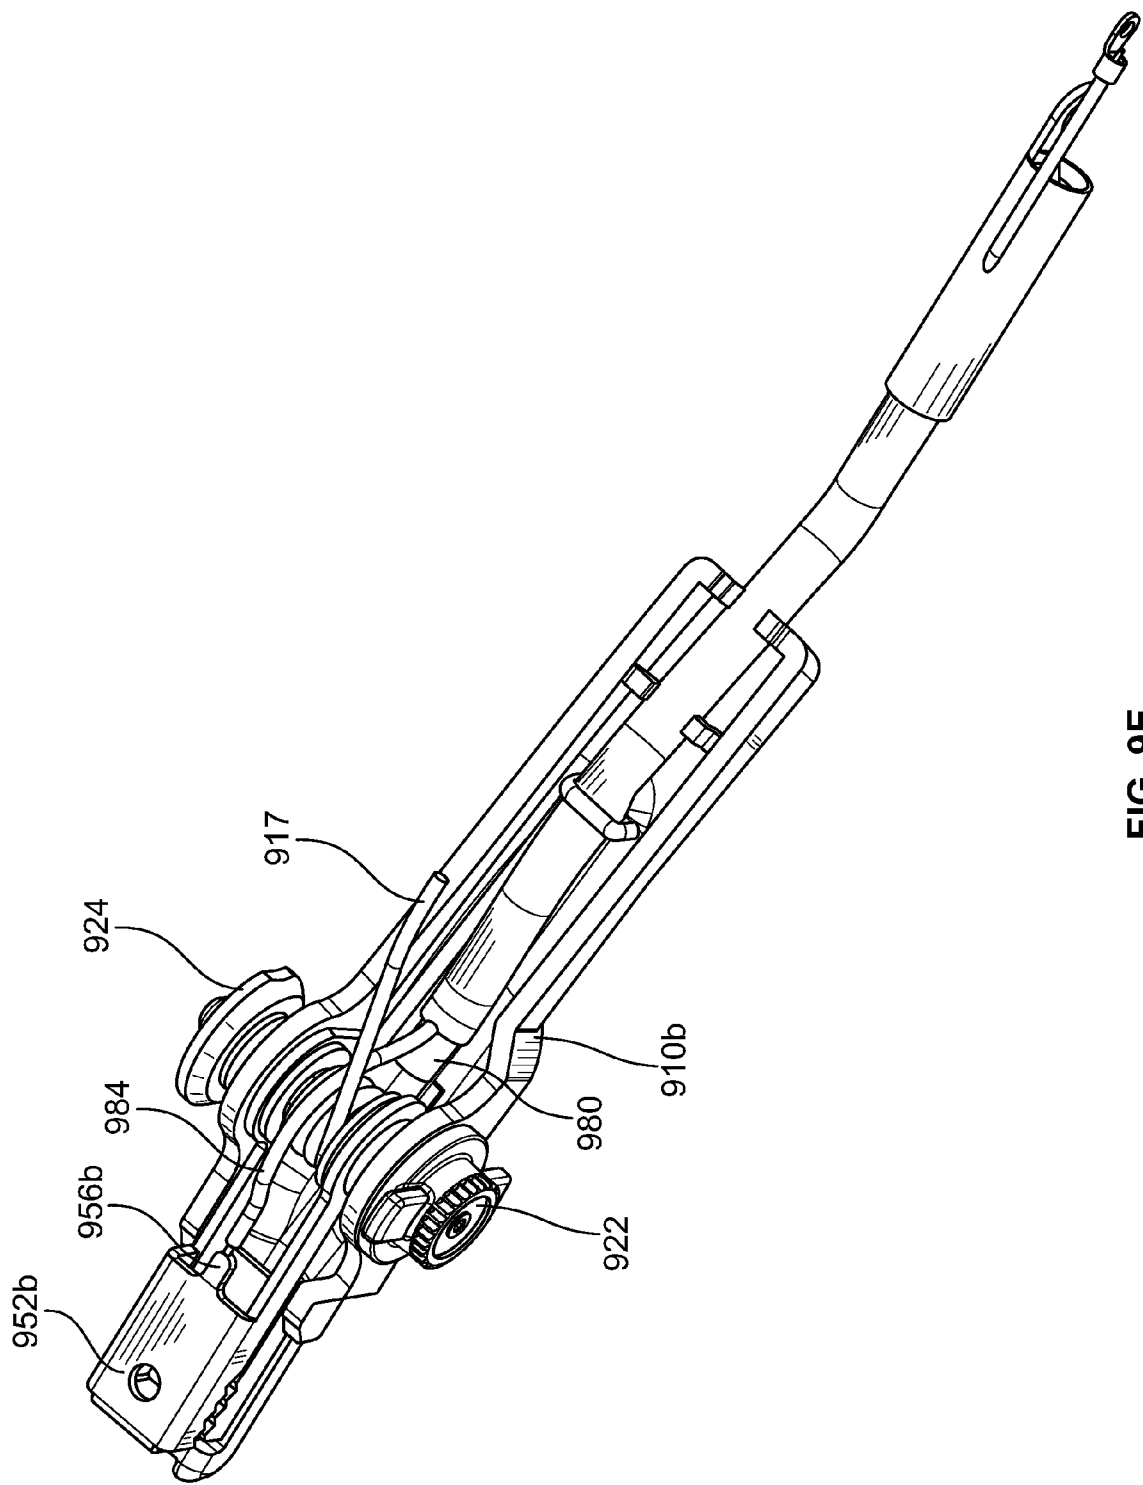


FIG. 9E

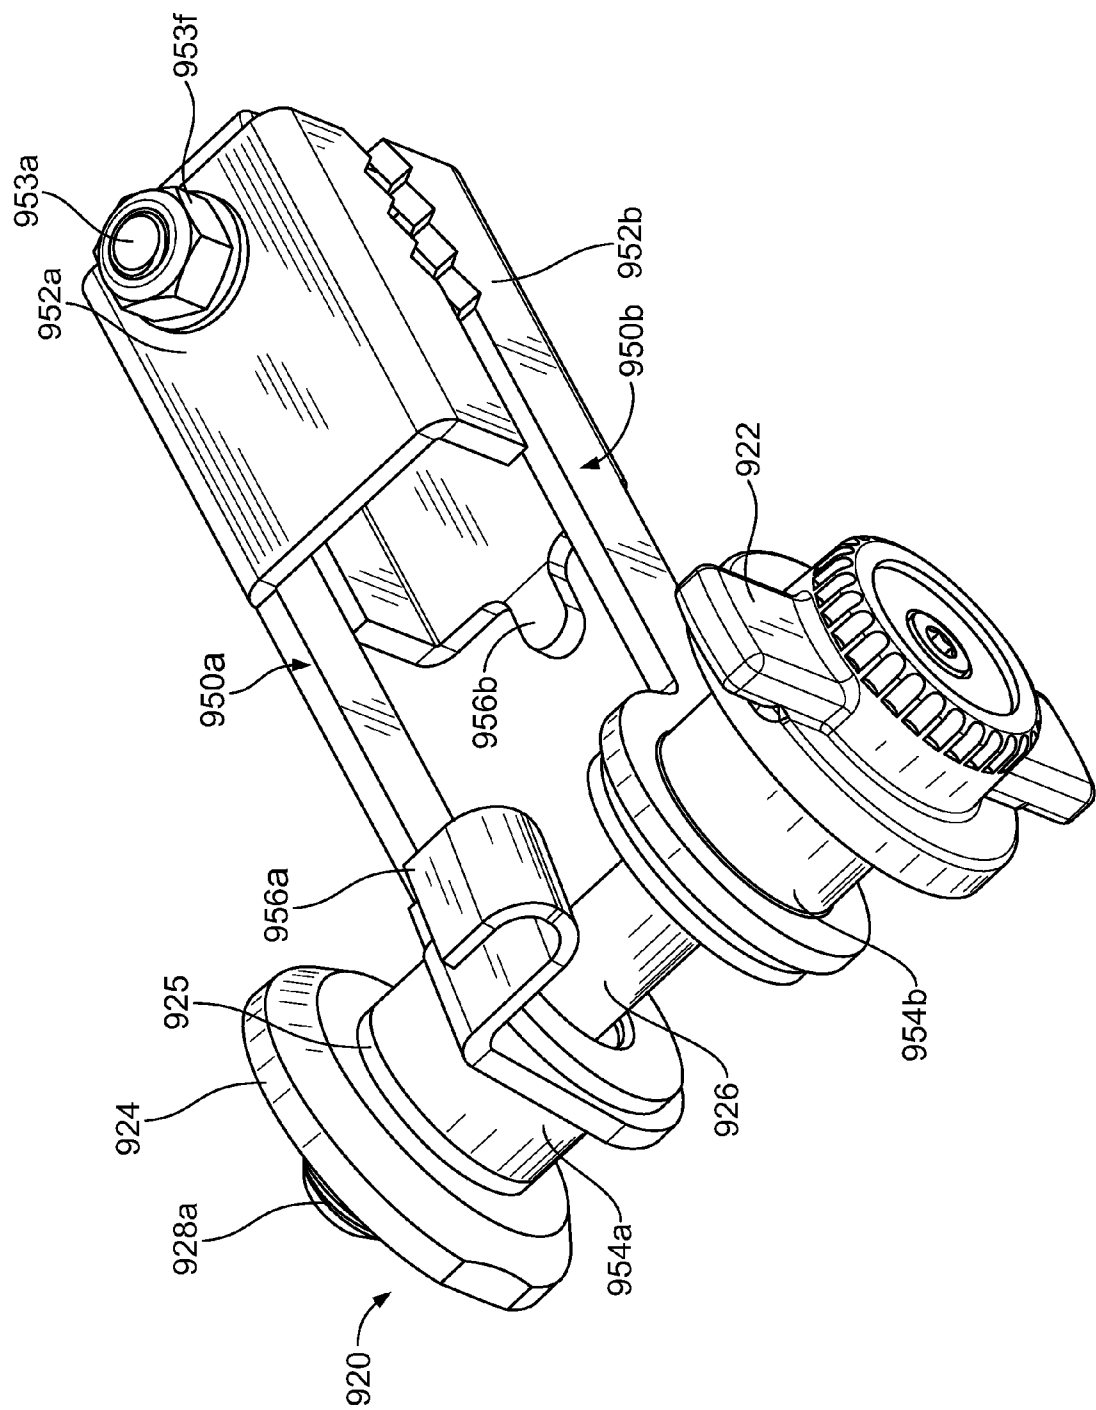


FIG. 9F

BATTERY CLAMP FOR USE WITH TOP POST AND SIDE POST BATTERIES AND METHODS FOR USING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 61/040,039, filed Mar. 27, 2008, and U.S. Provisional Application No. 61/091,964, filed Aug. 26, 2008, both of which are hereby incorporated by reference herein in their entireties.

FIELD OF THE INVENTION

[0002] The field of the invention relates generally to battery clamps for testing and/or charging batteries with top post and/or side post terminal connections. More particularly, the present invention relates to battery clamps with side post adapters and methods of using the same to charge and/or test batteries.

BACKGROUND OF THE INVENTION

[0003] In the automotive battery field, automotive technicians use battery clamps to electrically connect a battery to a charging/testing device. According to some embodiments, it is important for these battery clamps to have a secure physical and a secure electrical connection with the battery's terminals. A poor connection can result in damage to the battery, damage to the charging/testing device, injury to the operator, and it can impact the accuracy of test results. For example, poor connections can lead to the generation of heat, which can cause the battery terminals to melt and possibly cause the battery to explode in some cases.

[0004] Generally there are three types of automotive batteries: (1) top post terminal batteries, (2) side post terminal batteries, and (3) dual post terminal batteries (e.g. universal fit-type batteries). Top post terminal batteries include two lead post terminals that protrude upwardly from the top of the battery. Installing a top post terminal battery in a vehicle such as an automobile involves attaching electrical cables to each of the two lead post terminals. Even while a vehicle's electrical cables remain attached to a top post battery, the lead posts typically provide a sufficient surface for mechanically and electrically connecting a pair of standard battery clamps to perform a test and/or charge of the battery.

[0005] Side post terminal batteries, on the other hand, generally consist of two lead pad terminals on the side of the battery, each terminal having a threaded bore. The threaded bore is typically made of stainless steel to prevent corrosion of the battery terminal. Installing a side post terminal battery in a vehicle such as an automobile involves attaching electrical cables to each of the two lead pads using a steel bolt. The electrical cables generally have a loop attached to the end of the cable. The steel bolt fits through the loop and mates with the threaded bore portion of the terminal, keeping the cable in physical and electrical contact with the lead pad portion of the side post terminal battery.

[0006] Dual post terminal batteries are a combination of a top post terminal battery and a side post terminal battery. Dual post terminal batteries have four terminals, two on the top (e.g., top post terminals) and two on the side (e.g., side post terminals). Dual post terminal batteries are typically supplied with plastic or rubber covers to electrically insulate/cover the two terminals not in use.

[0007] To charge or test a top post terminal battery, for example, an automotive technician connects a pair of battery clamps onto two respective top post terminals protruding from the top of the battery. This traditional method of "clamping" a battery clamp onto each terminal is sufficient for testing/charging a top post terminal battery because there is typically enough surface area on the top post terminals to allow for a proper and secure connection, even when the battery remains connected to the vehicle.

[0008] To test or charge a side post terminal battery, for example, an automotive technician generally connects a pair of standard battery clamps onto steel bolts that hold a vehicle's electrical cables in contact with the side post terminals of the battery. While connecting standard battery clamps onto the steel bolts is possible, it is difficult and less accurate than other methods. Prior solutions to the minimal surface area problem involved, for example, an automotive technician disconnecting the steel bolts and electrical cables from the battery and using lead adapter posts. According to such a method, the technician screws a lead adapter post into each of the side post terminals of the battery. The lead adapter posts, when connected, essentially convert the side post terminal battery into a top post terminal battery, only having the posts on the side of the battery. The lead adapter posts are designed to provide a sufficient surface for attaching standard battery clamps. The technician can attach the lead adapter posts to the battery while the battery remains in the vehicle or after the battery has been removed from the vehicle.

[0009] However, lead adapter posts are small and are easily lost or misplaced in automotive repair/testing shops. Typically, when technicians lose or misplace their lead adapter posts, they often substitute a standard steel bolt to provide a method of attaching the standard battery clamps; however, the steel bolts only contact the threaded bore portion of the side post terminal. For example, FIG. 2a depicts a cross-sectional view of a side post battery 200 having a standard steel bolt 210 connected to a side post terminal 220. Noticeably, the steel bolt 210 does not physically contact the lead pad portion 222 of the side post terminal 220. Rather, the steel bolt 210 only makes contact with the stainless steel threaded bore portion 224 of the side post terminal 220. Such an arrangement can yield both inaccurate battery test results and also generate significant amounts of heat that can melt and destroy the side post battery 200. Conversely, FIG. 2b depicts a cross-sectional view of a side post battery 230 having a lead adapter post 240 connected to a side post terminal 250. Noticeably, the side post adapter 240 makes an electrical and physical connection with both a stainless steel threaded bore portion 254 and with a lead pad portion 252 of the side post terminal 250.

[0010] What is needed is a battery clamp that can easily, safely, and reliably connect to both top post terminal and side post terminal batteries without the necessity of an independent lead adapter post. What is also needed is a battery clamp that can connect to side post terminals and provide accurate battery testing results.

SUMMARY OF THE INVENTION

[0011] According to some embodiments, a battery clamp for use with (a) top post terminal connections and (b) batteries with side post terminal connections includes a first and a second jaw handle. The first and second jaw handles each have a handle portion and a clamping portion. The first and second jaw handles are pivotally coupled to each other and are

biased with the clamping portions in a closed position. The battery clamp further includes a first and second jaw member. The jaw members have a jaw clamp portion, a jaw pivot portion, and a jaw wire portion. The jaw pivot portion of the first jaw member and the jaw pivot portion of the second jaw member are both pivotally coupled to the first and second jaw handles. The battery clamp further includes, a load pad and a volt rod. The load pad has an aperture and is operatively coupled to the first jaw member. The volt rod is operatively coupled to the second jaw member and protrudes through the aperture of the load pad.

[0012] According to some embodiments, a battery clamp for use with (a) top post terminal connections and (b) batteries with side post terminal connections includes a first and a second jaw handle. The first and second jaw handles each have a handle portion and a clamping portion. The first and second jaw handles are pivotally coupled to each other and are biased with the clamping portions in a closed position. The battery clamp further includes a side post adapter. The side post adapter is coupled to the handle portion of one of the jaw handles. The side post adapter includes a load pad and a volt rod. The load pad has an aperture, through which a portion of the volt rod protrudes.

[0013] According to some embodiments a method of testing a battery having side post terminal connections includes the acts of providing a pair of battery clamps, each having a side post adapter coupled thereto. The side post adapters each include a load pad and a volt rod. The method further including the acts of inserting each of the volt rods into a respective side post terminal in the battery and rotating each of the volt rods to cause the load pads to become electrically coupled to a respective lead pad on the battery. The method also including the acts of applying a load to the battery and measuring at least one of a current and a voltage of the battery.

[0014] According to some embodiments, a method of charging a battery having side post terminal connections includes the acts of providing a pair of battery clamps. The battery clamps each have a side post adapter coupled thereto. Each side post adapter includes a load pad and a volt rod. The method further includes the acts of inserting each of the volt rods into a respective side post terminal in the battery, rotating each of the volt rods to cause the load pads to become electrically coupled to a respective lead pad on the battery, and applying a charge to the battery.

[0015] According to some embodiments, a method of testing a battery having top post terminal connections includes the acts of providing a pair of battery clamps. The battery clamps each have a side post adapter coupled thereto. Each side post adapter includes a load pad and a volt rod. The method further includes the acts of clamping each of the battery clamps onto a respective top post terminal on the battery, applying a load to the battery, and measuring at least one of a current and a voltage of the battery.

[0016] According to some embodiments, a battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections includes a first and second jaw handle. Each of the first and second jaw handles include a handle portion and a clamping portion. The first and second jaw handles are pivotally coupled together. The jaw handles are biased with the clamping portions in a substantially closed position. The battery clamp further includes a jaw member insulator coupled to the clamping portion of the first jaw handle and a jaw member coupled to the jaw member insulator. The jaw member insulator electrically

insulates the jaw member from the first and second jaw handles. The battery clamp further includes a load pad electrically coupled to the jaw member, the load pad having an aperture, and a volt rod electrically coupled to the first and second jaw handles. A portion of the volt rod protrudes through the aperture of the load pad.

[0017] According to some embodiments, a battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections includes a first and second jaw handle. The first and second jaw handles each have a handle portion and a clamping portion. The first and second jaw handles are pivotally coupled together and are biased with the clamping portions in a substantially closed position, the clamping portions being configured to be coupled to a top-post terminal of a top-post battery. The battery clamp further includes a jaw member coupled to the clamping portion of the first jaw handle and a side post adapter configured to be coupled to a side-post terminal of a side-post battery. The side post adapter includes a load pad and a volt rod. The battery clamp further includes a volt wire electrically coupled to the volt rod, a load wire electrically coupled to the load pad, and a load jumper wire electrically coupled between the load pad and the jaw member.

[0018] According to some embodiments, a battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections includes a first and second jaw handle. The first and second jaw handles each have a handle portion and a clamping portion. The first and second jaw handles are pivotally coupled to each other and are biased with the clamping portions in a substantially closed position. The clamping portions are configured to be coupled to a top-post terminal of a top-post battery. The battery clamp further includes a jaw member insulator coupled to the clamping portion of the first jaw handle and a jaw member coupled to the jaw member insulator, the jaw member being electrically insulated from the first and second jaw handles. The battery clamp further includes a side post adapter that is coupled to the handle portion of the first jaw handle. The side post adapter includes a load pad and a volt rod, the load pad having an aperture, a portion of the volt rod protruding through the aperture of the load pad.

[0019] Additional aspects and other advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] In the following, certain embodiments of the invention will be described with reference to the drawings, wherein:

[0021] FIG. 1A is a side view of one side of a battery clamp according to some embodiments of the present disclosure;

[0022] FIG. 1B is a side view of the other side of the battery clamp of FIG. 1A;

[0023] FIG. 1C is a rear view of the battery clamp of FIG. 1A;

[0024] FIG. 1D is a partial perspective view of the battery clamp of FIG. 1A;

[0025] FIG. 1E is an exploded view of the battery clamp of FIG. 1A;

[0026] FIG. 1F is a side view of the battery clamp of FIG. 1A connected to a testing and/or charging device;

[0027] FIG. 1G is a front view of a load pad according to some embodiments of the present disclosure;

[0028] FIG. 2A is a cross-sectional view of a side post terminal having a steel bolt connected thereto;

[0029] FIG. 2B is a cross-sectional view of a side post terminal having a side post adapter connected thereto;

[0030] FIG. 3 is a perspective view of a battery having side post terminals;

[0031] FIG. 4 is a schematic view of a pair of battery clamps coupled to a side post battery and to a testing and/or charging device according to some embodiments of the present disclosure;

[0032] FIG. 5A is a side view of one side of a battery clamp according to some embodiments of the present disclosure;

[0033] FIG. 5B is a front view of the battery clamp of FIG. 5A;

[0034] FIG. 5C is a side view of the other side of the battery clamp of FIG. 5A;

[0035] FIG. 5D is a rear view of the battery clamp of FIG. 5A;

[0036] FIG. 6 is an enlarged perspective view of the front portion of the battery clamp of FIG. 5A;

[0037] FIG. 7 is a perspective view of a battery clamp according to some embodiments of the present disclosure;

[0038] FIG. 8A is a perspective view of a battery clamp according to some embodiments of the present disclosure;

[0039] FIG. 8B is a side view of one side of the battery clamp of FIG. 8A;

[0040] FIG. 8C is a rear view of the battery clamp of FIG. 8A;

[0041] FIG. 8D is a side view of the other side of the battery clamp of FIG. 8A;

[0042] FIG. 8E is a front view of the battery clamp of FIG. 8A;

[0043] FIG. 8F is a partial exploded view of the battery clamp of FIG. 8A;

[0044] FIG. 8G is an exploded view of a load handle assembly of the battery clamp of FIG. 8A according to some embodiments;

[0045] FIG. 8H is an exploded view of a volt handle assembly of the battery clamp of FIG. 8A according to some embodiments;

[0046] FIG. 9A is a perspective view of a battery clamp according to some embodiments of the present disclosure;

[0047] FIG. 9B is a side view of one side of the battery clamp of FIG. 9A;

[0048] FIG. 9C is a side view of the other side of the battery clamp of FIG. 9A;

[0049] FIG. 9D is an exploded view of the battery clamp of FIG. 9A;

[0050] FIG. 9E is a partial perspective view of battery clamp of FIG. 9A; and FIG. 9F is a partial perspective view of a side post adapter and jaw member assembly of the battery clamp of FIG. 9A.

[0051] While the invention is susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifi-

cations, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0052] According to certain embodiments, FIGS. 1A-F, depict a battery clamp 100 for testing and charging both batteries with top post terminal connections and batteries with side post terminal connections. The battery clamp 100 includes a first jaw handle 110a, a second jaw handle 110b, a first jaw member 150a, a second jaw member 150b, and a side post adapter assembly 120. The first and second jaw handles 110a,b each have a handle portion 112a,b and a clamping portion 114a,b. It is contemplated that according to certain embodiments, the first and second jaw handles 110a,b can be formed from various materials, including but not limited to, steel, carbon, copper, iron, aluminum, plastic and combinations thereof.

[0053] According to some embodiments, the first and second jaw handles 110a,b are formed from an insulating or non-conductive material such as plastic because, for example, plastic jaw handles provide a simplified design and added safety. Similarly, plastic jaw handles electrically insulate the jaw handles from one another. For example, according to some embodiments, the first and second jaw handles 110a,b are made from a non-conductive material (e.g. plastic) to prevent a pair of battery clamps (e.g. two of battery clamp 100) from touching and shorting one another while connected to respective terminals of a battery. Similarly, non-conductive jaw handles prevent a battery clamp from causing a short should the handles touch a chassis of, for example, an automobile.

[0054] According to certain embodiments, the first and second jaw handles 110a,b are substantially the same in design. According to certain embodiments, the first and the second jaw handles 110a,b each further include at least one aperture. In certain embodiments, as shown in FIG. 1E, the first jaw handle 110a includes a first aperture 118a and a second aperture 118b, and the second jaw handle 110b includes a third aperture 118c and a fourth aperture 118d. According to some embodiments, when the first jaw handle 110a is attached or coupled to the second jaw handle 110b, the first and the third apertures 118a,c are aligned with each other to form a first pivot point 116a, as shown in FIG. 1C. Similarly, the second and the fourth apertures 118b,d become aligned to form a second pivot point 116b. It is contemplated that various combinations exist for the number and location of apertures for the jaw handles. For example, in certain embodiments, a first and second jaw handle may contain two apertures each. In certain other embodiments, a first jaw handle may contain two apertures and a second jaw handle may contain one aperture. In some embodiments, the jaw handles do not have apertures or do not have apertures at a pivot point between the two handles. In these embodiments, a side post adapter assembly can be coupled to, for example, a handle portion of either of the two jaw handles or above or below a pivot portion of the two jaw handles. For example, FIG. 7 is a perspective view of a battery clamp 700 according to some embodiments of the present disclosure. The battery clamp 700 comprises a first and a second jaw handle 710a,b and a side post adapter assembly 720. As depicted in FIG. 7, the side post adapter assembly 720 is coupled to the first jaw handle 710a near an end 710a1 of the first jaw handle 710a.

[0055] In certain embodiments, the side post adapter assembly 120 is attached or coupled to the battery clamp 100 through the first and second pivot points 116a,b. The connection of the side post adapter assembly 120 pivotally connects the two jaw handles 110a,b. In certain embodiments, the jaw handles 110a,b are biased in closed position by a biasing member 117, as shown in FIGS. 1C, 1D, and 1E. The biasing member 117 biases the clamping portions 114a,b towards each other. It is contemplated that the biasing member 117 can be of a variety of configurations such as, but not limited to, a torsion spring, a coil spring, a leaf spring, or a memory spring. To open the clamping portions 114a,b, for example, an operator squeezes the handle portions 112a,b together. According to some embodiments, the biasing member 117 is located between the first and second jaw member 150a,b (described in detail below). According to some embodiments, a spacer 140 (described in detail below) fits through a portion of the biasing member 117. It is contemplated that according to some embodiments, a side post adapter assembly can be attached to a battery clamp at various other locations, including but not limited to, the handle portion of one of the jaw handles.

[0056] Referring to FIG. 1E, according to certain embodiments, the side post adapter assembly 120, as shown in FIGS. 1A, 1C, and 1D, includes a handle 122, a load pad 124, an insulating member 126, and a volt rod 128. The handle 122, also shown in FIGS. 1B-F, can be formed in a variety of shapes, for example, a knob, a turn screw, a wheel, or a sprocket. In certain embodiments, the handle 122 contains an aperture to receive a portion of the volt rod 128. The handle 122 can be formed from various materials including, but not limited to, plastic, carbon, copper, brass, steel, and/or aluminum. According to some embodiments, the handle 122 is formed from a non-conductive material, such as a plastic material to electrically insulate the volt rod 128, thereby inhibiting the battery clamp 100 from shorting through the handle 122 should the handle 122 come in contact with, for example, a chassis of an automobile during use, as well as, insulating an operator.

[0057] Referring to FIG. 1G, according to some embodiments, the load pad 124 has a generally circular face 124a with an aperture 125a. The aperture 125a is configured to receive the insulating member 126 and a portion of the volt rod 128. In certain embodiments, the load pad's face 124a contains a recess 124c adapted to mate with a portion of the insulating member 126.

[0058] Referring back to FIG. 1E, according to some embodiments, the load pad 124 is electrically connected with the first jaw member 150a. In certain embodiments, the load pad 124 includes a threaded portion 124b configured to electrically connect with the first jaw member 150a. It is contemplated that in certain embodiments, the load pad 124 is electrically connected to the first jaw member 150a by a threaded connection, a pin connection, a solder connection, a wire connection, and/or a press fit connection.

[0059] It is contemplated that in some embodiments, the load pad 124 is configured to be electrically and mechanically connected to the first jaw member 150a. According to some embodiments, the load pad 124 can optionally include a second aperture 125b, as shown in FIG. 1G. The second aperture 125b may receive a pin 132, as shown in FIG. 1E. It is contemplated that the pin 132 can be, for example, a spring loaded pin. In certain embodiments, the pin 132 fits through

the second aperture 125b and into the first jaw member 150a to inhibit the load pad 124 from coming unthreaded from the first jaw member 150a.

[0060] It is contemplated that the load pad 124 can be formed from a variety of electrically conducting materials including, but not limited to, brass, carbon, copper, and/or steel. According to some embodiments, the load pad 124 is formed from brass due to the electrical conductivity characteristics, strength, and soldering ability of brass. It is contemplated that the load pad 124 can be formed in any of a variety of shapes that are suitable for forming an electrical connection with a lead pad of a side post terminal of a battery. FIG. 3 depicts a typical lead pad 322 of a side post terminal battery 300.

[0061] Referring back to FIG. 1E, according to some embodiments, the volt rod 128 has a generally cylindrical shape with two opposing ends. The first end 128a includes a threaded portion and the second end 128b is substantially smooth. According to some embodiments, the volt rod 128 is electrically connected with the second jaw member 150b. The threaded portion 128a, also shown in FIGS. 1A and 1C, is adapted to mate with, for example, a side post terminal 320 of the battery 300. According to some embodiments, the first end 128a, having the threaded portion, is adapted to mate with an inner threaded bore portion 324 of the side post terminal 320 of the battery 300 whereby the threaded portion may be screwed into the threaded bore portion 324 of the side post terminal 320.

[0062] The volt rod 128 can be formed from any of a variety of electrically conducting materials including, but not limited to, brass, copper, steel, and/or stainless steel. According to some embodiments, the volt rod 128 is formed from one piece of stainless steel due to its resistance to rusting and/or corrosion. Specifically, stainless steel is a suitable material for a volt rod because a minimal amount of current is pulled through the volt rod during testing, which facilitates accurately measuring voltage differentials. According to some embodiments, the volt rod 128 is formed from more than one conducting material. For example, the first end 128a can be formed from stainless steel while the second end 128b can be formed from copper.

[0063] According to some embodiments, the handle 122 is rigidly, mechanically connected to the volt rod 128 such that when the handle 122 is turned, the volt rod 128 turns. According to some embodiments, the second end 128b of the volt rod 128 is configured to mechanically and electrically connect with a volt pad 130, as shown in FIG. 1E. According to certain embodiments, the volt rod 128 can be configured to connect with the volt pad 130 via a wedge connection, a screw connection, a pin connection, a key connection, a press fit connection, and/or a solder connection. For example, the volt rod 128 may be keyed with a notch for mating with the volt pad 130.

[0064] In certain embodiments, the second end 128b may have an inner threaded portion adapted to receive a screw 129, as shown in FIG. 1E. According to some embodiments, the screw 129 can be of any of a variety of lengths and have any of a variety of thread counts sufficient to secure the handle 122 to the volt rod 128 such that when the handle 122 rotates, the volt rod 128 rotates. According to some embodiments, the screw 129 secures the volt rod 128 to the volt pad 130. In certain embodiments, it is contemplated that the side post adapter assembly 120 does not include a screw 129, but that the second end 128b of the volt rod 128 is connected to the

handle **122** by a threaded connection, a pin connection, a solder connection, a press fit connection, a wedge connection, and/or a key connection.

[0065] According to some embodiments, the volt pad **130** is configured to fit within a groove or lip in the handle **122**. In certain embodiments, the volt pad **130** is coupled to the handle **122** such that when the handle **122** is securely coupled to the volt rod **128**, the handle **122** forces the volt pad **130** into good electrical contact with the second jaw member **150b**. The volt pad **130** provides additional surface area that electrically connects the volt rod **128** with the second jaw member **150b**, in addition to the surface area of the volt rod **128** itself. The volt pad **130** eliminates or reduces the problem of grease and/or dirt accumulating between the volt rod **128** and the second jaw member **150b** and impeding or interfering with the electrical connection between the volt rod **128** and the second jaw member **150b** by providing additional electrical contact surface area.

[0066] The insulating member **126** electrically insulates the load pad **124** from the volt rod **128**. The insulating member **126** includes a hollow tube-like portion **126a** and a pad portion **126b**, as shown in FIG. 1e. According to some embodiments, the hollow tube-like portion **126a** is adapted to fit through the aperture **125a** in the load pad **124**. The insulating member **126** is configured to allow the second end **128b** of the volt rod **128** to slide through the hollow tube-like portion **126a**, while preventing the first end **128a** from sliding through the insulating member **126**. According to some embodiments, the hollow tube-like portion **126a** of the insulating member **126** is formed with an inner diameter such that the second end **128b** of the volt rod **128** can freely rotate within the insulating member **126**. According to some embodiments, the pad portion **126b** of the insulating member **126** abuts the face **124a** of the load pad **124** and generally keeps the insulating member **126** from sliding all the way into the load pad aperture **125a**. FIG. 1A shows the pad portion **126b** of the insulating member **126** resting on top of the load pad face **124a**. Optionally, the pad portion **126b** of the insulating member **126** can fit within a recess **124c** of the load pad **124**. The insulating member **126** can be formed of a variety of insulating materials including, but not limited to, plastic.

[0067] Referring back to FIG. 1E, according to some embodiments, the jaw members **150a,b** each contain jaw clamp portions **152a,b**, jaw pivot portions **154a,b**, and jaw wire connection portions **156a,b**. The first jaw member **150a** is also referred to as a load jaw. In certain embodiments, during operation of the battery clamp **100**, the load jaw **150a** is used to conduct current flowing from a battery to a measuring and/or charging device. The second jaw member **150b** is also referred to as a volt jaw. In certain embodiments, during operation of the battery clamp device **100**, the volt jaw **150b** is used in measuring voltage across a battery's terminals.

[0068] The jaw clamp portions **152a,b** of the jaw members **150a,b** are adapted to be coupled to the clamping portions **114a,b** of the jaw handles **110a,b**. Specifically, the jaw clamp portion **152a** of the first jaw member **150a** is attached or coupled to the clamping portion **114b** of the second jaw handle **110b**. Similarly, the jaw clamp portion **152b** of the second jaw member **150b** is attached or coupled to the clamping portion **114a** of the first jaw handle **110a**. It is contemplated that in certain embodiments, the jaw clamp portions **152a,b** can be connected or coupled to the clamping portions **114a,b** of the jaw handles **110a,b** in a variety of manners, such

as with, for example, a screw connection, a glue connection, a solder connection, a nut and bolt connection, and/or a press fit connection.

[0069] The jaw pivot portions **154a,b** are adapted to be pivotally coupled about the first and second pivot points **116a,b**. According to some embodiments, the jaw pivot portion **154a** of the first jaw member **150a** is pivotally coupled about the first pivot point **116a**. Similarly, the jaw pivot portion **154b** of the second jaw member **150b** is pivotally coupled about the second pivot point **116b**. It is contemplated that in certain embodiments, the jaw pivot portions **154a,b** can be coupled about the first and second pivot points **116a,b** in a variety of manners, such as by, for example, a screw connection, a ring connection (e.g. a retainer ring), and/or a force fit connection. According to some embodiments, the jaw pivot portions **154a,b** are pivotally coupled about the first and second pivot points **116a,b** such that the jaw pivot portions **154a,b** can freely rotate within the first, second, third, and fourth apertures **118a,b,c,d** of the first and second jaw handles **110a,b**. According to some embodiments, the jaw pivot portions **154a,b** are maintained about the first and second pivot points **116a,b** by the shaft of the volt rod **128** which passes through apertures **154a1, 154b1** in the jaw pivot portions **154a,b**, and thereby permitting the first and second jaw members **150a,b** to pivot about the shaft of the volt rod **128**.

[0070] According to some embodiments, the side post adapter assembly **120** optionally includes a retainer ring **131**, as shown in FIG. 1E. The retainer ring **131** can be configured to snap or clip into a groove **155** in an exterior end **154b2** of the jaw pivot portion **154b** of the second jaw member **150b**. The retainer ring **131** maintains the exterior end **154b2** of the jaw pivot portion **154b** of the second jaw member **150b** positioned through apertures **118b,d**. It is contemplated that according to some embodiments, a retainer ring can be employed to maintain an exterior end **154a2** of the jaw pivot portion **154a** of the first jaw member **150a** positioned through apertures **118a,c**.

[0071] According to certain embodiments, the side post adapter assembly **120** further includes a spacer element **140**. The spacer element **140** generally fits between the first and second jaw members **150a,b**. According to some embodiments, the spacer element **140** fits between the jaw pivot portions **154a,b**. The spacer element **140** is designed to prevent the jaw pivot portion **154a** of the first jaw member **150a** from contacting or touching the jaw pivot portion **154b** of the second jaw member **150b** to prevent an electrical short during operation of the battery clamp **100**. Essentially, the spacer element **140** electrically insulates the first jaw member **150a** from the second jaw member **150b** when the jaw handles **110a,b** are biased in either an open or closed position.

[0072] According to some embodiments, the spacer element **140** is generally in the shape of a hollow tube to provide space for the volt rod **128** and the insulating member **126** to fit within the spacer element's **140** hollow core. Additionally, the spacer element **140** contains an aperture to allow the volt rod **128** to pass completely through and electrically connect with the jaw pivot portion **154b** of the second jaw member **150b**. In certain embodiments, the spacer element **140** also contains a lip portion **140a**. According to some embodiments, the lip portion **140a** is a generally flat pad connected or coupled to the hollow tube portion. According to some embodiments, the lip portion **140a** and the tube portion of spacer **140** are integrally formed from a single piece of material such as plastic. The lip portion **140a** is designed to abut the jaw pivot portion

154b of the second jaw member **150b**. According to some embodiments, the spacer element **140** fits through the biasing member **117** such that the biasing member **117** pivots around the spacer **140** and electrically insulates the biasing member **117** from one or both of the jaw members **150a,b**. The lip portion **140a** essentially prevents an electrical short between the jaw pivot portion **154a** of the first jaw member **150a** and the jaw pivot portion **154b** of the second jaw member **150b** through the biasing member **117**. It is contemplated that the spacer element **140** can be formed from any of a variety of non-conducting materials, including but not limited to, plastic. It is also contemplated that according to some embodiments, the spacer element **140** can include a second lip portion that abuts the jaw pivot portion **154a** of the first jaw member **150a**. In such embodiments, the spacer element can be formed from multiple pieces or the biasing member can be formed around the hollow core of the spacer element **140**.

[0073] As shown in FIG. 1F, the jaw wire connection portions **156a,b** are adapted to be operatively connected with, or coupled to, electrical wires. Specifically, the jaw wire connection portion **156a** of the load jaw **150a** is adapted to be connected to a first insulated wire, also referred to as a load wire **180**. In certain embodiments, the jaw wire connection portion **156a** is crimped, crushed, and/or soldered around a stripped portion of the load wire **180**. According to some embodiments, a portion of the load wire **180** is stripped, the jaw wire connection portion **156a** is crimped around the stripped portion, and the jaw wire connection portion **156a** is dipped in molten solder. According to certain embodiments, the load wire **180** is electrically connected to the first jaw member **150a** and electrically connected to the load pad **124** such as through the jaw wire connection portion **156a**.

[0074] The jaw wire connection portion **156b** of the volt jaw **150b** is adapted to be connected with, or coupled to, a second insulated wire, also referred to as a volt wire **184**. In certain embodiments, a stripped portion of the volt wire **184** is soldered to the jaw wire connection portion **156b**. The volt wire **184** is electrically connected to the second jaw member **150b** and electrically connected to the volt rod **128**. Other methods suitable for attaching both the load wire **180** and the volt wire **184** are contemplated.

[0075] The load wire **180** is typically an insulated copper wire. According to some embodiments, it is contemplated that the load wire **180** is between a 0 and 12 gauge wire. According to some embodiments, the load wire **180** is between a 2 and 8 gauge wire. According to some embodiments, the volt wire **184** is also an insulated copper wire. According to some embodiments, it is contemplated that the volt wire **184** can be between a 12 and 24 gauge wire. According to some embodiments, the volt wire **184** is between a 16 and 20 gauge wire.

[0076] According to certain embodiments, the load wire **180** is connected to a testing/charging device **190**. Similarly, the volt wire **184** is connected to the testing/measuring device **190**. According to some embodiments, the testing/measuring device **190** is at least used to measure current and voltage of a battery coupled to the device **190** by a pair of battery clamps (e.g. two of battery clamp **100**). According to certain embodiments, the testing/measuring device **190** applies a load to a battery to test the battery and determine the general condition of the battery. For example, the testing/measuring device **190** applies a load to a battery and determines if the battery is good, bad, or marginal. In certain embodiments, the testing/measuring device **190** can measure current levels between

about ½ amp and about 800 amps. According to some embodiments, the testing/measuring device **190** can measure current levels between about 200 amps and about 800 amps. In certain embodiments, the testing/measuring device **190** can also charge a battery. In some of these embodiments, the testing/measuring device **190** can supply between a fraction of an amp (e.g. in the milliamp range) up to about 150 amps as the device charges a battery. In certain other embodiments, the testing/measuring device **190** can supply between a fraction of an amp (e.g. in the milliamp range) up to about 80 amps as the device charges a battery.

[0077] According to some embodiments, the load wire **180** is electrically insulated from the volt wire **184**. When the testing/measuring device **190** applies a load on a battery, current is drawn from the battery through the load wire **180**. If the load wire **180** is not electrically insulated from the volt wire **184**, a significant amount of current can flow through the volt wire **184**. The current flowing through the volt wire **184** can cause the volt wire **184** to heat up and possibly catch fire. Additionally, the current flowing through the volt wire **184** can cause inaccurate or incorrect readings of voltage differentials. Specifically, according to some embodiments, current flowing through the volt wire **184** can result in a voltage reading error up to, for example, about 2-3 volts.

[0078] According to certain embodiments, the first and second jaw members **150a,b** are electrically insulated from each other and/or the first and second jaw handles **110a,b**. According to some embodiments, the jaw handles **110a,b** are formed from plastic or other non-conducting materials so as to assist in insulating the jaw members **150a,b** from one another. It is contemplated that according to certain embodiments, the jaw handles **110a,b** can be formed from a conducting material, but at the same time remain insulated from the jaw members **150a,b**; similarly, the jaw members **150a,b** can remain insulated from one another. For example, plastic or other non-conducting spacers can be placed between the jaw members **150a,b** and the jaw handles **110a,b**. Electrically insulating the jaw members **150a,b** from the jaw handles **110a,b** can reduce or eliminate a voltage reading error due to surplus current flowing through the volt wire **184**.

[0079] A full cycle of operation using a pair of battery clamps **400a,b** to test and/or charge a side post terminal battery is now described. Referring to FIG. 4, a side post terminal battery **450** is shown having two side post terminals **452a,b**. According to some embodiments, an operator or a technician connects a pair of battery clamps **400a,b** to the side post terminals **452a,b** of the battery **450**. According to some embodiments, each of the battery clamps **400a,b** include a side post adapter assembly **420a,b**. To attach the battery clamps **400a,b** via the side post adapter assemblies **420a,b**, the operator places a first end of a volt rod, having a threaded end, (similar to the volt rod **128** shown in FIGS. 1A, 1C, 1D, and 1E) near the side post terminal **452a**, for example. The operator then turns a handle **422** to screw the threaded end of the volt rod into a threaded bore of the side post terminal **452a**. The operator continues to turn the handle **422** to thereby tighten the battery clamp **400a** into the side post terminal **452a**. By sufficiently turning the handle **422**, the operator is able to cause a load pad (similar to the load pad **124** shown in FIGS. 1E and 1G) too firmly abut a lead pad of the side post terminal battery **450**. The firm abutment of the load pad of the battery clamp with the lead pad of the battery **450** facilitates a good electrical connection thereby between which, in turn, facilitates more accurate readings of the battery **450** and

better charging of the battery 450. The operator then does the same for the other battery clamp 400b. The battery clamps 400a,b now electrically connect the battery 450 to a device 490 via electrical cables attached to the battery clamps 400a,b. It is contemplated that according to some embodiments, the device 490 can be any one of, or any combination of, a testing device, a metering device, a charging device, a load device, and/or a frequency device. Specifically, a load wire 480a,b, and a volt wire 484a,b electrically connects each of the battery clamps 400a,b to the device 490. According to some embodiments, the load wires 480a,b and the volt wires 484a,b are connected to plurality of wire terminals 470. According to certain embodiments, the load wires 480a,b are connected to two wire terminals 470 and the volt wires 484a,b are connected to two other wire terminals 470. It is contemplated that according to some embodiments, the load wires 480a,b and the volt wires 484a,b connect to the device 490 via a threaded connection, a loop coupler connection, an I-coupler connection, a bolt connection, a screw connection, and/or a solder connection. According to certain embodiments, the ends of the electrical wires are stripped and a loop coupler is crimped, crushed, and soldered to the wire. The loop coupler is then attached to the device 490 via a screw or bolt connection. Other methods of connecting electrical wire to a device are contemplated as known in the battery testing/charging art. Once the battery clamps 400a,b are attached to the battery 450, the operator can either charge or perform a test on the battery using the device 490.

[0080] It is contemplated that the battery clamps 400a,b can likewise be attached to a top post battery to perform a test or charge of a top post battery. In such a testing/charging situation, an operator squeezes the jaw handles of the battery clamps 400a,b together opening the jaws and attaches them to a respective top post terminal. According to some embodiments, the device 490 is configured to let an operator know if a jaw member is not properly coupled to a battery being testing and/or charged. For example, if the jaw members of a battery clamp are not properly attached to the battery, the testing/measuring device can be configured to produce an error code. It is contemplated that according to some embodiments, the error code can be, for example, an audible sound and/or a visual error message displayed to the operator on an attached display. It is also contemplated that the device 490 can be configured to produce such error indications when side post adapters are used to connect the battery clamps to a side post battery.

[0081] Referring to FIGS. 5A-D, a battery clamp 500 for testing and/or charging both batteries with top post terminal connections and batteries with side post terminal connections is depicted according to some embodiments. The battery clamp 500 includes a first jaw handle 510a, a second jaw handle 510b, a first jaw member 550a, a second jaw member 550b, and a side post adapter assembly 520. The first and second jaw handles 510a,b each have a handle portion 512a,b and a clamping portion 514a,b. The first and second jaw members 550a,b include a jaw clamp portion, a jaw pivot portion, and a jaw wire connection portion, similar to the first and second jaw members 150a,b described above. The side post adapter assembly 520 includes a handle 522, a load pad 524, an insulating member 526, and a volt rod 528. The volt rod 528 generally has the shape of a cylinder with two opposing ends. The first opposing end includes a threaded portion 528a. The battery clamp 500 is configured to work with a

testing and/or charging device in a similar manner as the battery clamp 100 is described above.

[0082] According to some embodiments, the jaw handles 510a,b further include at least one stopping mechanism 560. According to some embodiments, the at least one stopping mechanism 560 prevents the jaw clamp portions of the jaw members 550a,b from touching when the jaw handles 510a,b are biased in a closed position. It is contemplated that the at least one stopping mechanism 560 can be formed as a part of at least one of the jaw handles 510a,b. For example, the at least one stopping mechanism 560 can be a tab of material located on or near the clamping portion 514a of the first jaw handle 510a. Similarly, the at least one stopping mechanism 560 can be a tab of material located on both jaw handles 510a,b such that when the battery clamp 500 is in the closed position, the tab on the first jaw handle 510a mates with a tab on the second jaw handle 510b. For example, FIG. 6 shows an enlarged view of the clamping portions 514a,b of battery clamp 500 having the stopping mechanism 560 built into the jaw handles 510a,b. The jaw handles 510a,b are in the closed position, yet the built-in stopping mechanism 560 prevents the first jaw member 550a from contacting the second jaw member 550b.

[0083] Now turning to FIGS. 8A-G, a battery clamp 800 for testing and charging both batteries with top post terminal connections and batteries with side post terminal connections is shown according to some embodiments. According to some embodiments, the battery clamp 800 can measure current from about 0 amps to about 40 amps. According to some embodiments, the battery clamp 800 can measure current levels on the order of milliamps.

[0084] Referring to FIGS. 8A, 8B, and 8D, the battery clamp 800 includes a load handle assembly 801, a volt handle assembly 802, and a side post adapter assembly 820. The load handle assembly 801 includes a first jaw handle 810a, a first jaw handle cover 870a, and a jaw member 850. The volt handle assembly 802 includes a second jaw handle 810b and a second jaw handle cover 870b. Both the load handle assembly 801 and the volt handle assembly 802 have a handle portion 812a,b and a clamping portion 814a,b. It is contemplated that according to some embodiments, the volt handle assembly 802 can further include a jaw member similar to, or the same as, the jaw member 850.

[0085] According to some embodiments, the first and second jaw handles 810a,b and the jaw member 850 can be formed from a variety of electrically conductive materials including, but not limited to, steel, carbon, copper, iron, aluminum, and combinations thereof. According to some embodiments, the first and second jaw handles 810a,b are formed from copper-plated steel and the jaw member 850 is formed from copper.

[0086] Referring to FIG. 8F, a partial exploded view of the battery clamp 800 is shown. According to some embodiments, the first and second jaw handles 810a,b are substantially the same. According to some embodiments, the second jaw handle 810b has a longer handle portion 812b to accommodate attachment of the side post adapter assembly 820. According to some such embodiments, additional apertures may be included to facilitate attachment of the side post adapter assembly 820. Other methods of attaching the side post adapter assembly 820 are contemplated. According to some embodiments, the first and the second jaw handles 810a,b each include at least two apertures. The second jaw handle 810b includes a first aperture 818a and a second aper-

ture **818b**, and the first jaw handle **810a** includes a third aperture **818c** and a fourth aperture **818d**. According to some embodiments, when the first jaw handle **810a** is attached or coupled to the second jaw handle **810b**, the first and the third apertures **818a,c** are aligned with each other to form a first pivot point **816a**, as shown in FIGS. **8C** and **8E**. Similarly, according to some embodiments, the second and the fourth apertures **818b,d** are aligned to form a second pivot point **816b**, also shown in FIGS. **8C** and **8E** and described above.

[0087] Referring to FIGS. **8A-E**, according to some embodiments, the load handle assembly **801** and the volt handle assembly **802** are pivotally connected via a pivot pin **819**, which connects to the load and volt handle assemblies **801**, **802** through first and second pivot points **816a,b**. According to some embodiments, the pivot pin **819** can be a rivet, a screw, a bolt, a pin, etc. According to some embodiments, the pivot pin **819** can maintain the relative position of a biasing member **817** between the load handle assembly **801** and the volt handle assembly **802**, as shown in FIG. **8C**. According to some embodiments, the biasing member **817** biases the battery clamp **800** in a closed position or a substantially closed position, with the clamping portions **814a,b** in a near touching position.

[0088] According to some embodiments, the pivot pin **819** aids in electrically coupling the first and second jaw handles **810a,b**. According to some embodiments, when conducting a test of a side post battery using the side post adapter assembly **820**, the clamping portion **814b** of the second jaw handle **810b** is spaced away from the jaw member **850**, which is attached to the clamping portion **814a** of the first jaw handle **810a**.

[0089] According to some embodiments, a stopping mechanism **860** (shown in FIGS. **8A**, **8B**, **8D**, **8G**, and **8H**) prevents the jaw member **850** from physically touching the clamping portion **814b** of the second jaw handle **810b**. According to some embodiments, the stopping mechanism **860** can include one or more spacers attached to the first and second jaw handles **810a,b**. In these embodiments, when the first and second jaw handles **810a,b** are in the substantially closed position, the spacer(s) of the first jaw handle **810a** oppose the spacer(s) of the second jaw handle **810b**, thereby preventing the physical touching of the jaw member **850** and the clamping portion **814b** of the second jaw handle **810b**. It is contemplated that the stopping mechanism **860** can be formed from any of a variety of materials including, but not limited to, steel, carbon, copper, iron, aluminum, plastic, rubber, and combinations thereof.

[0090] According to some embodiments, preventing the jaw member **850** from touching the clamping portion **814b** can yield more accurate testing results. According to some embodiments, the accuracy of the testing results can increase when taking electrically separate amperage measurements and electrically separate voltage measurements. During a test of a battery using the side post adapter assembly **820**, such electrically separate measurements can be accomplished by keeping the jaw member **850**, which is insulated from the first jaw handle **810a**, from touching the clamping portion **814b** of the second jaw handle **810b**. As will become more apparent from the discussion below regarding the load handle assembly **801**, the jaw member **850** is insulated from the first jaw handle **810a**. Thus, according to some embodiments, when using a pair of battery clamps, as shown in FIG. **4**, to measure and/or test a side post battery (e.g., battery **450**), a voltage potential can be measured across the jaw handles **810a,b** of a

first battery clamp and the jaw handles **810a,b** of a second battery clamp, while the jaw members **850** of each of the battery clamps can simultaneously conduct current to a testing/charging device (e.g., testing/charging device **190**, **490**).

[0091] According to some embodiments, an operator can use the battery clamp **800** to test and/or charge a top post battery by squeezing the handle portions **812a,b** of the load and volt handle assemblies **801**, **802** together in a similar manner as battery clamp **100**, described above. The biasing member **817** is thereby compressed and the clamping portions **814a,b** are further separated. The operator can then place the separated clamping portions **814a,b** around a top post of the top post battery and/or a battery cable connector attached to the top post and release the handle portions **812a,b** thereby allowing the battery clamp **800** to “clamp” onto the top post and/or the battery cable connector. Testing and/or charging of the top post battery may follow.

[0092] Referring back to FIGS. **8A** and **8F**, the battery clamp **800** receives electrical wires that electrically couple the battery clamp **800** to, for example, a testing/charging device, that is the same as, or similar to, the testing/charging device **190** shown in FIG. **1F** and described above. According to some embodiments, a load wire **880** (shown in FIGS. **8F** and **8H**) and a volt wire **884** are generally attached to the battery clamp **800** by crimping a portion **890** of the first jaw handle **810a** around the wires **880,884**. Specifically, the handle portion **812a** of the load handle assembly **801** receives the load wire **880** and the volt wire **884**, which are similar to the load wire **180** and the volt wire **184** shown in FIG. **1F** and described above. According to some embodiments, the volt wire **884** is electrically coupled with the first jaw handle **810a**. According to other embodiments, the volt wire **884** can be positioned or bent around the biasing member **817** and electrically coupled with the second jaw handle **810b**, as both the first and second jaw handles **810a,b** are electrically coupled.

[0093] According to some embodiments, the load wire **880** is positioned or bent around the biasing member **817** and electrically coupled with the side post adapter assembly **820** (described in further detail below). Additionally, the jaw member **850** is electrically coupled with the side post adapter assembly **820** via a load jumper wire **881** (also described in further detail below). According to some embodiments, the load jumper wire **881** is electrically coupled to the jaw member **850** and electrically coupled to the load wire **880**.

[0094] The load wire **880**, the volt wire **884**, and the load jumper wire **881** are typically insulated copper wire. According to some embodiments, it is contemplated that the load wire **880** is between about a 10 to about a 18 gauge wire. According to some embodiments, the load wire **880** is between about a 12 to about a 16 gauge wire. According to some embodiments, it is contemplated that the volt wire **884** can be between about a 10 to about a 18 gauge wire. According to some embodiments, the volt wire **884** is between about a 12 to about a 16 gauge wire. According to some embodiments, the load jumper wire **881** is between about a 10 to about a 18 gauge wire. According to some embodiments, the load jumper wire **881** is between about a 12 to about a 16 gauge wire.

[0095] Now referring to FIG. **8G**, an exploded view of the load handle assembly **801** is shown according to some embodiments. The load handle assembly **801** includes the first jaw handle **810a**, the first jaw handle cover **870a**, and the jaw member **850**. According to some embodiments, the first jaw handle cover **870a** is press fit onto the first jaw handle

810a. The first jaw handle cover **870a** can include one or more tabs **871** that can be press fit into one or more respective apertures (not shown) in the first jaw handle **810a**. Other methods of attaching the first jaw handle cover **870a** are contemplated. For example, the first jaw handle cover **870a** can be attached to the jaw handle **810a** via a glue connection, a heat stake connection, a solder connection, a press fit connection, a screw connection, a rivet connection, etc.

[0096] According to some embodiments, the first and second jaw handle covers **870a,b** can both be formed from a variety of insulating materials including, but not limited to, plastic and rubber. According to some embodiments, the first jaw handle cover **870a** and the first jaw handle **810a** each include an aperture **872a**, **815a**, respectively, for receiving a rivet **851**. According to some embodiments, the rivet **851** aids in attaching the first jaw handle cover **870a** to the first jaw handle **810a**. A washer **852** may be provided between the rivet **851** and the first jaw handle cover **870a**.

[0097] According to some embodiments, a jaw member insulator **853** is provided to electrically insulate the jaw member **850** from the first jaw handle **810a**. It is contemplated that the jaw member insulator **853** may be formed in various shapes and from various insulating materials. According to some embodiments, the jaw member insulator **853** is an insulating sleeve that covers an exterior surface area of the jaw member **850**. According to some embodiments, the jaw member insulator **853** includes an aperture **853a**, similar in size to apertures **872a** and **815a**, to receive the rivet **851**. According to some embodiments, the jaw member **850** fits into or is pressed into the jaw member insulator **853**. The jaw member **850** similarly has an aperture **850a** that is aligned with aperture **853a** to receive the rivet **851**.

[0098] According to some embodiments, the load jumper wire **881** is physically and electrically coupled to the jaw member **850** by the rivet **851**. According to some embodiments, the rivet **851** fits through the washer **852**, then through apertures **872a**, **815a**, **853a**, and **850a**, then through a wire ring terminal **882**, and then through an insulating step washer **854**. The rivet **851** maintains the load jumper wire **881** in electrical contact with the jaw member **850** via, for example, the wire ring terminal **882**, while the jaw member insulator **853** and the insulating step washer **854** keep the jaw member **850** electrically insulated from the first jaw handle **810a**.

[0099] According to some embodiments, the load handle assembly **801** does not include the rivet **851**. For example, the first jaw handle cover **870a** can be press fit onto the first jaw handle **810a**, the jaw member insulator **853** can be press fit into the clamping portion **814a** of the first jaw member **810a**, the jaw member **850** can be press fit into the jaw member insulator **853**, and the load jumper wire **881** can be soldered onto the jaw member **850**. Various other methods of connecting the above described parts are contemplated such that the jaw member **850** is electrically insulated from the first jaw handle **810a** and the load jumper wire **881** is electrically coupled to the jaw member **850**.

[0100] Now referring to FIG. 8H, an exploded view of the volt handle assembly **802** and the side post adapter assembly **820** is shown according to some embodiments. The volt handle assembly **802** includes the second jaw handle **810b** and the second jaw handle cover **870b**. The second jaw handle cover **870b** is connected with the second jaw handle **810b** in the same, or similar, manner as the first jaw handle cover **870a** is connected with the first jaw handle **810a** as described

above. Similar to the first jaw handle cover **870a** described above, the second jaw handle cover **870b** can include one or more tabs **871**.

[0101] According to some embodiments, the second jaw handle cover **870b** and the second jaw handle **810b** each include an aperture **872b**, **815b**, respectively, for receiving a rivet **857**. According to some embodiments, the rivet **857** aids in attaching the second jaw handle cover **870b** to the second jaw handle **810b**. A washer **852** may be provided between the rivet **857** and the second jaw handle cover **870b**. According to some embodiments, the rivet **857** fits through the washer **852**, then through apertures **872b**, **815b**, and then through the insulating step washer **854**. It is contemplated that the volt handle assembly **802** can be provided without the rivet **857**, the washer **852**, and the insulating step washer **854**. In these embodiments, the second jaw handle cover **870b** is otherwise sufficiently attached to the second jaw handle **810b**. Other methods of attaching the second jaw handle cover **870b** are contemplated. For example, the second jaw handle cover **870b** can be attached to the jaw handle **810b** via a glue connection, a solder connection, a heat stake connection, a press fit connection, a screw connection, a rivet connection, etc. According to some embodiments, the volt handle assembly **802** can further include a jaw member that is attached to the second jaw handle **810b** in the same, or similar, manner as jaw member **850** is attached to the first jaw handle **810a**.

[0102] According to some embodiments, the side post adapter assembly **820** includes a handle **822**, an insulating plate **887**, a volt rod **828**, an insulating disk **823**, and a load pad **824**. The handle **822** is similar to and operates in a similar manner as the handle **122** shown in FIGS. 1B-E and described above in relation to battery clamp **100**. The volt rod **828** is similar to and operates in a similar manner as the volt rod **128** shown in FIG. 1E and described above in relation to battery clamp **100**. The load pad **824** is similar to and operates in a similar manner as the load pad **124** shown in FIGS. 1E and 1G and described above in relation to battery clamp **100**.

[0103] According to some embodiments, the volt rod **828** has a threaded end **828a** and a second opposing end **828b**. The threaded end **828a** includes a flange **828c**. According to some embodiments, the threaded end **828a** is positioned through a first handle aperture **812b1** and a second handle aperture **812b2** such that the flange **828c** is physically and electrically coupled with the second jaw handle **810b**. The threaded end **828a** also protrudes through aperture **823b** in the insulating disk **823** and through aperture **825** in the load pad **824** such that the threaded end **828a** can be coupled with a side post terminal of a side post battery in a similar manner as battery clamps **400a,b**, as shown in FIG. 4 and described above.

[0104] According to some embodiments, the insulating disk **823** electrically insulates the load pad **824** from the second jaw handle **810b**. According to some embodiments, the insulating disk **823** and the load pad **824** are coupled to the second jaw handle **810b** by screws **883a,b**. According to some embodiments, the second opposing end **828b** of the volt rod **828** is positioned through aperture **887b** of the insulating plate **887**. According to some embodiments, the insulating plate **887** can include a recess **887c** that engages the flange **828c** of the volt rod **828**, thereby assisting in forming an electrical connection between the volt rod **828** and the second jaw handle **810b**. According to some embodiments, the insulating plate **887** also includes apertures **887a** to receive insulating bushings **886**. The insulating bushings **886** have extended sleeve portions **886a** that fit through apertures **887a**;

apertures **812b3** and **812b4**; and apertures **823a** so as to electrically insulate the second jaw handle **810b** from screws **883a,b**.

[0105] According to some embodiments, the screws **883a,b** physically couple the side post adapter assembly **820** to the second jaw handle **810b**. According to some embodiments, the screws **883a,b** electrically couple the load wire **880** and/or the load jumper wire **881** with the load pad **824**. According to some embodiments, the ends of the load wire **880** and of the load jumper wire **881** are stripped and attached and/or soldered to a respective wire ring terminal **882**, which are shown in FIGS. **8A** and **8H**. Other methods of coupling the wires to the side post adapter assembly **820** are contemplated.

[0106] According to some embodiments, one of the screws **883a** attaches the wire ring terminal **882** of the load wire **880** and the wire ring terminal **882** of the load jumper wire **881** to the side post adapter assembly **820**, as shown in FIG. **8H**. According to other embodiments, one of the screws (e.g., screw **883a**) attaches the wire ring terminal **882** of the load wire **880** to the side post adapter assembly **820**, and the other screw (e.g., screw **883b**) attaches the wire ring terminal **882** of the load jumper wire **881** to the side post adapter assembly **820**.

[0107] Once the screws **883** are positioned through the wire ring terminal(s), the screws **883** can be positioned through the insulating bushings **886**, which as described above electrically insulate the screws **883** from the second jaw handle **810b**. The screws **883** are long enough to pass through the insulator bushings **886** and into threaded apertures **826**. The screws **883** mesh with, or grip, the threads of threaded apertures **826**, thereby coupling the load wire **880**, the load jumper wire **881**, the insulating bushings **886**, the insulating plate **887**, the volt rod **828**, the insulating disk **823**, and the load pad **824** onto the handle portion **812b** of the second jaw handle **810b**. According to some embodiments, the side post adapter assembly **820** can be similarly coupled onto the handle portion **812a** of the first jaw handle **810a**.

[0108] According to some embodiments, the second opposing end **828b** of the volt rod **828** protrudes through the aperture **887b** and through the aperture **812b1** such that the second opposing end **828b** can be inserted into the handle **822**. The handle **822** is the same as, or similar to, the handle **122** shown in FIGS. **1B-E** and described above. According to some embodiments, the handle **822** is secured onto the second opposing end **828b** with a screw **829**. Other methods of fastening the handle **822** onto the volt rod **828** are contemplated.

[0109] As described above, the insulator bushings **886**, the insulator plate **887**, and the insulating disk **823** all serve to electrically insulate the volt rod **828** from the load pad **824**. Additionally, the jaw member insulator **853** serves to electrically insulate the jaw member **850** from the first and second jaw handles **810a,b** and the volt rod **828**. Thus, the volt rod **828** and the first and second jaw handles **810a,b** are electrically coupled such that when using a pair of battery clamps, as shown in FIG. **4**, to measure and/or test a side post battery (e.g., battery **450**), a voltage potential can be measured across the volt rod **828** or the jaw handles **810a,b** of a first battery clamp and the volt rod **828** or the jaw handles **810a,b** of a second battery clamp, while the load pads **824** or the jaw members **850** of each of the battery clamps can simultaneously conduct current to a testing/charging device (e.g., testing/charging device **190**, **490**).

[0110] According to certain embodiments, FIGS. **9A-E** depict a battery clamp **900** for testing and charging batteries

with top post terminal connections and batteries with side post terminal connections. The battery clamp **900** includes a first jaw handle **910a**, a second jaw handle **910b**, a first jaw member **950a**, a second jaw member **950b**, and a side post adapter assembly **920**. The first and second jaw handles **910a,b** each have a handle portion **912a,b** and a clamping portion **914a,b**. According to some embodiments, the first and the second jaw handles **910a,b** is the same as or similar to the first and the second jaw handles **110a,b** described above in reference to battery clamp **100**.

[0111] According to certain embodiments, as shown in FIG. **9D**, the first jaw handle **910a** includes a first aperture **918a** and a second aperture **918b**, and the second jaw handle **910b** includes a third aperture **918c** (hidden in FIG. **9D**) and a fourth aperture **918d**. According to some embodiments, when the first jaw handle **910a** is attached or coupled to the second jaw handle **910b**, the first and the third apertures **918a,c** are aligned with each other to form a first pivot point **916a**, as shown in FIG. **9C**. Similarly, the second and the fourth apertures **918b,d** become aligned to form a second pivot point **916b**, as shown in FIG. **9B**. It is contemplated that various combinations exist for the number and location of apertures for the jaw handles.

[0112] According to some embodiments, the side post adapter assembly **920** is attached or coupled to the battery clamp **900** through the first and second pivot points **916a,b**. The connection of the side post adapter assembly **920** pivotally connects the two jaw handles **910a,b**. According to some embodiments, the side post adapter assembly **920** is coupled with the first and the second jaw members **950a,b**, as best shown in FIG. **9F**. In certain embodiments, the jaw handles **910a,b** are biased in closed position by a biasing member **917**. The biasing member **917** (shown in FIG. **9E**) biases the clamping portions **914a,b** towards each other in a closed position, as shown in FIG. **9A**. According to some embodiments, the biasing member **917** is the same as or similar to the biasing member **117** described above in reference to the battery clamp **100**.

[0113] According to certain embodiments, the side post adapter assembly **920**, as shown in FIGS. **9A** and **9F**, includes a handle **922**, a load pad **924**, an insulating member **926**, and a volt rod **928**. According to certain embodiments, the handle **922**, the load pad **924**, the insulating member **926**, and the volt rod **928** are the same as or similar to the handle **122**, the load pad **124**, the insulating member **126**, and the volt rod **128** respectively, described above in reference to the battery clamp **100**.

[0114] According to some embodiments, the load pad **924** has a generally circular face with an aperture. The aperture is configured to receive the insulating member **926** therethrough and a portion of the volt rod **928**. According to some embodiments, the load pad **924** includes a threaded portion **924b** configured to electrically connect the load pad **924** and the first jaw member **950a** via a washer **925**. According to some embodiments, the load pad **924** can optionally include a second aperture positioned to receive a setscrew or a pin **932**, shown in FIG. **9D**. According to some embodiments, the set screw or pin **932** is coupled to the load pad **924** and the jaw pivot portion **954a** of the first jaw member **950a** to inhibit the load pad **924** from rotating with respect to the first jaw member **950a**.

[0115] According to some embodiments, the volt rod **928** has a generally cylindrical shape with two opposing ends **928a,b**. The first end **928a** includes a threaded portion and the

second end **928b** is substantially smooth. According to some embodiments, the handle **922** is rigidly connected to the volt rod **928** such that when the handle **922** is turned, the volt rod **928** turns. According to some embodiments, the second end **928b** of the volt rod **928** is configured to mechanically and electrically connect with a volt pad **930**. According to certain embodiments, volt pad **930** is the same as or similar to the volt pad **130** described above in reference to the battery clamp **100**.

[0116] In certain embodiments, the second end **928b** of the volt rod **928** may have an inner threaded portion adapted to receive a screw **929**. According to some embodiments, the screw **929** is positioned through a washer **929a** and then through the handle **922** to attach to the volt rod **928**. In certain embodiments, it is contemplated that the side post adapter assembly **920** does not include a screw **929** and/or a washer **929a**. According to some embodiments, the volt pad **930** is configured to fit within a groove or lip in the handle **922** such that when the handle **922** is securely coupled to the volt rod **928**, the handle **922** forces the volt pad **930** into electrical contact with the jaw pivot portion **954b** of the second jaw member **950b**.

[0117] According to some embodiments, the first and the second jaw members **950a, b** are similar to the first and the second jaw members **150a, b** described above in reference to battery clamp **100**. According to some embodiments, the jaw members **950a, b** each contain jaw clamp portions **952a, b**, jaw pivot portions **954a, b**, and jaw wire connection portions **956a, b**. The first jaw member **950a** is also referred to as a load jaw. In certain embodiments, during operation of the battery clamp **900**, the load jaw **950a** is used to conduct current flowing from a battery to a measuring and/or charging device. The second jaw member **950b** is also referred to as a volt jaw. In certain embodiments, during operation of the battery clamp device **900**, the volt jaw **950b** is used in measuring voltage across a battery's terminals.

[0118] According to some embodiments, the jaw clamp portions **952a, b** of the jaw members **950a, b** are adapted to be coupled to the clamping portions **914a, b** of the jaw handles **910a, b**. As best shown in FIG. 9D, the jaw clamp portion **952a** of the first jaw member **950a** is attached or coupled to the clamping portion **914b** of the second jaw handle **910b**. Specifically, an insulating bushing **953b** is positioned through aperture **953c** in the jaw clamp portion **952a** of the first jaw member **950a** and through aperture **953d** in the clamping portion **914b** of the second jaw handle **910b**. A screw **953a** or other fastener is positioned through the insulating bushing **953b**, through a washer **953e**, and coupled with a nut **953f** to secure the first jaw member **950a** to the second jaw handle **910b**. Similarly, the jaw clamp portion **952b** of the second jaw member **950b** is attached or coupled to the clamping portion **914a** of the first jaw handle **910a**. Specifically, an insulating bushing **955b** is positioned through aperture **955c** in the jaw clamp portion **952b** of the second jaw member **950b** and through aperture **955d** in the clamping portion **914a** of the first jaw handle **910a**. A screw **955a** or other fastener is positioned through the insulating bushing **955b**, through a washer **955e**, and coupled with a nut **955f** to secure the second jaw member **950b** to the first jaw handle **910a**.

[0119] According to some embodiments, the jaw clamping portions **914a, b** have a width equal to or less than the width of the jaw members **950a, b**. Such a design aids an operator of the battery clamp **900** in connecting/clamping the battery clamp **900** with a side post terminal of a side post battery. Such a

connection using the jaw members **950a, b** rather than the side post adapter assembly **920** is useful when the side terminal battery remains connected to wires in an automobile.

[0120] The jaw pivot portions **954a, b** are adapted to be pivotally coupled about the first and second pivot points **916a, b**. According to some embodiments, the jaw pivot portion **954a** of the first jaw member **950a** is pivotally coupled about the second pivot point **916b**. Similarly, the jaw pivot portion **954b** of the second jaw member **950b** is pivotally coupled about the first pivot point **916a**. As shown in FIG. 9D, according to some embodiments, the jaw pivot portion **954a** is coupled to the first jaw member **950a** via aperture **954a₁**. Similarly, according to some embodiments, the jaw pivot portion **954b** is coupled to the second jaw member **950b** via aperture **954b₁**.

[0121] According to some embodiments, the side post adapter assembly **920** optionally includes a retainer ring **931a**, shown in FIG. 9D. The retainer ring **931a** can be configured to snap or clip into a groove **931b** in an exterior end of the jaw pivot portion **954b** of the second jaw member **950b**. The retainer ring **931a** maintains the exterior end of the jaw pivot portion **954b** of the second jaw member **950b** positioned through apertures **918a, c**. It is contemplated that according to some embodiments, a retainer ring can be employed to maintain an exterior end of the jaw pivot portion **954a** of the first jaw member **950a** positioned through apertures **918b, d**.

[0122] According to some embodiments, the jaw wire connection portions **956a, b**, best shown in FIGS. 9D and 9F, are adapted to be operatively connected with, or coupled to, electrical wires. Specifically, the jaw wire connection portion **956a** of the load jaw **950a** is adapted to be connected to a first insulated wire, also referred to as a load wire **980**, shown in FIG. 9D. In certain embodiments, the jaw wire connection portion **956a** is crimped, crushed, and/or soldered around a stripped portion of the load wire **980**. According to some embodiments, a portion of the load wire **980** is stripped, the jaw wire connection portion **956a** is crimped around the stripped portion, and the jaw wire connection portion **956a** is dipped in molten solder. According to certain embodiments, the load wire **980** is electrically connected to the jaw wire connection portion **956a** of the first jaw member **950a** and electrically connected to the load pad **924**.

[0123] The jaw wire connection portion **956b** of the volt jaw **950b** is adapted to be connected with, or coupled to, a second insulated wire, also referred to as a volt wire **984**, as shown in FIG. 9E. In certain embodiments, a stripped portion of the volt wire **984** is soldered to the jaw wire connection portion **956b**. The volt wire **984** is electrically connected to the jaw wire connection portion **956b** of the second jaw member **950b** and electrically connected to the volt rod **928**. Other methods suitable for attaching both the load wire **980** and the volt wire **984** are contemplated. According to some embodiments, the load wire **980** and the volt wire **984** are the same as or similar to the load wire **180** and the volt wire **184** described above in reference to the battery clamp **100**.

[0124] According to some embodiments, the jaw handles **910a, b** further include a stopping mechanism **960**, as shown in FIGS. 9A-C. According to some embodiments, the stopping mechanism **960** is the same as or similar to the stopping mechanism **560** described above in reference to the battery clamp **500**. According to some embodiments, the stopping mechanism **960** prevents the jaw clamp portions **952a, b** of the jaw members **950a, b** from touching when the jaw handles **910a, b** are biased in a closed position. For example, as shown,

the jaw handles **910a,b** are in the closed position, yet the built-in stopping mechanism **960** prevents the jaw clamp portion **952a** of the first jaw member **950a** from contacting the jaw clamp portion **952b** of the second jaw member **950b**. According to some embodiments, the stopping mechanism **960** is formed as a part of one or both of the jaw handles **910a,b**.

Alternative Embodiments

Alternative Embodiment 1

[0125] A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections includes a first and second jaw handle, each of the first and second jaw handles having a handle portion and a clamping portion, the first and second jaw handles being pivotally coupled together, the jaw handles being biased with the clamping portions being in a closed position; a first and second jaw member, each of the jaw members having a jaw clamp portion, a jaw pivot portion, and a jaw wire connection portion, the jaw pivot portion of the first jaw member being pivotally coupled to the first and second jaw handles, the jaw pivot portion of the second jaw member being pivotally coupled to the first and second jaw handles; a load pad electrically coupled to the first jaw member, the load pad having an aperture; and a volt rod electrically coupled to the second jaw member, a portion of the volt rod protruding through the aperture of the load pad.

Alternative Embodiment 2

[0126] The battery clamp of alternative embodiment 1, wherein the first jaw handle further includes a first aperture and a second aperture, and the second jaw handle further includes a third aperture and a fourth aperture.

Alternative Embodiment 3

[0127] The battery clamp of alternative embodiment 2, wherein the first aperture and the third aperture are positioned adjacent each other and form a first pivot point, and the second aperture and the fourth aperture are positioned adjacent each other and form a second pivot point.

Alternative Embodiment 4

[0128] The battery clamp of alternative embodiment 3, wherein the jaw pivot portion of the first jaw member is pivotally coupled about the first pivot point, and the jaw pivot portion of the second jaw member is pivotally coupled about the second pivot point.

Alternative Embodiment 5

[0129] The battery clamp of alternative embodiment 3 or 4, wherein the load pad is electrically coupled to the first jaw member through the jaw pivot portion of the first jaw member.

Alternative Embodiment 6

[0130] The battery clamp according to any of alternative embodiments 1 to 5, wherein the first and second jaw members are electrically insulated from the first and second jaw handles.

Alternative Embodiment 7

[0131] The battery clamp according to any of alternative embodiments 1 to 6, wherein the jaw clamp portion of the first

jaw member is coupled to the clamping portion of the second jaw handle, the jaw clamp portion of the second jaw member is coupled to the clamping portion of the first jaw handle.

Alternative Embodiment 8

[0132] The battery clamp according to any of alternative embodiments 1 to 7, wherein the jaw clamp portions of the jaw members are coupled to the clamping portions of the jaw handles by at least one of a screw connection, a solder connection, a glue connection, a nut and bolt connection, and a force fit connection.

Alternative Embodiment 9

[0133] The battery clamp according to any of alternative embodiments 1 to 8, wherein the volt rod includes a first and a second opposing end, the first opposing end including a threaded portion.

Alternative Embodiment 10

[0134] The battery clamp of alternative embodiment 9, wherein the threaded portion is made of stainless steel.

Alternative Embodiment 11

[0135] The battery clamp of alternative embodiment 9, further comprising a handle connected to the second opposing end of the volt rod, whereby the handle is coupled to the volt rod such that the volt rod rotates when the handle is rotated thereby permitting the threaded portion of the volt rod to be screwed into a battery terminal by rotating the handle.

Alternative Embodiment 12

[0136] The battery clamp of alternative embodiment 11, wherein the second opposing end is configured to connect with the handle via at least one of a wedge connection, a screw connection, a pin connection, a key connection, a press fit connection, and a solder connection.

Alternative Embodiment 13

[0137] The battery clamp of alternative embodiment 11, wherein the handle is one of a knob, a turn screw, a wheel, and a sprocket.

Alternative Embodiment 14

[0138] The battery clamp of claim 1, wherein the volt rod is further electrically coupled to a volt pad, the volt pad being electrically coupled to the second jaw member.

Alternative Embodiment 15

[0139] The battery clamp according to any of alternative embodiments 1 to 14, wherein the first jaw member is electrically insulated from the second jaw member.

Alternative Embodiment 16

[0140] The battery clamp according to any of alternative embodiments 1 to 15, further including a stopping mechanism, the stopping mechanism configured to prevent the first

jaw member from contacting the second jaw member when the jaw handles are in the closed position.

Alternative Embodiment 17

[0141] The battery clamp of alternative embodiment 16, wherein the stopping mechanism comprises at least one tab on at least one of the jaw handles.

Alternative Embodiment 18

[0142] The battery clamp of alternative embodiments 1 to 17, wherein the load pad is operatively coupled to the jaw pivot portion of the first jaw member.

Alternative Embodiment 19

[0143] The battery clamp according to any of alternative embodiments 1 to 18, further comprising a first insulated wire electrically connected to the first jaw member and electrically coupled to the load pad.

Alternative Embodiment 20

[0144] The battery clamp of alternative embodiment 19, wherein the first insulated wire is a load wire connected to a device configured to at least measure current.

Alternative Embodiment 21

[0145] The battery clamp of alternative embodiment 20, wherein the device measures current levels between about ½ amp and about 800 amps.

Alternative Embodiment 22

[0146] The battery clamp according to any of alternative embodiments 1 to 19, further including a second insulated wire electrically connected to the second jaw member and electrically coupled to the volt rod.

Alternative Embodiment 23

[0147] The battery clamp of alternative embodiment 22, wherein the second insulated wire is a volt wire connected to a device configured to at least measure voltage.

Alternative Embodiment 24

[0148] The battery clamp according to any of alternative embodiments 1 to 23, further including an insulating member coupled to the load pad, the insulating member configured to electrically insulate the load pad from the volt rod.

Alternative Embodiment 25

[0149] A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections including a first and second jaw handle, the first and second jaw handles each having a handle portion and a clamping portion, the first and second jaw handles being pivotally coupled together, the jaw handles being biased with the clamping portions being in a closed position; a first and second jaw member coupled to the clamping portions of the first and second jaw handles, the first and second jaw members being configured to clamp onto a top-post terminal of a top-post battery; a side post adapter configured to be coupled to a side-post terminal of a side-post battery, the side post

adapter comprising a load pad and a volt rod; a volt wire electrically coupled to the volt rod; and a load wire electrically coupled to the load pad.

Alternative Embodiment 26

[0150] The battery clamp of alternative embodiment 25, wherein the volt rod and volt wire are electrically insulated from the load pad and the load wire.

Alternative Embodiment 27

[0151] The battery clamp of alternative embodiments 25 or 26, wherein the load pad is electrically coupled to the first jaw member.

Alternative Embodiment 28

[0152] The battery clamp according to any of alternative embodiments 25 to 27, wherein the volt rod is electrically coupled to the second jaw member.

Alternative Embodiment 29

[0153] The battery clamp according to any of alternative embodiments 25 to 28, wherein the first and second jaw members are electrically insulated from each other.

Alternative Embodiment 30

[0154] The battery clamp according to any of alternative embodiments 25 to 29, wherein the volt rod includes a first and a second opposing end, the first end having a threaded portion.

Alternative Embodiment 31

[0155] The battery clamp of alternative embodiment 30, wherein the threaded portion is made of stainless steel.

Alternative Embodiment 32

[0156] The battery clamp of alternative embodiment 30 or 31, further comprising a handle connected to the second opposing end of the volt rod, whereby the handle is coupled to the volt rod such that the volt rod rotates when the handle is rotated thereby permitting the threaded portion of the volt rod to be screwed into a battery terminal by rotating the handle.

Alternative Embodiment 33

[0157] The battery clamp according to any of alternative embodiments 25 to 32, further including a stopping mechanism, the stopping mechanism configured to prevent the first jaw member from contacting the second jaw member when the jaw handles are in the closed position.

Alternative Embodiment 34

[0158] The battery clamp of alternative embodiment 33, wherein the stopping mechanism comprises at least one tab on at least one of the jaw handles.

Alternative Embodiment 35

[0159] The battery clamp according to any of alternative embodiments 25 to 34, wherein the first and second jaw

handles pivot about a pivot axis, the load pad being coupled to the first and second jaw handles near the pivot axis.

Alternative Embodiment 36

[0160] A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections including a first and second jaw handle, the first and second jaw handles each having a handle portion and a clamping portion, the first and second jaw handles being pivotally coupled to each other, the jaw handles being biased with the clamping portions being in a closed position; and a side post adapter, the side post adapter being coupled to the handle portion of one of the jaw handles, the side post adapter including a load pad and a volt rod, the load pad having an aperture, a portion of the volt rod protruding through the aperture of the load pad.

Alternative Embodiment 37

[0161] A method of testing a battery having side post terminal connections including providing a pair of battery clamps, each of the pair of battery clamps including a side post adapter, each of the side post adapters including a load pad and a volt rod; inserting each of the volt rods into a respective side post terminal in the battery; rotating each of the volt rods to cause the load pads to become electrically coupled to respective lead pads on the battery; applying a load to the battery; and measuring at least one of a current and a voltage of the battery.

Alternative Embodiment 38

[0162] A method of charging a battery having side post terminal connections including providing a pair of battery clamps, each of the pair of battery clamps comprising a side post adapter, each of the side post adapters including a load pad and a volt rod; inserting each of the volt rods into a respective side post terminal in the battery; rotating each of the volt rods to cause the load pads to become electrically coupled to respective lead pads on the battery; and applying a charge to the battery.

Alternative Embodiment 39

[0163] A method of testing a battery having top post terminal connections including providing a pair of battery clamps, each of the pair of battery clamps comprising a side post adapter, each of the side post adapters including a load pad and a volt rod; clamping each of the pair of battery clamps onto a respective top post terminal on the battery; applying a load to the battery; and measuring at least one of a current and a voltage of the battery.

Alternative Embodiment 40

[0164] A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections including a first and second jaw handle, each of the first and second jaw handles having a handle portion and a clamping portion, the first and second jaw handles being pivotally coupled together, the jaw handles being biased with the clamping portions being in a substantially closed position; a jaw member insulator coupled to the clamping portion of the first jaw handle; a jaw member coupled to the jaw member insulator, the jaw member insulator electrically insulating the jaw member from the first and

second jaw handles; a load pad electrically coupled to the jaw member, the load pad having an aperture; and a volt rod electrically coupled to the first and second jaw handles, a portion of the volt rod protruding through the aperture of the load pad.

Alternative Embodiment 41

[0165] The battery clamp of alternative embodiment 40, wherein the first jaw handle further includes a first aperture and a second aperture, and the second jaw handle further includes a third aperture and a fourth aperture.

Alternative Embodiment 42

[0166] The battery clamp of alternative embodiment 41, wherein the first aperture and the third aperture are positioned adjacent each other and form a first pivot point, and the second aperture and the fourth aperture are positioned adjacent each other and form a second pivot point.

Alternative Embodiment 43

[0167] The battery clamp according to any of alternative embodiments 40 to 42, wherein the jaw member insulator is an insulating sleeve.

Alternative Embodiment 44

[0168] The battery clamp according to any of alternative embodiments 40 to 43, wherein the volt rod includes a threaded end and a second opposing end.

Alternative Embodiment 45

[0169] The battery clamp of alternative embodiment 44, wherein the threaded end is made of stainless steel.

Alternative Embodiment 46

[0170] The battery clamp of alternative embodiment 44 or 45, further comprising a handle connected to the second opposing end of the volt rod, whereby the handle is coupled to the volt rod such that the volt rod rotates when the handle is rotated thereby permitting the threaded end portion of the volt rod to be screwed into a battery terminal by rotating the handle.

Alternative Embodiment 47

[0171] The battery clamp of alternative embodiment 46, wherein the second opposing end is configured to connect with the handle via at least one of a wedge connection, a screw connection, a pin connection, a key connection, a press fit connection, and a solder connection.

Alternative Embodiment 48

[0172] The battery clamp of alternative embodiment 46 or 47, wherein the handle is one of a knob, a turn screw, a wheel, and a sprocket.

Alternative Embodiment 49

[0173] The battery clamp according to any of alternative embodiments 40 to 48, further including a stopping mechanism, the stopping mechanism configured to prevent the jaw

member from contacting the clamping portion of the second jaw handle when the first and second jaw handles are in the substantially closed position.

Alternative Embodiment 50

[0174] The battery clamp of alternative embodiment 49, wherein the stopping mechanism comprises at least one spacer coupled to the clamping portion of each of the first and second jaw handles.

Alternative Embodiment 51

[0175] The battery clamp according to any of alternative embodiments 40 to 50, further comprising a first insulated wire electrically coupled to the load pad.

Alternative Embodiment 52

[0176] The battery clamp of alternative embodiment 51, wherein the first insulated wire is a load wire connected to a device configured to at least measure current.

Alternative Embodiment 53

[0177] The battery clamp of alternative embodiment 52, wherein the device measures current levels between about 0 amps and about 40 amps.

Alternative Embodiment 54

[0178] The battery clamp according to any of alternative embodiments 40 to 53, further including a second insulated wire electrically coupled to the volt rod.

Alternative Embodiment 55

[0179] The battery clamp of alternative embodiment 54, wherein the second insulated wire is a volt wire connected to a device configured to at least measure a voltage potential.

Alternative Embodiment 56

[0180] The battery clamp according to any of alternative embodiments 40 to 54, further including a third insulated wire, wherein the third insulated wire is a load jumper wire that electrically couples the jaw member to the load pad, the load wire, or both.

Alternative Embodiment 57

[0181] The battery clamp according to any of alternative embodiments 40 to 56, further including an insulating disk coupled to the load pad, the insulating disk configured to electrically insulate the load pad from the volt rod and the first and second jaw handles.

Alternative Embodiment 58

[0182] A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections including a first and second jaw handle, the first and second jaw handles each having a handle portion and a clamping portion, the first and second jaw handles being pivotally coupled together, the jaw handles being biased with the clamping portions being in a substantially closed position, the clamping portions being configured to be coupled to a top-post terminal of a top-post battery; a jaw member coupled to the clamping portion of the first jaw handle; a side post adapter configured to be coupled to a side-post terminal of a

side-post battery, the side post adapter comprising a load pad and a volt rod; a volt wire electrically coupled to the volt rod; a load wire electrically coupled to the load pad; and a load jumper wire electrically coupled between the load pad and the jaw member.

Alternative Embodiment 59

[0183] The battery clamp of alternative embodiment 58, wherein the volt rod and volt wire are electrically insulated from the load pad, the load wire, and the load jumper wire.

Alternative Embodiment 60

[0184] The battery clamp of alternative embodiment 58 or 59, wherein the volt rod is electrically coupled to the first and second jaw handles and the jaw member is electrically insulated from the first and second jaw handles.

Alternative Embodiment 61

[0185] The battery clamp according to any of alternative embodiments 58 to 60, wherein the volt rod includes a threaded end and a second opposing end.

Alternative Embodiment 62

[0186] The battery clamp of alternative embodiment 61, wherein the threaded end is made of stainless steel.

Alternative Embodiment 63

[0187] The battery clamp of alternative embodiment 61 or 62, further comprising a handle connected to the second opposing end of the volt rod, whereby the handle is coupled to the volt rod such that the volt rod rotates when the handle is rotated thereby permitting the threaded end of the volt rod to be screwed into a battery terminal by rotating the handle.

Alternative Embodiment 64

[0188] The battery clamp according to any of alternative embodiments 58 to 63, further including a stopping mechanism, the stopping mechanism configured to prevent the jaw member from contacting the clamping portion of the second jaw handle when the first and second jaw handles are in the substantially closed position.

Alternative Embodiment 65

[0189] The battery clamp of alternative embodiment 64, wherein the stopping mechanism comprises at least one spacer on each of the first and second jaw handles.

Alternative Embodiment 66

[0190] A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections including a first and second jaw handle, the first and second jaw handles each having a handle portion and a clamping portion, the first and second jaw handles being pivotally coupled to each other, the jaw handles being biased with the clamping portions being in a substantially closed position, the clamping portions being configured to be coupled to a top-post terminal of a top-post battery; a jaw member insulator coupled to the clamping portion of the first jaw handle; a jaw member coupled to the jaw member insulator, the jaw member being electrically insulated from the first and second jaw handles; a side post adapter, the side post

adapter being coupled to the handle portion of the first jaw handle, the side post adapter including a load pad and a volt rod, the load pad having an aperture, a portion of the volt rod protruding through the aperture of the load pad.

Alternative Embodiment 67

[0191] The battery clamp of alternative embodiment 66, further comprising a first and second jaw handle cover, the first jaw handle cover being coupled to the first jaw handle, the second jaw handle cover being coupled to the second jaw handle.

Alternative Embodiment 68

[0192] The battery clamp of alternative embodiment 67, wherein the first and second jaw handle covers are formed from an insulating material.

Alternative Embodiment 69

[0193] The battery clamp according to any of alternative embodiments 66 to 68, further comprising an insulating disk positioned to electrically insulate the load pad from the second jaw handle and the volt rod.

Alternative Embodiment 70

[0194] The battery clamp according to any of alternative embodiments 66 to 69, wherein the volt rod has a threaded end and an opposing second end, the volt rod further including a flange.

Alternative Embodiment 71

[0195] The battery clamp of alternative embodiment 70, further comprising an insulating plate with an aperture and a recess, the second end of the volt rod fitting through the aperture in the insulating plate such that the recess receives the flange of the volt rod, the insulating plate positioned to aid in providing an electrical connection between the volt rod and the second jaw handle.

Alternative Embodiment 72

[0196] The battery clamp according to any of alternative embodiments 66 to 71, further comprising a pair of insulating bushings, each of the insulating bushings having an extended sleeve portion.

Alternative Embodiment 73

[0197] The battery clamp of alternative embodiment 72, wherein the extended sleeve portions of the insulating bushings are positioned to fit through respective apertures in the insulating plate, the second jaw handle, and the insulating disk.

Alternative Embodiment 74

[0198] The battery clamp of alternative embodiment 73, further comprising a pair of electrically conductive screws, the screws being positioned through the extended sleeve portions of the insulating bushings so as to grip threads in a pair of respective threaded apertures in the load pad, the screws

being electrically insulated from the first jaw handle, the second jaw handle, and the volt rod.

Alternative Embodiment 75

[0199] The battery clamp according to any of alternative embodiments 66 to 74, further comprising a load wire and a load jumper wire, the load wire being connected to a device to at least measure current, the load jumper wire electrically connected to the jaw member.

Alternative Embodiment 76

[0200] The battery clamp of alternative embodiment 75, wherein the load wire and the load jumper wire are electrically coupled to the load pad via at least one of the screws.

[0201] While the present invention has been described with reference to one or more particular embodiments, those skilled in the art will recognize that many changes may be made thereto without departing from the spirit and scope of the present invention. Each of these embodiments and obvious variations thereof is contemplated as falling within the spirit and scope of the invention.

What is claimed is:

1. A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections, comprising:

a biasing member;

a first jaw handle and a second jaw handle, the first jaw handle and the second jaw handle having a respective handle portion and a respective clamping portion, the first jaw handle and the second jaw handle being pivotally coupled together, the first jaw handle and the second jaw handle being biased by the biasing member with the clamping portions being in a closed position;

a first jaw member and a second jaw member, the first jaw member and the second jaw member each having a respective jaw clamp portion, a respective jaw pivot portion, and a respective jaw wire connection portion, the jaw pivot portion of the first jaw member being pivotally coupled to the first jaw handle and the second jaw handle, the jaw pivot portion of the second jaw member being pivotally coupled to the first jaw handle and the second jaw handle;

a load pad electrically coupled to the first jaw member, the load pad having an aperture therein; and

a volt rod electrically coupled to the second jaw member, the volt rod having a first end and a second end, the first end protruding through the aperture of the load pad.

2. The battery clamp of claim 1, wherein the first jaw handle further includes a first aperture and a second aperture, and the second jaw handle further includes a third aperture and a fourth aperture; the first aperture and the third aperture being positioned to form a first pivot point, and the second aperture and the fourth aperture being positioned to form a second pivot point; wherein the jaw pivot portion of the first jaw member is pivotally rotatable about the first pivot point, and the jaw pivot portion of the second jaw member is pivotally rotatable about the second pivot point.

3. The battery clamp of claim 1, wherein the first end of the volt rod includes a threaded portion at least partially made of stainless steel.

4. The battery clamp of claim 3, further comprising a handle connected to the second end of the volt rod, whereby the handle is coupled to the volt rod such that the volt rod

rotates when the handle is rotated thereby permitting the threaded portion of the volt rod to be screwed into a battery terminal by rotating the handle.

5. The battery clamp of claim 1, further including a stopping mechanism, the stopping mechanism configured to prevent the first jaw member from contacting the second jaw member when the jaw handles are in the closed position such that the first jaw member is electrically insulated from the second jaw member.

6. The battery clamp of claim 1, further comprising a first insulated wire and a second insulated wire, the first insulated wire being electrically connected to the first jaw member and the load pad, the second insulating wire being electrically connected to the second jaw member and the volt rod.

7. The battery clamp of claim 1, wherein the battery clamp is configured to be coupled to a device to measure current levels between about $\frac{1}{2}$ amp and about 800 amps.

8. The battery clamp of claim 1, further including an insulating member coupled to the load pad, the insulating member configured to electrically insulate the load pad from the volt rod.

9. A method of using a pair of battery clamps, each of the pair of battery clamps comprising a side post adapter, each of the side post adapters including a load pad and a volt rod, the method comprising:

- a) inserting each of the volt rods into a respective side post terminal in a battery;
- b) rotating each of the volt rods to cause the load pads to become electrically coupled to respective lead pads on the battery;
- c) applying a load to the battery; and
- d) measuring a current, a voltage, or both of the battery.

10. The method of claim 9, further comprising applying a charge to the battery.

11. The method claim 9, wherein the side post adapter further comprises a handle connected to the volt rod, whereby the rotating is in response to rotating the handle.

12. A battery clamp for use with (a) batteries with top post terminal connections and (b) batteries with side post terminal connections, comprising:

- a first jaw handle and a second jaw handle, the jaw handles each having a handle portion and a clamping portion, the jaw handles being pivotally coupled to each other, the jaw handles being biased with the clamping portions being in a substantially closed position, the clamping portions being configured to be coupled to a top-post terminal of a top-post battery;

- a jaw member insulator coupled to the clamping portion of the first jaw handle;

a jaw member coupled to the jaw member insulator, the jaw member being electrically insulated from the jaw handles; and

a side post adapter, the side post adapter being coupled to the handle portion of the first jaw handle, the side post adapter including a load pad and a volt rod, the load pad having an aperture therein, a portion of the volt rod protruding through the aperture of the load pad.

13. The battery clamp of claim 12, further comprising a first jaw handle cover and a second jaw handle cover, the first jaw handle cover being coupled to the first jaw handle, the second jaw handle cover being coupled to the second jaw handle, the jaw handle covers being formed from an insulating material.

14. The battery clamp of claim 12, further comprising an insulating disk positioned to electrically insulate the load pad from the second jaw handle and the volt rod.

15. The battery clamp of claim 14, wherein the volt rod has a threaded end and an opposing second end, the volt rod further including a flange.

16. The battery clamp of claim 15, further comprising an insulating plate with an aperture and a recess, the second end of the volt rod fitting through the aperture in the insulating plate such that the recess receives the flange of the volt rod, the insulating plate positioned to aid in providing an electrical connection between the volt rod and the second jaw handle.

17. The battery clamp of claim 16, further comprising a first insulating bushing and a second insulating bushing, each of the insulating bushings having an extended sleeve portion, the extended sleeve portions being positioned to fit through respective apertures in the insulating plate, the second jaw handle, and the insulating disk.

18. The battery clamp of claim 17, further comprising a pair of electrically conductive screws, the screws being positioned through the extended sleeve portions of the insulating bushings so as to grip threads in a pair of respective threaded apertures in the load pad, the screws being electrically insulated from the first jaw handle, the second jaw handle, and the volt rod.

19. The battery clamp of claim 18, further comprising a load wire and a load jumper wire, the load wire being connected to a device to at least measure current, the load jumper wire electrically connected to the jaw member.

20. The battery clamp of claim 19, wherein the load wire and the load jumper wire are electrically coupled to the load pad via at least one of the screws.

* * * * *