



US007348967B2

(12) **United States Patent**  
**Zadesky et al.**

(10) **Patent No.:** **US 7,348,967 B2**  
(45) **Date of Patent:** **\*Mar. 25, 2008**

(54) **TOUCH PAD FOR HANDHELD DEVICE**

(75) Inventors: **Stephen Paul Zadesky**, San Carlos, CA (US); **Tang Yew Tan**, San Francisco, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 136 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **11/386,238**

(22) Filed: **Mar. 21, 2006**

(65) **Prior Publication Data**

US 2007/0013671 A1 Jan. 18, 2007

**Related U.S. Application Data**

(63) Continuation of application No. 10/188,182, filed on Jul. 1, 2002, now Pat. No. 7,046,230.

(60) Provisional application No. 60/359,551, filed on Feb. 25, 2002.

(51) **Int. Cl.**

**G09G 5/00** (2006.01)

(52) **U.S. Cl.** ..... **345/173**; 345/156; 345/157; 345/168; 345/169; 345/174; 455/550; 455/566; 455/575

(58) **Field of Classification Search** ..... 345/156, 345/157, 160, 169, 163, 173–178  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,061,578 A 5/1913 Wischhusen et al.  
2,798,907 A 7/1957 Schneider  
2,903,229 A 9/1959 Lange  
2,945,111 A 7/1960 McCormick

3,005,055 A 10/1961 Mattke

3,965,399 A 6/1976 Walker et al.

4,103,252 A 7/1978 Bobick

4,121,204 A 10/1978 Welch et al.

4,129,747 A 12/1978 Pepper

4,158,216 A 6/1979 Bigelow

4,242,676 A 12/1980 Piguet et al.

4,246,452 A 1/1981 Chandler

4,293,734 A 10/1981 Peper, Jr.

D264,969 S 6/1982 McGoutry

4,380,007 A 4/1983 Steinegger

4,380,040 A 4/1983 Posset

4,475,008 A 10/1984 Doi et al.

4,570,149 A 2/1986 Thornburg et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1139235 A 1/1997

(Continued)

OTHER PUBLICATIONS

“Atari VCS/2600 Peripherals”, www.classicgaming.com, downloaded Feb. 28, 2007, pp. 1-15.

(Continued)

*Primary Examiner*—Richard Hjerpe


*Assistant Examiner*—Jennifer T Nguyen

(74) *Attorney, Agent, or Firm*—Morrison & Foerster LLP

(57) **ABSTRACT**

A media player having a touch pad is disclosed.

**23 Claims, 7 Drawing Sheets**

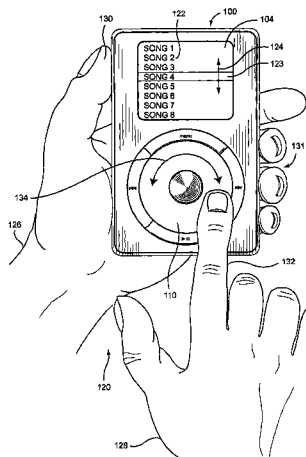

# US 7,348,967 B2

Page 2

U.S. PATENT DOCUMENTS					
4,587,378 A	5/1986	Moore	6,248,017 B1	6/2001	Roach
4,644,100 A	2/1987	Brenner et al.	6,254,477 B1	7/2001	Sasaki et al.
4,734,034 A	3/1988	Maness et al.	6,262,785 B1	7/2001	Kim
4,736,191 A *	4/1988	Matzke et al. .... 341/20	D448,810 S	10/2001	Goto
4,739,299 A	4/1988	Eventoff et al.	D450,713 S	11/2001	Masamitsu et al.
4,752,655 A	6/1988	Tajiri et al.	6,314,483 B1	11/2001	Goto et al.
4,755,765 A	7/1988	Ferland	D452,250 S	12/2001	Chan
4,764,717 A	8/1988	Tucker et al.	6,357,887 B1	3/2002	Novak
4,798,919 A	1/1989	Miessler et al.	D455,793 S	4/2002	Lin
4,810,992 A	3/1989	Eventoff	6,424,338 B1	7/2002	Anderson
4,831,359 A	5/1989	Newell	6,429,846 B2	8/2002	Rosenberg et al.
4,849,852 A	7/1989	Mullins	6,473,069 B1	10/2002	Gerphelde
4,856,993 A	8/1989	Maness et al.	6,492,979 B1	12/2002	Kent et al.
4,897,511 A	1/1990	Itaya et al.	6,496,181 B1	12/2002	Bomer et al.
4,914,624 A	4/1990	Dunthorn	6,497,412 B1	12/2002	Bramm
4,951,036 A	8/1990	Grueter et al.	D468,365 S	1/2003	Bransky et al.
4,976,435 A	12/1990	Shatford et al.	D469,109 S	1/2003	Andre et al.
4,990,900 A	2/1991	Kikuchi	D472,245 S	3/2003	Andre et al.
5,008,497 A	4/1991	Asher	6,639,584 B1 *	10/2003	Li ..... 345/173
5,036,321 A	7/1991	Leach et al.	D483,809 S	12/2003	Lim
5,053,757 A	10/1991	Meadows	6,664,951 B1 *	12/2003	Fujii et al. .... 345/173
5,159,159 A	10/1992	Asher	D489,731 S	5/2004	Huang
5,192,082 A	3/1993	Inoue et al.	6,750,803 B2	6/2004	Yates et al.
5,231,326 A	7/1993	Echols	6,781,576 B2 *	8/2004	Tamura ..... 345/173
5,305,017 A	4/1994	Gerpheide	6,788,288 B2	9/2004	Ano
5,367,199 A	11/1994	Lefkowitz et al.	D497,618 S	10/2004	Andre et al.
5,374,787 A	12/1994	Miller et al.	6,886,842 B2	5/2005	Vey et al.
5,408,621 A	4/1995	Ben-Arie	6,894,916 B2	5/2005	Reohr et al.
5,416,498 A	5/1995	Grant	D506,476 S	6/2005	Andre et al.
5,424,756 A	6/1995	Ho et al.	6,922,189 B2	7/2005	Fujiyoshi
5,432,531 A	7/1995	Calder et al.	6,930,494 B2	8/2005	Tesdahl et al.
5,450,075 A	9/1995	Waddington	6,977,808 B2	12/2005	Lam et al.
5,453,761 A	9/1995	Tanaka	6,978,127 B1	12/2005	Bulthuis et al.
5,479,192 A	12/1995	Carroll, Jr. et al.	7,046,230 B2	5/2006	Zadesky et al.
5,508,703 A	4/1996	Okamura et al.	7,069,044 B2	6/2006	Okada et al.
5,543,588 A	8/1996	Bisset et al.	7,084,856 B2	8/2006	Huppi
5,559,301 A	9/1996	Bryan, Jr. et al.	7,113,196 B2	9/2006	Kerr
5,564,112 A	10/1996	Hayes et al.	7,113,520 B1	9/2006	Meenan
5,581,670 A	12/1996	Bler et al.	7,215,319 B2	5/2007	Kamijo et al.
5,589,893 A	12/1996	Gaughan et al.	7,236,154 B1	6/2007	Kerr et al.
5,613,137 A	3/1997	Bertram et al.	2002/0027547 A1	3/2002	Kamijo
5,617,114 A	4/1997	Bier et al.	2002/0045960 A1	4/2002	Phillips et al.
5,627,531 A	5/1997	Posso et al.	2002/0118131 A1	8/2002	Yates et al.
5,632,679 A	5/1997	Tremmel	2003/0002246 A1	1/2003	Kerr
5,640,258 A	6/1997	Kurashima et al.	2003/0025679 A1	2/2003	Taylor et al.
5,657,012 A	8/1997	Tart	2003/0043174 A1	3/2003	Hinckley et al.
5,661,632 A	8/1997	Register	2003/0095095 A1	5/2003	Pihlaja
5,689,285 A	11/1997	Asher	2003/0184517 A1	10/2003	Senzui et al.
5,777,605 A	7/1998	Yoshinobu et al.	2003/0206202 A1	11/2003	Moriya
5,790,769 A	8/1998	Buxton et al.	2004/0156192 A1	8/2004	Kerr et al.
5,805,144 A	9/1998	Scholder et al.	2004/0215986 A1	10/2004	Shakkarwar
5,841,423 A	11/1998	Carroll, Jr. et al.	2004/0224638 A1	11/2004	Fadell et al.
5,859,629 A	1/1999	Tognazzini	2004/0253989 A1	12/2004	Tupler et al.
5,875,311 A	2/1999	Bertram et al.	2004/0263388 A1	12/2004	Krumm et al.
5,889,511 A	3/1999	Ong et al.	2004/0267874 A1	12/2004	Westberg et al.
5,903,229 A	5/1999	Kishi	2005/0052425 A1	3/2005	Zadesky et al.
5,923,388 A	7/1999	Kurashima et al.	2006/0026521 A1	2/2006	Hotelling et al.
D412,940 S	8/1999	Kato et al.	2006/0097991 A1	5/2006	Hotelling et al.
5,943,044 A	8/1999	Martinelli et al.	2006/0181517 A1	8/2006	Zadesky et al.
5,964,661 A	10/1999	Dodge	2006/0197750 A1	9/2006	Kerr et al.
5,973,668 A	10/1999	Watanabe	2006/0250377 A1	11/2006	Zadesley et al.
6,000,000 A	12/1999	Hawkins et al.	2006/0274905 A1	12/2006	Lindahl et al.
6,025,832 A	2/2000	Sudo et al.	2007/0013671 A1	1/2007	Zadesky et al.
6,034,672 A	3/2000	Gaultiet et al.	2007/0052044 A1	3/2007	Forsblad et al.
6,057,829 A	5/2000	Silfvast	2007/0052691 A1	3/2007	Zadesky et al.
D430,169 S	8/2000	Scibora	2007/0080936 A1	4/2007	Tsuk et al.
6,122,526 A	9/2000	Parulski et al.	2007/0080938 A1	4/2007	Robbin et al.
D437,860 S	2/2001	Suzuki et al.	2007/0083822 A1	4/2007	Robbin et al.
6,226,534 B1	5/2001	Aizawa	2007/0085841 A1	4/2007	Tsuk et al.
6,227,966 B1	5/2001	Yokoi	2007/0152977 A1	7/2007	Ng et al.
6,243,080 B1	6/2001	Molne			

2007/0152983 A1 7/2007 McKillop et al.

## FOREIGN PATENT DOCUMENTS

CN	1455615	11/2003
CN	1499356	5/2004
DE	3615742	11/1987
DE	20019074 U1	2/2001
EP	0521683 A2	1/1993
EP	0674288 A1	9/1995
EP	0 731 407 A1	9/1996
EP	0 551 778 B1	1/1997
EP	0551778 B1	1/1997
EP	1081922 A2	3/2001
EP	1098241 A2	5/2001
EP	1 162 826	12/2001
EP	1205836 A2	5/2002
EP	1251455 A2	10/2002
EP	1482401 A2	12/2004
EP	1542437 A2	6/2005
FR	2 686 440 A1	7/1993
GB	2315186	1/1998
GB	2391060	1/2004
GB	2402105 A	12/2004
JP	55-174009	6/1982
JP	57-95722	6/1982
JP	61-117619	6/1986
JP	61-124009	6/1986
JP	61-164547	1/1988
JP	63-181022	7/1988
JP	63-298518	12/1988
JP	03-57617	6/1991
JP	04-32920	2/1992
JP	5-041135	2/1993
JP	5-101741	4/1993
JP	05080938 A	4/1993
JP	05-36623	5/1993
JP	5-189110	7/1993
JP	5-205565	8/1993
JP	5-211021	8/1993
JP	5-217464	8/1993
JP	05-233141	9/1993
JP	05-262276	10/1993
JP	5-265656	10/1993
JP	5-274956	10/1993
JP	05-289811	11/1993
JP	5-298955	11/1993
JP	5-325723	12/1993
JP	06-20570	1/1994
JP	6-084428	3/1994
JP	6-089636	3/1994
JP	06-096639	4/1994
JP	6-96639	4/1994
JP	06-111685	4/1994
JP	06-111695	4/1994
JP	6-111695	4/1994
JP	6-139879	5/1994
JP	06-187078	7/1994
JP	06-208433	7/1994
JP	6-267382	9/1994
JP	06-283993	10/1994
JP	6-333459	12/1994
JP	07-107574	4/1995
JP	7-107574	4/1995
JP	07-107574 A	4/1995
JP	7-41882	7/1995
JP	07-41882	7/1995
JP	7-201249	8/1995
JP	07-201256	8/1995
JP	07-253838	10/1995
JP	7-261899	10/1995
JP	07-261899	10/1995
JP	7-261922	10/1995

JP	07-296670	11/1995
JP	08-016292	1/1996
JP	08-115158	5/1996
JP	8-203387	8/1996
JP	8-293226	11/1996
JP	8-298045	11/1996
JP	08-299541	11/1996
JP	8-316664	11/1996
JP	09-044289	2/1997
JP	09-069023	3/1997
JP	09-128148	5/1997
JP	9-218747	8/1997
JP	09-230993	9/1997
JP	9-230993	9/1997
JP	9-231858	9/1997
JP	09-233161	9/1997
JP	9-251347	9/1997
JP	9-258895	10/1997
JP	9-288926	11/1997
JP	10-074429	3/1998
JP	10-198507	7/1998
JP	10-227878	8/1998
JP	11-184607	7/1999
JP	11-194863	* 7/1999
JP	11-203045	7/1999
JP	A10-012010	7/1999
JP	A10-012025	7/1999
JP	A10-012026	7/1999
JP	A10-012027	7/1999
JP	A10-012028	7/1999
JP	A10-012029	7/1999
JP	11-272378	10/1999
JP	A10-089535	10/1999
JP	2000-267786	9/2000
JP	2000-353045	12/2000
JP	2001-11769	1/2001
JP	2001-22508	1/2001
JP	2002-215311	8/2002
JP	2003280807	2/2003
JP	A2005-99635	9/2005
JP	A2005-133824	10/2005
JP	A2005-134953	10/2005
JP	A2005-235579	1/2006
JP	A2005-358970	7/2006
JP	3852854	9/2006
JP	3852854	12/2006
JP	A2005-312433	5/2007
KR	1998-71394	10/1998
KR	1999-50198	7/1999
KR	2000-8579	2/2000
TW	431607	4/2001
WO	WO 95/00897 A1	1/1995
WO	WO-03/044645 A1	5/2003
WO	WO-2005/055620 A2	6/2005
WO	WO-2005/124526 A2	12/2005

## OTHER PUBLICATIONS

"Alps Electric introduces the GlidePoint Wave Keyboard; combines a gently curved design with Alps' advanced GlidePoint Technology", Business Wire, (Oct. 21, 1996).

Alps Electric Ships GlidePoint Keyboard for the Macintosh; Includes a GlidePoint Touchpad, Erase-Eaze Backspace Key and Contoured Wrist Rest, Business Wire, (Jul. 1, 1996).

"APS show guide to exhibitors", Physics Today, 49(3) (Mar. 1996).

"Design News literature plus", Design News, 51(24) (Dec. 18, 1995).

"Manufactures", Laser Focus World, Buyers Guide '96, 31(12) (Dec. 1995).

"National Design Engineering Show", Design News, 52(5) (Mar. 4, 1996).

"Preview of exhibitor booths at the Philadelphia show", Air Conditioning Heating & Refrigerator News, 200(2) (Jan. 13, 1997).

- "Product news", Design News, 53(11) (Jun. 9, 1997).
- "Product news", Design News, 53(9) (May 5, 1997).
- Ahl, David, "Controller Updated", Creative Computing 9(12) (Dec. 1983).
- Baig, E.C., "Your PC Might Just Need a Mouse", U.S. News and World Report, 108(22), (Jun. 4, 1990).
- Bartimo, Jim, "The Portables: Traveling Quickly", Computerworld (Nov. 14, 1983).
- Brink et al., "Pumped-up portables", U.S. News & World Report, 116(21) (May 30, 1994).
- Brown et al., "Windows on Tablets as a Means of Achieving Virtual Input Devices", Human-Computer Interaction—INTERACT '90 (1990).
- Buxton et al., "Issues and Techniques in Touch-Sensitive Tablet Input", Computer Graphics, 19(3), Proceedings of SIGGRAPH '85 (1985).
- Chen et al., "A Study in Interactive 3-D Rotation Using 2-D Control Devices", Computer Graphics 22(4) (Aug. 1988).
- Evans et al., "Tablet-based Valuator that Provide One, Two, or Three Degrees of Freedom", Computer Graphics 15(3) (Aug. 1981).
- Jesitus, John, "Broken promises?", Industry Week/IW, 246(20) (Nov. 3, 1997).
- Mims, Forrest M. III, "A Few Quick Pointers; Mouses, Touch Screens, Touch Pads, Light Pads, and the Like Can Make Your System Easier to Use", Computers and Electronics, 22, (May 1984).
- Nass, Richard, "Touchpad input device goes digital to give portable systems a desktop 'mouse-like' feel", Electronic Design, 44(18) (Sep. 3, 1996).
- Perenson, Melissa, "New & Improved: Touchpad Redux", PC Magazine (Sep. 10, 1996).
- Petersen, Marty, "Koalapad Touch Tablet & Micro Illustrator Software", InfoWorld, (Oct. 10, 1983).
- Petruzzellis, "Force-Sensing Resistors" Electronics Now, 64(3), (Mar. 1993).
- Soderholm, Lars D., "Sensing Systems for 'Touch and Feel'", Design News, (May 8, 1989).
- Sony presents "Choice Without Compromise" at IBC '97 M2 PRESSWIRE (Jul. 24, 1997).
- Spiwak, Marc, "A Great New Wireless Keyboard", Popular Electronics, 14(12) (Dec. 1997).
- Spiwak, Marc, "A Pair of Unusual Controllers", Popular Electronics, 14(4) (Apr. 1997).
- Tessler, Franklin, "Point Pad", Macworld 12(10) (Oct. 1995).
- Tessler, Franklin, "Smart Input: How to Choose from the New Generation of Innovative Input Devices", Macworld 13(5) (May 1996).
- Tessler, Franklin, "Touchpads", Macworld 13(2) (Feb. 1996).
- "Triax Custom Controllers Due; Video Game Controllers," HFD—The Weekly Home Furnishings Newspaper, 67(1), (Jan. 4, 1993).
- Chinese Office Action issue Dec. 29, 2006, directed to CN Application No. 200510103886.3, 25 pages.
- "Apple Presents iPod: Ultra-Portable MP3 Music Player Puts 1,000 Songs in Your Pocket," retrieved from <http://www.apple.com/pr/library/2001/oct/23ipod.html> on Oct. 23, 2001.
- "System Service and Troubleshooting Manual," [www.dsplib.com/intv/Master](http://www.dsplib.com/intv/Master), downloaded Dec. 11, 2002.
- Bray, "Phosphors help switch on xenon," Physics in Action, pp. 1-3, Apr. 1999.
- EVB Elektronik "TSOP6238 IR Receiver Modules for Infrared Remote Control Systems" dated Jan. 2004 1 page.
- Gfroerer, "Photoluminescence in Analysis of Surfaces and Interfaces," Encyclopedia of Analytical Chemistry, pp. 1-23, Copyright John Wiley & Sons Ltd, Chichester, 2000.
- Luna Technologies International, Inc., LUNA Photoluminescent Safety Products, "Photoluminescence—What is Photoluminescence?" from website at <http://www.lunaplast.com/photoluminescence.com> on Dec. 27, 2005.
- Ahmad, "A Usable Real-Time 3D Hand Tracker," Proceedings of the 28th Asilomar Conference on Signals, Systems and Computers—Part 2 (of 2) vol. 2 (Oct. 1994), 5 pages.
- Kobayashi (1996) "Design of Dynamic Soundscape: Mapping Time to Space for Audio Browsing with Simultaneous Listening," Thesis submitted to Program in Media Arts and Sciences at the Massachusetts Institute of Technology, (58 pages).
- Kobayashi et al. (1997) "Dynamic Soundscape: Mapping Time to Space for Audio Browsing," *Computer Human Interaction*: 16 pages.
- Kobayashi et al. "Development of the Touch Switches with the Click Response," Koukuu Denshi Gihou No. 17: pp. 44-48 (Mar. 1994) (published by the Japan Aviation Electronics Industry, Ltd.); Translation of Summary.

\* cited by examiner

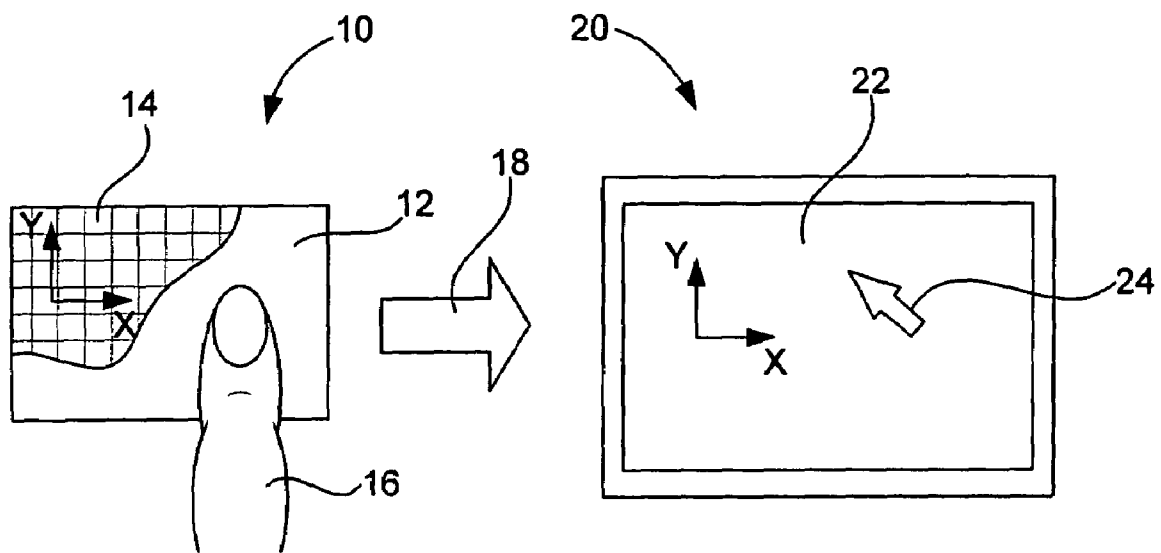


FIG. 1

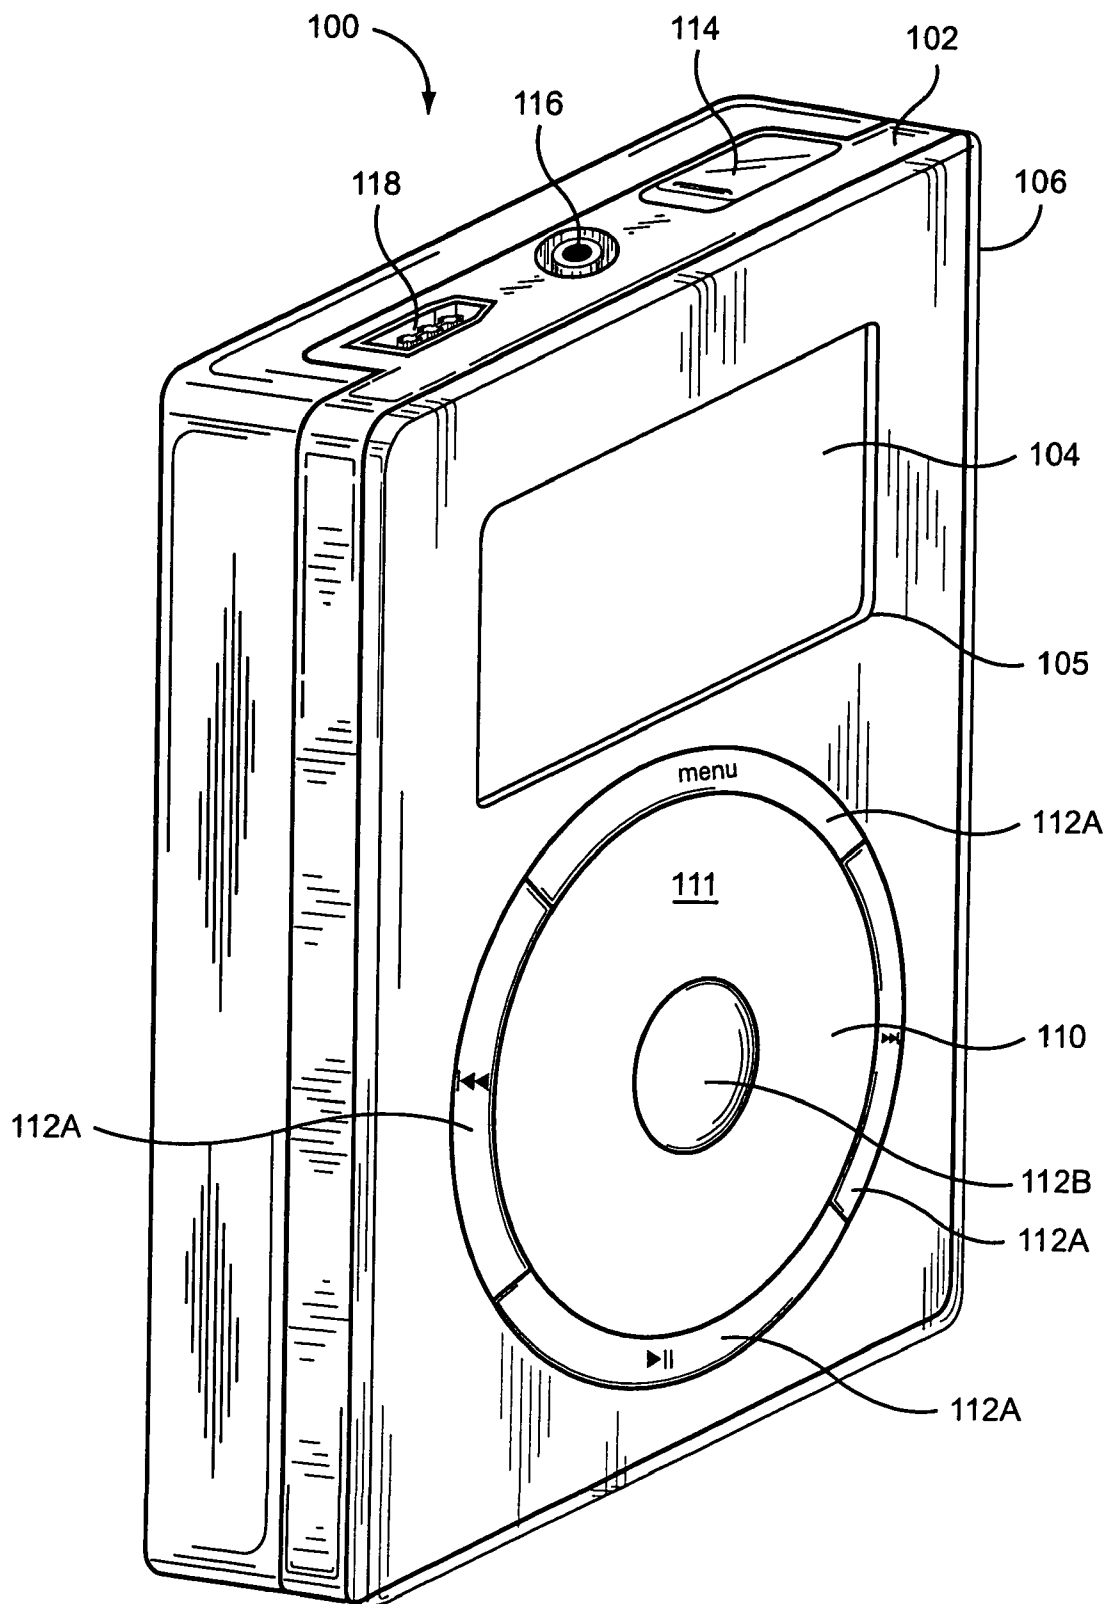


FIG. 2

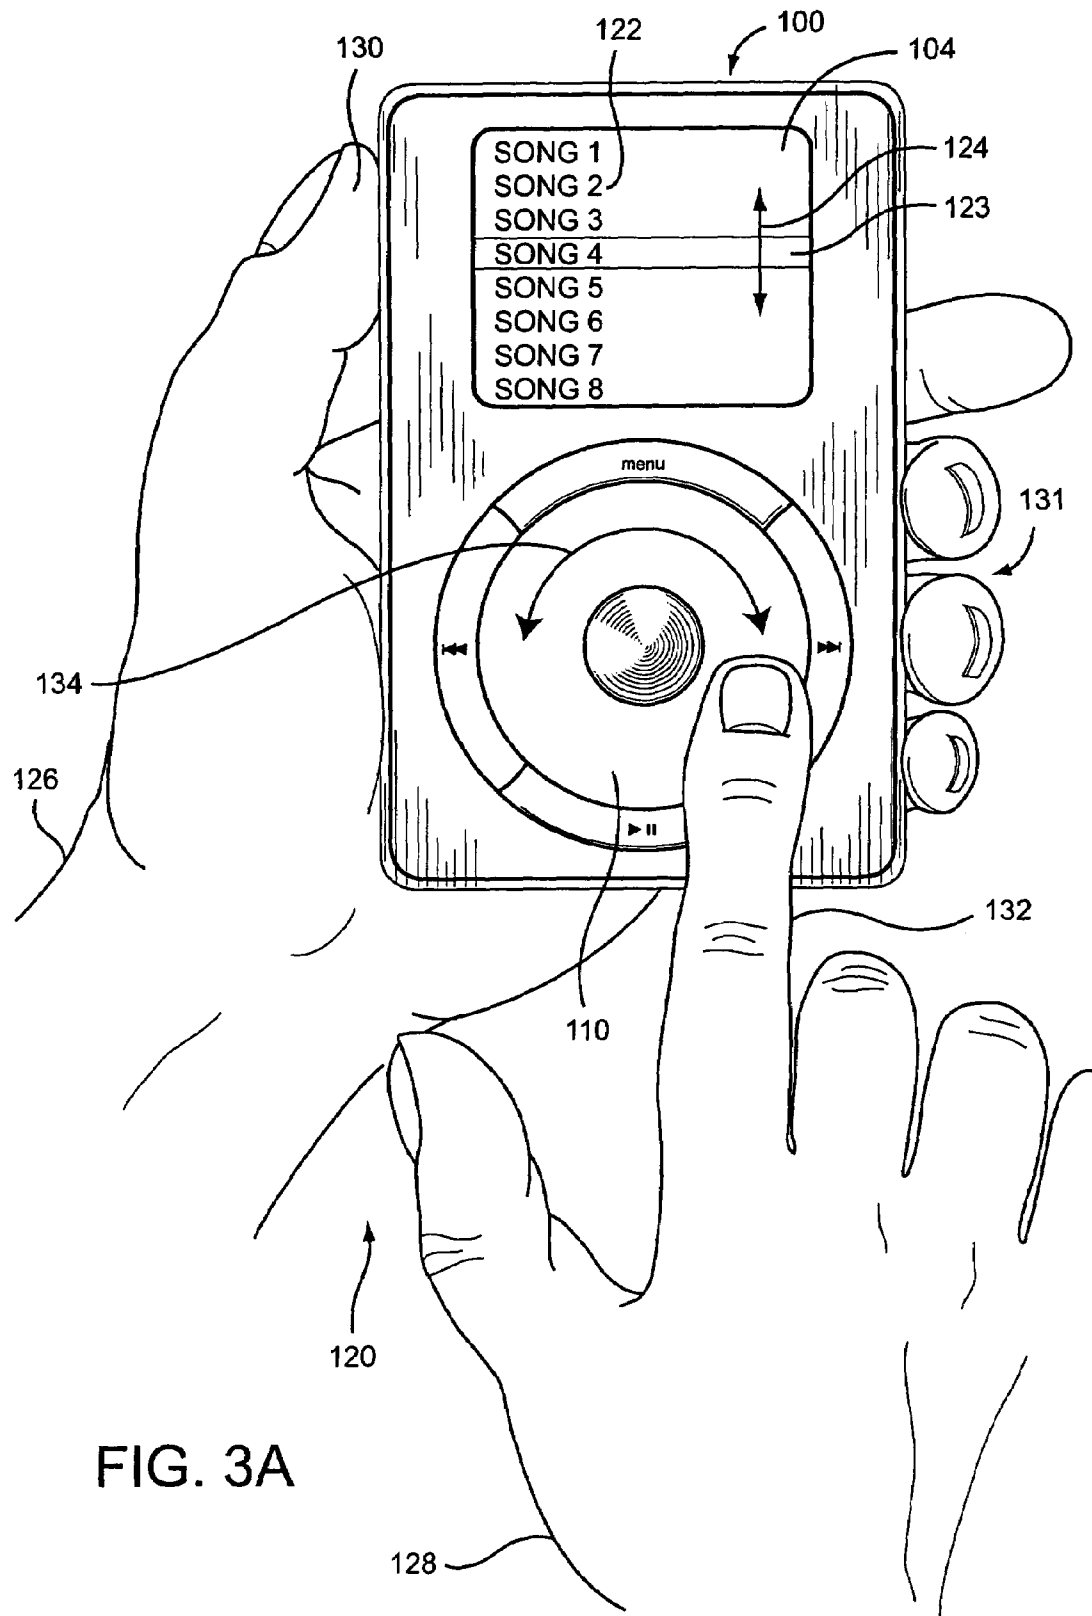
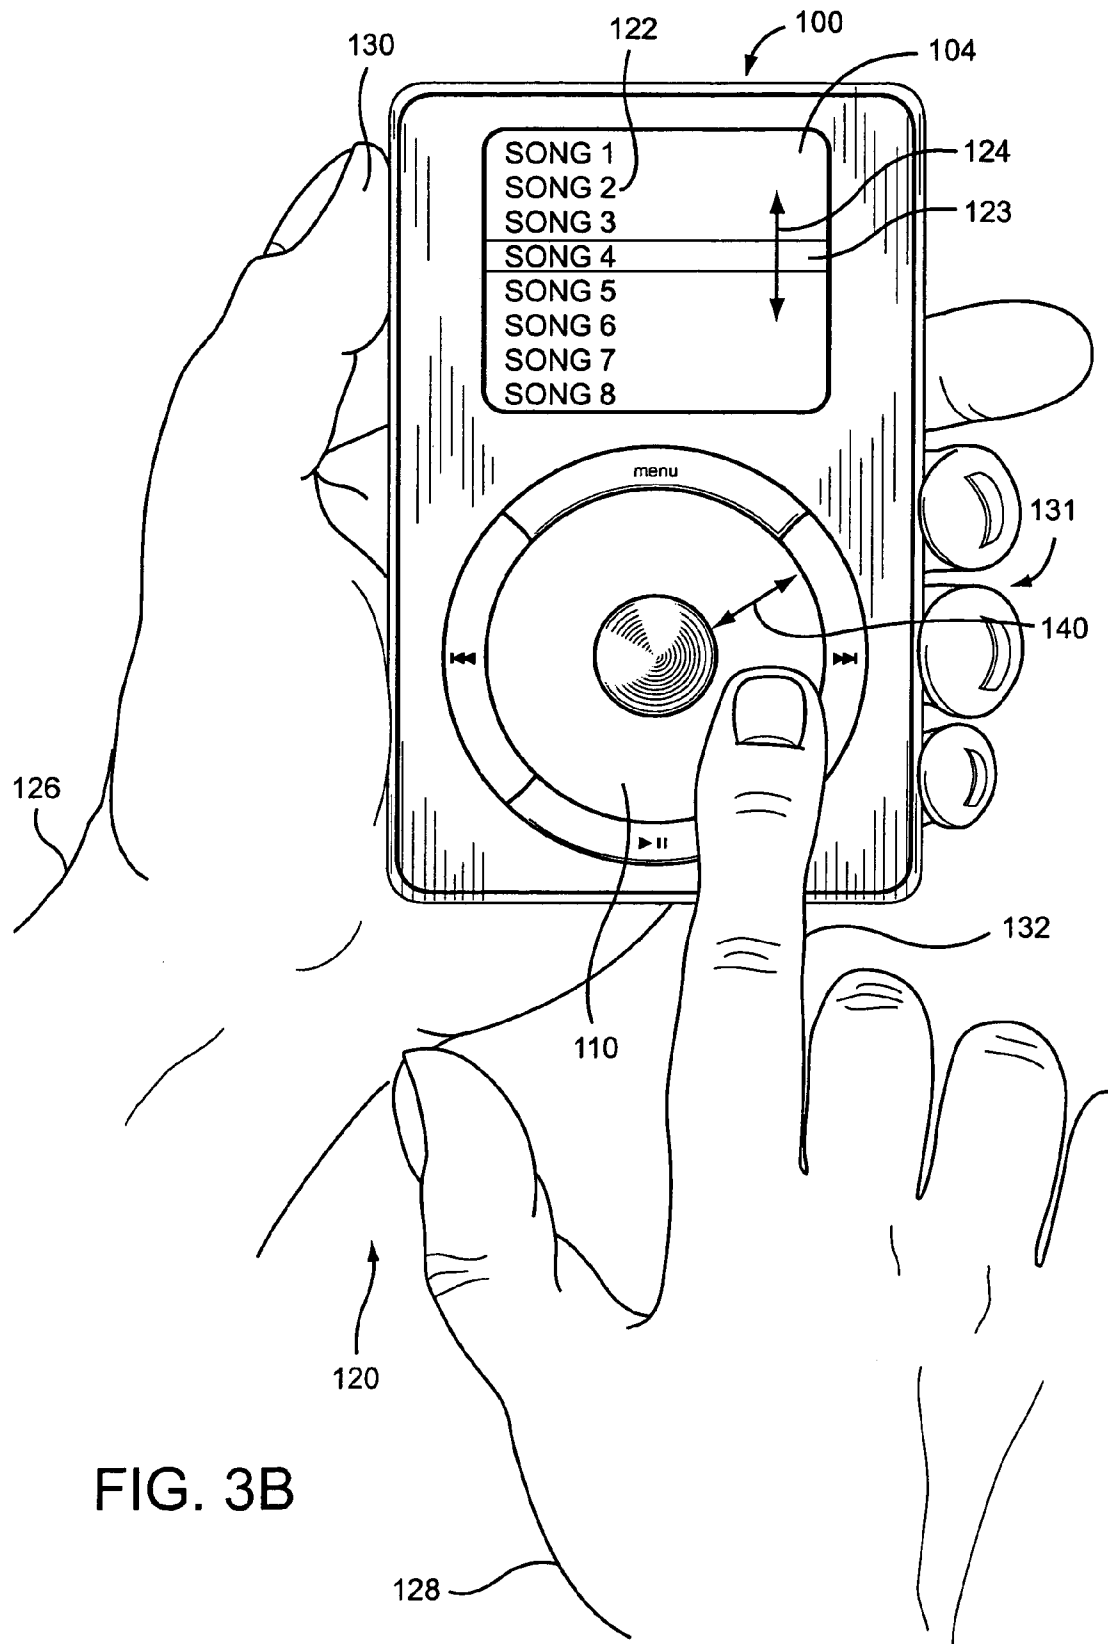


FIG. 3A





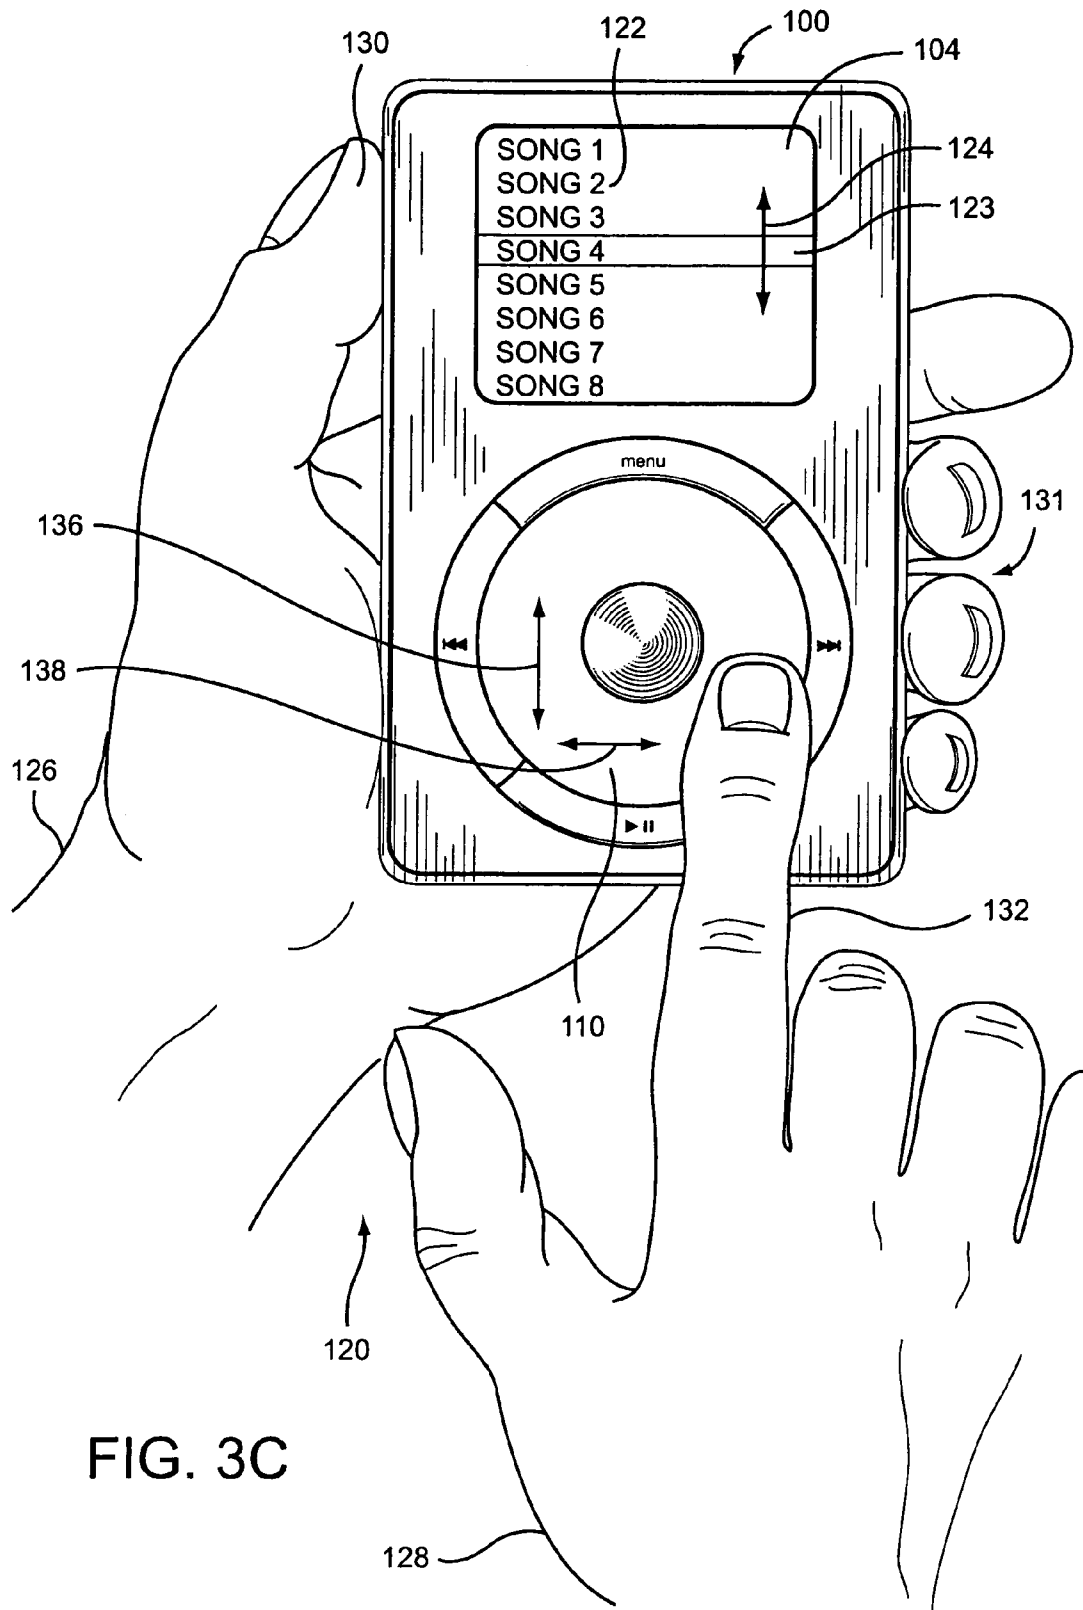


FIG. 3C

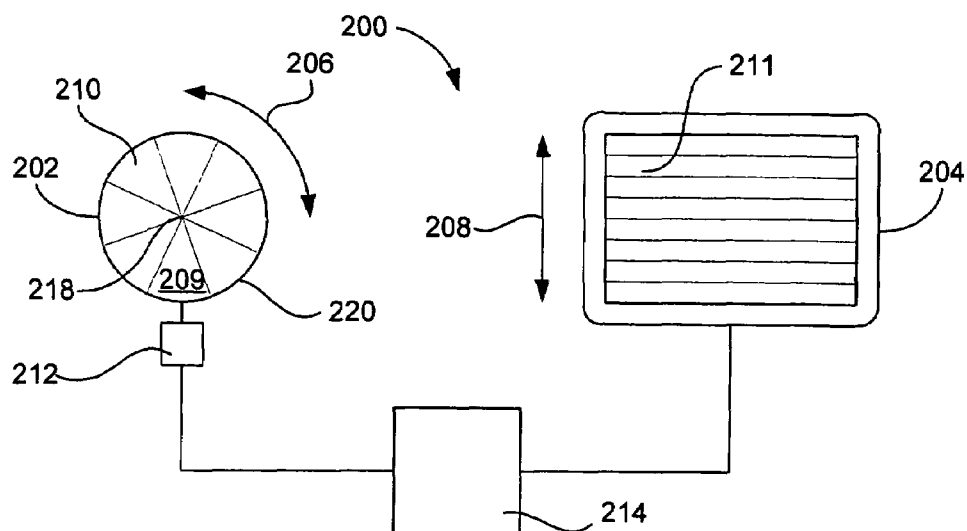


FIG. 4

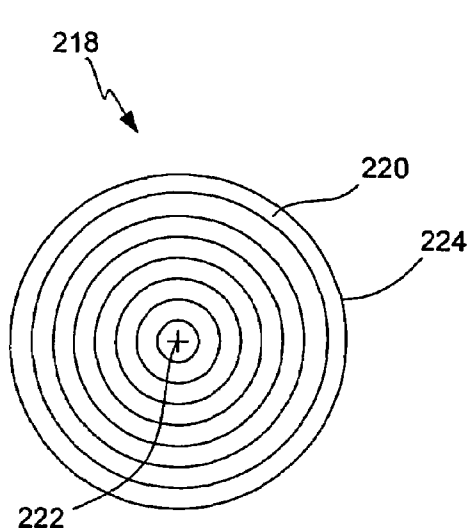


FIG. 5

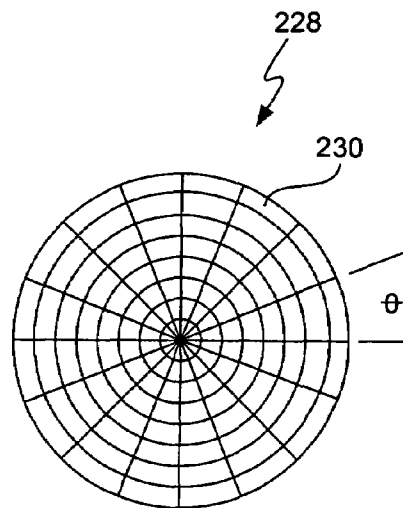


FIG. 6

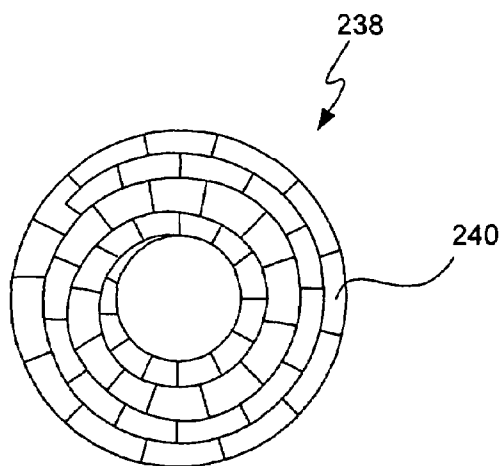


FIG. 7

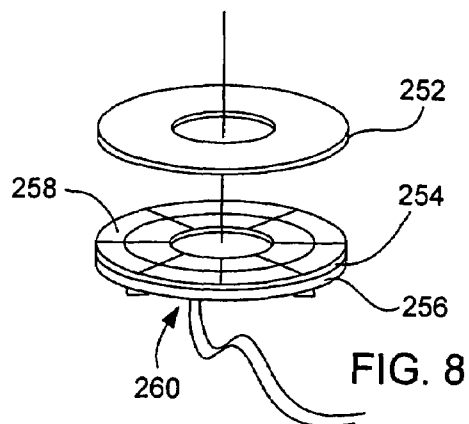


FIG. 8

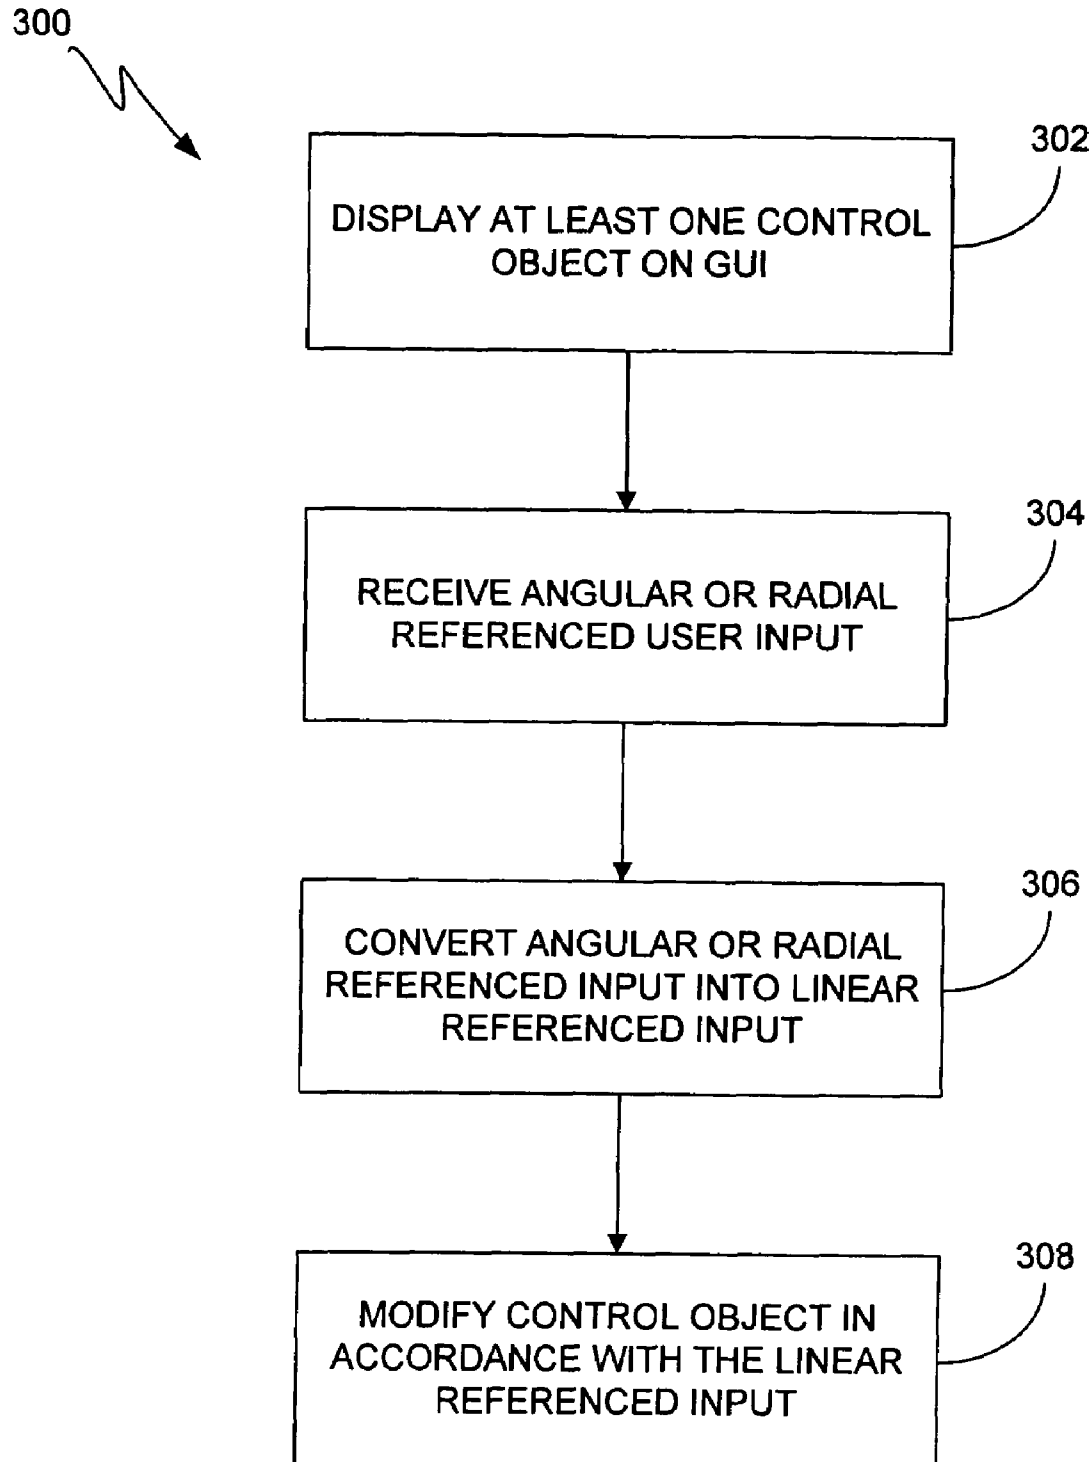


FIG. 9

## TOUCH PAD FOR HANDHELD DEVICE

## CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation of U.S. patent application Ser. No. 10/188,182, entitled "Touch Pad for Handheld Device" filed Jul. 1, 2002 now U.S. Pat. No. 7,046,230 which is incorporated herein by referenced, which claims priority of U.S. patent application Ser. No.: 60/359,551, entitled "Touch Pad for Handheld Device," filed on Feb. 25, 2002, and which is incorporated herein by reference.

This application is related to U.S. patent application Ser. No.: 60/346,237, entitled "Method and System for List Scrolling," filed on Oct. 22, 2001, and which is incorporated herein by reference.

This application is related to U.S. patent application Ser. No.: 10/256,716, entitled "METHOD AND APPARATUS FOR ACCELERATED SCROLLING," filed on Sep. 26, 2002 and which is incorporated herein by reference.

This application is also related to U.S. Design patent application Ser. No. 29/153,169, entitled "MEDIA PLAYER," filed on Oct. 22, 2001, and which is incorporated herein by reference.

## BACKGROUND OF THE INVENTION

## 1. Field of the Invention

The present invention relates generally to a media player having a touch pad. More particularly, the present invention relates to touch pads having scrolling features.

## 2. Description of the Related Art

There exist today many styles of input devices for performing operations in a consumer electronic device. The operations generally correspond to moving a cursor and making selections on a display screen. By way of example, the input devices may include buttons, switches, keyboards, mice, trackballs, touch pads, joy sticks, touch screens and the like. Each of these devices has advantages and disadvantages that are taken into account when designing the consumer electronic device. In handheld computing devices, the input devices are generally selected from buttons and switches. Buttons and switches are generally mechanical in nature and provide limited control with regards to the movement of a cursor (or other selector) and making selections. For example, they are generally dedicated to moving the cursor in a specific direction (e.g., arrow keys) or to making specific selections (e.g., enter, delete, number, etc.). In the case of hand-held personal digital assistants (PDA), the input devices tend to utilize touch-sensitive display screens. When using a touch screen, a user makes a selection on the display screen by pointing directly to objects on the screen using a stylus or finger.

In portable computing devices such as laptop computers, the input devices are commonly touch pads. With a touch pad, the movement of an input pointer (i.e., cursor) corresponds to the relative movements of the user's finger (or stylus) as the finger is moved along a surface of the touch pad. Touch pads can also make a selection on the display screen when one or more taps are detected on the surface of the touch pad. In some cases, any portion of the touch pad may be tapped, and in other cases a dedicated portion of the touch pad may be tapped. In stationary devices such as desktop computers, the input devices are generally selected from mice and trackballs. With a mouse, the movement of the input pointer corresponds to the relative movements of the mouse as the user moves the mouse along a surface. With

a trackball, the movement of the input pointer corresponds to the relative movements of a ball as the user rotates the ball within a housing. Both mice and trackballs generally include one or more buttons for making selections on the display screen.

In addition to allowing input pointer movements and selections with respect to a GUI presented on a display screen, the input devices may also allow a user to scroll across the display screen in the horizontal or vertical directions. For example, mice may include a scroll wheel that allows a user to simply roll the scroll wheel forward or backward to perform a scroll action. In addition, touch pads may provide dedicated active areas that implement scrolling when the user passes his or her finger linearly across the active area in the x and y directions. Both devices may also implement scrolling via horizontal and vertical scroll bars as part of the GUI. Using this technique, scrolling is implemented by positioning the input pointer over the desired scroll bar, selecting the desired scroll bar, and moving the scroll bar by moving the mouse or finger in the y direction (forwards and backwards) for vertical scrolling or in the x direction (left and right) for horizontal scrolling.

With regards to touch pads, mice and track balls, a Cartesian coordinate system is used to monitor the position of the finger, mouse and ball, respectively, as they are moved. The Cartesian coordinate system is generally defined as a two dimensional coordinate system (x, y) in which the coordinates of a point (e.g., position of finger, mouse or ball) are its distances from two intersecting, often perpendicular straight lines, the distance from each being measured along a straight line parallel to each other. For example, the x, y positions of the mouse, ball and finger may be monitored. The x, y positions are then used to correspondingly locate and move the input pointer on the display screen.

To elaborate further, touch pads generally include one or more sensors for detecting the proximity of the finger thereto. By way of example, the sensors may be based on resistive sensing, surface acoustic wave sensing, pressure sensing (e.g., strain gauge), optical sensing, capacitive sensing and the like. The sensors are generally dispersed about the touch pad with each sensor representing an x, y position. In most cases, the sensors are arranged in a grid of columns and rows. Distinct x and y position signals, which control the x, y movement of a pointer device on the display screen, are thus generated when a finger is moved across the grid of sensors within the touch pad. For brevity sake, the remaining discussion will be held to the discussion of capacitive sensing technologies. It should be noted, however, that the other technologies have similar features.

Capacitive sensing touch pads generally contain several layers of material. For example, the touch pad may include a protective shield, one or more electrode layers and a circuit board. The protective shield typically covers the electrode layer(s), and the electrode layer(s) is generally disposed on a front side of the circuit board. As is generally well known, the protective shield is the part of the touch pad that is touched by the user to implement cursor movements on a display screen. The electrode layer(s), on the other hand, is used to interpret the x, y position of the user's finger when the user's finger is resting or moving on the protective shield. The electrode layer(s) typically consists of a plurality of electrodes that are positioned in columns and rows so as to form a grid array. The columns and rows are generally based on the Cartesian coordinate system and thus the rows and columns correspond to the x and y directions.

The touch pad may also include sensing electronics for detecting signals associated with the electrodes. For example, the sensing electronics may be adapted to detect the change in capacitance at each of the electrodes as the finger passes over the grid. The sensing electronics are generally located on the backside of the circuit board. By way of example, the sensing electronics may include an application specific integrated circuit (ASIC) that is configured to measure the amount of capacitance in each of the electrodes and to compute the position of finger movement based on the capacitance in each of the electrodes. The ASIC may also be configured to report this information to the computing device.

Referring to FIG. 1, a touch pad 10 will be described in greater detail. The touch pad is generally a small rectangular area that includes a protective shield 12 and a plurality of electrodes 14 disposed underneath the protective shield layer 12. For ease of discussion, a portion of the protective shield layer 12 has been removed to show the electrodes 14. Each of the electrodes 14 represents a different x, y position. In one configuration, as a finger 16 approaches the electrode grid 14, a tiny capacitance forms between the finger 16 and the electrodes 14 proximate the finger 16. The circuit board/sensing electronics measures capacitance and produces an x, y input signal 18 corresponding to the active electrodes 14 is sent to a host device 20 having a display screen 22. The x, y input signal 18 is used to control the movement of a cursor 24 on a display screen 22. As shown, the input pointer moves in a similar x, y direction as the detected x, y finger motion.

#### SUMMARY OF THE INVENTION

The invention relates, in one embodiment, to a media player for storing and playing media such as audio, video or images. The media player includes a housing that encloses internally various electrical components that provide computing operations for the media player. The media player also includes a touch pad supported by the housing and configured to provide one or more control functions for controlling various applications associated with the media player.

The invention relates, in another embodiment, to a pocket sized handheld computing device. The computing device includes computing hardware for providing at least one application. The computing device also includes a display screen configured to display text and graphics associated with the at least one application. The computing device additionally includes a touch pad configured to provide one or more control functions for allowing a user of the computing device to provide inputs to the at least one application.

The invention relates, in another embodiment, to a touch pad assembly for use in a computing device. The touch pad assembly has a touch sensitive surface for accepting contact with an object. The touch pad assembly is configured to provide polar coordinate information of the object relative to the touch sensitive surface when the object is moved about the touch sensitive surface.

The invention relates, in another embodiment, to a user input system having a touch pad, a display and a controller. The system is configured to convert angular or radial data associated with the touch pad into control inputs associated with the display. By way of example, the control inputs may correspond to translational movements associated with scrolling or other related linear actions.

The invention relates, in another embodiment, to a battery powered handheld music player. The handheld music player includes a housing that supports various electrical components that provide computing operations for the music player. The handheld music player also includes a memory device disposed inside the housing and configured to store a plurality of songs in a digital format. The handheld music player additionally includes a display screen provided at a first portion of a front surface of the housing, and configured to present a list of songs from the plurality of stored songs and to present a visual indicator that is capable of linearly traversing through the list of songs in order to designate a specific song from the list of songs. The handheld music player further includes a touch pad assembly provided at a second portion of the front surface of the housing. The touch pad assembly is configured to track the motion of a finger sliding thereon. The touch pad assembly includes a planar touch surface that is dimensioned to allow sliding movement of a finger thereon.

Moreover, the handheld music player includes a controller disposed inside the housing and configured to acquire motion information from the touch pad assembly and to control various features of the music player based on motion information provided by the touch pad assembly. The features include at least moving the visual indicator through the list of songs. The direction and speed of the movement of the visual indicator is based at least in part on the direction and speed of the finger sliding across the planar touch surface of the touch pad assembly. The handheld music player also includes a button provided at the front surface of the housing, and configured to select the specific song designated by the visual indicator. The handheld music player additionally includes an audio feedback device disposed inside the housing, and configured to provide audio feedback in conjunction with movement of the visual indicator as it traverses through the song list. The handheld music player further includes audio output components for outputting music associated with the selected specific song from the list of songs, the components including at least an amplifier and a headphone jack.

The invention relates, in another embodiment, to a battery powered handheld music player. The handheld music player includes a housing that supports various electrical components that provide computing operations for the music player. The handheld music player also includes a memory device disposed inside the housing and configured to store a plurality of songs in a digital format. The handheld music player additionally includes a display screen provided at a front surface of the housing, and configured to present a list of songs from the plurality of stored songs and to present a visual indicator that is capable of linearly traversing through the list of songs in order to designate a specific song from the list of songs. The handheld music player further includes a touch pad assembly provided at the front surface of the housing. The touch pad assembly is configured to track the motion of a finger sliding thereon. The touch pad assembly includes a planar touch surface that is dimensioned to allow sliding movement of a finger thereon.

Moreover, the handheld music player includes a controller disposed inside the housing and configured to acquire motion information from the touch pad assembly and to control various features of the music player based on motion information provided by the touch pad assembly. The features include at least moving the visual indicator through the list of songs. The direction and speed of the movement of the visual indicator is based at least in part on the direction and speed of the finger sliding across the planar touch surface of

5

the touch pad assembly. The handheld music player also includes audio output components for outputting music associated with the selected specific song from the list of songs, the components including at least an amplifier and a headphone jack.

The invention relates, in another embodiment, to a media player for storing and playing media such as audio, video or images. The media player includes a housing that encloses internally various electrical components that provide computing operations for the media player. The media player also includes a touch pad supported at the housing and providing a first user input element for the media player. The touch pad includes input areas for processing input from a finger sliding across any portion of the touch pad. The media player further includes a button that is visibly distinct from the touch pad and providing a second user input element for the media player. The button processes input from a finger pressing thereon. The media player additionally includes one or more media delivery devices configured to output media.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

FIG. 1 is a simplified diagram of a touch pad and display.

FIG. 2 is a perspective view of a media player, in accordance with one embodiment of the present invention.

FIG. 3 is top view of a media player in use, in accordance with one embodiment of the present invention.

FIG. 4 is a simplified block diagram of a touchpad/display system, in accordance with one embodiment of the present invention.

FIG. 5 is a top view of a sensor arrangement of a touch pad, in accordance with another embodiment of the present invention.

FIG. 6 is a top view of a sensor arrangement of a touch pad, in accordance with another embodiment of the present invention.

FIG. 7 is a top view of a sensor arrangement of a touch pad, in accordance with another embodiment of the present invention.

FIG. 8 is a partially broken away perspective view of an annular capacitive touch pad, in accordance with one embodiment of the present invention.

FIG. 9 is a flow diagram of touch pad-display processing, in accordance with one embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to touch pads. According to one aspect of the invention, a touch pad is provided on a media player to facilitate user interaction therewith. In one embodiment, the media player is a handheld device. According to another aspect of the invention, a touch pad is provided that can sense and resolve angular and/or radial positions of a moving object (e.g., finger) as it is moved in a largely rotational and/or radial manner across the touch pad. In one embodiment, the touch pad that is based on polar coordinates rather than Cartesian coordinates. Other aspects of the invention will become apparent below. In any case, the aspects are not limiting and the various aspects of the invention can be used separately or in combination.

6

The present invention will now be described in detail with reference to a few preferred embodiments thereof as illustrated in the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without some or all of these specific details. In other instances, well known process steps have not been described in detail in order not to unnecessarily obscure the present invention.

FIG. 2 is a perspective diagram of a media player 100, in accordance with one embodiment of the present invention. The term "media player" generally refers to computing devices that are dedicated to processing media such as audio, video or other images, as for example, music players, game players, video players, video recorders, cameras and the like. These devices are generally portable so as to allow a user to listen to music, play games or video, record video or take pictures wherever the user travels. In one embodiment, the media player is a handheld device that is sized for placement into a pocket of the user. By being pocket sized, the user does not have to directly carry the device and therefore the device can be taken almost anywhere the user travels (e.g., the user is not limited by carrying a large, bulky and often heavy device, as in a portable computer). For example, in the case of a music player, a user may use the device while working out at the gym. In case of a camera, a user may use the device while mountain climbing. Furthermore, the device may be operated by the users hands, no reference surface such as a desktop is needed (this is shown in greater detail in FIG. 3).

Media players generally have connection capabilities that allow a user to upload and download data to and from a host device such as a general purpose computer (e.g., desktop computer, portable computer). For example, in the case of a camera, photo images may be downloaded to the general purpose computer for further processing (e.g., printing). With regards to music players, songs and play lists stored on the general purpose computer may be downloaded into the music player. In the illustrated embodiment, the media player 100 is a pocket sized hand held MP3 music player that allows a user to store a large collection of music. By way of example, the MP3 music player may store up to 1,000 CD-quality songs.

As shown in FIG. 2, the media player 100 includes a housing 102 that encloses internally various electrical components (including integrated circuit chips and other circuitry) to provide computing operations for the media player 100. The integrated circuit chips and other circuitry may include a microprocessor, memory (e.g., ROM, RAM), a power supply (e.g., battery), a circuit board, a hard drive, and various input/output (I/O) support circuitry. In the case of music players, the electrical components may include components for outputting music such as an amplifier and a digital signal processor (DSP). In the case of video recorders or cameras the electrical components may include components for capturing images such as image sensors (e.g., charge coupled device (CCD) or complementary oxide semiconductor (CMOS)) or optics (e.g., lenses, splitters, filters). In addition to the above, the housing may also define the shape or form of the media player. That is, the contour of the housing 102 may embody the outward physical appearance of the media player 100.

The media player 100 also includes a display screen 104. The display screen 104 is used to display a graphical user interface as well as other information to the user (e.g., text, objects, graphics). By way of example, the display screen

7

**104** may be a liquid crystal display (LCD). In one particular embodiment, the display screen corresponds to a 160-by-128-pixel high-resolution display, with a white LED backlight to give clear visibility in daylight as well as low-light conditions. As shown, the display screen **104** is visible to a user of the media player **100** through an opening **105** in the housing **102**, and through a transparent wall **106** that is disposed in front of the opening **105**. Although transparent, the transparent wall **106** may be considered part of the housing **102** since it helps to define the shape or form of the media player **100**.

The media player **100** also includes a touch pad **110**. The touch pad **110** is configured to provide one or more control functions for controlling various applications associated with the media player **100**. For example, the touch initiated control function may be used to move an object or perform an action on the display screen **104** or to make selections or issue commands associated with operating the media player **100**. In most cases, the touch pad **110** is arranged to receive input from a finger moving across the surface of the touch pad **110** in order to implement the touch initiated control function. The touch pad may be widely varied. For example, the touch pad be a conventional touch pad based on the Cartesian coordinate system, or the touch pad may be a touch pad based on a polar coordinate system (the later will be described in greater detail below).

The manner in which the touch pad **110** receives input may be widely varied. In one embodiment, the touch pad **110** is configured receive input from a linear finger motion. In another embodiment, the touch pad **110** is configured receive input from a rotary or swirling finger motion. In yet another embodiment, the touch pad **110** is configured receive input from a radial finger motion. Additionally or alternatively, the touch pad **110** may be arranged to receive input from a finger tapping on the touch pad **100**. By way of example, the tapping finger may initiate a control function for playing a song, opening a menu and the like.

In one embodiment, the control function corresponds to a scrolling feature. For example, in the case of an MP3 player, the moving finger may initiate a control function for scrolling through a song menu displayed on the display screen **104**. The term "scrolling" as used herein generally pertains to moving displayed data or images (e.g., text or graphics) across a viewing area on a display screen **104** so that a new set of data (e.g., line of text or graphics) is brought into view in the viewing area. In most cases, once the viewing area is full, each new set of data appears at the edge of the viewing area and all other sets of data move over one position. That is, the new set of data appears for each set of data that moves out of the viewing area. In essence, the scrolling function allows a user to view consecutive sets of data currently outside of the viewing area. The viewing area may be the entire viewing area of the display screen **104** or it may only be a portion of the display screen **104** (e.g., a window frame).

The direction of scrolling may be widely varied. For example, scrolling may be implemented vertically (up or down) or horizontally (left or right). In the case of vertical scrolling, when a user scrolls down, each new set of data appears at the bottom of the viewing area and all other sets of data move up one position. If the viewing area is full, the top set of data moves out of the viewing area. Similarly, when a user scrolls up, each new set of data appears at the top of the viewing area and all other sets of data move down one position. If the viewing area is full, the bottom set of data moves out of the viewing area. In one implementation, the scrolling feature may be used to move a Graphical User

8

Interface (GUI) vertically (up and down), or horizontally (left and right) in order to bring more data into view on a display screen. By way of example, in the case of an MP3 player, the scrolling feature may be used to help browse through songs stored in the MP3 player. The direction that the finger moves may be arranged to control the direction of scrolling. For example, the touch pad may be arranged to move the GUI vertically up when the finger is moved in a first direction and vertically down when the finger is moved in a second direction.

To elaborate, the display screen **104**, during operation, may display a list of media items (e.g., songs). A user of the media player **100** is able to linearly scroll through the list of media items by moving his or her finger across the touch pad **110**. As the finger moves around the touch pad **110**, the displayed items from the list of media items are varied such that the user is able to effectively scroll through the list of media items. However, since the list of media items can be rather lengthy, the invention provides the ability for the user to rapidly traverse (or scroll) through the list of media items. In effect, the user is able to accelerate their traversal of the list of media items by moving his or her finger at greater speeds.

In one embodiment, the media player **100** via the touch pad **110** is configured to transform a swirling or whirling motion of a finger into translational or linear motion, as in scrolling, on the display screen **104**. In this embodiment, the touch pad **110** is configured to determine the angular location, direction, speed and acceleration of the finger when the finger is moved across the top planar surface of the touch pad **110** in a rotating manner, and to transform this information into signals that initiate linear scrolling on the display screen **104**. In another embodiment, the media player **100** via the touch pad **110** is configured to transform radial motion of a finger into translational or linear motion, as in scrolling, on the display screen **104**. In this embodiment, the touch pad **110** is configured to determine the radial location, direction, speed and acceleration of the finger when the finger is moved across the top planar surface of the touch pad **110** in a radial manner, and to transform this information into signals that initiate linear scrolling on the display screen **104**. In another embodiment, the media player **100** via the touch pad **202** is configured to transform both angular and radial motion of a finger into translational or linear motion, as in scrolling, on the display screen **104**.

The touch pad generally consists of a touchable outer surface **111** for receiving a finger for manipulation on the touch pad **110**. Although not shown in FIG. 2, beneath the touchable outer surface **111** is a sensor arrangement. The sensor arrangement includes a plurality of sensors that are configured to activate as the finger passes over them. In the simplest case, an electrical signal is produced each time the finger passes a sensor. The number of signals in a given time frame may indicate location, direction, speed and acceleration of the finger on the touch pad, i.e., the more signals, the more the user moved his or her finger. In most cases, the signals are monitored by an electronic interface that converts the number, combination and frequency of the signals into location, direction, speed and acceleration information. This information may then be used by the media player **100** to perform the desired control function on the display screen **104**.

The position of the touch pad **110** relative to the housing **102** may be widely varied. For example, the touch pad **110** may be placed at any external surface (e.g., top, side, front, or back) of the housing **102** that is accessible to a user during manipulation of the media player **100**. In most cases, the

touch sensitive surface **111** of the touch pad **110** is completely exposed to the user. In the illustrated embodiment, the touch pad **110** is located in a lower, front area of the housing **102**. Furthermore, the touch pad **110** may be recessed below, level with, or extend above the surface of the housing **102**. In the illustrated embodiment, the touch sensitive surface **111** of the touch pad **110** is substantially flush with the external surface of the housing **102**.

The shape of the touch pad **110** may also be widely varied. For example, the touch pad **110** may be circular, rectangular, triangular, and the like. In general, the outer perimeter of the shaped touch pad defines the working boundary of the touch pad. In the illustrated embodiment, the touch pad **110** is circular. Circular touch pads allow a user to continuously swirl a finger in a free manner, i.e., the finger can be rotated through 360 degrees of rotation without stopping. Furthermore, the user can rotate his or her finger tangentially from all sides thus giving it more range of finger positions. For example, when the media player is being held, a left handed user may choose to use one portion of the touch pad **110** while a right handed user may choose to use another portion of the touch pad **110**. More particularly, the touch pad is annular, i.e., shaped like or forming a ring. When annular, the inner and outer perimeter of the shaped touch pad defines the working boundary of the touch pad.

In addition to above, the media player **100** may also include one or more buttons **112**. The buttons **112** are configured to provide one or more dedicated control functions for making selections or issuing commands associated with operating the media player **100**. By way of example, in the case of an MP3 music player, the button functions may be associated with opening a menu, playing a song, fast forwarding a song, seeking through a menu and the like. In most cases, the button functions are implemented via a mechanical clicking action. The position of the buttons **112** relative to the touch pad **110** may be widely varied. For example, they may be adjacent one another or spaced apart. In the illustrated embodiment, the buttons **112** are configured to surround the inner and outer perimeter of the touch pad **110**. In this manner, the buttons **112** may provide tangible surfaces that define the outer boundaries of the touch pad **110**. As shown, there are four buttons **112A** that surround the outer perimeter and one button **112B** disposed in the center or middle of the touch pad **110**. By way of example, the plurality of buttons **112** may consist of a menu button, play/stop button, forward seek button and a reverse seek button, and the like.

Moreover, the media player **100** may also include a power switch **114**, a headphone jack **116** and a data port **118**. The power switch **114** is configured to turn the media device **100** on and off. The headphone jack **116** is capable of receiving a headphone connector associated with headphones configured for listening to sound being outputted by the media device **100**. The data port **118** is capable of receiving a data connector/cable assembly configured for transmitting and receiving data to and from a host device such as a general purpose computer. By way of example, the data port **118** may be used to upload or download songs to and from the media device **100**. The data port **118** may be widely varied. For example, the data port may be a PS/2 port, a serial port, a parallel port, a USB port, a Firewire port and the like. In some cases, the data port **118** may be a radio frequency (RF) link or optical infrared (IR) link to eliminate the need for a cable. Although not shown in FIG. 2, the media player **100** may also include a power port that receives a power connector/cable assembly configured for delivering power to

the media player **100**. In some cases, the data port **118** may serve as both a data and power port.

FIGS. 3A-3C show the media player **100** of FIG. 2 being used by a user **120**, in accordance with different embodiments of the invention. In all of these embodiments, the user **120** is linearly scrolling **104** (as shown by arrow **124**) through a list of songs **122** displayed on the display screen via a slider bar **123**. As shown, the media device **100** is comfortably held by one hand **126** while being comfortably addressed by the other hand **128**. This configuration generally allows the user **120** to easily actuate the touch pad **110** with one or more fingers. For example, the thumb **130** and rightmost fingers **131** (or leftmost fingers if left handed) of the first hand **126** are used to grip the sides of the media player **100** while a finger **132** of the opposite hand **128** is used to actuate the touch pad **110**. As shown, the entire top surface of the touch pad **110** is accessible to the user's finger **130**.

Referring to FIG. 3A, and in accordance with one embodiment of the invention, the touch pad **110** can be continuously actuated by a simple swirling motion of the finger **132** as shown by arrow **134**. By swirling, it is meant that the finger moves in an arcuate or circular manner. For example, the finger may rotate relative to an imaginary axis. In particular, the finger can be rotated through 360 degrees of rotation without stopping. This form of motion may produce continuous or incremental scrolling on the display screen **104**.

Referring to FIG. 3B, and in accordance with one embodiment of the invention, the user **120** can slide his or her finger **132** radially between the inner and outer perimeter of the touch pad **110**. For example, the touch pad **110** may be actuated radially as shown by arrow **140**.

Referring to FIG. 3C, and in accordance with one embodiment of the invention, the user **120** can slide his or her finger **132** substantially tangentially from all sides of the touch pad **110**. For example, the touch pad **110** may be actuated forwards and backwards as shown by arrows **136** and side to side by arrows **138**.

FIG. 4 is a block diagram of a touchpad/display system **200**, in accordance with one embodiment of the invention. By way of example, the touchpad/display system **200** may be used in the media player shown in FIGS. 2 and 3. The touchpad/display system **200** utilizes a touch pad **202** and a display screen **204**. The touchpad/display system **200** via the touch pad **202** is configured to transform a swirling or whirling motion **206** of an object such as a finger (as shown in FIG. 3A) into translational or linear motion **208** on the display screen **204**. In one embodiment, the touch pad **202** is arranged to continuously determine the angular position of an object relative to the planar surface **209** of the touch pad **202**. This allows a user to linearly scroll through a media list **211** on the display screen **204** by swirling the object at least partially around the touch pad **202**. For example, by moving the object between any angular positions (e.g., 0-360) on the touch pad **202**.

As shown, the touch pad **202** is divided into several independent and spatially distinct zones **210** that are positioned around the periphery of the touch pad **202**. Any number of zones may be used. In one embodiment, each of the zones **210** represents a polar angle that specifies the angular position of the zone in the plane of the touch pad **202**. By way of example, the zones **210** may be positioned at 2 degree increments all the way around the touch pad **202**. Each of the zones **210** has an associated sensor disposed therein for detecting the presence of an object such as a finger. The sensors may be widely varied. For example, the



11

sensors may be based on resistive sensing, surface acoustic wave sensing, pressure sensing (e.g., strain gauge, pressure plates, piezoelectric transducers or the like), optical sensing, capacitive sensing and the like. In general, when an object approaches a zone **210**, and more particularly a sensor, a position signal is generated that informs the media system **200** that the object is at a specific angular position on the touch pad **202**. When an object is moved between zones **210** or over multiple zones **210**, multiple position signals are generated. These multiple position signals may be used to determine the angular location, direction, speed and acceleration of the object as its moved around the touch pad **202**.

The system **200** also includes a control assembly **212** that is coupled to the touch pad **202**. The control assembly **212** is configured to acquire the position signals from the sensors and to supply the acquired signals to a processor **214** of the system. By way of example, the control assembly **212** may include an application specific integrated circuit (ASIC) that is configured to monitor the signals from the sensors, to compute the angular location, direction, speed and acceleration of the monitored signals and to report this information to the processor **214**.

The processor **214** is coupled between the control assembly **212** and the display screen **204**. The processor **214** is configured to control motion inputs to the display screen **204**. In one sequence, the processor **214** receives angular motion information from the control assembly **212** and then determines the next items of the media list **211** that are to be presented on the display screen **204**. In making this determination, the processor **214** can take into consideration the length of the media list **211**. Typically, the processor **214** will determine the rate of movement of the finger such that the transitioning to different items in the media list **211** can be performed faster when the finger is moved at greater speeds. In effect, to the user, the more rapid swirling of the finger enables effective acceleration of the transitioning of the list of media items **211**. Alternatively, the control assembly **212** and processor **214** may be combined in some embodiments.

Although not shown, the processor **214** can also control a buzzer to provide audio feedback to a user. The audio feedback can, for example, be a clicking sound produced by the buzzer. In one embodiment, the buzzer **216** is a piezoelectric buzzer. As the rate of transitioning through the list of media items increases, the frequency of the clicking sounds increases. Alternatively, when the rate that the finger is moved slows, the rate of transitioning through the list of media items decreases, and thus the frequency of the clicking sounds correspondingly slows. Hence, the clicking sounds provide audio feedback to the user as to the rate in which the media items within the list of media items are being traversed.

Additionally or alternatively, the system via the touch pad may be configured to transform radial motion an object such as a finger (as shown in FIG. 3B) into translational or linear motion on the display screen. By radial, it is meant that the object moves in a substantially radial direction from the center of the touch pad to an outer perimeter of the touch pad. In one embodiment, the touch pad is arranged to continuously determine the radial position of a finger relative to the planar surface of the touch pad. This allows a user to linearly scroll through a media list on the display screen by moving the object at least partially between the center and outer perimeter of the touch pad. For example, by moving the object between a small and large radius (e.g., 0-3 cm) on the touch pad. This may also allow a user to vary a characteristic of the media player. For example, by moving

12

radially, the user may be able to change the volume of sound being played on the media player (i.e., acts like a potentiometer).

Referring to FIG. 5, a radial touch pad **218** will be discussed in accordance with one embodiment. By way of example, the touch pad **218** may replace the touch pad shown in FIG. 4. The touch pad **218** may be divided into several independent and spatially distinct zones **220** that are positioned radially from the center **222** of the touch pad **218** to the perimeter **224** of the touch pad **218**. Any number of radial zones may be used. In one embodiment, each of the radial zones **220** represents a radial position in the plane of the touch pad **218**. By way of example, the zones **220** may be spaced at 5 mm increments. Like above, each of the zones **220** has an associated sensor disposed therein for detecting the presence of an object such as a finger. In general, when an object approaches a zone **220**, and more particularly a sensor, a position signal is generated that informs the system **200** that the object is at a specific radial position on the touch pad **218**. When an object is moved between zones **220** or over multiple zones **220**, multiple position signals are generated. These multiple position signals may be used to determine radial location, direction, speed and acceleration of the object as its moved radially across the touch pad **218**.

Referring to FIG. 6, a combination angular/radial touch pad **228** will be discussed in accordance with one embodiment. By way of example, the touch pad **228** may replace the touch pad shown in FIG. 4. The touch pad **228** may be divided into several independent and spatially distinct zones **230** that are positioned both angularly and radially about the periphery of the touch pad **228** and from the center of the touch pad **202** to the perimeter of the touch pad **228**. Any number of combination zones may be used. In one embodiment, each of the combination zones **230** represents both an angular and radial position in the plane of the touch pad **228**. By way of example, the zones may be positioned at both 2 degrees and 5 mm increments. Like above, each of the combination zones **230** has an associated sensor disposed therein for detecting the presence of an object such as a finger. In general, when an object approaches a combination zone **230**, and more particularly a sensor, a position signal is generated that informs the system **200** that the object is at a specific angular and radial position on the touch pad **228**. When an object is moved between combination zones **230** or over multiple combinations zones **230**, multiple position signals are generated. These multiple position signals may be used to determine location, direction, speed and acceleration of the object as its angularly and radially moved across the touch pad **228**. The angular and radial zones may be initiated at the same time or they may be initiated at different times. For example, the angular zones may be initiated for scrolling through a media player and the radial zones may be initiated for varying the volume of a media player.

It should be noted that although the touch pads of FIGS. 4-6 are all shown as circular that they may take on other forms such as other curvilinear shapes (e.g., oval, annular and the like), rectilinear shapes (e.g., hexagon, pentagon, octagon, rectangle, square, and the like) or a combination of curvilinear and rectilinear (e.g., dome).

Furthermore, in order to provide higher resolution, a more complex arrangement of zones may be used. For example, as shown in FIG. 7, the touch pad **238** may include angular and radial zones **240** that are broken up such that consecutive zones do not coincide exactly. In this embodiment, the touch pad **202** has an annular shape and the zones **240** follow a

13

spiral path around the touch pad **202** from the center to the outer perimeter of the touch pad **202**.

FIG. **8** is a partially broken away perspective view of an annular capacitive touch pad **250**, in accordance with one embodiment of the present invention. By way of example, the annular capacitive touch pad **250** may correspond to the touch pad of FIG. **2**. The annular capacitive touch pad **250** is arranged to detect changes in capacitance as the user swirls an object such as a finger around the touch pad **250**. The annular capacitive touch pad **250** is also arranged to detect changes in capacitance as the user moves their finger radially across the touch pad **250**. The annular capacitive touch pad **250** is formed from various layers including at least a label layer **252**, an electrode layer **254** and a circuit board **256**. The label layer **252** is disposed over the electrode layer **254** and the electrode layer **254** is disposed over the circuit board **256**. At least the label **252** and electrode layer **254** are annular such that they are defined by concentric circles, i.e., they have an inner perimeter and an outer perimeter. The circuit board **256** is generally a circular piece having an outer perimeter that coincides with the outer perimeter of the label **252** and electrode layer **254**. It should be noted, however, that in some cases the circuit board **256** may be annular or the label **252** and electrode layer **254** may be circular.

The label layer **252** serves to protect the underlayers and to provide a surface for allowing a finger to slide thereon. The surface is generally smooth so that the finger does not stick to it when moved. The label layer **252** also provides an insulating layer between the finger and the electrode layer **254**. The electrode layer **254** includes a plurality of spatially distinct electrodes **258** that have positions based on the polar coordinate system. For instance, the electrodes **258** are positioned both angularly and radially on the circuit board **256** such that each of the electrodes **258** defines a distinct angular and radial position thereon. Any suitable number of electrodes **258** may be used. In most cases, it would be desirable to increase the number of electrodes **258** so as to provide higher resolution, i.e., more information can be used for things such as acceleration.

When configured together, the touch pad **250** provides a touch sensitive surface that works according to the principals of capacitance. As should be appreciated, whenever two electrically conductive members come close to one another without actually touching, their electric fields interact to form capacitance. In this configuration, the first electrically conductive member is one or more of the electrodes **258** and the second electrically conductive member is the finger of the user. Accordingly, as the finger approaches the touch pad **250**, a tiny capacitance forms between the finger and the electrodes **258** in close proximity to the finger. The capacitance in each of the electrodes **258** is measured by control circuitry **260** located on the backside of the circuit board **256**. By detecting changes in capacitance at each of the electrodes **258**, the control circuitry **260** can determine the angular location, direction, speed and acceleration of the finger as it is moved across the touch pad **250**. The control circuitry **260** can also report this information in a form that can be used by a computing device. By way of example, the control circuitry may include an ASIC (application specific integrated circuit).

FIG. **9** is a flow diagram of touch pad-display processing **300**, in accordance with one embodiment of the invention. The touch pad-display processing **300** allows a user to interact with a graphical user interface of a computing device. The touch pad-display processing **300** generally begins at block **302** where at least one control object is

14

displayed on the graphical user interface. By way of example, the control object may be a slider bar that highlights information from a list in a menu displayed on a graphical user interface on a display screen. The displayed control object is generally controlled by the processor **214** illustrated in FIG. **3**. Following block **302**, the touch pad-display processing proceeds to block **304** where a user input is received. The user input may be received by the processor **214** illustrated in FIG. **3**. In one embodiment, the user input is an angular referenced input, as for example, a user input produced by a rotational user action such as a finger swirling across the touch pad. By way of example, the touch pad may correspond to the touch pad illustrated in FIG. **3**. In another embodiment, the user input is a radial referenced input, as for example, a user input produced by a radial user action such as a finger radially moving across the touch pad. By way of example, the touch pad may correspond to the touch pad illustrated in FIG. **4**.

Following block **304**, the touch pad-display processing proceeds to block **306** where the angular or radial referenced user input is converted into a linear referenced input. The conversion may be implemented by the processor **212** illustrated in FIG. **3**. Following block **306**, the touch pad-display processing proceeds to block **308** where control object is modified in accordance with the linear referenced input. For example, the control object such as a slider bar may be linearly moved from a first item to a second item on a list or it may be moved through multiple items on a list (e.g., scrolling). The modification is generally implemented when the processor **214** illustrated in FIG. **3** supplies the linear referenced input to the graphical user interface on the display screen.

The various aspects of the invention described above can be used alone or in various combinations. The invention is preferably implemented by a combination of hardware and software, but can also be implemented in hardware or software. The invention can also be embodied as computer readable code on a computer readable medium. The computer readable medium is any data storage device that can store data which can thereafter be read by a computer system. Examples of the computer readable medium include read-only memory, random-access memory, CD-ROMs, DVDs, magnetic tape, optical data storage devices, and carrier waves. The computer readable medium can also be distributed over a network coupled computer systems so that the computer readable code is stored and executed in a distributed fashion.

Furthermore, although a scrolling feature is described, it should be noted that a scrolling feature is not a limitation and that the touch pad may be used to manipulate other features. For example, the touch pad may be used to adjust a volume control in an audio application. In addition, the touch pad may be used to advance through frames in a movie in video editing applications. The touch pad may also be used in video game applications.

The advantages of the invention are numerous. Different embodiments or implementations may yield one or more of the following advantages. It should be noted that this is not an exhaustive list and there may be other advantages which are not described herein. One advantage of the invention is that a user is able to easily and rapidly traverse a lengthy list of media items. Another advantage of the invention is that a substantial portion of the touch pad is accessible to the user, i.e., the touch pad provides a large surface area for manipulation thereof. Another advantage of the invention is that the touch pad can be continuously actuated by a simple swirling motion of a finger, i.e., the finger can be rotated through 360

15

degrees of rotation without stopping. Another advantage of the invention is that the touch pad provides more range of finger positions. For example, a left handed user may choose to use one portion of the touch pad while a right handed user may choose to use another portion of the touch pad. In essence, the touch pad is more ergonomic. Another advantage of the invention is that the touch pad makes the media player more aesthetically pleasing. Another advantage of the invention is that the touch pad allows an intuitive way to scroll on a display screen. For example, the user can manipulate the his or her finger side to side for horizontal scrolling and the user can manipulate his or her finger backwards and forwards for vertical scrolling.

While this invention has been described in terms of several preferred embodiments, there are alterations, permutations, and equivalents, which fall within the scope of this invention. For example, although the invention has been described in terms of an MP3 music player, it should be appreciated that certain features of the invention may also be applied to other types of media players such as video recorders, cameras, and the like. Furthermore, the MP3 music player described herein is not limited to the MP3 music format. Other audio formats such as MP3 VBR (variable bit rate), AIFF and WAV formats may be used. Moreover, certain aspects of the invention are not limited to handheld devices. For example, the touch pad may also be used in other computing devices such as a portable computer, personal digital assistants (PDA), cellular phones, and the like. The touch pad may also be used a stand alone input device that connects to a desktop or portable computer. It should also be noted that there are many alternative ways of implementing the methods and apparatuses of the present invention. For example, although the touch pad has been described in terms of being actuated by a finger, it should be noted that other objects may be used to actuate it in some cases. For example, a stylus or other object may be used in some configurations of the touch pad. It is therefore intended that the following appended claims be interpreted as including all such alterations, permutations, and equivalents as fall within the true spirit and scope of the present invention.

What is claimed is:

1. A battery powered handheld music player, comprising:
  - a housing that supports various electrical components that provide computing operations for the music player;
  - a memory device disposed inside the housing and configured to store a plurality of songs in a digital format;
  - a display screen provided at a first portion of a front surface of the housing, and configured to present a list of songs from the plurality of stored songs and to present a visual indicator that is capable of linearly traversing through the list of songs in order to designate a specific song from the list of songs;
  - a touch pad assembly provided at a second portion of the front surface of the housing, the touch pad assembly being configured to track the arcuate motion of a finger sliding thereon, the touch pad assembly including a planar touch surface that is dimensioned to allow sliding arcuate movement of a finger thereon;
  - a controller disposed inside the housing and configured to acquire motion information from the touch pad assembly and to control various features of the music player based on motion information provided by the touch pad assembly, the features including at least linearly moving the visual indicator through the list of songs, the linear direction and speed of the movement of the visual indicator being based at least in part on the

16

- arcuate direction and speed of the finger sliding across the planar touch surface of the touch pad assembly;
  - a button provided at the front surface of the housing, the button being configured to select the specific song designated by the visual indicator;
  - an audio feedback device disposed inside the housing, and configured to provide audio feedback in conjunction with movement of the visual indicator as it traverses through the song list; and
  - audio output components for outputting music associated with the selected specific song from the list of songs, the components including at least an amplifier and a headphone jack.
2. The music player as recited in claim 1 wherein the touch pad assembly is based on capacitance.
3. The music player as recited in claim 1 wherein the features further include controlling the volume of the music that is outputted by the music player.
4. The music player as recited in claim 1 wherein the planar touch surface is circular.
5. The music player as recited in claim 1 wherein the top of the planar touch surface is recessed.
6. The music player as recited in claim 1 further including a data port capable of receiving a data connector/cable assembly for the purpose of uploading or downloading songs to and from the music player, the data port being located at the bottom surface of the music player.
7. A battery powered handheld music player, comprising:
  - a housing that supports various electrical components that provide computing operations for the music player;
  - a memory device disposed inside the housing and configured to store a plurality of songs in a digital format;
  - a display screen provided at a front surface of the housing, and configured to present a list of songs from the plurality of stored songs and to present a visual indicator that is capable of linearly traversing through the list of songs in order to designate a specific song from the list of songs;
  - a touch pad assembly provided at the front surface of the housing, the touch pad assembly being configured to track the arcuate motion of a finger sliding thereon, the touch pad assembly including a planar touch surface that is dimensioned to allow sliding movement of a finger thereon;
  - a controller disposed inside the housing and configured to acquire motion information from the touch pad assembly and to control various features of the music player based on motion information provided by the touch pad assembly, the features including at least linearly moving the visual indicator through the list of songs, the direction and speed of the movement of the visual indicator being based at least in part on the arcuate direction and speed of the finger sliding across the planar touch surface of the touch pad assembly;
  - audio output components for outputting music associated with the selected specific song from the list of songs, the components including at least an amplifier and a headphone jack.
8. The music player as recited in claim 7 wherein the touch pad assembly is formed from various interconnected layers including, a label layer; an electrode layer disposed below the label layer and having a shape that substantially coincides with the shape of the label layer, the electrode layer including a plurality of spatially separated electrodes for processing input from sliding finger motion; a circuit board disposed below the electrode layer; and control circuitry disposed below the circuit board and configured to detect capacitive changes at each of the electrodes.

17

9. The music player as recited in claim 7 wherein the controller is configured to transform angular motion of a finger sliding on the touch pad assembly to linear motion in the display screen.

10. The music player as recited in claim 7 wherein the media player further comprises: at least one button provided at the front surface of the housing along with the planar touch surface.

11. The music player as recited in claim 10 wherein the button is visibly distinct from the planar touch surface.

12. The music player as recited in claim 10 wherein the button is configured to select the specific song designated by the visual indicator.

13. The music player as recited in claim 7 wherein the touch pad assembly is configured to select the specific song designated by the visual indicator.

14. The music player as recited in claim 7 further comprising an audio feedback device disposed inside the housing, and configured to provide audio feedback in conjunction with movement of the visual indicator as it traverses through the song list.

15. The music player as recited in claim 7 wherein the features further include controlling the volume of the music that is outputted by the music player.

16. The music player as recited in claim 7 wherein the display screen is visible to a user through an opening in the housing, and through a transparent wall that is disposed in front of the opening.

17. A media player for storing and playing media such as audio, video or images, the media player comprising:

a housing that encloses internally various electrical components that provide computing operations for the media player;

a touch pad supported at the housing and providing a first user input element for the media player, the touch pad including input areas for processing input from a finger sliding across any portion of the touch pad;

a button that is visibly distinct from the touch pad and providing a second user input element for the media player, the button processing input from a finger pressing thereon; and

18

one or more media delivery devices configured to output media,

wherein the touch pad is arranged to receive input from a finger on a surface of the touch pad to implement a control function with respect to operation of the media player,

a display screen configured to display text and graphics to a user of the media device, the display screen being supported by the housing,

wherein the control function corresponds to a scrolling feature that allows an object to move linearly from one media item to another media item in a group of media items displayed on the display screen, the object designating a particular media item to be selected, the selection being performed by the button, the object moving in a linear direction and at a speed related at least in part to an arcuate direction and a speed of the finger moving in an arcuate manner relative to the touch surface of the touch pad.

18. The media player as recited in claim 17 wherein the touch pad includes angular input areas and wherein the angular input areas are configured to receive input from a swirling finger motion.

19. The media player as recited in claim 18 wherein the angular input areas are configured to receive input from a swirling finger motion.

20. The media player as recited in claim 17 wherein the button is disposed at a central portion of the touch pad.

21. The media player as recited in claim 17 wherein the button is disposed at the outer periphery of the touch pad.

22. The media player as recited in claim 17 wherein the control function is associated with making selections or issuing commands for use by the media delivery device.

23. The media player as recited in claim 17, wherein the touch pad includes angular input areas, wherein the angular input areas are configured to receive input from a swirling finger motion, and wherein the control function corresponds to a volume control feature, the volume being based on the amount of swirling finger motion.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 1 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title page:

Under (56) References Cited, under "U.S. PATENT DOCUMENTS," please

add the following references:

4,110,749	08/1978	Janko et al.
4,264,903	04/1981	Bigelow
4,719,524	01/1988	Morishima et al.
4,866,602	09/1989	Hall
4,719,516	04/1990	Retter
5,125,077	06/1992	Hall
5,179,648	01/1993	Hauck
5,186,646	02/1993	Pederson
5,237,311	08/1993	Mailey et al.
5,339,213	08/1994	O'Callaghan
D349,280	08/1994	Kaneko
5,404,152	04/1995	Nagai
5,414,445	05/1995	Kaneko et al.
5,438,331	08/1995	Gilligan et al.
D362,431	09/1995	Kaneko et al.
5,473,343	12/1995	Kimmich et al.

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 2 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

5,473,344	12/1995	Bacon et al.
5,495,566	02/1996	Kwatinetz
5,559,943	09/1996	Cyr et al.
5,561,445	10/1996	Michio et al.
5,565,887	10/1996	McCambridge et al.
5,578,817	11/1996	Bidiville et al.
5,585,823	12/1996	Duchon et al.
5,596,347	01/1997	Robertson et al.
5,598,183	01/1997	Robertson et al.
5,611,040	03/1997	Brewer et al.
5,611,060	03/1997	Belfiore et al.
D382,550	08/1997	Kaneko et al.
D385,542	10/1997	Kaneko et al.
5,726,687	03/1998	Belfiore et al.
5,729,219	03/1998	Armstrong et al.
5,730,165	03/1998	Philipp
5,748,185	05/1998	Stephan et al.
5,751,274	05/1998	Davis
5,754,890	05/1998	Holmdahl et al.
5,786,818	07/1998	Brewer et al.

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 3 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

5,808,602	09/1998	Sellers, Charles A.
5,825,353	10/1998	Will
5,828,364	10/1998	Siddiqui
5,838,304	11/1998	Hall
D402,281	12/1998	Ledbetter et al.
5,850,213	12/1998	Imai et al.
5,856,822	01/1999	Du et al.
5,883,619	03/1999	Ho et al.
5,889,236	03/1999	Gillespie et al.
5,907,152	05/1999	Dandiliker et al.
5,907,318	05/1999	Medina
5,909,211	06/1999	Combs et al.
5,914,706	06/1999	Kono
5,956,019	09/1999	Bang et al.
5,959,611	09/1999	Smailagic et al.
6,002,389	12/1999	Kasser et al.
6,005,299	12/1999	Hengst, Axel
6,031,518	02/2000	Adams et al.
6,075,533	06/2000	Chang
6,084,574	07/2000	Bidiville
6,097,372	08/2000	Suzuki

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 4 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

6,124,587	09/2000	Bidiville
6,128,006	10/2000	Rosenberg et al.
6,163,312	12/2000	Furuya
6,166,721	12/2000	Kuroiwa et al.
6,179,496	01/2001	Chou, Chin-Wen
6,181,322	01/2001	Nanavati
6,188,393	02/2001	Shu
6,191,774	02/2001	Schena et al.
6,198,473	03/2001	Armstrong
6,211,861	04/2001	Rosenberg et al.
6,219,038	04/2001	Cho
D442,592	05/2001	Ledbetter et al.
6,225,976	05/2001	Yates et al.
6,225,980	05/2001	Weiss et al.
D443,616	06/2001	Fisher et al.
6,243,078	06/2001	Rosenberg
6,256,011	07/2001	Culver
6,262,717	07/2001	Donohue et al.
6,266,050	07/2001	Oh et al.
6,297,795	10/2001	Kato et al.



UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 5 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

6,323,845	11/2001	Robbins
6,340,800	01/2002	Zhai et al.
D454,568	03/2002	Andre et al.
6,373,470	04/2002	Andre et al.
6,377,530	04/2002	Burrows
6,429,852	08/2002	Adams et al.
6,587,091	07/2003	Serpa, Michael L.
6,636,197	10/2003	Goldenberg
6,650,975	11/2003	Ruffner
6,677,927	01/2004	Bruck et al.
6,686,904	02/2004	Sherman et al.
6,703,550	03/2004	Chu, Lonny L.
6,724,817	04/2004	Simpson et al.
6,727,889	04/2004	Shaw
6,738,045	05/2004	Hinckley et al.
6,791,533	09/2004	Su, Chih Wen
6,795,057	09/2004	Gordon, Gary B.
6,844,872	01/2005	Farag et al.
2001/0011991	08/2001	Wang et al.
2001/00443545	11/2001	Aratani

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 6 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

2001/0050673	12/2001	Davenport
2001/0051046	12/2001	Watanabe et al.
2002/0030665	03/2002	Ano, Tadashi
2002/0033848	03/2002	Sciammarella et al.
2002/0089545	03/2002	Levi Montalcini
2002/0118169	08/2002	Hinckley et al.
2002/0154090	10/2002	Lin, Winky
2002/0158844	10/2002	McLoone et al.
2002/0164156	11/2002	Bilbrey
2002/0180701	12/2002	Hayama et al.
2003/0043121	03/2003	Chen
2003/0050092	03/2003	Yun
2003/0076301	04/2003	Tsuk et al.
2003/0076303	04/2003	Huppi
2003/0095096	05/2003	Robbin et al.
2003/0098851	05/2003	Brink, Soren
2004/0239622	12/2004	Proctor et al.
2004/0252109	12/2004	Trent, Jr. et al.

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 7 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Under (56) References Cited, under “FOREIGN PATENT DOCUMENT,”

please add the following references:

WO	WO-98/14863	04/1988
JP	63-106826	05/1988
JP	10-326149	12/1988
EP	0 498 540	01/1992
WO	WO-94/17494	08/1994
JP	07-319001	12/1995
EP	0 880 091	01/1998
JP	2000-215549	05/1998
JP	11-194883	07/1999
JP	11-194872	07/1999
WO	WO-49443	09/1999
EP	1 026 713	08/2000
DE	10022537	11/2000
DE	19722636	12/2000

Under (56) References Cited, under “OTHER PUBLICATIONS,” please add

the following references:

“About Quicktip®” located at [www.logicad3d.com/docs/qt.html](http://www.logicad3d.com/docs/qt.html), downloaded April 8, 2002.

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 8 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

“Neuros MP3 Digital Audio Computer,” located at [www.neurosaudio.com](http://www.neurosaudio.com), downloaded April 9, 2003.

“OEM Touchpad Modules,” website [www.glidepoint.com/sales/modules.index.shtml](http://www.glidepoint.com/sales/modules.index.shtml), downloaded February 13, 2002.

“Product Overview – ErgoCommander®,” [www.logicad3d.com/products/ErgoCommander.htm](http://www.logicad3d.com/products/ErgoCommander.htm), downloaded April 8, 2002.

“Product Overview – SpaceMouse® Classic,” [www.logicad3d.com/products/Classic.htm](http://www.logicad3d.com/products/Classic.htm), downloaded April 8, 2002.

“Synaptics Touch Pad Interfacing Guide,” Second Edition, March 25, 1998, Synaptics, Inc. San Jose, CA, pages 1 to 90.

Bang & Olufsen Telecom a/s “BeoCom 6000 User Guide 2000.”

Chapweske, Adam, “PS/2 Mouse/Keyboard Protocol,” 1999, <http://panda.cs.ndsu.nodak.edu/~achapwes/PICmicro/PS2/ps2.htm>.

Fiore, Andrew, “Zen Touch Pad,” Cornell University, May 2000.

Gadgetboy, “Point and click with the latest mice,” CNET Asia Product Review, [www.asia.cnet.com/review...are/gadgetboy/0,39001770,38023590,00.htm](http://www.asia.cnet.com/review...are/gadgetboy/0,39001770,38023590,00.htm), downloaded December 5, 2001.

Sylvania, “Intellivision™ Intelligent Television MASTER COMPONENT SERVICE MANUAL.” pp. 1,2 and 8, 1979.

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 9 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Tessler et al., "Touchpads Three new input devices," website

[www.macworld.com/1996/02/review/1806.html](http://www.macworld.com/1996/02/review/1806.html), downloaded February 13,  
2002.

"Der Klangmeister" Connect Magazine, August 1998.

Photographs of Innovations 2000 Best of Show award presented at 2000 International  
CES Innovations 2000 Design & Engineering Showcase, 1 pg.

BeoCom 6000, Sales Training Brochure, date unknown.

Letter re: Bang & Olufsen A/S, by David Safran, Nixon Peabody, LLP, May 21, 2004.

Marriott et al., U.S. Patent Application No. 10/722,948, filed November 25, 2003.

U.S. Patent Application No. 10/060,712, filed January 29, 2002.

U.S. Patent Application No. 10/209,537, filed July 30, 2002.

"Apple Unveils Optical Mouse and New Pro Keyboard," Press Release, July 19, 2000.

"System Service and Troubleshooting Manual," located at [www.dsplib.com/intv/](http://www.dsplib.com/intv/Master)  
Master, downloaded December 11, 2002.

Kevin DeMeyer, "Crystal Optical Mouse," February 14, 2002, Heatseekerz,  
Web-Article 19.

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,348,967 B2  
APPLICATION NO. : 11/386238  
DATED : March 25, 2008  
INVENTOR(S) : Stephen P. Zadesky et al.

Page 10 of 10

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On page 3, under (56) References Cited, under "FOREIGN PATENT  
DOCUMENTS,":

In Column 1, Line 13: please delete "EP 0551778 B1 1/1997".

Signed and Sealed this

Thirtieth Day of September, 2008

A handwritten signature in black ink, appearing to read "Jon W. Dudas". The signature is stylized with a large, looped initial "J" and a distinct "D".

JON W. DUDAS  
*Director of the United States Patent and Trademark Office*