



US008098233B2

(12) **United States Patent**
Hotelling et al.

(10) **Patent No.:** **US 8,098,233 B2**
(45) **Date of Patent:** ***Jan. 17, 2012**

(54) **WIDE TOUCHPAD ON A PORTABLE
COMPUTER**

(75) Inventors: **Steven P. Hotelling**, San Jose, CA (US);
Chris Ligtenberg, San Carlos, CA (US);
Duncan Kerr, San Francisco, CA (US);
Bartley K. Andre, Menlo Park, CA
(US); **Joshua A. Strickon**, San Jose, CA
(US); **Brian Q. Huppi**, San Francisco,
CA (US); **Imran Chaudhri**, San
Francisco, CA (US); **Greg Christie**, San
Jose, CA (US); **Bas Ording**, San
Francisco, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 288 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **11/731,118**

(22) Filed: **Mar. 30, 2007**

(65) **Prior Publication Data**

US 2007/0182722 A1 Aug. 9, 2007

Related U.S. Application Data

(63) Continuation of application No. 10/927,575, filed on
Aug. 25, 2004, now Pat. No. 7,834,855.

(51) **Int. Cl.**
G06F 3/041 (2006.01)

(52) **U.S. Cl.** **345/173; 345/168**

(58) **Field of Classification Search** **345/168-178**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,481,278	A	1/1996	Shigematsu et al.	
5,495,077	A	2/1996	Miller et al.	
5,764,218	A	6/1998	Della Bona et al.	
5,821,922	A *	10/1998	Sellers	345/157
5,825,352	A	10/1998	Bisset et al.	
5,864,334	A *	1/1999	Sellers	345/168
5,943,052	A	8/1999	Allen et al.	
6,216,988	B1	4/2001	Hsu et al.	

(Continued)

FOREIGN PATENT DOCUMENTS

JP 6289969 A 10/1994

(Continued)

OTHER PUBLICATIONS

Apple Computer, Inc., "Trackpad," Apple Developer Connection
(last updated Apr. 19, 2004), downloaded from the Internet on Aug.
19, 2004 from: http://developer.apple.com/documentation/Hardware/Developer_Notes/Macintosh_CPUs-....

(Continued)


Primary Examiner — Jimmy H Nguyen

(74) *Attorney, Agent, or Firm* — Blakely, Sokoloff, Taylor &
Zafman LLP

(57) **ABSTRACT**

In one exemplary embodiment, a portable computer having a
display assembly coupled to a base assembly to alternate
between a closed position and an open position. Palm rest
areas are formed by a touchpad disposed on the surface of the
base assembly. In an alternative embodiment, a touchpad
disposed on the base assembly has a width that extends sub-
stantially into the palm rests areas of the base assembly.

35 Claims, 10 Drawing Sheets

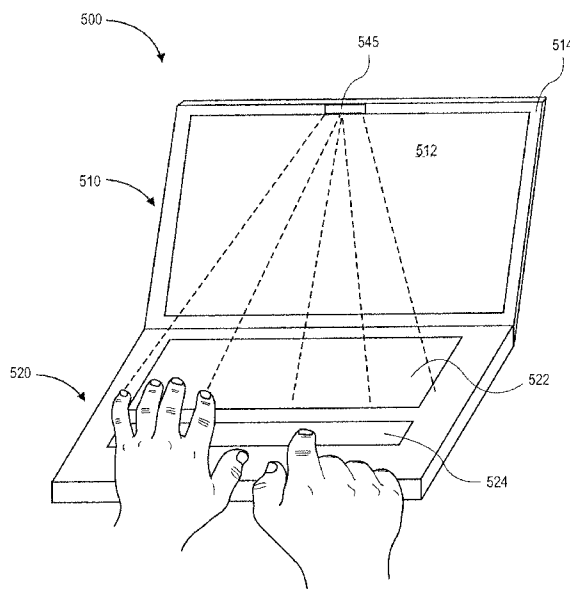

U.S. PATENT DOCUMENTS

6,266,050	B1 *	7/2001	Oh et al.	345/173
6,336,614	B1	1/2002	Kwitek	
6,337,678	B1	1/2002	Fish	
6,610,936	B2	8/2003	Gillespie et al.	
6,611,253	B1 *	8/2003	Cohen	345/168
6,654,001	B1	11/2003	Su	
6,756,971	B1	6/2004	Ramey et al.	
6,819,312	B2	11/2004	Fish	
6,943,705	B1	9/2005	Bolender et al.	
7,038,659	B2	5/2006	Rajkowski	
2002/0080123	A1	6/2002	Kennedy et al.	
2004/0104894	A1	6/2004	Tsukada et al.	
2004/0233624	A1	11/2004	Aisenberg	
2006/0033701	A1 *	2/2006	Wilson	345/156

FOREIGN PATENT DOCUMENTS

JP	11194883	A	7/1999
WO	WO 92/11623		7/1992
WO	WO 98/43202	A1	10/1998
WO	WO 2004/025449	A2	3/2004

OTHER PUBLICATIONS

PCT Invitation to Pay Additional Fees for PCT International Appln. No. US2005/029467 mailed Dec. 20, 2005 (5 pages).
PCT International Search Report and Written Opinion for PCT International Appln. No. US2005/029467, mailed Apr. 10, 2006 (15 pages).
Synaptics, "Touchpad Advanced Features," downloaded from the Internet on Aug. 16, 2004 from: http://www.synaptics.com/products/touchpad_features.cfm (2 pages).

PCT International Preliminary Report and Written Opinion for PCT International Appln. No. US2005/029467, mailed Mar. 8, 2007, (8 pages).
Apple Computer, Inc., "Block Diagram and Buses" Apple Developer Connection, Aug. 3, 2004 downloaded from the Internet from: http://developer.apple.com/documentation/Hardware/Developer_Notes/Macintosh_CPUs-G... (4 pages).
Apple Computer, Inc., "PowerBook G4" Technology Overview, Apr. 2004 (29 pages).
TouchPad Advanced Features, Synaptics, "Enriching the interaction between humans and intelligent devices" Downloaded Aug. 16, 2004 (2 pages), http://www.synaptics.com/products/touchpad_features.cfm.
Office Action for Chinese Patent Application No. 200580027691.3, mailed Jun. 20, 2008, 4 pages.
Office Action for Chinese Patent Application No. 200580027691.3, mailed Mar. 27, 2009, 4 pages.
Office Action for Chinese Patent Application No. 200580027691.3, mailed Sep. 4, 2009, 4 pages.
Communication for EP Patent Application No. 05788888.5-2224, mailed Sep. 1, 2008, 3 pages.
Communication for EP Patent Application No. 05788888.5-2224, mailed Sep. 4, 2007, 2 pages.
Oral Proceedings for EP Patent Application No. 05788888.5-2224, mailed Nov. 16, 2009, 11 pages.
Oral Proceedings Summons for EP Patent Application No. 05788888.5-2224, mailed Mar. 18, 2009, 3 pages.

* cited by examiner

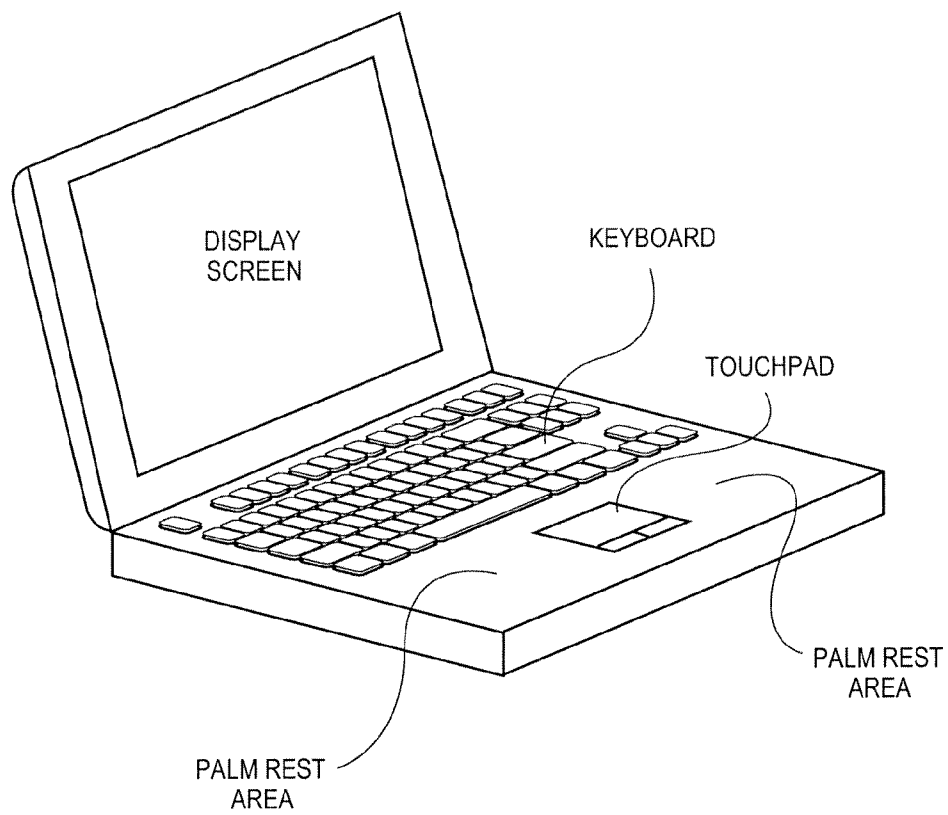


FIG. 1
(PRIOR ART)

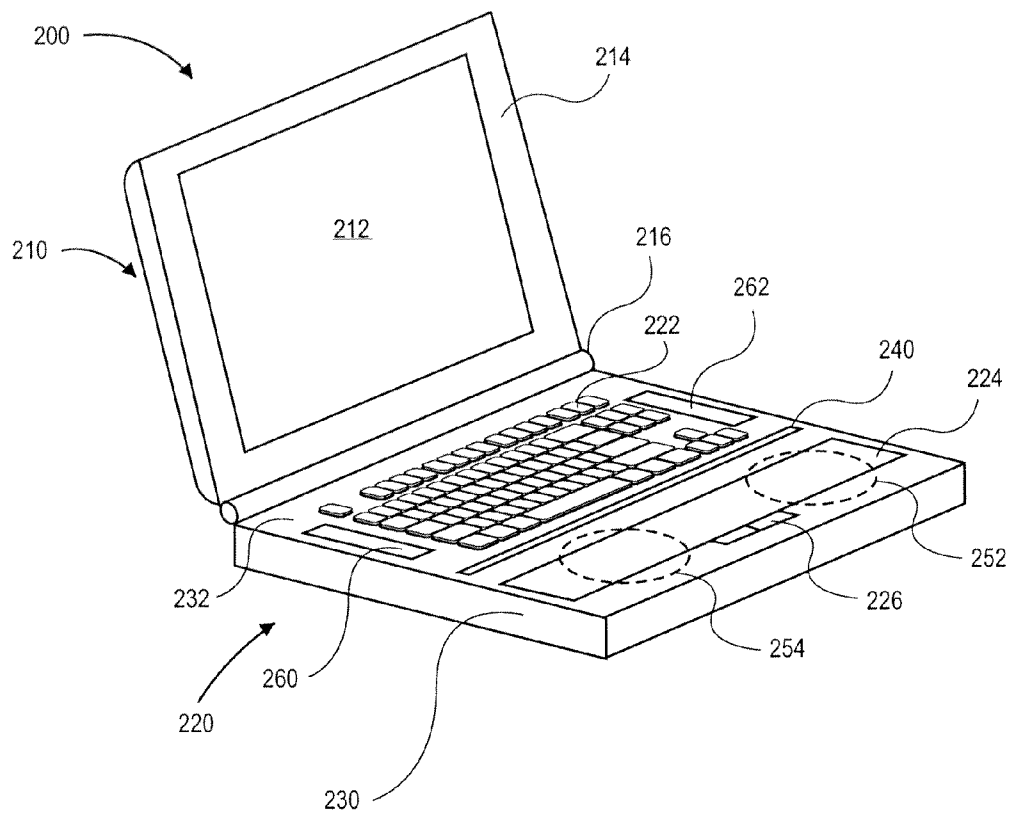


FIG. 2

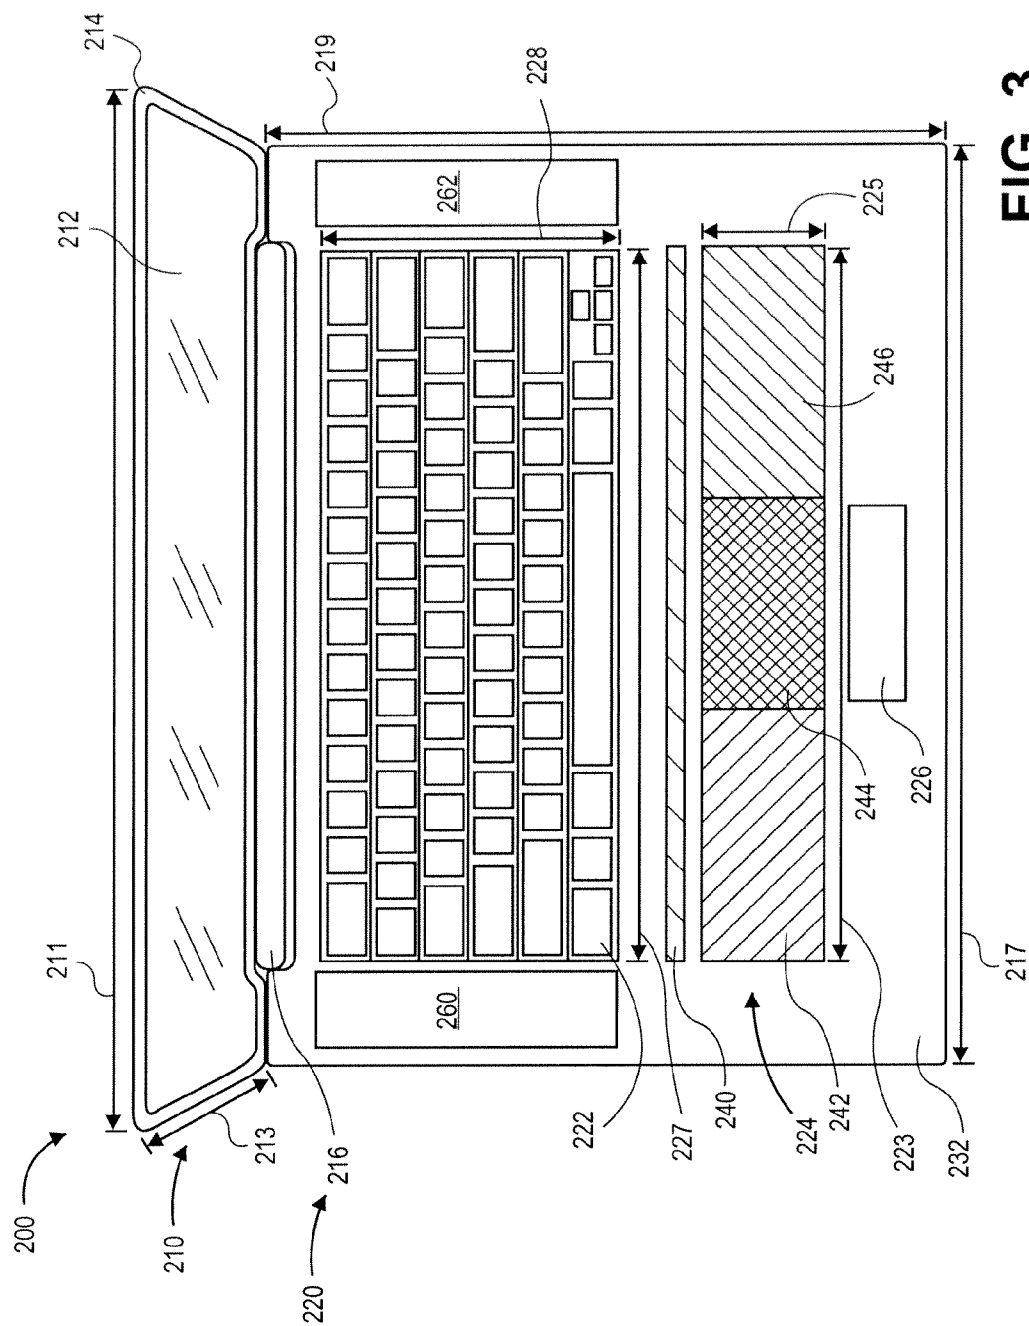


FIG. 3

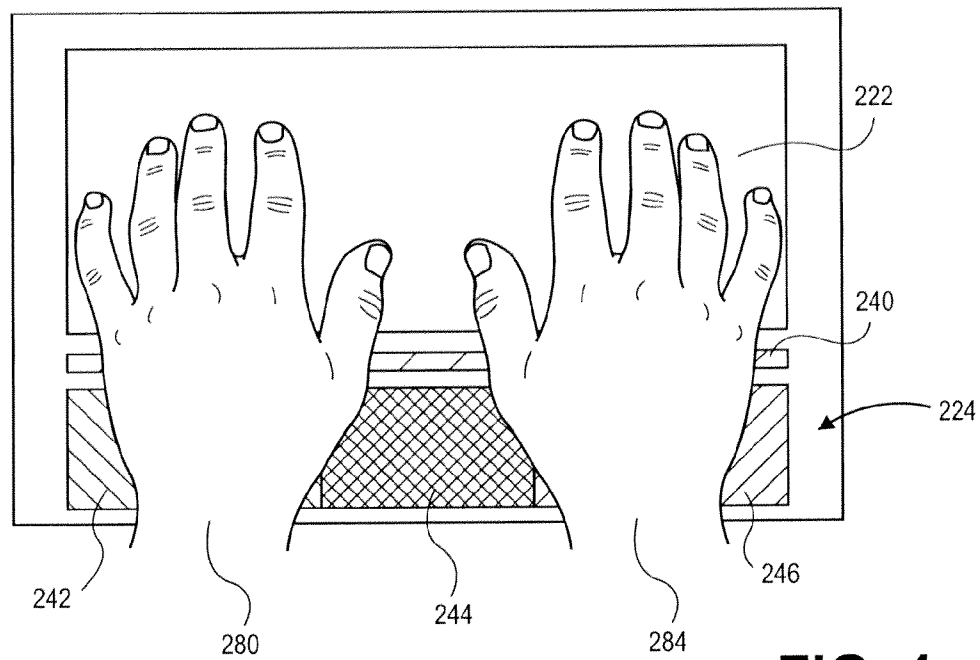


FIG. 4

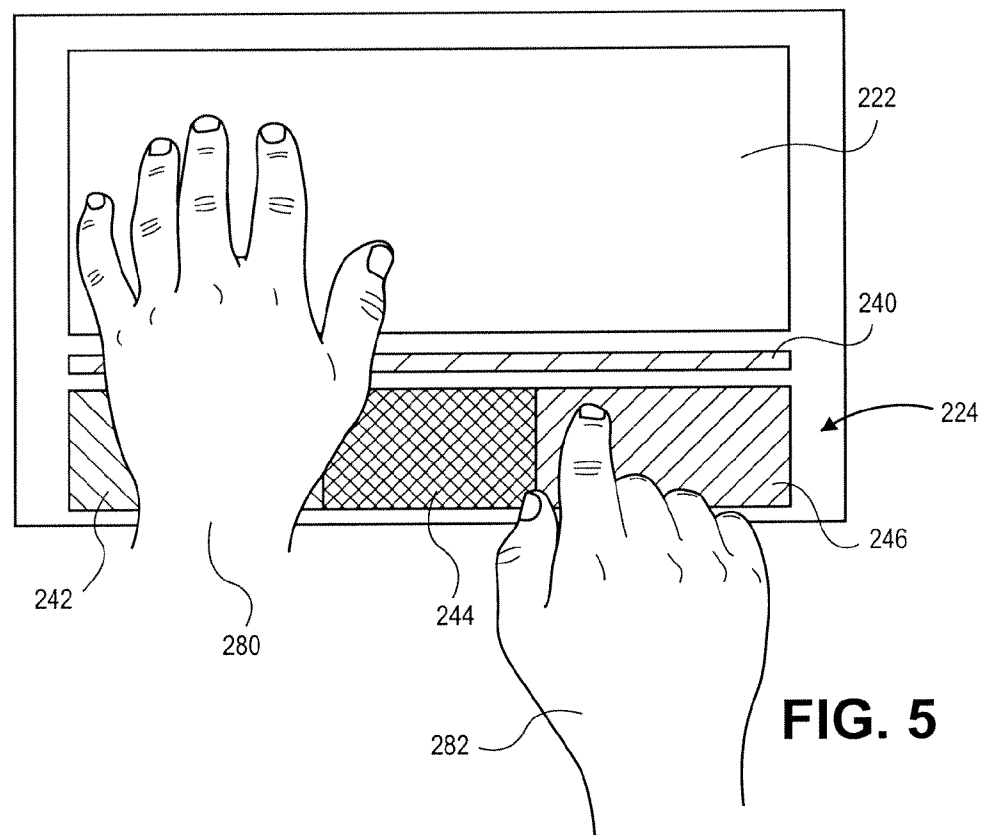


FIG. 5

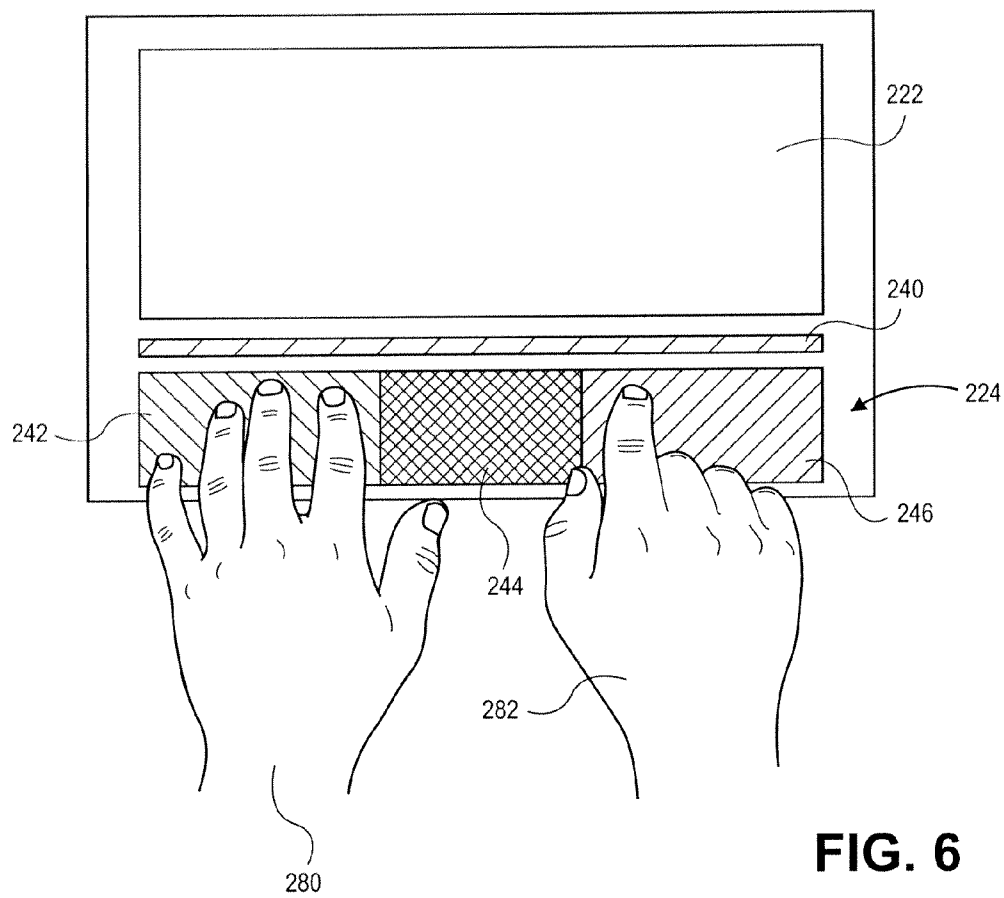


FIG. 6

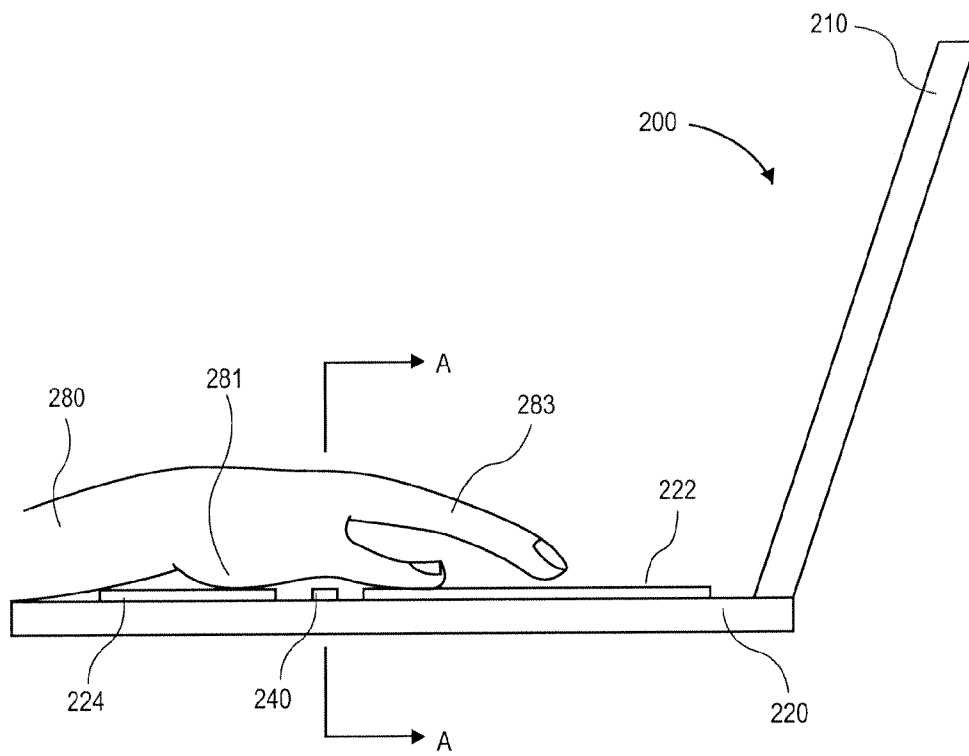


FIG. 7

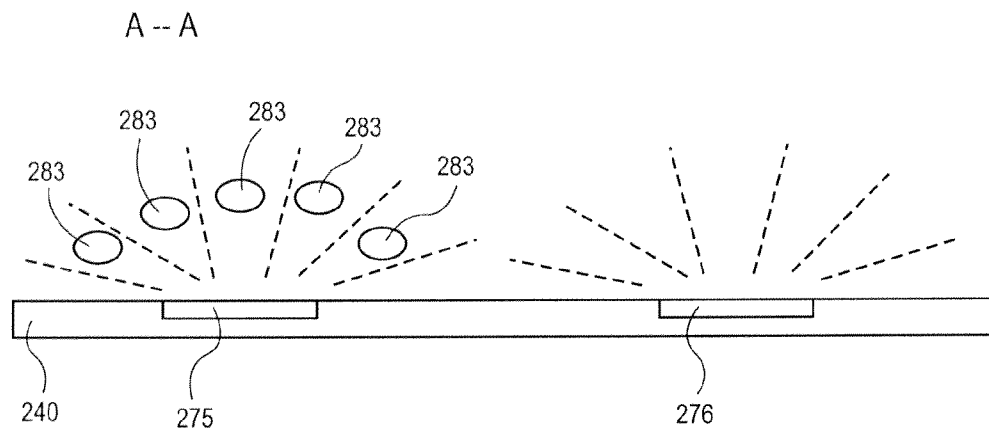


FIG. 8

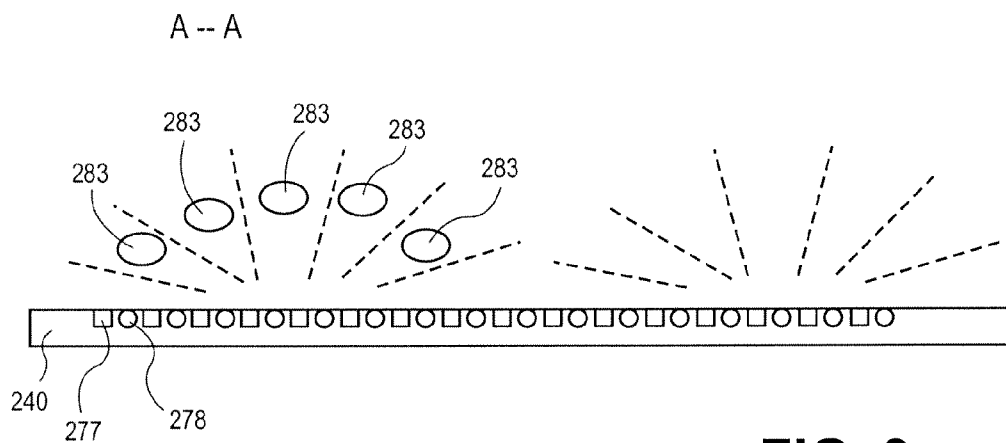
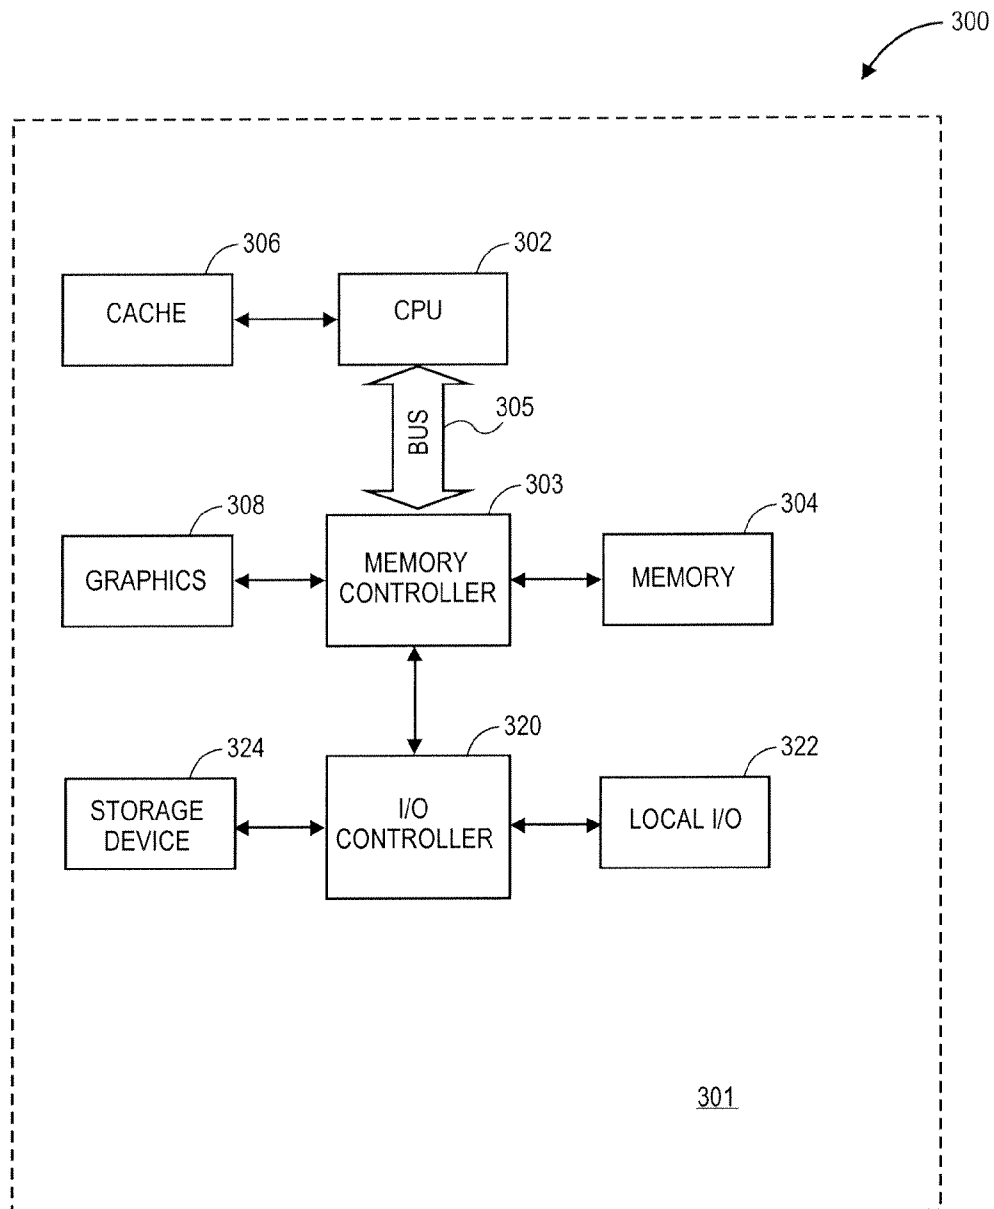
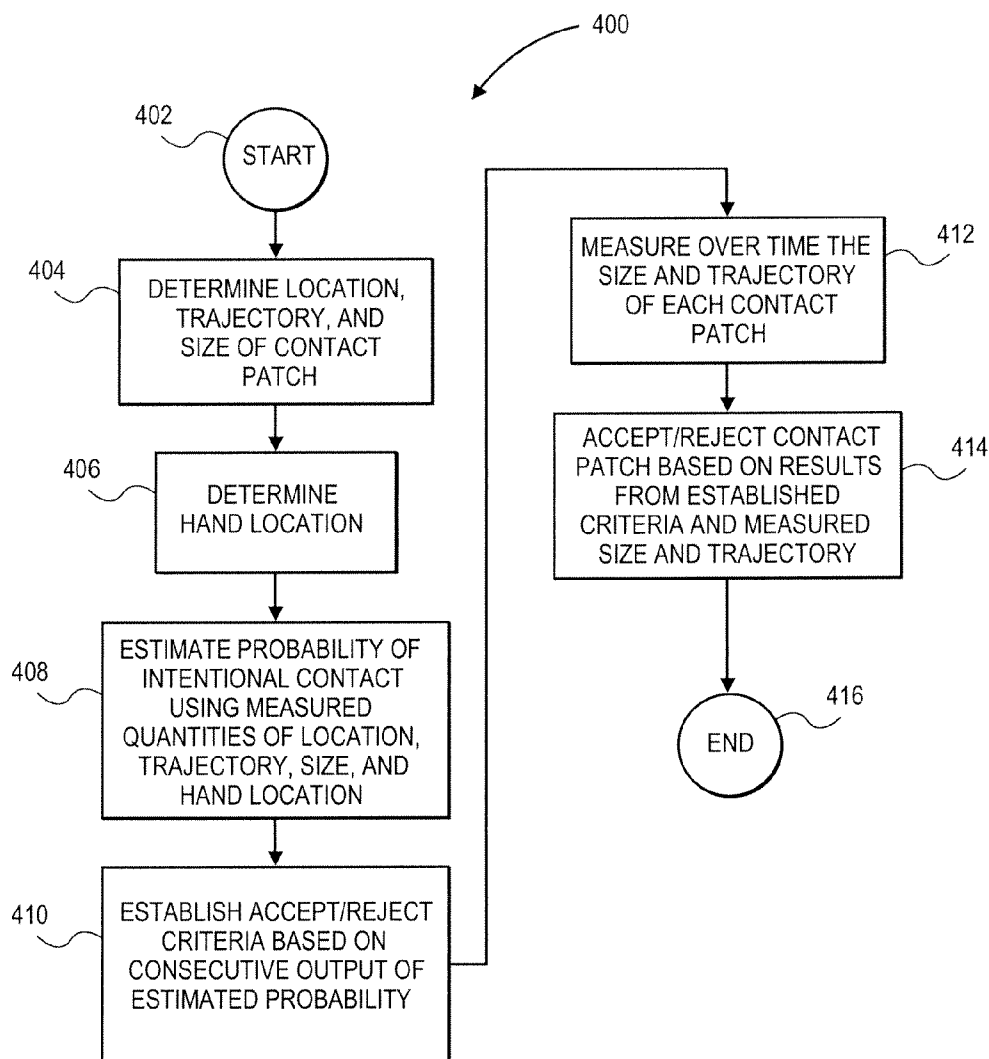
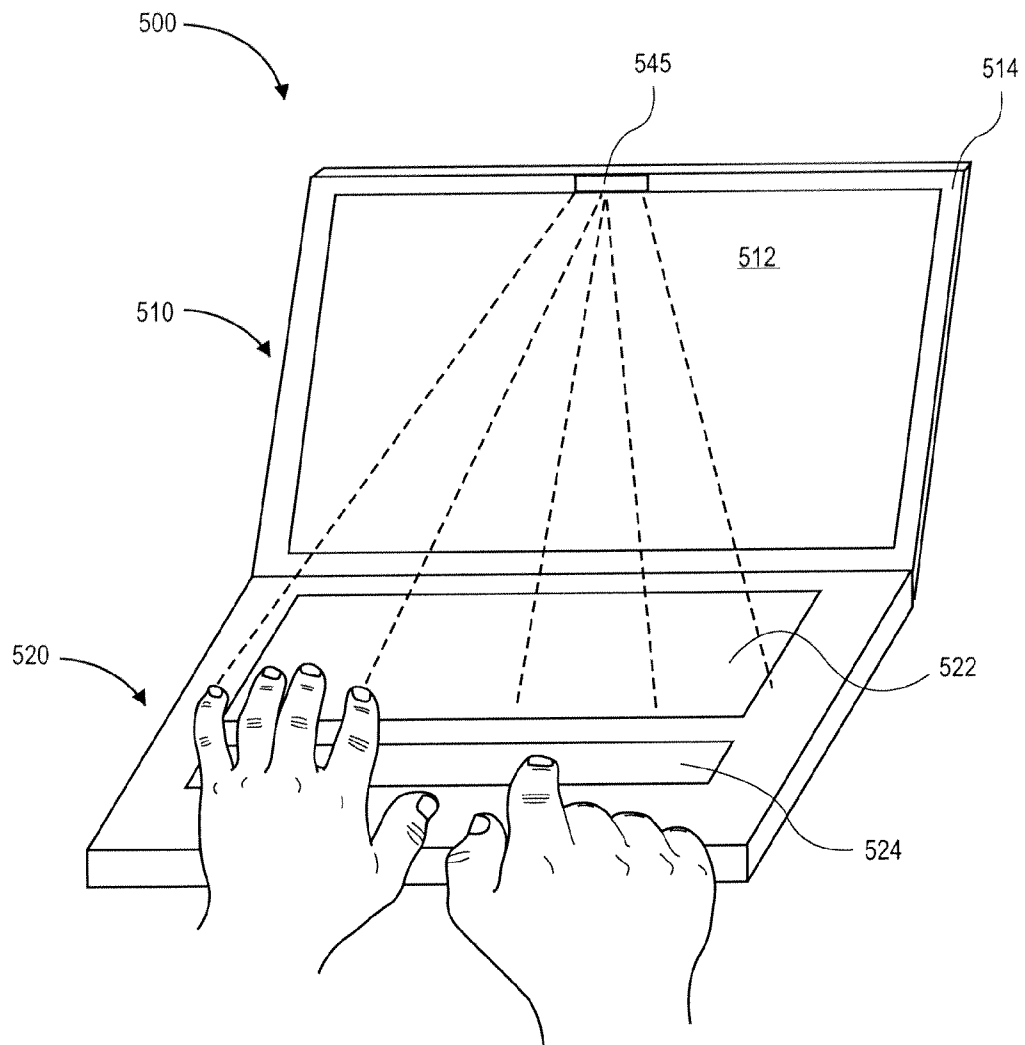


FIG. 9

**FIG. 10**

**FIG. 11**

**FIG. 12**

1

WIDE TOUCHPAD ON A PORTABLE COMPUTER

This application is a continuation of U.S. patent applica-
tion Ser. No. 10/927,575, filed on Aug. 25, 2004 now U.S. Pat.
No. 7,834,855.

TECHNICAL FIELD

The invention relates generally to portable computers, and
in one embodiment, a portable computer having a wide touch-
pad.

BACKGROUND

Advances in technology have enabled the size of personal
computers to decrease. As a result, the use of portable com-
puters, such as notebook computers, laptop computers, and
notepad computers, is rapidly increasing. The portability of
notebook computers and notepad computers enables a user to
keep his or her computer readily accessible such that com-
puting resources are effectively always at hand. FIG. 1 illus-
trates a typical notebook computer with two folding halves,
with a display assembly in one half and a base assembly with
input devices in the other half. Input devices include, among
other things, a keyboard for inputting data and a touchpad for
navigating a cursor control. Palm rest areas are areas posi-
tioned on the upper surface of the base assembly below the
keyboard. They allow a user to rest the base or palm of his or
her hands comfortably during typing activity. The vast major-
ity of conventional touchpads that are integrated into portable
computers are, in one way or another, isolated from unwanted
contact with the user's hands (e.g., during a typing activity).
This is usually done by centering the touchpad below the
keyboard, and minimizing the size of the touchpad, for
example, by not extending the touchpad to the palm rest areas
to be formed on either side of the touchpad. The touchpad is
also recessed beneath the plane of the palm rest, so that palms,
the most common cause of unwanted activation of the touch-
pad, do not come in contact with the touchpad.

One trend in portable computers has been to make them as
desktop computer replacements, which requires them to be
larger, while still maintaining their portability features. The
display assembly in particular, that includes a display screen,
has become larger, to become comparable to the sizes of
desktop computer monitors. This has caused the housing of
the base assembly to increase proportionally. Large base
assembly housings can easily accommodate full-size key-
boards, but the size of the touchpads must still be limited
because of the high risk of unwanted activation, as discussed
above, as well as providing the necessary space for palm rests.

Moreover, in order for larger portable computers to be
practical for portability purposes, they must still be relatively
thin and light. One conventional method to reduce the overall
thickness of portable computers is to mount the touchpad
flush with the top surface of the base assembly housing (e.g.,
the palm rest areas). However, this increases the likelihood of
accidental brushing by a user's palms, especially during typ-
ing.

SUMMARY

Embodiments of a portable computer having one or more
input devices including a keyboard and an enlarged or wide
touchpad are described herein. A portable computer includes
a display assembly and a base assembly coupled by hinge
assembly that allows display assembly to change (i.e., rotate)

2

between an open position and a closed position. The display
assembly includes a display screen which displays images,
data, and a moveable cursor. The wide touchpad and keyboard
disposed on the base assembly allow a user to interact with the
display screen (e.g., enter data). In one embodiment, the wide
touchpad may be a cursor control device having the capabili-
ties of conventional computer mouse devices, such as the
ability to point, drag, tap, and double tap objects on a graphi-
cal user interface, as well as more general purposes such as
scrolling, panning, zooming, and rotating images on display
screen. The wide touchpad extends into the areas on the
surface of the base assembly that are normally reserved for
palm rest areas (e.g., flat areas on the surface of the base
assembly that support a user's palms and/or wrists while
typing).

In one embodiment, the wide touchpad filters each contact
or contact patch sensed to either accept the contact as an
intentional input command (e.g., cursor control command),
or reject the contact as unintentional (e.g., when operating as
a palm rest). The wide touchpad can filter multiple contact
patches in order to accept a particular contact patch in one
area of the touchpad while rejecting a second contact patch
elsewhere on the wide touchpad. In one embodiment, a sensor
is disposed between the keyboard and touchpad. The sensor
defines a planar sensing region extending upwards from the
top surface of the base assembly. The sensor detects a user's
hand that may be resting on the base assembly with a palm
portion making contact with a portion of the wide touchpad
and the fingers extending toward keyboard. When this detec-
tion is made, any contact made with a corresponding portion
of the touchpad is rejected, having been interpreted as unin-
tentional contact by the user. Alternatively, detection of fin-
gers extending toward the keyboard may be evaluated as one
of many factors used to decide whether and what significance
to accord to contact with the touchpad. For example, other
factors may include the profile of the contact with the touch-
pad, the level of keyboard activity at the time of contact, etc.
In this way, the touchpad may effectively serve as a palm rest
(e.g., the user may intentionally rest one or more palm or other
part of a hand or arm on a portion of the touchpad, which is
recognized as an unintentional input) in addition to a func-
tional touchpad when an input is interpreted as being an
intentional contact by the user.

There are numerous other embodiments which are
described herein, and these embodiments generally relate to
portable computers having a wide touchpad and the accepting
or rejecting of contact patches on the touchpad based on, in
one example, hand location.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and
not limitation, in the figures of the accompanying drawings in
which:

FIG. 1 illustrates a conventional portable computer.

FIG. 2 illustrates one embodiment of a portable computer
having a wide touchpad.

FIG. 3 illustrates a top view of the portable computer of

FIG. 2 in the open position with a touchpad that extends into
the palm rest areas.

FIG. 4 illustrates one example of a hand position during
user activity with a portable computer.

FIG. 5 illustrates another example of a hand position dur-
ing user activity with a portable computer.

FIG. 6 illustrates another example of a hand position dur-
ing user activity with a portable computer.

3

FIG. 7 illustrates a side view of a hand in a typing position with the portable computer of FIG. 2.

FIG. 8 illustrates a cross-sectional view of FIG. 7 taken along line A-A through the base assembly, sensor, and hand with showing one embodiment of a sensor.

FIG. 9 illustrates a cross-sectional view of FIG. 7 taken along line A-A through the base assembly, sensor, and hand with showing another embodiment of a sensor.

FIG. 10 illustrates a logic diagram of one embodiment of a portable computer system that supports a wide touchpad and/or hand sensor.

FIG. 11 illustrates a flowchart of one embodiment of an operation for rejecting or accepting a contact patch.

FIG. 12 illustrates an alternative embodiment of a hand detecting sensor that may be disposed on a portable computer.

DETAILED DESCRIPTION

In the following description, numerous specific details are set forth such as examples of specific, components, circuits, processes, etc. in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art that these specific details need not be employed to practice the present invention. In other instances, well known components or methods have not been described in detail in order to avoid unnecessarily obscuring the present invention.

The term “coupled” as used herein means connected directly to or indirectly connected through one or more intervening components, structures or elements. The terms “above,” “below,” and “between” as used herein refer to a relative position of one component or element with respect to other components or elements. As such, one component disposed above or below another component may be directly in contact with the other component or may have one or more intervening component. Moreover, one component disposed between other components may be directly in contact with the other components or may have one or more intervening components.

Various embodiments of a portable computer (also referred to as notebook computer or laptop computer) having enlarged touchpads are described. The touchpad provides input and conventional cursor control capabilities such as pointing, dragging, tapping, scrolling, panning, rotating, and zooming. In one embodiment of the present invention, the touchpad serves as palm rests for a user's hands during a typing activity. In another embodiment of the present invention, the touchpad is enlarged so as to expand along a substantial width of the portable computer base assembly, extending into the palm rest areas. The palm rest areas include those areas on the front, top portion of the base assembly, and the keyboard is located behind the palm rest areas on the base assembly. Thus, in normal use by a user, the palm rest areas are closer to the user than the keyboard, which is normally adjacent to the hinge which couples the base assembly to the display assembly. The palm rest areas typically include a left palm rest area and a right palm rest area with a central portion separating these left and right palm rest areas. In prior art portable computers, this central portion typically includes a touchpad or other cursor control device. Advantages of a large touchpad for a portable computer include increased area for dynamic input ranges, two-handed control of the touchpad, and advanced input based on more than one finger on the touchpad.

In one embodiment, the touchpad possesses the ability to reject accidental contact when a user does not intend to activate the touchpad (e.g., the touchpad is able to distinguish when a user is contacting the touchpad for intended use or is

4

merely resting his or her palms on a particular portion of the touchpad during a typing activity). In one particular embodiment, a sensor is disposed near the touchpad and keyboard of the portable computer to sense hand location of a user, and subsequently determine whether the touchpad contact is intentional or accidental. The touchpad responds properly by either recognizing the action on the touchpad or rejecting the action. As a result, the user is able to work efficiently, allowing for typing and cursor control operations to occur seamlessly. In one embodiment, the enlarged touchpad/palm rest may be suitable for use with portable computers having base and display assemblies (e.g., display frame, base assembly housing) made entirely or partially of metallic materials, in particular, display and base housings made of metals such as steel, aluminum, titanium, or combinations thereof.

FIG. 2 illustrates a perspective view of one embodiment of a portable computer 200 that includes a display assembly 210 and a base assembly 220. Display assembly 210 is coupled to base assembly 220 with a hinge assembly 216 that allows display assembly 210 to change (i.e., rotate) between an open position (as illustrated in FIG. 2) and a closed position (not shown). Display assembly includes a display screen 212 and associated video circuitry (not shown). In one embodiment, display screen 212 may be a liquid crystal display unit. In an alternative embodiment, display screen 212 may be a video monitor or any well known display device. Display screen is centered and framed on display assembly 210 by bezel 214. In the open position, display screen 212 is exposed on display assembly 210. Input devices that include keyboard 222, touchpad 224, and actuation button(s) 226 (e.g., “mouse buttons”) are disposed on a top surface 232 of base assembly 220. Speakers 260, 262 may also be disposed on top surface 232 of base assembly 220.

In one embodiment, touchpad 224 may be an input device having the capabilities of conventional computer mouse devices, such as the ability to point, drag, tap, and double tap objects on a graphical user interface, as well as more general purposes such as scrolling, panning, zooming, and rotating images on display screen 212. Touchpad 224, along with keyboard 222 and actuation button 226, allows a user to communicate with portable computer 200 (e.g., interact with display screen 212 or enter data). In one embodiment, a touchpad is defined herein as any two dimensional surface sensor that can detect one or more objects on the touchpad surface (the touchpad input), and output information regarding the location, width, presence, and number of said objects, (the touchpad outputs), in a manner that can be interpreted by the computer system to generate cursor movement, or otherwise interpret a user's either intentional or unintentional input. In one embodiment, touchpad 224 may be a touchpad that utilizes capacitive sensing. The surface of the touchpad may include a grid of conductive metal wires covered by an insulator. When two electrically conductive objects come near each other without touching, their electric fields interact to form capacitance. Also, when another conductive material, such as a human finger, comes in contact with the touchpad surface, a capacitance forms.

The dimensions of touchpad 224, particularly the width (i.e., the distance parallel the row of keys on keyboard 222), are larger than conventional touchpads. In the embodiment illustrated in FIG. 2, touchpad 224 extends into the areas on the surface 232 of base assembly 220 that are normally reserved for palm rest areas (e.g., areas 252, 254, designated by circled hash marks), but still allows a user to rest his or her palms on the surface of touchpad 224. Alternatively, in addition to possessing conventional touchpad functionalities, all or particular portions of touchpad 224 may serve as palm rests

5

for a user's hands. It should be noted that palm rest areas **252**, **254** as described herein are not necessarily reserved only for a user's palms during a typing activity as other body parts may be placed on palm rest areas **252**, **254**. For example, a user's elbow or forearm may rest on any non-keyboard portion of base assembly **220** during use (e.g., leaning on the palm rest portion **254** with the left elbow or forearm while typing with the right hand).

As described in greater detail below, enlarged touchpad **224** is able to reject unintentional contact while accepting intentional contact related to input device functionality (e.g., cursor control commands). In one embodiment, a sensor **240** is disposed between keyboard **222** and touchpad **224**. Sensor **240** defines a planar sensing region extending upwards from top surface **232**. In one particular embodiment, sensor **240** detects a user's hand that may be resting on base assembly **220** with a palm portion making contact with a portion of touchpad **224** and the fingers extending toward keyboard **222**. When this detection is made, any contact made with a corresponding portion of the touchpad is rejected, having been interpreted as unintentional contact by the user. Alternatively, detection of fingers extending toward keyboard **222** may be evaluated as one of many factors used to decide whether and what significance to accord to contact with touchpad **224**. For example, other factors may include the profile of the contact with touchpad **224**, the level of keyboard **222** activity at the time of contact, etc. In this way, touchpad **224** may effectively serve as a palm rest (e.g., the user may intentionally rest one or more palm or other part of a hand or arm on a portion of the touchpad and the system recognizes this and interprets the input as unintentional) in addition to a functional touchpad when an input is interpreted as being an intentional contact by the user. FIG. 3 illustrates a top view of portable computer **200** in the open position with touchpad **224** that extends into the palm rest areas on top surface **232**. In one embodiment, touchpad **224**, having particularly wide dimension, is divided into three regions, a left region **242**, a center region **244**, and a right region **246**. Sensor **240**, which in one embodiment is a sensor strip having a width substantially similar to a width of touchpad **224**, is disposed between keyboard **222** and touchpad **224**. The three regions of touchpad **224** may be activated or deactivated selectively, based on a particular touch region or "contact patch" sensed by touchpad **224** in association with the particular region of sensor **240** that detects a hand portion or fingers extending towards the keys of keyboard **222**. In an alternative embodiment, only the specific contact patch in a region (and not the entire region) may be accepted or rejected selectively. It will be recognized that other configurations of sensor **240** are possible, for example, sensor **240** may be multiple sensors, or may not be coextensive with touchpad **224**.

FIGS. 4-6 illustrate three of many possible scenarios (i.e., hand positions) of user activity with portable computer **200** and the recognition by the three regions of touchpad **224** that may either accept or reject contact. FIG. 4 illustrates a typical typing position by a user in which the fingers of left hand **280** and right hand **282** extend over keyboard **222** and both palms rest on regions of touchpad **224**. In particular, left hand **280** rests entirely on left region **242**, and right hand **282** rests on right region **246**. Sensor **240** detects the extension of the fingers from left hand **280** and associates the fingers with the contact made on left region **242**. Similarly, sensor **240** associates the fingers from right hand **282** with the contact made on right region **246**. Accordingly, the contact patches on left region **242** and right region **246** are not recognized as any form of input or touchpad operation. The user's hands may rest comfortably on these regions of touchpad **224**, and in

6

doing so, left region **242** and right region **246** serve as palm rests. In contrast, center region **244** of touchpad **224** may be active and be responsive to touchpad sensing.

FIG. 5 illustrates another scenario in which the fingers of left hand **280** extend over the keys of keyboard **222** while a finger from right hand **282** makes contact with touchpad **224**. In this scenario, the contact made by right hand **282** is intentional and meant to activate a touchpad action (e.g., pointing, dragging, tapping). Sensor **240** detects the extension of the fingers from left hand **280** and associates the fingers with the contact made on left region **242**. For right hand **282**, the fingers do not extend over keyboard **222** and no detection is made by sensor **240**. Accordingly, the contact patch on left region **242** is not recognized as any form of touchpad operation. However, the contact patch on right region **246** of touchpad **224** is recognized as a valid touchpad activity, and responds with the appropriate touchpad command (e.g., dragging, pointing). The user's left hand **280** may rest comfortably on left region **242** of touchpad **224** and engage in typing activity, while the fingers from right hand **282** engage in touchpad activity. In one embodiment, center region **244** of touchpad **224** may also be active and be responsive to touchpad sensing.

FIG. 6 illustrates a third scenario in which both left hand **280** and right hand **282** do not extend over keyboard **222**. This hand position may occur when the user engages only in touchpad activity. In this scenario, portions of left hand **280** rests on left region **242** while a finger from right hand **282** engages in touchpad activity, and no portions from either hand extend over keyboard **222**. The contact patch made by the finger of right hand **282** is intentional and meant to activate a touchpad action/input (e.g., pointing, dragging, tapping). The contact patches made by left hand **280** is unintentional. Although no detection is made by sensor **240**, touchpad **224** recognizes various characteristics of the contact patches made by the user's hands. In this case, the multiple contact patches recognized in left region **242**, taking into consideration the size of the patches and proximity, are interpreted by touchpad **224** as unintentional. Accordingly, the activity in left region **242** is disregarded. Alternatively, all of left region **242** may be inactivated or the inputs are ignored or filtered. However, the single contact patch on right region **246** of touchpad **224** is recognized as a valid touchpad activity, and responds with the appropriate touchpad command (e.g., dragging, pointing). In one embodiment, center region **244** of touchpad **224** may also be active and be responsive to touchpad sensing.

In an alternative embodiment, touchpad **224** is capable of multiple or two-handed input. With reference again to FIG. 6, touchpad **224** may accept the contact patch from the finger of right hand **282** for cursor control operation. The contact patches from left hand **280** may also be accepted when associated with touchpad input device functionality. For example, two fingers from left hand **280** may be used to control scrolling, panning, rotation, and zooming of objects or data on the display screen (e.g., display screen **212**).

FIGS. 4-6 illustrate touchpad **224** as being divided into three distinct sensing regions. However, it may be appreciated that any number of sensing regions may be divided over touchpad **224**, and not necessarily in the relative dimensions illustrated. For example, sensor **240** can detect the extension and retraction of one finger at a time to that a single finger can be moved back and forth between touchpad **224** and keyboard **222**, being active in both places, without moving the entire hand. It will also be recognized that touchpad **224** can be activated/deactivated in portions. It can also be activated/deactivated one input (i.e., contact patch) at a time, by disregarding any particular input that is determined to be related to

unintended contact rather than intentional interface activity. That is, touchpad 224 is “deactivated” if it disregards a particular input, even if the next input may be not disregarded.

FIGS. 7-9 illustrate in greater detail, in one embodiment, the sensing of a user's fingers over the keys of keyboard 222. In the side view of FIG. 7, left hand 280 is illustrated in a typing position with respect to portable computer 200 in the open position (i.e., display assembly 210 rotated open relative to base assembly 220). Palm 281 rests on touchpad 224, and fingers 283 extend over sensor 240 and keyboard 222. As described above, the palm rest for palm 281 includes touchpad 224 because of the extra-wide or elongated dimensions of touchpad 224. FIG. 8 illustrates a cross-sectional view of FIG. 7 taken along line A-A through base assembly 220, sensor 240, and left hand 280. In one embodiment, sensor 240 includes a first imaging sensor 275 and a second imaging sensor 276. The imaging sensors may be infrared (IR) sensors that look “upward” (designated by the dash lines) and “see” the cross-sectional view of A-A. First and second imaging sensors 275, 276 examine a planar region in space extending upwards from the general line of sensor 240. For example, the fingers 283 of left hand 280 that breaks the planar region examined by first sensor 275. The sensing of fingers 283 may be associated with the contact patch made by palm 281 on touchpad 224 (e.g., on left region 242 as illustrated in FIG. 4), and as a result, either the entire left region 242 would not be active for any type of touchpad operation or the particular contact patch made by the palm 281 would be rejected, allowing for palm 281 to rest on touchpad 224. Because second sensor 276 does not detect any breaks along its portion of the planar region, portions of touchpad 224 associated with second sensor 276 are responsive to touchpad commands or operations (e.g., middle region 244 and right region 246).

FIG. 9 illustrates an alternative embodiment of a sensor mechanism for sensor 240. Multiple optical emitter-detector pairs (e.g., pairs 277, 278) are disposed along the sensor strip area to detect the presence or absence of a user's hand in the sensed plane (i.e., a planar region in space extending upwards from the general line of sensor 240). The results produced by the emitter-detectors pairs are similar to that produced by the IR sensors (e.g., first and second sensors 275, 276) described above with respect to FIG. 8. The fingers 283 of left hand 280 breaks the planar region examined by the emitter-detector pairs 277, 278 near one side of sensor 240. The sensing of fingers 283 may be associated with the contact patch made by palm 281 on touchpad 224 (e.g., on left region 242 as illustrated in FIG. 4), and as a result, either the entire left region 242 would not be active for any type of touchpad operation or the particular contact patch made by the palm 281 would be rejected, allowing for palm 281 to rest on touchpad 224. The emitter-detector pairs 277, 278 do not detect any breaks along the planar region near the other end of fingers 283. Accordingly, portions of touchpad 224 associated with the undetected sensor regions would be responsive to touchpad commands or operations (e.g., middle region 244 and right region 246).

The infrared sensors of first sensor 275 and second sensor 276, as well as optical emitter-detector pairs 277, 278 are just two of many possible sensing mechanism that may be used for detecting a hand location. In alternative embodiments, sensor 240 may be a capacitive sensor or visible light/shadow sensor. It may be appreciated that sensor 240 does not necessarily have to be utilized with an enlarged or wide touchpad, as illustrated, for detecting a hand location. The IR sensors and optical emitter-detector sensors described herein may be

associated with touchpad of any dimension (e.g., a touchpad having dimensions comparable to the dimensions of center region 244).

Referring again to FIG. 3, inside base assembly 220, there may be all the essential and well known electronic circuitry for the operation of portable computer 200, such as a central processing unit (CPU), memory, hard disk drive, floppy disk drive, flash memory drive, input/output circuitry, and power supply. Such electronic circuitry for a portable computer is well known in the art; for example, a portable computer is the Macintosh PowerBook from Apple Computer, Inc. of Cupertino, Calif.

Keyboard 222 and touchpad 224 occupy almost all of top surface 232 of base assembly 220. In one embodiment, display assembly 210 has a width 211 and length 213 that is substantially similar to a width 217 and length 219 of base assembly 220 so that when display assembly 210 is closed over base assembly 220, the edges of the two assemblies are flush with each other. In one particular embodiment, portable computer 200 may have a display screen size of about 12 inches (about 305 millimeters (mm), the diagonal distance from one corner to the opposite corner of the display screen). Display assembly width 211 and base assembly width 217 may be about 277 mm and display assembly length 213 and base assembly length 219 may be about 219 mm. Keyboard 222 may be substantially centered along a width of base assembly 220, having a width 227 of about 274 mm and a length 228 of about 108 mm.

In one embodiment, keyboard 222 may be a full-size keyboard (i.e., a keyboard layout having dimensions similar to those of conventional desktop computer keyboards) having a conventional “QWERTY” layout, which also includes a large, elongated space bar key in the bottom row of the keyboard. The specific type of the keyboard (e.g., a “QWERTY” keyboard) that is used is not critical to the present invention.

Touchpad 224 has an elongated width that is substantially similar to a width of keyboard 222. Further, the width of the touchpad may be substantially similar to the width of base assembly 220. For example, the touchpad in certain embodiments may have a width which is about 70 to about 80% of the width of the base assembly. More generally, in other embodiments, the touchpad may have a width which is about 50% to about 95% of the width of the base assembly. Further, a substantial portion (e.g., more than 50% and typically more than 60%) of the palm rest area may include one or more touchpads. The width 223 of touchpad extends along width 227 of keyboard 222 so as to provide a palm rest area during typing activity. In one embodiment, touchpad 224 has a width 223 of about 274 mm and a length 225 of about 45 mm. While touchpad 224 is shown as being one contiguous touchpad, in alternative embodiments, several separate touchpads may be disposed in the left, right, and central palm rest areas, and these several separate touchpads may occupy a substantial portion (e.g., about 60% to about 70%) of the palm rest areas.

In an alternative embodiment, portable computer 200 may have a display screen size of about 17 inches (about 432 mm, the diagonal distance from one corner to the opposite corner of the display screen). Display assembly width 211 and base assembly width 217 may be about 392 mm and display assembly length 213 and base assembly length 219 may be about 259 mm. Keyboard 222 may be a full-sized keyboard that is substantially centered along a width of base assembly 220. Keyboard 222 may have a width 227 of about 274 mm and a length 228 of about 108 mm. Touchpad 224 disposed on base assembly 220 for a 17-inch display screen may have an elongated width that is substantially similar to or exceeds a width of keyboard 222. The width of a base assembly for a

17-inch display screen may be greater compared to that of a base assembly for a 12-inch display screen. Although the dimensions of keyboard **222** may not be substantially different for the two display screen sizes, greater surface area would be provided in the base assembly for the 17-inch display screen. Accordingly, the palm rest areas formed by touchpad **224** may be larger for the 17-inch display screen base assembly. In one embodiment, touchpad **224** has a width **223** between about 274 mm to about 330 mm and a length **225** between about 45 mm to about 55 mm.

The dimensions for keyboard **222**, and in particular, for touchpad **224** are examples only and it should be noted that a larger range of dimensions may be utilized, depending, for example, on the size of display screen **212** and the surface area available on the base assembly. In one embodiment, touchpad **224** may have a width **223** between about 100 mm to about 400 mm and a length **225** between about 45 mm to about 200 mm.

FIG. **10** illustrates a logic diagram of one embodiment of a portable computer system **300** (e.g., for portable computer **200**) that supports a wide touchpad and/or hand sensor. Note that while FIG. **10** illustrates various components of a computer system, it is not intended to represent any particular architecture or manner of interconnecting the components as such details are not germane to the present invention. In one embodiment, the corresponding hardware components for the components described may be disposed on motherboard **301** as shown. The computer system of FIG. **10** may, for example, be an Apple Macintosh portable computer.

The portable computer system **300** includes a main logic board or motherboard **301** with at least one central processing unit (CPU) or processor **302**, and one or more volatile memory units **304** such as random access memory (RAM) and read only memory (ROM), coupled to motherboard **301**, as well as a graphics processor **308**. More than one processor **302** may be part of system **300** (e.g., a dual processor system, or a dual core processor system). Processor **302** may be, for example, a G4 or G5 microprocessor from Motorola, Inc., or IBM, and is coupled to cache memory **306**.

A memory controller **303** allows for the interface of memory unit **304** and graphics processor **308** with CPU **302**. Graphics processor **308** is also coupled to a display device (e.g., display screen **212**), which may be a high resolution device. Memory controller **303** also defines the speed at which data can flow between CPU **302**, memory unit **304**, and graphics processor **308** through bus **305**. Bus **305** may also be referred to as front side bus (FSB), processor bus, memory bus or system bus. An input/output (I/O) controller **320** manages the interface of other components coupled to motherboard **301** such as storage device **324** (non-volatile), and local I/O **322**. Types of I/O devices include mice, modems, network interfaces, printers, scanners, video cameras, and other devices that are well known in the art.

In one embodiment, aspects of the recognition of user's hand location by sensor **240**, and either accepting or rejecting a contact patch on touchpad **224** may be embodied, at least in part, in software. That is, the techniques may be carried out in a computer system or other data processing system in response to its processor, such as a microprocessor, executing sequences of instructions contained in a memory, such as memory **304** (which may include ROM, RAM, cache **306**, or a remote storage device). In various embodiments, hardwired circuitry may be used in combination with software instructions to implement the present invention. Thus, the techniques are not limited to any specific combination of hardware circuitry and software or to any particular source for the instructions executed by the data processing system. In addition,

throughout this description, various functions and operations are described as being performed by or caused by software code to simplify description. However, those skilled in the art will recognize what is meant by such expressions is that the functions result from execution of the code by a processor, such as the CPU **302**.

A machine readable medium can be used to store software and data which when executed by a data processing system causes the system to perform various methods of the present invention. This executable software and data may be stored in various places including for example memory **304**, cache **306**, or storage device **324**, as illustrated in FIG. **7**. Portions of this software and/or data may be stored in any one of these storage devices.

Thus, a machine readable medium includes any mechanism that provides (i.e., stores and/or transmits) information in a form accessible by a machine (e.g., a computer, network device, personal digital assistant, manufacturing tool, any device with a set of one or more processors, etc.). For example, a machine readable medium includes recordable/non-recordable media (e.g., read only memory (ROM); random access memory (RAM); magnetic disk storage media; optical storage media; flash memory devices; etc.), etc.

In at least one embodiment of the present invention, a sensor is disposed on the base assembly of a portable computer to detect a hand location. If the hand location extends from a contact patch on the touchpad to the keyboard, that particular contact patch may be recognized by the computer system as an unintentional or accidental contact, and therefore not registered as a touchpad command. FIG. **11** illustrates a flowchart of one embodiment of an operation **400** for rejecting or accepting a contact patch on a touchpad in association with a hand location. The operation may be performed for each contact patch detected on the touchpad. In one embodiment, a capacitive touchpad (e.g., touchpad **224**) disposed on a top surface (e.g., surface **232**) of a base assembly (e.g., **220**) senses a contact patch on the touchpad. Any contact sensed by the touchpad may undergo a post processor algorithm in order to interpret the contact properly. In one embodiment, the post processor is defined herein to be the software or firmware that converts the information coming from the touchpad sensor into a format that can be interpreted by the portable computer (e.g., processor **302**). The post processor has as inputs, the touchpad outputs, which may include any type of physical contact made with the touchpad. The post processor then uses the "post processor algorithm" to analyze each set of inputs (location, width, number of contacts, presence of contact, and hand location) to determine whether the contact patch should be accepted or rejected.

The starting point **402** of operation **400** may be when the portable computer is in a power "ON" state, with the display screen visible (e.g., displaying an image or data) and the various input devices (e.g., keyboard **222**, sensor **240**, and touchpad **224**) in active and responsive states. When a contact patch is sensed on the touchpad, a location, trajectory, and size of the contact patch are determined, block **404**. Trajectory refers to the path of the contact patch (e.g., movement of a finger on the touchpad during a dragging operation). The contact patch may be for example, the palm region of hand during a typing activity (e.g., palm **281** of FIG. **7**) or during a pointing activity (e.g., right hand **282** of FIG. **5**). Next, a hand location is made using a sensor (e.g., sensor **240**) disposed on the base assembly of the portable computer, block **406**. In one embodiment, the sensor may include one or more IR sensors (e.g., sensors **275**, **276**) disposed along a sensor strip between the keyboard and the touchpad. In an alternative embodiment,

11

the sensors may be pairs of optical emitter-detectors (e.g., pairs 277, 278) disposed along a sensor strip between the keyboard and the touchpad.

Once a hand location is determined, a probability of intentional contact is estimated using the measured quantities of the contact patch location, trajectory, size of the contact patch, in addition to the hand location detected by the sensor, block 406. As discussed above, the touchpad may be divided into multiple sensing regions, for example, a left sensor region 242, center sensor region 244, and right sensor region 246 or there may be separate touchpads, one for each of these regions which are separated by small areas which are not touchpads. For example, the size of a contact patch made by palm 281 resting on left sensor region 242 would be larger compared to a contact patch made by a finger moving during a pointing or dragging cursor operation (e.g., finger of right hand 282 over right sensor region 246 illustrated in FIG. 5). In one embodiment, a contact patch having a relatively small size and a trajectory with a certain distance along the surface of the touchpad, coupled with no detection by the sensor would be initially estimated with a high probability of intentional contact. This may correspond to, for example, a pointing or dragging cursor operation. In contrast, a contact patch of a large size, and with no or minimal trajectory, coupled with detection by the sensor, would be initially estimated with a very low probability of intentional contact. This may correspond to a palm resting on the touchpad surface.

The estimated probabilities are repeatedly calculated to establish a narrow or strict accept/reject criteria for the contact patch, block 410, and the contact patch is also measured repeatedly over a period of time, block 412. These calculations are done repeatedly to provide the system with the most recent of sampling data. In one particular embodiment, the measurements may be repeated in the range of about 120 Hz to about 3 Hz. Lastly, the contact patch is accepted or rejected based on the criteria established from the measured contact patch/sensor calculations, block, 414. Once an accept/reject decision has been made, the operation ends, block 416.

The accept/reject operation 400 may further be described with respect to the scenarios in FIGS. 4-5. FIG. 4 illustrates a conventional typing position with the palms of both hands resting on touchpad 224 and fingers extending over keyboard 222. The contact patches made on left sensor region 242 and right sensor region 246 would be rejected. The relatively large sizes of the contact patches made by the palms in connection with the detection of hand location would be interpreted as unintentional or accidental contact. In this position, touchpad 224 operates only as a palm rest. FIG. 5 illustrates a dual mode position in which the left hand 280 is in a typing position and right hand 282 is in a touchpad position. The contact patch from left hand 280 (e.g., the palm) would be rejected because the location of left hand 280 would be detected by sensor 240. Accordingly, either the entire left sensor region 242, which is associated with the location of left hand 280 and the contact patch, or the particular contact patch made by left hand 280 on left sensor region 242 would be rendered inactive for touchpad commands, and operate only as a palm rest. The contact patch made by the finger of right hand 282 would be accepted as an intentional contact. The sensor would not detect any hand presence associated with right sensor region 246. As described above, the calculations performed by operation 400 include measuring the size and trajectory of the contact patch made by right hand 282. A comparison with the contact patch from left hand 280 may also be performed to establish the accept/reject criteria.

FIG. 12 illustrates an alternative embodiment of a hand detecting sensor that may be disposed on a portable computer.

12

Portable computer 500 is illustrated in an open position with display assembly 510 rotated open with respect to base assembly 520. Base assembly 520 includes a wide touchpad 524 disposed below keyboard 522. An imaging sensor 545 is disposed on bezel 514 that frames display screen 512. Imaging sensor 545 detects an area of base assembly 520 that includes keyboard 222 and touchpad 524. When activated, imaging sensor 545 may detect a particular hand location and establish accept/reject criteria as described above (e.g., operation 400). In an alternative embodiment, imaging sensor 545 may also provide video-conferencing functionality when not operating as an imaging sensor.

In the foregoing specification, the invention has been described with reference to specific exemplary embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

What is claimed is:

1. A data processing system comprising:

an image sensor configured to detect a user's hand location relative to a touch sensitive surface and a keyboard, wherein the touch sensitive surface is configured to act as an input device, the touch sensitive surface having a two dimensional surface capable of outputting location information of a touch on the touch sensitive surface, wherein the location information relates to a location of the touch with regard to the touch sensitive surface; and a display screen coupled to the touch sensitive surface, wherein the display screen is configured to change an image on the display screen based upon location information output from the touch sensitive surface and the detected hand location.

2. The system of claim 1 wherein an image captured by the image sensor is used in processing an output for the display screen.

3. The system of claim 2 wherein an object is moveable based upon the output from the touch sensitive surface.

4. The system of claim 1 additionally comprising at least one processor which is coupled to the image sensor configured to process an input for the display screen.

5. The system of claim 1 wherein the image sensor is coupled in a position above the user's hand.

6. The system of claim 1 wherein the touch sensitive surface is a touchpad.

7. A machine implemented method comprising:

detecting, with an image sensor, a user's hand location relative to a touch sensitive surface and a keyboard, wherein the touch sensitive surface is configured to act as an input device, the touch sensitive surface having a two dimensional surface capable of outputting location information of a touch on the touch sensitive surface, wherein the location information relates to a location of the touch with regard to the touch sensitive surface; and displaying a user interface on a display screen which is coupled to the touch sensitive surface, wherein the display screen is configured to change an image on the display screen based upon location information output from the touch sensitive surface and the detected hand location.

8. The method as in claim 7 wherein an image captured by the image sensor is used in processing an output for the display screen.

9. The method of claim 8 wherein an object is moveable based upon the output from the touch sensitive surface.

13

10. The method of claim 7 additionally comprising processing the image from an image sensor for display on the display screen.

11. The method of claim 10 wherein the processing includes determining intentional contact onto the touch sensitive surface.

12. The method of claim 7 wherein the touch sensitive surface is a touchpad.

13. The method of claim 7 wherein the imaging sensor is configured in a position above the user's hand.

14. A machine readable storage medium containing instructions that, when executed by a data processing system, cause said system to perform a method comprising:

detecting, with an image sensor, a user's hand location relative to a touch sensitive surface and a keyboard, wherein the touch sensitive surface is configured to act as an input device, the touch sensitive surface having a two dimensional surface capable of outputting location information of a touch on the touch sensitive surface, wherein the location information relates to a location of the touch with regard to the touch sensitive surface; and displaying a user interface on a display screen which is coupled to the touch sensitive surface, wherein the display screen is configured to change an image on the display screen based upon location information output from the touch sensitive surface and the detected hand location.

15. The medium as in claim 14 wherein an image captured by the image sensor is used in processing an output for the display screen.

16. The medium of claim 15 wherein an object is moveable based upon the output from the touch sensitive surface.

17. The medium of claim 14 additionally comprising processing an image from the image sensor for display on the display screen.

18. The medium of claim 17 wherein the processing includes determining intentional contact onto the touch sensitive surface.

19. The medium of claim 14 wherein the touch sensitive surface is a touchpad.

20. The medium of claim 14 wherein the imaging sensor is configured in a position above the user's hand.

21. A machine implemented method for sensing the location of a user's hand on a touchpad, comprising:

detecting the location of a user's hand on the touchpad and relative to a keyboard with an imaging sensor, wherein the touchpad is part of a computer system and is configured to allow the user to interact with an object on a display screen, the touchpad having a two dimensional surface capable of outputting location information relating to a location of a touch on the touchpad with regard to the two dimensional surface; and

accepting user input from the touchpad to interact with the object based upon the detected hand location.

22. The method of claim 21 additionally comprising determining whether a contact on the touchpad by the user's hand is an intentional input to interact with the object.

14

23. The method of claim 22 wherein the determining includes processing an image captured by the imaging sensor of the user's hand to determine whether there is an intentional input.

24. The method of claim 21 wherein the user interacts with the object by moving the object.

25. The method of claim 21 wherein the object is moveable on the display screen.

26. A machine readable storage medium containing instructions that, when executed by a data processing system, cause said system to perform a method comprising:

detecting the location of a user's hand on a touchpad and relative to a keyboard with an imaging sensor, wherein the touchpad is part of a computer system and is configured to allow the user to interact with an object on a display screen, the touchpad having a two dimensional surface capable of outputting location information relating to a location of a touch on the touchpad with regard to the two dimensional surface; and

accepting user input from the touchpad to interact with the object based upon the detected location of the hand.

27. The medium of claim 26 additionally comprising determining whether a contact on the touchpad by the user's hand is an intentional input to interact with the object.

28. The medium of claim 27 wherein the determining includes processing an image captured by the imaging sensor of the user's hand to determine whether there is an intentional input.

29. The medium of claim 26 wherein the user interacts with the object by moving the object.

30. The medium of claim 26 wherein the object is moveable on the display screen.

31. A computer user interface, comprising:

a base assembly;

a keyboard mounted on the base assembly;

a touchpad mounted on the base assembly, the touchpad configured to act as an input device and having a two dimensional surface capable of outputting location information relating to a location of a touch on the touchpad with regard to the two dimensional surface; and an imaging sensor coupled to the base assembly, wherein the imaging sensor detects the location of a user's hand relative to the touchpad and the keyboard as an input for interaction with an object on a display screen.

32. The interface of claim 31 additionally comprising a processor coupled to the base assembly, wherein the processor processes an image of the user's hand in determining an output for the display screen.

33. The interface of claim 31 wherein the interface is on a portable computer.

34. The interface of claim 31 wherein the imaging sensor is coupled above the user's hand.

35. The interface of claim 31 wherein the imaging sensor is configured to capture live video of the user.

* * * * *