



US008186013B2

(12) **United States Patent**
Yip

(10) **Patent No.:** **US 8,186,013 B2**

(45) **Date of Patent:** **May 29, 2012**

(54) **DOUBLE MOTION DOOR HINGE FOR
MOTOR VEHICLES**

(76) Inventor: **Johnnie Yip**, Rosemead, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 94 days.

(21) Appl. No.: **12/941,220**

(22) Filed: **Nov. 8, 2010**

(65) **Prior Publication Data**

US 2011/0061202 A1 Mar. 17, 2011

Related U.S. Application Data

(63) Continuation-in-part of application No. 12/576,442,
filed on Oct. 9, 2009, now Pat. No. 7,886,410, which is
a continuation-in-part of application No. 12/455,931,
filed on Jun. 9, 2009, now Pat. No. 8,024,838, which is
a continuation-in-part of application No. 12/386,862,
filed on Apr. 24, 2009, now Pat. No. 7,963,001.

(51) **Int. Cl.**
E05D 7/06 (2006.01)

(52) **U.S. Cl.** **16/241**; 16/367; 16/239; 16/246;
16/366; 16/374; 16/286; 296/146.11

(58) **Field of Classification Search** 16/374,
16/367, 242, 235-239, 241, 246, 248, 105,
16/54, 50, 286, DIG. 23, 287; 296/146.11,
296/146.12, 76, 96, 146.8; 49/420, 425

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,382,327	B1 *	5/2002	Mosdal	172/311
6,676,193	B1 *	1/2004	Hanagan	296/146.11
6,808,223	B1 *	10/2004	Baum et al.	296/146.12
6,820,918	B1 *	11/2004	DeBono	296/146.11
7,669,288	B2 *	3/2010	Zeilbeck et al.	16/354
2003/0213102	A1 *	11/2003	Ham	16/374
2004/0244144	A1 *	12/2004	Ham	16/221
2005/0204511	A1 *	9/2005	Wohlfarth	16/367
2005/0283948	A1 *	12/2005	Hyde	16/361
2006/0096062	A1 *	5/2006	Woolcock	16/238
2006/0123592	A1 *	6/2006	Yip	16/241
2007/0228763	A1 *	10/2007	Duffy	296/76
2008/0083089	A1 *	4/2008	Hoffman	16/367
2008/0083090	A1 *	4/2008	Hoffman	16/367
2009/0056074	A1 *	3/2009	Chase	16/321

* cited by examiner


Primary Examiner — Chuck Y. Mah

(74) *Attorney, Agent, or Firm* — Clement Cheng

(57) **ABSTRACT**

A double motion door hinge for a vehicle door includes an upper door connection plate having a second motion assembly pivotally mounted to the upper door connection plate. The axis of rotation of the second motion assembly is perpendicular to the upper door connection plate. A first motion assembly is mounted to the second motion assembly at a first motion hinge. The first motion assembly is adapted to connect to an upper portion of a vehicle door. The lower door connection plate includes a lower door connection plate stopper and a lower shock connection. The lower door connection plate stopper has a lower door double motion stopper surface.

18 Claims, 22 Drawing Sheets

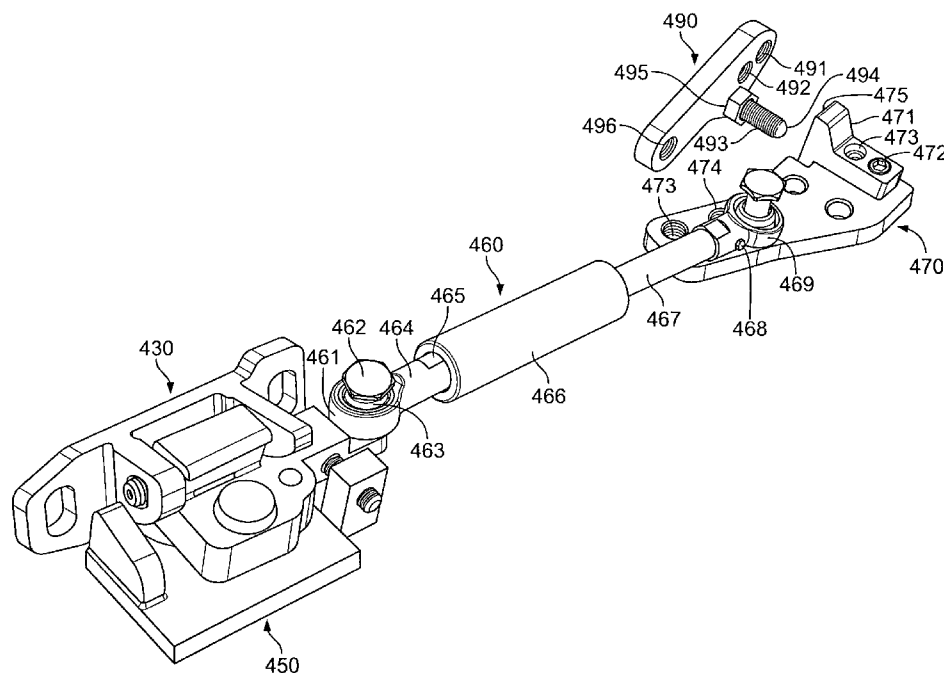

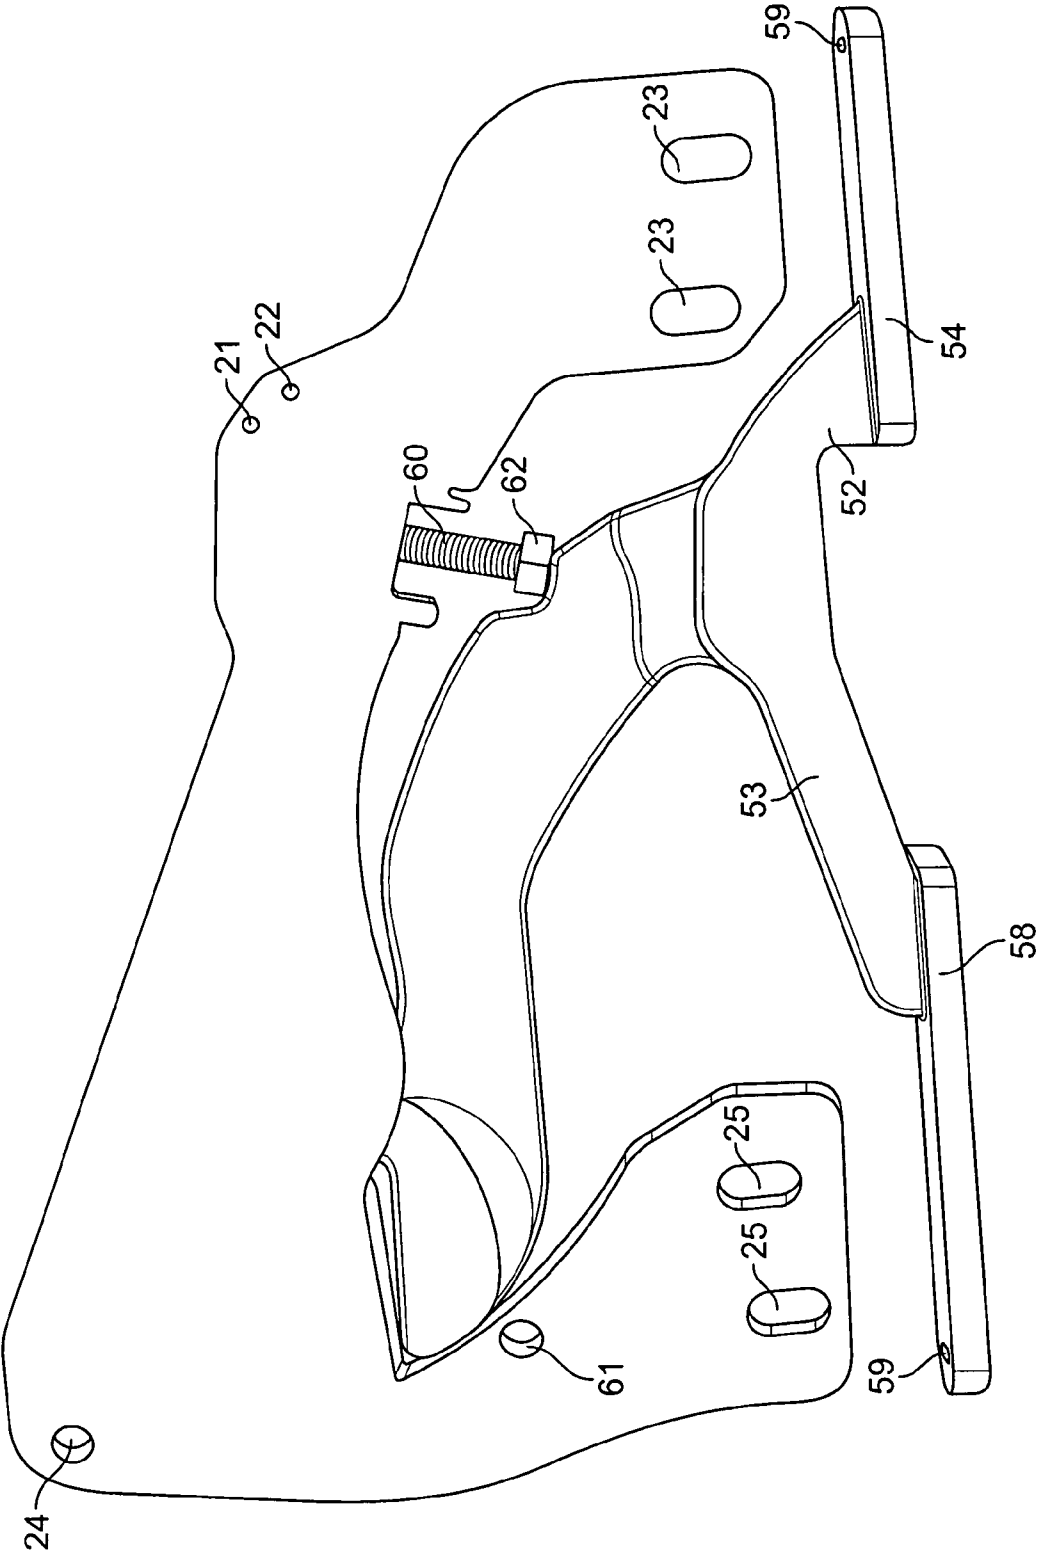


FIG. 1

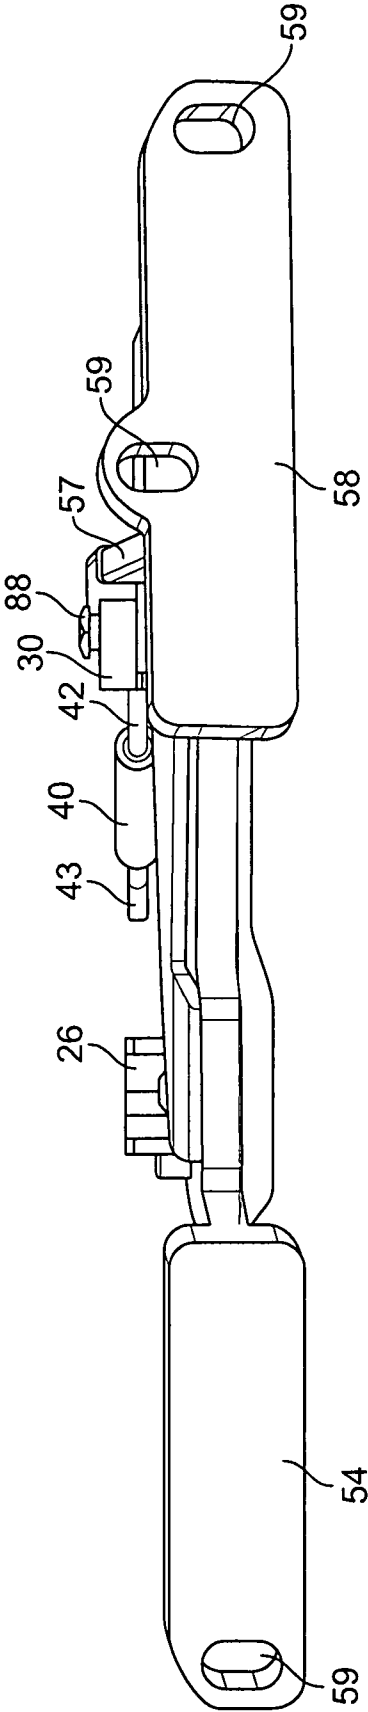


FIG. 2

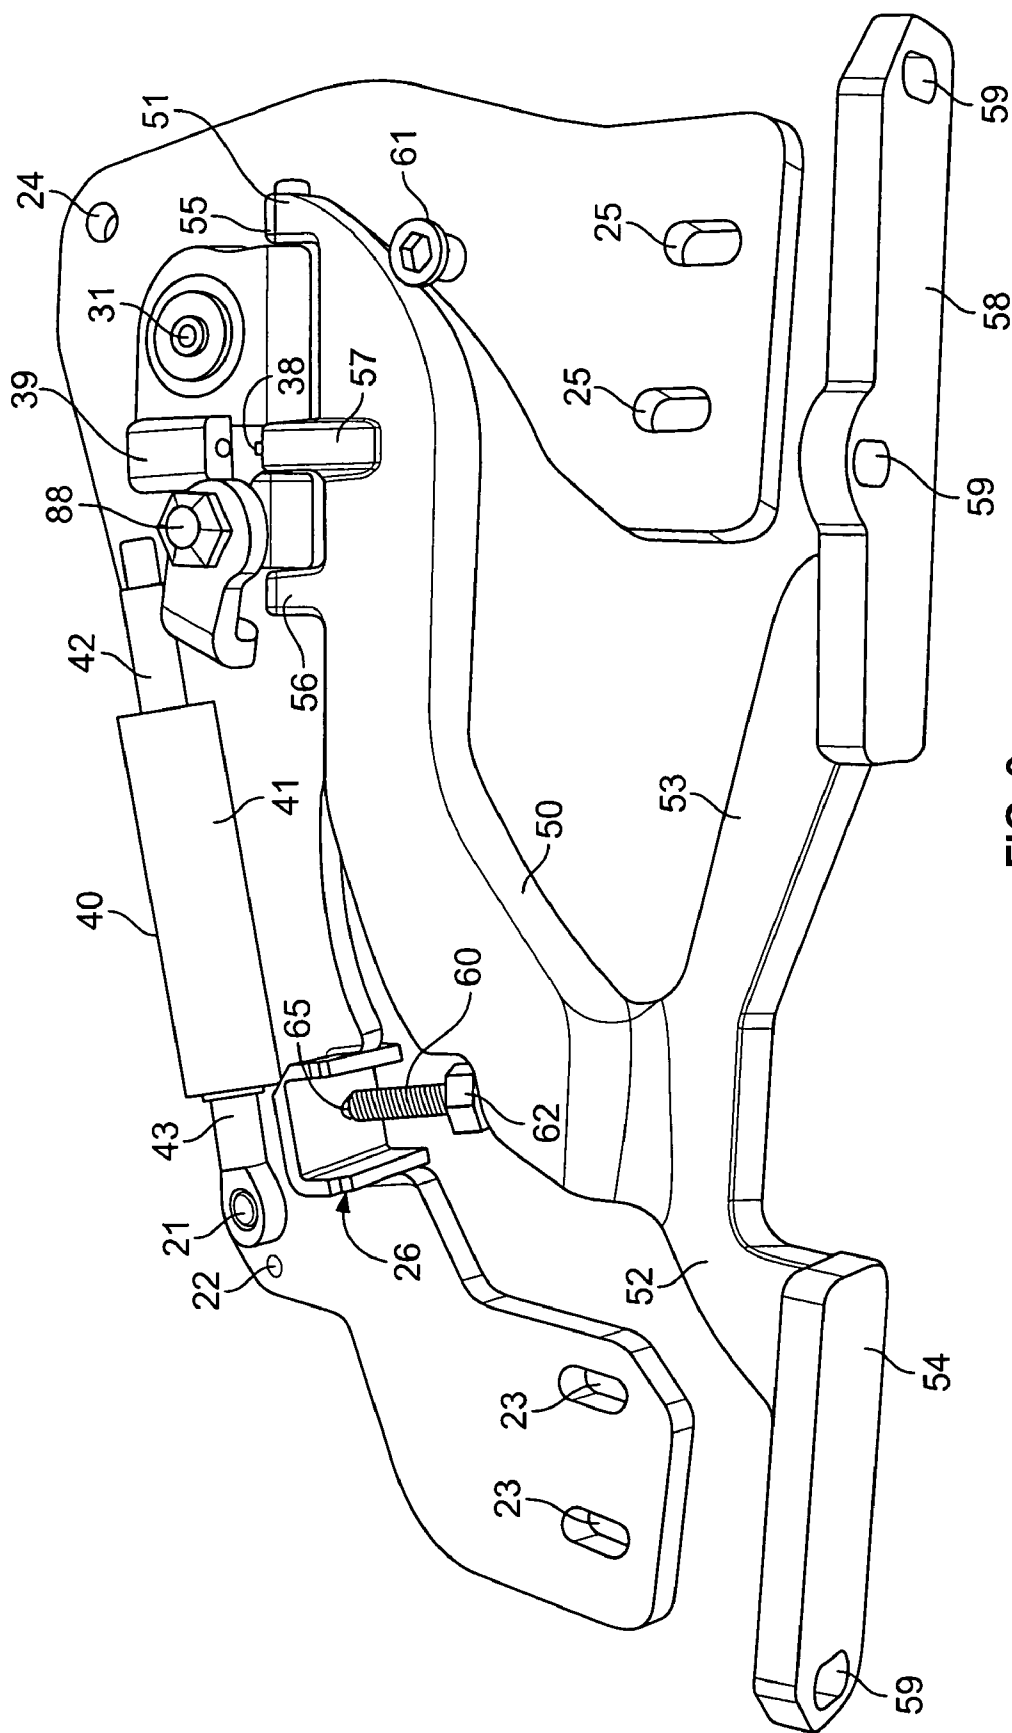
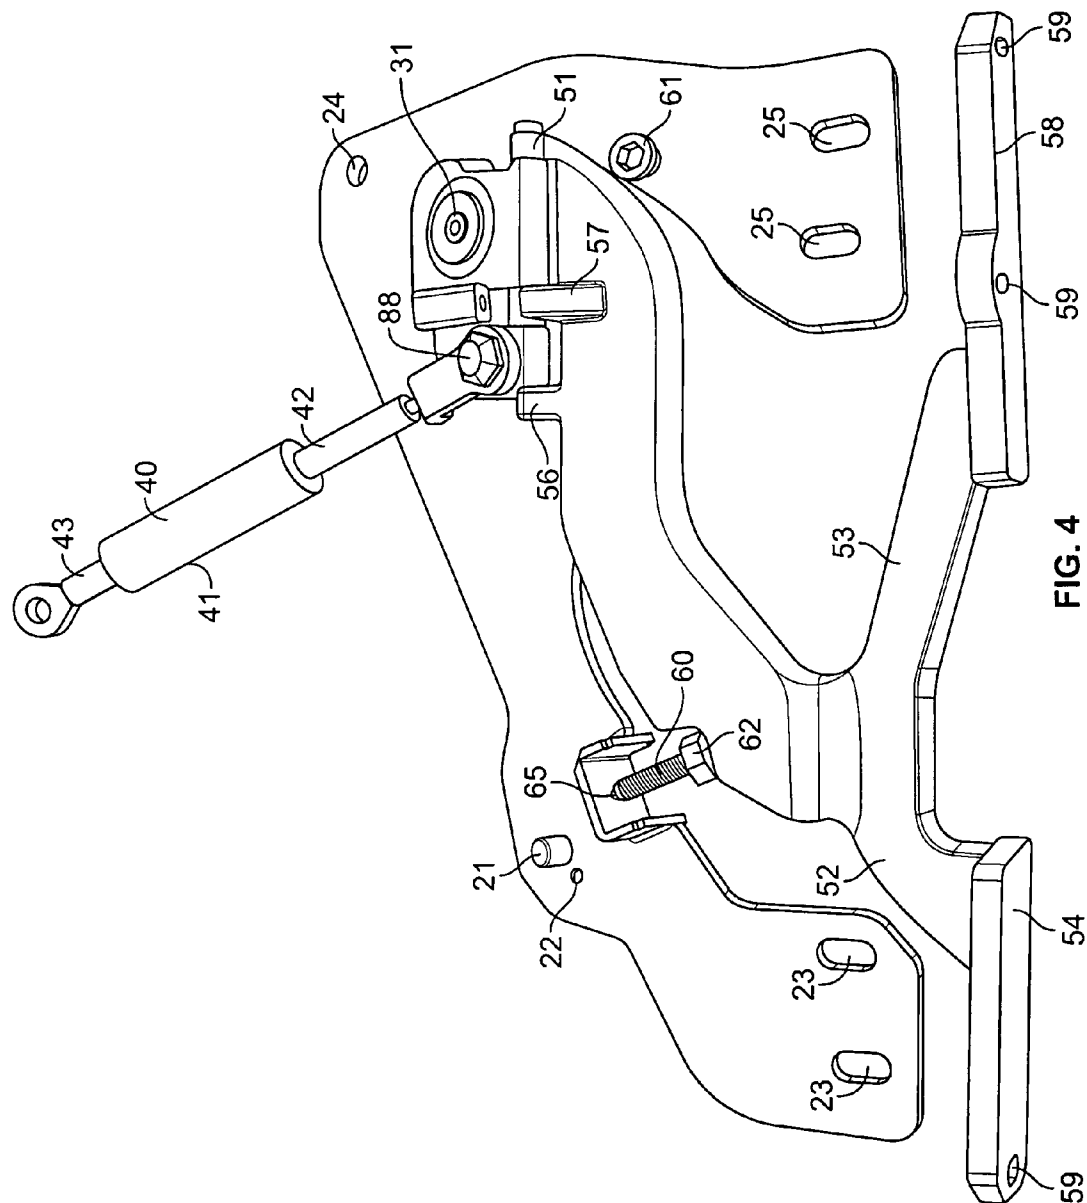


FIG. 3



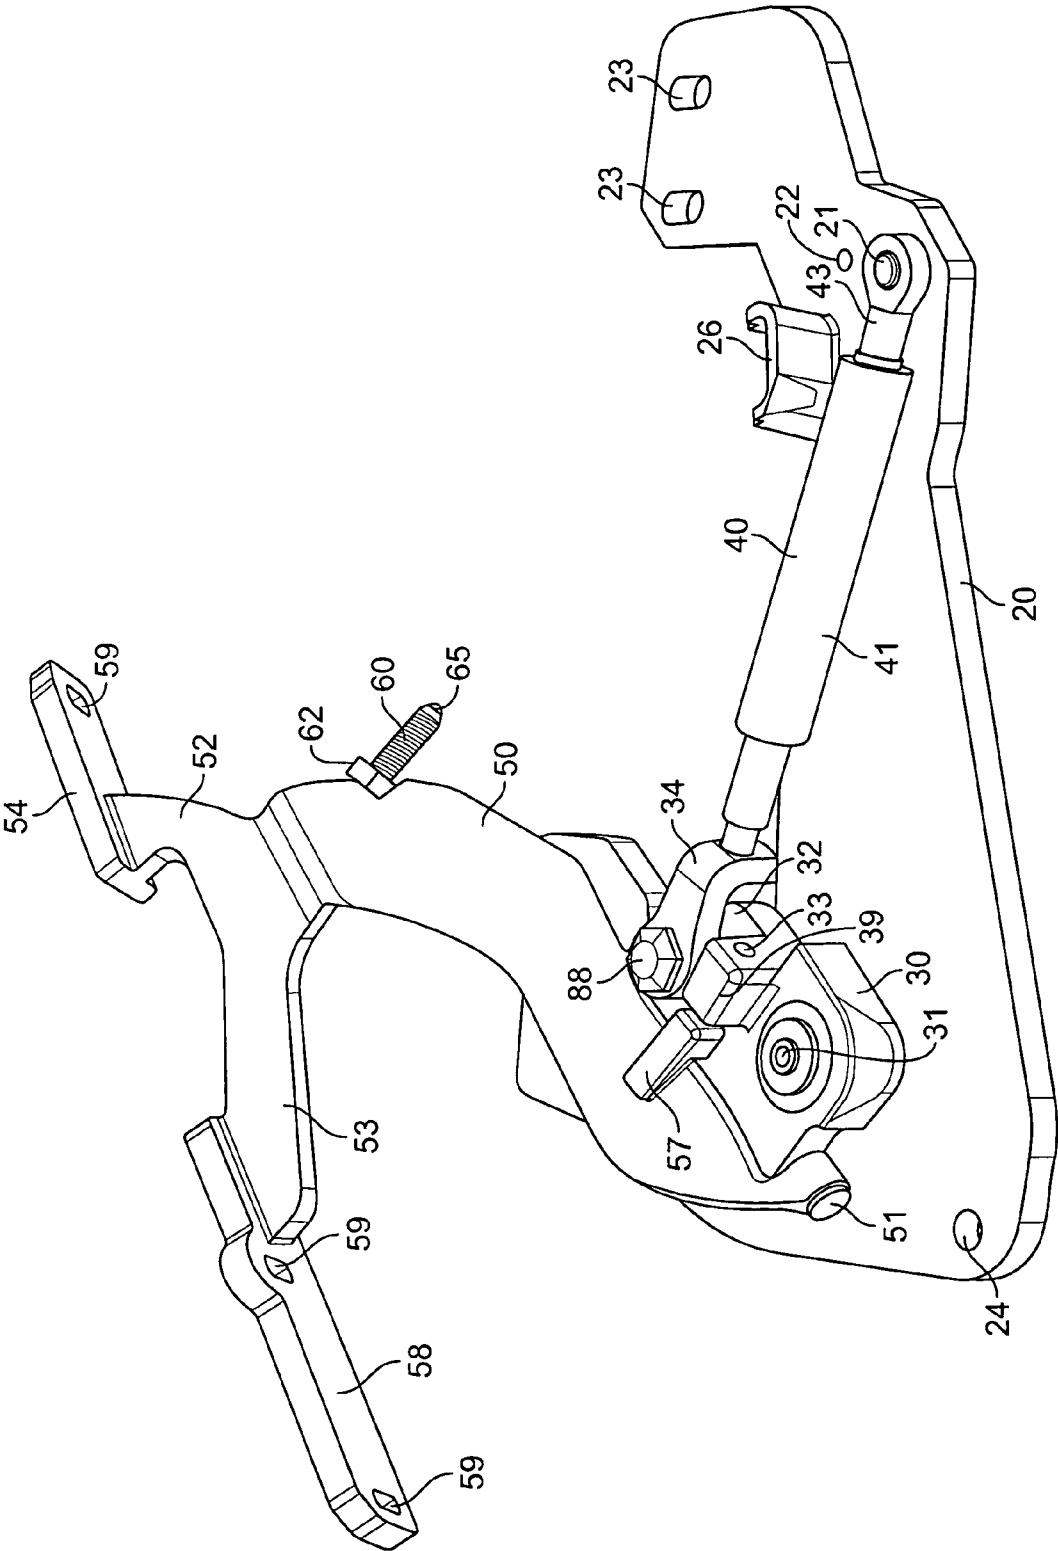


FIG. 5

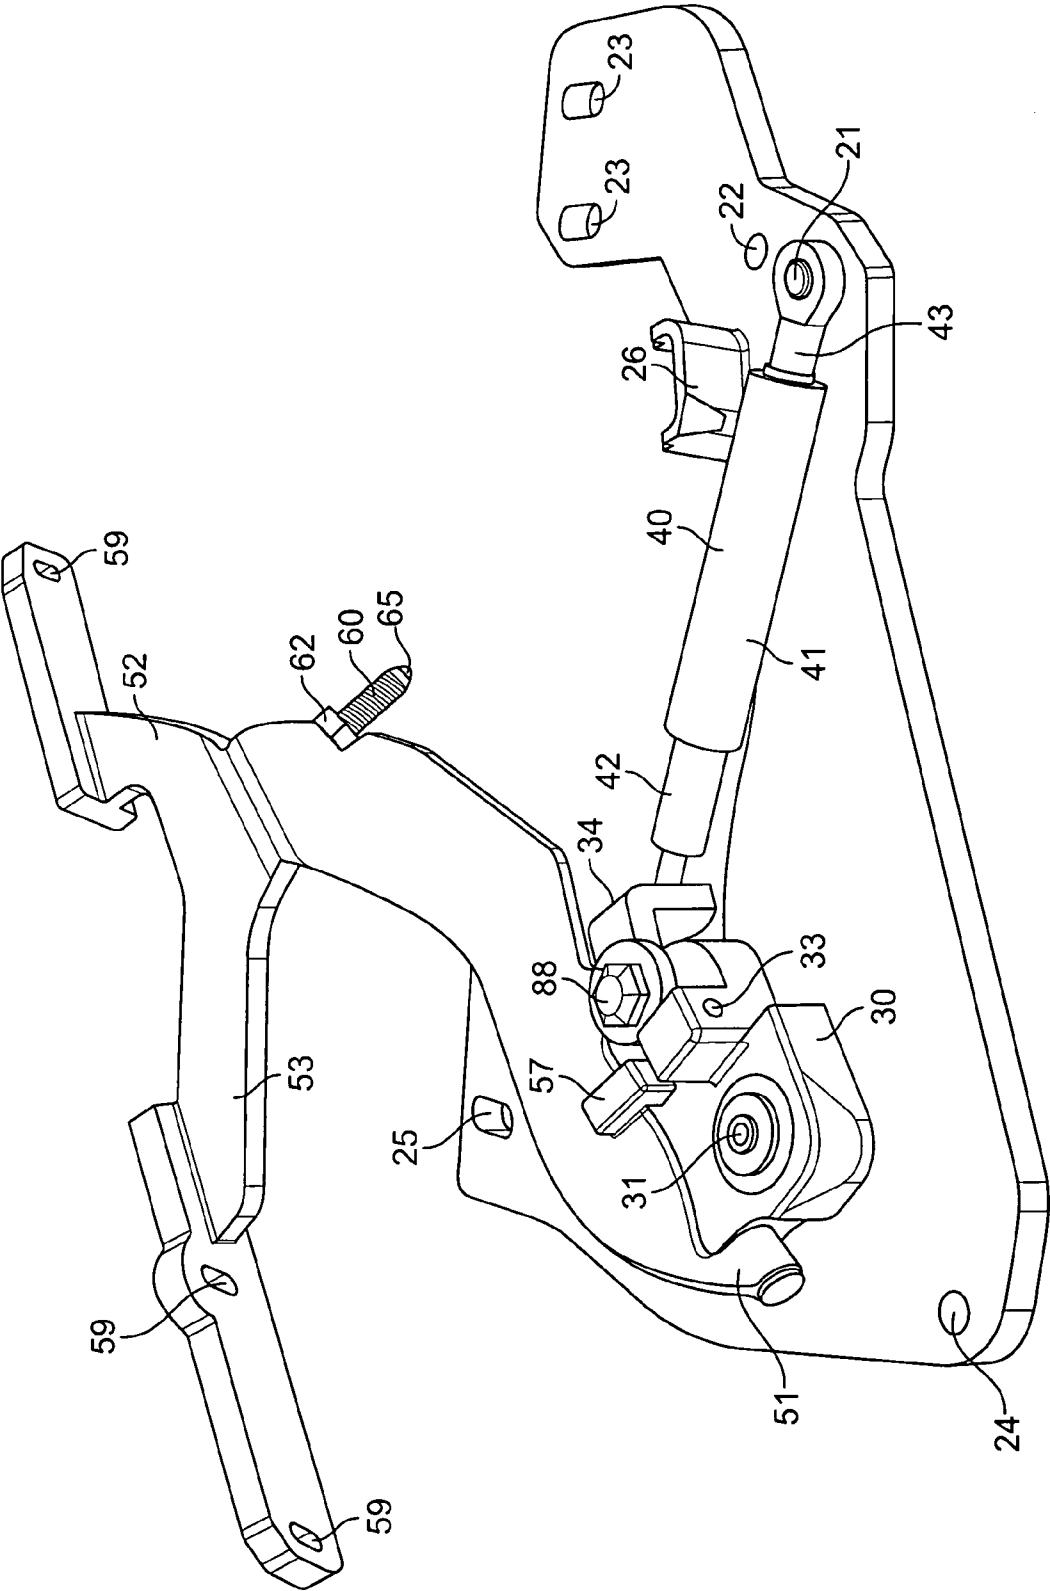


FIG. 6

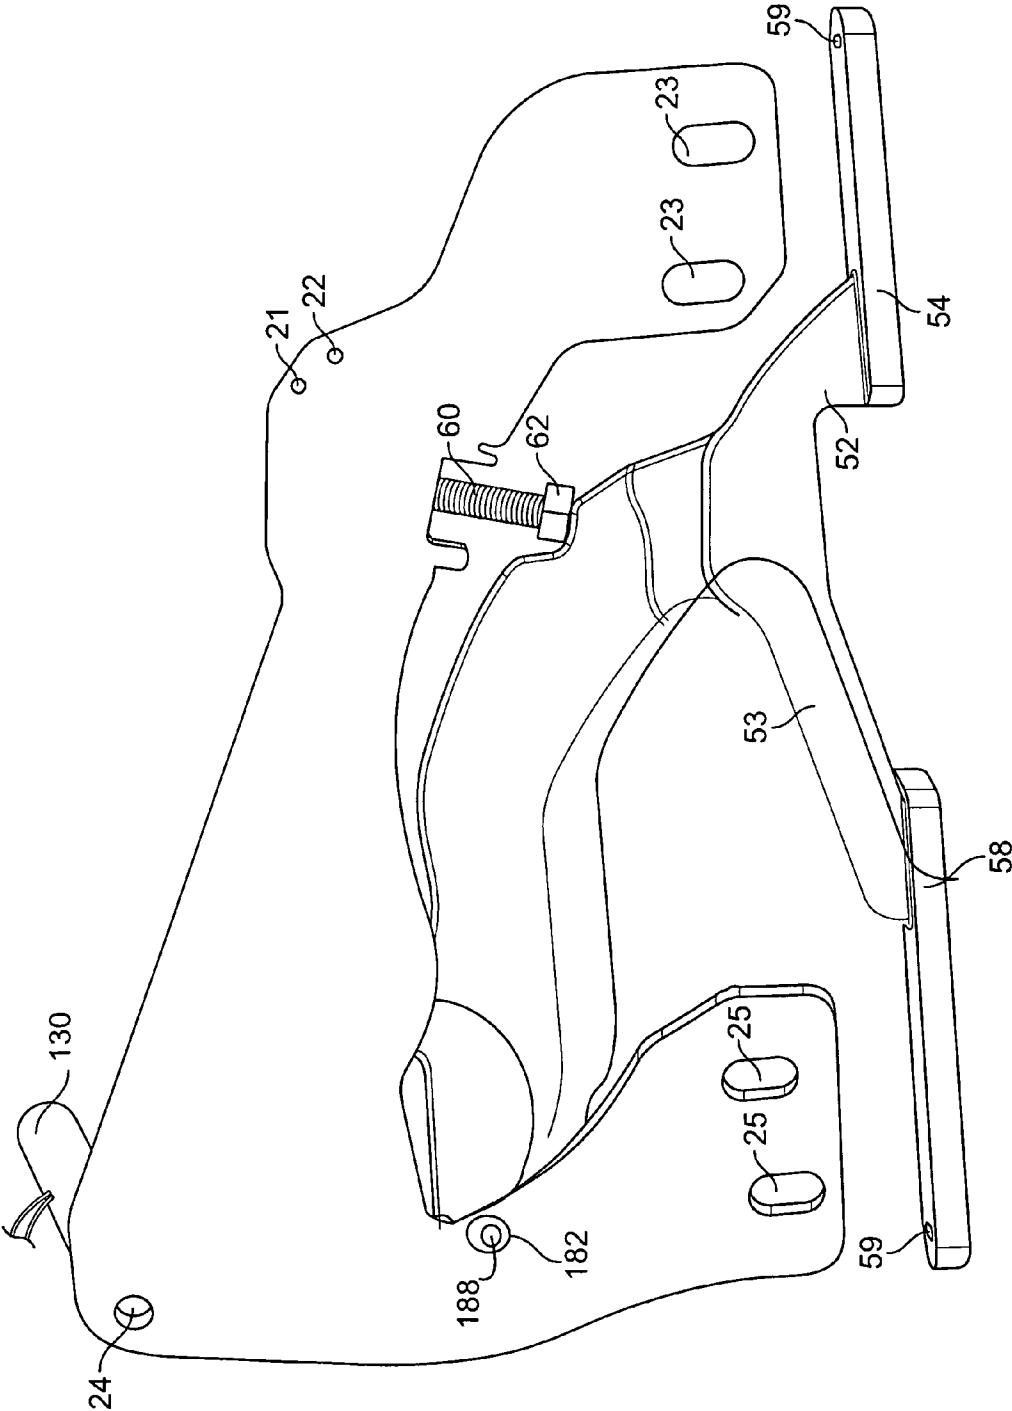


FIG. 7

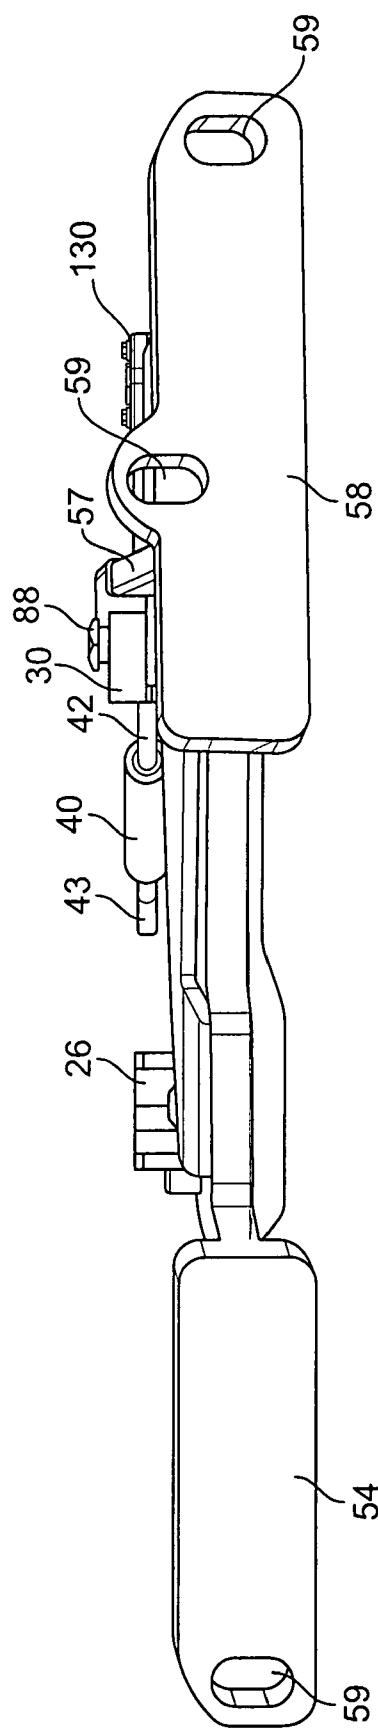


FIG. 8

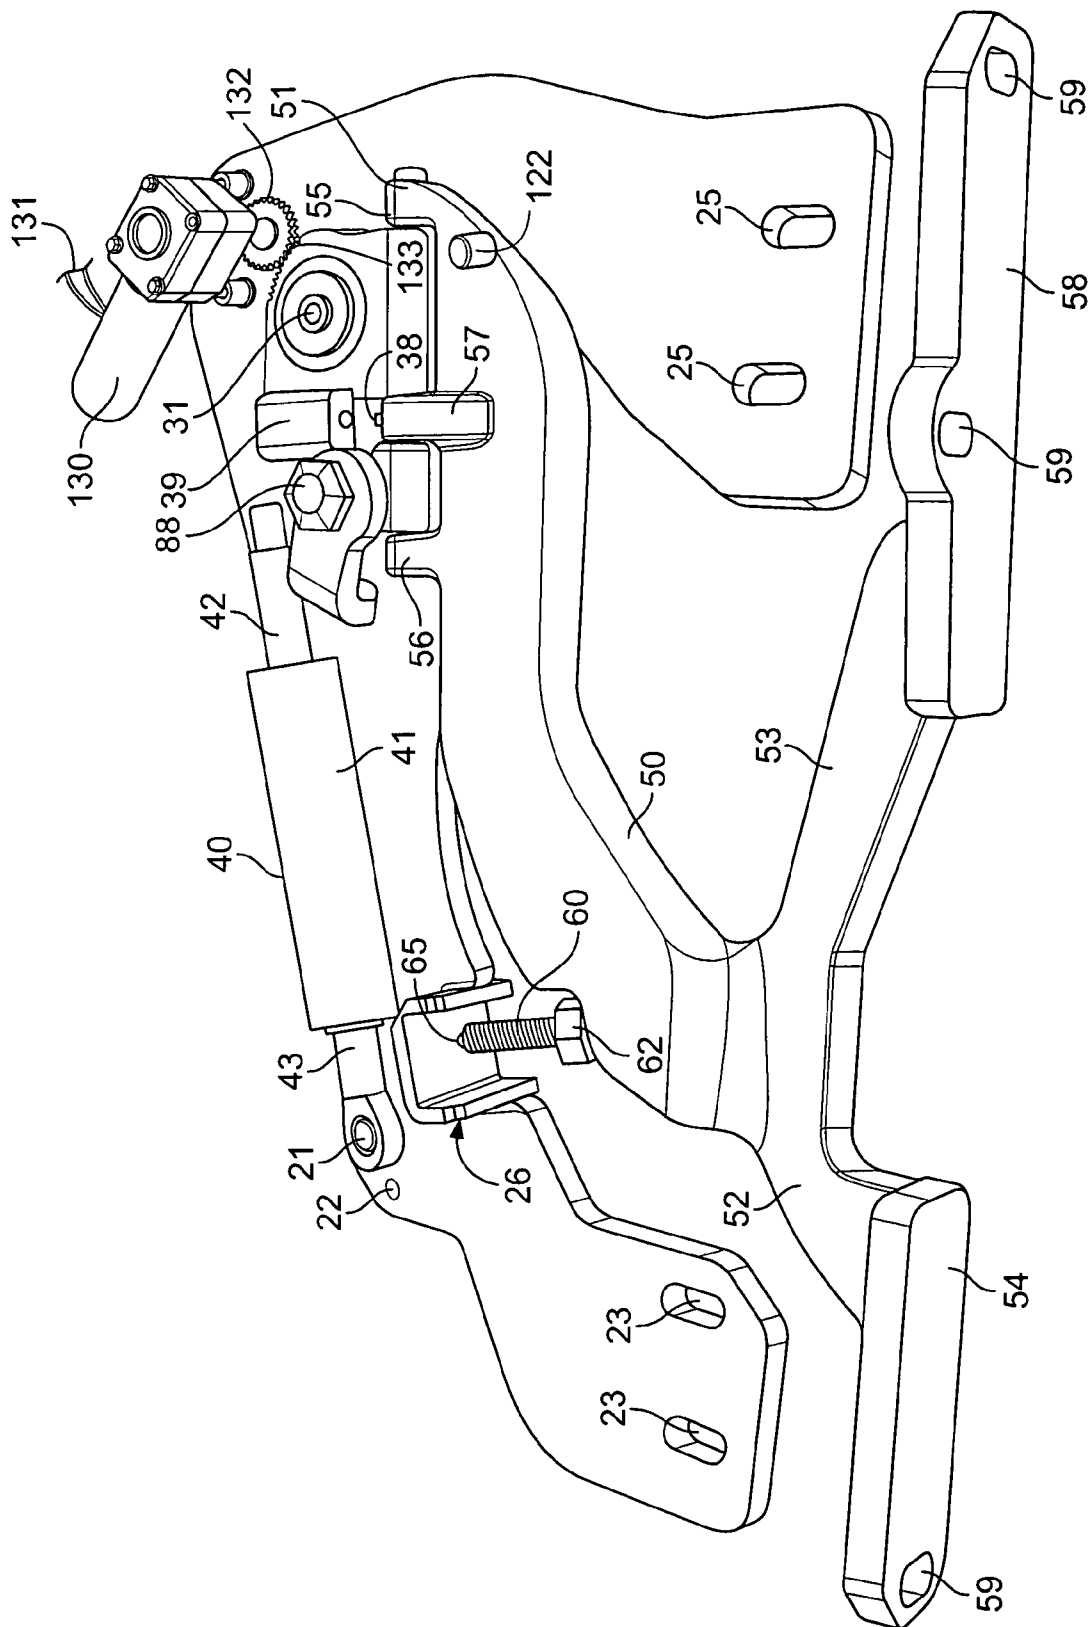
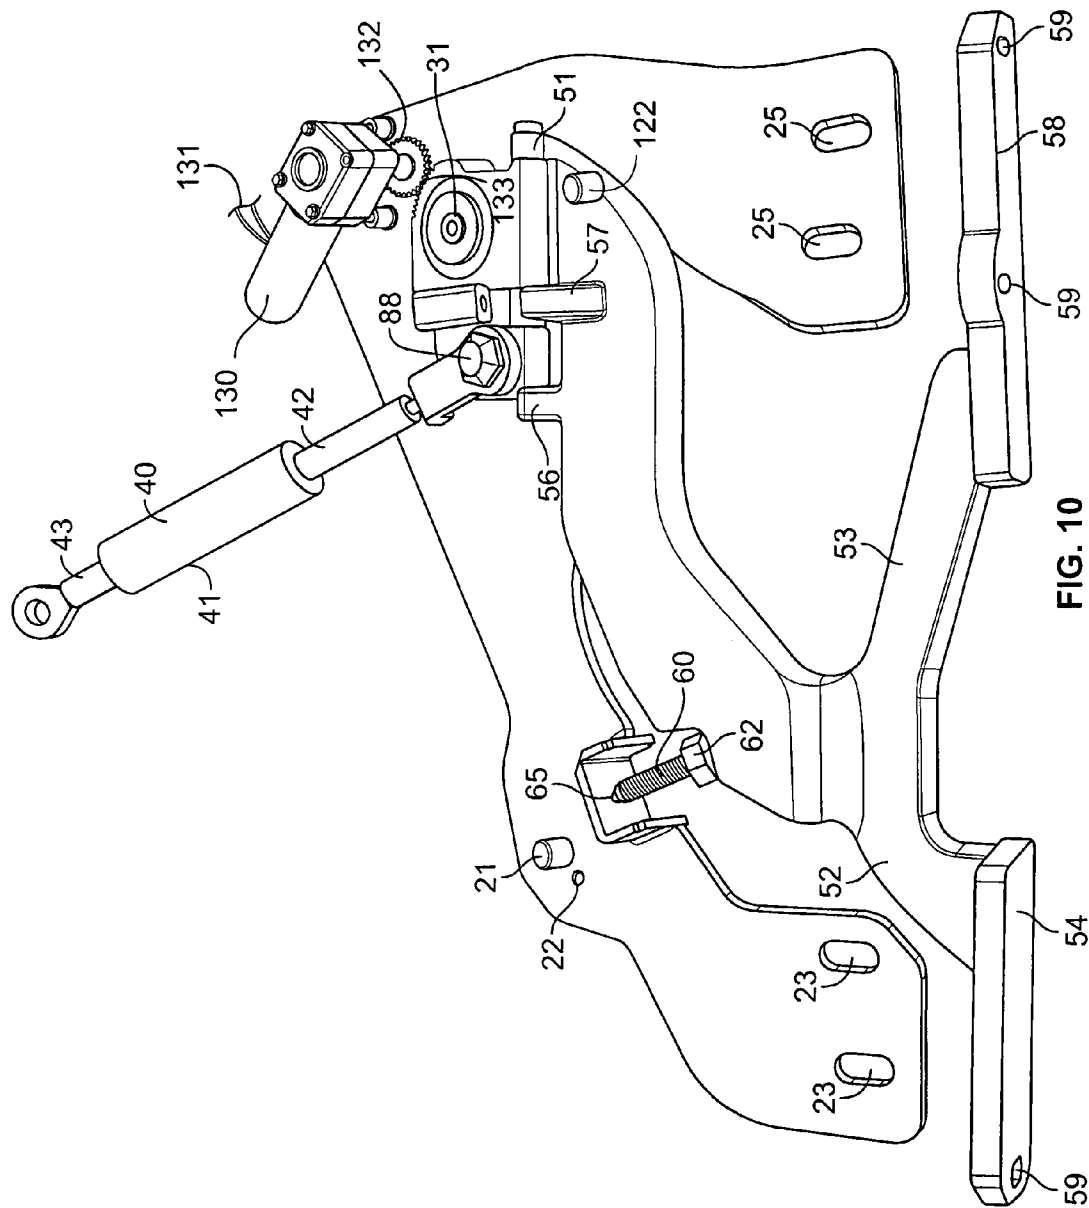


FIG. 9



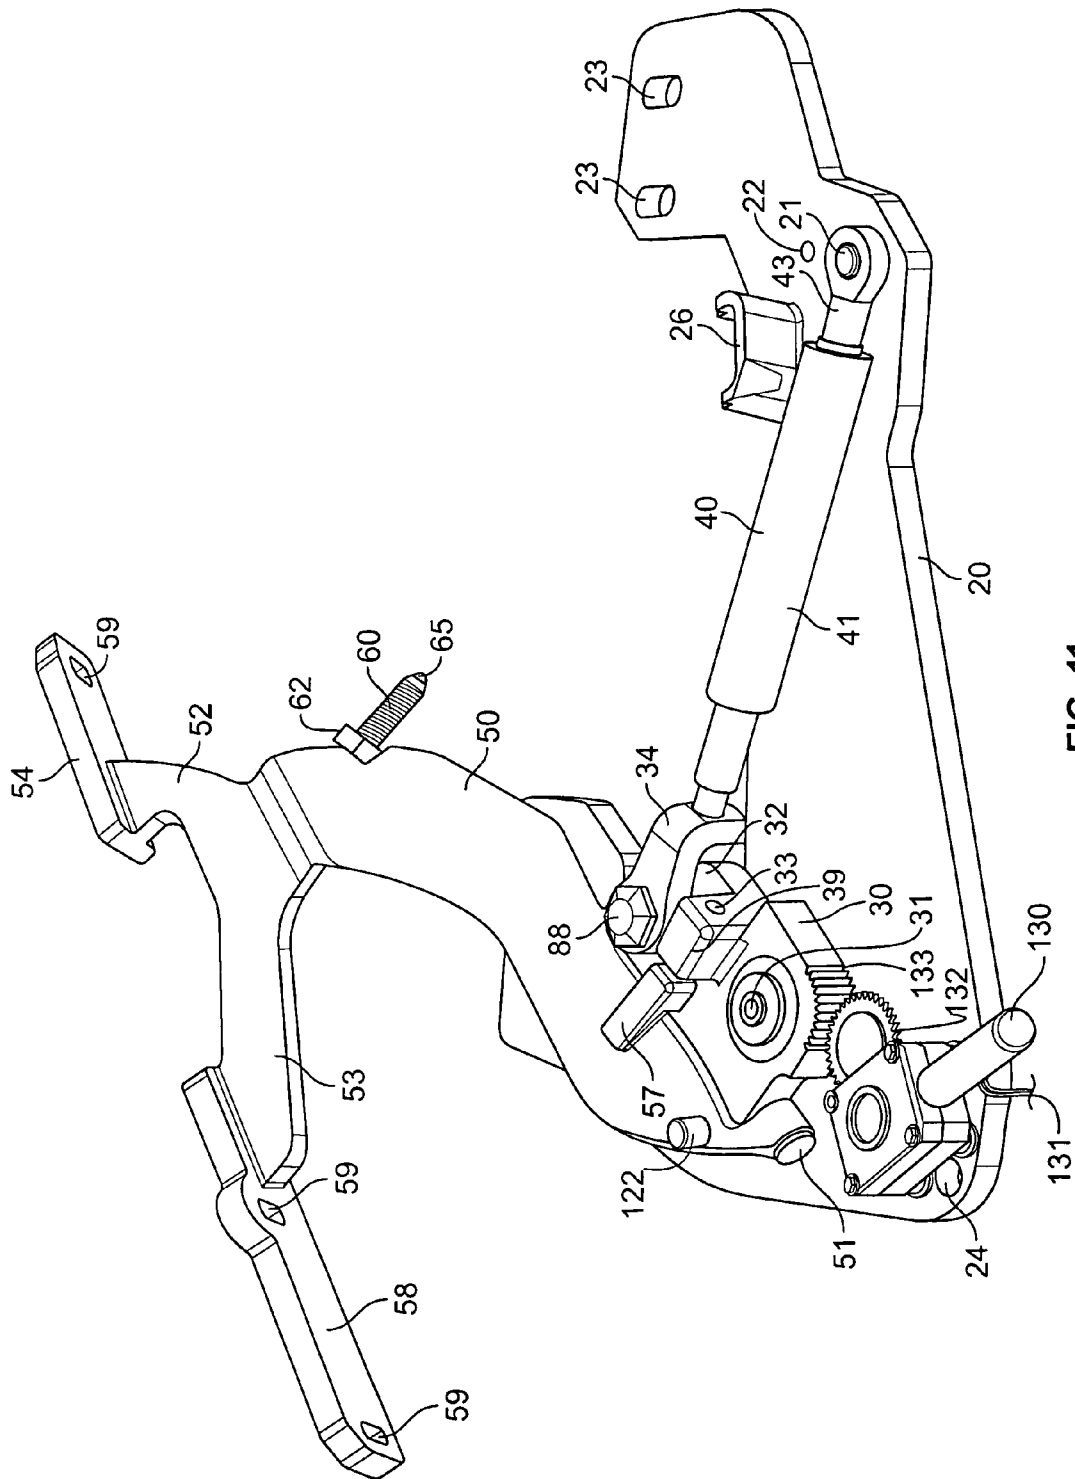


FIG. 11

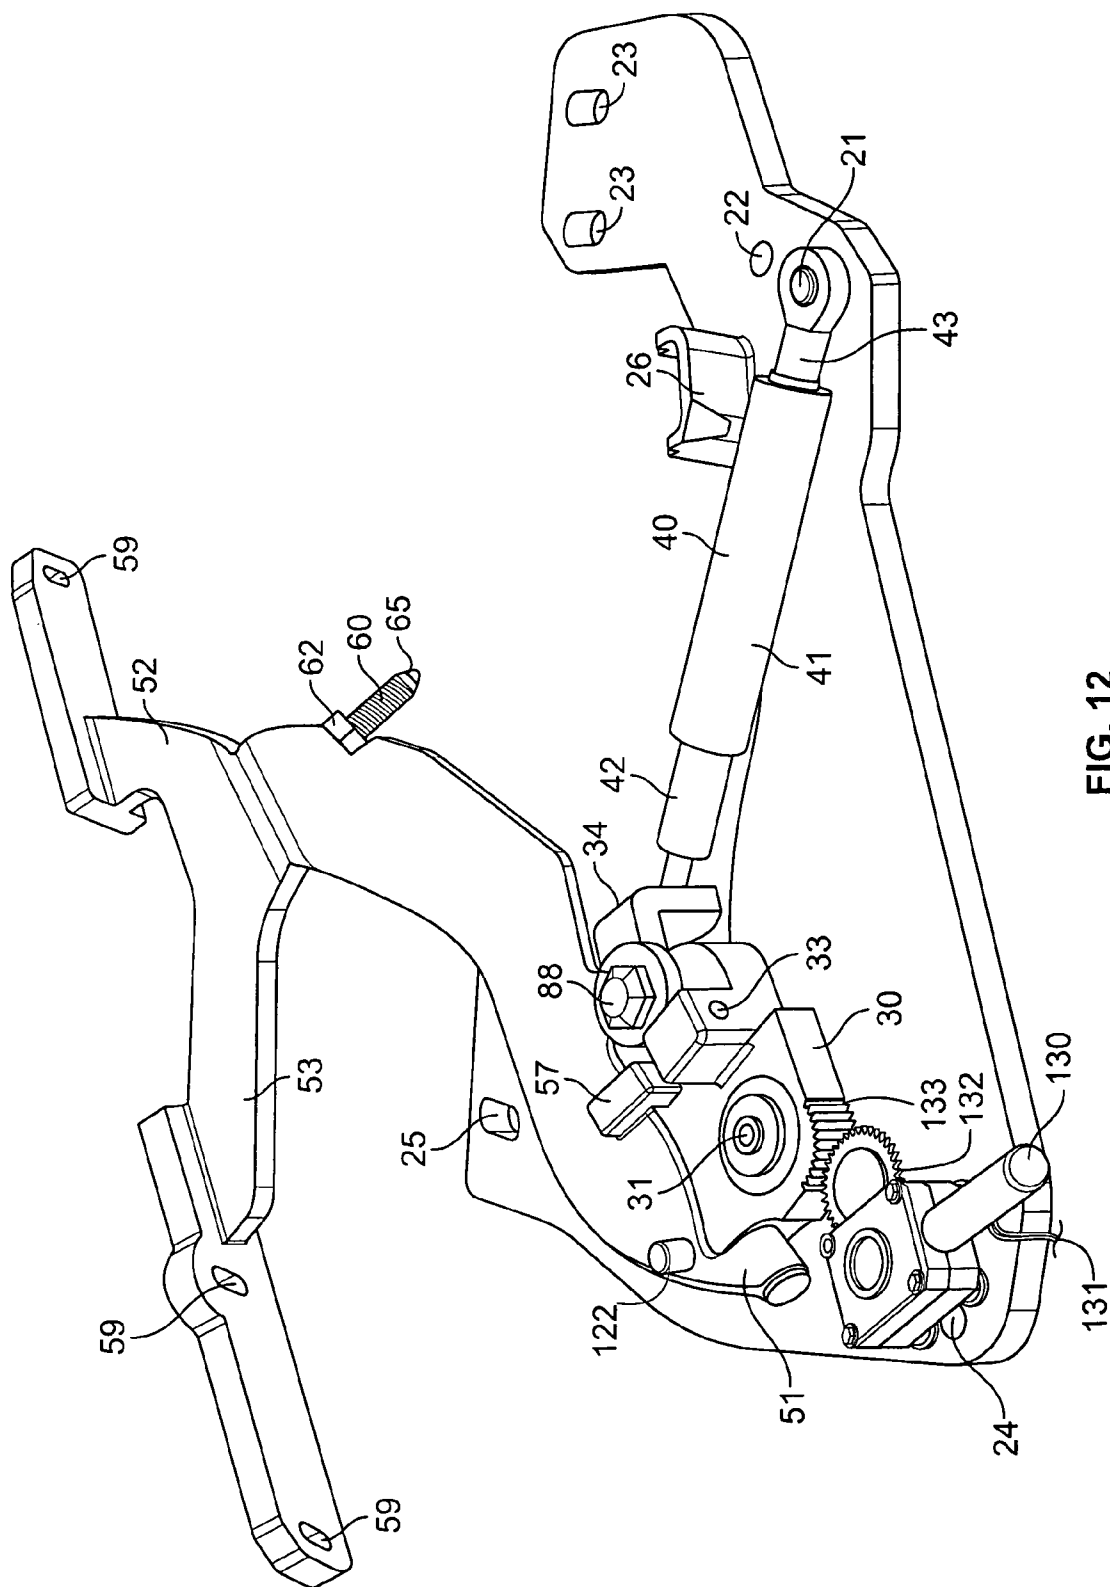


FIG. 12

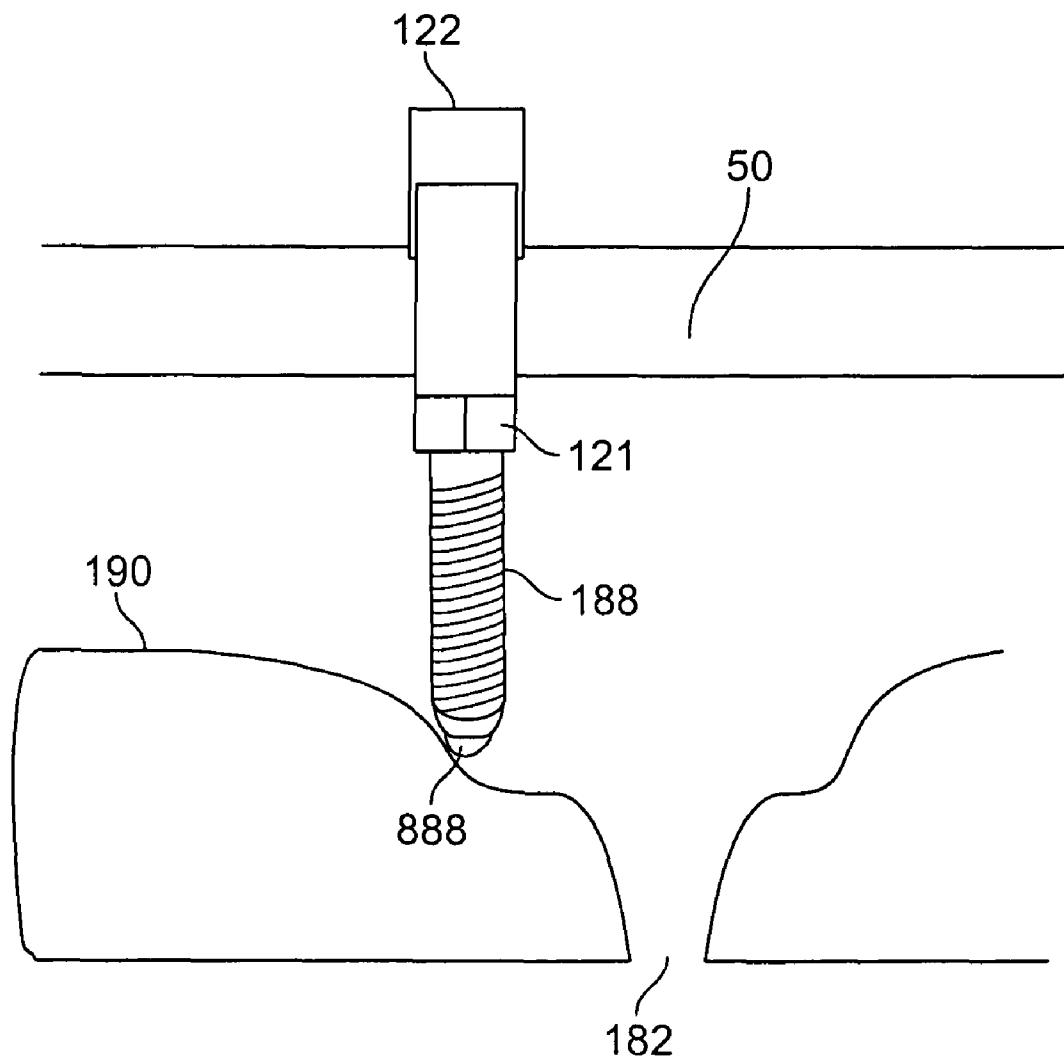


FIG. 13

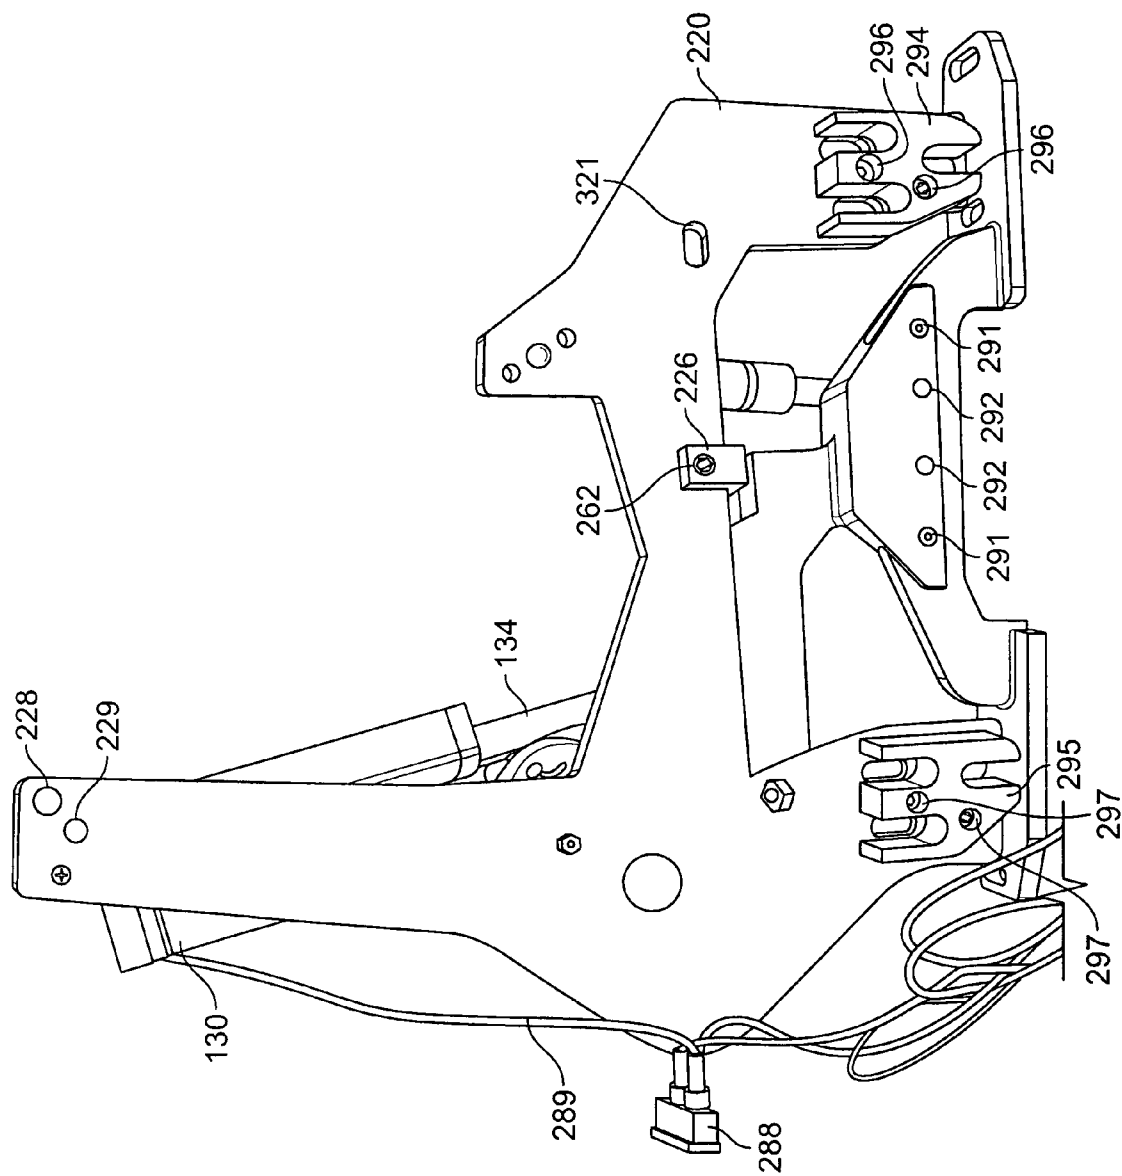


FIG. 14

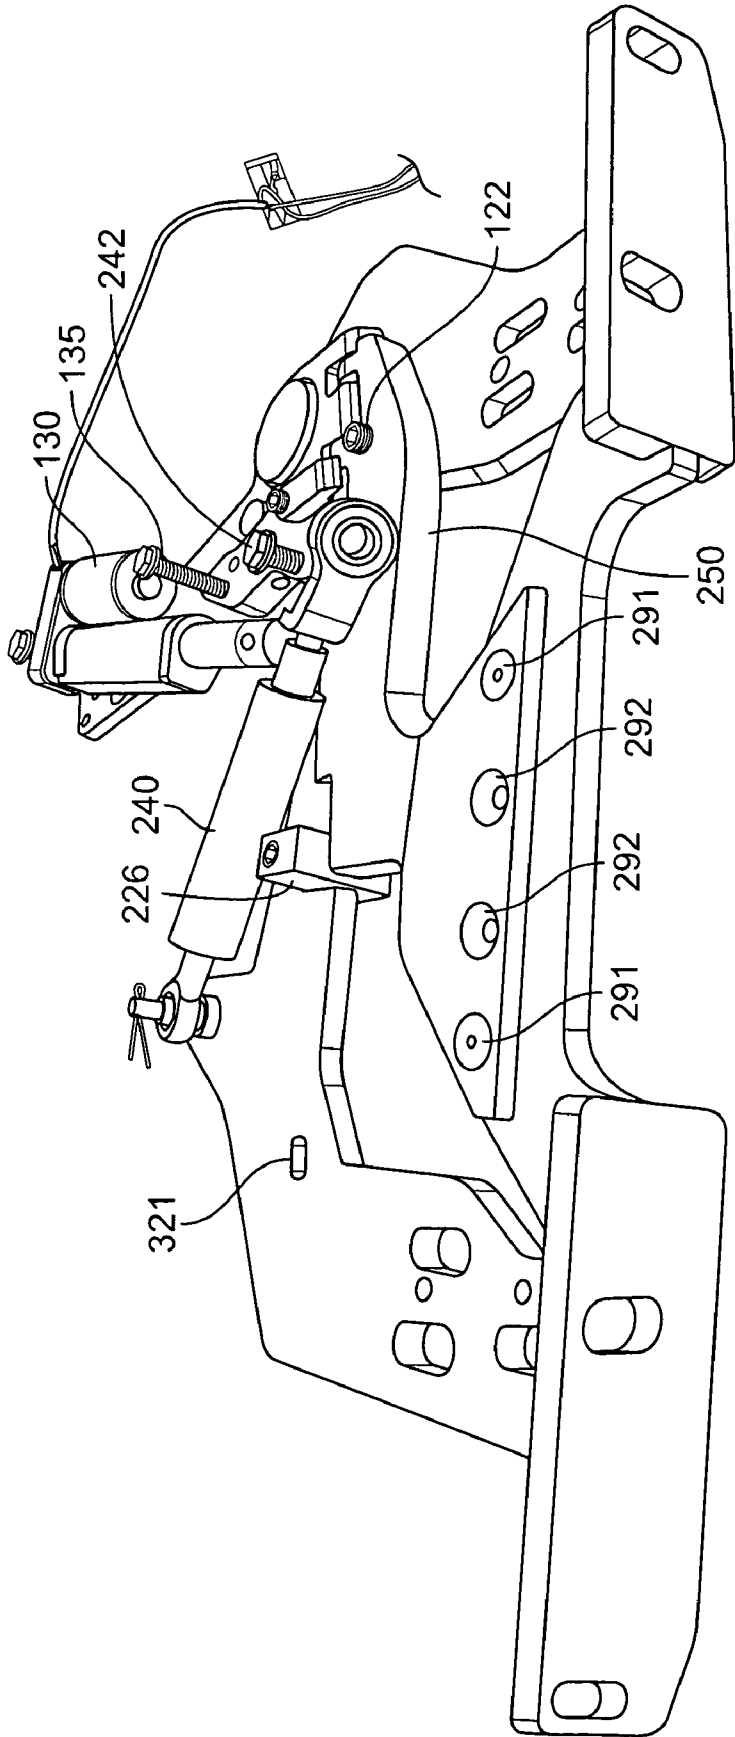


FIG. 15

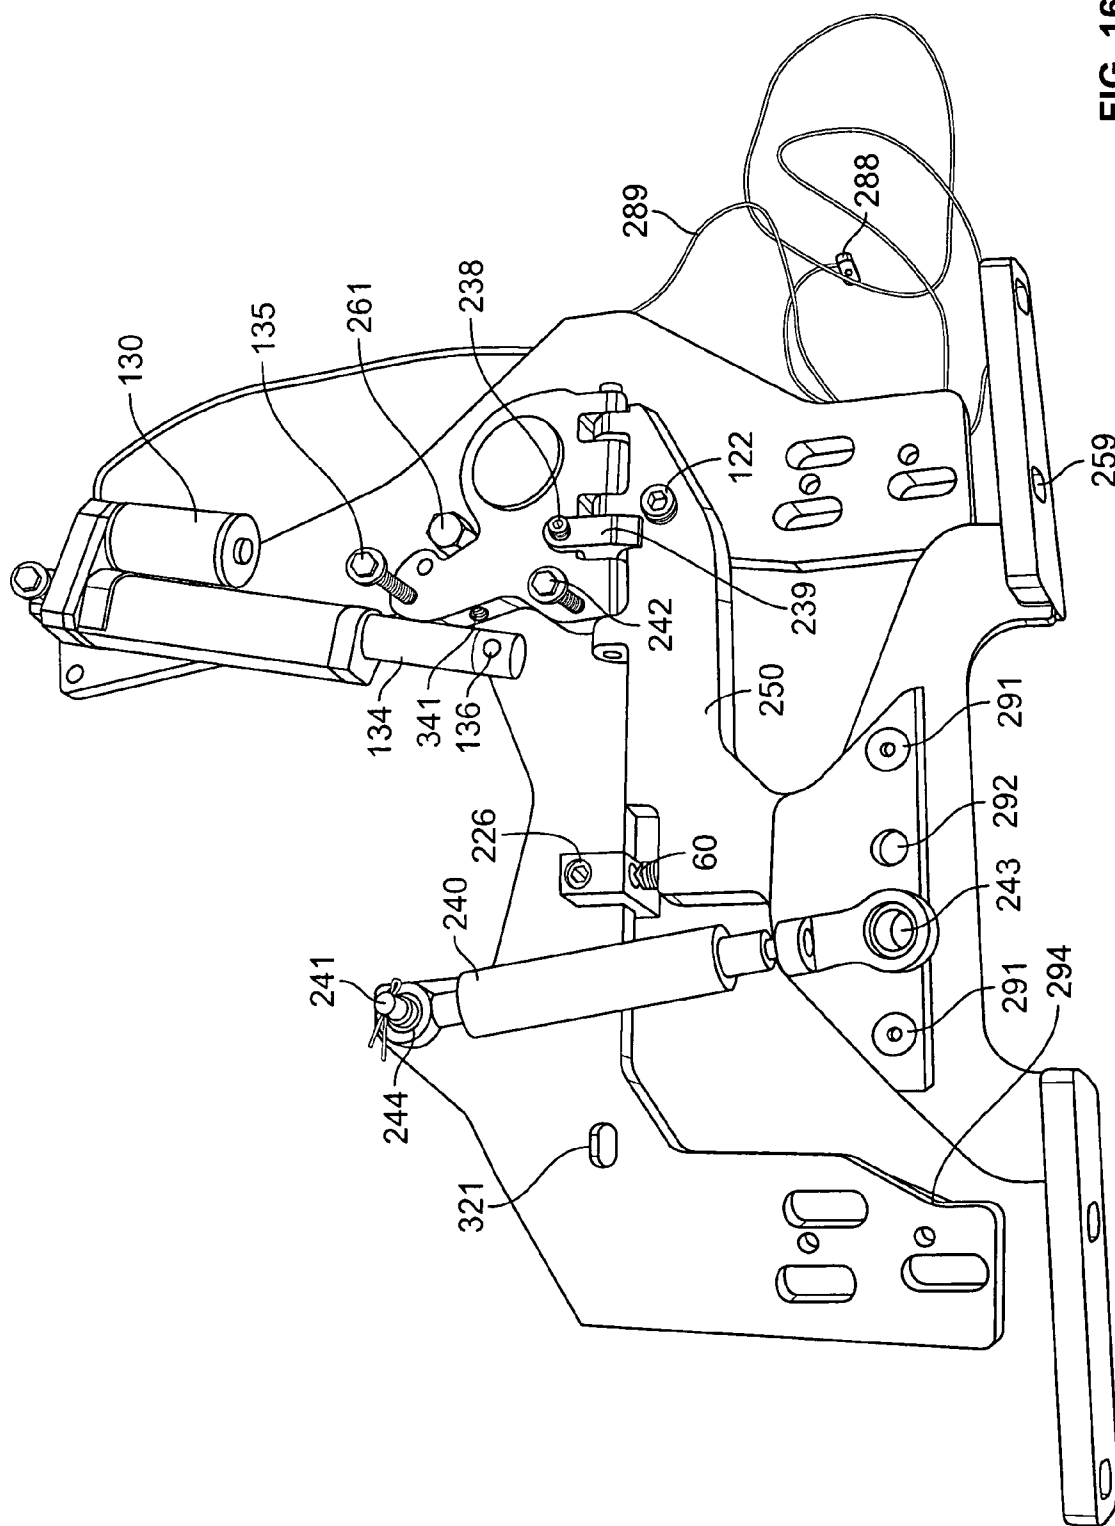


FIG. 16

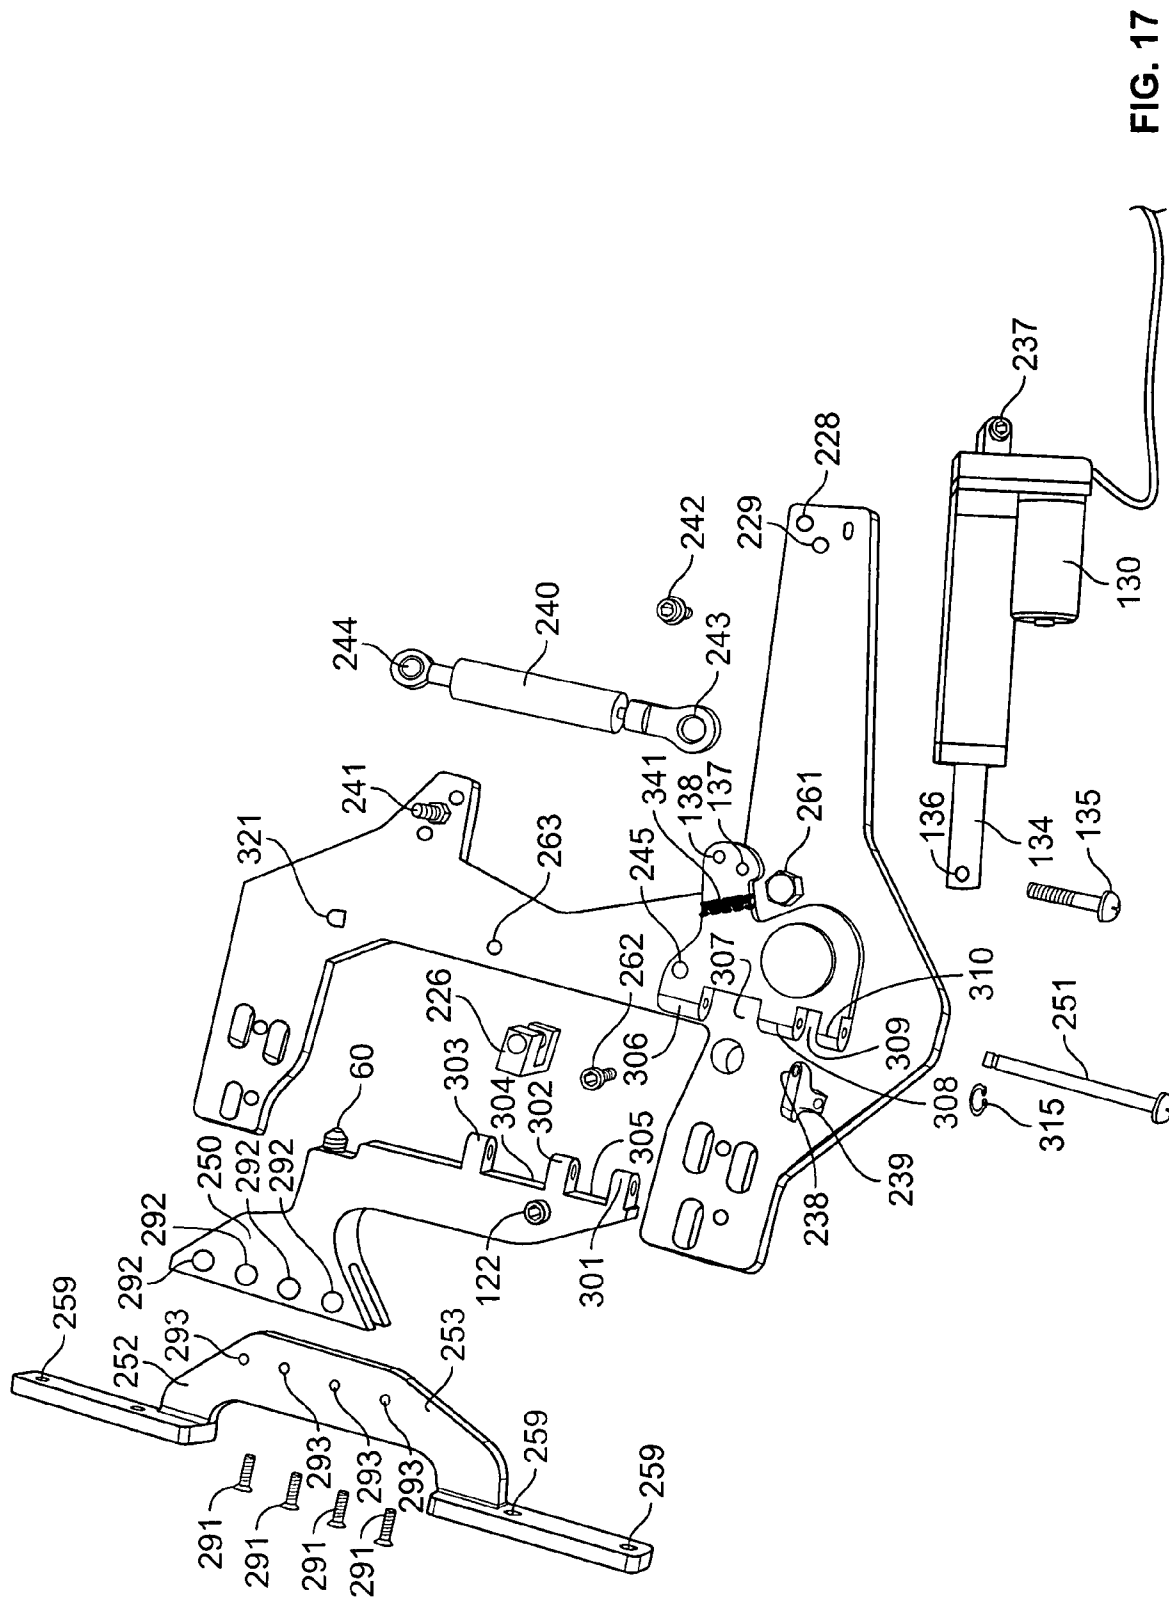


FIG. 17

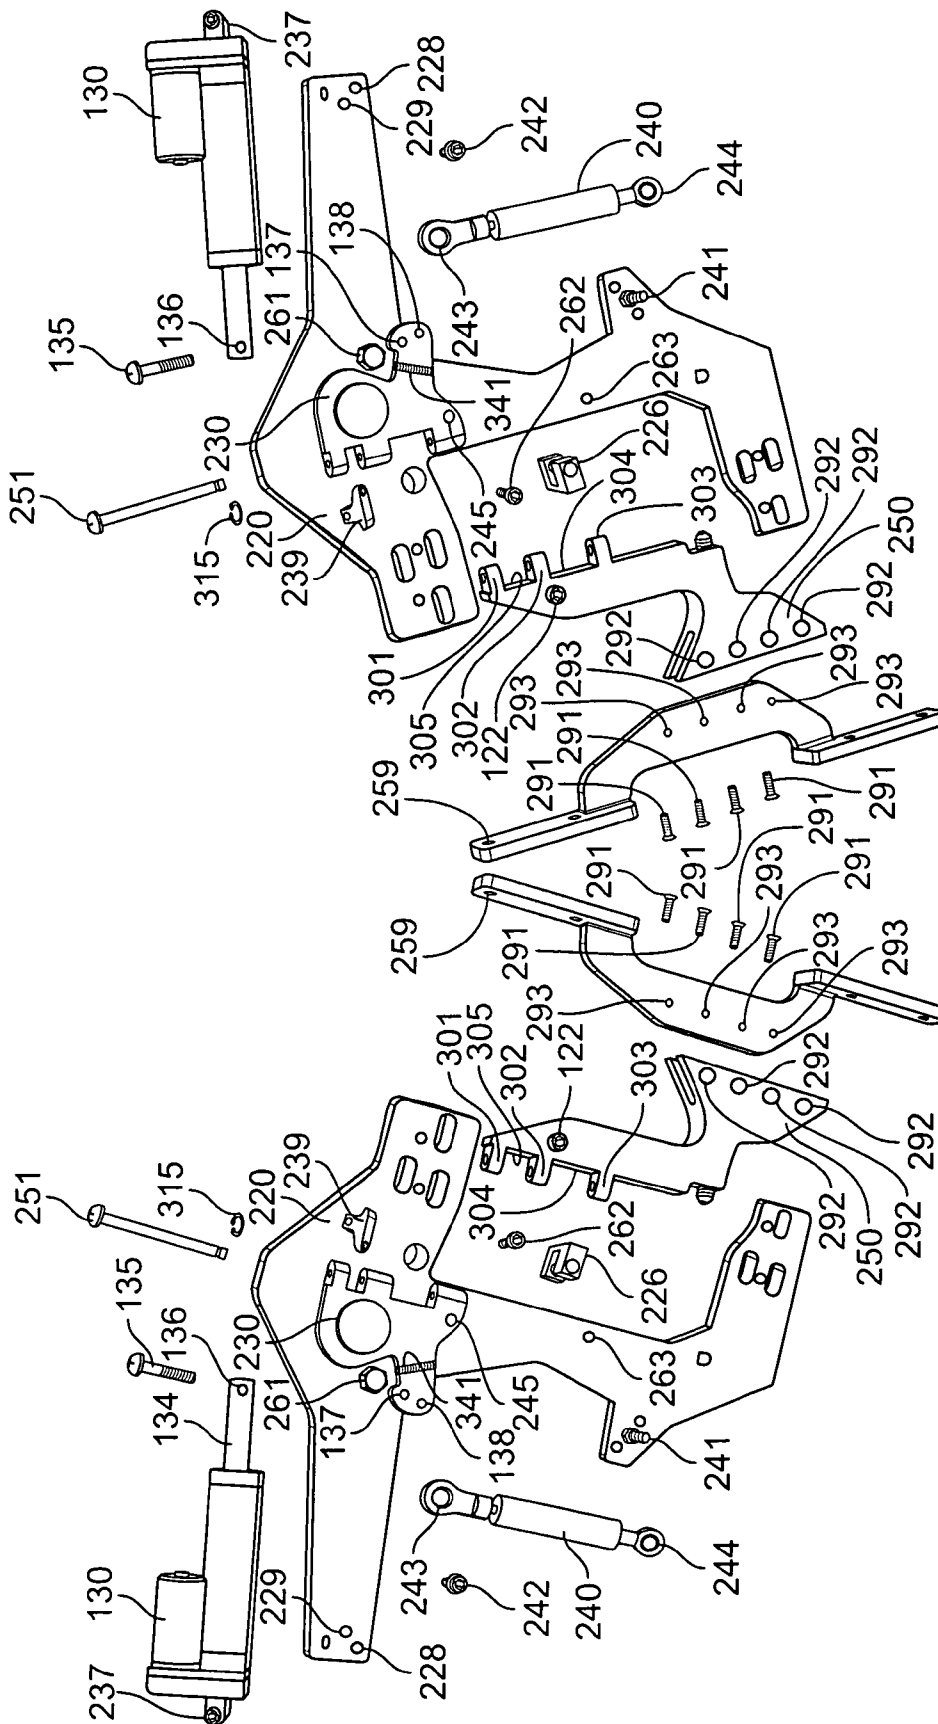


FIG.18

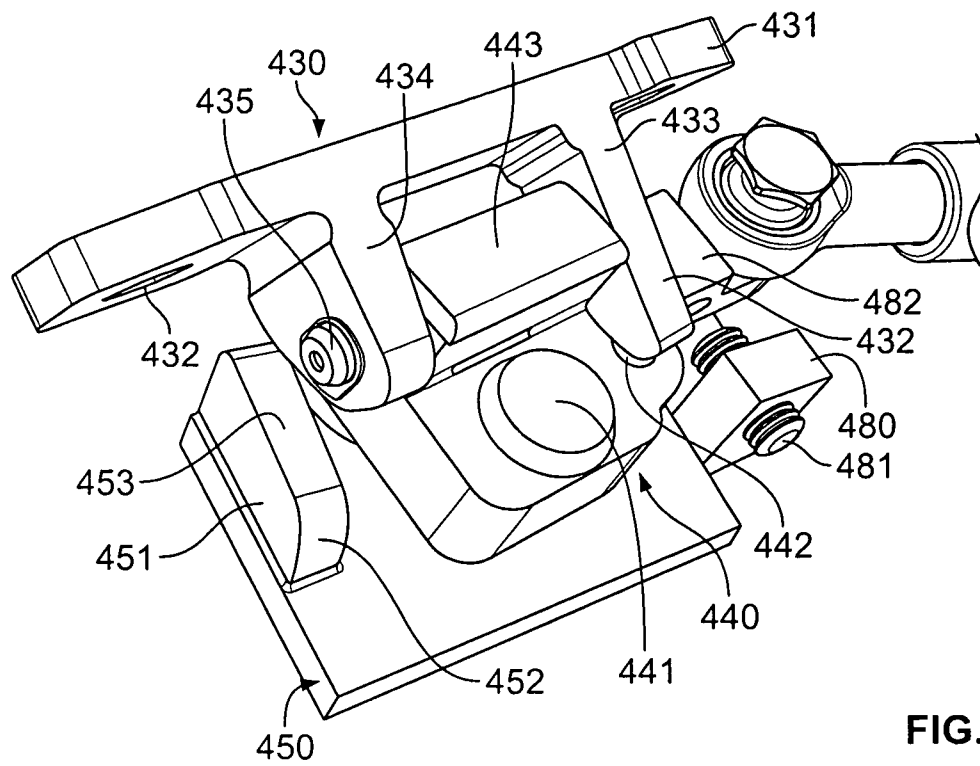


FIG. 19

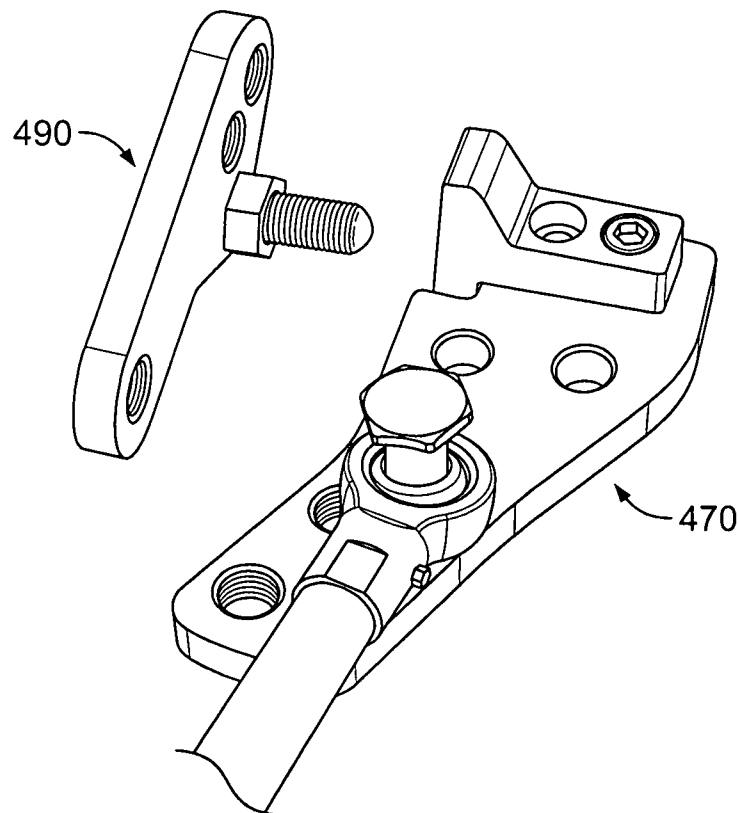


FIG. 20

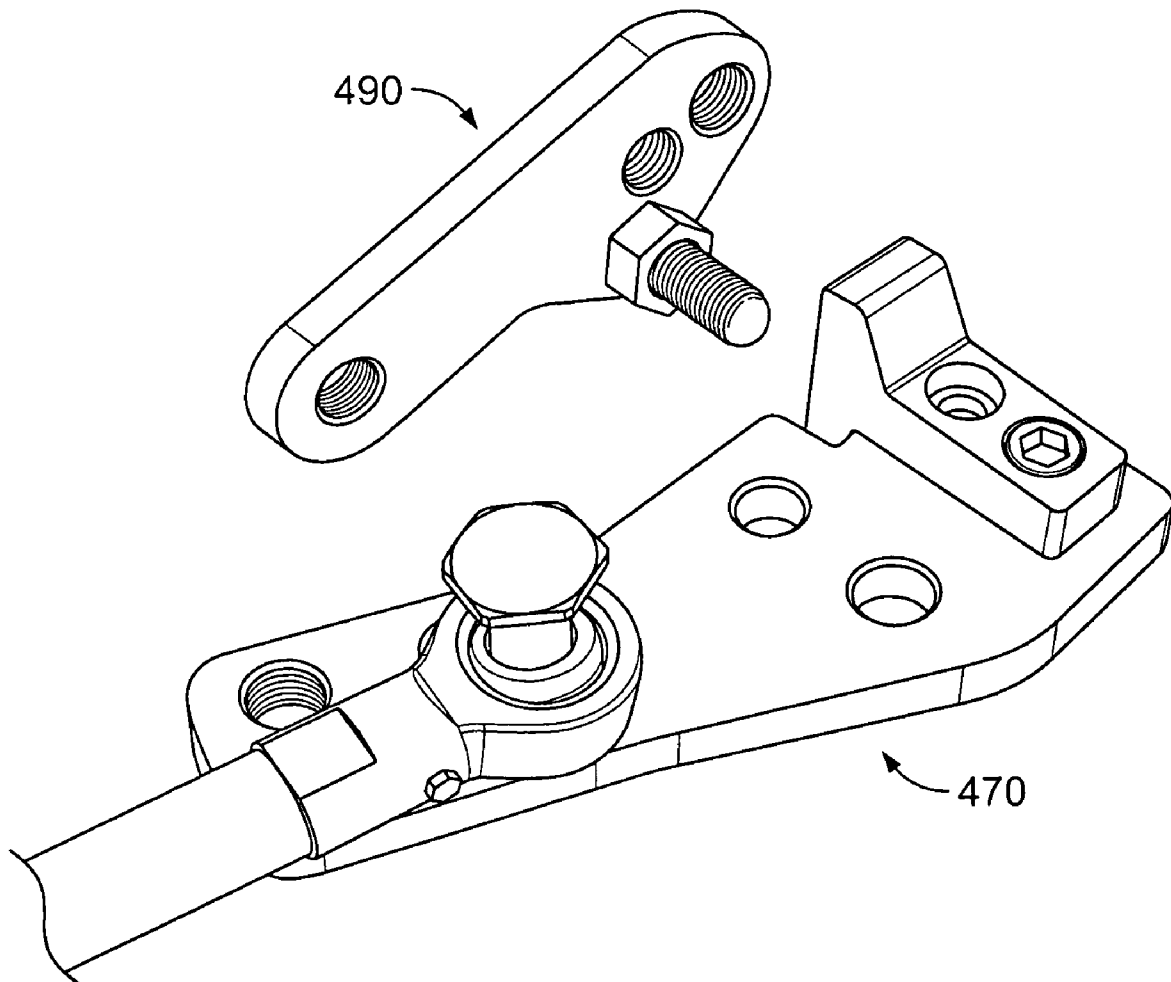


FIG. 21

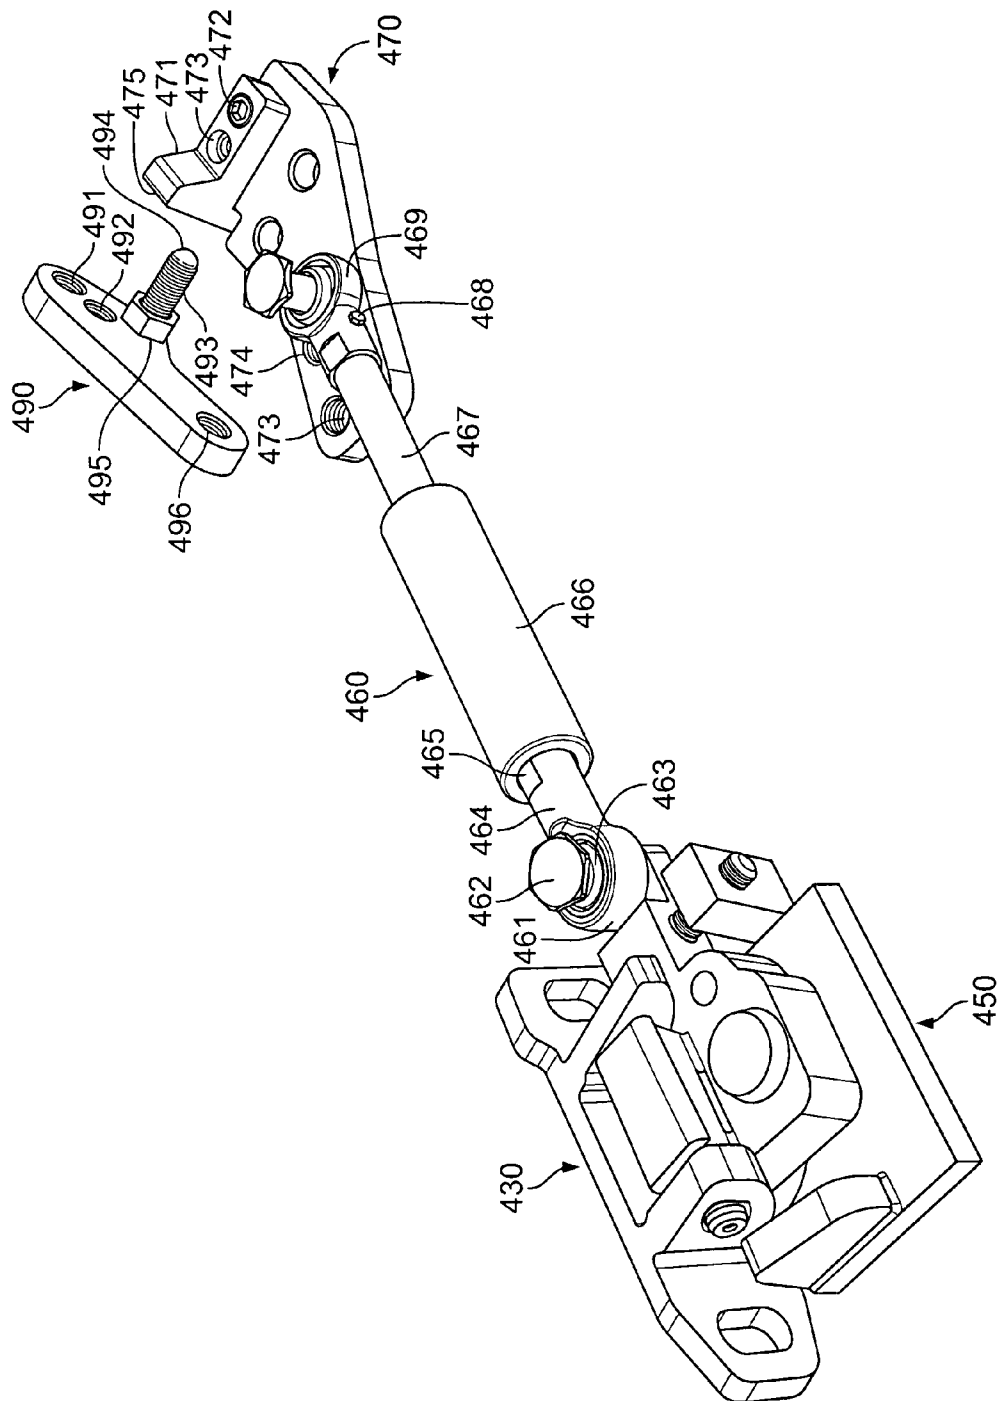


FIG. 22

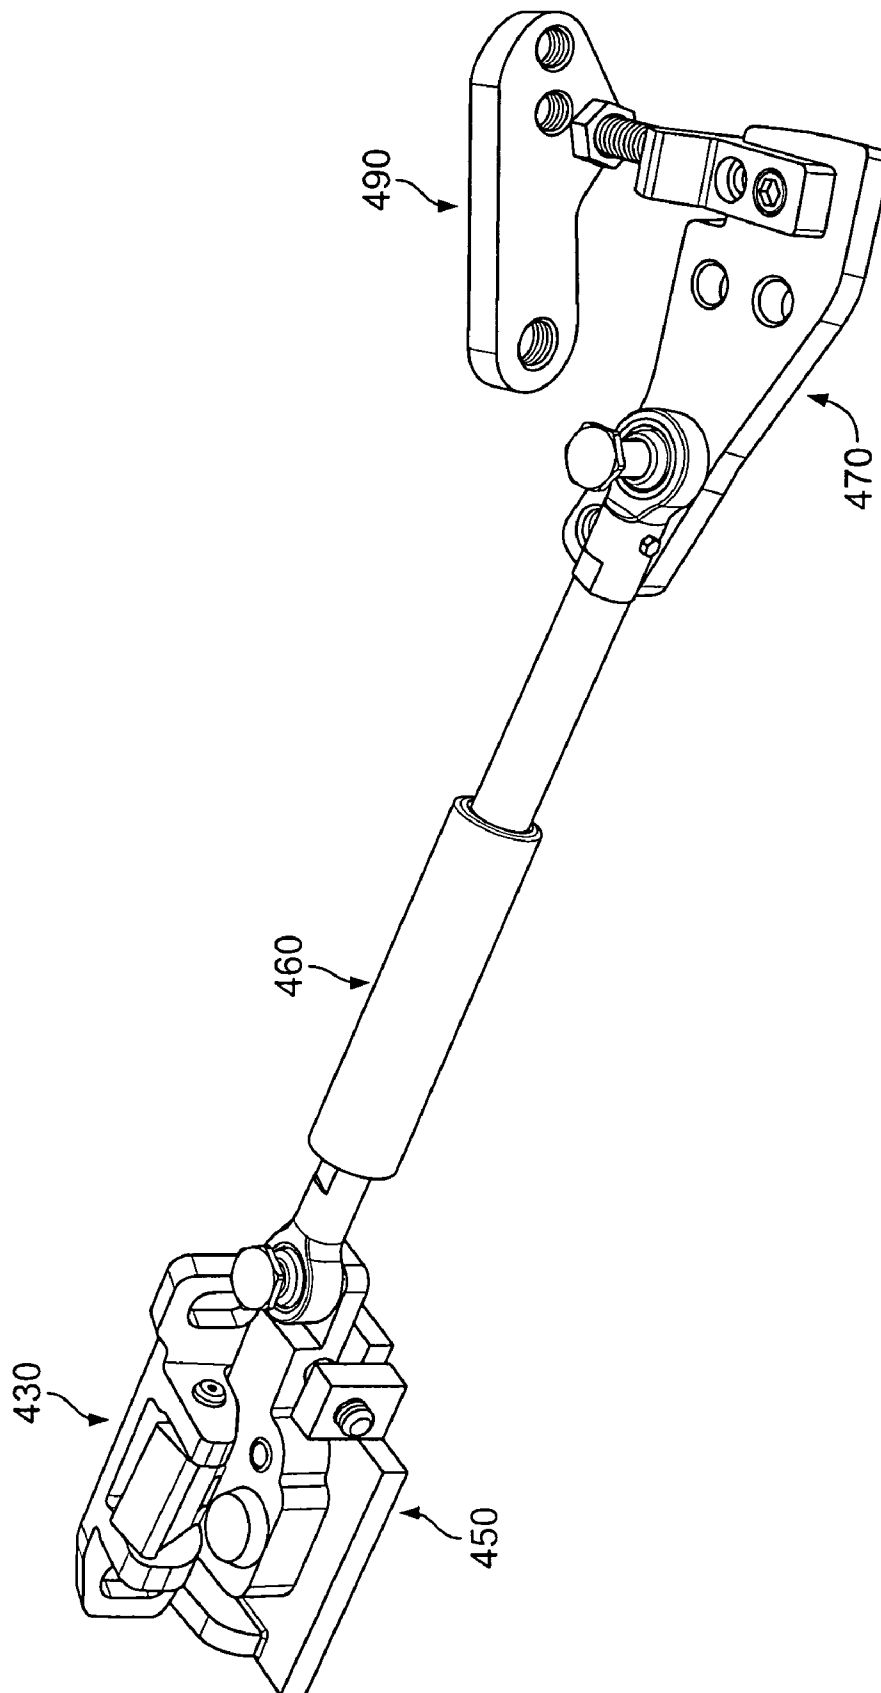


FIG. 23

1

DOUBLE MOTION DOOR HINGE FOR MOTOR VEHICLES

This application claims priority from and is a continuation in part of application Ser. No. 12/576,442 entitled Reversible Door Hinge filed Oct. 9, 2009 now U.S. Pat. No. 7,886,410 for same inventor Yip, the disclosure of which is incorporated herein by reference. This application also claims priority from and is a continuation in part of application Ser. No. 12/455,931 entitled front door hinge filed Jun. 9, 2009 now U.S. Pat. No. 8,024,838 by inventor Yip, which is a continuation in part of Ser. No. 12/386,862 for Door Hinge filed Apr. 24, 2009 now U.S. Pat. No. 7,963,001 by same inventor Yip.

FIELD OF THE INVENTION

The invention relates to double motion door hinges for vehicles.

DISCUSSION OF RELATED ART

A variety of vertically opening car door hinges have been made in the prior art. Unfortunately, the vertically opening car door hinge has a more complicated opening structure, and therefore it has been difficult in the past to provide a commercially responsive and lightweight structure for retrofitting with existing car doors of standard factory model vehicles. Vertically opening car door hinges have the advantage of less space used.

A wide variety of previous attempts have been made at car door hinges but have not resulted in easy everyday use functionality, and also weight requirements have limited the installation of the hinges. For example, Front Door Car Hinge by Yip, filed as U.S. patent application Ser. No. 11/014,022 filed Dec. 15, 2004 provides for a large base bracket connected to a second large door bracket, the disclosure of which is incorporated herein by reference. Other mechanisms, such as described by Baum in United States patent entitled Two Way Hinge For Motor Vehicle Doors U.S. Pat. No. 6,808,223 issued Oct. 26, 2004, the disclosure of which is incorporated herein by reference, suggests a similarly large and bulky construct. Both Yip Ser. No. 11/014,022 and Baum U.S. Pat. No. 6,808,223 require a large amount of space and have awkward joint construction, though they have their own design benefits as well.

Typically, automobile enthusiasts who enjoy customizing vehicles, also optimize vehicles for lower weight. Thus, it is an object of the invention to provide a space and weight optimized mechanical configuration to facilitate aftermarket retrofit door hinge automotive services. It is also an object of the invention to provide a powered or unpowered door hinge that can move both like a regular door and also vertically open as well.

SUMMARY OF THE INVENTION

The door hinge is comprised of a base member, upon which a primary swivel member is mounted. The primary swivel has a shock protrusion receiving a shock bracket, which has a first face parallel to the shock protrusion and a second face facing the shock. The shock has an outer cylinder and a piston in telescopic connection to the outer cylinder. The outer cylinder is connected to a banjo receiver. The banjo receiver is in threaded connection and intimate connection with a base member bolt. The base member bolt has an external threading which preferably threads with an inside surface of the banjo receiver.

2

A motorized assembly consisting of a motor, a motor gear, a drive gear and a gear formed on the primary swivel member provides a driving force for raising the door.

The door hinge base member has a pair of lower bolt slots and a middle bolt opening and a pair of upper bolt openings. The bolt openings and bolt slots are sized for standard automobile door hinge securing. The standard automobile door hinge can be replaced with the present embodiment door hinge.

A stopper bracket is formed on the base member and has a vertical face facing a stopper bolt. The stopper bracket is preferably formed as a U-shaped member with a flat face facing the stopper bolt.

The shock pushes the arm into an extended position corresponding to the opening of a car door. The arm is attached to the primary swivel member at a secondary swivel. The secondary swivel swivels outward to allow a car door mounted to the end of arm to open outwardly. The swivel axis is on the swivel axle passing through the swivel member and the base member. The secondary swivel passes first through the arm at a first connection finger, then the primary swivel member, before attaching began to the arm at a second connection finger.

The secondary swivel is limited in outward opening angle by a stopper finger which opposes a stopper on primary swivel. Preferably, the secondary swivel has an axle for rotation which passes through stopper finger as well as first connection finger and second connection finger.

A set screw may be threaded and secured into the stopper finger to provide an extension or retraction for adjustment of the maximum outward opening angle. Extension of set screw decreases the maximum outward opening angle and retraction of set screw increases the maximum outward opening angle. The maximum outward opening angle is sized according to a car door dimension. The set screw may have a means for adjusting, such as a Phillips or hexagonal drive surface.

The arm has a pair of branch members including a lower branch member and an upper branch member. The lower branch member is secured to a lower door plate and the upper branch member is secured to an upper door plate. The lower door plate and the upper door plate have bolt opening slots receiving bolts securing to a car door.

The upper branch member and the lower branch member are preferably made from a planar flat member which curves upward to meet a main portion of the arm which is connected to the primary swivel.

The stopper bolt has an adjusting nut for adjusting the length of the stopper bolt in protrusion from the arm. As an arm carries the car door upward after a user opens the car door, the stopper bolt has a ball point tip. The ball point tip is a rolling ball similar to a ballpoint pen construction where a steel ball is mounted on the tip of the stopper bolt. The steel ball ball point tip rolls on the flat surface of the stopper bracket. The shock both dampens and provides a spring bias for raising and lowering the car door.

The primary swivel member swivels in the same plane as the door hinge base member. The primary swivel member is made as a planar member and the door hinge base member is also made as a planar member. The door hinge base member can be secured to a vehicle on the pair of lower bolt slots and the pair of upper bolt openings into pre-existing bolt receiving openings on the vehicle. However, the middle bolt opening may have to be secured to the vehicle by a bolt after drilling a bolt opening on the vehicle.

The base member bolt can be received in a base member bolt opening. A plurality of base member bolt openings can be disposed on the base member by drilling multiple bolt open-

3

ings. Having multiple bolt openings allows adjustment for different types of vehicles so that the same door hinge can be used for multiple and varying types of vehicles.

A base stopper is formed as a bolt secured to the door hinge base member. The base stopper has a hexagonal securing means which also raises and lowers the base stopper. The base stopper is adjusted for limiting the angle of the arm relative to the base member after the arm has been raised over the base stopper. The base stopper as a protrusion from the base member is not as preferable as the ball bolt protruding from the arm and rolling on the base member and ramp profile of the base member.

Assembly of the device is slightly complicated by the force of the shock. One way of assembling the device is to first mount the base member to the vehicle chassis. After the base member is mounted to the vehicle chassis, the arm is mounted to the car door. The shock is kept disengaged. The shock can be in the first disengaged position or the second disengaged position. The shock can either be disengaged from base member bolt, or disengaged from shock bracket. The car door can be suspended by rope or a lift during the adjustment process. Once all of the parts are installed on the vehicle, the shock is installed. The door is then released and then the fit is tested. Most of the time, the fit will not be good, and adjustments will be made. The installer has a number of variables such as changing the mounting of the door hinge base member relative to the pair of lower bolt slots, or by fine-tuning an adjusting the stopper finger length via the set screw. The bolt opening slots on the arm can also be adjusted. Furthermore, the base member bolt can be inserted in a different base member bolt opening which is in a slightly different location, to allow for greater bearing on the shock, or less weight-bearing on the shock.

The geometry of the front door hinge provides that the shock remains pivoting in the same plane as the base member. The primary swivel member also pivots in the same plane as the base member and the shock protrusion and thus is on the same plane as the shock, the primary swivel member and the base member. The shock is mounted between the primary swivel member and the base member to allow simultaneous coplanar motion of the primary swivel member, the base member and the shock. The arm swivels outward away from the vehicle chassis and away from base member. The arm is also supported by the base stopper.

In the powered embodiment, the bolt which is the base stopper is omitted. Instead, on the arm, a ball bolt is mounted on the arm. On the exterior surface of the arm, a ball bolt top may protrude from a ball bolt. The ball bolt top can be used for adjusting the height of the ball bolt. The ball bolt has a ball roller which rolls up a ramp profile. The ramp profile may have a bottom opening. The bottom opening can be centered so that a closed position of the arm corresponds with the ball bolt being concentric with the center of the bottom opening. Optionally, the bottom opening can be omitted if the height of the ball bolt does not require that the ball bolt protrude through the bottom opening. The nut adjustment provides a means for adjusting the height of the ball bolt. In actual implementation, the arm is much closer to the base member.

In the powered embodiment, as the motor receives power from input wires, though motor turns a motor gear which rotates an intermediate gear which rotates a gear face formed on swivel member. As the swivel member swivels relative to the base member, the ball bolt in the bottom opening touches the ramp profile and the ball roller begins to roll on the ramp profile which pivots the arm relative to base member on secondary swivel. The arm and base member begin in parallel, until the arm has pivoting moment when the ball roller

4

begins to roll on ramp profile. The arm is automatically raised thereby. The ball roller can be of similar or larger diameter than the ball tip. Because the shock provides a raising force against the arm, and the car door attached to the arm, the shock provides the motor with the bulk of the raising force. The motor can thus be made smaller as it does not need to provide all of the raising force for raising the arm and the car door attached to the arm.

The power on input wires is preferably an automotive voltage standard. The power on the input wires is preferably regulated by a remote control. A remote control unit sending a wireless signal can activate a receiver connected to the input wires. The receiver can therefore pop the door lock with a door popper and simultaneously raise the car door vertically with the assistance of the shock. Several miniaturized receivers are commercially available for ready installation. In this manner, a user walking out to a car can press a button on a remote control that is located on the user's keychain, and the car door will automatically unlock and raise itself. Once in the cabin, the user can press a button which is also wired and connected to the receiver so that the door will automatically lower, close and lock.

In the highest position, the ball roller is preferably rolling on the surface of the base member. As the ball roller rolls back down, it rolls over the flat surface of the base member, then down the ramp profile and into the bottom opening, where the ball roller is hanging free and not touching the ramp profile.

The ball bolt top can be omitted if the bolt is threaded directly into base member without protruding through the face of base member. In this embodiment, the ball bolt cannot be seen from the outside.

Fourth Embodiment of the Present Invention

A double motion door hinge for a vehicle door includes an upper door connection plate having a second motion assembly pivotally mounted to the upper door connection plate. The axis of rotation of the second motion assembly is perpendicular to the upper door connection plate. A first motion assembly is mounted to the second motion assembly at a first motion hinge. The first motion assembly is adapted to connect to an upper portion of a vehicle door. The lower door connection plate includes a lower door connection plate stopper and a lower shock connection. The lower door connection plate stopper has a lower door double motion stopper surface.

A double motion mounting plate is adapted for mounting to a vehicle door. The double motion mounting plate has a ballpoint shaft and a ballpoint mounted on the ballpoint shaft. The ballpoint is adapted to abut the lower door double motion stopper surface when the vehicle door is in a closed position. The ballpoint is adapted to separate from the lower door double motion stopper surface when the vehicle door is in an open position. Preferably, ballpoint rotates on the lower door double motion stopper surface when the vehicle door moves in a first motion. The ballpoint separates from the lower door double motion stopper surface when the vehicle door opens in a second direction. A shock assembly is pivotally connected at the lower shock connection of the lower door connection plate and pivotally connected to the second motion assembly. The door can open in solely in a first motion or in a first motion and in a second motion. The shock assembly is pivotally connected and ball connected at the lower shock connection of the lower door connection plate and the shock assembly is also pivotally connected and ball connected to the second motion assembly. Ball connection includes pivotal connection which is a subset of ball connection. The shock assembly further comprises a second motion lower shaft in

5

telescopic mechanical relationship with a second motion shock body. The shock assembly further includes a second motion upper shaft in telescopic mechanical relationship with a second motion shock body. A door motion guide is mounted to an upper portion of the upper door connection plate, and the door motion guide abuts a portion of a first motion first prong. The first motion first prong is mounted on a first motion bracket of the first motion assembly. The first motion first prong extends from the first motion bracket, and the door motion guide is sized to limit a second motion opening when the first motion angle is small in an initial range. A ramp is formed on the door motion guide, and further includes a blunt tip formed on the door motion guide. A surface of the first motion first prong is limited by contacting against the ramp and a blunt tip when the door is being opened in a second motion while the first motion angle is small in an initial range. The ballpoint tip is preferably ball shaped.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an inside view of the present invention from the perspective from the inside of an automobile.

FIG. 2 is a rear view of the present invention.

FIG. 3 is an outside view of the present invention in closed position, showing the shock in a first disengaged position.

FIG. 4 is an outside view of the present invention in closed position, showing the shock in a second disengaged position.

FIG. 5 is an outside view of the present invention in open and extended position, showing the shock in an engaged position.

FIG. 6 is an outside view of the present invention in open and slightly retracted position, showing the shock in an almost engaged position right before final installation as shown in FIG. 5.

FIG. 7 is an inside view of the powered embodiment.

FIG. 8 is a rear view of the powered embodiment.

FIG. 9 is an outside view of the powered embodiment in closed position showing the shock in a first disengaged position.

FIG. 10 is an outside view of the powered embodiment in closed position showing the shock in a second disengaged position.

FIG. 11 is an outside view of the powered embodiment in open and extended position, showing the shock in an engaged position.

FIG. 12 is an outside view of the powered embodiment in an open and slightly retracted position, showing the shock in an almost engaged position right before final installation.

FIG. 13 is a vertically exaggerated cross-section diagram showing the ball roller rolling up the ramp.

FIG. 14 is a side perspective view of the hinge showing assembly of the hinge.

FIG. 15 is a perspective view of the hinge in closed position showing assembly of the hinge.

FIG. 16 is a perspective view of the hinge in closed position showing assembly of the hinge.

FIG. 17 is a perspective exploded view of the hinge showing assembly of the hinge.

FIG. 18 is an exploded view of the hinge assembly showing both hinges, namely the left hinge and the right hinge.

FIG. 19 is a perspective view on an upper portion of the fourth embodiment.

FIG. 20 is a perspective view on an upper portion of the fourth embodiment.

FIG. 21 is a perspective view on a lower portion of the fourth embodiment.

FIG. 22 is a perspective view of the fourth embodiment.

6

FIG. 23 is a perspective view of the fourth embodiment.

The following call out list of elements is used consistently to refer to the elements of the drawings as follows:

- 20 Base Member
- 21 Bolt
- 23 Lower Bolt Slots
- 24 Middle Bolt Opening
- 25 Upper Bolt Openings
- 26 Stopper Bracket
- 30 Swivel Member
- 31 Swivel Axle
- 32 Shock Protrusion
- 33 Opening
- 34 Shock Bracket
- 38 Screw
- 39 Stopper
- 40 Shock
- 41 Outer Cylinder
- 42 Piston
- 43 Banjo Receiver
- 50 Arm
- 51 Secondary Swivel
- 52 First Branch Member
- 53 Second Branch Member
- 54 Door Plate
- 55 Connection Finger
- 56 Connection Finger
- 57 Stopper Finger
- 58 Door Plate
- 59 Bolt Opening Slots
- 60 Stopper Bolt
- 61 Base Stopper
- 62 Adjusting Nut
- 65 Ball Tip
- 88 Shock Bracket Bolt
- 121 Nut Adjustment
- 130 Motor
- 131 Input Wires
- 132 Intermediate Gear
- 133 Gear Face
- 188 Ball Bolt
- 182 Bottom Opening
- 190 Ramp Profile
- 888 Ball Roller
- 122 Ball Bolt Top
- 134 Piston Extension
- 135 Piston Extension Bolt
- 136 Piston Extension Aperture
- 137 Swivel Member First Motor Mounting
- 138 Swivel Member Second Motor Mounting
- 220 Reversible Base Member
- 226 Stopper Bolt Stopper
- 228 Outside Motor Mounting Opening
- 229 Inside Motor Mounting Opening
- 230 Reversible Swivel Member
- 237 Motor Mounting Aperture
- 238 Toggle Adjustment Screw
- 239 Toggle Stopper
- 240 Shock Piston
- 241 Reversible Shock Piston Lower Mount
- 242 Reversible Shock Piston Upper Mount
- 243 Shock Piston Extension Aperture
- 244 Shock Piston Mounting Aperture
- 245 Reversible Swivel Member Piston Mount Aperture
- 250 Reversible Arm
- 251 Reversible Swivel Member Swivel Bolt
- 252 Branch Member

259 Reversible Bolt Opening Slots
 261 Reversible Base Stopper
 262 Stopper Bolt Stopper Mounting Bolt
 263 Stopper Bolt Stopper Mounting Opening
 288 Wire Harness Switch
 289 Wire Harness
 291 Reversible Arm Securing Screw
 292 Reversible Arm Securing Screw Aperture
 293 Reversible Branch Member Securing Aperture
 294 Lower Reversible Riser
 295 Upper Reversible Riser
 296 Lower Reversible Riser Openings
 297 Upper Reversible Riser Openings
 301 First Reversible Arm Finger
 302 Second Reversible Arm Finger
 303 Third Reversible Arm Finger
 304 Second Reversible Arm Gap
 305 First Reversible Arm Gap
 306 First Swivel Member Finger
 307 First Swivel Member Gap
 308 Second Swivel Member Finger
 309 Second Swivel Member Gap
 310 Third Swivel Member Finger
 315 Adjustable Clip
 321 Intermediate Bolting Slot
 341 Base Stopper Adjustment Aperture
 430 First Motion Assembly
 431 First Motion Bracket
 432 First Motion Second Prong Stopper Extension
 433 First Motion Second Prong
 434 First Motion First Prong
 435 First Motion Hinge
 440 Second Motion Assembly
 441 Second Motion Hinge
 442 First Motion Riser Screw
 443 First Motion Hinge Mount
 450 Upper Door Connection Plate
 451 Door Motion Guide
 452 Door Motion Guide Tip
 453 Door Motion Guide Ramp
 460 Second Motion Shock Assembly
 461 Upper Second Motion Ball Retainer
 462 Upper Second Motion Ball Retainer Bolt
 463 Upper Second Motion Ball
 464 Upper Second Motion Shaft
 465 Upper Second Motion Shaft Flat Portion
 466 Second Motion Shock Body
 467 Second Motion Lower Shaft
 468 Second Motion Lower Shaft Retainer
 469 Second Motion Lower Ball Retainer
 470 Lower Door Connection Plate
 471 Lower Door Connection Plate Stopper
 472 Lower Door Connection First Bolt
 473 Lower Door Connection Second Bolt
 474 Lower Door Connection Third Bolt
 475 Lower Door Double Motion Stopper Surface
 480 Second Motion Riser Screw Retainer
 481 Second Motion Riser Screw
 482 Second Motion Abutment
 490 Double Motion Mounting Plate
 491 First Aperture of Double Motion Mounting Plate
 492 Second Aperture of Double Motion Mounting Plate
 493 Ballpoint Shaft
 494 Ball Point

495 Ballpoint Adjustment Nut
 496 Third Aperture of Double Motion Mounting Plate

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The door hinge is comprised of a base member **20**, upon which a primary swivel member **30** is mounted. The primary swivel has a shock protrusion **32** receiving a shock bracket **34** which has a first face parallel to the shock protrusion and a second face facing the shock. The shock bracket **34** is in swivel connection to the primary swivel member **30** the shock bracket **34** has a shock bracket bolt **88** bolted through the primary swivel member **30** and the shock bracket **34** in a thickness direction. The shock bracket bolt **88** preferably has a lower portion that is threaded into an aperture of the primary swivel member **30**. The shock bracket bolt **88** has a hexagonal head for allowing assembly and adjustment while the shock bracket bolt **88** is mounted under the fender of the vehicle. Thus, the shock bracket has a shock bracket axis of rotation parallel to the primary swivel axis.

The shock **40** has an outer cylinder **41** and a piston **42** in telescopic connection to the outer cylinder **41**. The outer cylinder **41** is connected to a banjo receiver **43**. The banjo receiver **43** is in threaded connection and intimate connection with a base member bolt **21**. The base member bolt **21** has an external threading which preferably threads with an inside surface of the banjo receiver **43**.

The door hinge base member **20** has a pair of lower bolt slots **23** and a middle bolt opening **24** and a pair of upper bolt openings **25**. The bolt openings and bolt slots are sized for standard automobile door hinge securing. The standard automobile door hinge can be replaced with the present embodiment door hinge.

In the unpowered embodiment as seen in FIGS. 1-6, a stopper bracket **26** is formed on the base member **20** and has a vertical face facing a stopper bolt **60** disposed on the arm. The stopper bracket **26** is preferably formed as a U-shaped member with a flat face facing the stopper bolt **60** and providing a good rolling surface for a ball tip **65**. The ball tip **65** is mounted to the tip of the stopper bolt and the ball tip can roll in any direction like a ballpoint pen relative to the stopper bolt **60**. Preferably, the ball tip **65** is oiled for smooth rolling.

The shock **40** pushes the arm **50** into an extended position corresponding to the opening of a car door. The arm **50** is attached to the primary swivel member **30** at a secondary swivel **51**. The secondary swivel swivels outward to allow a car door mounted to the end of arm **50** to open outwardly. The swivel axis is on the swivel axle **31** passing through the swivel member **30** and the base member **20**. The secondary swivel **51** passes first through the arm **50** at a first connection finger **55**, then the primary swivel member **30**, before attaching began to the arm **50** at a second connection finger **56**. The secondary swivel axis is normal to the primary swivel axis.

The secondary swivel **51** is limited in outward opening angle by a stopper finger **57** which opposes a stopper **39** on primary swivel **30**. The stopper finger is formed as a protrusion on the arm **50**. The stopper **39** may have an opening **33** on a side opposite to the stopper finger **57**. The opening optionally allows access to an adjusting member such as a screw. The adjusting member may have an engagement face such as a hexagonal drive for adjusting. The opening on a side opposite to the stopper finger **57** may provide access to the hexagonal drive. Preferably, the secondary swivel **51** has an axle for rotation which passes through stopper finger **57** as well as first connection finger **55** and second connection finger **56**.

A set screw **38** may be threaded and secured into the stopper finger **57** to provide an extension or retraction for adjustment of the maximum outward opening angle. Extension of set screw **38** decreases the maximum outward opening angle and retraction of set screw **38** increases the maximum outward opening angle. The maximum outward opening angle is sized according to a car door dimension. The set screw may have a means for adjusting, such as a Phillips or hexagonal drive surface.

The arm **50** has a pair of branch members including a lower branch member **52** and an upper branch member **53**. The lower branch member is secured to a lower door plate **54** and the upper branch member is secured to an upper door plate **58**. The lower door plate **54** and the upper door plate **58** have bolt opening slots **59** receiving bolts securing to a car door. The upper branch member and the lower branch member are preferably made from a planar flat member which curves upward to meet a main portion of the arm **50** which is connected to the primary swivel **30**.

The stopper bolt **60** has an adjusting nut **62** for adjusting the length of the stopper bolt **60** in protrusion from the arm **50**. As an arm **50** carries the car door upward after a user opens the car door, the stopper bolt **60** has a ball point tip **65**. The ball point tip is a rolling ball similar to a ballpoint pen construction where a steel ball is mounted on the tip of the stopper bolt **60**. The steel ball point tip **65** rolls on the flat surface of the stopper bracket **26**. The shock both dampens and provides a spring bias for raising and lowering the car door.

The primary swivel member swivels in the same plane as the door hinge base member **20**. The primary swivel member is made as a planar member and the door hinge base member **20** is also made as a planar member. The door hinge base member **20** can be secured to a vehicle on the pair of lower bolt slots **23** and the pair of upper bolt openings **25** into pre-existing bolt receiving openings on the vehicle. However, the middle bolt opening **24** may have to be secured to the vehicle by a bolt after drilling a bolt opening on the vehicle.

The base member bolt **21** can be received in a base member bolt opening. A plurality of base member bolt openings can be disposed on the base member **20** by drilling multiple bolt openings **21**, **22**. Having multiple bolt openings allows adjustment for different types of vehicles so that the same door hinge can be used for multiple and varying types of vehicles. The multiple bolt openings can optionally be plugged when not in use.

A base stopper **61** is formed as a bolt secured to the door hinge base member **20**. The base stopper **61** has a hexagonal securing means which also raises and lowers the base stopper **61**. The base stopper **61** is adjusted for limiting the angle of the arm **50** relative to the base member **20** after the arm **50** has been raised over the base stopper **61**. The base stopper biases the arm away from the base position when the arm is an extended position.

Assembly of the device is slightly complicated by the force of the shock **40**. One way of assembling the device is to first mount the base member **20** to the vehicle chassis. After the base member **20** is mounted to the vehicle chassis, the arm **50** is mounted to the car door. The shock is kept disengaged as seen in FIG. 2, 3, 4 or 6. The shock can be in the first disengaged position or the second disengaged position. The shock can either be disengaged from base member bolt **21**, or disengaged from shock bracket **34**. The car door can be suspended by rope or a lift during the adjustment process. Once all of the parts are installed on the vehicle, the shock is installed as seen in FIG. 5. The door is then released and then the fit is tested. Most of the time, the fit will not be good, and adjustments will be made. The installer has a number of

variables such as changing the mounting of the door hinge base member relative to the pair of lower bolt slots **23**, or by fine-tuning an adjusting the stopper finger length via the set screw. The bolt opening slots **59** on the arm **50** can also be adjusted. Furthermore, the base member bolt **21** can be inserted in a different base member bolt opening which is in a slightly different location, to allow for greater bearing on the shock, or less weight-bearing on the shock. The different base member bolt opening is called the secondary base member bolt opening **22**. The secondary base member bolt opening is preferably adjacent to the primary base member bolt opening.

The air shock is preferably loaded up to about 50% of its travel distance capacity, and no more than 75% of the travel distance capacity. The half loading of the shock is accomplished by sizing the shock so that it is 50% loaded when the door is closed. A shock is loaded half way when the piston travels half of its distance in telescopic contraction into the shock body. When the vehicle door is closed, the apparatus arm is in retracted position as opposed to an extended position when the door is open. The air shock pushes outwardly in telescopic orientation. The shock has an area of trapped air and a base for storing the trapped air. The air shock can be selected from a variety of commonly available shocks. By opening the door, and holding it open with a lifting device, the shock can be replaced if necessary, such as if it fails. Typically, the shock will be loaded between 40% and 75% depending on the door structure and the motion desired by the user.

The geometry of the front door hinge provides that the shock remains pivoting in the same plane as the base member **20**. The primary swivel member also pivots in the same plane as the base member **20** and the shock protrusion **32** and thus is on the same plane as the shock, the primary swivel member and the base member **20**. The shock is mounted between the primary swivel member and the base member to allow simultaneous coplanar motion of the primary swivel member, the base member and the shock. The arm **50** swivels outward away from the vehicle chassis and away from base member **20**. The arm **50** is also supported by the base stopper **61**.

Fabrication of the parts is preferably from steel plate of sufficient thickness to support the car door. Preferably, $\frac{3}{8}$ " plate is used. The parts can be welded together, such as the stopper bracket **26** which is preferably welded to the base member **20**. The swivel joints can be substituted with a joint having the same or greater degree of freedom.

In the powered embodiment as seen in FIGS. 7-13, the bolt which is the base stopper **61** is omitted. Instead, on the arm **50**, a ball bolt **188** is mounted on the arm. On the exterior surface of the arm **50**, a ball bolt top **122** may protrude from a ball bolt **188**. The ball bolt top **122** can be used for adjusting the height of the ball bolt **188**. The ball bolt **188** has a ball roller **888** which rolls up a ramp profile **190**. The ramp profile **190** may have a bottom opening **182**. The bottom opening **182** can be centered so that a closed position of the arm **50** corresponds with the ball bolt **188** being concentric with the center of the bottom opening **182**. Optionally, the bottom opening can be omitted if the height of the ball bolt **188** does not require that the ball bolt protrude through the bottom opening. As seen in FIG. 13 the dimensions of which are exaggerated for purposes of clarity, the nut adjustment **121** provides a means for adjusting the height of the ball bolt **188**. In actual implementation, the arm **50** is much closer to the base member **20**.

In the powered embodiment, as the motor **130** receives power from input wires **131**, though motor turns a motor gear which rotates an intermediate gear **132** which rotates a gear face **133** machine formed on swivel member **30**. The gear face **133** can be formed in a corner of the swivel member **30**.

11

Preferably, the height of the gear face **133** is equivalent to the height of the intermediate gear **132** which is consequently equivalent to the height of the motor gear. The motor gear is the gear that shares an axis with the motor, from which the motor outputs torque. The intermediate gear is mounted between the motor gear and the gear face **133**.

As the swivel member **30** swivels relative to the base member **20**, the ball bolt **188** in the bottom opening **182** touches the ramp profile **190** and the ball roller **888** begins to roll on the ramp profile **190** which pivots the arm **50** relative to base member **20** on secondary swivel **51**. The arm **50** and base member **20** begin in parallel, until the arm **50** has pivoting moment when the ball roller **888** begins to roll on ramp profile **190**. The arm is automatically raised thereby. The ball roller **888** can be of similar or larger diameter than the ball tip **65**. Because the shock **40** provides a raising force against the arm **50**, and the car door attached to the arm **50**, the shock **40** provides the motor **130** with the bulk of the raising force. The motor **130** can thus be made smaller as it does not need to provide all of the raising force for raising the arm **50** and the car door attached to the arm **50**.

The power on input wires **131** is preferably a 12V automotive voltage standard. The power on the input wires is preferably regulated by a remote control. A remote control unit sending a wireless signal can activate a receiver connected to the input wires. The receiver can therefore pop the door lock with a door popper and simultaneously raise the car door vertically with the assistance of the shock **40**. Several miniaturized 12V receivers are commercially available for ready installation. In this manner, a user walking out to a car can press a button on a remote control that is located on the user's keychain, and the car door will automatically unlock and raise itself. Once in the cabin, the user can press a button which is also wired and connected to the receiver so that the door will automatically lower, close and lock.

The motor can be a stepping motor which is not movable or locked when powered off, or the motor can be movable when powered off. It is preferred that the motor can be movable when powered off so that a user can open the car door manually should the user desire to do so.

In the highest position, the ball roller **888** is preferably rolling on the surface of the base member **20**. As the ball roller **888** rolls back down, it rolls over the flat surface of the base member **20**, then down the ramp profile **190** and into the bottom opening **182**, where the ball roller **888** is hanging free and not touching the ramp profile **190**. The ball roller **888** is similar to the ball tip **65** because both are mounted to the tip of a bolt and the ball can roll in any direction like a ballpoint pen relative to the stopper bolt **60**, or relative to the ball bolt **188**. Preferably, both the ball roller **888** and the ball tip **65** are both oiled for smooth rolling.

The ball bolt top **122** can be omitted if the bolt is threaded directly into base member **20** without protruding through the face of base member **20**. In this embodiment, the ball bolt **188** cannot be seen from the outside. The ball roller **888** is mounted for free rotation within the tip of the ball bolt **188**. Exterior surface of the ball bolt **188** is threaded and can be threaded into a threaded aperture on the underside of arm **50**.

In a third embodiment of the present invention, the door hinge can be made reversible. The reversibility of the door hinge is helpful in allowing a single set of hardware rather than a pair of hardware for a left and a right side. The reversibility of the vertically opening door hinge begins with a reversible base member **220**. The reversible base member is made as a flat planar sheet of metal which can be cut from an automatic torch cutting machine. The reversible base member can also be cut by hand. The reversible base member has a left

12

side and a right side. The reversible base member also has a front end and a rear end. The front end points toward the front of the car. The rear end points toward the rear of the car. The reversible base member left side is the outside face when the reversible base member is mounted on the left side of the car. The reversible base member right side is the inside face when the reversible base member is mounted on the left side of the car. The reversible base member left side is the inside face when the reversible base member is mounted on the right side of the car, and the reversible base member right side is the outside face when the reversible base member is mounted on the right side of the car. In FIG. **18**, the reversible base member is shown in a mirror image showing an exploded view of both configurations, namely the left configuration and the right configuration. The left configuration can be mounted on the left side of the car, and a right configuration can be mounted on the right side of the car. The left configuration is shown on the left side of the page, and to the right configuration is shown on the right side of the page. Accordingly, the reversible base member is symmetrical along its plane so that the right side of the reversible base member looks like the mirror image of the left side of the reversible base member. Apertures are oriented at a perpendicular angle allowing symmetrical conformity. The reversible base member would not be flipped if it were removed from one side of a vehicle and installed on the other side of the vehicle. The orientation of the base member is a translation only, and does not require rotation by flipping its face.

Components mounted to the reversible base member are reversible by translation, or by mirror image flipping. Some of the components are translated, and some of the components are flipped. The ball bolt top **122** for example is removed from the reversible arm **250**, flipped 180°, and then inserted into the opposite side of the reversible arm **250**. On the other hand, items such as the reversible swivel member are translated to the other side without the 180° flip. The ball bolt top **122** has a right-handed screw interface with the reversible arm. Right-handed screw thread disposed on the reversible arm interacts with the ball bolt top. The right-handed screw thread is engaged in a clockwise fashion from the standpoint of an assembly person when the right-handed ball bolt top is inserted into the reversible arm. However, from the standpoint of the reversible arm, the right-handed screw thread receives rotation of the ball bolt top in opposite orientation which is reversed upon reversal of the reversible arm.

The motor **130** has input wires **131** that are connected to the wire harness **289**. The wire harness has a wire harness switch **288** that gives electrical actuation to the motor. The motor is selectively mounted to the reversible base member at either an outside motor mounting opening **228** or an inside motor mounting opening **229**. The inside motor mounting opening and the outside motor mounting opening have a small distance between them allowing user selection for fine-tuning and adjustment. The motor mounting aperture **237** is disposed as an opening on the motor housing, or frame attached to the motor. The motor mounting aperture **237** is mounted to the outside motor mounting opening or the inside motor mounting opening. The other end of the motor is the piston extension **134** which extends away from the motor. The piston extension has a piston extension aperture **136** at an end of the piston. The piston extension aperture **136** receives a piston extension bolt **135** which attaches it to either the swivel member first motor mounting **137** or the swivel member second motor mounting **138**. The swivel member first motor mounting and the swivel member second motor mounting can both be made as threaded apertures capable of receiving the piston extension bolt. The motor **130** therefore can be reversed in

13

translation without flipping by mounting to the other side of the reversible base member **220**. Components including the piston extension bolt **135** and the bolt attaching the motor mounting aperture to the inside or outside motor mounting opening are flipped 180° and inserted in an opposite end of the respective apertures. While it is preferred that the motor housing is symmetrical, it is not absolutely required that that be the case.

The reversible swivel member **230** can also be removed an attached to either the left or right side of the reversible base member. The reversible swivel member **230** has a base stopper adjustment aperture **341** for a base stopper adjustment member that fits in the base stopper adjustment aperture. The base stopper adjustment member can be threaded and engaged with the base stopper adjustment aperture so that the base stopper adjustment member has an adjustable contact with the reversible base stopper **261**. The reversible base stopper **261** is preferably formed as a bolt having a cylindrical or hexagonal top for receiving abutment against the base stopper adjustment member. The adjustment of the base stopper adjustment member selectively adjusts the stopping angle of the reversible swivel member when the car door is in a closed position. If the card or is not closing all the way, the base stopper adjustment member is preferably rotated counter clockwise relative to the reversible base stopper **261** so that the car door can close entirely.

Additionally, the reversible swivel member **230** has a reversible swivel member piston mount aperture **245** that can also be threaded in right-handed orientation so that it may receive a reversible shock piston upper mount **242** formed as a bolt that passes through a shock piston extension aperture **243** on the shock piston **240**. Also, the shock piston mounting aperture **244** can be mounted on a reversible shock piston lower mount **241** formed as a bolt threaded and secured to the reversible base member. The shock piston **240** has a main body portion into which the shock piston extension extends in and out of in telescopic configuration. The shock piston **240** operates the same as in previous embodiments in that it counterbalances the weight of the car door and provides smoother motion by acting as a spring force.

A stopper bolt stopper **226** stops the stopper bolt **60**. The stopper bolt stopper is also reversible by flipping. The stopper bolt stopper mounting opening **263** preferably receives a bolt such as stopper bolt stopper mounting bolt **262**. The stopper bolt stopper **226** preferably sandwiches the reversible base member about the stopper bolt stopper mounting opening **263**.

The reversible swivel member **230** also has an engaging edge that attaches to and pivots with an engaging edge of the reversible arm **250**. The engaging edge of the reversible arm preferably includes a first reversible arm finger **301**, a second reversible arm finger **302**, and a third reversible arm finger **303**. A first reversible arm gap **305** is formed between the first reversible arm finger **301** and the second reversible arm finger **302**. A second reversible arm gap **304** is formed between the second reversible arm finger **302** and the third reversible arm finger **303**. The engaging edge of the reversible swivel member preferably includes a first swivel member finger **306** and a second swivel member finger **308** forming a first swivel member gap **307** between them. The engaging edge of the reversible swivel member also preferably includes a third swivel member finger **310** and a second swivel member finger **308** forming a second swivel member gap **309** between them. The third swivel member finger **310** meets an outside edge of the first reversible arm finger **301**. The first reversible arm finger **301** fits in the second swivel member gap **309**. The second swivel member finger **308** fits in the first reversible

14

arm gap **305**. The second reversible arm finger **302** fits in the first swivel member gap **307** along with the toggle stopper **239**. The first swivel member finger **306** fits in the second reversible arm gap **304**. The third reversible arm finger **303** preferably abuts an outside edge of the first swivel member finger **306**.

A reversible swivel member swivel bolt **251** extends through the first reversible arm finger **301**, the second reversible arm finger **302**, and the third reversible arm finger **303**. The reversible swivel member swivel bolt also extends through the first swivel member finger **306**, the second swivel member finger **308**, and the third swivel member finger **310**. An adjustable clip **315** such as the circlip shown can releaseably lock to a circumferential groove at an end of the reversible swivel member swivel bolt **251**. Additionally, the toggle stopper **239** may further include a toggle adjustment screw **238** that can be adjusted and screwed in for decreasing the maximum angle of the reversible arm **250** relative to the reversible swivel member **230**. Accordingly, the toggle adjustment screw **238** can be adjustably screwed out a little for increasing the maximum angle of the reversible arm **250** relative to the reversible swivel member **230**.

The intermediate bolting slot **321** on the reversible base member can be used for connection with car frame or other components.

The reversible arm **250** has a slot facing the car door. The slot receives a branch member **252**. Reversible arm securing screw apertures **292** disposed on the reversible arm **250** receive reversible arm securing screws **291** that pass through the reversible arm securing screw apertures **292** and also through the reversible branch member securing apertures **293**. In this way, the reversible arm clamps to the branch member. Four bolts or screws can be used for securing the branch member to the reversible arm. The reversible bolt opening slots **259** engage with the car door in a reversible fashion so that they can engage with the left or right car door.

The upper reversible Riser **295** and the lower reversible Riser **294** can be removed and translated to the opposite side of the reversible base member **220**. The lower reversible riser includes lower reversible riser openings **296** for securing to a lower portion of the reversible base member and the upper reversible riser includes upper reversible riser openings **297** for securing to an upper portion of the reversible base member.

The reversible door hinge has a left orientation configuration and a right orientation configuration depending upon the manner of the build.

Fourth Embodiment

In a fourth embodiment of the present invention, the hinge can be double motion. The door hinge moves on a first motion and also moves on a second motion. The first motion is normal to the second motion. The door can therefore be opened horizontally or first open horizontally and then opened vertically. The door opens horizontally in the first motion and the door opens vertical in the second motion.

The first motion hinge **435** allows motion in a regular arc shaped path for a door to open horizontally and a second motion hinge **441** allows motion for a door to open vertically. The first motion hinge **435** is mounted on a first motion first prong **434** and a first motion second prong **433**. The first motion first prong **434** is parallel to a first motion second prong **433** extending from a first motion bracket **431**. The first motion second prong **433** has a first motion second prong stopper extension **432** which abuts an adjustable first motion riser screw **442**. The adjustable first motion riser screw **442**

15

can be adjusted so that it vertically has control and is vertically adjustable to provide a stop limit for a door path. The screw adjustment can be made by rotation of the screw and setting the screw with adhesive binder. The first motion assembly **430** has a first motion bracket **431** which connects to a door upper portion. The first motion bracket **431** is preferably made as a flat member and parallel to or substantially parallel to a first motion hinge **435**. The first motion hinge **435** allows a car door or other vehicle door to open and close in a conventional manner.

The second motion assembly **440** is mounted to the first motion assembly **430** so that the second motion assembly **440** swivels relative to the first motion assembly **430**. The second motion assembly **440** is mounted to the upper door connection plate **450** so that the upper door connection plate **450** rotates and swivels relative to the second motion assembly **440**. The upper door connection plate **450** is preferably mounted to a vehicle chassis at an upper portion.

The upper door connection plate **450** is shown as a rectangular member, however can be made according to a variety of different shapes so as to conform to a vehicle chassis. The upper door connection plate **450** is preferably drilled to allow connection to a vehicle. The upper door connection plate **450** further includes a door motion guide **451** preferably welded to the upper door connection plate **450**. The door motion guide **451** has a blunt door motion guide tip **452** and a vertical planar section forming a door motion guide ramp **453**. The ramp is on the upper side of the connection plate.

Opposite the upper side of the connection plate is a second motion screw retainer **480** which retains a second motion riser screw **481**. The second motion riser screw **481** contacts a second motion abutment **482**. The second motion riser screw retainer **480** is mounted to a lower portion of the upper door connection plate **450**. The abutment between the second motion abutment **482** and the second motion riser screw **481** provides a limit for the lower range of a door motion when the door comes down in the second motion which is vertically. The second motion riser screw retainer **480** is rigidly connected to the upper door connection plate **450**. The second motion abutment **482** is preferably rigidly connected to the second motion assembly **440**. The second motion abutment **482** rotates with the second motion assembly **440** and rotates on the second motion hinge **441**.

The second motion abutment **482** preferably terminates in a connection with the second motion shock assembly **460**. The second motion shock assembly **460** is thus pivotally connected to the second motion assembly **440**. The second motion assembly **440** rotates and rotates relative to the second motion shock assembly **460** at an upper second motion ball **463**. The upper second motion ball **463** is retained within an upper second motion ball retainer with **461** which receives an upper second motion ball retainer bolt **462**. The upper second motion ball **463** is preferably partially retained within the upper second motion ball retainer **461**. The second motion shock body **466** is a shock that has telescopic movement relative to the second motion lower shaft **467**. Alternatively, the second motion shock body **466** may have a telescopic movement relative to the upper second motion shaft **464**. The upper second motion shaft may have an upper second motion shaft flat portion **465** and the second motion lower shaft may have a second motion lower shaft flat portion. The second motion lower shaft retainer **468** can be formed as a set screw for adjusting connection between the second motion lower shaft **467** and the second motion ball retainer **469**. The second motion lower ball retainer **469** preferably at least partially retains a second motion lower ball which is connected to the lower door connection plate **470** by a bolt. The bolt preferably

16

connects through a hollow portion of the second motion lower ball so that the bolt secures it to the lower door connection plate **470**.

The lower door connection plate **470** is secured to a lower portion of a vehicle chassis door connection area. A variety of openings such as a lower door connection second bolt **473** and a lower door connection third bolt **474** can be disposed in the lower door connection plate **470** to provide connection to the vehicle chassis. A lower door connection plate stopper **471** can be attached to the lower door connection plate **470**. The lower door connection plate stopper **471** can be formed as an attachment that is attached by a pair of bolts, such as a lower door connection first bolt **472** and a lower door connection second bolt **473**. The lower door connection plate stopper **471** has a lower door double motion stopper surface **475**.

A key to this invention is to have a double motion mounting plate **490** which is formed to mount to a lower portion of a vehicle door and is preferably drilled for connection to a standard vehicle door so as to provide retrofit compatibility. Retrofit compatibility apertures preferably include a first aperture of the double motion mounting plate **491** and a second aperture of the double mounting plate **492** above the first aperture. At an upper terminus of the double motion mounting plate **490** is preferably formed a third aperture of double motion mounting plate **496**. The ballpoint adjustment nut **495** adjusts the height of the protrusion of a ballpoint shaft **493**. The ballpoint shaft **493** preferably has screw thread exterior to allow distance adjustment so that a ballpoint **494** needs with the lower door double motion stopper surface **475**.

During operation, a door is adjusted with all of the various adjustment means described herein so that the door can open at its upper end in a first motion along the first motion hinge **435**. The door is also adjusted so that at its upper end it can rotate on the second motion hinge **441**. The door is also adjusted so that at its lower end the ballpoint **494** meets the lower door double motion stopper surface. When the door opens horizontally in the first motion, the ballpoint **494** rotates on the lower door double motion stopper surface **475**. When the door opens vertically in the second motion, the ballpoint **494** separates from the lower door double motion stopper surface **475**. The ballpoint **494** preferably has a rotating ball mounted and a tip of the shaft so that the rotating ball can rotate within the shaft. The ballpoint **494** may also have a fixed ball that is rigidly secured to the shaft and does not rotate relative to the shaft. It is preferred to have rotation of the ball relative to the shaft tip.

Thus, although the invention has been disclosed in detail with reference only to the preferred embodiments, those skilled in the art will appreciate that various other embodiments can be provided without departing from the scope of the invention. The claims below are directed primarily to the fourth embodiment of the present invention. Accordingly, the invention is defined only by the claims set forth below.

The invention claimed is:

1. A double motion door hinge for a vehicle door comprising:
 - a. an upper door connection plate, adapted to connect to a vehicle chassis, having a second motion assembly pivotally mounted to the upper door connection plate at a second motion hinge, wherein the axis of rotation of the second motion assembly is perpendicular to the upper door connection plate;
 - b. a first motion assembly pivotally mounted to the second motion assembly at a first motion hinge, wherein the first motion assembly is adapted to connect to an upper portion of a vehicle door;

17

- c. a lower door connection plate, adapted to connect to the vehicle chassis, comprising a lower door connection plate stopper and a lower shock connection, wherein the lower door connection plate stopper has a lower door double motion stopper surface; 5
 - d. a double motion mounting plate adapted for mounting to a vehicle door, wherein the double motion mounting plate further comprises a ballpoint shaft and a ballpoint mounted on the ballpoint shaft, wherein the ballpoint is adapted to abut the lower door double motion stopper surface when the vehicle door is in a closed position, wherein the ballpoint is adapted to separate from the lower door double motion stopper surface when the vehicle door is in an open position, wherein the ballpoint rotates on the lower door double motion stopper surface when the vehicle door moves in a first motion, wherein the ballpoint separates from the lower door double motion stopper surface when the vehicle door opens in a second motion that is normal to the first motion; 10 15 20
 - e. a shock assembly pivotally connected at the lower shock connection of the lower door connection plate and pivotally connected to the second motion assembly, whereby the door can open in solely in a first motion or in a first motion and in a subsequent second motion. 25
2. The double motion door hinge of claim 1, wherein the shock assembly is pivotally connected and ball connected at the lower shock connection of the lower door connection plate and wherein the shock assembly is also pivotally connected and ball connected to the second motion assembly. 30
3. The double motion door hinge of claim 1, wherein the shock assembly further comprises a second motion lower shaft in telescopic mechanical relationship with a second motion shock body.
4. The double motion door hinge of claim 1, wherein the shock assembly further comprises a second motion upper shaft in telescopic mechanical relationship with a second motion shock body. 35
5. The double motion door hinge of claim 1, further comprising a door motion guide mounted to an upper portion of the upper door connection plate, wherein the door motion guide is adapted to abut a portion of a first motion first prong, wherein the first motion first prong is mounted on a first motion bracket of the first motion assembly, wherein the first motion first prong extends from the first motion bracket, wherein the door motion guide is sized to limit a second motion when the first motion angle is small in an initial range. 40 45
6. The double motion door hinge of claim 5, further comprising a ramp formed on the door motion guide, and further comprising a blunt tip formed on the door motion guide, wherein a surface of the first motion first prong is limited against the ramp and a blunt tip when the door is being opened in a second motion while the first motion angle is small in an initial range. 50
7. The double motion door hinge of claim 5, wherein the shock assembly is pivotally connected and ball connected at the lower shock connection of the lower door connection plate and wherein the shock assembly is also pivotally connected and ball connected to the second motion assembly. 55
8. The double motion door hinge of claim 5, wherein the shock assembly further comprises a second motion lower shaft in telescopic mechanical relationship with a second motion shock body. 60
9. The double motion door hinge of claim 5, wherein the shock assembly further comprises a second motion upper shaft in telescopic mechanical relationship with a second motion shock body. 65

18

10. A double motion door hinge for a vehicle door comprising:
- a. an upper door connection plate, adapted to connect to a vehicle chassis, having a second motion assembly pivotally mounted to the upper door connection plate at a second motion hinge, wherein the axis of rotation of the second motion assembly is perpendicular to the upper door connection plate;
 - b. a first motion assembly pivotally mounted to the second motion assembly at a first motion hinge, wherein the first motion assembly is adapted to connect to an upper portion of a vehicle door;
 - c. a lower door connection plate, adapted to connect to the vehicle chassis, comprising a lower door connection plate stopper and a lower shock connection, wherein the lower door connection plate stopper has a lower door double motion stopper surface;
 - d. a double motion mounting plate adapted for mounting to a vehicle door, wherein the double motion mounting plate further comprises ballpoint mounted to the double motion mounting plate, wherein the ballpoint is adapted to abut the lower door double motion stopper surface when the vehicle door is in a closed position, wherein the ballpoint is adapted to separate from the lower door double motion stopper surface when the vehicle door is in an open position, wherein the ballpoint rotates on the lower door double motion stopper surface when the vehicle door moves in a first motion, wherein the ballpoint separates from the lower door double motion stopper surface when the vehicle door opens in a second motion that is normal to the first motion;
 - e. a shock assembly pivotally connected at the lower shock connection of the lower door connection plate and pivotally connected to the second motion assembly, whereby the door can open in solely in a first motion or in a first motion and in a subsequent second motion.
11. The double motion door hinge of claim 10, wherein the shock assembly is pivotally connected and ball connected at the lower shock connection of the lower door connection plate and wherein the shock assembly is also pivotally connected and ball connected to the second motion assembly.
12. The double motion door hinge of claim 10, wherein the shock assembly further comprises a second motion lower shaft in telescopic mechanical relationship with a second motion shock body.
13. The double motion door hinge of claim 10, wherein the shock assembly further comprises a second motion upper shaft in telescopic mechanical relationship with a second motion shock body.
14. The double motion door hinge of claim 10, further comprising a door motion guide mounted to an upper portion of the upper door connection plate, wherein the door motion guide is adapted to abut a portion of a first motion first prong, wherein the first motion first prong is mounted on a first motion bracket of the first motion assembly, wherein the first motion first prong extends from the first motion bracket, wherein the door motion guide is sized to limit a second motion when the first motion angle is small in an initial range.
15. The double motion door hinge of claim 14, further comprising a ramp formed on the door motion guide, and further comprising a blunt tip formed on the door motion guide, wherein a surface of the first motion first prong is limited against the ramp and a blunt tip when the door is being opened in a second motion while the first motion angle is small in an initial range.
16. The double motion door hinge of claim 14, wherein the shock assembly is pivotally connected and ball connected at

19

the lower shock connection of the lower door connection plate and wherein the shock assembly is also pivotally connected and ball connected to the second motion assembly.

17. The double motion door hinge of claim 14, wherein the shock assembly further comprises a second motion lower shaft in telescopic mechanical relationship with a second motion shock body. 5

20

18. The double motion door hinge of claim 14, wherein the shock assembly further comprises a second motion upper shaft in telescopic mechanical relationship with a second motion shock body.

* * * * *