



US008403983B2

(12) **United States Patent**  
**Quadri et al.**

(10) **Patent No.:** **US 8,403,983 B2**  
(45) **Date of Patent:** **Mar. 26, 2013**

(54) **HEART VALVE**

(75) Inventors: **Arshad Quadri**, West Hartford, CT  
(US); **J. Brent Ratz**, Winchester, MA  
(US)

(73) Assignee: **CardiAQ Valve Technologies, Inc.**,  
Irvine, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 280 days.

|              |         |                   |
|--------------|---------|-------------------|
| 5,879,381 A  | 3/1999  | Moriuch et al.    |
| 6,015,431 A  | 1/2000  | Thornton et al.   |
| 6,053,940 A  | 4/2000  | Wijay             |
| 6,113,612 A  | 9/2000  | Swanson et al.    |
| 6,159,237 A  | 12/2000 | Alt               |
| 6,168,616 B1 | 1/2001  | Brown, III        |
| 6,425,916 B1 | 7/2002  | Garrison et al.   |
| 6,458,153 B1 | 10/2002 | Bailey et al.     |
| 6,475,237 B2 | 11/2002 | Drasler et al.    |
| 6,482,228 B1 | 11/2002 | Norred            |
| 6,511,491 B2 | 1/2003  | Grudem et al.     |
| 6,517,573 B1 | 2/2003  | Pollock           |
| 6,676,698 B2 | 1/2004  | McGuckin et al.   |
| 6,723,123 B1 | 4/2004  | Kazatchkov et al. |

(Continued)

(21) Appl. No.: **12/569,856**

(22) Filed: **Sep. 29, 2009**

(65) **Prior Publication Data**

US 2010/0082094 A1 Apr. 1, 2010

**Related U.S. Application Data**

(60) Provisional application No. 61/136,716, filed on Sep.  
29, 2008.

(51) **Int. Cl.**  
**A61F 2/24** (2006.01)

(52) **U.S. Cl.** ..... **623/2.17**; 623/1.24; 623/1.26;  
623/2.12; 623/2.14

(58) **Field of Classification Search** ..... 623/1.24,  
623/2.12, 1.26, 2.14, 2.17  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

|             |         |                 |
|-------------|---------|-----------------|
| 4,477,930 A | 10/1984 | Totten et al.   |
| 5,332,402 A | 7/1994  | Teitelbaum      |
| 5,397,355 A | 3/1995  | Marin           |
| 5,411,552 A | 5/1995  | Andersen et al. |
| 5,509,930 A | 4/1996  | Love            |
| 5,575,818 A | 11/1996 | Pinchuk         |
| 5,855,601 A | 1/1999  | Bessler et al.  |

**FOREIGN PATENT DOCUMENTS**

|    |              |         |
|----|--------------|---------|
| GB | 2245495      | 1/1992  |
| WO | WO 03/092554 | 11/2003 |

(Continued)

**OTHER PUBLICATIONS**

PCT; International Search Report for PCT/US2009/058893; Dec. 11,  
2009.

*Primary Examiner* — Thomas J Sweet


*Assistant Examiner* — Seema Mathew

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson &  
Bear LLP

(57) **ABSTRACT**

A replacement heart valve can comprise a valve body and an elongate frame. The valve body can define a plurality of leaflets adapted to move between an open state and a coapted state. The elongate frame can be configured to move between a radially compacted state and a radially expanded state, the frame comprising a plurality of struts. Stitches attach the valve body to the plurality of struts. At least one of the stitches can be a loose stitch configured to freely slide over the corresponding strut when the frame is moved between the radially compacted and radially expanded states.

**23 Claims, 21 Drawing Sheets**

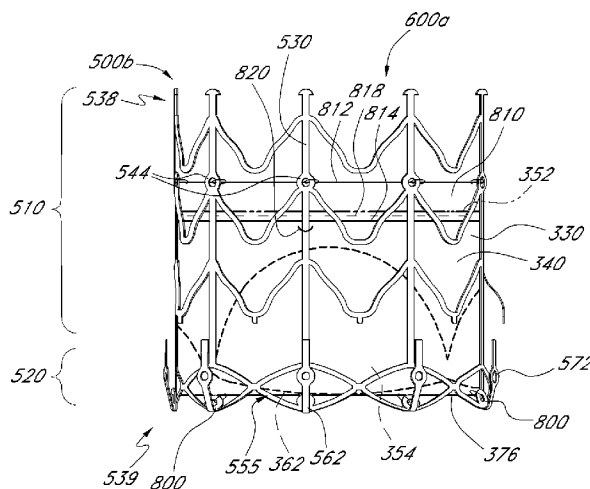

# US 8,403,983 B2

Page 2

## U.S. PATENT DOCUMENTS

6,767,362 B2 7/2004 Schreck  
6,790,230 B2 9/2004 Beyersdorf et al.  
6,979,350 B2 12/2005 Möll et al.  
7,018,406 B2 3/2006 Seguin et al.  
7,186,265 B2 3/2007 Sharkawy et al.  
7,201,772 B2 4/2007 Schwammenthal et al.  
7,329,278 B2 2/2008 Seguin et al.  
7,381,219 B2 6/2008 Salahieh et al.  
7,429,269 B2 9/2008 Schwammenthal et al.  
7,442,204 B2 10/2008 Schwammenthal et al.  
7,445,631 B2 11/2008 Salaheih et al.  
7,585,321 B2 9/2009 Cribier  
7,959,672 B2 \* 6/2011 Salahieh et al. .... 623/2.17  
8,167,926 B2 \* 5/2012 Hartley et al. .... 623/1.13  
2003/0199971 A1 \* 10/2003 Tower et al. .... 623/1.24  
2003/0220683 A1 11/2003 Minasian et al.  
2004/0039436 A1 2/2004 Spenser et al.  
2004/0210304 A1 10/2004 Seguin et al.  
2005/0096738 A1 5/2005 Cali et al.  
2005/0137682 A1 \* 6/2005 Justino .... 623/1.24  
2005/0137690 A1 6/2005 Salahieh et al.  
2005/0137695 A1 6/2005 Salahieh et al.  
2005/0137701 A1 6/2005 Salahieh et al.  
2005/0182483 A1 8/2005 Osborne et al.  
2005/0234546 A1 10/2005 Nugent et al.  
2005/0283231 A1 12/2005 Haug et al.  
2006/0195183 A1 8/2006 Navia et al.  
2007/0010876 A1 1/2007 Salaheih et al.  
2007/0118206 A1 5/2007 Colgan et al.  
2007/0162107 A1 7/2007 Salahieh et al.  
2007/0213813 A1 9/2007 Von Segesser et al.  
2007/0233228 A1 \* 10/2007 Eberhardt et al. .... 623/1.13

2007/0255391 A1 11/2007 Hojeibane et al.  
2008/0071363 A1 3/2008 Tuval et al.  
2008/0125859 A1 5/2008 Salaheih et al.  
2008/0133003 A1 6/2008 Seguin  
2008/0140189 A1 6/2008 Nguyen et al.  
2008/0147183 A1 \* 6/2008 Styrc ..... 623/2.12  
2008/0208328 A1 8/2008 Antocci et al.  
2008/0221672 A1 9/2008 Lamphere et al.  
2008/0243245 A1 10/2008 Thambar et al.  
2008/0269878 A1 10/2008 Iobbi  
2009/0005863 A1 1/2009 Goetz et al.  
2009/0076598 A1 3/2009 Salaheih et al.  
2009/0138079 A1 5/2009 Tuval et al.  
2009/0216314 A1 8/2009 Quadri  
2009/0248132 A1 10/2009 Bloom et al.  
2009/0248133 A1 10/2009 Bloom et al.  
2009/0264997 A1 10/2009 Salaheih et al.  
2009/0276040 A1 11/2009 Rowe et al.  
2009/0287299 A1 11/2009 Tabor et al.  
2009/0306768 A1 12/2009 Quadri  
2010/0036479 A1 2/2010 Hill et al.  
2010/0082089 A1 4/2010 Quadri et al.  
2010/0298931 A1 11/2010 Quadri et al.  
2011/0022157 A1 1/2011 Essinger et al.  
2011/0029067 A1 \* 2/2011 McGuckin et al. .... 623/1.24  
2012/0059454 A1 \* 3/2012 Millwee et al. .... 623/1.24

## FOREIGN PATENT DOCUMENTS

WO WO 2005/011534 2/2005  
WO WO 2005/087140 9/2005  
WO WO 2007/123658 11/2007  
WO WO 2008/091515 7/2008

\* cited by examiner

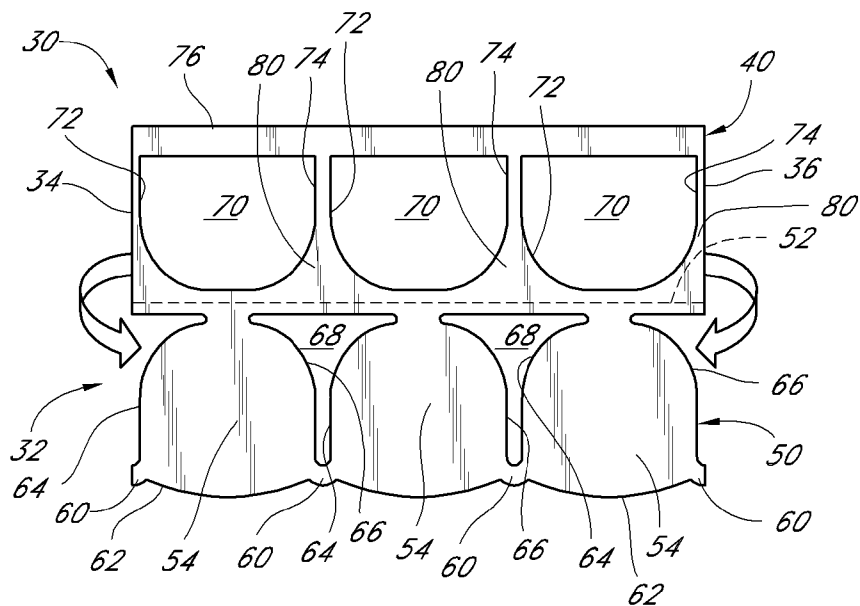


FIG. 1

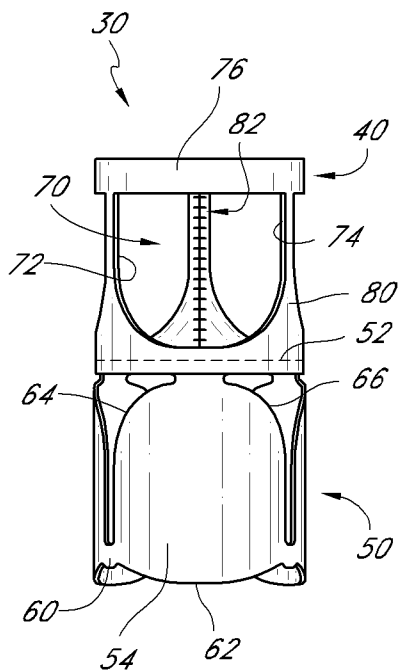


FIG. 2A

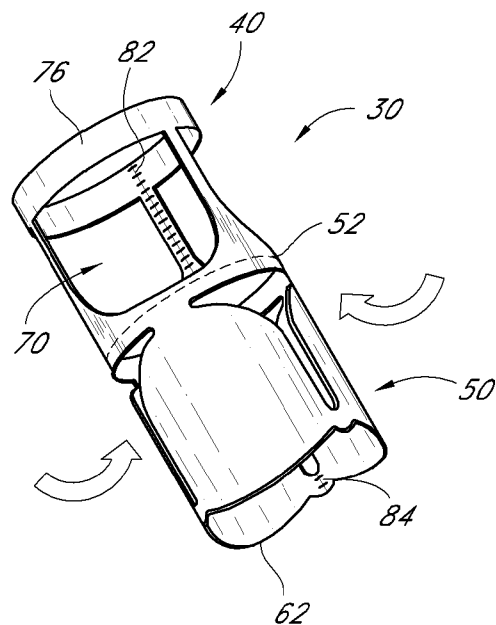


FIG. 2B

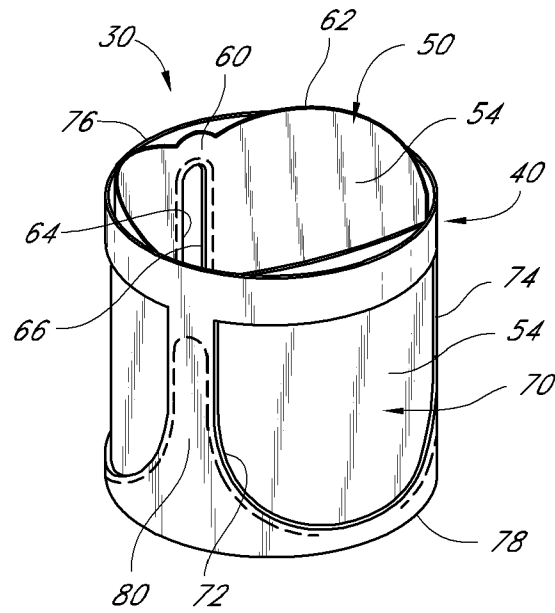


FIG. 3A

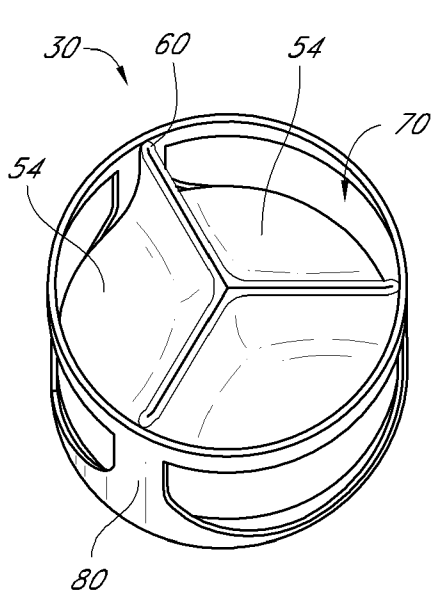


FIG. 3B

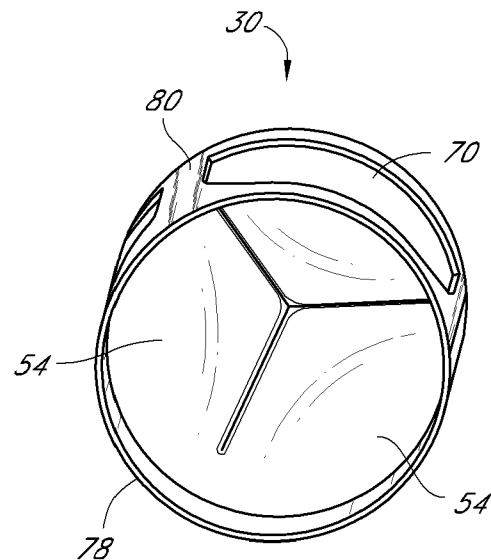


FIG. 3C

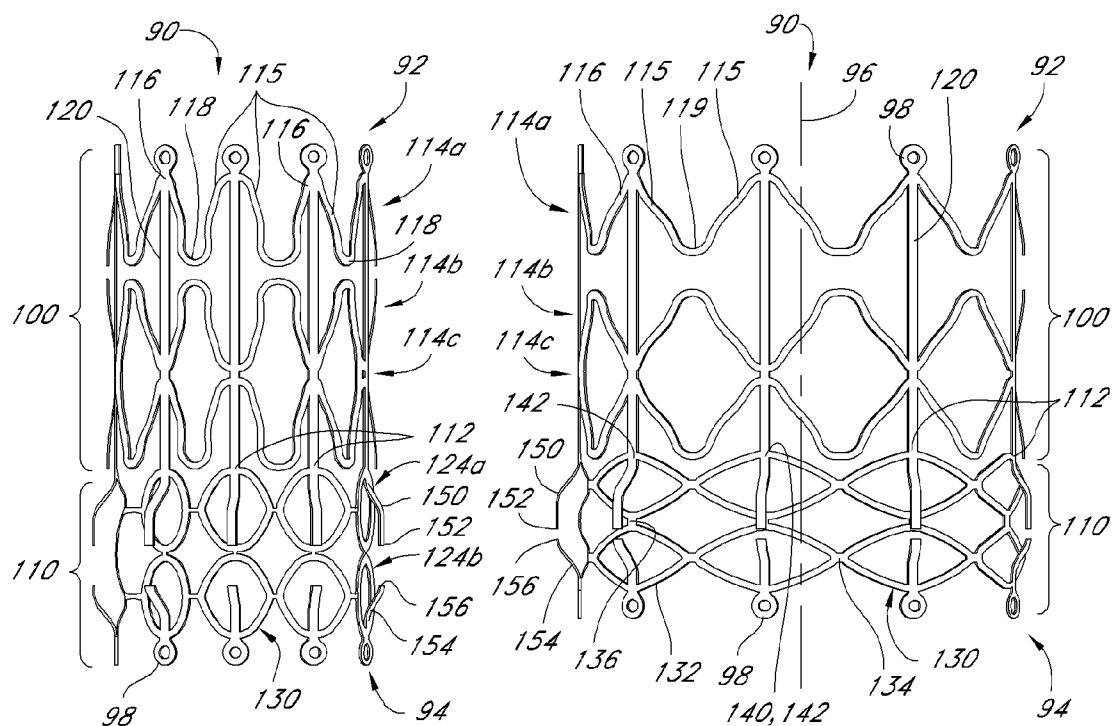


FIG. 4A

FIG. 4B

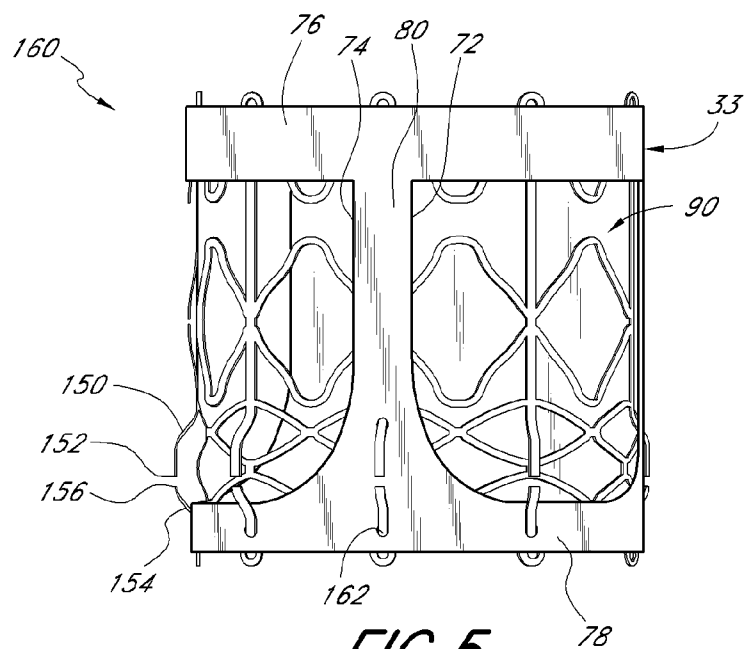


FIG. 5

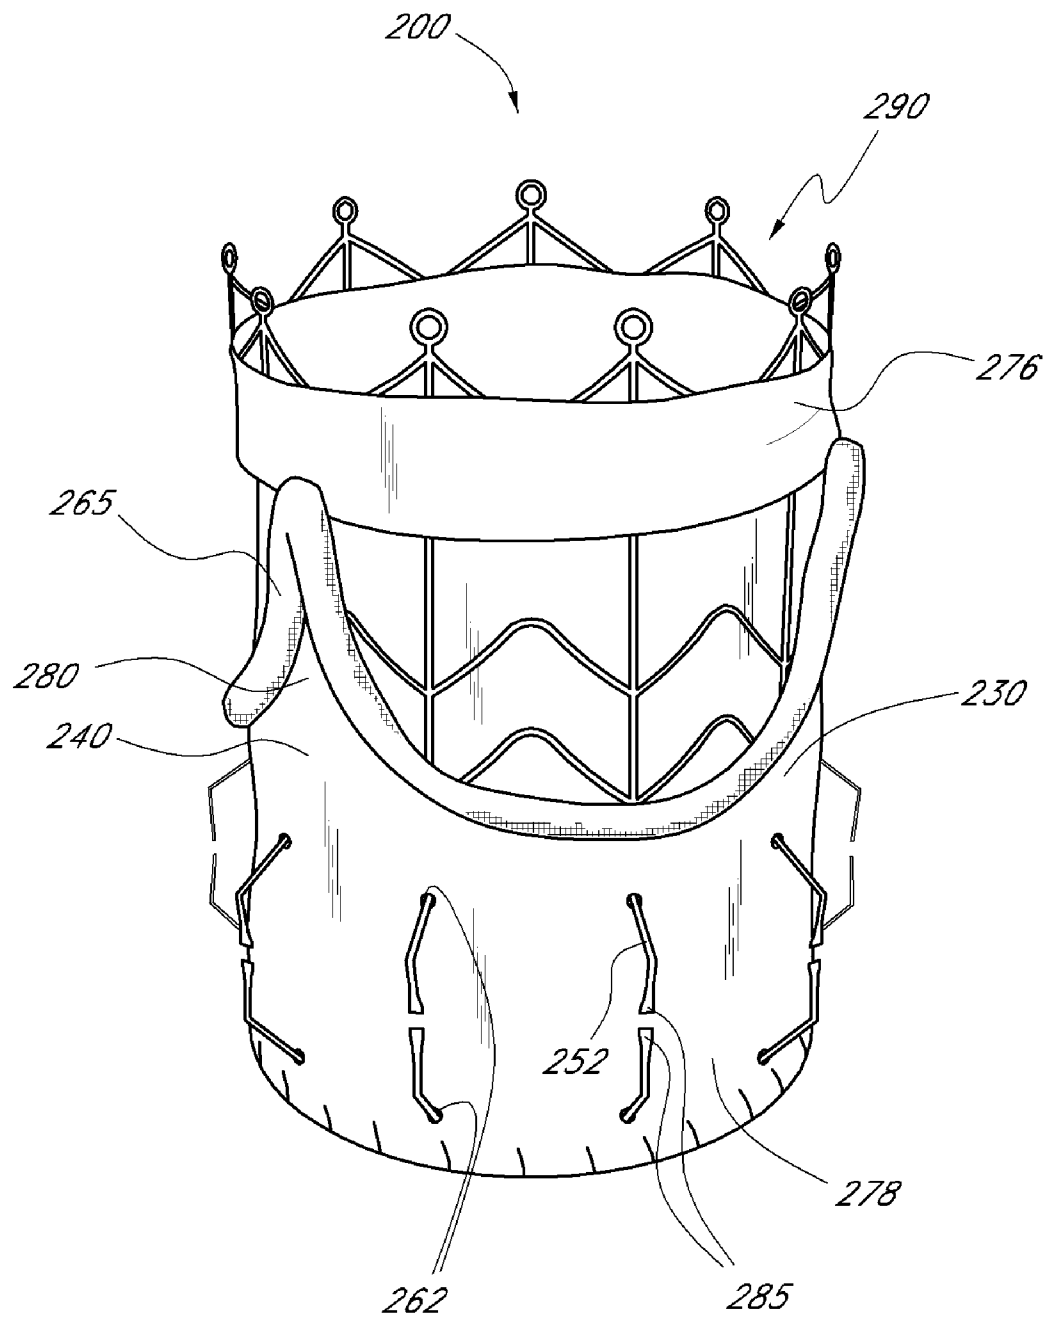
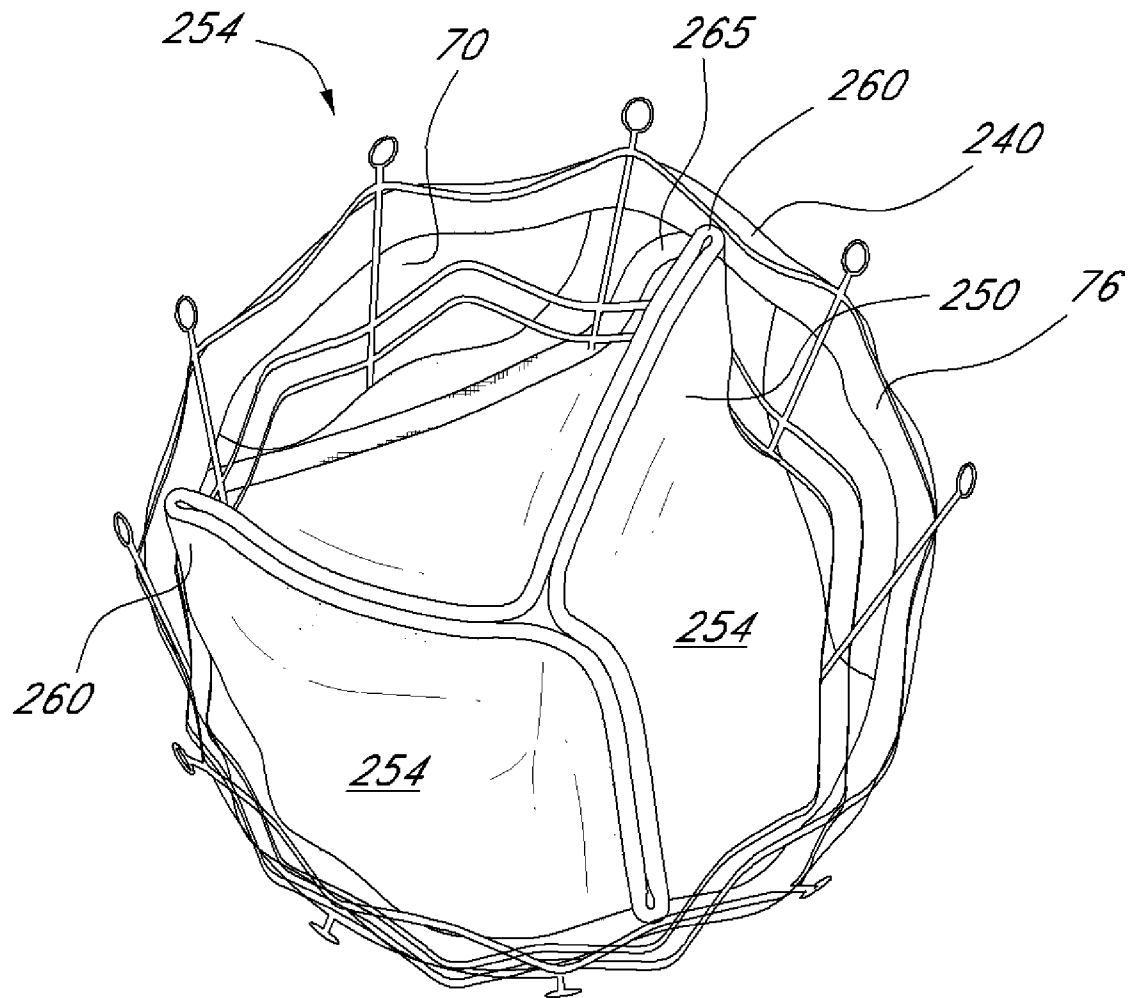


FIG. 6A

**FIG. 6B**



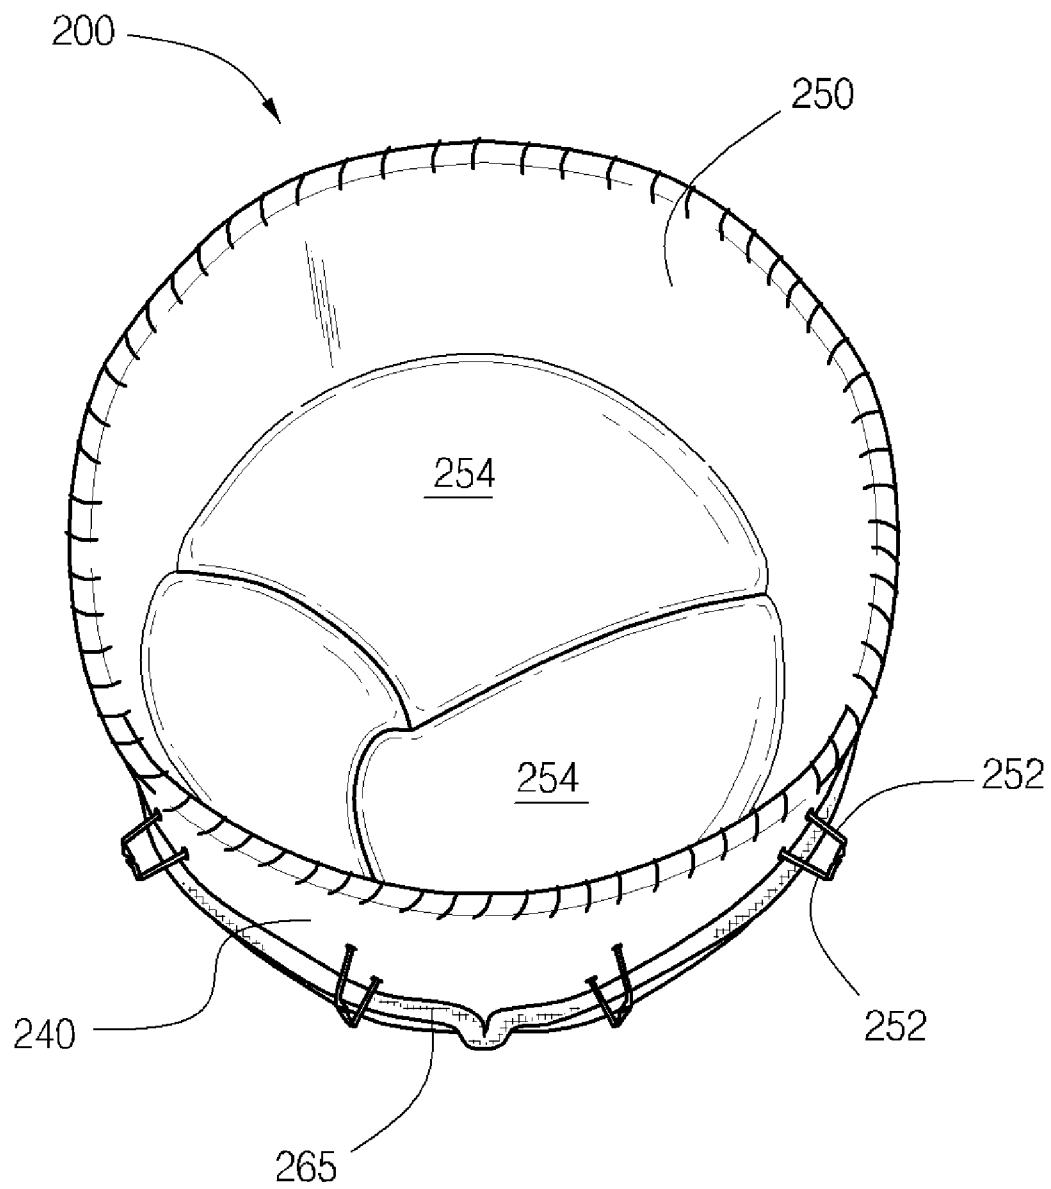


FIG. 6C




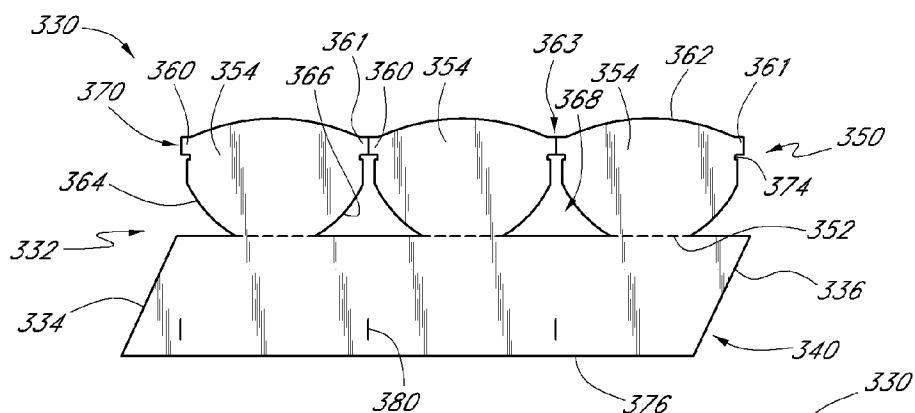


**FIG. 7**

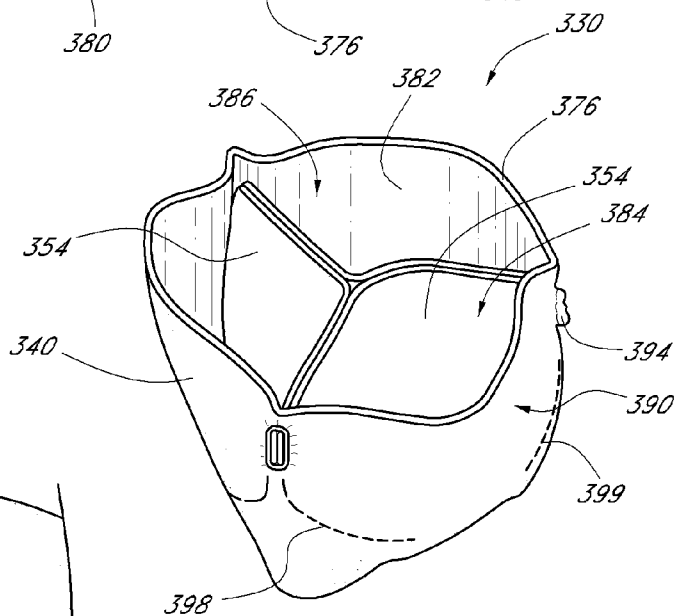


**FIG. 8**

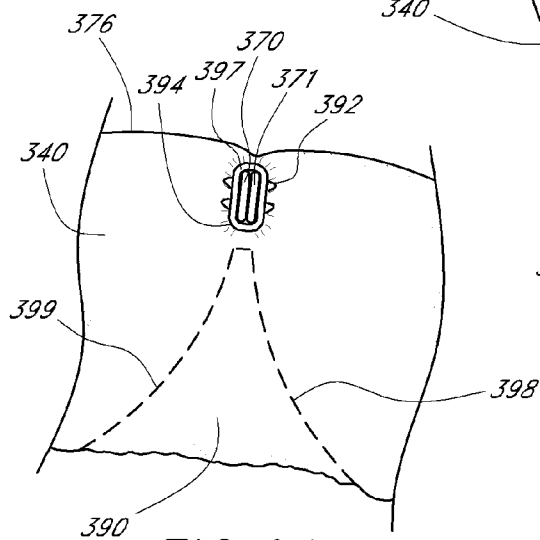


**FIG. 9A**

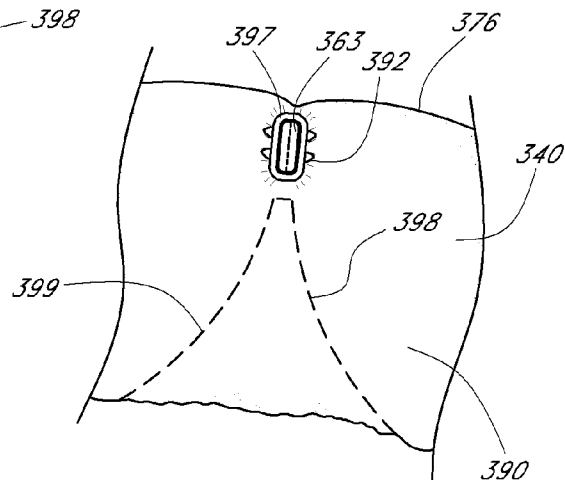

**FIG. 9B**

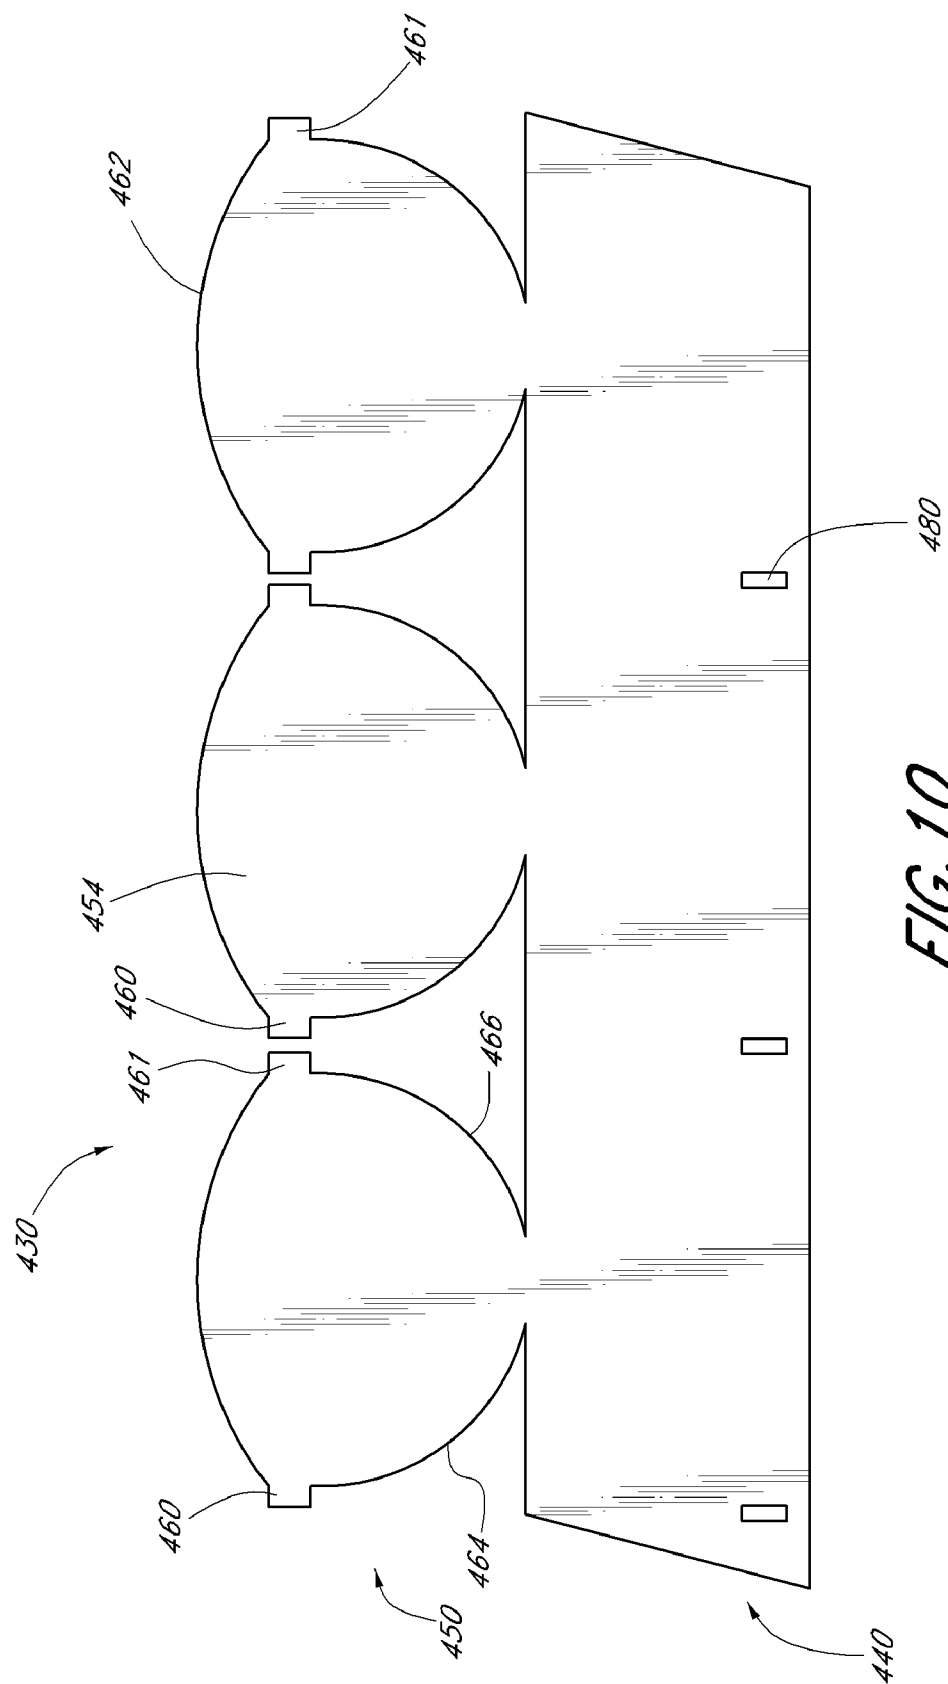

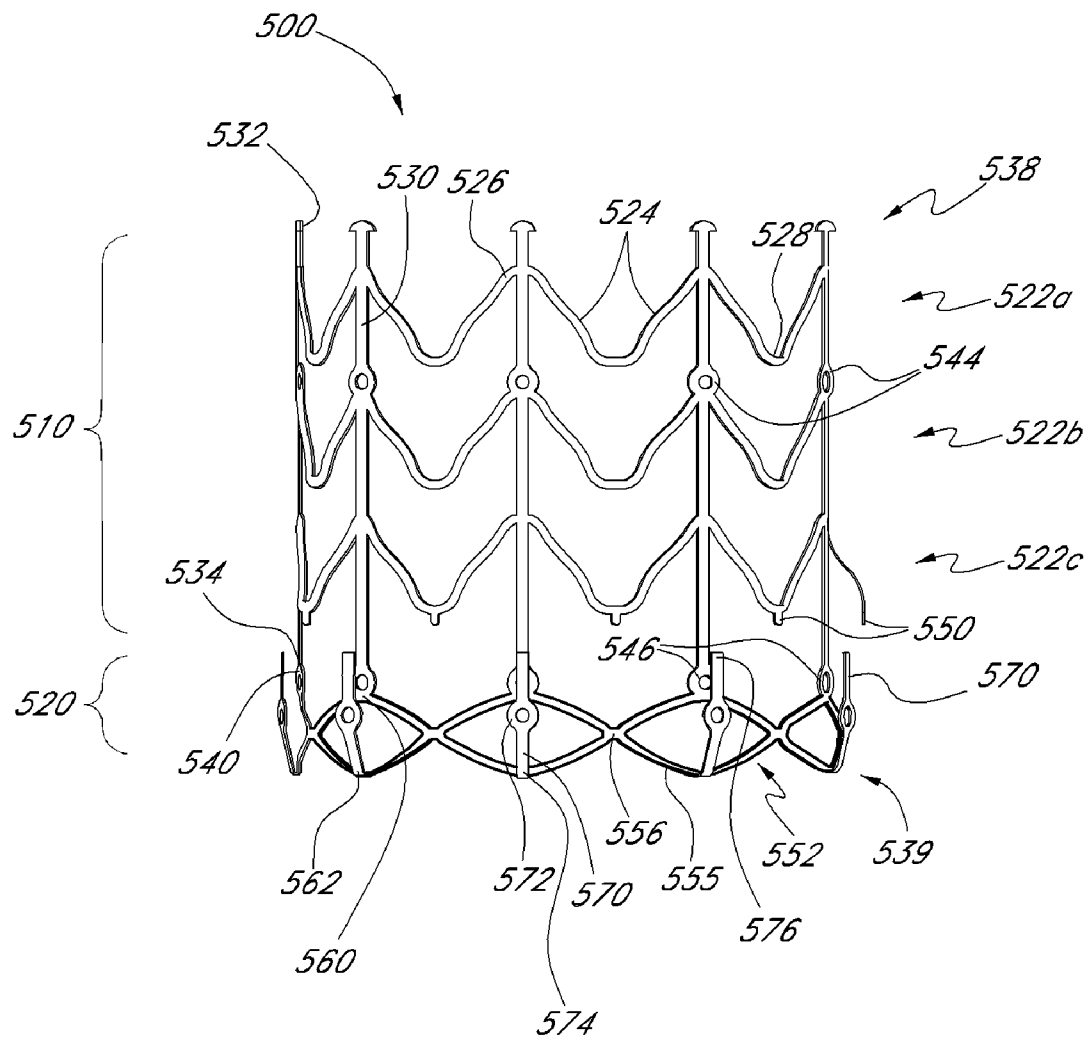**FIG. 11**

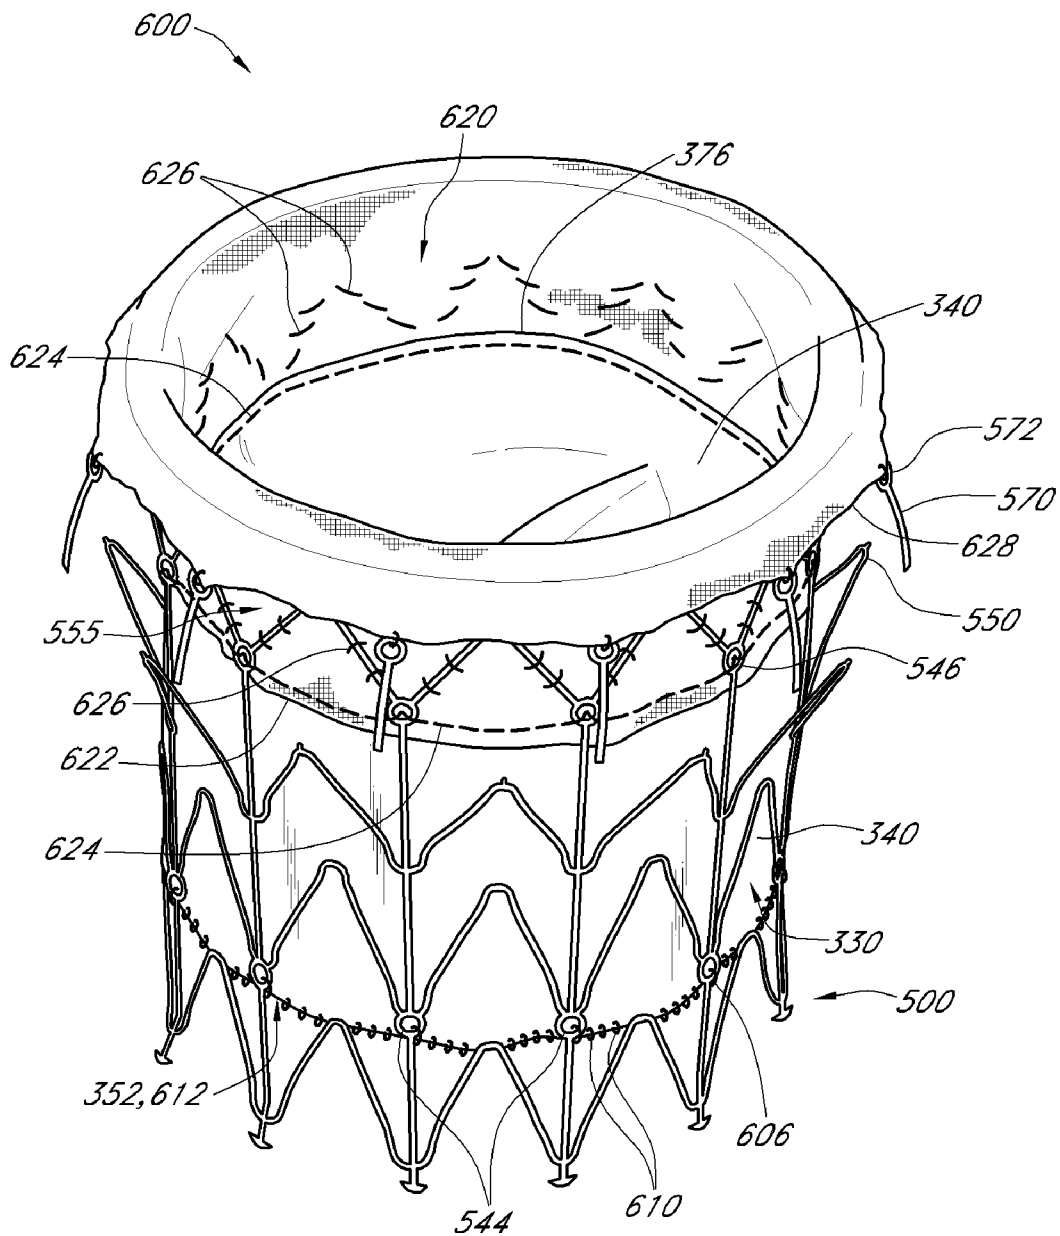


FIG. 12

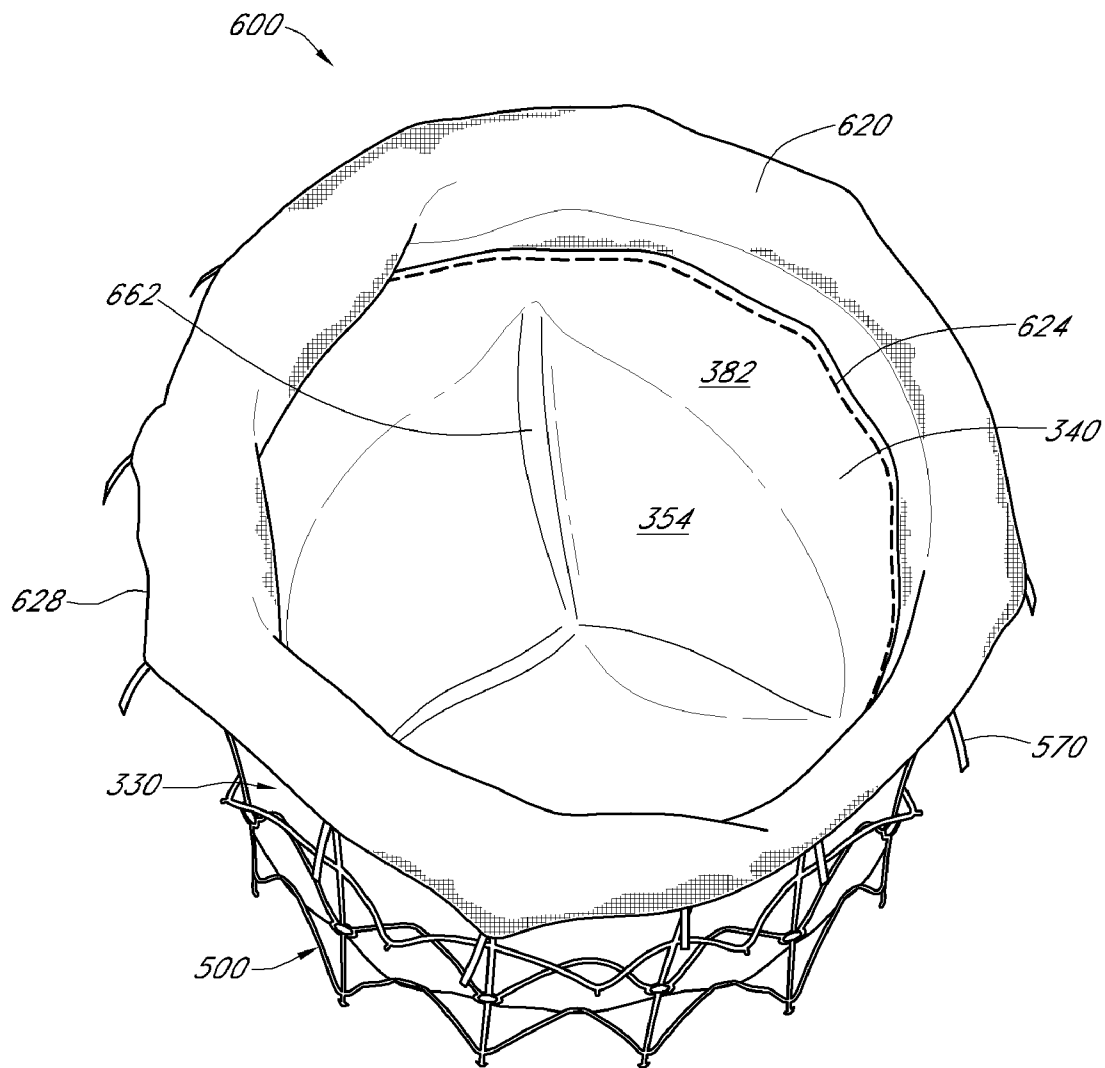
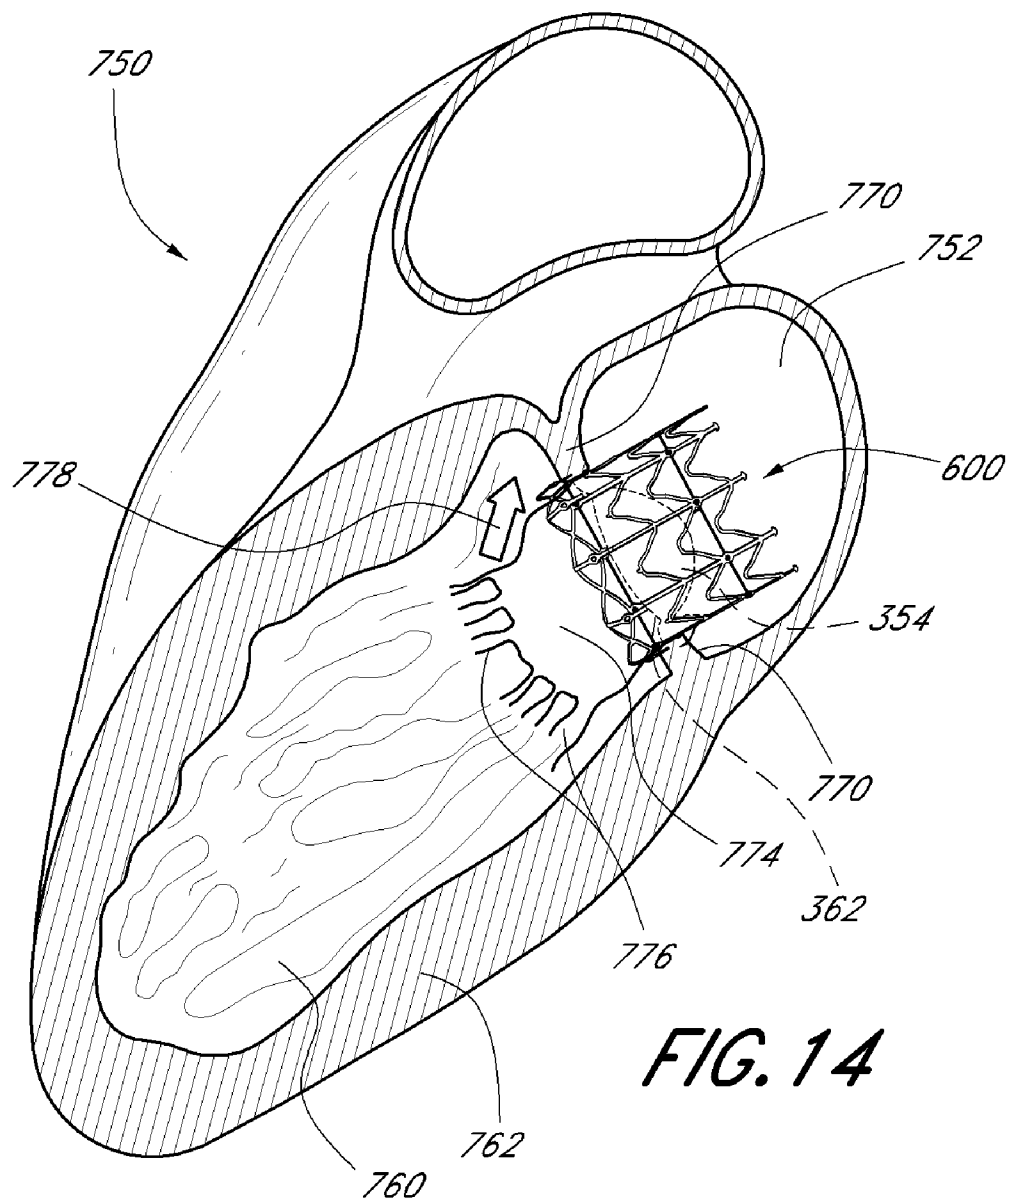


FIG. 13



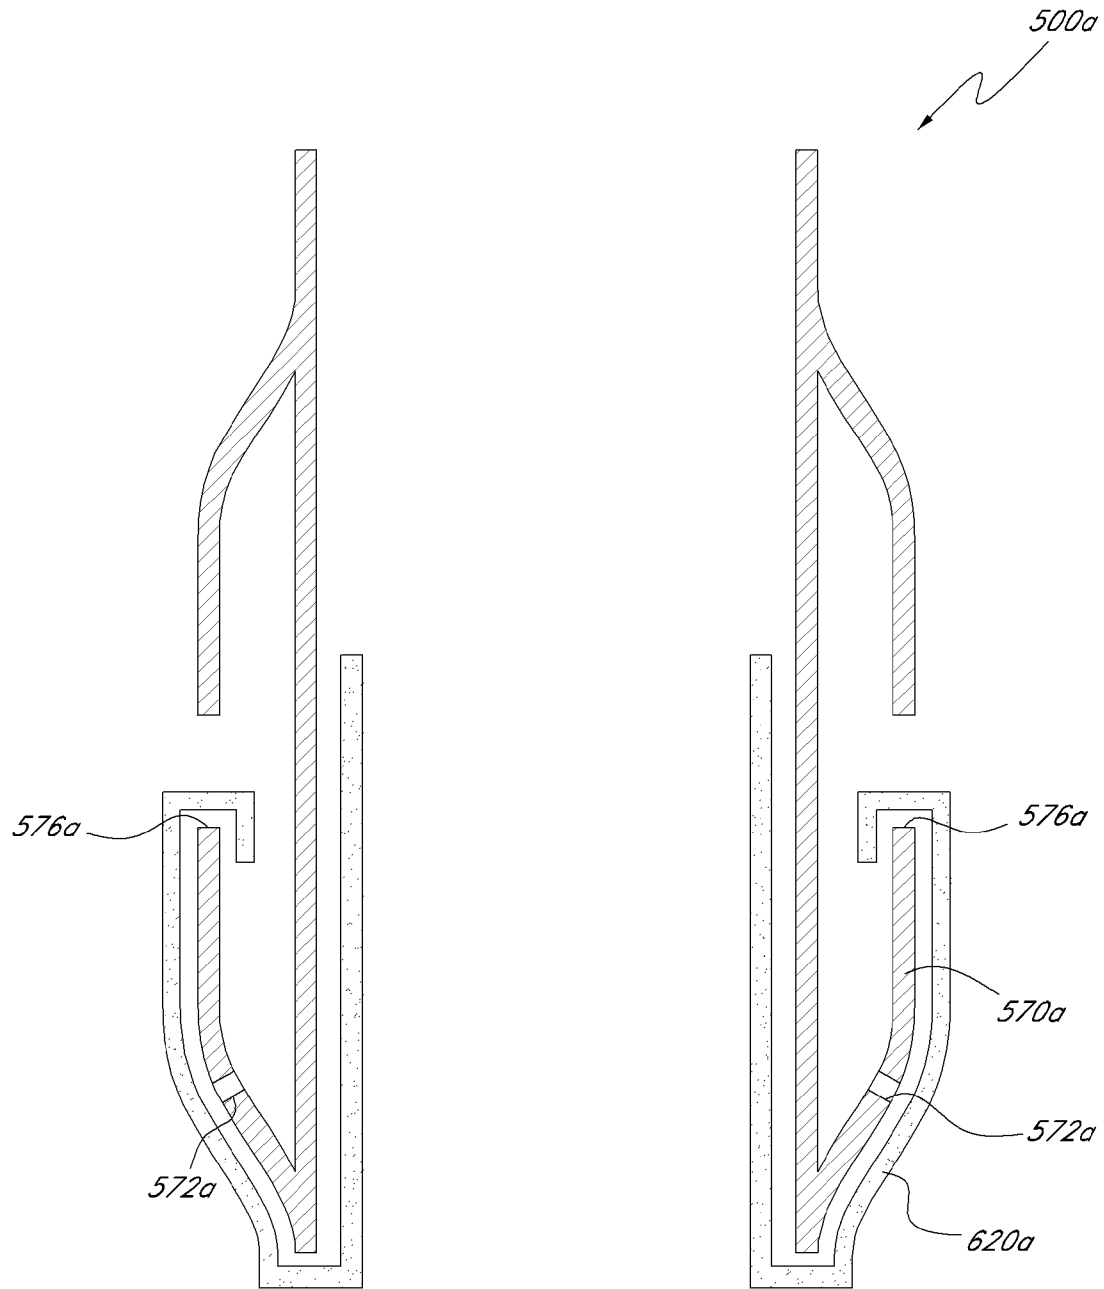


FIG. 15

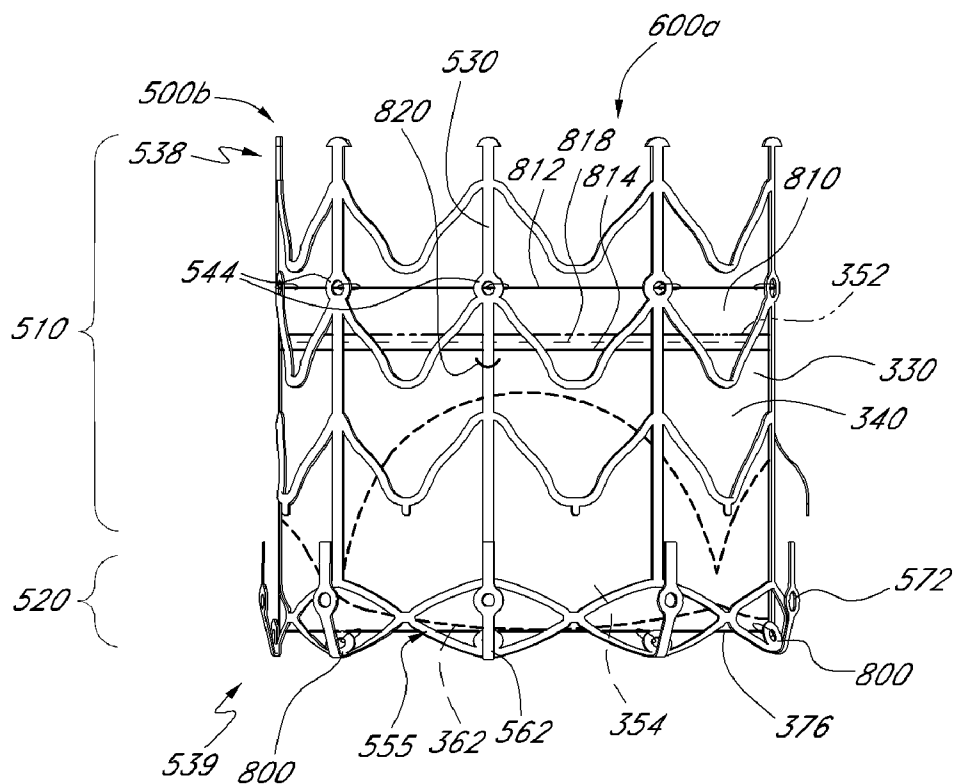


FIG. 16A

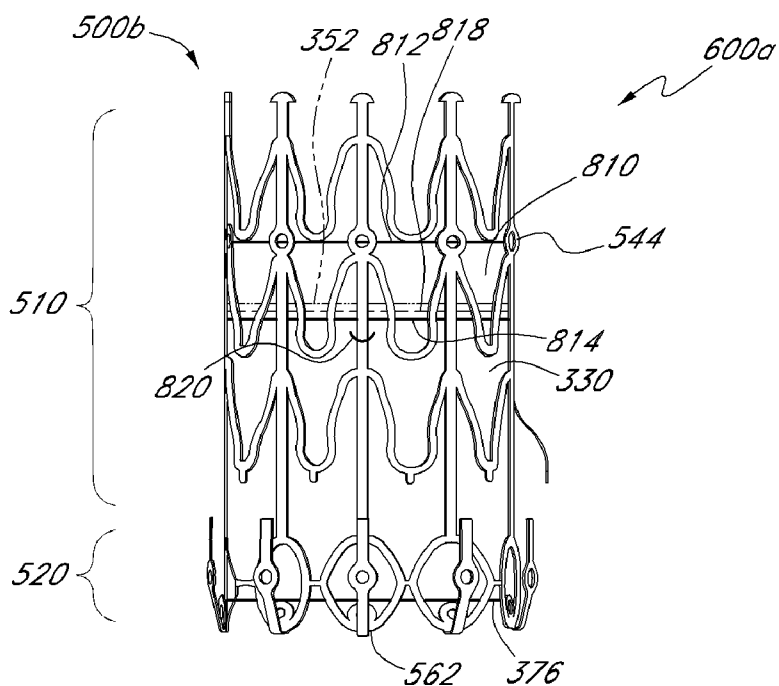
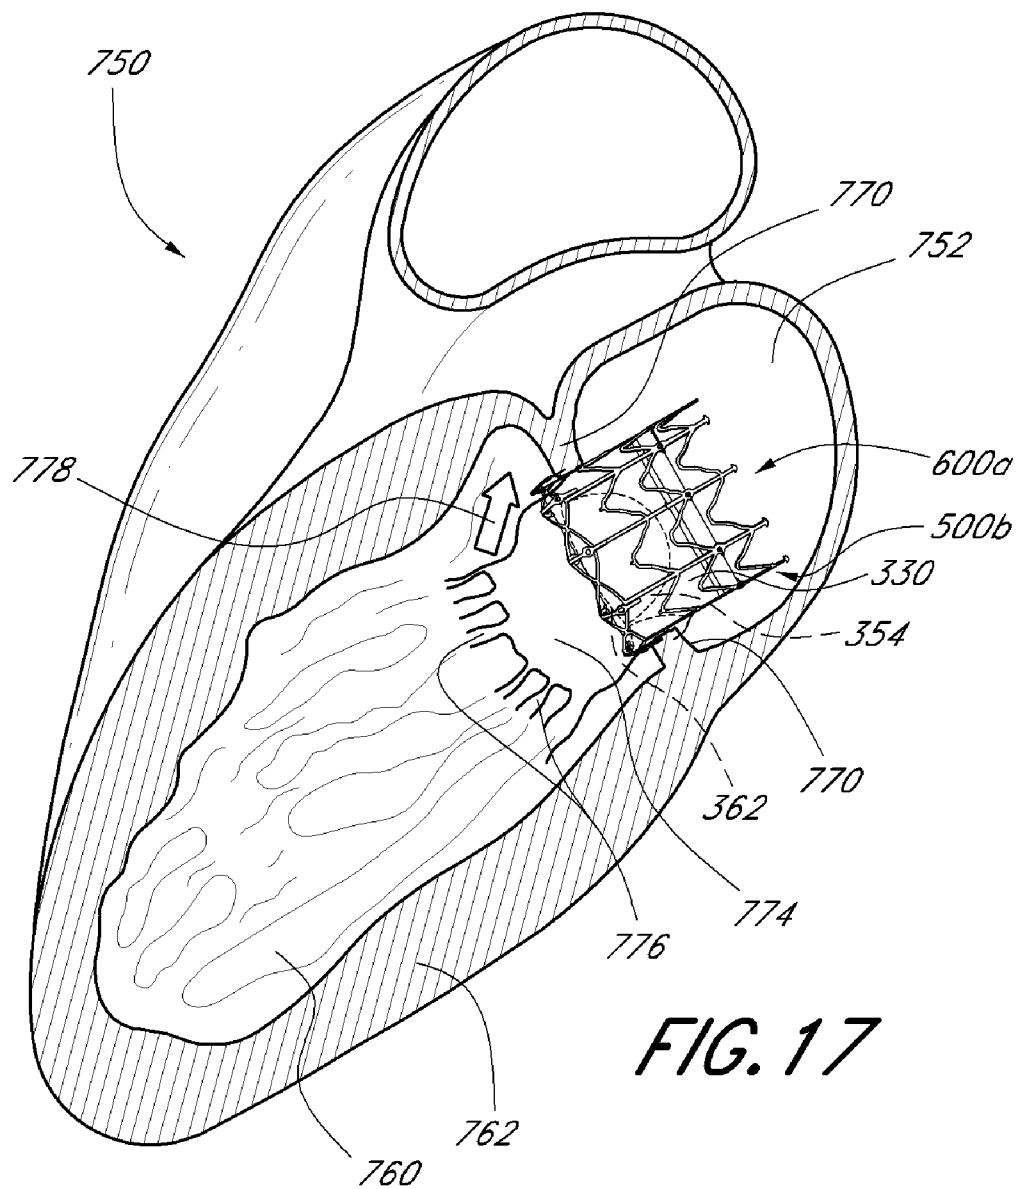


FIG. 16B









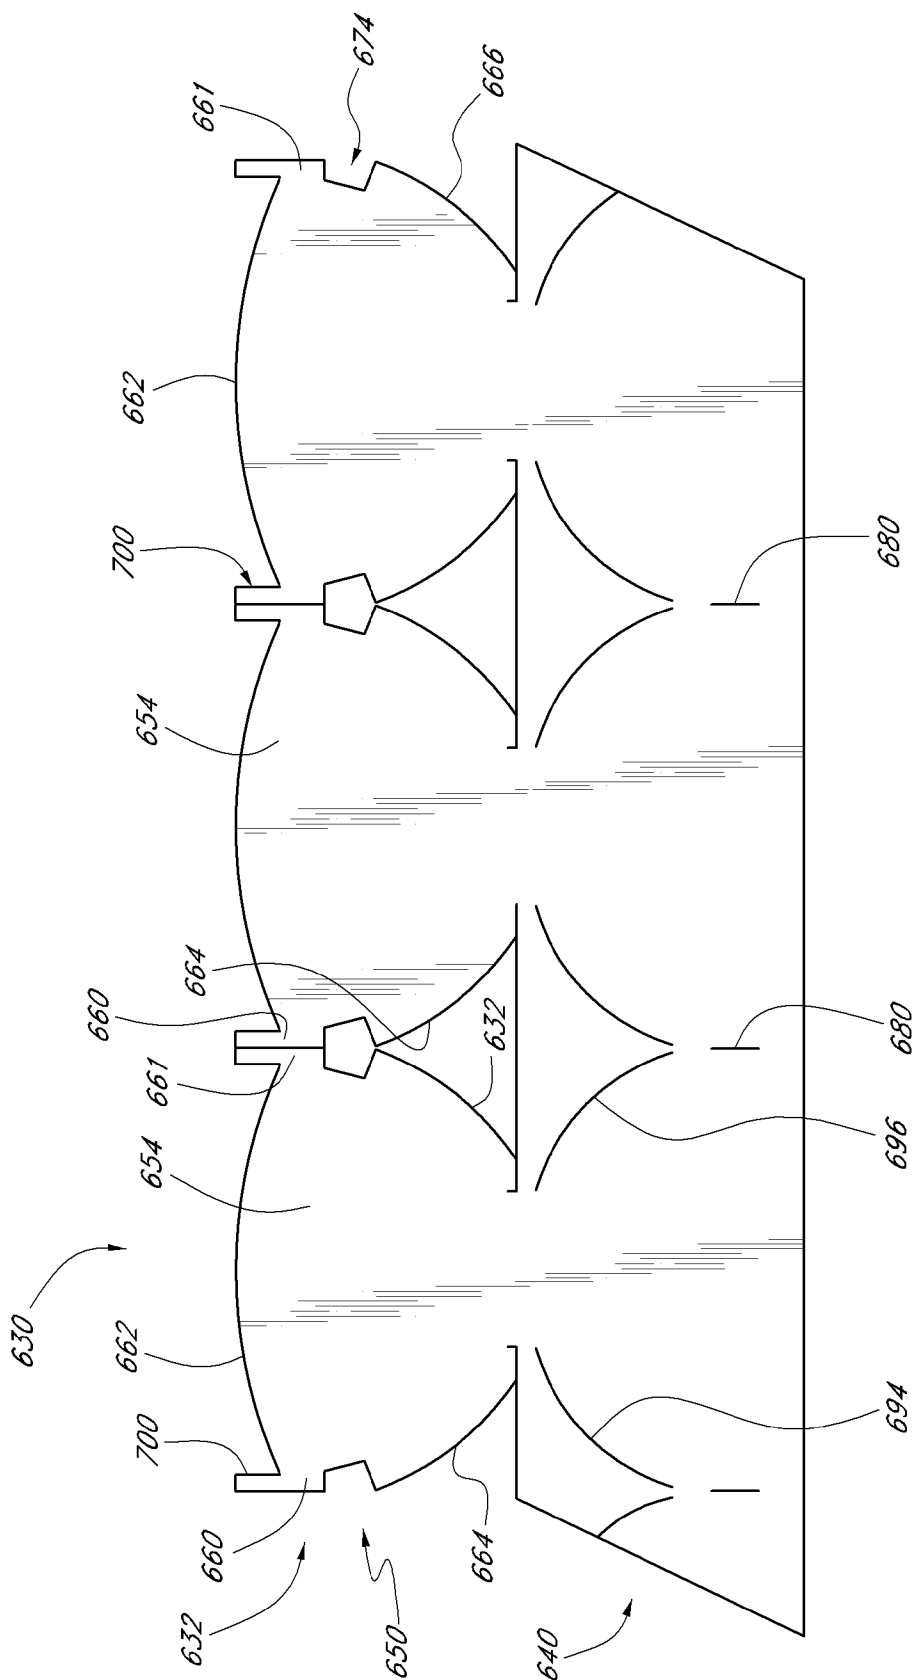


FIG. 18

**FIG. 19**

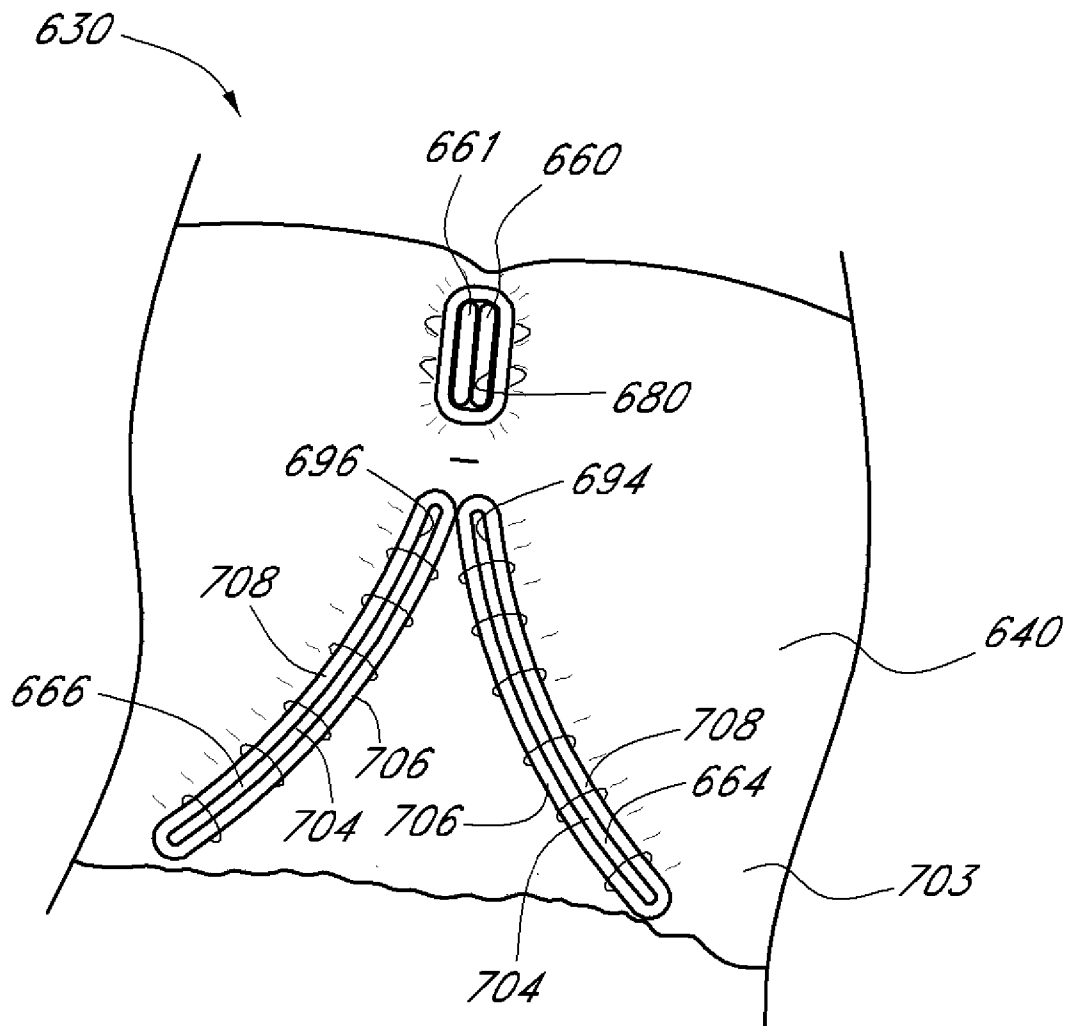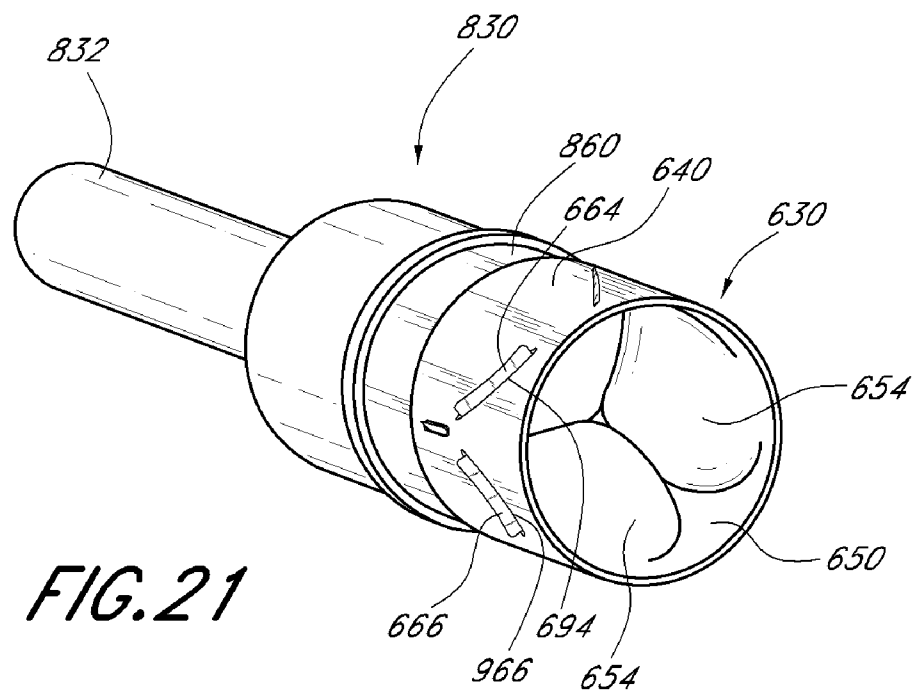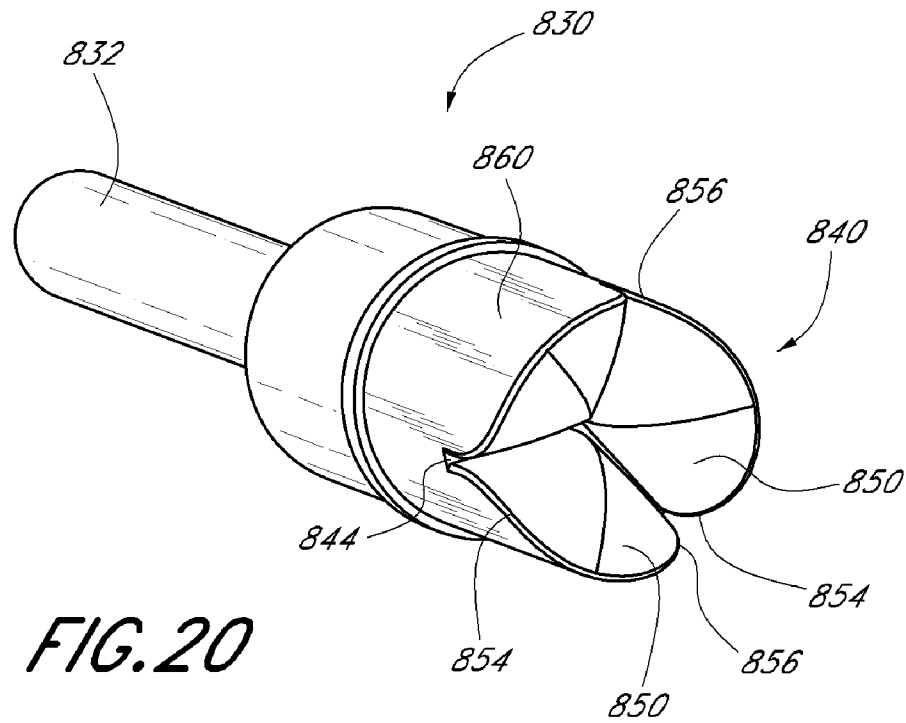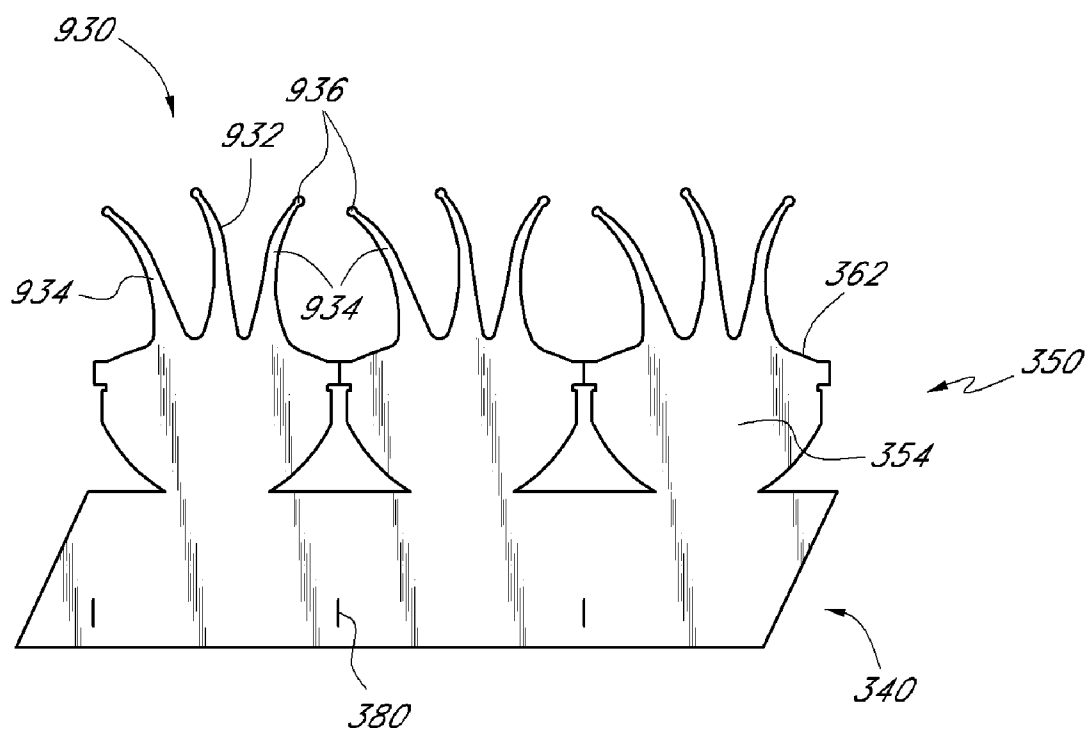

**FIG. 22**


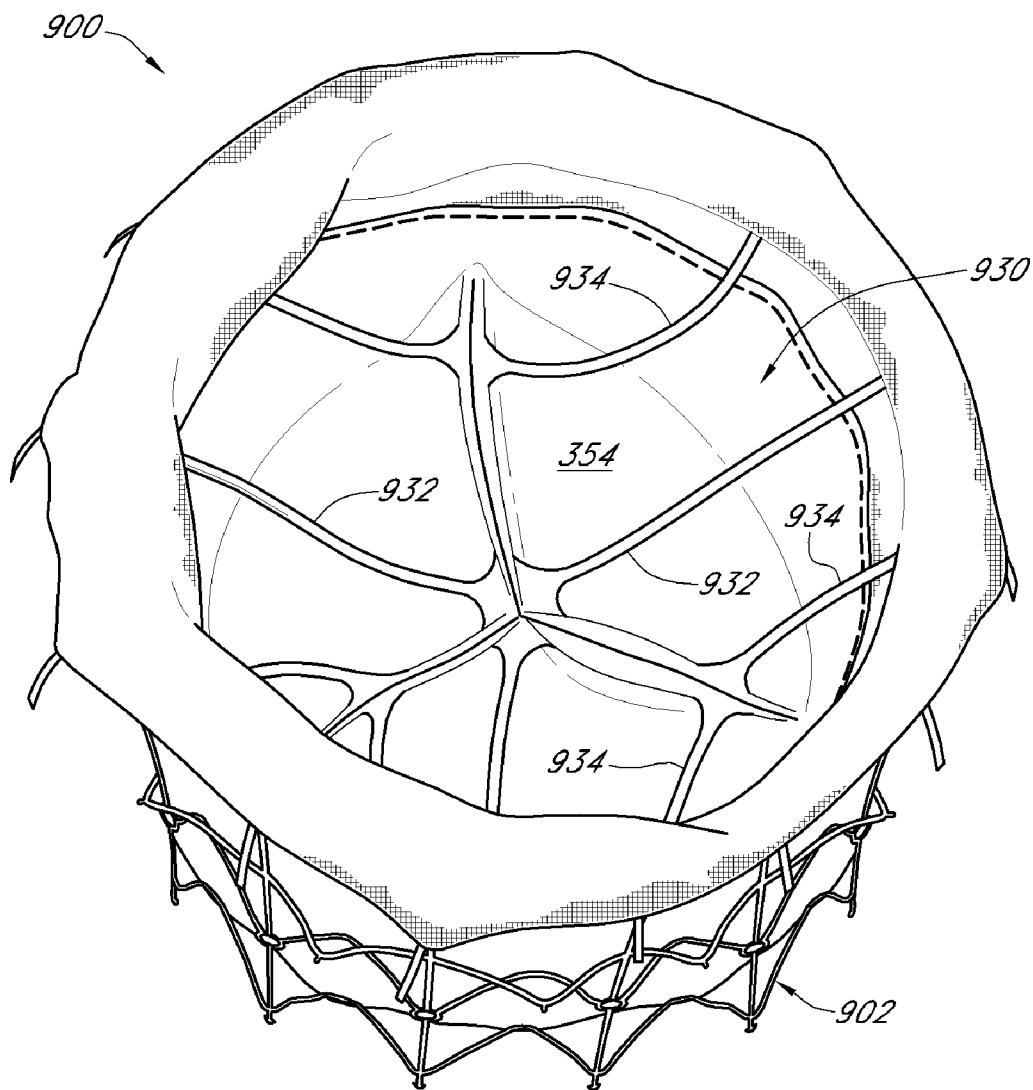


FIG. 23

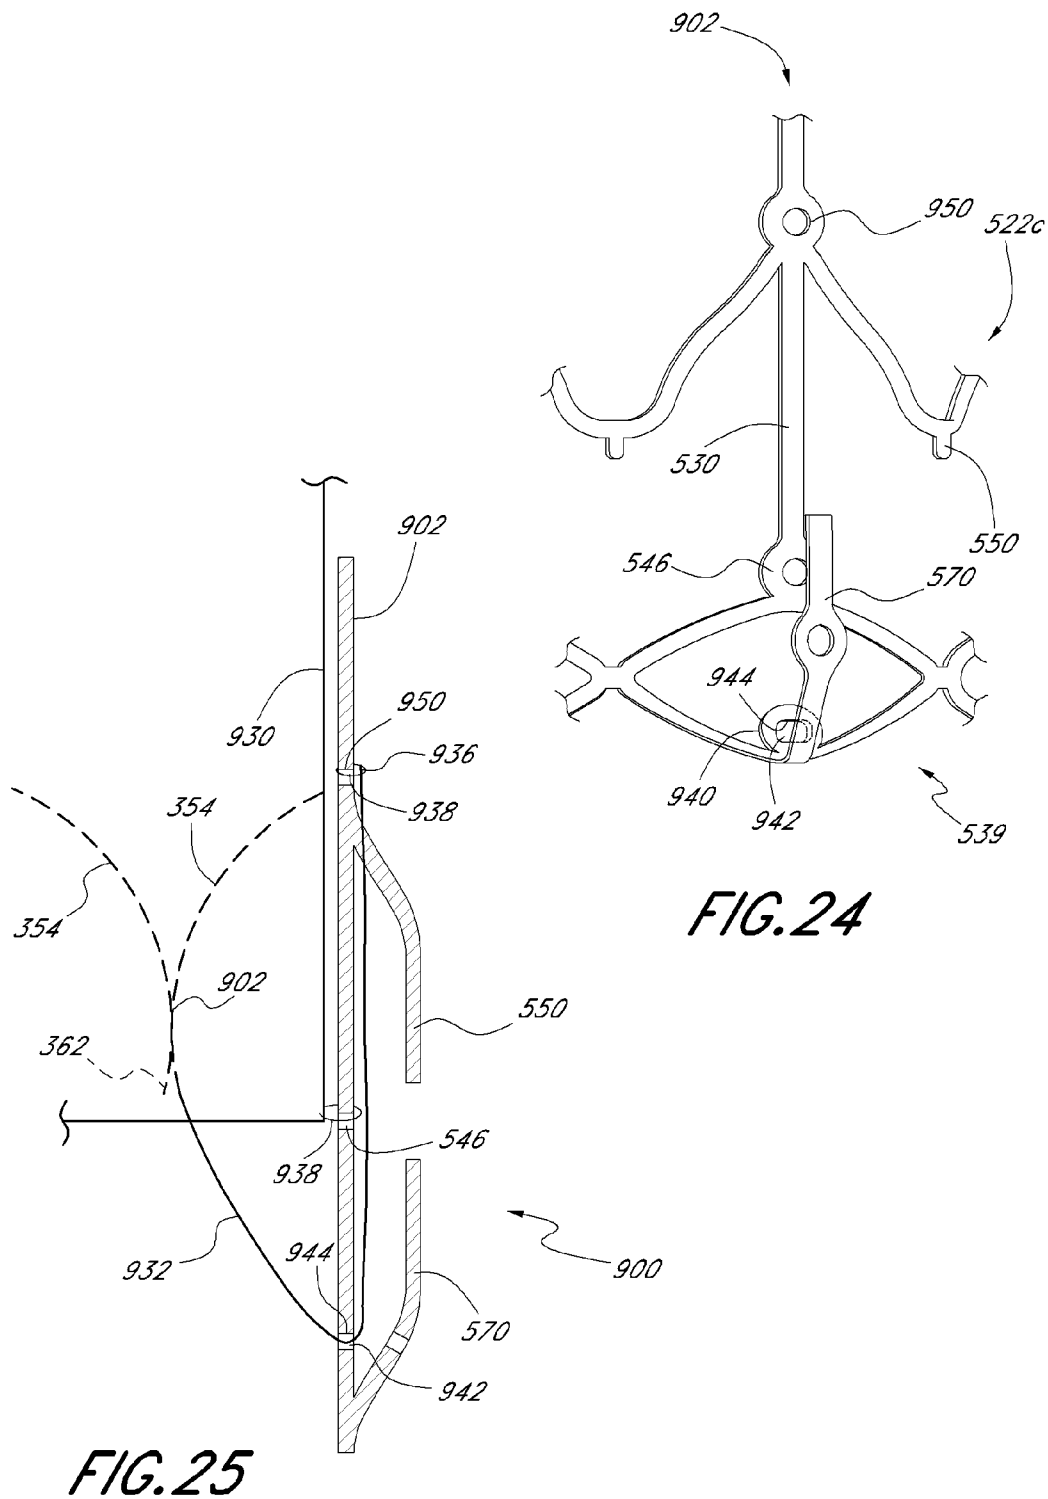

1

**HEART VALVE****CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims priority to U.S. Provisional Application Ser. No. 61/136,716, which was filed on Sep. 29, 2008. At least the portion of the Priority Application describing embodiments of a tissue-based valve body formed from flat source material, manufacturing of same, and placement upon and use in conjunction with a stent, as discussed in paragraphs [00020]-[00027] and FIGS. 1 through 8D of the Priority Application, are hereby incorporated by reference.

**BACKGROUND****1. Field of the Invention**

The present invention relates to replacement heart valves. More specifically, the invention relates to tissue- or simulated tissue-based replacement heart valves.

**2. Description of the Related Art**

Human heart valves, which include the aortic, pulmonary, mitral and tricuspid valves, function essentially as one-way valves operating in synchronization with the pumping heart. The valves allow blood to flow in a downstream direction, but block blood from flowing in an upstream direction. Diseased heart valves exhibit impairments such as narrowing of the valve or regurgitation. Such impairments reduce the heart's blood-pumping efficiency and can be a debilitating and life threatening condition. For example, valve insufficiency can lead to conditions such as heart hypertrophy and dilation of the ventricle. Thus, extensive efforts have been made to develop methods and apparatus to repair or replace impaired heart valves.

Prostheses exist to correct problems associated with impaired heart valves. For example, mechanical and tissue-based heart valve prostheses can be used to replace impaired native heart valves. More recently, substantial effort has been dedicated to developing replacement heart valves, particularly tissue-based replacement heart valves, that can be delivered with less trauma to the patient than through open heart surgery. Replacement valves are being designed to be delivered through minimally invasive procedures and even percutaneous procedures. Such replacement valves often include a tissue-based valve body that is connected to an expandable stent that is then delivered to the native valve's annulus.

Development of replacement heart valves that can be compacted for delivery and then controllably expanded for controlled placement has proven to be particularly challenging. Further, durability concerns, particularly with tissue-based replacement valves, are at the forefront. For example, tissue-based valves typically include components that are sewn together, and such seams can be sources of stress concentrations, particularly when relatively thin tissue is used.

**SUMMARY**

Accordingly, there is in the need of the art for a tissue-based heart valve with enhanced durability and which lends itself to compaction and controlled expansion in a minimally invasive and/or percutaneous delivery.

In accordance with one embodiment, the present invention provides a replacement heart valve that comprises a valve body having an outer layer and an inner layer. The outer layer is tubular and has a longitudinal axis, an upstream end and a downstream end, and is formed from a thin, flexible material. The inner layer is generally tubular, has a longitudinal axis

2

generally collinear with the outer layer, and is positioned within the tubular outer layer. The inner layer is formed from a thin, flexible material and defines a plurality of leaflets adapted to move between an open state and a coapted state. Each leaflet has a side edge and a downstream portion. Adjacent leaflets of the inner layer are connected by a commissural portion. The leaflets are attached to the outer layer along the leaflet side edges, and the commissural portions are attached to the outer layer downstream of at least a portion of the leaflet side edges;

In one such embodiment, the inner and outer layers are constructed from a single, contiguous section of the flexible material. In another embodiment, the inner and outer layers are folded relative to one another at the upstream end so that the inner layer is contiguous with the outer layer at the upstream end.

In another embodiment, the outer layer comprises a commissural slit, and an edge of one of the commissural portions of the inner layer extends at least partially through the slit. In one such embodiment, the outer layer comprises a leaflet slit shaped to complement a corresponding leaflet side edge, and the leaflet side edge extends at least partially through the slit.

In yet another embodiment, the outer layer has a plurality of windows formed therethrough, and the windows are configured so that, when the leaflets are in the coapted state, blood readily flows through the windows.

In a further embodiment, a replacement heart valve comprises a valve body and an elongate stent that can be radially compacted to a compacted state and radially expanded to an expanded state. The stent having a longitudinal axis, and the valve body is attached to the stent.

In one such embodiment, an outer layer of the valve body is on an outer side of the stent and an inner layer of the valve body is on an inner side of the stent so that the stent is sandwiched between the inner and outer layers.

In another such embodiment, the valve body is positioned so that the stent is adjacent an outer surface of the valve body. In some such embodiments, an outer layer of the valve body is connected to the stent, and an inner layer of the valve body is directly connected to the outer layer, but is not directly connected to the stent. In additional such embodiments, when the leaflets are in an open position, an outer layer of the valve body is interposed between open leaflets and the stent.

In yet another such embodiment, the stent has a foreshortening portion, which foreshortening portion is configured so that as the stent is radially compacted, the foreshortening portion longitudinally expands, and as the stent is radially expanded, the foreshortening portion longitudinally contracts.

In one embodiment with such a foreshortening stent, at least a portion of the valve body is disposed at least partially within the foreshortening portion, and the valve body is attached to the stent at one or more connecting points, which connecting points are generally aligned with an axial point along the stent longitudinal axis, so that during foreshortening the stent longitudinally moves relative to the valve body without longitudinally stretching or crushing the valve body. One such embodiment additionally comprises a longitudinally expandable material that is directly connected to the stent and to the valve body. The flexible material is directly connected to the stent at one or more connection points that are longitudinally spaced from the axial point.

In another embodiment having a foreshortening stent, the stent additionally comprises a non-foreshortening portion, and a valve body is maintained within the non-foreshortening portion.



3

In accordance with another embodiment, the present invention provides a method of making a replacement heart valve. The method includes providing a flat, flexible source material and cutting the flat material according to a desired pattern. The pattern defines first and second pattern ends, a skirt portion, and a leaflet portion. The leaflet portion defines a plurality of leaflets, commissures extending between adjacent leaflets, and each leaflet having side edges. The method additionally comprises adjoining the first and second pattern ends so as to form the flat material into a tube, folding the leaflet portion relative to the skirt portion along a fold line so that the leaflet portion is generally within the skirt portion, attaching the commissures to the skirt portion, and attaching the leaflet side edges to the skirt portion.

Another embodiment additionally comprises providing a form having a shape that is substantially the negative of a desired shape of the valve in a closed state, the form having leaflet shaping portions, and after the flat material has been formed into a tube and the commissures attached to the skirt portion, placing the valve upon the form so that the leaflets engage the leaflet shaping portions, and attaching the leaflet side edges to the skirt portion when the leaflets are engaged with the leaflet shaping portions.

A further such embodiment additionally comprises forming leaflet slits in the skirt portion, the leaflet slits generally corresponding to a desired curvature of the leaflets, and placing the valve upon the form so that the leaflets engage the leaflet shaping portions comprising extending the leaflet side edges through the leaflet slits in the skirt portion.

Another embodiment additionally comprises providing an elongate stent, and attaching the skirt portion to the stent.

In accordance with still another embodiment, a method of treating valve insufficiency of a patient by delivering a replacement heart valve is provided. The method comprises providing a replacement heart valve comprising a valve body attached to a stent, the valve body having an upstream end and a plurality of leaflets adapted to open and close, the leaflets each having a downstream portion, the stent being elongate and having an upstream end, a downstream end, and a longitudinal midpoint halfway between the upstream and downstream ends, the stent having an annulus attachment zone adapted to engage a native valve annulus, the annulus attachment zone disposed at or adjacent the downstream end of the stent, and positioning the heart valve within a patient's heart so that the annulus attachment zone of the stent engages a patient's mitral annulus, and the longitudinal midpoint of the stent is disposed within the patient's left atrium.

In one such embodiment, the step of positioning the heart valve comprises positioning the valve so that substantially all of the stent is disposed in the patient's mitral annulus or left atrium.

In another embodiment, the valve body is connected to the stent so that the leaflets are substantially within the left atrium. In other embodiments, the valve body is connected to the stent so that the downstream ends of the leaflets are disposed generally within the mitral annulus.

In accordance with yet another embodiment, the present invention provides a flexible tubular valve body defining a plurality of leaflets connected to a longitudinally stretchable portion. The valve body is less longitudinally stretchable than the longitudinally stretchable portion. In one such embodiment, the valve body and connected longitudinally stretchable portion are mounted on a stent that has a foreshortening portion, and a portion of the valve body overlaps the foreshortening portion so that when the stent foreshortens, the

4

longitudinally stretchable portion preferentially stretches or contracts so that the valve body moves longitudinally relative to the stent.

In another embodiment, a valve body having an inner layer and an outer layer, the inner layer defining a plurality of leaflets, is constructed by separately forming the inner and outer layers, attaching an upstream end of the inner layer to the outer layer, and attaching side edges and commissural tabs of the leaflets to the outer layer. In one such embodiment, slits are formed through the outer layer, and one or more of the commissural tabs and leaflets are drawn at least partially through corresponding slits and then secured to the outer layer.

In some embodiments, a replacement heart valve can comprise a valve body and an elongate frame. The valve body can define a plurality of leaflets adapted to move between an open state and a coapted state. The elongate frame can be configured to move between a radially compacted state and a radially expanded state, the frame comprising a plurality of struts. Stitches attach the valve body to the plurality of struts. At least one of the stitches can be a loose stitch configured to freely slide over the corresponding strut when the frame is moved between the radially compacted and radially expanded states.

According to some embodiments, a replacement heart valve can comprise an elongate frame and a valve body comprising an outer layer and an inner layer. The outer layer can be tubular and have a longitudinal axis, an upstream end and a downstream end. The outer layer may be formed from a thin, flexible material. The inner layer can be generally tubular, have a longitudinal axis generally collinear with the outer layer, and be positioned within the tubular outer layer. The inner layer may be formed from a thin, flexible material and define a plurality of leaflets adapted to move between an open state and a coapted state. Each leaflet can have a side edge and a downstream portion and adjacent leaflets of the inner layer can be connected by a commissural portion. The leaflets can be attached to the outer layer along the leaflet side edges, and the commissural portions can be attached to the outer layer downstream of at least a portion of the leaflet side edges. The elongate frame can be radially compacted to a compacted state and radially expanded to an expanded state. The frame can be made up of a plurality of struts, the valve body being attached to the frame struts by a plurality of stitches. At least one of the plurality of stitches can be a loose stitch configured to freely slide over the corresponding strut when the frame is radially compacted or expanded.

Other inventive embodiments and features are disclosed below.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a flat pattern for cutting a flat source material to create an embodiment of a heart valve body.

FIG. 2A is a side view of tissue cut according to the flat pattern of FIG. 1 and formed into a tube.

FIG. 2B is a perspective view of the assembly of FIG. 2A.

FIG. 3A is a perspective view of the assembly of FIG. 1 formed into a heart valve body and shown in an open position.

FIG. 3B shows the heart valve body of FIG. 3A in a closed condition and viewed from a downstream position.

FIG. 3C shows the heart valve body of FIG. 3A in a closed condition and viewed from an upstream position.

FIG. 4A is a schematic view of an embodiment of a stent frame, shown in a compacted state.

FIG. 4B shows the stent frame of FIG. 4A in an expanded state.

5

FIG. 5 is a side view of the stent frame of FIGS. 4A and B with the valve body of FIGS. 1-3 mounted thereon.

FIG. 6A is a side perspective view of another embodiment of a heart valve comprising a tissue valve body mounted on a stent frame.

FIG. 6B shows the heart valve of FIG. 6A in a closed condition and viewed from a downstream position.

FIG. 6C shows the heart valve of FIG. 6A in a closed condition and viewed from an upstream position.

FIG. 7 shows a flat pattern for cutting a flat source tissue to form another embodiment of a valve body.

FIG. 8 shows a perspective view of a valve body constructed of tissue cut according to the pattern of FIG. 7.

FIG. 9A is a close-up view of a side of the valve body of FIG. 8.

FIG. 9B is a close-up view as in FIG. 9A but showing features of another embodiment.

FIG. 10 shows a flat pattern for cutting a flat source tissue to form yet another embodiment of a heart valve body.

FIG. 11 is a schematic side view of another embodiment of a stent frame for supporting a heart valve body.

FIG. 12 is a perspective view of the stent frame of FIG. 11 with a heart valve body constructed from source tissue cut in accordance with the pattern of FIG. 10 mounted thereon.

FIG. 13 shows the heart valve of FIG. 12 in a closed condition and viewed from a downstream position.

FIG. 14 shows the heart valve of FIG. 12 placed in a mitral annulus of a human heart in accordance with one embodiment.

FIG. 15 is a schematic side section view showing opposing walls of a heart valve stent frame similar to that of FIG. 11 and schematically showing placement of an expandable fabric portion on the stent in accordance with another embodiment.

FIG. 16A is a side view of another embodiment of a heart valve, showing the valve body of FIG. 8 mounted onto a stent in accordance with another embodiment.

FIG. 16B is a side view of the assembly of FIG. 16A shown in a compacted state.

FIG. 17 shows the heart valve of FIG. 16 placed in a mitral annulus of a human heart in accordance with another embodiment.

FIG. 18 shows a flat pattern for cutting a flat source tissue to form yet another embodiment of a valve body.

FIG. 19 depicts a perspective view of a heart valve body constructed from the pattern of FIG. 18.

FIG. 20 is a perspective view of an embodiment of a tool for constructing a tissue valve body.

FIG. 21 shows the tool of FIG. 20 being used to construct a tissue valve body as in FIG. 18-19.

FIG. 22 shows a flat pattern for cutting a flat source tissue to form another embodiment of a valve body.

FIG. 23 is a perspective view of an embodiment of a heart valve having a valve body constructed from the pattern of FIG. 22 mounted on a stent.

FIG. 24 is a partial side view of a stent for use in accordance with the assembly of FIG. 23.

FIG. 25 is a schematic partial side view of a vertical cross-section of the heart valve of FIG. 24.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present specification and drawings disclose aspects and features of the invention in the context of several embodiments of replacement heart valves and portions thereof that are configured for replacement of natural heart valves in a patient. These embodiments may be discussed in connection

6

with replacing specific valves such as the patient's aortic or mitral valve. However, it is to be understood that the context of a particular valve or particular features of a valve should not be taken as limiting, and features of any one embodiment discussed herein can be combined with features of other embodiments as desired and when appropriate.

With initial reference to FIGS. 1-3, a structure for a heart valve body 30, along with methods of making the valve body 30, are described. In this embodiment, the heart valve body is constructed of a tissue-based media such as bovine pericardium. Of course, other materials such as equine and porcine pericardium, vascular tissue, as well as other natural and manmade materials that are thin, flexible and durable, may be employed. Preferably, the tissue is provided as a flat source material.

FIG. 1 illustrates a flat pattern 32 for cutting flat source tissue to form an embodiment of a heart valve body 30. More specifically, source tissue preferably is laid out in a flat format, and then cut according to the illustrated flat pattern 32. Preferably the tissue is cut by a laser, but other cutting modes and methods can be employed.

As illustrated in FIG. 1, the flat source tissue cut according to the pattern has first and second pattern ends 34, 36. A skirt portion 40 and a leaflet portion 50 are separated by a fold line 52. The illustrated leaflet portion 50 comprises three leaflets 54 connected to one another at commissural tab portions 60. Each leaflet 54 has a downstream edge 62 that preferably is curved, and also has curved, generally-opposing first and second leaflet side edges 64, 66. In accordance with the pattern 32 in the illustrated embodiment, the adjacent leaflets 54 are defined by voids 68 cut between them.

The illustrated skirt portion 40 comprises three windows 70 that are defined by apertures cut through the flat source tissue. The windows 70 each have first and second side edges 72, 74, which first and second window side edges 72, 74 are generally complementary in curvature to the first and second side edges 64, 66, respectively, of the corresponding leaflets 54. A downstream ring 76 of the skirt portion 40 preferably runs continuously from the first pattern end 34 to the second pattern end 36. Similarly, an upstream ring portion 78 of the flat pattern 32 runs continuously from the first pattern end 34 to the second pattern end 36 at and adjacent the fold line 52. Leaflet supports 80 are defined between adjacent windows 70, and share the first and second window side edges 72, 74. The leaflet supports 80 extend from the upstream ring 78 to the downstream ring 76. In the illustrated embodiment, the first and second pattern ends 34, 36 are arranged to evenly split one of the leaflet supports 80 of the skirt portion 40 and one of the commissural tab portions 60 of the leaflet portion 50.

With reference to FIGS. 2A and 2B, once the pattern 32 has been cut from the flat source tissue, the cut tissue is rolled and the first and second pattern ends 34, 36 are joined together to create a tubular structure as shown. In the illustrated embodiment, the first and second pattern ends 34, 36 are joined together by a seam that preferably employs a conventional suture material. As such, a seam 82 in the skirt portion 40 connects the first and second pattern ends 34, 36 so as to complete the leaflet support 80, and a seam 84 in the leaflet portion 50 completes the commissural tab 6.

Although sutures are used in the illustrated embodiment, it is to be understood that other methods and apparatus can be used to join the first and second ends and to make other connections when forming valve bodies. For example, in other embodiments, adhesives, clips or the like may be employed.

With additional reference to FIGS. 3A-C, once the first and second pattern ends **34**, **36** are joined so as to create a tubular structure, the leaflet portion **50** can then be folded about the fold line **52** and inverted into the interior of the skirt portion **40**. As such, the leaflet portion **50** of the valve body **30** sits within and generally abutting the skirt portion **40**.

With continued reference to FIGS. 3A-C, once folded so that the leaflet portion **50** is within the skirt portion **40**, the leaflet and skirt portions **50**, **40** are attached to one another. More specifically, the first and second leaflet edges **64**, **66** are attached to the respective first and second window side edges **72**, **74** of corresponding leaflet supports **80**. As shown, the edges **64**, **66**, **72**, **74** preferably generally align so as to be conducive to being connected by a seam. Further, the commissural tabs **60** are attached to the downstream ring **76** of the skirt portion **40**. Preferably, such attachments are accomplished through stitching in a conventional manner using conventional materials such as suture material. However, other materials, such as adhesives, may also be used. Additionally, in some embodiments, the commissural tabs can be secured to the skirt by a clip in lieu of or in addition to a stitching. Also, in still further embodiments, the leaflet and skirt portions can be formed separately and then connected at, for example, an upstream ring. Such an alternative will apply to other embodiments and features discussed herein.

Once the leaflet portion **50** has been appropriately connected to the skirt portion **40**, the valve body **30** can move between the open condition depicted in FIG. 3A to the closed condition depicted in FIGS. 3B and 3C. As shown in FIGS. 3B and 3C, when closed, the valve leaflets **54** coapt with one another so as to block blood from flowing upstream between the leaflets **54**. Also, since the leaflets **54** are sewn securely onto the skirt **40** at the supports **80**, no blood will flow between the skirt portion **40** and leaflet portion **50** at the upstream end **78** of the valve body **30**, thus preventing paravalvular leaks. In the illustrated embodiment, the windows **70** of the skirt portion **40** generally align with the leaflets **54**. As such, when the leaflets **54** are in the closed condition, blood flow is deflected by the leaflets **54** and readily flows through the windows **70**.

The valve body **30** of FIGS. 3A-C is appropriate to use to replace a patient's native valve, and embodiments employing features described in connection with the illustrated valve body **30** can be used alone or in conjunction with a stent frame. For example, in one embodiment, a valve body **30** as in FIG. 3A can be installed into the annulus of a patient's native aortic valve. In such an embodiment, the upstream ring **78** is sewn or otherwise attached to the native valve annulus, and the downstream ring **76** is attached to the aorta downstream of the annulus. As such, the valve body **30** sits in the aortic sinus. In this embodiment, the windows **70** of the skirt portion **40** are particularly useful in that when the leaflets **54** coapt, blood readily flows through the windows **70** and into the cardiac arteries that branch off of the aortic sinus.

With reference next to FIGS. 4 and 5, a heart valve body **30** as in FIG. 3 can be mounted onto a stent **90**. Such a stent can be of various designs and characteristics. For example, such a stent may be self-expandable, balloon-expandable, a hybrid, or the like.

With particular reference to FIGS. 4A and 4B, the illustrated stent frame **90** embodiment supports the valve body **30** and can be expanded from a compacted state as shown in FIG. 4A to an expanded state as shown in FIG. 4B. The illustrated stent **90** preferably is a self-expanding stent constructed of a flexible material, preferably a shape memory material such as nitinol. As it is self-expanding, the stent **90** is in a fully opened state, as depicted in FIG. 4B, when relaxed. The illustrated

stent **90** preferably is elongate from a first end **92** to a second end **94** and is tubular with a longitudinal axis **96** and a generally circular cross section. It is to be understood that in other embodiments stents can have a non-circular cross section, such as a D-shape, an oval or an otherwise ovoid cross-sectional shape. In the illustrated embodiment a plurality of spaced apart eyelets **98** are provided both at the first end **92** and at the second end **94** of the stent frame **90**. Other embodiments may be constructed without such eyelets **98**.

The illustrated stent frame **90** has a non-foreshortening portion **100** and a foreshortening portion **110**. The portions are joined at a transition **112** between the first and second ends **92**, **94**. Foreshortening refers to a behavior in which the length of the stent **90** in the foreshortening portion **110** decreases as the radius of the stent increases from the compacted state to the expanded, deployed state. As such, in FIG. 4A, which shows the stent frame **90** in a compacted state, the foreshortening portion **110** of the stent frame **90** is longer than when the stent is in the expanded state illustrated in FIG. 4B.

With continued reference to FIG. 4B, the non-foreshortening portion **100** of the illustrated stent **90** comprises a plurality of rows or rings **114a-c** of circumferentially expandable elements, or struts **115**, arranged in a zigzag pattern. The struts **115** are configured to expand and contract with a change in radius of the stent **90**. In the illustrated embodiment, the stent has three such rings **114a-c**. It is to be understood that more or fewer rings can be employed as desired to accomplish the purposes of this stent frame. In the illustrated embodiment, the respective ends of each circumferential undulating strut **115** joins an adjacent strut **115** at an apex **116**, **118** which is, in at least some embodiments, an area of preferential bending. In the illustrated embodiment, the zigzag pattern of a first **114a** and a third ring **114c** are generally in phase with one another, while the struts **115** of a second ring **114b** between the first and third rings **114a**, **114b** are generally out of phase with those of the first and third rings. It is to be understood that, in other embodiments, all or most of the rings can be in phase with one another or out of phase as desired.

With continued reference to FIG. 4B, longitudinal struts **120** extend transversely across the rings **114a-c** of the non-foreshortening portion **100** from the first end **92** of the frame **90** to the transition **112**. More particularly, each ring **114** shares a common longitudinal strut **120**. The longitudinal struts **120** extend through apices **116** of adjacent rings **114**, and preferably extend the entire length of the nonforeshortening portion **100**. Preferably, the longitudinal struts **120** comprise a nonexpandable rod or bar. The apices **116** that are connected to the longitudinal struts **120** are referred to as "connected" apices **116**. Apices **118** not connected to longitudinal struts **120** are referred to as "free" apices **118**.

As noted above, the longitudinal struts **120** are not substantially expandable in a longitudinal direction. As such, even though the undulating struts **115** provide flexibility in radial expansion or compaction, as the stent **90** changes radial size between the compacted and expanded states, the longitudinal length of the stent in the nonforeshortening portion **100** remains substantially unchanged. In other embodiments, the longitudinal struts may include expandable elements that may allow the struts to expand somewhat longitudinally. However, such longitudinal expansion would not be directly tied to any change in strut radius.

With continued reference to FIGS. 4A and 4B, the foreshortening portion **110** of the illustrated stent frame comprises a first and a second circumferential ring **124a**, **124a** that are each made up of interconnected cells **130**. Each cell **130** comprises a plurality of strut members **132** that are interconnected in such a way that when the stent expands radially, the

cell **130** becomes longitudinally shorter. In the illustrated embodiment, each cell **130** is enclosed and is configured in generally a diamond-shaped pattern. Circumferential and longitudinal cell connectors **134**, **136** connect adjacent cells **130** to one another. An upper end **140** of each cell **130** in the first ring **124a** is connected to a second end **142** of a corresponding longitudinal strut **120** of the nonforeshortening portion **100** at the transition **112**.

Although the illustrated foreshortening cells **130** are arranged in a diamond pattern, it is to be understood that other configurations can be employed. For example, in other embodiments, the foreshortening cells can be generally oval-shaped, and in further embodiments the cells may not be fully enclosed. As discussed above and illustrated in FIGS. **4A** and **4B**, when the illustrated stent **90** is expanded from the compacted state to the expanded state, the nonforeshortening portion **100** of the stent remains substantially the same length while the foreshortening portion **110** of the stent becomes substantially shorter in length.

With continued reference to FIGS. **4A** and **4B**, a plurality of first anchors **150** extend from the transition **112** into the foreshortening portion **110**. Preferably, each of the anchors **150** also extends generally radially outwardly from the stent **90** so that a tip **152** of each first anchor **150** is spaced from the cells **130**. Similarly, a plurality of second anchors **154** extend from the foreshortening cells **130** at or adjacent the second end **94** of the stent frame **90** and extend into the foreshortening portion and radially outwardly from the stent so that a tip **156** of each second anchor **154** is spaced from the cells **130**. A first distance is defined between the tips **152**, **156** of opposing first and second anchors **150**, **154** when the stent **90** is in the compacted state, and a second distance is defined between the tips **152**, **156** of opposing first and second anchors **150**, **154** when the stent **90** is in the expanded state. As shown, the second distance is substantially less than the first distance. This arrangement enables the foreshortening portion **110**, with its anchors **150**, **154**, to grasp onto tissues so as to hold the stent in place.

In preferred embodiments, the stent **90** may be deployed into a heart valve annulus, and positioned when compacted so that the tips **152**, **156** of the opposing first and second anchors **150**, **154** are disposed on opposite sides of the native annulus. As the stent is expanded, the opposing first and second anchors are drawn closer together so as to grasp opposite sides of the native annulus and securely hold the stent in position. As such, the stent can be held securely in position without requiring a substantial radial force against the native annulus. Applicant's copending U.S. patent application Ser. No. 12/084,586, which was published on Aug. 27, 2009 as U.S. Publication No. 2009/0216314, discusses embodiments of foreshortening stents with anchors, and can be referred to for further discussion of certain aspects of the illustrated stent embodiment. The discussion in the copending application concerning structure and operation of embodiments of a foreshortening stent, particularly a foreshortening stent having anchors, is expressly incorporated by reference herein.

In the illustrated embodiment, the stent is made of a shape-memory alloy, specifically nitinol. It is to be understood, however, that other materials, including metals, metal alloys and non-metals can be employed as appropriate.

In a preferred embodiment, the stent frame is initially provided as a circular cross-section nitinol tube. The tube is laser cut according to a pattern corresponding to the struts, cells and the like. The cut tube preferably is electrochemically polished to as to remove rough edges. The cut and polished nitinol tube may be shaped in accordance with a desired manner, such as shaping the anchors to extend radially out-

wardly, and the nitinol stent frame may be heated-treated to both establish the shape memory and to obtain desired elasticity attributes.

With specific reference next to FIG. **5**, an embodiment of a replacement heart valve **160** is illustrated in which the valve body **30** of FIGS. **1-3** is disposed on the stent frame **90** of FIG. **4**. In this embodiment, the skirt portion **40** of the valve body **30** is disposed on the outside of the stent **90** and the leaflet portion **50** is disposed on the inside of the stent **90**. The downstream ring **76** and leaflet supports **80** are attached to the stent **90**. Apertures **162** are formed through the skirt **40** as appropriate to accommodate the anchors **150**, **154**. The anchors **150**, **154** and corresponding apertures **162** are configured so that when the stent **90** is compacted, the anchors still extend through the apertures. More specifically, when the stent **90** is compacted and the foreshortening portion **110** lengthens, the anchors **150**, **154** move within the corresponding apertures **162**, but the anchor tips **152**, **156** do not exit the apertures **162**.

In one embodiment, during manufacture, the skirt portion **40** is attached to the stent **90** before any portion of the leaflet portion **50** is attached to the skirt portion **40**. In some embodiments, the skirt portion **40** is fit over the stent **90** prior to folding the leaflet portion **40**. In other embodiments, the stent is slid between the leaflet portion and skirt portion after they are folded. After the stent **90** is sandwiched between the leaflet portion **50** and skirt portion **40**, the leaflets **54** are attached to the leaflet supports **80** and the commissural tabs **60** are attached to the downstream ring **76**. In some embodiments, such attachments are made such that at least portions of the valve body can move relative to the stent while the stent is foreshortening.

In another embodiment, the skirt portion **40** of the valve body **30** is attached to the outside of the stent **90**, and the stent and valve body are compressed into the compacted state without the leaflet portion **50** being folded relative to the skirt portion **40**. As such, the leaflet portion **50** is not in contact with or directly connected to the stent **50**. During a procedure to deploy the replacement valve into a patient, the partially-completed assembly is advanced into place and the stent is expanded so that the anchors grasp the patient's native annulus. The leaflet portion **50** of the valve is then folded over and into the stent **90**, and is then attached, while in place, to the skirt portion **40**.

With reference next to FIGS. **6A-C**, another embodiment of a heart valve **200** is illustrated in which a stent frame **290** is sandwiched between an inner layer **250** and an outer layer **240** of a valve body **230**. In preferred embodiments the valve body **230** is formed of a single piece of tissue wrapped about the stent frame **290** so that the skirt portion **240** is the outer layer and sits on and is attached to the outside of the stent **290**. The leaflet portion **250** is the inner layer. It sits within the interior of the stent **290** and is attached to the skirt portion **240**. In the illustrated embodiment, first and second side edges **264**, **266** of leaflets **254** are tightly sutured to first and second side edges **272**, **274**, respectively, of leaflet support portions **280**. Commissural tabs **260** of the leaflet portion **250** are attached to a downstream ring **276** of the skirt portion **240**. In this arrangement, the connection between the leaflet portion **250** and the skirt portion **240** securely holds onto the stent **290**, but also prevents leaks. Further, the downstream ring **276**, to which the commissural tabs **260** are attached, helps to distribute forces exerted on the commissural tabs during valve closure.

Stent anchors **250**, **254** in the embodiment illustrated in FIGS. **6A-C** extend through aperture **262** in an upstream ring **278** of the valve body **230**. In the illustrated embodiment, the

11

stent anchors **250**, **254** have a widened portion **285** towards their tips **252**, **256**. As such, during elongation of a foreshortening portion **210** of the stent **290** in which the anchors **250**, **254** are drawn apart from each other, the enlarged portions **285** of the anchors help prevent the tissue valve body **230** from slipping off the anchors or, more specifically, prevent from the anchor tips **252**, **256** from slipping through their associated apertures **262**.

In additional embodiments, a valve body **230**, **30** as depicted in FIGS. **6A-C** or as in FIGS. **1-4** can be mounted to a stent frame that does not foreshorten upon expansion. As in embodiments above, the skirt **40**, **240** can be disposed on the outside of the stent frame, and the leaflet portion **50**, **250** is inverted and folded so as to be within the stent frame, but aligned with the skirt portion. The leaflet portion and skirt portion are then sewn together as appropriate so that at least part of the stent frame is sandwiched between the portions. Preferably the valve body material is contiguous at the fold line between the skirt portion and leaflet portion, which is at or adjacent to the upstream end of the heart valve, thus further decreasing the likelihood of paravalvular leaks.

With reference next to FIGS. **7-9A**, another embodiment of a valve body **330** is depicted. FIG. **7** discloses a flat pattern **332** for cutting flat source tissue to assemble into the valve body embodiment. The illustrated valve body pattern **332** has first and second ends **334**, **336**, and defines a skirt portion **340** and a leaflet portion **350**. The leaflet portion **350** comprises three leaflets **354**, each having a downstream leaflet edge **362** and opposing first and second leaflet side edges **364**, **366**. An aperture **368** is cut between adjacent leaflets **354** and the cut out tissue removed so as to define the leaflets **354**.

Each of the leaflets **354** has a first and a second opposing commissural tab portion **360**, **361**. In the illustrated flat pattern **332**, the commissural tab portions **360**, **361** of adjacent leaflets **354** are initially co-formed as a connection **363** between adjacent leaflets. During cutting according to the flat pattern, this commissural connection **363** between adjacent leaflets **354** is cut so as to define the first and second commissural tabs **360**, **361** of adjacent leaflets, which first and second commissural tabs **360**, **361** have first and second cut ends **370**, **371**, respectively. In the illustrated embodiment, a relatively small jog, or offset **374**, is cut between each leaflet side edge **364**, **366** and the adjacent commissural tab **360**, **361**.

With continued reference to FIG. **7**, preferably the skirt portion **340** of the valve body **330** is substantially contiguous, without significant cut-outs such as the windows of the FIG. **1-4** valve body. The skirt **340** has a downstream edge **376**, and is connected to the leaflet portion **350** at a fold line **352**. In the skirt portion **340**, the valve pattern's first and second ends **334**, **336** are cut to be diagonal relative to the downstream edge **376**, which preferably is parallel to the fold line **352**. In the illustrated embodiment, commissural slits **380** are cut into the skirt portion **340** so as to be generally aligned with the cut edges **370**, **371** of adjacent first and second commissural tabs **360**, **361**.

With specific reference next to FIG. **8**, the valve body **330** is constructed by folding the skirt portion **340** relative to the leaflet portion **350** along the fold line **352**, and securing the diagonal ends **334**, **336** of the skirt portion **340** together to establish the tubular shape of the valve body **330**. In this arrangement, an inner surface **382** of the skirt portion **340** faces outer surfaces **384** of the leaflets **354**, and an interior **386** of the valve body **330** is defined by the inner surface **382** of the skirt portion **340**. Inner surfaces of the first and second commissural tab portions **360**, **361** of adjacent leaflets **354** are engaged with one another, and the engaged tabs **360**, **361** are passed through the corresponding commissural slit **380** of the

12

skirt portion **340**. With specific reference also to FIG. **9A**, which is a close-up view taken from outside the skirt portion, the engaged first and second commissural tab portions **360**, **361** are arranged so that their cut ends **370**, **371** are facing generally radially outwardly and are adjacent the outer surface **390** of the skirt portion **340**.

The engaged commissural tab portions **360**, **361** are connected to one another, preferably by sutures **392**. In the illustrated embodiment, a slit edge portion **394** immediately surrounding the slit **380** is made to engage the outer surfaces **396** of the commissural tabs **360**, **361** so that a cut edge **397** of the slit **380** faces radially outwardly as do the cut ends **370**, **371** of the tabs **360**, **361**. The slit edge portion **394** and engaged commissural tabs **360**, **361** then are all sewn together as shown in FIG. **9A**.

In the illustrated embodiment, the inner surface **382** of the skirt **340** in the slit edge portion **394** engages an outer surface of the tabs **360**, **361**. In still other embodiments, the engaged commissural tabs **360**, **361** are first sewn-together on the outside of the skirt **340**, and the sewn-together commissural tabs **360**, **361** are then sewn onto the tissue surrounding the slit **380**. In another embodiment, the engaged commissural tabs **360**, **361** are not sewn to one another. Instead, each tab is folded adjacent its cut edge **370**, **371** to engage the outer surface **390** of the skirt portion **340** adjacent the slit **380**, and is then sewn to the skirt. In another such embodiment the engaged portion of the commissural tabs **360**, **361** can also be sewn together, or held together by clips or the like.

With continued reference to FIGS. **7-9A**, the first and second leaflet side edges **364**, **366** are also sewn to the skirt portion **340**. As such, a good seal is sewn between the leaflets **354** and the skirt portion **340** so as to prevent any blood leakage therebetween during operation of the valve. FIGS. **9A** and **B** show first and second seams **398**, **399** that attach the leaflets **354** to the skirt along the first and second leaflet side edges **364**, **366**.

The offset **374** between the leaflet side edges **364**, **366** and the tabs **360**, **361** facilitates a clean transition between the tabs, which extend through the commissural slit **380**, and the leaflet side edges, which are sewn to the inner surface **382** of the skirt portion **340**. Preferably the leaflet edge in the offset **374** also engages the skirt.

The valve body **330** can be sewn together in several ways. In another embodiment, the commissural slits **380** can be used as a guide during folding of the leaflet portion **350** over the skirt portion **340**, and the operator is careful to make sure the leaflets **391** are properly aligned. In another embodiment, prior to forming the valve body into a tube, but after folding, at least one and preferably at least two of the leaflets **354** are sewn onto the skirt **340**. Sewing the leaflets onto the skirt when still in a flattened state can be more convenient. This method also enables reliable placement of the leaflets **354** in the correct position relative to the skirt **340**, and maintenance of them in a correct placement during suturing. Also, since at least one of the leaflets is already sewn securely in place before the valve body **330** is formed into a tube by connecting the first and second skirt ends **334**, **336**, the previously-connected leaflet or leaflets function as a guide and reference point to assist in proper placement and sewing of the remaining leaflet(s).

Of course, in other embodiments, the valve body **330** can be rolled into a tube prior to folding and/or prior to attaching the leaflets **350** to the skirt portion **340**. For example, in one embodiment the commissural tabs **360**, **361** are attached and put in place once the valve body **330** is rolled into a tube. Once

13

secured in place, the tabs **360**, **361** serve as a guide to help maintain the leaflets **354** in a correct position while they are attached to the skirt **340**.

In another embodiment, a valve body **330** is provided having a structure substantially as in the valve body of FIGS. **7** and **8**, except that the commissural connection **363** between adjacent leaflets **354**, which in FIG. **7** is cut to form opposing commissural tabs **360**, **361**, is not cut, but instead remains as a commissural tab **363** connecting adjacent leaflets **354**. Such an embodiment can be constructed substantially as described above; however, only the commissural tabs **360**, **361** at the first and second pattern ends **334**, **336** have cut edges **370**, **371** so as to be constructed as shown in FIG. **A**.

With specific reference to FIG. **9**, in an embodiment having a contiguous commissural tab **363** between the leaflets **354**, each tab **363** preferably is folded so that inner surfaces of the tab **363** are engaged. The folded tab **363** is passed through the corresponding commissural slit **380**. Each folded commissural tab **363** is sutured to the skirt portion **340**, preferably in a manner similar to the embodiments discussed above.

With reference next to FIG. **10**, another embodiment of a flat pattern **432** for cutting a valve body **430** from a flat source tissue is illustrated. In this embodiment, the valve body **430** is divided into a skirt portion **440** and a leaflet portion **450**. The leaflet portion **450** comprises three leaflets **454**, each having a curved downstream leaflet edge **462** and curved first and second side edges **464**, **466**. Opposing first and second commissural tab portions **460**, **461** are also defined on each leaflet **454**. In the illustrated pattern, the commissural tab portions **460**, **461** and side edges **464**, **466** are formed by removing tissue between the leaflets **454**, including between adjacent first and second tab portions of adjacent leaflets. Three commissural slots **480** are cut through the skirt portion **440** generally corresponding to the placement of the commissural tabs **460**, **461**. The slots **480** of the illustrated embodiment are formed by cutting and removing a portion of tissue, as opposed to simply cutting a slit as in some other embodiments. Once cut from source tissue, the valve body **430** can be constructed in a manner sharing similarities with the valve body **330** of FIGS. **7-9**.

With reference next to FIG. **11**, another embodiment of a stent frame **500** is illustrated. In the illustrated embodiment, the stent frame **500** comprises a nonforeshortening portion **510** and a foreshortening portion **520**. The nonforeshortening portion **510** comprises three rings **522a-522c** of undulating circumferentially expandable struts **524** that connect to one another at apices **526**, **528**. Longitudinal struts **530** have first and second ends **532**, **534**, and extend from a first end **538** toward a second end **539** of the stent **500** but terminate at a transition **540** from the nonforeshortening portion **510** to the foreshortening portion **520**. The apices that intersect with the longitudinal struts **530** are referred to as "connected" apices **526**, and apices between connected apices **526** are referred to as "free" apices **528**.

In the illustrated embodiment, a first ring **522a** is disposed adjacent the first end **538** of the stent and a second ring **522b** is disposed adjacent the first ring **522a**. A set of first eyelets **544** are formed at the connected apices **526** of the second ring **522b**. A set of second eyelets **546** are also formed at the second ends **534** of each longitudinal strut **530**, which in the illustrated embodiment is also the transition **540**. In a third ring **522c**, the free apices **528** each comprise a protuberance **550** extending therefrom, which protuberance can also be referred to as an apical anchor **550**. Preferably the struts **524** in the third ring **522c** are pre-shaped so as to flare radially outwardly when the stent frame **500** is in an expanded state as shown in FIG. **11**.

14

With continued reference to FIG. **11**, the foreshortening portion **520** of the illustrated stent frame **500** comprises a ring **552** of generally diamond-shaped cells **555** connected to one another at connectors **556**. A first end **560** of each cell **555** is connected to the nonforeshortening portion **510** at the second eyelets **546**. As in embodiments discussed above, the foreshortening cells **555** are configured so that as the stent frame **500** is radially compacted, the foreshortening portion **520** of the stent becomes longitudinally longer and, correspondingly, when the stent frame is expanded radially, the foreshortening portion **520** shortens.

A second end **562** of each cell **555** in the foreshortening portion **520** is attached to an anchor **570** that extends generally radially outwardly and toward the first end **538** of the stent. An anchor eyelet **572** is formed in each anchor **570**, preferably between a base **574** and a tip **576** of each anchor **570**. During operation, and consistent with other embodiments discussed herein, as the stent **500** in a compacted state is placed at a native heart valve annulus, the compacted stent is first arranged so that the annulus is disposed between the apical anchors **550** and the anchor tips **576**. The stent **500** is then allowed to expand, prompting foreshortening, which brings the anchor tips **576** closer to the apical anchors **550** and grasps the native annulus therebetween. In the illustrated embodiment, the apical anchors **550** are not collinearly aligned with the end anchors **570**.

With additionally reference to FIGS. **12** and **13**, an embodiment of a replacement heart valve **600** comprises a valve body **330** as in FIGS. **7-9** attached to a stent frame **500** as in FIG. **11**. In this embodiment, however, the entire valve body **330** is disposed inside the stent **500**. More specifically, and as illustrated in FIG. **12**, the skirt portion **340** of the valve body **330** is sewn to the first eyelets **544** of the stent. In the illustrated embodiment, the fold line **352** of the valve body **330** is hemmed, and certain stitches **606** of a hem seam **610** also engage the first eyelets **544** in the nonforeshortening portion **510** of the stent **500**. In this illustrated embodiment, the hemmed fold line **352** becomes an upstream end **612** of the valve body **330**.

With continued reference to FIGS. **12** and **13**, an elongate tubular portion **620** of flexible, longitudinally expandable fabric is attached to the downstream end **376** of the skirt portion **340** in the illustrated embodiment. More particularly, a first end of the fabric **622** is sewn to the downstream end **376** of the skirt portion about the circumference of the skirt portion by a downstream seam **624**. Also, the fabric **620** preferably is connected to the outer surface of the skirt **340**, and is also sewn onto the second eyelets **546** of the stent frame **500**. Preferably, the fabric **620** is also sewn to the foreshortening cells **555** at several points by connector stitches **626**.

In the illustrated embodiment, the fabric **620** curves around the second end **539** of the stent frame **500**, generally following the curvature of the downstream anchors **570**. Second end **628** of the fabric portion **620** is sewn to the anchor eyelets **572**. Preferably, the flexible fabric **620** is sufficiently expandable to move with the foreshortening portion **520** as the stent **500** moves between the compacted state and the deployed, relaxed expanded state. As such, in the illustrated embodiment, the tissue valve body **330** is confined to the nonforeshortening portion **510** of the stent and the flexible fabric **620** spans the foreshortening portion **520** of the stent. Thus, the tissue valve body **330** is not subject to longitudinal expansion and contraction with the stent **500**.

In the illustrated embodiment, the tissue portion of the valve body **330** is sewn directly to the stent frame **500** at only the upstream end **612**. The downstream edge **376** of the skirt portion **340** is attached to the fabric **620**, which fabric is sewn

15

directly to the stent **500** at the second eyelets **546** via the downstream seam **624**. In another embodiment, the same seam **624** that connects the fabric **620** to the skirt **340** also connects the skirt **340** to the second eyelets **546**.

With continued reference to FIGS. 7-9 and 11-13, the illustrated embodiment of an assembled heart valve **600** comprises two layers of tissue, preferably formed from a single, contiguous piece of tissue. The leaflet portion **350** of the valve, which includes the leaflets **354**, is sewn directly only to the skirt portion **340**. As such, during valve operation between open and closed states, the leaflet portion **350**, and specifically the leaflets **354**, directly engages only the skirt portion **340**. In turn, the skirt portion **340** is attached to and interacts with the stent **500** and other materials such as the downstream fabric portion **620**.

It is to be understood that, in other embodiments, a portion or all of what has been shown as the fabric portion **620** in the embodiment illustrated in FIGS. 12 and 13 can be replaced by providing a longer skirt portion of the tissue valve portion. It is also to be understood that, in additional embodiments, the illustrated valve body **330** can be used with a nonforeshortening stent.

With reference next to FIG. 14, a schematic representation of the heart valve **600** as discussed above in connection with FIGS. 12 and 13 is depicted installed in a human heart **750**. The heart is shown in cross-section, and represents typical anatomy, including a left atrium **752** and left ventricle **760**. The left ventricle **760** is defined by a muscular wall **762**. The left atrium **752** and left ventricle **760** communicate with one another through a mitral annulus **770**. Also shown schematically in FIG. 14 is a native anterior mitral leaflet **774** having chordae tendinae **776** that connect a downstream end of the anterior mitral leaflet **774** to the muscle wall **762** of the left ventricle **760**. A left ventricle outflow tract **778** extends toward the top of the left ventricle **760**.

As shown in FIG. 14, the valve **600** of FIGS. 12-13 is disposed so that the mitral annulus **770** is grasped between the anchors **570** and apical anchors **550** in accordance with a method of aligning and deployment of the stent **500** discussed previously. As such, all or most of the stent **500** extends into the left atrium. The portion of the stent **500** disposed upstream of the annulus **770** can be referred to as being positioned supra-annularly. The portion generally within the annulus **770** is referred to as positioned intra-annularly. The portion downstream of the annulus is referred to as being positioned sub-annularly. In the illustrated embodiment, only a part of the foreshortening portion is positioned intra-annularly or sub-annularly, and the rest of the stent **500** is supra-annular.

In the illustrated embodiment, the anterior mitral leaflet **774** has not been removed prior to deploying the replacement valve **600**. Preferably, the posterior mitral leaflet (not shown) also has not been removed prior to deploying the replacement valve. However, in other embodiments, one or both of these natural valve leaflets may be removed before deploying the replacement valve.

With the stent **500** placed mostly supra-annularly within the left atrium **752**, the stent **500** does not interfere with left ventricle function during pumping. More specifically, the stent **500** does not interfere with blood flow from the left ventricle **760** through the outflow tract **778** and does not interfere with deformation of the left ventricle **760** as the muscle wall **762** contracts during pumping. In the illustrated embodiment, the valve body **330** is attached to the stent **500** so that the downstream edges **362** of the valve are generally within the mitral annulus **770**. This is referred to as intra-annular placement of the valve body **330**.

16

With reference next to FIG. 15, a schematic cross-sectional side view schematically showing a portion of a stent **500a** and fabric portion **620a** of another embodiment. This embodiment is similar to that of FIGS. 12 and 13, except that the fabric portion **620a** extends beyond anchor eyelets **572a** and up to anchor tips **576a**. Preferably the fabric **620a** is wrapped about the anchor tips **576a** and secured in place with a seam around the circumference of the fabric **620a** so as to form a generally contiguous band at the tips **576a** of the anchors **570a**. As such, each anchor **570a** will contact the native valve annulus through the fabric **620a**.

With reference to FIG. 16A, another embodiment of a heart valve **600a** is shown. The illustrated heart valve **600a** employs a valve body **330** as discussed above in connection with FIGS. 7-9 mounted on a stent **500b** that, for demonstration purposes, is mostly similar to the stent **500** of FIGS. 11-13. As indicated in FIG. 16A, stent **500b**, being almost the same as stent **500**, includes most of the same structure and uses the same reference numbers. Such structure is described in connection with the discussion of stent **500** above.

In the illustrated stent **500b**, a plurality of distal eyelets **800** are provided at the downstream end **539** of the stent **500b**, which is also the second end **562** of cells **555** in the foreshortening portion **520** of the stent **500b**. In this embodiment, the valve body **330** is attached to the stent **500b** so that the downstream edge **376** of the skirt portion **340** is connected to the downstream eyelets **800**, such as by sutures. As such, the leaflets **354**, and particularly the downstream edges **362** of the leaflets **354**, are arranged at, adjacent, or in some embodiments downstream of, second end **539** of the stent **500b**.

With continued reference to FIG. 16A, an elongate tubular flexible portion **810**, having opposing first and second ends **812**, **814**, is attached to the valve body **330**. More specifically, the second end **814** of the flexible portion **810** is attached to the upstream end **352** of the skirt **340**, preferably with a circumferential stitch **818**. The first end **812** of the flexible portion **810** is attached to the stent **500b** at the first eyelets **544**. Preferably, the upstream end **352** of the valve body **330** is not directly attached to the stent **500b**, but is only attached to the flexible portion **810**, which in turn is attached to the stent **500b**.

Preferably the flexible portion **810** is constructed of a flexible material that can increase and decrease in length as the length of the stent **500b** increases and decreases due to foreshortening during radial compaction and expansion. Also, preferably the valve body **330** is constructed of a material such as pericardium, which is flexible yet not substantially longitudinally stretchable. To the extent the valve body is made with a material that stretches, preferably the flexible portion **810** is more amenable to longitudinal stretching than the valve body **330** so that as the length of the stent **500b** increases, the flexible portion **810**, rather than the valve body **330**, will stretch longitudinally, and vice versa.

With additional reference to FIG. 16B, it is noted that in the illustrated embodiment, a portion of the valve body **330** spans the foreshortening portion **520** of the stent. The longitudinally stretchable flexible portion **810**, however, is disposed in the nonforeshortening portion **510** of the stent **500b**. As the assembled valve **600a** is compacted from the expanded portion shown in FIG. 16A to the compacted state shown in FIG. 16B, the foreshortening portion **500** becomes longer. Since the valve body **330** does not stretch substantially, and instead the flexible portion **810** stretches substantially during such lengthening, the stent **500b** moves longitudinally relative to the valve body **330**. Such a "floating valve body" configuration enables placement of the valve body over at least a portion of the foreshortening portion **520** of the stent **500b**.



without stretching the valve body during lengthening of the foreshortening portion of the valve during the compaction and expansion process.

In the embodiment illustrated in FIGS. 16A and B, at least part of the skirt 340, preferably at or adjacent the upstream end, is loosely attached to one or more longitudinal struts 530 of the stent 500b in a manner that accommodates the floating, longitudinal movement of the valve body 330 relative to the stent 500b upon compaction and expansion, such as by one or more loose stitches 820. In other embodiments, such loose stitches 820 can be in the flexible portion adjacent the valve body. Preferably the stitches 820 are relatively loose so that as the stent 500b moves between the compacted and expanded states, each stitch 820 slides longitudinally over the corresponding longitudinal strut 530. Such stitches 820 are strategically placed so that there is an undisturbed path for the stitch to slide upon.

In the illustrated embodiment, the flexible portion 810 is constructed of a fabric having a sufficiently loose weave and/or material that accommodates longitudinal stretching during compaction, and also takes up the slack as the stent shortens during expansion. It is to be understood, however, that other types of materials and configurations can be employed for the flexible portion. For example, in another embodiment, an elongate tubular portion of pericardium makes up the flexible portion. In this embodiment, preferably the pericardium is creased so as to preferentially fold, accordion style, as the stent shortens during expansion. In another embodiment, the flexible portion comprises a pericardium segment having several fenestrations, which are strategically placed slits that, upon application of longitudinal tension to the pericardium, deform so as to enable the pericardium segment to stretch longitudinally. However, as the stent is expanded and foreshortens, the pericardium recovers to its original shape. After the valve is deployed, and as time passes, tissue in-growth will help to close the fenestrations. In still other embodiments, yet additional structures can be employed. For example, rather than a tubular flexible portion, the flexible portion can comprise an array of elastic cords that attach to the upstream end of the valve body 330, extend longitudinally upon compaction of the valve, and take up the slack as the valve is expanded. Also, although the illustrated embodiment employed the valve body 330, which has two layers, it is to be understood that other embodiments may employ a single-layer valve connected to a flexible portion and mounted on a stent having a foreshortening portion.

With reference next to FIG. 17, a schematic representation is made of the valve 600a of FIGS. 16A and B mounted in a human heart. In the illustrated embodiment, the stent 500b is mounted in a manner substantially similar to the stent 500 depicted in FIG. 14. However, the valve body 330 is positioned farther downstream relative to the stent so that the leaflets 354 are generally within the mitral annulus 770, which position can be referred to as intra-annular or partially intra-annular, as the downstream edges 362 of the leaflets 354 may be downstream of the annulus, and thus sub-annular. It is to be understood that, in other embodiments, a valve body can be mounted relative to the stent to be entirely supra-annular, intra-annular, sub-annular, or combinations thereof.

With reference next to FIGS. 18 and 19, yet another embodiment of a valve body 630 is illustrated. FIG. 18 shows a flat pattern 632 for cutting the valve body 630 out of flat source tissue. As shown, the pattern 632 comprises a skirt portion 640 and a leaflet portion 650. The leaflet portion 640 comprises three leaflets 654 each having a downstream edge 662 and opposing first and second side edges 664, 666. Each leaflet 654 has opposing first and second commissural tab

portions 660, 661. An offset 674 is provided between each leaflet side edge 664, 666 and the adjacent commissural tab 660, 661.

In the skirt portion 640, three commissural slits 680 are cut so as to generally align with the commissural tabs 660, 661. First and second leaflet edge slits 694, 696 are also cut in the skirt portion 640 so as to generally align with the curvature of the corresponding first and second leaflet side edges 664, 666. In the illustrated embodiment, a portion 700 of each commissural tabs 660, 661 extends in the downstream direction beyond at least a portion of the leaflet downstream edge 662.

With continued reference to FIGS. 18 and 19, to construct the valve body 630 from flat tissue cut according to this pattern 632, the cut tissue is folded and the first and second leaflet edges 664, 666 are pushed through corresponding first and second leaflet slits 694, 696, respectively. Edges of the skirt portion 640 at and adjacent the leaflet slits 694, 696 preferably are deformed so that the inner surface of the skirt 640 at and adjacent the slits 694, 696 engages inner and outer surfaces of the leaflet 654 so that a leaflet cut end 704 and opposing slit cut ends 706, 708 face radially outwardly. The leaflet cut end 704 and slit cut ends 706, 708 are then sutured together. As such, the sutures connecting the leaflet edges 664, 666 to the skirt 640 are maintained generally on the outside 703 of the skirt portion 640, and portions of the leaflets 654 within the valve body 630 generally do not engage the sutures during use. Similarly, and in the manner as discussed in other embodiments, the first and second commissural tab portions 660, 661 of adjacent leaflets 654 are arranged to engage one another face-to-face, extended through the slit 680, and sewn to each other and the skirt 640 at the slit edge.

In still other embodiments, the leaflet side edges 664, 666 can be extended through corresponding slits 694, 696, folded to engage with the outer surface 703 of the skirt portion 640, and then sutured into place.

In the illustrated embodiment, the downstream portion 700 of the commissural tab portions 660, 661 contributes to surface area for sewing the commissural tab portions in place and provides material to hold onto during the manufacturing process. In some embodiments, the entire commissural tab 660, 661 is sewn to the skirt 640. In other embodiments, a portion of the tabs are sewn in place, and an unused remainder of each tab is removed and discarded.

With reference next to FIG. 20, a tool 830 for helping to construct the valve body 630 of FIGS. 18 and 19 is illustrated. The tool 830 has a proximal handle portion 832 and a form 840, or mold, at its distal end. Preferably, the form 840 is shaped to be the negative of a desired shape of the downstream portion of the valve body 630 when the leaflets 654 are coapted in a closed position. The illustrated form 840 comprises a stop surface 844 and a plurality of leaflet engagement surfaces 850, each of which have first and second side edges 854, 856.

With additional reference to FIG. 21, the tool 830 is shown during construction of a valve body 630. In a preferred embodiment, the valve body 630 is cut according to the pattern 632 discussed above, and is then formed into a tube and connected at the commissural tabs 660, 661. Preferably, the commissural tabs 660, 661 are initially only tacked in place, and thus serve as a guide for placement of the partially assembled valve body 630 on the form 840. The downstream end of the partially assembled valve body 630, is then placed upon the form 840 so that the skirt 640 engages a circumferential outer surface 860 of the form, and the leaflets 654 engage corresponding leaflet engagement surfaces 850 and the first and second side edges 664, 666 of the leaflets 654 are



generally aligned with the first and second side edges **854**, **856** of the leaflet engagement surfaces **850**. Preferably, downstream edges **662** of the leaflets **654** are at or adjacent the stop surface **844** of the form **850**.

In a preferred embodiment, the operator correctly positions the valve body **630** on the form **840** and pulls side edges **664**, **666** of the leaflets **654** through the corresponding leaflet slits **694**, **696** of the skirt portion **640**, all of which are preferably aligned with the leaflet engagement surface side edges **854**, **856**. In this manner, the partially-assembled valve body **630** becomes engaged with the form **840**, taking on the form's shape so that the leaflets are configured in the preferred coapted position. As such, the valve body **630** can be constructed in a position that is exactly as desired for optimum valve performance. Once the valve body **630** has been properly positioned on the form **840** with the leaflet edges **664**, **666** pulled through corresponding leaflet slits **694**, **696**, the leaflet edges **664**, **666** are sewn or otherwise attached to the valve body **630** along the slits **694**, **696** in any acceptable manner, including methods as discussed above. Additionally, in embodiments in which the commissural tabs were initially only tacked in place, they are then fully secured in place.

Use of the valve assembly tool **830** as discussed above enables consistent and ideal-shaped construction of a valve body in a relatively quick manner. In one embodiment, a method of creating a homologous tissue valve body is provided in which a clinician harvests a patient's own tissue, such as a patient's own pericardium, flattens the homologous source tissue, cuts it according to a desired heart valve pattern, and then assembles the valve body using the valve body assembly tool **830**. Preferably, the valve can be created and then implanted by a clinician in the operating room during a single procedure.

With reference next to FIG. **23**, another embodiment of a valve body **930** can be formed generally using much of the same pattern and manner of construction as discussed above in connection with FIGS. **7-9**, with the exception that a plurality of chordae tendinae **932**, **934** extend from the downstream edge **362** of each leaflet **354**. In the illustrated embodiment, a central and two side chordae **932**, **934** are provided. Preferably the central chordae **932** is longer than the side chordae **934**. In other embodiments, more or fewer chordae may be provided. In the illustrated embodiment, the chordae **932**, **934** are cut as part of the pattern, and thus are contiguous with the associated leaflet **354**. Preferably a mount tab **936** is at the tip of each chord **932**, **934**. The mount tab **936** preferably includes an area of increased diameter that will provide space to accommodate mounting media **938** such as sutures, clips or the like.

FIG. **23** is a schematic representation of a replacement valve **900** employing the valve body **930** attached to a stent **902**. Preferably the chordae **932**, **934** are attached to the stent **902** downstream of the valve body which, in FIG. **23**, is depicted in a closed state. As with natural chordae, preferably the chordae **932**, **934** are long enough to allow the leaflets **354** to coapt fully with little or no interference, but also provide distribution of blood pressure forces during pumping of the ventricle. More simply, the chordae communicate blood pressure forces on the leaflets to the frame **902**.

With additional reference to FIG. **24**, a portion of the stent **902** that can be used to support the valve body **930** and chordae **932**, **934** is provided. The illustrated stent is similar to the stent **500** described above. Preferably, a plurality of distal eyelets **940** is formed at or adjacent a distal end **539** of the stent. In the illustrated embodiment, the distal eyelets **940** each have a transversely elongate hole **942** with a generally flat contact surface **944**. An attachment eyelet **950** is disposed

on the longitudinal struts **530**, preferably on the ring **522c** that includes the apical anchors **550**.

With specific reference to FIG. **25**, a schematic representation is shown depicting a portion of the valve body **930**, stent **902** and chordae **932**, all in section. As shown, preferably a downstream end of the valve body is attached via sutures to the second eyelets **546** similar to embodiments discussed above. The valve body leaflets **354** are shown schematically, in phantom lines, and in a coapted state. In the illustrated embodiment, the chordae **932** extends from the leaflet and through the downstream eyelet **940**. In some embodiments, the chordae can be sewn to the downstream eyelet **940**. However, in the illustrated embodiment, the chordae extends through the eyelet, engages the contact surface **944**, reverses course, and extends to the attachment eyelet **950**. Preferably, the mount tab **936** of the chordae **932** is attached to the attachment eyelet **950** with, for example, a suture **938**. In this manner, as forces from blood pressure push against the coapted leaflets of the closed valve, the chordae distribute such forces to the downstream end of the foreshortening portion of the stent and also to the upstream end of the foreshortening portion of the stent, not only distributing forces from the leaflets, but also encouraging the stent anchors **550**, **570** into even more firm and secure grasping of the native valve annulus. Of course, it is to be understood that other specific areas of attachment of the chordae can be employed.

Although this invention has been disclosed in the context of certain preferred embodiments and examples, it will be understood by those skilled in the art that the present invention extends beyond the specifically disclosed embodiments to other alternative embodiments and/or uses of the invention and obvious modifications and equivalents thereof. In addition, while a number of variations of the invention have been shown and described in detail, other modifications, which are within the scope of this invention, will be readily apparent to those of skill in the art based upon this disclosure. In fact, the embodiments specifically disclosed herein have been used as a vehicle to describe certain inventive features that could be employed in multiple embodiments. Thus, it is contemplated that various combinations or subcombinations of the specific features and aspects of the embodiments may be made and still fall within the scope of the invention. For example, the valve body of FIGS. **7-9** has been described in an embodiment in which adjacent commissural tabs are cut (see FIG. **9A**) and in another embodiment in which commissural connections between leaflets are not cut (see FIG. **9B**). However, the discussion connected with the valve body embodiment in FIG. **10** does not specifically describe an embodiment in which the commissural connections between leaflets are not cut. Since Applicant contemplates combining and/or substituting features of the discussed embodiments, it should be understood that Applicant also contemplates a variation of the FIG. **10** valve body which employs uncut commissural connections. This example applies to all of the features described herein in connection with specific embodiments. Accordingly, it should be understood that various features and aspects of the disclosed embodiments can be combined with or substituted for one another in order to form varying modes of the disclosed invention. Thus, it is intended that the scope of the present invention herein disclosed should not be limited by the particular disclosed embodiments described above, but should be determined only by a fair reading of the claims that follow.

What is claimed is:

1. A replacement heart valve, comprising:  
a valve body comprising an outer layer and an inner layer;

21

the outer layer being tubular and having a longitudinal axis, an upstream end and a downstream end, the outer layer formed from a thin, flexible material;

the inner layer being generally tubular, having a longitudinal axis generally collinear with the outer layer, and being positioned within the tubular outer layer, the inner layer formed from a thin, flexible material and defining a plurality of leaflets adapted to move between an open state and a coapted state, each leaflet having a side edge and a downstream portion, adjacent leaflets of the inner layer being connected by a commissural portion;

wherein the leaflets are attached to the outer layer along the leaflet side edges, and the commissural portions are attached to the outer layer downstream of at least a portion of the leaflet side edges; and

an elongate frame that can be radially compacted to a compacted state and radially expanded to an expanded state, the frame made up of a plurality of struts and having a longitudinal axis, the valve body being attached to the frame struts by a plurality of stitches;

wherein at least one of the plurality of stitches is a loose stitch configured to freely slide over the corresponding strut when the frame is radially compacted or expanded.

2. A replacement heart valve as in claim 1, wherein the inner and outer layers are constructed from a single, contiguous section of the flexible material.

3. A replacement heart valve as in claim 2, wherein the inner and outer layers are folded relative to one another at the upstream end so that the inner layer is contiguous with the outer layer at the upstream end.

4. A replacement heart valve as in claim 1, wherein the valve body is positioned so that the frame is adjacent an outer surface of the outer layer.

5. A replacement heart valve as in claim 4, wherein the outer layer of the valve body is connected to the frame, and the inner layer of the valve body is directly connected to the outer layer, but is not directly connected to the frame.

6. A replacement heart valve as in claim 1, wherein the thin, flexible layer from which the outer and inner layers are constructed is not substantially longitudinally stretchable.

7. A replacement heart valve as in claim 6, wherein the thin, flexible layer comprises pericardium.

8. A replacement heart valve as in claim 1, additionally comprising a longitudinally stretchable material attached to the outer layer.

9. A replacement heart valve as in claim 1, wherein the frame has a foreshortening portion.

10. A replacement heart valve as in claim 9, wherein the frame further has a non-foreshortening portion.

22

11. A replacement heart valve as in claim 10, wherein the strut to which the loose stitch is connected is in the non-foreshortening portion.

12. A replacement heart valve as in claim 10, wherein the valve body is positioned within the non-foreshortening portion.

13. A replacement heart valve as in claim 10, wherein the valve body is attached to the frame so that part of the valve body is in the foreshortening portion and part of the valve body is in the non-foreshortening portion.

14. A replacement heart valve as in claim 1, further comprising a longitudinally expandable material connected to the frame and the valve body.

15. A replacement heart valve as in claim 1, wherein the valve body comprises pericardium.

16. A replacement heart valve, comprising:

a valve body defining a plurality of leaflets adapted to move between an open state and a coapted state;

an elongate frame configured to move between a radially compacted state and a radially expanded state, the frame comprising a plurality of struts and having a longitudinal axis; and

a plurality of stitches which attach the valve body to the plurality of struts, wherein at least one of the plurality of stitches is a loose stitch configured to freely slide over the corresponding strut when the frame is moved between the radially compacted and radially expanded states.

17. A replacement heart valve as in claim 16, wherein the frame has a foreshortening portion.

18. A replacement heart valve as in claim 17, wherein the frame further has a non-foreshortening portion.

19. A replacement heart valve as in claim 18, wherein the strut to which the loose stitch is connected is in the non-foreshortening portion.

20. A replacement heart valve as in claim 18, wherein the valve body is positioned within the non-foreshortening portion.

21. A replacement heart valve as in claim 18, wherein the valve body is attached to the frame so that part of the valve body is in the foreshortening portion and part of the valve body is in the non-foreshortening portion.

22. A replacement heart valve as in claim 16, further comprising a longitudinally expandable material connected to the frame and the valve body.

23. A replacement heart valve as in claim 16, wherein the valve body comprises pericardium.

\* \* \* \* \*