

US009807842B2

(12) United States Patent

Ivey et al.

(54) SYSTEM AND METHOD FOR CONTROLLING OPERATION OF AN LED-BASED LIGHT

(71) Applicant: iLumisys, Inc., Troy, MI (US)

(72) Inventors: **John Ivey**, Farmington Hills, MI (US); **David L. Simon**, Grosse Pointe Woods, MI (US); **Hoan Ngo**, Sterling Heights,

MI (US); Anthony J. Norton, Ann Arbor, MI (US); Brian Nickol,

Macomb, MI (US)

(73) Assignee: iLumisys, Inc., Troy, MI (US)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 44 days.

(21) Appl. No.: 15/008,864

(22) Filed: **Jan. 28, 2016**

(65) Prior Publication Data

US 2016/0157317 A1 Jun. 2, 2016

Related U.S. Application Data

- (63) Continuation of application No. 13/934,607, filed on Jul. 3, 2013, now Pat. No. 9,271,367.
- (60) Provisional application No. 61/669,319, filed on Jul. 9, 2012.
- (51) Int. Cl.

 H05B 37/02 (2006.01)

 H05B 33/08 (2006.01)
- (52) **U.S. Cl.**CPC *H05B 33/0854* (2013.01); *H05B 33/0803* (2013.01); *H05B 37/029* (2013.01); *H05B 37/0245* (2013.01); *H05B 37/0272* (2013.01)
- (58) **Field of Classification Search** CPC H05B 33/0854; H05B 33/0845; H05B

(10) Patent No.: US 9,807,842 B2 (45) Date of Patent: Oct. 31, 2017

37/0272; H05B 37/0245; H05B 37/0227; H05B 33/0803; H05B 33/0803; H05B 39/00; H05B 39/02 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

D79,814 S 11/1929 Hoch D80,419 S 1/1930 Kramer D84,763 S 7/1931 Stange (Continued)

FOREIGN PATENT DOCUMENTS

CN 1584388 A 2/2005 CN 2766345 Y 3/2006 (Continued)

OTHER PUBLICATIONS

European Office Action in EP098224249, a related matter, dated Jan. 13, 2015, 2 pages.

(Continued)


Primary Examiner — Jung Kim


(74) Attorney, Agent, or Firm — Fish & Richardson P.C.

(57) ABSTRACT

For controlling operation of a light source, a method of associating a light source with an area for which the light source is positioned to provide lighting comprises: identifying, based on a determined physical position of a light source, one of a plurality of areas as the area for which the light source is positioned to provide lighting; identifying at least one desired lighting condition for the identified area; and controlling, using a processor, operation of the light source based on the identified at least one desired lighting condition for the identified area.

21 Claims, 3 Drawing Sheets

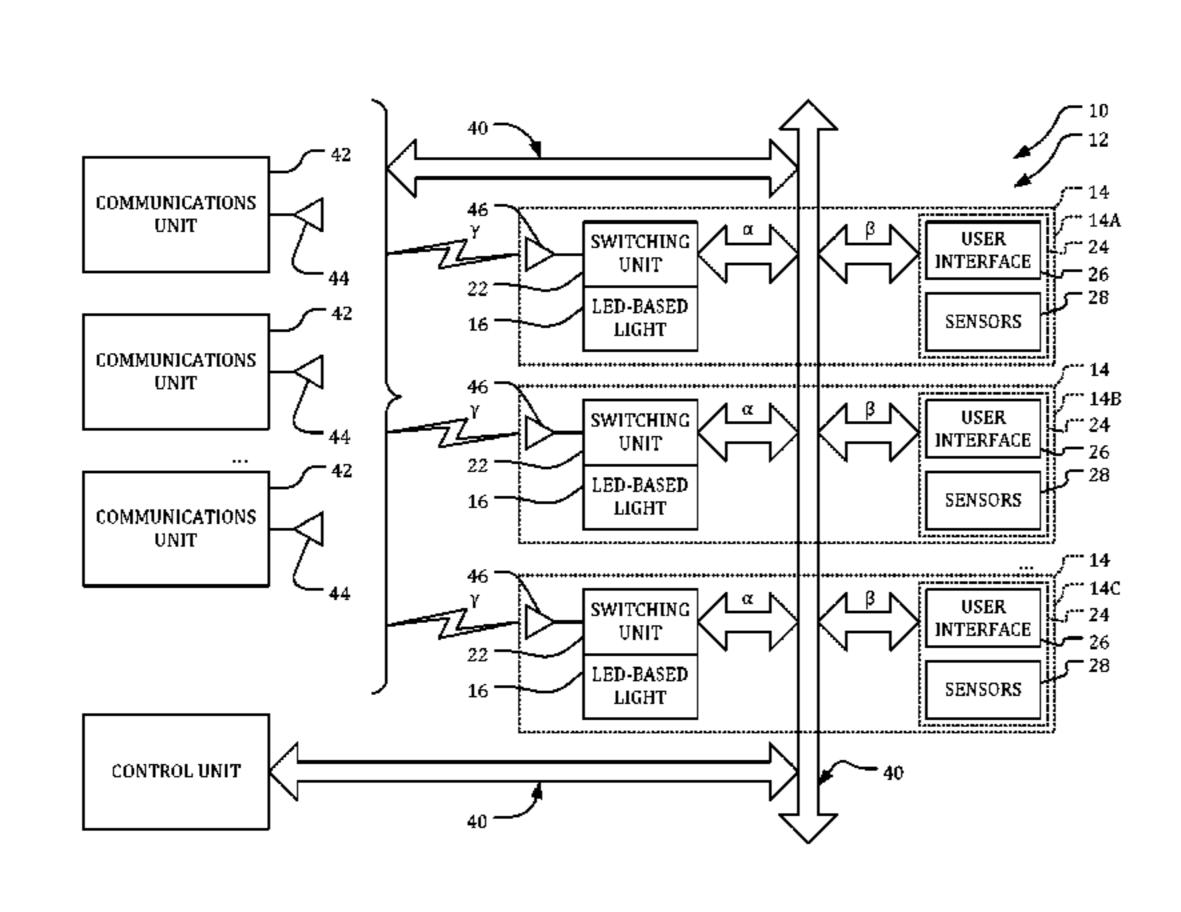

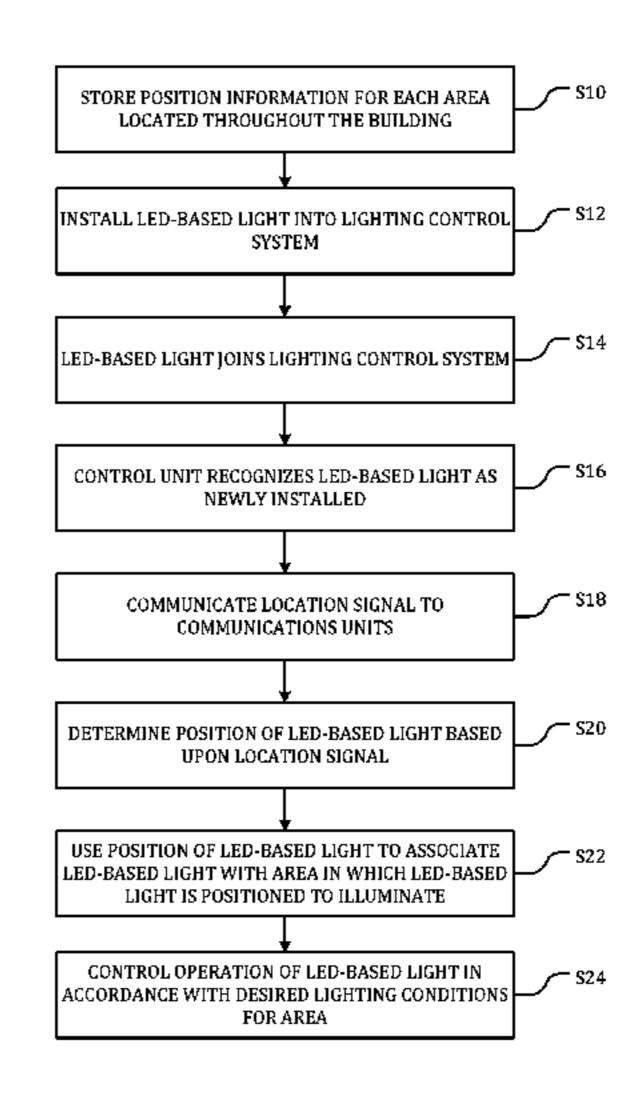

(56)	References Cited		ces Cited		4,688,869 A 8/1987 4,695,769 A 9/1987			
	U.S.	PATENT	DOCUMENTS		4,698,730			Schweickardt Sakai et al.
	0.0.		DOCOMENTO		4,701,669			Head et al.
	D119,797 S	4/1940	Winkler et al.		4,705,406			
	D125,312 S	2/1941	_		4,707,141 D293,723			Havel Buttner
	2,826,679 A		Rosenburg		4,727,289			
	2,909,097 A 3,178,622 A		Alden et al. Paul et al.		4,739,454			Federgreen
	3,272,977 A		Holmes		4,740,882	A	4/1988	
	3,318,185 A	5/1967			4,748,545			Schmitt
	3,561,719 A				4,753,148 4,758,173			Johnson Northrop
	3,586,936 A 3,601,621 A	6/1971 8/1971	Mcleroy Ditchie		4,765,708			Becker et al.
	3,612,855 A	10/1971			4,771,274		9/1988	
	3,643,088 A		Osteen et al.		4,780,621			Bartleucci et al.
	3,739,336 A		Burland		4,794,373			Harrison
	3,746,918 A		Drucker et al.		4,794,383 4,801,928		12/1988 1/1989	
	3,818,216 A 3,832,503 A	8/1974	Larraburu Crane		4,810,937		3/1989	
	3,858,086 A		Anderson et al.		4,818,072			Mohebban
	3,909,670 A		Wakamatsu et al.	•	4,824,269		4/1989	
	3,924,120 A		Cox, III		4,837,565 4,843,627		6/1989	Wnite Stebbins
	3,958,885 A 3,969,720 A		Stockinger et al. Nishino		4,845,481			
	3,974,637 A		Bergey et al.		4,845,745		7/1989	
	, ,	11/1976			4,847,536			Lowe et al.
	4,001,571 A				4,851,972			Altman
	4,054,814 A		Fegley et al.		4,854,701 4,857,801		8/1989 8/1989	Noll et al.
	4,070,568 A 4,082,395 A	1/1978 4/1978	Gala Donato et al.		4,863,223			Weissenbach et al.
	4,096,349 A		Donato Ct al. Donato		4,870,325		9/1989	
	4,102,558 A		Krachman		4,874,320			Freed et al.
	4,107,581 A		Abernethy		4,887,074 4,894,832		12/1989	Simon et al.
	4,189,663 A		Schmutzer et al.		4,991,207			Sato et al.
	4,211,955 A 4,241,295 A	7/1980 12/1980	Williams, Jr.		4,904,988			Nesbit et al.
	4,261,029 A		Mousset		4,912,371			Hamilton
	4,262,255 A		Kokei et al.		4,920,459			Rothwell, Jr. et al.
	4,271,408 A		Teshima et al.		4,922,154 4,929,936			Cacoub Friedman et al.
	4,271,458 A 4,272,689 A		George, Jr. Crosby et al.		4,934,852		6/1990	
	4,273,999 A		Pierpoint		4,941,072			Yasumoto et al.
	4,298,869 A	11/1981	. •		4,943,900			Gartner
	4,329,625 A		Nishizawa et al.		4,962,687 4,965,561			Belliveau et al.
	4,339,788 A 4,342,947 A	7/1982 8/1982	White et al.		4,973,835			Kurosu et al.
	4,344,117 A		Niccum		, ,			Bavaro et al.
	4,367,464 A		Kurahashi et al.		4,979,081			Leach et al.
	D268,134 S		Zurcher		4,979,180			Muncheryan Taylor et al
	4,382,272 A		Quella et al.		4,980,806 4,991,070		2/1990	Taylor et al. Stob
	4,388,567 A 4,388,589 A		Yamazaki et al. Molldrem, Jr.		4,992,704			Stinson
	4,392,187 A		Bornhorst		5,003,227			Nilssen
	4,394,719 A		Moberg		5,008,595		4/1991	
	4,420,711 A		Takahashi et al.		5,008,788 5,010,459			Palinkas Taylor et al.
	4,455,562 A 4,500,796 A	6/1984 2/1985	Dolan et al.		5,018,054			Ohashi et al.
	4,521,835 A		Meggs et al.		5,027,037	A	6/1991	
	4,531,114 A		Topol et al.		5,027,262		6/1991	
	4,581,687 A		Nakanishi		5,032,960 5,034,807		7/1991 7/1991	Katon Von Kohorn
	4,587,459 A 4,597,033 A	5/1986 6/1086	Blake Meggs et al.		5,036,248			McEwan et al.
	4,600,972 A		MacIntyre		5,038,255			Nishihashi et al.
	4,607,317 A	8/1986	•		/ /			Kluitmans et al.
	4,622,881 A				5,072,216			e e
	/ /	11/1986			5,078,039 5,083,063			Tulk et al. Brooks
	4,635,052 A 4,647,217 A	3/1987	Aoike et al. Havel		5,088,013			
	4,650,971 A		Manecci et al.		5,089,748		2/1992	
	4,656,398 A	4/1987	Michael et al.		5,103,382			Kondo et al.
	4,661,890 A		Watanabe et al.		5,122,733		6/1992	
	4,668,895 A 4,669,033 A	5/1987 5/1987	Schneiter Lee		5,126,634 5,128,595		6/1992 7/1992	Johnson Hara
	4,669,033 A 4,675,575 A		Smith et al.		5,120,393		7/1992	
	4,682,079 A		Sanders et al.		5,134,387			Smith et al.
	4,686,425 A				5,136,483			Schoniger et al.
	4,687,340 A	8/1987			5,140,220			Hasegawa
	4,688,154 A	8/1987	Nilssen		5,142,199	A	8/1992	Elwell

(56)		Referen	ces Cited	5,575,554		11/1996	
	U.S.	PATENT	DOCUMENTS	5,581,158 5,592,051		12/1996 1/1997	Quazi Korkala
	0.5.		DOCOMENTO	5,592,054			Nerone et al.
5,151,67	79 A	9/1992	Dimmick	5,600,199			Martin, Sr. et al.
5,154,64	41 A	10/1992	McLaughlin	5,607,227			Yasumoto et al.
5,161,87			McDermott	5,608,290			Hutchisson et al.
5,161,88		11/1992		5,614,788 5,621,282			Mullins et al. Haskell
5,164,71 5,184,11		2/1993	Kashiwabara et al.	5,621,603			Adamec et al.
, , ,		3/1993		5,621,662			Humphries et al.
, ,			Jenkins et al.	5,622,423		4/1997	
5,209,56	50 A	5/1993	Taylor et al.	5,633,629			Hochstein
5,220,25		6/1993		5,634,711 5,640,061			Kennedy et al. Bornhorst et al.
5,225,76			Callahan et al.	5,640,141			Myllymaki
5,226,72 5,254,91		7/1993 10/1993		5,642,129			Zavracky et al.
5,256,94			Boldin et al.	5,655,830	A	8/1997	Ruskouski
5,278,54	42 A	1/1994	Smith et al.	5,656,935		8/1997	
5,281,96		1/1994		5,661,374 5,661,645			Cassidy et al. Hochstein
5,282,12			Bornhorst et al.	5,673,059			Zavracky et al.
5,283,51 5,287,35		2/1994 2/1994	Jackson et al.	5,682,103		10/1997	
5,294,86			Haraden	5,684,523	A	11/1997	Satoh et al.
5,298,87			Shimohara	, ,			Madadi et al.
5,301,09		4/1994		5,697,695			Lin et al.
5,303,12			Wrobel	5,699,243 5,701,058		12/1997	Eckel et al.
5,307,29 5,321,59			Taylor et al. Moates	5,712,650			Barlow
5,323,22			Schreder	5,713,655			Blackman
5,329,43			Taylor et al.	5,721,471			Begemann et al.
5,341,98	88 A	8/1994	Rein et al.	5,725,148			Hartman
5,344,06			Haessig	5,726,535 5,731,759		3/1998	Yan Finucan
5,350,97 5,357,17			Hamamoto et al.	5,734,590		3/1998	
5,365,41			Luchaco et al. Rycroft et al.	5,751,118			Mortimer
5,371,61			Tai et al.	5,752,766			Bailey et al.
, ,			Horibata et al.	5,765,940			Levy et al.
5,375,04			Tokunaga	5,769,527 5,781,108			Taylor et al. Jacob et al.
D354,36 5,381,03		1/1995 1/1005	Murata Rudzewicz et al.	5,784,006			Hochstein
5,388,35		2/1995		5,785,227		7/1998	
5,402,70		4/1995		5,790,329			Klaus et al.
5,404,09			Green et al.	5,803,579 5,803,580		9/1998 9/1998	Turnbull et al.
5,404,28 5,406,13			Klinke et al. Sugden	5,803,729			Tsimerman
5,410,32			Yoksza et al.	5,806,965		9/1998	
5,412,28			Moore et al.	5,808,689		9/1998	
5,412,55			Fernandes	5,810,463 5,812,105			Kawahara et al. Van de Ven
5,420,48		5/1995 6/1005		5,812,103			Shaffer
5,421,0. 5,430,35			Leffers, Jr. Ference et al.	5,813,753			Vriens et al.
5,432,40			Matsuda et al.	5,821,695			Vilanilam et al.
5,436,53	35 A	7/1995		5,825,051			Bauer et al.
5,436,85			Shimohara	5,828,178 5,831,522			York et al. Weed et al.
5,450,30			Waltz et al.	5,836,676			Ando et al.
5,461,18 5,463,28			Drago et al. Johnson	5,841,177			Komoto et al.
5,463,50			Savage, Jr.	5,848,837	A	12/1998	Gustafson
5,465,14			Parker et al.	5,850,126		12/1998	
5,473,52			Kriz et al.	5,851,063			Doughty et al.
5,475,30		1/1995		5,852,658 5,854,542		12/1998	Knight et al. Forbes
5,481,42 5,489,82		1/1996 2/1996		RE36,030		1/1999	
5,491,40		2/1996		5,859,508	A	1/1999	Ge et al.
5,493,18			Kimball	5,865,529		2/1999	
5,504,39			Johnson et al.	5,870,233			Benz et al.
5,506,76			Giebler et al.	5,890,794 5,896,010			Abtahi et al. Mikolajczak et al.
5,513,08 5,519,49		4/1996 5/1996	Asano Borgert et al.	5,904,415			Robertson et al.
5,530,32			Ference et al.	5,907,742			Johnson et al.
5,539,62		7/1996		5,909,378		6/1999	De Milleville
5,544,80			Keating et al.	5,912,653		6/1999	
5,545,95		8/1996		5,917,287			Haederle et al.
5,550,44 5,559,68		8/1996 9/1996	Allison et al.	5,917,534 5,921,660		6/1999 7/1999	Rajeswaran Yu
5,559,68 5,561,34				5,921,000			Chliwnyj et al.
D376,03		11/1996	•	5,927,845			Gustafson et al.
•		11/1996		5,934,792		8/1999	Camarota

(56)		Referen	ces Cited	6,249,221		6/2001	
	ЦS	PATENT	DOCUMENTS	6,250,774 6,252,350			Begemann et al. Alvarez
	0.5.		DOCOMENTS	6,252,358			Xydis et al.
5,936,5	599 A	8/1999	Reymond	6,268,600			Nakamura et al.
5,943,8		8/1999	•	6,273,338 6,275,397		8/2001 8/2001	White McClain
5,946,2 5,040,2			Eckel et al.	6,283,612		9/2001	
5,949,3 5,951,1		9/1999 9/1999	wu Iwasaki et al.	6,290,140			Pesko et al.
5,952,6		9/1999		6,292,901	B1		Lys et al.
/ /	547 A		Tubel et al.	6,293,684		9/2001	
5,961,0		10/1999		6,297,724 6,305,109		10/2001	Bryans et al.
5,962,9 5,962,9	99 A 92 A	10/1999 10/1999	Baker Huang et al.	6,305,821			Hsieh et al.
5,963,1		10/1999	_	6,307,331		10/2001	Bonasia et al.
5,966,0			Zmurk et al.	6,310,590		10/2001	
5,971,5			Baldwin et al.	6,315,429 6,323,832			Grandolfo Nishizawa et al.
5,973,5 5,974,5		10/1999	Baldwin et al. Gandar	6,325,651			Nishihara et al.
5,980,0			Metroyanis	6,334,699	B1	1/2002	Gladnick
5,998,9			Shimizu et al.	6,340,868			Lys et al.
5,998,9		12/1999	- -	6,354,714 6,361,186			Rhodes Slayden
6,000,8 $6,007,2$		12/1999 12/1999	Moreland Pelka	6,362,578			Swanson et al.
, ,			Kitagawa et al.	6,369,525			Chang et al.
6,010,2			Blackman et al.	6,371,637			Atchinson et al.
6,011,6			Schreffler	6,373,733 6,379,022			Wu et al. Amerson et al.
6,016,0			Mueller et al.	D457,667			Piepgras et al.
6,018,2 6,019,4		1/2000 2/2000	Kuo et al.	D457,669			Piepgras et al.
6,020,8			Chansky et al.	D457,974			Piepgras et al.
6,025,5		2/2000		6,388,393			Illingworth
6,028,6			Schmidt MaDarmatt	6,388,396 6,394,623		5/2002	Katyl et al. Tsui
6,030,0 6,031,3			McDermott Recknagel et al.	6,396,216			Noone et al.
D422,7			Orozco	D458,395			Piepgras et al.
6,056,4			Wilson et al.	6,400,096			Wells et al.
6,068,3			Robertson et al.	6,404,131 6,411,022			Kawano et al. Machida
6,069,5 $6,072,2$		5/2000 6/2000	Hansen Allen	6,411,045			Nerone
6,074,0			Marcus	6,422,716			Henrici et al.
6,084,3	59 A	7/2000	Hetzel et al.	6,428,189			Hochstein
6,086,2			Lash et al.	6,429,604 D463,610		8/2002 9/2002	Piepgras et al.
6,091,2 6,092,9		7/2000 7/2000	Lenz Rensch	6,445,139			Marshall et al.
6,095,6			Lebens et al.	6,448,550			Nishimura
6,097,3			Zavracky et al.	6,448,716			Hutchison
6,107,7			Katyl et al.	6,459,919 6,464,373		10/2002	Lys et al. Petrick
6,116,7 6,121,8			George Hamm et al.	6,469,457			Callahan
6,127,7			Pashley et al.	6,471,388			
6,132,0		10/2000	Turnbull et al.	6,472,823		10/2002	
6,135,6		10/2000		6,473,002 D468,035			Hutchison Blanc et al.
6,135,6 6,139,1		10/2000 10/2000	Butterworth	6,488,392		12/2002	
6,149,2			Conway et al.	6,495,964			Muthu et al.
6,150,7			Mueller et al.	6,511,204 6,517,218			Emmel et al. Hochstein
6,151,5 6,153,9		11/2000	Batko Grossman	6,521,879			Rand et al.
/ /	882 A		Bischoff, Jr.	6,522,078			Okamoto et al.
, ,		12/2000	,	6,527,411		3/2003	
6,175,2		1/2001		6,528,954 6,528,958			Lys et al. Hulshof et al.
6,175,2		1/2001 1/2001	Billig et al.	6,538,375			Duggal et al.
D437,9		2/2001		6,540,381			Douglass, II
6,183,0			Neubert	6,541,800			Barnett et al.
6,183,1		2/2001		6,548,967 6,568,834			Dowling et al. Scianna
6,184,6 6,196,4			Ruthenberg Ruthenberg	6,573,536		6/2003	
6,203,1			Fleischmann	6,577,072			Saito et al.
6,211,6	526 B1	4/2001	Lys et al.	6,577,080			Lys et al.
6,215,4		4/2001		6,577,512			Tripathi et al.
6,217,1 6,219,2			Altman et al. Mellberg et al.	6,577,794 6,578,979			Currie et al. Truttmann-Battig
6,219,2 $6,220,7$			Begemann	6,582,103			Popovich et al.
6,227,6			Zhang et al.	6,583,550			Iwasa et al.
6,236,3		5/2001	Dussureault	6,583,573			Bierman
6,238,0			Dealey, Jr. et al.	D477,093			Moriyama et al.
6,241,3) 39 BI	6/2001	LIN	6,585,393	ВI	7/2003	Brandes et al.

(56)) References Cited			6,871,981 6,874,924	Alexanderson et al. Hulse et al.		
	U.S.	PATENT	DOCUMENTS	6,879,883	B1	4/2005	Motoyama
	-	= (0.0.0.0		6,882,111			Kan et al.
/	586,890 B2 587,049 B1		Min et al. Thacker	6,883,929 6,883,934			Dowling Kawakami et al.
,	590,343 B2		Pederson	6,888,322			Dowling et al.
,	592,238 B2		Cleaver et al.	6,897,624			Lys et al.
/	594,369 B1	7/2003		D506,274 6,909,239		6/2005	Moriyama et al.
/	596,977 B2 598,996 B1	7/2003	Muthu et al.	6,909,921		6/2005	
,	508,453 B2		Morgan et al.	6,918,680			Seeberger
,	508,614 B1		Johnson	6,921,181 6,926,419		7/2005 8/2005	
/	509,804 B2 509,813 B1		Nolan et al. Showers et al.	6,936,968			Cross et al.
/	512,712 B2	9/2003		6,936,978	B2	8/2005	Morgan et al.
,	512,717 B2	9/2003		6,940,230			Myron et al. Verdes et al.
/	512,729 B1 521,222 B1	9/2003 9/2003	Hoffman Hong	6,948,829 6,953,261			Jiao et al.
,	523,151 B2		Pederson	6,957,905	B1	10/2005	Pritchard et al.
6,6	524,597 B2	9/2003	Dowling et al.	6,963,175			Archenhold et al.
	181,484 S 534,770 B2	10/2003 10/2003	Cuevas et al.	6,964,501 6.965.197		11/2005 11/2005	Tyan et al.
,	534,770 B2 534,779 B2	10/2003		6,965,205			Piepgras et al.
6,6	536,003 B2	10/2003	Rahm et al.	, ,			Morgan et al.
,	539,349 B1		Bahadur	6,969,179 6,969,186			Sloan et al. Sonderegger et al.
-	541,284 B2 552,117 B2	11/2003	<u> -</u>	6,969,954			~~
/	559,622 B2		Katogi et al.	6,975,079			
	660,935 B2		Southard et al.	6,979,097 6,982,518			Elam et al. Chou et al.
,	•		Savage, Jr. Bourgault et al.	6,995,681			Pederson
,	574,096 B2		Sommers	6,997,576	B1	2/2006	Lodhie et al.
,	576,284 B1		Wynne Willson	6,999,318		2/2006	-
,	579,621 B2 581,154 B2		West et al. Nierlich et al.	7,004,603 D518,218		2/2006 3/2006	Roberge et al.
,	582,205 B2	1/2004		7,008,079		3/2006	
6,6	583,419 B2	1/2004	Kriparos	7,014,336			Ducharme et al.
,	700,136 B2	3/2004		7,015,650 7,018,063			McGrath Michael et al.
,	712,486 B1 717,376 B2		Popovich et al. Lys et al.	7,018,074			Raby et al.
,	717,526 B2		Martineau et al.	7,021,799			Mizuyoshi
/	720,745 B2		Lys et al.	7,021,809 7,024,256			Iwasa et al. Krzyzanowski et al.
,	726,348 B2 736,328 B1		Gloisten Takusagawa	7,029,145			Frederick
•	736,525 B2	5/2004		7,031,920			Dowling et al.
,	741,324 B1	5/2004		7,033,036 7,038,398			Pederson Lys et al.
	191,678 S 192,042 S		Piepgras Piepgras	7,038,399			Lys et al.
	744,223 B2		Laflamme et al.	7,042,172			Dowling et al.
,	748,299 B1		Motoyama	7,048,423 7,049,761			Stepanenko et al. Timmermans et al.
•	762,562 B2 768,047 B2	7/2004 7/2004	Leong Chang et al.	7,052,171			Lefebvre et al.
,	774,584 B2		Lys et al.	7,053,557			Cross et al.
,	777,891 B2		Lys et al.	7,064,498 7,064,674			Dowling et al. Pederson
,	781,329 B2 787,999 B2		Mueller et al. Stimac et al.	7,067,992			Leong et al.
/	788,000 B2		Appelberg et al.	7,077,978			Setlur et al.
	788,011 B2		Mueller et al.	7,080,927 7,086,747			Feuerborn et al. Nielson et al.
/	791,840 B2 796,680 B1	9/2004	Chun Showers et al.	7,088,014			Nierlich et al.
/	799,864 B2		Bohler et al.	7,088,904	B2	8/2006	Ryan, Jr.
,	301,003 B2		Schanberger et al.	7,102,902			Brown et al.
,	303,732 B2 306,659 B1		Kraus et al. Mueller et al.	7,113,541 7,114,830			Lys et al. Robertson et al.
•	312,970 B1			7,114,834	B2	10/2006	Rivas et al.
/	,		Rizkin et al.	7,118,262		10/2006	
,	314,478 B2 315,724 B2	11/2004 11/2004		7,119,503 7,120,560			Williams et al.
	·	1/2004	• • • • • • • • • • • • • • • • • • •	7,121,679			
6,8	351,816 B2	2/2005	Wu et al.	7,122,976			Null et al.
/	351,832 B2		Tieszen Clauberg et al	7,123,139 7,128,442			Sweeney Lee et al.
ŕ	353,150 B2 353,151 B2		Clauberg et al. Leong et al.	7,128,442			Kim et al.
	353,563 B1		Yang et al.	D532,532			
	357,924 B2		Fu et al.	7,132,635			_
/	360,628 B2		Robertson et al.	, ,			Ducharme
r	366,401 B2 369,204 B2		Sommers et al. Morgan et al.	7,132,804 7,135,824			
0,0	,	5,2005		.,100,021		11,2000	

(56)	Referen	ces Cited	7,267,467			Wu et al.
7	U.S. PATENT	DOCUMENTS	7,270,443 7,271,794			Kurtz et al. Cheng et al.
		DOCOLIZZIVIO	7,273,300		9/2007	Mrakovich
7,139,617		Morgan et al.	7,274,045			Chandran et al.
7,144,135		Martin et al.	7,274,160 7,274,183			Mueller et al. Gu et al.
7,153,002 7,161,311		Kim et al. Mueller et al.	D553,267		10/2007	
7,161,313		Piepgras et al.	7,285,801			Eliashevich et al.
7,161,556		Morgan et al.	7,288,902 7,288,904			Melanson Numeroli et al.
7,164,110 7,164,235		Pitigoi-Aron et al. Ito et al.	, ,			Beauchamp
7,165,863		Thomas et al.	7,300,184			Ichikawa et al.
7,165,866			7,300,192 D556,937		11/2007 12/2007	Mueller et al.
7,167,777 7,168,843		Budike, Jr. Striebel	D557,854		12/2007	•
D536,468		Crosby	7,303,300	B2	12/2007	Dowling et al.
7,178,941		Roberge et al.	7,306,353 7,307,391		12/2007 12/2007	Popovich et al.
7,180,252 D538,950		Lys et al. Maxik	7,307,391			Lys et al.
D538,950 D538,952		Maxik et al.	7,309,965	B2	12/2007	Dowling et al.
D538,962			7,318,658			Wang et al.
7,186,003		Dowling et al.	7,319,244 7,319,246			Liu et al. Soules et al.
7,186,005 7,187,141		Mueller et al.	7,321,191			Setlur et al.
7,190,126			7,326,964			Lim et al.
7,192,154		Becker	7,327,281 7,329,024			Hutchison Lynch et al.
7,198,387 7,201,491		Gloisten et al. Bayat et al.	7,329,031			Liaw et al.
7,201,497		Weaver, Jr. et al.	D563,589			Hariri et al.
7,202,613	_	Morgan et al.	7,344,278 7,345,320		3/2008 3/2008	Paravantsos Dahm
7,204,615 7,204,622		Arik et al. Dowling et al.	7,348,604			Matheson
7,207,696		_	7,350,936			Ducharme et al.
7,210,818		Luk et al.	7,350,952 7,352,138			Nishigaki Lys et al.
7,210,957 7,211,959		Mrakovich	7,352,138			Morgan et al.
7,211,939		Zarian et al.	7,353,071	B2	4/2008	Blackwell et al.
7,217,004	B2 5/2007	Park et al.	7,358,679			Lys et al.
7,217,012 7,217,022		Southard et al.	7,358,929 7,370,986		5/2008	Mueller et al. Chan
7,217,022		Harwood	7,374,327			Schexnaider
7,218,238	B2 5/2007	Right et al.	7,378,805			Oh et al.
7,220,015		Dowling Crobb et al	7,378,976 7,385,359			Paterno Dowling et al.
7,220,018 7,221,104		Crabb et al. Lys et al.	7,391,159			Harwood
7,221,110	B2 5/2007	Sears et al.	D574,093			Kitagawa et al.
7,224,000		Aanegola et al.	7,396,142 7,396,146		7/2008	Laizure, Jr. et al. Wang
7,226,189 7,228,052		Lee et al. Lin	7,401,935			VanderSchuit
7,228,190	B2 6/2007	Dowling et al.	7,401,945		7/2008	—
7,231,060	_	Dowling et al.	D576,749 7,423,548			Kitagawa et al. Kontovich
7,233,115 7,233,831		Blackwell	7,427,840			Morgan et al.
7,236,366			7,429,117			Pohlert et al.
7,237,924		Martineau et al.	7,434,964 7,438,441			Zheng et al. Sun et al.
7,237,925 7,239,532		Mayer et al. Hsu et al.	D580,089		11/2008	
7,241,038	B2 7/2007	Naniwa et al.	D581,556		11/2008	
7,242,152		Dowling et al.	7,449,847 D582,577		11/2008	Schanberger et al. Yuen
7,244,058 7,246,926		DiPenti et al. Harwood	7,466,082			Snyder et al.
7,246,931		Hsieh et al.	7,470,046			Kao et al.
7,248,239		Dowling et al.	D584,428 D584,429			Li et al. Pei et al.
7,249,269 7,249,865		Motoyama Robertson	7,476,002			Wolf et al.
D548,868		Roberge et al.	7,476,004		1/2009	
7,252,408		Mazzochette et al.	7,478,924 7,482,764			Robertson Morgan et al.
7,253,566 7,255,457		Lys et al. Ducharme et al.	D586,484			Liu et al.
7,255,460			D586,928		2/2009	Liu et al.
7,256,554	B2 8/2007	Lys	7,490,957			Leong et al.
7,258,458 7,258,467		Mochiachvili et al. Saccomanno et al.	7,494,246 7,497,596		2/2009 3/2009	Harbers et al.
7,259,528			7,497,390			McAvoy et al.
7,262,439		Setlur et al.	7,507,001		3/2009	•
7,262,559		Tripathi et al.	7,510,299			Timmermans et al.
D550,379		Hoshikawa et al.	7,510,400 7,511,613			Glovatsky et al.
7,264,372	DZ 9/200/	Maglica	7,511,013	DΖ	3/2009	**ang

(56)		Referen	ces Cited		D650,494			Tsao et al.
	U.S.	PATENT	DOCUMENTS		8,093,823			Aguiar et al. Ivey et al.
					D654,192			Maxik et al.
7,514,876			Roach, Jr.		8,118,447			Simon et al.
, ,			Wolf et al.		8,136,738 8,147,091		3/2012 4/2012	Hsia et al.
7,521,872 7,524,089		4/2009 4/2009	. •		8,159,152		4/2012	
, ,			Zhu et al.		D660,472			Aguiar et al.
D593,223			Komar		8,167,452		5/2012	
7,530,701			Chan-Wing		8,177,388		5/2012	Yen Chan et al.
7,534,002 D594,999			Yamaguchi et al. Uchida et al.		8,179,037		5/2012	
7,549,769			Kim et al.		D662,236			Matsushita
7,556,396			Kuo et al.		8,203,445			Recker et al.
7,559,663			Wong et al.		8,214,084			Ivey et al.
7,562,998		7/2009			8,230,690 8,247,985		7/2012 8/2012	Timmermans et al.
D597,686 7,569,981		8/2009 8/2009	Non Ciancanelli		, ,			Ivey et al.
7,572,030			Booth et al.		8,262,249			Hsia et al.
7,575,339		8/2009	•		8,272,764		9/2012	
7,579,786		8/2009			8,287,144 8,297,788			Pedersen et al. Bishop
7,583,035 7,583,901			Shteynberg et al. Nakagawa et al.		ŕ			Melanson
7,592,757			Hargenrader et al.		8,304,993	B2	11/2012	Tzou et al.
7,594,738			Lin et al.		8,313,213			
,			Mollaert et al.		8,319,407 8,319,433			
7,598,681			Lys et al.		, ,			Carlin et al.
7,598,082			Lys et al. Liu et al.		, ,			Hsia et al.
/ /			Jang et al.		, ,			Ivey et al.
, ,		11/2009						Negley et al.
, ,			Galvez et al.		8,300,291			Hoffmann Chang
, ,		12/2009	Diederiks Deng		8,376,588		2/2013	•
7,635,214		12/2009			8,382,322			
, ,			Zhou et al.		8,382,327			Timmermans et al.
, ,			Whitehouse et al.		8,382,502			Cao et al. Hood et al.
7,649,327 D610,724			Peng Chiang et al.		8,398,275			Wang et al.
7,654,703			Kan et al.		8,403,692			Cao et al.
7,661,839		2/2010			8,405,314		3/2013	
D611,172			Lin et al.		8,434,914 8,454,193			Li et al. Simon et al.
D612,528 7,690,813			McGrath et al. Kanamori et al.		8,496,351			Lo et al.
7,710,047			Shteynberg et al.		8,523,394			Simon et al.
7,710,253			Fredricks		8,531,109			Visser et al.
7,712,918			Siemiet et al.		8,540,401 8,571,716			Simon et al. Ivey et al.
7,748,886 7,758,207			Pazula et al. Zhou et al.		8,628,216			Ivey et al. Ivey et al.
7,759,881			Melanson		8,653,984			Ivey et al.
D621,975					8,674,626			Siemiet et al.
, ,			Verfuerth et al.		,			Ivey et al. Ivey et al.
7,800,511 7,815,338			Hutchison et al.		8,840,282			Simon et al.
, ,			Siemiet et al. Steedly et al.		8,870,412			Timmermans et al.
·		11/2010			8,870,415		10/2014	•
·			Wang et al.		9,016,895			Handsaker
, ,			Ho et al. Mrakovich et al.		, ,			Ivey et al.
, ,		12/2010			•			Simon et al.
, ,			Hochstein		•			Ivey et al.
·			Logan et al.	20	, ,			Pitchers H04L 41/0893 Chliwnyj et al.
7,887,216		2/2011	Patrick Huang et al.		01/0035466		11/2001	
7,889,051			Billig et al.		02/0011801		1/2002	
D634,452			de Visser		02/0015297			Hayashi et al.
7,904,209			Podgorny et al.		02/0038157			Dowling et al.
D636,504 7,926,975			Duster Siemiet et al		02/0041159 02/0044066			Kaping, Jr. Dowling et al.
7,926,975			Siemiet et al. Ivey et al.		02/0047516			Iwasa et al.
7,946,729			Ivey et al.		02/0047569			Dowling et al.
7,952,292		5/2011	Vegter et al.		02/0047624			Stam et al.
7,976,185			Uang et al.		02/0047628			Morgan et al.
7,976,196 7,990,070			Ivey et al. Nerone		02/0048169 02/0057061			Dowling et al. Mueller et al.
7,990,070			Meurer		02/003/001			Timmermans et al.
8,013,472			Adest et al.		02/0070688			Dowling et al.
D650,097			Trumble et al.					Dowling et al.

(56)		Referen	ces Cited	2004/0257007			Lys et al.
	ΠC	DATENIT	DOCUMENTS	2005/0013133 2005/0023536		1/2005 2/2005	Yen Shackle
	U.S.	FAILINI	DOCUMENTS	2005/0024877			Frederick
2002/007495	8 A1	6/2002	Crenshaw	2005/0030744			Ducharme et al.
2002/007423			Blackwell et al.	2005/0035728	A 1	2/2005	Schanberger et al.
2002/010119			Lys et al.	2005/0036300			Dowling et al.
2002/011355	5 A1		Lys et al.	2005/0040774			Mueller et al.
2002/013062			Morgan et al.	2005/0041161			Dowling et al.
2002/014539			Morgan et al.	2005/0041424 2005/0043907			Ducharme Eckel et al.
2002/014586			Dowling Daviling et al	2005/0043907			Mueller et al.
2002/015204 2002/015229			Dowling et al. Kikta et al.	2005/0047132			Dowling et al.
2002/015225			Morgan et al.	2005/0047134	A 1		Mueller et al.
2002/015858			Lys et al.	2005/0062440			Lys et al.
2002/016331	6 A1		Lys et al.	2005/0063194			Lys et al.
2002/017136			Morgan et al.	2005/0078477 2005/0093488		4/2005 5/2005	
2002/017137			Mueller et al.	2005/0093488			Hung et al. Dowling et al.
2002/017137 2002/017563			Morgan et al. Pitigoi-Aron	2005/0107694			Jansen et al.
2002/01/303		11/2002	•	2005/0110384			Peterson
2002/017625			Ducharme	2005/0116667	A 1	6/2005	Mueller et al.
2002/017981			Haines et al.	2005/0128751			Roberge et al.
2002/019597	5 A1	12/2002	Schanberger et al.	2005/0141225			Striebel
2003/001153		1/2003	-	2005/0143173 2005/0151489			Barney et al. Lys et al.
2003/002111		1/2003		2005/0151469			Tanguay
2003/002826 2003/003101			Blackwell Ishibashi	2005/0151005		7/2005	. •
2003/003101			Alexanderson et al.	2005/0162093			Timmermans et al.
2003/005259		3/2003		2005/0162100	A 1	7/2005	Romano et al.
2003/005788			Dowling et al.	2005/0162101			Leong et al.
2003/005788	6 A1		Lys et al.	2005/0174473			Morgan et al.
2003/005788			Dowling et al.	2005/0174780 2005/0184667		8/2005 8/2005	Sturman et al.
2003/005789			Lys et al.	2005/0104007			Machi et al.
2003/007628 2003/008571			Morgan et al. Bourgault et al.	2005/0206529			StGermain
2003/008571			Becks et al.	2005/0213320			Kazuhiro et al.
2003/010083			Lys et al.	2005/0213352		9/2005	Lys
2003/010281			Cross et al.	2005/0213353		9/2005	2
2003/013329			Mueller et al.	2005/0218838		10/2005	-
2003/013725			Piepgras et al.	2005/0218870 2005/0219860		10/2005	Schexnaider
2003/018500 2003/018501			Sommers et al. Gloisten	2005/0219872		10/2005	
2003/018301			Cunningham	2005/0225979			Robertson et al.
2003/010311		11/2003	_	2005/0231133	A 1	10/2005	
2003/022257		12/2003	Cok	2005/0236029			Dowling
2003/022258			Dowling, Jr. et al.	2005/0236998			Mueller et al.
2003/023434			Gaines et al.	2005/0242742 2005/0243577		11/2005	Cheang et al.
2004/000354		1/2004	<u> </u>	2005/0248299			Chemel et al.
2004/000798 2004/001295		1/2004 1/2004	Robertson et al.	2005/0253533			
2004/003600			Dowling	2005/0259424	A 1	11/2005	Zampini, II et al.
2004/003708			English et al.	2005/0264474		12/2005	
2004/005207	6 A1	3/2004	Mueller et al.	2005/0265019			Sommers et al.
2004/006204			Cross et al.	2005/0275626 2005/0276051			Mueller et al. Caudle et al.
2004/007557 2004/008096		4/2004 4/2004	Buschmann et al.	2005/0276051			Nortrup et al.
2004/008090			Mueller et al.	2005/0276064			Wu et al.
2004/009078			Dowling et al.	2005/0281030	A 1	12/2005	Leong et al.
2004/010526			Ducharme et al.	2005/0285547			Piepgras et al.
2004/010526		6/2004	-	2006/0002110			Dowling et al.
2004/011356			Dowling et al.	2006/0012987 2006/0012997			Ducharme et al. Catalano et al.
2004/011437			Lea et al.	2006/0012997			Morgan et al.
2004/011603 2004/012478		7/2004	Mueller et al.	2006/0022214			Morgan et al.
2004/013090			McClurg et al.	2006/0028155	A 1	2/2006	Young
2004/013090			Mueller et al.	2006/0028837			Mrakovich
2004/014132	1 A1	7/2004	Dowling et al.	2006/0034078			Kovacik et al.
2004/014588			Fatemi et al.	2006/0044152		3/2006	•
2004/015560			Lys et al.	2006/0050509 2006/0050514			Dowling et al. Opolka
2004/016019 2004/017875			Morgan et al. Mueller et al.	2006/0030314			Nakagawa et al.
2004/01/8/3			McGrath	2006/0030833			Davenport et al.
2004/021232			Dowling et al.	2006/0076908			Morgan et al.
2004/021232			Lys et al.	2006/0081863			Kim et al.
2004/021299			Morgan et al.	2006/0091826	A1	5/2006	Chen
2004/022332			Lee et al.	2006/0092640		5/2006	
2004/024089			_	2006/0098077			Dowling
2004/025185	4 A1	12/2004	Matsuda et al.	2006/0104058	Al	5/2006	Chemel et al.

(56)	Referer	ices Cited	2007/019552			Russell	
IIS	PATENT	DOCUMENTS	2007/019553 2007/020072			Reisenauer et al. Fredericks et al.	
0.5	. IAILINI	DOCOMENTS	2007/020571			Radkov et al.	
2006/0109648 A1	5/2006	Trenchard et al.	2007/020637	5 A1	9/2007	Piepgras et al.	
2006/0109649 A1		Ducharme et al.	2007/021146			Harwood	
2006/0109661 A1		Coushaine et al.	2007/021146			Chevalier et al.	
2006/0126325 A1		Lefebvre et al.	2007/022899 2007/023575		10/2007	Radkov et al.	
2006/0126338 A1 2006/0132061 A1		Mighetto McCormick et al.	2007/023615			Lys et al.	
2006/0132001 A1 2006/0132323 A1		Grady	2007/023635			Street et al.	
2006/0146531 A1		Reo et al.	2007/023728			-	
2006/0152172 A9	7/2006	Mueller et al.	2007/024034			Li et al.	
2006/0158881 A1		Dowling	2007/024165			Radkov et al. Wu et al.	
2006/0170376 A1 2006/0186214 A1		Piepgras et al. Simon	2007/024240				
2006/0180214 A1 2006/0192502 A1		Brown et al.				Zampini et al.	
2006/0193131 A1		McGrath et al.	2007/024784				
2006/0196953 A1	9/2006	Simon et al.	2007/024785				
2006/0197661 A1		Tracy et al.	2007/025216			Meis et al. Koerner et al.	
2006/0198128 A1		Piepgras et al.				Ducharme et al.	
2006/0208667 A1 2006/0215422 A1		Lys et al. Laizure et al.	2007/026337				
2006/0213422 A1 2006/0220595 A1		_	2007/027407			•	
2006/0221606 A1						Insalaco et al.	
2006/0221619 A1	10/2006	Nishigaki	2007/028592				
2006/0227558 A1		_	2007/028593			Southard et al.	
2006/0232974 A1		Lee et al.	2007/029002				
2006/0238884 A1 2006/0262516 A9		Jang et al. Dowling et al				Maxik et al.	
2006/0262510 A1			2008/000366	4 A1	1/2008	Tysoe et al.	
2006/0262544 A1		- -	2008/000794			Kelly et al.	
2006/0262545 A1		1 0	2008/001250 2008/001250		1/2008	Lys Mueller et al.	
2006/0265921 A1			2008/001230			Chiang	
2006/0273741 A1 2006/0274529 A1		Stalker, III Cao	2008/001332		1/2008		
2006/0285325 A1		Ducharme et al.	2008/001826			Kastner	
2007/0035255 A1			2008/002406			Ishibashi	
2007/0035538 A1		Garcia et al.	2008/002972 2008/003722		2/2008 2/2008	Shin et al.	
2007/0035965 A1 2007/0040516 A1			2008/003724				
2007/0041220 A1		Lynch	2008/003728			Rudisill	
2007/0047227 A1		Ducharme	2008/004943		2/2008		
2007/0053182 A1		Robertson	2008/005589- 2008/006268		3/2008	Deng Timmermans et a	1
2007/0053208 A1 2007/0057805 A1		Justel et al. Gomez	2008/006283			Galke et al.	1.
2007/0057805 A1 2007/0064419 A1		Gandhi	2008/006883			Matheson	
2007/0064425 A1		Frecska et al.	2008/007487			Panotopoulos	
2007/0070621 A1		Rivas et al.	2008/008907 2008/009280		4/2008	Hsu Smith et al.	
2007/0070631 A1		Huang et al.	2008/009280			Lin et al.	
2007/0081423 A1 2007/0086754 A1		Chien Lys et al.	2008/009399			Dennery et al.	
2007/0086912 A1		Dowling et al.	2008/009481		4/2008		
2007/0097678 A1		Yang	2008/009483			Dobbins et al.	
2007/0109763 A1		Wolf et al.	2008/012921 2008/013026			Lin et al. Dowling et al.	
2007/0109782 A1 2007/0115658 A1		Wolf et al. Mueller et al.	2008/015020			Usui et al.	
2007/0115058 A1 2007/0115665 A1		Mueller et al.	2008/015153			de Castris	
2007/0120463 A1		Hayashi et al.	2008/015795	7 A1*	7/2008	Pitchers	
2007/0120594 A1	5/2007	Balakrishnan et al.	2000/01/5005		5 /2000	3.5.4.4.1	340/539.1
2007/0127234 A1		Jervey, III	2008/015887 2008/015888			McAvoy et al. Zhu et al.	
2007/0133202 A1 2007/0139938 A1		Huang et al. Petroski et al.	2008/015888		7/2008		
2007/0135556 A1		Roberge et al.	2008/016482		7/2008	-	
2007/0146126 A1		Wang	2008/016485		7/2008	_	
2007/0147046 A1			2008/017500			Tsou et al.	
2007/0152797 A1		Chemel et al.	2008/018003 2008/018596		8/2008	Garrity et al.	
2007/0152808 A1 2007/0153514 A1		LaCasse Dowling et al.	2008/018550			Chou et al.	
2007/0159828 A1		Wang	2008/019243			Peng et al.	
2007/0165402 A1	7/2007	Weaver, Jr. et al.	2008/019859		8/2008		
2007/0165405 A1			2008/021138			Choi et al.	
2007/0173978 A1 2007/0177382 A1		Fein et al. Pritchard et al.	2008/021141 2008/021899		9/2008	Garrity 1 i	
2007/0177382 A1 2007/0182387 A1		Weirich	2008/021899			Melanson	
2007/0182307 711 2007/0188114 A1		Lys et al.	2008/022463			Melanson	
2007/0188427 A1	8/2007	Lys et al.	2008/025312	5 A1	10/2008	Kang et al.	
2007/0189026 A1		Chemel et al.	2008/025863			_	
2007/0195526 A1	8/2007	Dowling et al.	2008/025864	/ Al	10/2008	Scianna	

(56)	Referen	ces Cited		109558		5/2010	
HS	PATENT	DOCUMENTS		141173 148650			Negrete Wu et al.
0.5	. 17111111	DOCOMENTS		149806		6/2010	
2008/0265799 A1	10/2008	Sibert		157608			Chen et al.
2008/0278092 A1		Lys et al.		164404 177532			Shao et al. Simon et al.
2008/0285257 A1 2008/0285266 A1		•		181178			Chang et al.
2008/0290814 A1		Leong et al.		201269		8/2010	Tzou et al.
2008/0291675 A1		Lin et al.		207547 220469			Kuroki et al.
2008/0298080 A1 2008/0304249 A1				237790		9/2010	Ivey et al. Peng
2008/0304249 A1 2008/0310119 A1		Davey et al. Giacoma		265732		10/2010	•
2008/0315773 A1	12/2008	Pang		270925		10/2010	
2008/0315784 A1		-		277069 289418			Janik et al. Langovsky
2009/0002995 A1 2009/0010022 A1	1/2009	Lee et al. Tsai		308733		12/2010	. •
2009/0016063 A1				309652			Shen et al.
2009/0016068 A1		Chang		320922 327766			Palazzol et al. Recker et al.
2009/0018954 A1 2009/0021140 A1		Roberts Takasu et al.		006658			Chan et al.
2009/0032604 A1	2/2009			090682			Zheng et al.
2009/0033513 A1		Salsbury et al.		109454			McSheffrey, Sr. et al.
2009/0046473 A1		Tsai et al.		112661 140136			Jung et al. Daily et al.
2009/0052186 A1 2009/0059557 A1		Tanaka		141745			Gu et al.
2009/0059559 A1		Pabst et al.		149564			Hsia et al.
2009/0059603 A1		Recker et al.		156584 176298		6/2011 7/2011	Kım Meurer et al.
2009/0065596 A1 2009/0067170 A1		Seem et al. Bloemen et al.		199723		8/2011	
2009/0067170 A1 2009/0067182 A1		Hsu et al.		199769			Bretschneider et al.
2009/0072945 A1		Pan et al.		204777		8/2011	
2009/0073693 A1		Nall et al.		260647 280010		10/2011	Catalano et al.
2009/0085500 A1 2009/0086492 A1		Zampini, II et al. Meyer		291588		12/2011	
2009/0000192 AT		Faubion		008314	A1	1/2012	Simon et al.
2009/0091938 A1		Jacobson et al.		008315			Simon et al.
2009/0101930 A1 2009/0115597 A1		Li Giacalone		014086 043892		1/2012 2/2012	Visser et al.
2009/0113397 A1 2009/0122571 A1		Simmons et al.		063140		3/2012	
2009/0139690 A1		Maerz et al.		080994			Chin et al.
2009/0140285 A1		Lin et al.		081891 081894			Tung et al. Simon et al.
2009/0175041 A1 2009/0185373 A1		Yuen et al. Grajcar		098439			Recker et al.
2009/0195186 A1		Guest et al.		106144		5/2012	•
2009/0196034 A1		Gherardini et al.		106153 113628			Huang et al. Burrow et al.
2009/0213588 A1 2009/0219713 A1		Manes Siemiet et al.		120660			Grauvogel
2009/0219713 A1 2009/0231831 A1		Hsiao et al.		127726		5/2012	Yen
2009/0268461 A1		Deak et al.		139417			Mironichev et al.
2009/0273924 A1 2009/0273926 A1		•		146503 146532			Negley et al. Ivey et al.
2009/02/3920 A1 2009/0284169 A1		_		147597		6/2012	
2009/0290334 A1				153865			Rolfes et al.
2009/0295776 A1				155073 161666			McCanless et al. Antony et al.
2009/0296017 A1 2009/0296381 A1				194086			Liu et al.
2009/0302730 A1		Carroll et al.		195032		8/2012	
2009/0303720 A1		McGrath		212951 212953			Lai et al. Bloom et al.
2009/0316408 A1 2010/0002453 A1				230044			Zhang et al.
2010/0002433 A1				236533		9/2012	Nakamura et al.
2010/0019689 A1				236554 243216		9/2012	Rust Lai et al.
2010/0027259 A1 2010/0033095 A1		Simon et al. Sadwick		243210			Szprengiel et al.
2010/0033093 A1 2010/0033964 A1							Radermacher et al.
2010/0046210 A1				275154			Hood et al.
2010/0046222 A1		_		293991 293996		11/2012 11/2012	Thomas et al.
2010/0061598 A1 2010/0071946 A1		Seo Hashimoto		300409		11/2012	
2010/0071940 A1 2010/0072904 A1		Eckel et al.		300445	A1	11/2012	Chu et al.
2010/0073944 A1				300468			Chang et al.
2010/0079085 A1 2010/0096992 A1		Wendt et al.		300486 307524			Matsushita et al.
2010/0096992 A1 2010/0096998 A1		Yamamoto et al. Beers		307324 320598		12/2012	Schapira et al. Son
2010/0000000 AT 2010/0103664 A1		Simon et al.					Dellian et al.
2010/0103673 A1	4/2010	Ivey et al.		038230			Brown et al.
2010/0106306 A1		Simon et al.		039051		2/2013	
2010/0109550 A1	5/2010	Huda et al.	2013/0	044471	Al	2/2013	Cnen

(56)	Refere	nces Cited	EP EP	0924281 B1 0826167 B1	5/2003 6/2003
	U.S. PATEN	Γ DOCUMENTS	EP	1147686 B1	1/2004
			EP	1145602 B1	3/2004
2013/0044 2013/0050		Bretschneider et al. Bretschneider et al.	EP EP	1422975 A1 0890059 B1	5/2004 6/2004
2013/0050		Chu et al.	EP	1348319 B1	6/2005
2013/0057 2013/0058		Chao Dellian et al.	EP EP	1037862 B1 1346609 B1	7/2005 8/2005
2013/00539		Lodhie et al.	EP	1321012 B1	12/2005
2013/0077			EP EP	1610593 A2 1624728 A1	12/2005 2/2006
2013/00942 2013/01472		B Dellian et al. B Yang	EP	1415517 B1	5/2006
2013/0148	349 A1 6/2013	Pasqualini et al.	EP EP	1415518 B1 1438877 B1	5/2006 5/2006
2013/0200′ 2013/02016		Timmermans et al. Vissenberg et al.	EP	1166604 B1	6/2006
2013/0206	597 A1 8/2013	Wang et al.	EP EP	1479270 B1 1348318 B1	7/2006 8/2006
2013/02213 2013/02309		Deppe et al. Ivey et al.	EP	1399694 B1	8/2006
2013/0242	553 A1 9/2013	Feng et al.	EP	1461980 B1	10/2006
2013/0250 2013/0258		Brick et al. Dellian et al.	EP EP	1110120 B1 1440604 B1	4/2007 4/2007
2013/0230		Ivey et al.	EP	1047903 B1	6/2007
2014/00099 2014/00153		Simon et al.	EP EP	1500307 0922305 B1	6/2007 8/2007
2014/0015		l Ivey et al. l Simon et al.	EP	0922306 B1	8/2007
2014/0184		Siemiet et al.	EP EP	1194918 B1 1833035 A1	8/2007 9/2007
2014/0268′ 2014/0355′		Amrine, Jr. et al. Ivey et al.	EP	1048085 B1	11/2007
2014/0368	342 A1 12/2014	Ivey et al.	EP	1852648 A1	11/2007 12/2007
2015/00096 2015/00983		Simon et al. Simon et al.	EP EP	1763650 B1 1776722 B1	1/2007
2015/0204		Scapa et al.	EP	1873012 A1	1/2008
2015/0334	790 A1 11/2015	Scapa et al.	EP EP	1881261 A1 1459599 B1	1/2008 2/2008
	FOREIGN PATE	ENT DOCUMENTS	EP	1887836 A2	2/2008
			EP EP	1579733 B1 1145282 B1	4/2008 7/2008
CN	2869556 Y 101016976 A	2/2007	EP	1157428 B1	9/2008
CN CN	101010976 A 101075605 A	8/2007 11/2007	EP EP	1000522 B1 1502483 B1	12/2008 12/2008
CN	201129681 Y	10/2008	EP	1576858 B1	12/2008
CN CN	201184574 Y 101737664 A1	1/2009 6/2010	EP EP	1646092 B1 1579736 B1	1/2009 2/2009
DE	19651140 A1	6/1997	EP	1889519 B1	3/2009
DE DE	19624087 A1 29819966 U1		EP	1537354 B1	4/2009
DE	29817609 U1	1/2000	EP EP	1518445 B1 1337784 B1	5/2009 6/2009
DE DE	20018865 U1 102004035027 A1		EP	2013530 B1	8/2009
EP	0013782 B1		EP EP	1461982 B1 2333407 A1	9/2009 6/2011
EP EP	0091172 A2 0124924 B1	10/1983 9/1987	EP	2430888	3/2012
EP	0124924 B1 0174699 B1	11/1988	EP EP	2469155 A1 2573457 A1	6/2012 3/2013
EP	0197602 B1		EP	2554895 A1	6/2013
EP EP	0714556 0214701 B1	1/1991 3/1992	FR GB	2813115 2165977 A	2/2002 4/1986
EP	0262713 B1		GB	2215024 A	9/1989
EP EP	0203668 B1 0272749 B1		GB GB	2324901 A 2447257 A	11/1998 9/2008
EP	0337567 B1	11/1993	GB	247237 A 2472345	2/2011
EP EP	0390262 B1 0359329 B1	12/1993 3/1994	GB	2486410 A	6/2012
EP	0403011 B1	4/1994	GB JP	2495647 A S62241382	4/2013 10/1987
EP EP	0632511 0432848 B1	1/1995 4/1995	JP	06-054289	2/1994
EP	0659531 A1		JP JP	H6-54103 U 07-249467	7/1994 9/1995
EP EP	0403001 B1 0525876	8/1995 5/1996	JP	7264036	10/1995
EP	0889283 A1	7/1999	JP JP	08-162677 A H10308536	6/1996 11/1998
EP EP	0458408 B1 0578302 B1	9/1999 9/1999	JP	11-135274 A	5/1999
EP	0378302 B1 0723701 B1	1/2000	JP ID	H11-162234 A	6/1999
EP ED	1142452 B1 0787419 B1	3/2001 5/2001	JP JP	H11-260125 A 2001-238272 A	9/1999 8/2001
EP EP	1016062 B1		JP	2001-291406 A	10/2001
EP	1195740 A3	1/2003	JP JP	2002-141555 A 2002289373 A	5/2002 10/2002
EP EP	1149510 B1 1056993 B1	2/2003 3/2003	JP JP	3098271 U	2/2004
EP	0766436 B1		JP	2004-119078 A	4/2004

(56)	Refer	ences Cited	WO	WO2007143991 A1	12/2007
	EODEICKI DAT		WO NTS WO	WO2008018002 A2 WO2008027093 A2	
	FOREIGN PAI	ENT DOCUME	N1S WO WO	WO2008027093 AZ WO2008061991 A1	
JР	2004-273234 A	9/2004	WO	WO2008110978 A1	
JP	2004-275254 A 2004-335426	11/2004	WO	WO2008129488 A2	
JР	2005-158363 A		WO	WO2008137460 A2	
JP	2005-166617 A	6/2005	WO	WO2009061124 A2	_ · _ · _ · _ · _ · _ · _ · _ · _ · _ ·
$_{-}^{\mathrm{JP}}$	2005-347214 A		WO WO	WO2009067074 A1 WO2009111978 A1	
JР	2006012859 A		WO	WO2009111978 A1 WO2009143047 A2	
JP JP	2006-507641 A 2005-322866 A		WO	WO2000113047 A2	
JP	2003-322800 A 2007-227342 A		WO	WO2010014437 A2	
JР	3139714 U		WO	WO2010030509 A2	
$_{ m JP}$	2008-186758 A	8/2008	WO	WO2010047896 A3	
JP	2008-258124 A		WO WO	WO2010047898 A3 WO2010047973 A3	
JР	2008-293753 A		WO	WO2010047973 A3 WO2010069983 A1	
JP JP	3154200 2009283183 A	9/2009 12/2009	WO	WO2010083370 A2	
JР	2000200100 11	1/2010	WO	WO2010088105 A3	8/2010
JP	4491695 B		WO	WO2010132625 A2	
JP	2010-192229 A		WO	WO2010141537 A2	
JP	2010-205553 A		WO WO	WO2011005562 A2 WO2011005579 A2	
KR KR	10-2004-0008244 A 10-2006-0112113 A		WO	WO2011003373 712 WO2011021719 A1	
KR	20-0430022 Y		WO	WO2011072308 A1	
KR	10-2006-0133784 A		WO	WO2011074884 A2	
KR	10-2007-0063595 A	6/2007	WO	WO2011113709 A2	
KR	10-0781652	12/2007	WO WO	WO2011117059 A1 WO2011159436 A2	
KR	10-0844538 B		WO	WO2011139430 AZ WO2012001584 A1	
KR KR	10-0888669 B 10-0927851 B		WO	WO2012004708 A2	
TW	M337036	7/2008	WO	WO2012007899 A1	1/2012
TW	M349465 U		WO	WO2012019535 A1	
WO	99-06759 A		WO	WO2012025626 A1	
WO	99-10867 A		WO WO	WO2012063174 A1 WO2012117018 A1	
WO WO	99-31560 A 99/45312 A		WO	WO2012117016 A1 WO2012129301 A1	
WO	99/43312 A 99/57945 A		WO	WO2012131522 A1	
WO	00/01067 A		WO	WO2012131547 A1	10/2012
WO	WO0225842 A		WO	WO2013028965 A2	
WO	02-061330	8/2002	WO WO	WO2013029960 A1 WO2013030128 A2	
WO	WO02069306 A		WO	WO2013030128 A2 WO2013045255 A1	
WO WO	WO02091805 A: WO02098192 A:		WO	WO2013045439 A1	
WO	WO02099780 A		WO	WO2013057660 A2	
WO	WO03026358 A	1 3/2003	WO	WO2013079242 A1	
WO	WO03055273 A		WO WO	WO2013088299 A1 2013/097823 A1	
WO WO	WO03067934 A2 WO03090890 A		WO	2013/09/323 A1 2013/098700 A1	
WO	WO03090890 A WO03096761 A		WO	WO2013113548 A1	
WO	WO2004021747 A		WO	WO2013113661 A1	8/2013
WO	WO2004023850 A	2 3/2004	WO	WO2013121347 A1	
WO	WO2004032572 A		WO	WO2013132383 A1	
WO	WO2004057924	7/2004	WO	WO2013135527 A1	
WO WO	WO2004100624 A: WO2005031860 A:		WO	WO2013167419 A1	11/2013
WO	WO2005051550 A				
WO	WO2005060309 A			OTHER PU	JBLICATIONS
WO	WO2005084339 A		\sim \sim		44 1 1 1 1 24 2015
WO	WO2005089293 A			-	se matter, dated Feb. 24, 2015.
WO WO	WO2005089309 A: WO2005103555 A				11711 dated Mar. 23, 2015.
WO	WO2005116519 A			-	port for European Application No.
WO	WO2006023149 A			82.9 dated Sep. 19, 201	
WO	WO2006044328 A			09 dated Sep. 30, 2013	port for European Application No.
WO	WO2006046207 A			- '	nd Written Opinion dated Oct. 10,
WO WO	WO2006056120 A WO2006093889 A			-	plication No. PCT/US2013/049427
WO	WO2000093889 A. WO2006095315 A		Jul. 5, 2		PHEALION 110, 1 C 1/OBZ013/0434Z/
WO	WO2006095316 A		,		nd Written Opinion dated Aug. 13,
WO	WO2006127666 A			-	plication No. PCT/US2013/028669
WO	WO2006127785 A			ar. 1, 2013.	
WO	WO2006133272 A			<i>'</i>	nd Written Opinion dated Sep. 23,
WO WO	WO2006137686 A WO2007004679 A			-	plication No. PCT/US2013/049432
WO	WO2007004679 A WO2007081674 A			1. 5, 2013.	
WO	WO2007090292 A			,	ch Report for corresponding Euro-
WO	WO2007094810 A			•	3.7 dated Aug. 5, 2013 in 5 pages.

(56) References Cited

OTHER PUBLICATIONS

International Search Report and Written Opinion dated Nov. 16, 2015 from the International Application No. PCT/US2015/0030619.

Best Practice Guide—Commercial Office Buildings—Central HVAC System. [online], [Retrieved on Jan. 17, 2008] Retrieved from Flex Your Power Organization web page using Internet <URL: http://www.fypower.org/bpg/module.html?b=offices&m+Central HVAC Systems&s=Contr . . .>.

International Search Report and Written Opinion dated Feb. 9, 2012 from the corresponding International Application No. PCT/US2011/043524 filed on Jul. 11, 2011.

Airport International. Fly High With Intelligent Airport Building and Security Solutions [online], [retrieved on Oct. 24, 2008]. Retrieved from Airport International web page using Internet <URL: http://www.airport-int.com/categories/airport-building-and-security-solutions/fly-high-with-intelligent-airport-building-and-security-solutions.html>.

Cornell University. Light Canopy—Cornell University Solar Decathlon, [online], [retrieved on Jan. 17, 2008] Retrieved from Cornell University web page using Internet <URL: http://cusd.cornell.edu/cusd/web/index.php/page/show/section/Design/page/controls>.

D.N.A.-III, [online], [retrieved Mar. 10, 2009] Retrieved from the PLC Lighting Web Page using Internet <URL: http://www.plclighting.com/product_info_php?cPath=1&products_id=92>.

E20112-22 Starburst Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: http://www.et2online.com/proddetail. aspx?ItemID=E20112-22>.

E20743-09 Stealth Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: http://www.et2online.com/proddetail.aspx?ItemID=E20743-09>.

E22201-44 Esprit Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: http://www.et2online.com/proddetail.aspx?ItemID=E22201-44>.

Experiment Electronic Ballast. Electronic Ballast for Fluorescent Lamps [online], Revised Fall of 2007. [Retrieved on Sep. 1, 1997]. Retrieved from Virginia Tech Web Page using Internet <URL: http://www.ece.vt.edu/ece3354/labs/ballast.pdf.>.

Henson, Keith. The Benefits of Building Systems Integration, Access Control & Security Systems Integration, Oct. 1, 2000, Penton Media. [online], [retrieved on Oct. 24, 2008] Retrieved from Security Solutions Web page using Internet <URL: http://securitysolutions.com/mag/security_benefits_building_systems/>.

Hightower et al, "A Survey and Taxonomy of Location Systems for Ubiquitous Computing", University of Nashington, Computer Science and Engineering, Technical Report UW-CSE 01-08-03, IEEE, Aug. 24, 2001 in 29 pages.

Lawrence Berkeley National Labratory. Lighting Control System—Phase Cut Carrier. University of California, [online] [retrieved on Jan. 14, 2008] Retrieved from Lawrence Berkeley National Labratory web page using Internet <URL: http://www.lbl.gov/tt/techs/lbnl1871.html>.

LCD Optics 101 Tutorial [online]. 3M Corporation, [retrieved on Jan. 6, 2010]. Retrieved from the internet: <URL: http://solutions. 3m.com/wps/portal/3M/en_US/Vikuiti1/Brand Products/second-ary/optics101/>.

LED Lights, Replacement LED lamps for any incandescent light, [online], [retrieved on Jan. 13, 2000] Retrieved from LED Lights Web Page using Internet <URL: http://www.ledlights.com/replac.htm>.

Ledtronics, Ledtronics Catalog, 1996, p. 10, Ledtronics, Torrance, California.

Phason Electronic Control Systems, Light Level Controller (LLC) case study. Nov. 30, 2004. 3 pages, Phason Inc., Winnipeg, Manitoba, Canada.

Philips. Sense and Simplicity—Licensing program for Led Luminaires and Retrofits, Philips Intellectual Property & Standards, May 5, 2009.

Piper. The Best Path to Efficiency. Building Operating Management, Trade Press Publishing Company May 2000 [online], [retrieved on Jan. 17, 2008]. Retrieved from Find Articles Web Page using Internet <u > URL:http://findarticles.com/p/articles/mi_qu3922/is_200005/ai_n8899499/.

PLC-81756-AL "Fireball" Contemporary Pendant Light, [online], [retrieved on Feb. 27, 2009] Retrieved from the Arcadian Lighting Web Page using Internet <URL: http://www.arcadianlighting.com/plc-81756-al.html>.

PLC-96973-PC PLC Lighting Elegance Modern/Contemporary Pendant Light, [online], [retrieved on Feb. 27, 2009] Retrieved from the Arcadian Lighting Web Page using Internet <URL: http/www.arcadianlighting.com/plc-96978-pc.html>.

Saha et al, "Location Determination of a Mobile Device using IEEE 802.11 Access Point Signals", May 5, 2002 in 20 pages.

Sensor Switch, nLight Lighting Control System, [online], [retrieved on Jan. 11, 2008] Retrieved from Sensor Switch web page using Internet <URL: http://www.sensorswitch.com>.

Six Strategies, [online], [retrieved on Jan. 11, 2008] Retrieved from Encelium Technologies Inc. Web Page using Internet <URL: http://www.encelium.com/products/strategies.html>.

Spencer, Eugene. High Sales, Low Utilization. Green Intelligent Buildings, Feb. 1, 2007. [online]. Retrieved tom Green Intelligent Buildings web page using Internet <URL: http://www.greenintelligentbuildings.com/CDA/IBT_Archive/BNP_GUID_9-5-2006_A_10000000000000056772>.

Telecite Products & Services—Display Options, [online], [retrieved on Jan. 13, 2000] Retrieved from Telecite Web page using Internet <URL: http://www.telecite.com/en/products/options en.htm>.

Traffic Signal Products—Transportation Products Group, [online], [retrieved on Jan. 13, 2000] Retrieved from the Dialight Web page using Internet <URL: http://www.dialight.com/trans.htm>.

Truck-Lite, LEDSelect—LED, Model 35, Clearance & Marker Lighting, [online], [retrieved on Jan. 13, 2000] Retrieved tom Truck-Lite Web Page using Internet <URL: http://trucklite.com/leds14.html>.

Truck-Lite, LEDSelect—LED, Model 45, Stop, Turn & Tail Lighting [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: http://trucklite.com/leds4.html>. Truck-Lite, LEDSelect—LED, Super 44, Stop, Turn & Tail Lighting, [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: http://trucklite.com/leds2.html>. Wolsey, Robert. Interoperable Systems: The Future of Lighting Control, Lighting Research Center, Jan. 1, 1997, vol. 2 No. 2, Rensselaer Polytechnic Institute, Troy, New York [online]. Retrieved Lighting Research enter Web Page using Internet <URL: http://www.lrc.rpi.edu/programs/Futures/LF-BAS/index.asp>.

International Search Report and Written Opinion dated Feb. 15, 2013 from the corresponding International Application No. PCT/US2012/052244 filed on Aug. 24, 2012.

International Search Report and Written Opinion dated Aug. 30, 2011 for the corresponding International Application No. PCT/US2011/029994 filed Mar. 25, 2011.

Notification of Transmittal, the International Search Report and the Written Opinion of the International Searching Authority dated May 7, 2012, from the corresponding International Application No. PCT/US2011/064151.

Supplementary European Search Report for corresponding European Application No. 09822381.1 dated Jan. 4, 2013 in 5 pages. Supplementary European Search Report dated Feb. 22, 2012 from European Patent Application No. 09822424.9.

International Report on Patentability dated May 24, 2010 from the corresponding International Application No. PCT/US2009/060087 filed Oct. 9, 2009.

(56) References Cited

OTHER PUBLICATIONS

Extended European Search Report for co-pending European Application No. 10 73 2124 dated Dec. 13, 2012 in 8 pages.

Extended European Search Report for co-pending European Application No. 09822425.6 dated Aug. 30, 2012 in 9 pages.

Extended European Search Report for co-pending European Application No. 10797596.3 dated Jan. 17, 2013 in 11pages.

Extended European Search Report for co-pending European Application No. 10736237.8 dated Oct. 19, 2012 in 5 pages.

Extended European Search Report for co-pending European Application No. 10738925.6 dated Oct. 1, 2012 in 7 pages.

Examination and Search Report dated Jul. 2, 2012 in cooresponding United Kingdom Application No. 1018896.9 in 4 pages.

International Search Report and Written Opinion dated Jan. 4, 2010 from the corresponding International Application No. PCT/US2009/044313 filed May 18, 2009.

International Search Report and Written Opinion dated Feb. 7, 2011 from the corresponding International Application No. PCT/US2010/039678 filed Jun. 23, 2010.

International Search Report and Written Opinion dated May 7, 2010 from the corresponding International Application No. PCT/US2009/057109 filed on Sep. 16, 2009.

International Search Report and Written Opinion dated Apr. 8, 2010 from the corresponding International Application No. PCT/2009/055114 filed on Aug. 27, 2009.

International Search Report and Written Opinion dated Feb. 8, 2011 from the corresponding International Application No. PCT/US2010/039608 filed Jun. 23, 2010.

International Search Report and Written Opinion dated Dec. 13, 2010 from the corresponding International Application No. PCT/US2010/037006 filed Jun. 2, 2010.

International Search Report and Written Opinion dated Mar. 13, 2012 from the corresponding International Application No. PCT/US2011/052995 filed on Sep. 23, 2011.

International Search Report and Written Opinion dated May 14, 2010 from the corresponding International Application No. PCT/US2009/060085 filed Oct. 9, 2009.

International Search Report and Written Opinion dated Aug. 16, 2010 from the corresponding International Application No. PCT/US2010/021131 filed on Jan. 15, 2010.

International Search Report and Written Opinion dated Jul. 16, 2009 from the corresponding International Application No. PCT/US2008/084650 filed Nov. 25, 2008.

International Search Report and Written Opinion dated Aug. 17, 2010 from the corresponding International Application No. PCT/US2010/021489 filed on Jan. 20, 2010.

International Search Report and Written Opinion dated Jul. 17, 2009 from the corresponding International Application No. PCT/US2008/085118 filed Dec. 1, 2008.

International Search Report and Written Opinion dated Nov. 21, 2011 from the corresponding International Application No. PCT/US2011/029932 filed on Mar. 25, 2011.

International Search Report and Written Opinion dated Mar. 22, 2010 from the corresponding International Application No. PCT/US2009/053853 filed Aug. 14, 2009.

International Search Report and Written Opinion dated Nov. 23, 2011 from the corresponding International Application No. PCT/US2011/042761 filed on Jul. 1, 2011.

International Search Report and Written Opinion dated Nov. 23, 2011 from the corresponding International Application No. PCT/US2011/042775 filed on Jul. 1, 2011.

International Search Report and Written Opinion dated Dec. 24, 2010 from the corresponding International Application No. PCT/US2010/034635 filed May 13, 2010.

International Search Report and Written Opinion dated May 24, 2010 from the corresponding International Application No. PCT/2009/060083 filed Oct. 9, 2009.

Notification of Transmittal, the International Search Report and the Written Opinion of the International Searching Authority dated May 7, 2012 from the corresponding International Application No. PCT/US2011/058312.

International Search Report and Written Opinion dated Aug. 25, 2009 from corresponding International Application No. PCT/US2009/031049 filed Jan. 15, 2009.

International Search Report and Written Opinion dated Jan. 25, 2010 from the corresponding International Application No. PCT/US2009/048623 filed Jun. 25, 2009.


International Search Report and Written Opinion dated Feb. 26, 2010 from the corresponding International Application No. PCT/US2009/050949 filed Jul. 17, 2009.

International Search Report and Written Opinion dated Apr. 30, 2010 from the corresponding International Application No. PCT/US2009/057072 filed on Sep. 16, 2009.

International Search Report and Written Opinion dated Jul. 30, 2010 from the corresponding International Application No. PCT/US2010/021448 filed on Jan. 20, 2010.

International Search Report and Written Opinion dated Sep. 30, 2011 from the corresponding International Application No. PCT/US2011/029905 filed on Mar. 25, 2011.

^{*} cited by examiner

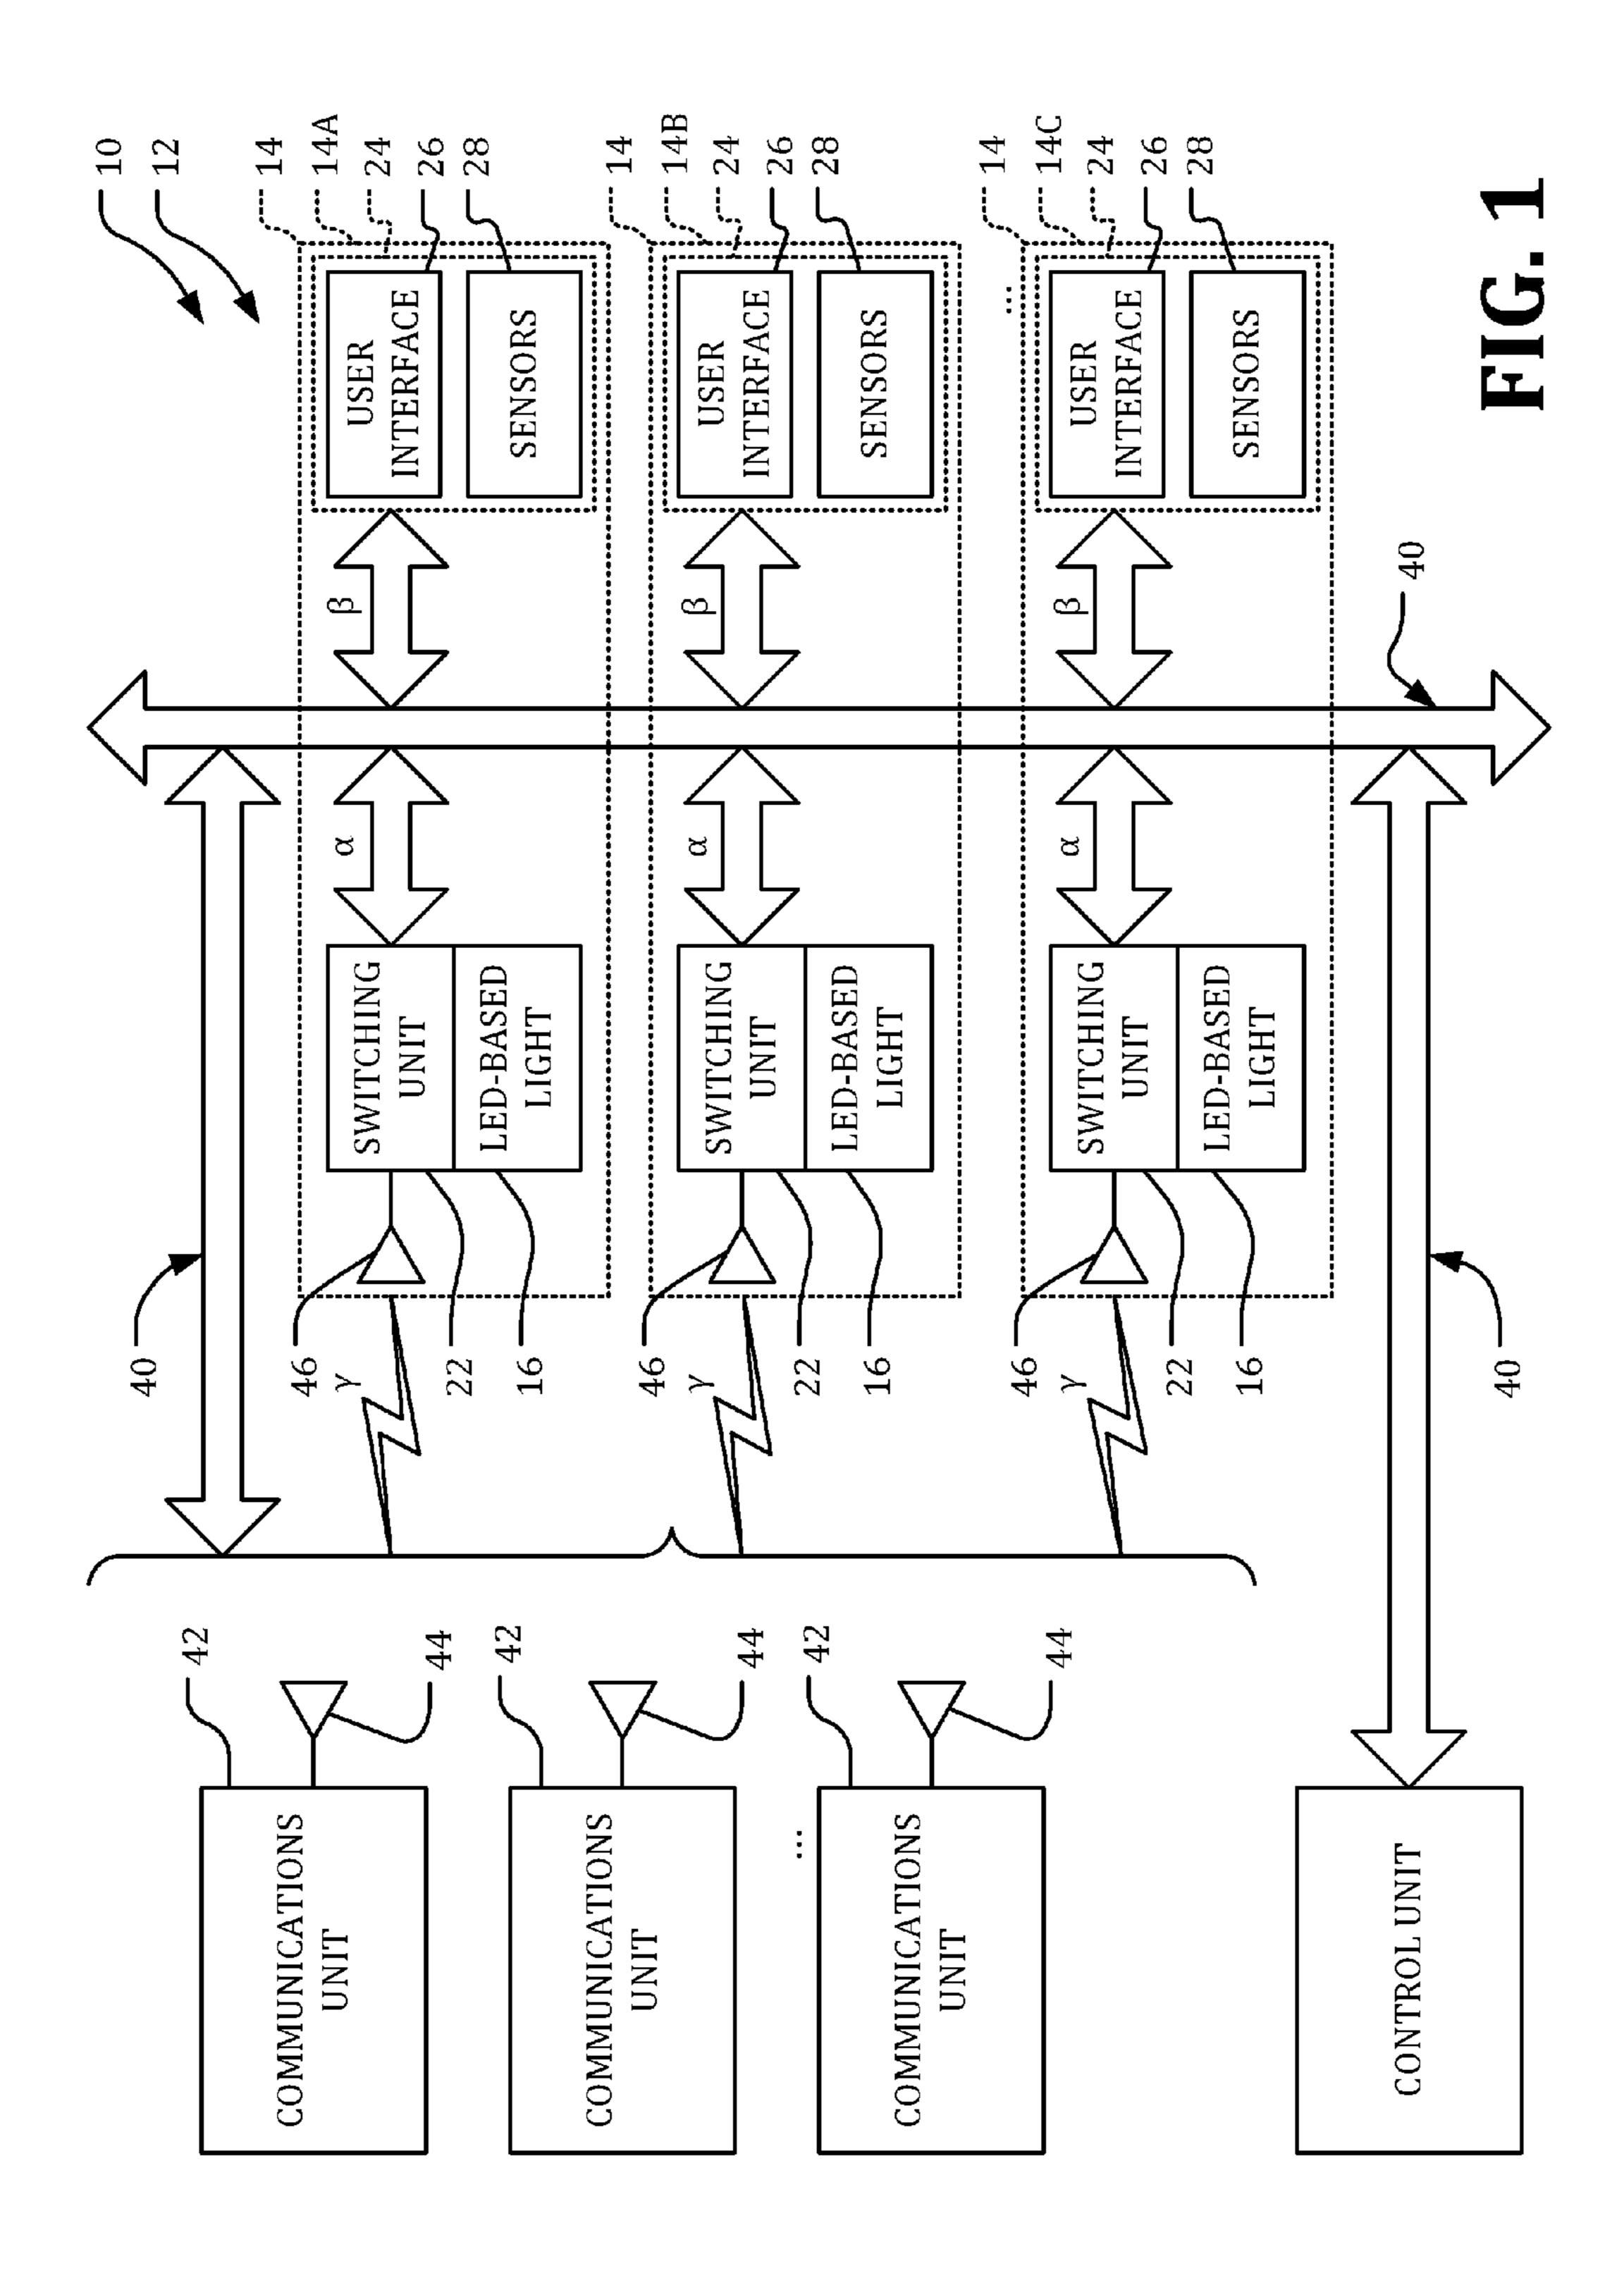


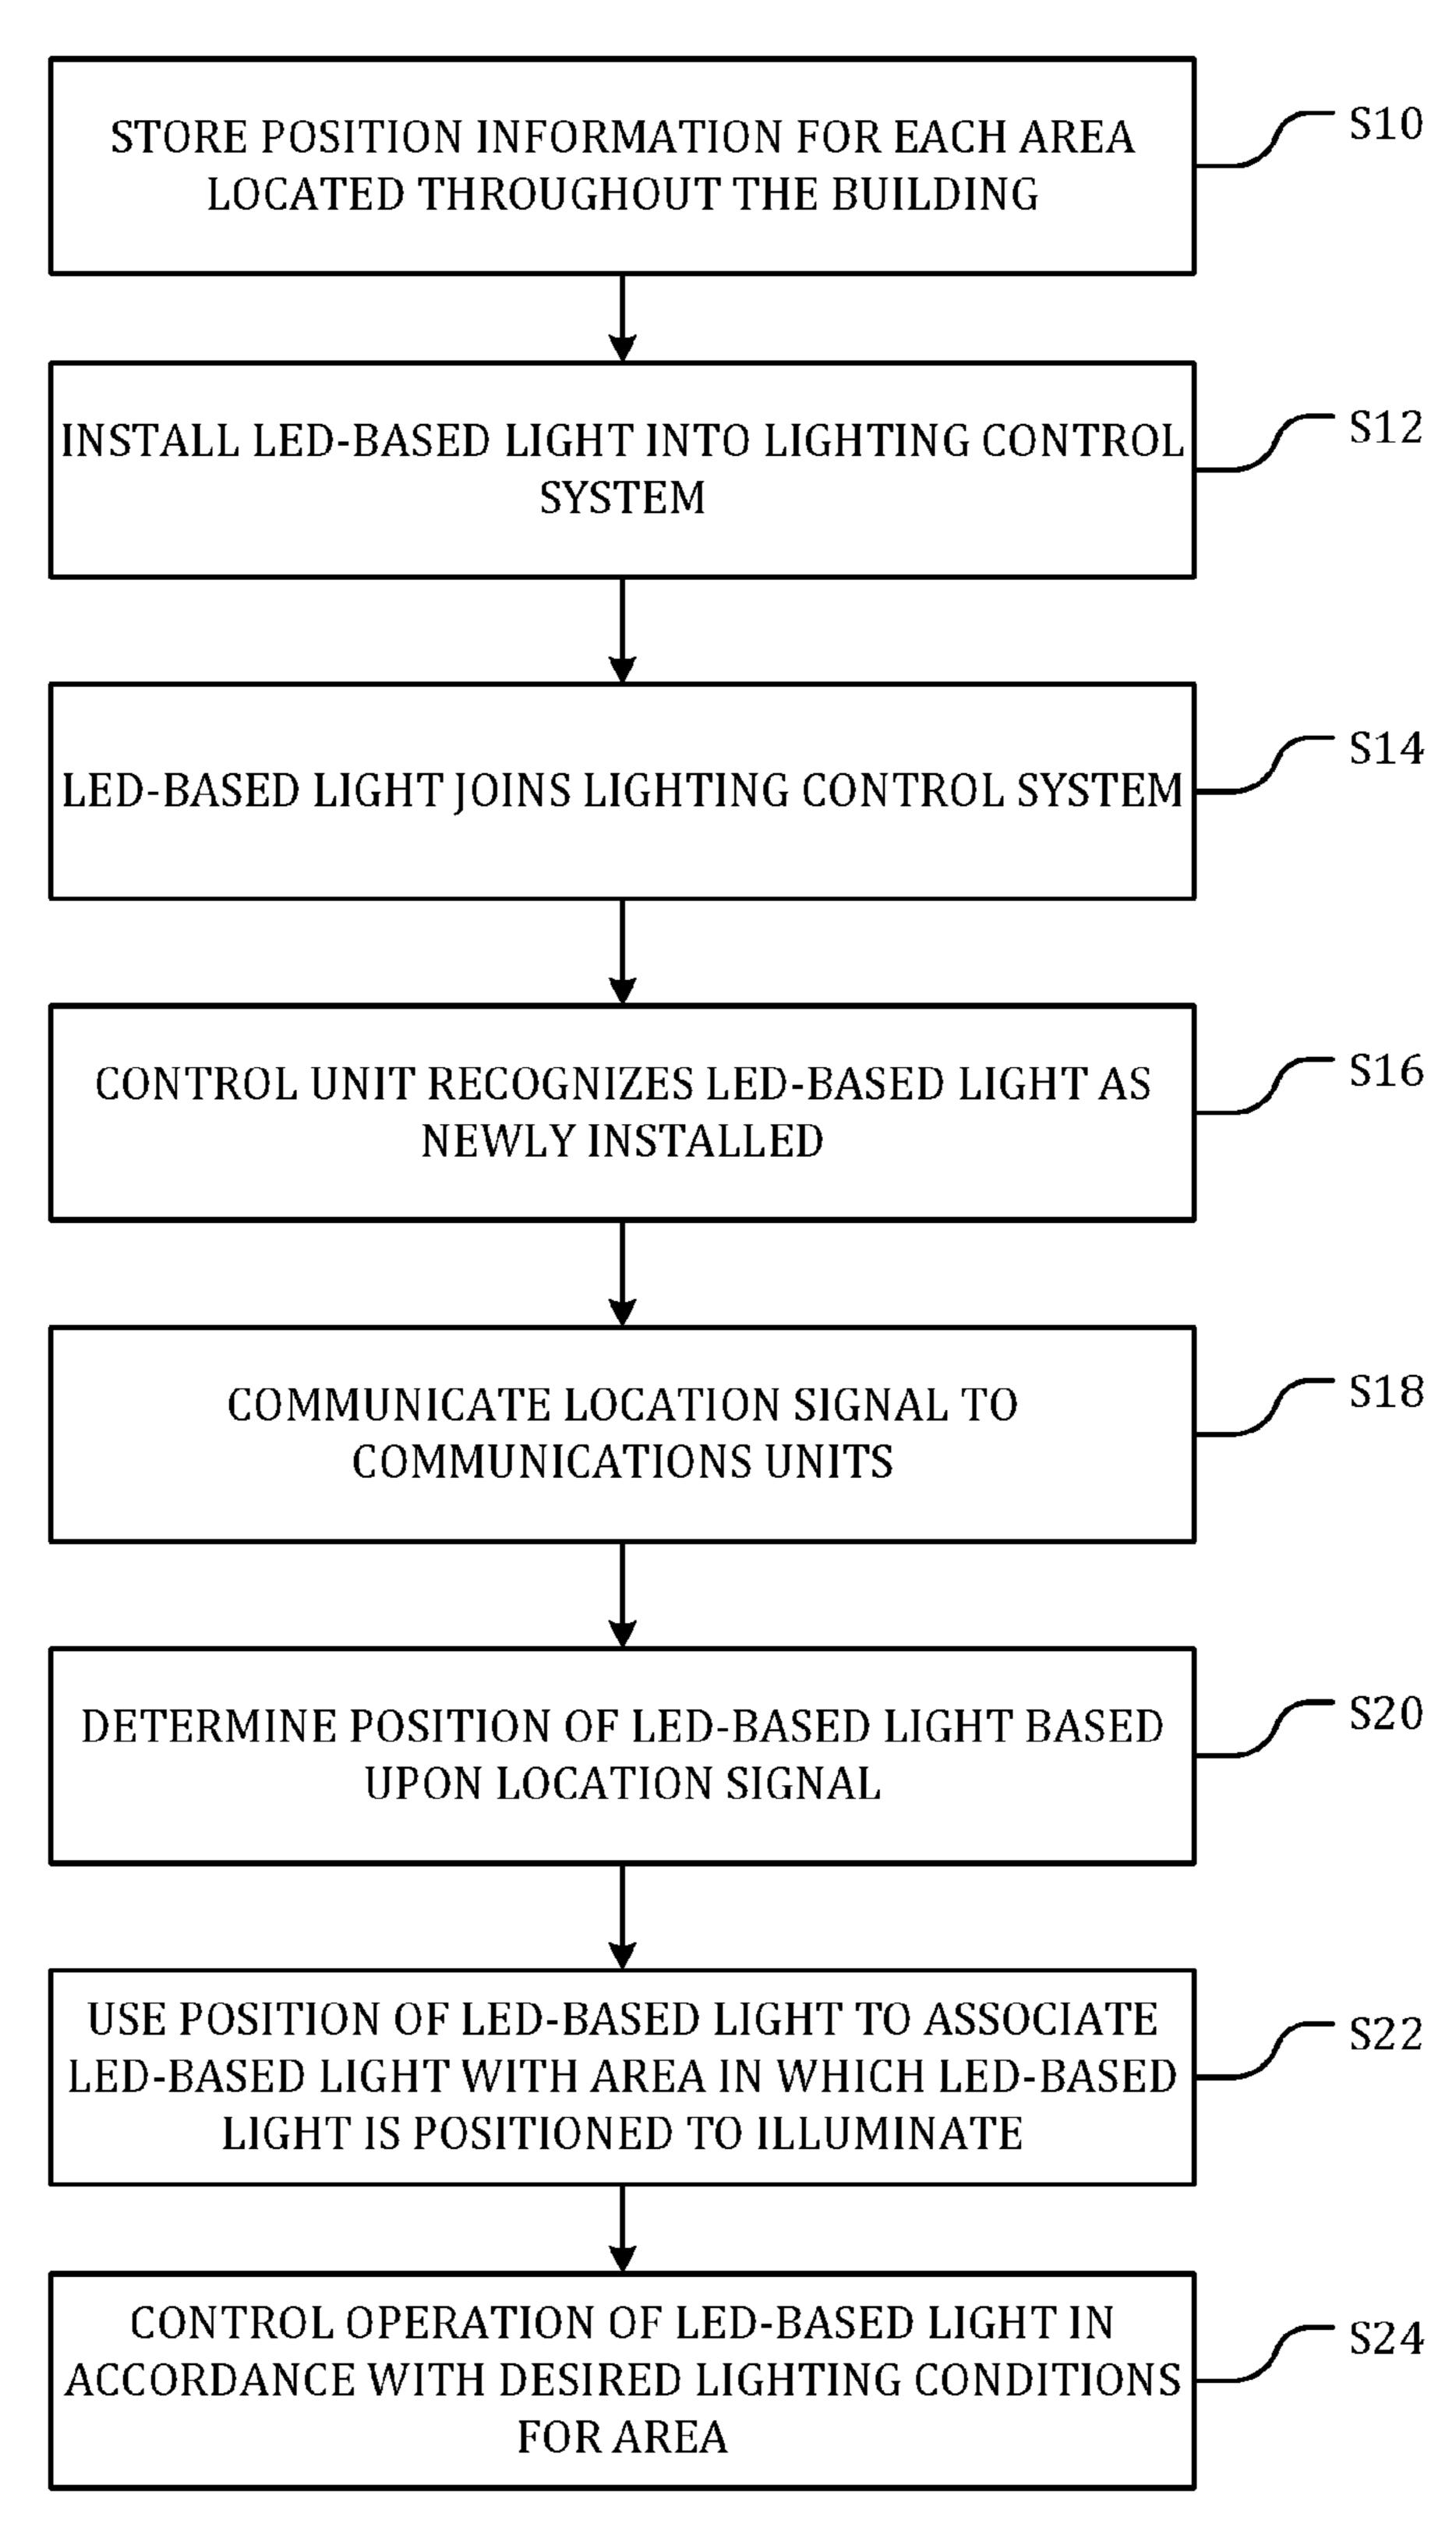


FIG. 2

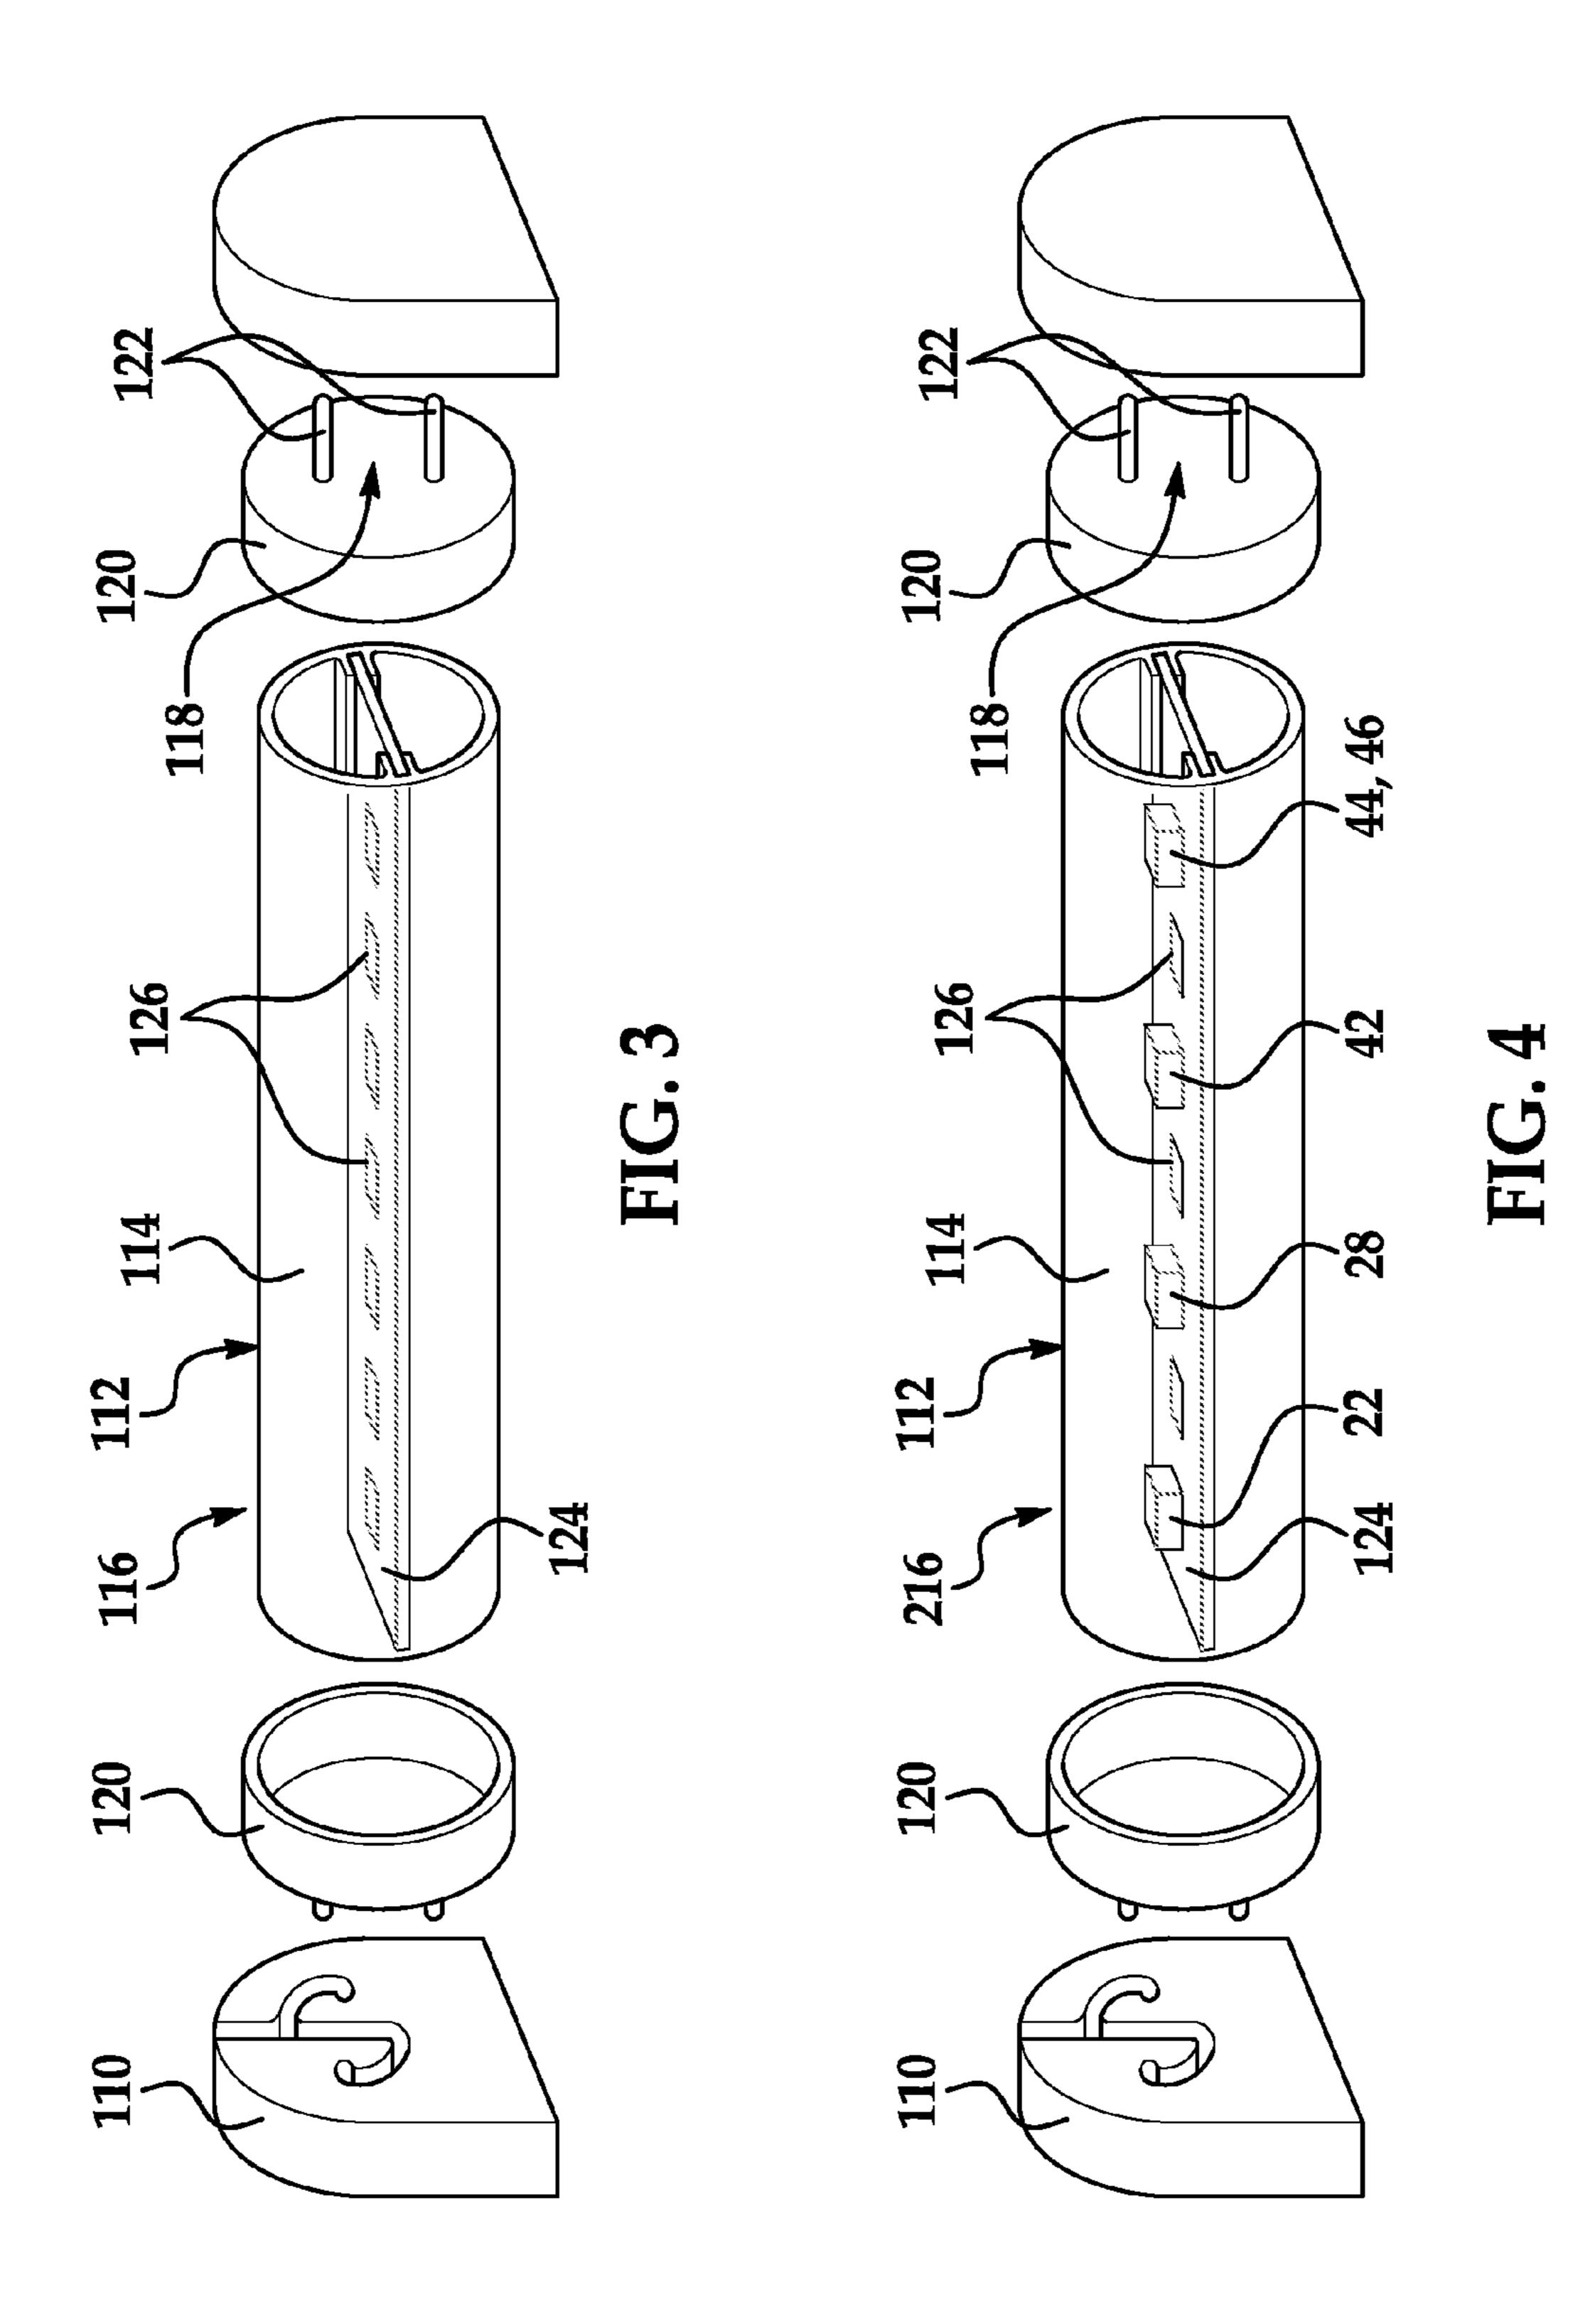

SYSTEM AND METHOD FOR CONTROLLING OPERATION OF AN LED-BASED LIGHT

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. Utility application Ser. No. 13/934,607, filed Jul. 3, 2013, which claims priority benefit to U.S. Provisional Patent Application No. 10 61/669,319 filed Jul. 9, 2012, the contents both of which is hereby incorporated by reference in their entirety.

TECHNICAL FIELD

The embodiments disclosed herein relate in general to a light emitting diode (LED)-based light for replacing a conventional light in a standard light fixture, and in particular to a lighting control system for controlling the operation of an LED-based light.

BACKGROUND

Fluorescent lights are widely used in a variety of locations, such as schools and office buildings. Although conventional fluorescent lights have certain advantages over, for example, incandescent lights, they also pose certain disadvantages including, inter alia, disposal problems due to the presence of toxic materials within the light.

referring to in which:

FIG. 1

FIG. 2

LED-based lights designed as one-for-one replacements 30 for fluorescent lights have appeared in recent years. LEDbased lights can be used in a building with a control system capable of managing various aspects of the building, including its lighting conditions. A lighting control system can be designed to regulate the lighting conditions in a building 35 through selective control of the operation of LED-based lights, in order to, for example, improve usability of the building or to optimize its energy use. Some of these lighting control systems can remotely regulate individual lighting conditions of multiple different areas within the building. 40 Such individualized regulation requires some form of association between each LED-based light and the particular area in which the LED-based light is positioned to illuminate. Association can entail, for example, manually assigning an LED-based light positioned to illuminate a particular 45 area with a logical address designated within the lighting control system to correspond to that area. Once associated, the lighting control system can correctly control operation of an LED-based light based upon the desired lighting conditions for its respective area.

SUMMARY

Disclosed herein are embodiments of methods and systems for controlling operation of a light source. In one aspect, a method of associating a light source with an area for which the light source is positioned to provide lighting comprises: identifying, based on a determined physical position of a light source, one of a plurality of areas as the area for which the light source is positioned to provide for the identified area; and controlling, using a processor, operation of the light source based on the identified area.

determine the info LED-based light.

A building care aspects of the builting the environmental ing, ventilation aspect so the builting of areas as the ing, ventilation aspect of the builting condition area.

In another aspect, alighting control system comprises: a 65 light source positioned to provide lighting for an area; and a control unit configured to: identify, based on a determined

2

physical position of the light source, one of a plurality of areas as the area for which the light source is positioned to provide lighting, identify at least one desired lighting condition for the identified area, and control operation of the light source based on the identified at least one desired lighting condition for the identified area.

In yet another aspect, a method of selecting a lighting condition for controlling operation of a light source comprises: storing, in memory, a plurality of position-dependent lighting conditions; and selecting, using a processor in communication with the memory, one of the position-dependent lighting conditions for controlling operation of the light source based on a determined physical position of the light source, such that the operation of the light source is controlled based on the selected position-dependent lighting condition.

These and other aspects will be described in additional detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

The various features, advantages and other uses of the present system and methods will become more apparent by referring to the following detailed description and drawings in which:

FIG. 1 is a system view of a lighting control system configured to control operation of an LED-based light;

FIG. 2 is a flow chart illustrating a process including operations for installing and associating the LED-based light of FIG. 1 within the lighting control system;

FIG. 3 is an exploded perspective view of an example of an LED-based light for use in the lighting control system of FIG. 1; and

FIG. 4 is an exploded perspective view of an alternative example of an LED-based light for use in the lighting control system of FIG. 1.

DETAILED DESCRIPTION

Manual association between an LED-based light and the particular area in which the LED-based light is positioned to illuminate can be time consuming and error-prone. Further, associations can be broken if a logically addressable LED-based light is moved and/or replaced during service, which can cause incorrect control over the operation of the LED-based light.

Disclosed herein are example configurations of a lighting control system for a building that can use information relating to the position of an LED-based light to associate the LED-based light with a particular area for purposes of regulating the lighting conditions for that area. Further disclosed herein are exemplary configurations of a control system that can reduce the amount of user input required to determine the information relating to the position of the LED-based light.

A building can include systems for managing various aspects of the building. These aspects can generally include the environmental conditions of the building, such as heating, ventilation and air conditioning (HVAC) conditions, security conditions and/or lighting conditions, for example. A "smart" building can include a control system, such as a building automation system, that can automatically manage the environmental conditions of the building in accordance with desired environmental conditions. Such buildings can include one or more areas located throughout the building, with each area lending itself to individualized regulation of one or more of its environmental conditions.

A representative building 10 including a building automation system implementing a lighting control system 12 for regulating the lighting conditions of multiple areas 14 throughout the building 10 is shown in FIG. 1. The terms "building" and "building automation system" are used 5 herein to describe the lighting control system 12 with reference to a representative setting in which the lighting control system 12 can be implemented. However, the lighting control system 12 could be implemented in other settings, such as outdoors, for example, or in other settings in 10 which a number of different areas 14 lending themselves to individualized regulation with respect to their lighting conditions can be defined.

Regulation of the environmental conditions of the multiple areas 14 located throughout the building 10 can include 15 a process of defining the areas **14** to be controlled. Each area 14, as it relates to individualized regulation of its environmental conditions, can correspond to some characteristic of the building 10 or its contents, or can correspond to some characteristic of the defined area 14. With respect to regulation of lighting conditions with the lighting control system 12, for example, the area 14 could be defined as an individual room or group of rooms located within the building 10. The area 14 could additionally or alternatively be defined in terms of its physical surroundings, such as an area 25 adjacent to source of light extrinsic to the lighting control system 12, for instance a window supplying natural light. The area 14 could also be defined in relation to its particular functional considerations and/or constraints with respect to lighting conditions. For example, the area 14 could be 30 defined above a workstation, or the area 14 could correspond to a particular type of room within the building 10, such as an office, a conference room, a hallway or a bathroom, for example. Similarly, the area 14 could be defined in relation to its particular requirements with respect to lighting con- 35 ditions, which could involve requirements of performance lighting, efficient lighting, safety lighting, comfort lighting and/or alarm lighting, for example. As a non-limiting example, an area 14A could be an individual room located within the building 10, an area 14B could be located 40 adjacent an east facing window receiving natural light and thereby requiring less artificial light from the lighting control system 12, and an area 14C could be located adjacent a desk or other workstation.

An area 14 could be one discrete individual location 45 within the building 10, or could comprise some grouping of locations lending themselves to similar regulation of their environmental conditions. A building 10 could include a single area 14 or multiple areas 14, and each area 14 of a building 10 need not be defined according to an approach 50 used to define another area 14 of the building 10. The building 10 can include more or less than the illustrated areas 14A, 14B and 14C, and the building 10 can include alternative and/or additional areas 14 depending upon which of a variety of environmental conditions is regulated. That is, 55 with respect to regulation of environmental conditions other than lighting conditions, areas 14 could be defined within the building 10 other than as the areas 14A, 14B and 14C described above, and alternative and/or additional areas 14 could be defined for purposes of individualized regulation of 60 the various other environmental conditions.

A building automation system for the building 10 can implement the lighting control system 12 to individually regulate the lighting conditions for each of the areas 14 located throughout the building 10. The illustrated lighting 65 control system 12 may include one or more LED-based lights 16 positioned to illuminate each of the areas. The

4

light 16 is positioned can be regulated through selective control of the operation the LED-based light 16. For ease of understanding, the lighting control system 12 is generally described below with reference to a single LED-based light 16 positioned to illuminate a singular area 14. However, it should be understood that the lighting control system 12 can include a plurality of areas 14A, 14B and 14C, each of which can include one or more respective LED-based lights 16 positioned to illuminate the areas 14A, 14B and 14C.

The lighting control system 12 includes one or more devices for controlling the operation of the LED-based light 16. In a basic lighting system, operation of an LED-based light 16 could be controlled by electrically connecting a device such as a light switch, dimmer or other similar operator actuated device between the LED-based light 16 and a power supply. These devices control operation of the LED-based light 16 by regulating a supply of AC or DC electrical power to the LED-based light 16. For example, a supply of electrical power to the LED-based light 16 can be selectively switched to control an on/off function of the LED-based light 16, and a supply of electrical power to the LED-based light 16 can be selectively modulated to control a dimming function of the LED-based light 16.

The illustrated implementation of the lighting control system 12 includes a control unit 20 configured to control the operation of the LED-based light 16 by selectively controlling a supply of electrical power to the LED-based light 16. The control unit 20 can be or include one or more controllers configured for controlling the operation of multiple LED-based lights 16 positioned in different areas 14 located throughout the building 10. A controller could be a programmable controller, such as a microcomputer including a random access memory (RAM), a read-only memory (ROM) and a central processing unit (CPU) in addition to various input and output connections. Generally, the control functions described herein can be implemented by one or more software programs stored in internal or external memory and are performed by execution by the CPU. However, some or all of the functions could also be implemented by hardware components. Although the control unit 20 is shown and described as a single central controller for performing multiple functions related to multiple areas 14, the functions described herein could be implemented by separate controllers which collectively comprise the illustrated control unit 20.

The control unit 20 can be electrically connected between the LED-based light 16 and a power supply and configured to control operation of the LED-based light 16 by directly switching and/or modulating a supply of electrical power to LED-based light 16. Alternatively, the control unit 20 can be configured to control operation of the LED-based light 16 by indirectly controlling a supply of electrical power to the LED-based light 16, for example by communicating a control signal α to a switching device. For example, as shown in FIG. 1, lighting control system 12 may include a switching unit 20 communicatively coupled to the control unit 20.

The switching unit **22** is electrically connected between the LED-based light **16** and a power supply and is configured to receive the control signal α and, in response to the control signal α, selectively regulate a supply of electrical power to the LED-based light **16**. The switching unit **22** can control an on/off function of the LED-based light **16** by including a relay or other mechanical, electrical or electromechanical switch configured to selectively switch a supply of electrical power to the LED-based light **16**. The switching

unit 22 can alternatively or additionally be or include components configured to selectively modulate a supply of electrical power to the LED-based light 16 to control a dimming function of the LED-based light 16. The switching unit 22 can selectively regulate a supply of electrical power 5 to the LED-based light 16 to control operation of the LED-based light 16 in a variety of other manners. For example, in addition to controlling on/off and dimming functions of the LED-based light 16, the switching unit 22 can also be configured to regulate a supply of electrical 10 power to the LED-based light 16 to achieve continuous, intermittent or other non-continuous operation of the LEDbased light 16. For example, the LED-based light 16 could be operated steadily, variably, or could be blinked, flashed or amplified according to some timed pattern by the switching 15 unit 22, depending upon the desired lighting conditions for the area 14 in which the LED-based light 16 is positioned to illuminate.

Each area 14 located throughout the building 10 can lend itself to individualized regulation of its lighting conditions in 20 accordance with respective desired lighting conditions. The lighting control system 12 includes the control unit 20 for controlling the lighting conditions of the area 14 through selective control of the operation of the LED-based light 16 positioned to illuminate the area 14. As described above, the 25 control unit 20 controls the operation of the LED-based light 16 by communicating a control signal α to the switching unit 22 configured to selectively regulate a supply of electrical power to the LED-based light 16. The control signal α generally corresponds to the desired lighting conditions for 30 the area 14 in which the LED-based light 16 is positioned to illuminate. The control signal α can be representative of a setpoint illumination level for the area 14, or could be representative of some other particular requirement or characteristic with respect to the desired lighting conditions for 35 the area 14 in which the LED-based light 16 is positioned to illuminate. For example, the control signal α could be representative of a requirement for performance lighting, efficient lighting, safety lighting, comfort lighting and/or alarm lighting in the area 14.

The control unit **20** is configured to determine the desired lighting conditions for the area **14** in which the LED-based light **16** is positioned to illuminate, and to generate the control signal α corresponding to the desired lighting conditions. The control unit **20** can generate the control signal 45 α with logic implementing various algorithmic or heuristics techniques. As non-limiting examples, the control unit **20** can include logic implementing timers, alarms, and/or rules relating to occupancy sensing, daylight harvesting or manual override control.

The lighting control system 12 can further include one or more input devices 24 corresponding to each of the areas 14. The input devices 24 are configured to relay information relating to the actual or desired lighting conditions and/or other environmental conditions of the area 14 to the control 55 unit 20. The lighting control system 12 can utilize the information from an input device 24 for purposes of individualized regulation of the lighting conditions for its area 14. The input devices 24 are configured to generate one or more input signals β . The input devices 24 are communicatively coupled to the control unit 20, and the logic of the control unit 20 can be responsive to the input signals β to generate the control signal α for communication to the switching unit 22.

The illustrated input devices 24 can include a user inter- 65 face 26 and various sensors 28. The user interface 26 is configured to receive information from a user of the building

6

10 relating to requested lighting conditions for the area 14 to which the user interface 26 corresponds, and to generate corresponding input signals β for communication to the control unit 20. The user interface 26 can be or include a switch, dimmer or other user actuated device. The user interface 26 could also include a web-based or similar computer-based component for receiving information relating to requested lighting conditions for an area 14.

The lighting control system 12 can incorporate the input signals β communicated from the user interface 26 to varying degrees as compared to input signals β communicated from other input devices 24. For example, the lighting control system 12 could give priority to the user interface 26 by providing for manual override control of the operation of the LED-based light 16 on the basis of a user's actuation of the user interface 26. In this example, the control unit 20 could include logic for generating a control signal \alpha directing the switching unit 22 to regulate a supply of electrical power to the LED-based light 16 in direct accordance with an operator's requested lighting conditions. Alternatively, the lighting control system 12 could be arranged such that a supply of electrical power to LED-based light 16 is regulated directly by the user interface 26 in accordance with an operator's requested lighting conditions without regard to a control signal α generated by the control unit 20.

The sensors 28 may be configured for measuring, monitoring and/or estimating various environmental conditions within a corresponding area 14 and for generating corresponding input signals β for communication to the control unit 20. Sensors 28 can include, for example, a sensor for measuring the actual lighting conditions of the area 14, or sensors 28 could include a sensor for monitoring or estimating occupancy of the area 14. The sensors 28 could include a motion sensor, a voice-activated sensor or a clock or calendar, for example. Similar to the input signals β from the user interface 26, the input signals β from the sensors 28 can be incorporated into the logic of the control unit 20 for generation of the control signal α .

An exemplary communications link 40 is included in the 40 lighting control system 12 for communicatively coupling the components of the lighting control system 12. The communications link 40 may generally be configured to support digital and/or analog communication between the components included in the lighting control system 12. For example, the communications link 40 may be configured to communicatively couple the control unit 20, the switching unit 22 and the input devices 24. The communications link 40 can include wired and/or wireless communications channels using any industry standard or proprietary protocols. As 50 a non-limiting example, a wired communications link 40 could be implemented with 0-10V signals, DALI or Ethernet. As a further non-limiting example, a wireless communications link 40 could be implemented, for example, with wireless DALI, IEEE 802.11, Wi-Fi, Bluetooth or RF channels, or through infrared, ultrasonic or modulated visible light, such as light emitted from the LED-based lights 16. Further, the communications link 40 could be implemented with multiple communications channels, each using differing protocols.

The illustrated lighting control system 12 can provide localized regulation of the lighting conditions for multiple different areas 14 with the control unit 20 by selectively controlling the operation of the respective LED-based lights 16 positioned to illuminate the respective areas 14. The control unit 20 can determine differing desired lighting conditions for each of the areas 14. For example, the desired lighting conditions for area 14A could necessitate that the

LED-based light 16 positioned to illuminate area 14A be controlled to an on state, the desired lighting conditions for area 14B could necessitate that the LED-based light 16 positioned to illuminate area 14B be controlled to an off state, and the desired lighting conditions for area 14C could 5 necessitate that the LED-based light 16 positioned to illuminate area 14C be controlled to a modulated state.

In order for the lighting control system 12 to efficiently regulate the lighting conditions in multiple areas 14, the lighting control system 12 may be configured to control the 10 LED-based light **16** positioned to illuminate a particular area **14** without affecting the operation of LED-based lights **16** positioned to illuminate other areas 14. Proper functioning of the lighting control system 12 generally requires some association between each LED-based light 16 and the area 15 14 in which the LED-based light 16 is positioned to illuminate. Association can entail, for example, manually landing wires between terminals of the control unit 20 and switching units 22 and/or corresponding LED-based lights 16. Alternatively, association could entail manually assigning a 20 switching unit 22 and/or corresponding LED-based light 16 with a logical address designated within the lighting control system 12, for example within the logic of the control unit 20, to correspond to a particular area 14. Once associated, the lighting control system 12 can control operation of an 25 LED-based light 16 to regulate the lighting conditions for its respective area 14 according to its desired lighting conditions.

The illustrated lighting control system 12 may include a plurality of communications units 42 configured to receive 30 information relating to the position of an LED-based light 16 within the building 10. The lighting control system 12 is configured to use the information relating to the position of the LED-based light 16 within the building 10 to associate the LED-based light 16 with the area 14 in which the 35 LED-based light 16 is positioned to illuminate. For example, the lighting control system 12 can be configured to compare the position of an LED-based light 16 with known or determined positions of the areas 14 located throughout the building 10. The lighting control system 12 can then correlate the position of the LED-based light 16 with a particular area 14 in which the LED-based light 16 is positioned to illuminate. Once a correlation is drawn between a particular LED-based light 16 and the area 14 in which the LED-based light 16 is positioned to illuminate, the lighting control 45 system 12 can associate the LED-based light 16 to the area 14 for purposes of future regulation of the lighting conditions for that area 14.

The communications units **42** may be communicatively coupled to the lighting control system 12 through one or 50 more communications channels that can be included in the communications link 40. As shown in FIG. 1, the communications units 42 may be communicatively coupled to the switching units 22. Each of the communications units 42 may include a communications device 44 configured to 55 receive a location signal γ from a communications device **46** included in the switching units 22. The communications devices 44 and 46 can be configured for communication through a communications channel implemented to communicatively couple the communications units 42 and the 60 switching units 22, and the communications channel need not be the same as used elsewhere in the communication link 40. For example, an existing building automation system for the building 10 may already include wired communications channels for communicatively coupling the control unit 20, 65 the switching unit 22 and the input devices 24. The building automation system for the building 10 could be retrofitted to

8

implement the lighting control system 12 by including a wireless communications channel configured to communicatively couple the communications units 42 to the switching units 22. In this non-limiting example, the communications devices 44 and 46 can be the illustrated transceivers 44 and 46. However, the communications devices 44 and 46 could be other devices known to those skilled in the art configured to send and/or receive the location signal γ over a chosen communications channel included in the communications link 40.

As shown in FIG. 1, the communications units 42 may be communicatively coupled to switching units 22 to receive the location signal γ from the communications devices 46. The switching units 22 including the communications devices 46 can be located adjacent to or included in corresponding LED-based lights 16, such that the location signal γ conveys information generally relating to the position of the LED-based light 16. Although the communications devices 46 are described with reference to the switching units 22, the communications devices 46 could alternatively be included in the LED-based lights 16, or could be otherwise included in the lighting control system 12 according to some known or determinable spatial relationship with the LED-based light 16.

The lighting control system 12 is configured to determine, or estimate, the physical position of each of the LED-based lights 16 based at least partially upon the location signal γ. The position of an LED-based light 16 could be determined absolutely, for example, or could be determined relative to some aspect relating to the building 10 or lighting control system 12. In the exemplary implementation of the lighting control system 12, multiple communications units 42 form a spatially distributed network of communications units **42**. The communications units 42 can be distributed within and/or without the building 10 to form the spatially distributed network of communications units 42. The location signal y can be received by one or more of the communications units 42, which can be configured to determine the position of the LED-based lights 16, either individually, in some combination with each other, and/or in combination with the control unit 20 or other components of the lighting control system 12.

The lighting control system 12 can be configured to determine the position of the LED-based light 16 using various techniques, either individually or in some combination. As non-limiting examples, the position of an LEDbased light 16 can be determined based upon time of arrival (TOA) of RF, infrared or ultrasonic signals, or based upon TOA of light signals, such as visible light signals emitted from the LED-based lights 16; the position of an LED-based light 16 can be determined based upon direction finding (DF) of RF, infrared or ultrasonic signals, or based upon DF of light signals, such as visible light signals emitted from the LED-based lights 16; the position of an LED-based light 16 could be determined by superimposing currents on power lines forming a power grid, or though other branch circuit monitoring methods; or the position of an LED-based light 16 could be determined by monitoring the strength of the location signal y throughout the spatially distributed network of communications units **42**. The position of an LED-based light 16 could also be determined through communication with components external from the lighting control system 12, for example by using 3 g or 4 g signals to communicate with global positioning systems (GPSs) or other external location systems. The position of the LED-based light 16 could also be determined more accurately through some combination of the above techniques.

A process of installing an LED-based light 16 into the lighting control system 12 of a building 10 is illustrated in FIG. 2. In step S10, information relating to the positions of each of the areas 14 located throughout the building 10 is stored in the lighting control system 12. The lighting control system 12 can be configured to know or determine the positions of each of the areas 14. Similar to the positions of the LED-based lights 16, the positions of the areas 14 could be known or determined absolutely, for example, or relative to some aspect relating to the building 10 or the lighting 10 control system 12. For example, the physical aspects of the building 10, such as floor plans or power supply structures, could be stored in memory on the control unit 20, along with information relating to the relative positions of the areas 14 within the building 10.

In step S12, an LED-based light 16 is installed into the lighting control system 12. In step S14, the LED-based light 16 joins the lighting control system 12 by communicating with the control unit 20 through the communications link 40, and in step S16, the control unit 20 recognizes the LED-based light 16 as newly installed into (or newly positioned within) the lighting control system 12. The LED-based light 16 can have a logical address readable by the control unit 20, for example, or can be otherwise recognizable by the control unit 20 as a distinct lighting element.

In step S18, the location signal γ is communicated to the spatially distributed network of communications units 42. The location signal γ can be communicated autonomously, for example, or at the direction of the installer or at the direction of the lighting control system 12 or control unit 20. 30 In step S20, the position of the LED-based light 16 is determined using one or more of the above described location techniques, as well as others. The logic for determining the position of the LED-based light 16 can be implemented by one or more of the communications units 35 42, or can be distributed between one or more of the communications units 42 and the other components of the lighting control system 12. The position of an LED-based light 16 could also be determined physically externally from the lighting control system 12, for example through com- 40 munication with a GPS or other location system. The position of the newly installed LED-based 16 could also be determined and/or verified with reference to one or more LED-based lights 16 whose positions are manually determined.

In step S22, the lighting control system 12 can use the determined position of the LED-based light 16 to associate the LED-based light 16 with the area 14 in which the LED-based light 16 is positioned to illuminate. For example, the lighting control system 12 can implement logic using the 50 control unit 20 to compare the determined position of the LED-based light 16 with the known or determined positions of the areas 14 located throughout the building 10. By correlating the determined position of the LED-based light 16 with a position of a particular area 14, the control unit 20 can determine that the LED-based light 16 is positioned to illuminate that particular area 14. Finally, in step S24, the lighting control system 12 can associate the LED-based light 16 to the area 14 within the control unit 20 for purposes of future regulation of the lighting conditions for that area 14.

FIG. 3 illustrates an example of an LED-based light 116 for use in the lighting control system 12. The LED-based light 116 is configured to replace a conventional light in a standard light fixture 110. The light fixture 110 can be designed to accept conventional fluorescent lights, such as 65 T5, T8 or T12 fluorescent tube lights, or can be designed to accept other standard lights, such as incandescent bulbs. The

10

light fixture 110 could alternatively be designed to accept non-standard lights, such as lights installed by an electrician. The light fixture 110 can connect to a power supply, and can optionally include a ballast connected between the power supply and the LED-based light 116. The switching unit 22 could be compatible with the fixture 110 to electrically connect between the power supply and the LED-based light 116, or the switching unit 22 could be included in the fixture 110, for example.

In some implementations, the LED-based light 116 includes a housing 112 at least partially defined by a high dielectric light transmitting lens 114. The lens 114 can be made from polycarbonate, acrylic, glass or other light transmitting material (i.e., the lens 114 can be transparent or 15 translucent). The term "lens" as used herein means a light transmitting structure, and not necessarily a structure for concentrating or diverging light. The LED-based light 116 can include features for uniformly distributing light to an environment to be illuminated in order to replicate the uniform light distribution of a conventional fluorescent light. For example, the lens 114 can be manufactured to include light diffracting structures, such as ridges, dots, bumps, dimples or other uneven surfaces formed on an interior or exterior of the lens 114. The light diffracting structures can 25 be formed integrally with the lens 114, for example, by molding or extruding, or the structures can be formed in a separate manufacturing step such as surface roughening. In addition to or as an alternative to light diffracting structures, a light diffracting film can be applied to the exterior of the lens 114 or placed in the housing 112, or, the material from which the lens 114 is formed can include light refracting particles. For example, the lens 114 can be made from a composite, such as polycarbonate, with particles of a light refracting material interspersed in the polycarbonate. In other embodiments, the LED-based light 116 may not include any light diffracting structures or film.

The housing 112 can include a light transmitting tube at least partially defined by the lens 114. Alternatively, the housing 112 can be formed by attaching multiple individual parts, not all of which need be light transmitting. For example, the housing 112 can be formed in part by attaching the lens 114 to an opaque lower portion. The housing 112 can additionally include other components, such as one or more highly thermally conductive structures for enhancing 45 heat dissipation. While the illustrated housing **112** is cylindrical, a housing having a square, triangular, polygonal, or other cross sectional shape can alternatively be used. Similarly, while the illustrated housing 112 is linear, housings having an alternative shape, e.g., a U-shape or a circular shape can alternatively be used. The LED-based light 116 can have any suitable length. For example, the LED-based light 116 may be approximately 48" long, and the housing 112 can have a 0.625", 1.0" or 1.5" diameter for engagement with a common standard fluorescent light fixture.

The LED-based light 116 can include an electrical connector 118 positioned at each end of the housing 112. In the illustrated example, the electrical connector 118 is a bi-pin connector carried by an end cap 120. A pair of end caps 120 can be attached at opposing longitudinal ends of the housing 112 for physically connecting the LED-based light 116 to a standard fluorescent light fixture 110. The end caps 120 can be the sole physical connection between the LED-based light 116 and the fixture 110. At least one of the end caps 120 can additionally electrically connect the LED-based light 116 to the fixture 110 to provide power to the LED-based light 116. Each end cap 120 can include two pins 122, although two of the total four pins can be "dummy pins" that

provide physical but not electrical connection to the fixture 110. Bi-pin electrical connector 118 is compatible with many standard fluorescent fixtures, although other types of electrical connectors can be used, such as single pin connector or screw type connector.

The LED-based light 116 can include a circuit board 124 supported within the housing 112. The circuit board 124 can include at least one LED 126, a plurality of series-connected or parallel-connected LEDs 126, an array of LEDs 126 or any other arrangement of LEDs 126. Each of the illustrated 10 LEDs 126 can include a single diode or multiple diodes, such as a package of diodes producing light that appears to an ordinary observer as coming from a single source. The LEDs 126 can be surface-mount devices of a type available from Nichia, although other types of LEDs can alternatively 15 be used. For example, the LED-based light 116 can include high-brightness semiconductor LEDs, organic light emitting diodes (OLEDs), semiconductor dies that produce light in response to current, light emitting polymers, electro-luminescent strips (EL) or the like.

The circuit board 124 can include power supply circuitry configured to condition an input power received from, for example, the fixture 110 through the electrical connector 118 to a power usable by and suitable for the LEDs 126. In some implementations, the power supply circuitry can include one 25 or more of an inrush protection circuit, a surge suppressor circuit, a noise filter circuit, a rectifier circuit, a main filter circuit, a current regulator circuit and a shunt voltage regulator circuit. The power supply circuitry can be suitably designed to receive a wide range of currents and/or voltages 30 from a power source and convert them to a power usable by the LEDs 126.

The circuit board 124 is illustrated as an elongate printed circuit board. The circuit board 124 can extend a length or a partial length of the housing 112. Multiple circuit board 35 sections can be joined by bridge connectors to create the circuit board 124. The circuit board 124 can be supported within the housing 112 through slidable engagement with a part of the housing 112, though the circuit board 124 can alternatively be clipped, adhered, snap- or friction-fit, 40 screwed or otherwise connected to the housing 112. Also, other types of circuit boards may be used, such as a metal core circuit board. Or, instead of the circuit board 124, other types of electrical connections (e.g., wires) can be used to electrically connect the LEDs 126 to a power source.

The LEDs 126 can emit white light or light within a range of wavelengths. However, LEDs that emit blue light, ultraviolet light or other wavelengths of light can be used in place of or in combination with white light emitting LEDs 126. The number, spacing and orientation of the LEDs 126 can be 50 a function of a length of the LED-based light 116, a desired lumen output of the LED-based light **116**, the wattage of the LEDs **126** and/or the viewing angle of the LEDs **126**. For a 48" LED-based light 116, the number of LEDs 126 may vary from about thirty to sixty such that the LED-based light **116** 55 outputs approximately 3,000 lumens. However, a different number of LEDs 126 can alternatively be used, and the LED-based light 116 can output any other amount of lumens. The LEDs 126 can be evenly spaced along the circuit board 124 and arranged on the circuit board 124 to 60 substantially fill a space along a length of the lens 114 between end caps 120 positioned at opposing longitudinal ends of the housing 112. Alternatively, single or multiple LEDs 126 can be located at one or both ends of the LED-based light 116. The LEDs 126 can be arranged in a 65 single longitudinally extending row along a central portion of the LED circuit board 124, as shown, or can be arranged

12

in a plurality of rows or arranged in groups. The spacing of the LEDs 126 can be determined based on, for example, the light distribution of each LED 126 and the number of LEDs 126.

An alternative example of and LED-based light 216 is shown in FIG. 4. The construction of the LED-based light 216 can be similar to the construction of the LED-based light 116 of FIG. 3, and the LED-based light 216 can include the housing 112, the lens 114, the bi-pin 122 electrical connectors 118 carried by a pair of end caps 120, the circuit board 124 and the LEDs 126.

In addition, the LED-based light **216** can incorporate one or more of the above described components of the lighting control system **12**. For example, the switching unit **22** can be included the LED-based light **216**. The switching unit **22** can be included in the circuit board **124** and can be electrically connected between the fixture **110** conveying electrical power from a power supply and the LEDs **126** of the LED-based light **216**. The switching unit **22** of the LED-based light **216** can be configured to receive the control signal α and, in response to the control signal α, selectively regulate a supply of electrical power to the LEDs **126** to control operation of the LED-based light **216**.

The LED-based light 216 can also incorporate one or more of the sensors 28, for example, and can incorporate a communications unit 42 for determining the location of other

LED-based lights **216**. For example, multiple LED-based lights **216** including a communications unit **42** can together form the spatially distributed network of communications units **42**. The positions of one or more LED-based lights **216** including a communications unit **42** can be determined manually, with the positions of the remainder of the LED-based lights **16**, **116** or **216** installed into the lighting control system **12** being determined according to the process and techniques described above. In this example, the LED-based light **216** also includes communications devices **44** and/or **46** for sending and receiving location signals γ, although the LED-based light **216** could also communicate with the lighting control system **12** through the communications channels of the communications link **40**.

The LED-based lights described herein are presented as examples and are not meant to be limiting. The embodiments can be used with any lighting components known to those skilled in the art and compatible with the scope of the disclosure. In addition, the disclosed processes and techniques can be applied in a variety of building automation system implemented control systems to regulate environmental conditions other than lighting conditions. For example, the disclosed processes and techniques can be applied to determine the position of printers, alarm system components and/or HVAC components, and various controllers can be control operation of these components for purpose of regulating related environmental conditions of the building 10.

While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiments but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims, which scope is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures as is permitted under the law.

What is claimed is:

1. A method comprising:

storing, at a control unit, data regarding a plurality of physical areas, the data comprising, for each physical area:

a definition of the physical area, and

an indication of a lighting condition associated with the physical area;

receiving, at the control unit, a location signal from a first communications device associated with a first light source remote from the control unit

determining, at the control unit, that the first light source is positioned within a first physical area of the plurality of physical areas based on the location signal;

storing, at the control unit, an indication of an association between the first light source and the first physical area; retrieving, at the control unit, the indication of the lighting condition associated with the first physical area;

operating, using the control unit, the first light source to satisfy the lighting condition associated with the first physical area, wherein operating the first light source comprises transmitting one or more command signals to the first communications device associated with the first light source.

2. The method of claim 1, further comprising:

receiving, at the control unit, a second location signal from a second communications device associated with a second light source;

determining, at the control unit, that the second light source is positioned within a second physical area of the plurality of physical areas based on the second location signal;

storing, at the control unit, an indication of an association between the second light source and the second physical area;

retrieving, at the control unit, the indication of the lighting condition associated with the second physical area;

operating, using the control unit, the second light source 40 to satisfy the lighting condition associated with the second physical area, wherein operating the second light source comprises transmitting one or more command signals to the second communications device associated with the second light source.

- 3. The method of claim 2, wherein the first physical area and the second physical area are different.
- 4. The method of claim 1, wherein the first communications device is associated with the first light source by being located adjacent to the first light source or being included in 50 the first light source.
- 5. The method of claim 1, wherein determining that the first light source is positioned within the first physical area comparing a determined position of the first light source in the first physical area against a known position of the first 55 physical area.
 - 6. A lighting system comprising:
 - a first light source having a first communications device associated therewith, the first communications device being configured to transmit a location signal;
 - a control unit remote from the first light source, the control unit comprising a processor configured to:

store data regarding a plurality of physical areas, the data comprising, for each physical area:

a definition of the physical area, and

an indication of a lighting condition associated with the physical area; 14

receive the first location signal;

determine that the first light source is positioned within a first physical area of the plurality of physical areas based on the location signal;

store an indication of an association between the first light source and the first physical area;

retrieve the indication of the lighting condition associated with the first physical area; and

operate the first light source to satisfy the lighting condition associated with the first physical area, wherein operating the first light source comprises transmitting one or more command signals to the first communications device associated with the first light source.

7. The lighting system according to claim 6, further comprising a second light source having a second communications device associated therewith;

wherein the second communications device is configured to transmit a second location signal, and

wherein the control unit is further configured to:

receive the second location signal;

determine that the second light source is positioned within a second physical area of the plurality of physical areas based on the second location signal;

store an indication of an association between the second light source and the second physical area;

retrieve the indication of the lighting condition associated with the second physical area; and

operate the second light source to satisfy the lighting condition associated with the second physical area, wherein operating the second light source comprises transmitting one or more command signals to the second communications device associated with the second light source.

8. The lighting system according to claim 7, wherein the first physical area and the second area are different.

9. The lighting system according to claim 6, wherein the first light source is positioned adjacent or includes therein the first communications device associated therewith.

- 10. The lighting system according to claim 6, wherein determining that the first light source is positioned within the first physical area comprises a determined position of the first light source in the first physical area against a known position of the first physical area.
- 11. The method of claim 1, wherein the definition of the physical area comprises an indication of a functional characteristic of the physical area.
 - 12. The method of claim 1, wherein the definition of the physical area comprises an indication of a physical surrounding of the physical area.
 - 13. The method of claim 1, wherein the definition of the physical area comprises an indication of a presence of natural light in proximity to the physical area.
 - 14. The method of claim 1, wherein the definition of the physical area comprises an indication of a constraint associated with the physical area.
 - 15. The method of claim 1, wherein the indication of a lighting condition associated with the physical area comprises an indication of a lighting performance requirement associated with the physical area.
 - 16. The method of claim 1, wherein the indication of a lighting condition associated with the physical area comprises an indication of a lighting efficiency requirement associated with the physical area.
- 17. The method of claim 1, wherein the indication of a lighting condition associated with the physical area comprises an indication of a safety lighting requirement associated with the physical area.

- 18. The method of claim 1, wherein the indication of a lighting condition associated with the physical area comprises an indication of a comfort requirement associated with the physical area.
- 19. The method of claim 1, wherein operating the first light comprises increasing a brightness of the first light source to satisfy the lighting condition associated with the first physical area.
- 20. The method of claim 1, wherein operating the first light source comprises decreasing a brightness of the first light source to satisfy the lighting condition associated with the first physical area.
- 21. The method of claim 1, wherein operating the first light source comprises:
 - receiving, at the control unit, sensor data from one or 15 more sensors positioned in the first physical area, the sensor data indicating a current physical lighting condition of the first physical area;
 - determining, at the control unit, that the current physical lighting condition does not satisfy the lighting condi- 20 tion associated with the first physical area;
 - responsive to determining that the current physical lighting condition does not satisfy the lighting condition associated with the first physical area, modifying a brightness of the first light source to satisfy the lighting 25 condition associated with the first physical area.

* * * * *