



US006963438B2

(12) **United States Patent**
Busscher et al.

(10) **Patent No.:** **US 6,963,438 B2**
(45) **Date of Patent:** **Nov. 8, 2005**

(54) **REARVIEW MIRROR CONSTRUCTED FOR EFFICIENT ASSEMBLY**

(75) Inventors: **Bradley L. Busscher**, Grand Rapids, MI (US); **Bradley L. Northman**, Belmont, MI (US); **Kenton J. Ypma**, Hudsonville, MI (US); **Randall J. Beute**, Grand Rapids, MI (US); **John K. Roberts**, Grand Rapids, MI (US); **Wayne M. Jordan**, Grandville, MI (US); **Edward L. DeNave**, Zeeland, MI (US); **Daniel J. Bostwick**, Grandville, MI (US); **Randall S. Braun**, Grand Rapids, MI (US); **Gregory A. Bosch**, Grandville, MI (US); **Timothy A. Bonardi**, Buchanan, MI (US)

(73) Assignee: **Gentex Corporation**, Zeeland, MI (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/714,330**

(22) Filed: **Nov. 14, 2003**

(65) **Prior Publication Data**

US 2004/0095632 A1 May 20, 2004

Related U.S. Application Data

(63) Continuation of application No. 09/862,414, filed on May 21, 2001, now Pat. No. 6,650,457.

(51) **Int. Cl.**⁷ **G02F 1/15; B60R 1/12**

(52) **U.S. Cl.** **359/265; 362/494**

(58) **Field of Search** **359/265, 267, 359/274, 528, 514, 512; 362/494, 498**

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,096,452 A 5/1914 Perrin
1,563,258 A 11/1925 Cunningham

2,457,348 A	12/1948	Chambers
2,561,582 A	7/1951	Marbel
4,274,078 A	6/1981	Isobe et al.
4,733,335 A	3/1988	Serizawa et al.
4,803,599 A	2/1989	Trine et al.
4,931,627 A	6/1990	Watts
5,014,167 A	5/1991	Roberts
5,016,996 A	5/1991	Ueno
5,017,903 A	5/1991	Krippelz, Sr.
5,059,015 A	10/1991	Tran
5,151,824 A	9/1992	O'Farrell 359/604
5,207,492 A	5/1993	Roberts

(Continued)

OTHER PUBLICATIONS

ITW ChronoTherm, "PTC Mirror Heaters: de-icing/de-misting self-regulating," ITW ChronoTherm US, an Illinois Tool Works Company, p. 1-4, no date available.


Primary Examiner—David N. Spector

(74) *Attorney, Agent, or Firm*—Price, Heneveld, Cooper, DeWitt & Litton, LLP

(57) **ABSTRACT**

A mirror assembly includes a housing, an angularly adjustable power pack, wires for supplying power and mirror angle control, an electrochromic mirror subassembly including a heater, and a turn signal device. The components include individual connectors that plug into a multi-prong connector on the bundle of wires, or that piggyback into each other. Optionally, the heater incorporates an internal wire with end connectors for communicating power to opposite sides of the heater, and also includes layers of light-transmitting/diffusing material for diffusing light passing from the turn signal device through the diffusing material. A printed circuit board fits into a pocket in the panel-shaped carrier, and an integral retainer releasably secures the printed circuit board. The power pack is attached to the carrier via a ring of resilient fingers, and a continuous hoop flange prevents distortion of the carrier and in turn of the glass elements in the mirror subassembly.

35 Claims, 5 Drawing Sheets

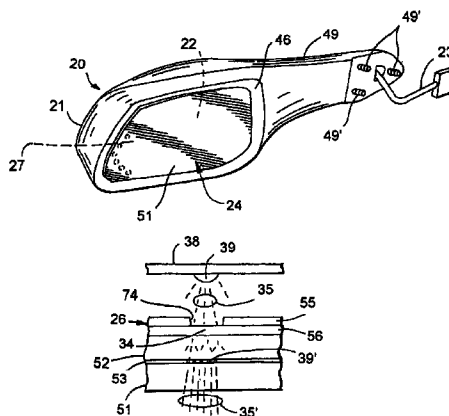




US 6,963,438 B2


Page 2

U.S. PATENT DOCUMENTS

5,313,335 A	*	5/1994	Gray et al.	359/839	D428,373 S	7/2000	Todd et al.	
5,355,284 A		10/1994	Roberts		6,086,229 A	7/2000	Pastrick	
5,361,190 A		11/1994	Roberts et al.		6,093,976 A	7/2000	Kramer et al.	
5,371,659 A		12/1994	Pastrick et al.		D428,842 S	8/2000	Todd et al.	
5,402,103 A		3/1995	Tashiro		D429,202 S	8/2000	Todd et al.	
5,436,741 A	*	7/1995	Crandall	359/15	D430,088 S	8/2000	Todd et al.	
D363,920 S		11/1995	Roberts et al.		6,099,155 A	8/2000	Pastrick et al.	
5,481,409 A		1/1996	Roberts	359/839	6,111,683 A	8/2000	Cammenga et al.	
5,497,305 A		3/1996	Pastrick et al.		6,111,684 A	8/2000	Forgette et al.	359/267
5,497,306 A		3/1996	Pastrick		6,124,886 A	9/2000	DeLine et al.	348/148
5,528,422 A		6/1996	Roberts		6,142,656 A	11/2000	Kurth	
5,587,699 A	*	12/1996	Faloon et al.	340/475	6,146,003 A	11/2000	Thau	
5,619,374 A		4/1997	Roberts		6,149,287 A	11/2000	Pastrick et al.	
5,619,375 A		4/1997	Roberts		6,152,590 A	11/2000	Furst et al.	
5,632,551 A		5/1997	Roney et al.		6,163,083 A	12/2000	Kramer et al.	
5,669,699 A		9/1997	Pastrick et al.		6,166,848 A	12/2000	Cammenga et al.	359/267
5,669,704 A		9/1997	Pastrick		6,175,164 B1	1/2001	O'Farrell et al.	
5,669,705 A		9/1997	Pastrick et al.		6,176,602 B1	1/2001	Pastrick et al.	
D394,833 S		6/1998	Muth		6,195,194 B1	2/2001	Roberts et al.	359/267
5,788,357 A		8/1998	Muth et al.	362/494	6,206,553 B1	3/2001	Boddy et al.	
5,796,176 A		8/1998	Kramer et al.		6,227,689 B1	5/2001	Miller	
5,798,575 A		8/1998	O'Farrell et al.		6,244,716 B1	6/2001	Steenwyk et al.	
5,818,625 A		10/1998	Forgette et al.		6,257,746 B1	7/2001	Todd et al.	
5,823,654 A		10/1998	Pastrick et al.		6,264,353 B1	7/2001	Carraher et al.	362/494
5,825,527 A		10/1998	Forgette et al.		6,276,821 B1	8/2001	Pastrick et al.	
5,863,116 A		1/1999	Pastrick et al.		6,280,069 B1	8/2001	Pastrick et al.	
5,879,074 A		3/1999	Pastrick		6,296,379 B1	10/2001	Pastrick	
D409,540 S		5/1999	Muth		6,299,333 B1	10/2001	Pastrick et al.	
5,938,320 A	*	8/1999	Crandall	362/494	6,336,737 B1	1/2002	Thau	
5,959,367 A		9/1999	O'Farrell et al.		6,340,849 B1	1/2002	Kramer et al.	
6,005,724 A		12/1999	Todd		6,340,850 B2	1/2002	O'Farrell et al.	
6,007,222 A		12/1999	Thau		6,347,880 B1	2/2002	Furst et al.	
6,045,243 A		4/2000	Muth et al.	362/494	6,356,376 B1	3/2002	Tonar et al.	
D425,466 S		5/2000	Todd et al.		6,416,208 B2	7/2002	Pastrick et al.	
6,064,508 A		5/2000	Forgette et al.		6,426,485 B1 *	7/2002	Bulgajewski et al.	219/219
D426,506 S		6/2000	Todd et al.		6,441,943 B1	8/2002	Roberts et al.	
D426,507 S		6/2000	Todd et al.		6,476,358 B1	11/2002	Lang et al.	
D427,128 S		6/2000	Mathieu		2002/0126497 A1	9/2002	Pastrick	
6,074,077 A		6/2000	Pastrick et al.		2002/0171906 A1	11/2002	Busscher et al.	359/265
6,076,948 A		6/2000	Bukosky et al.		2002/0171954 A1	11/2002	Bonardi et al.	359/877
D428,372 S		7/2000	Todd et al.					

* cited by examiner

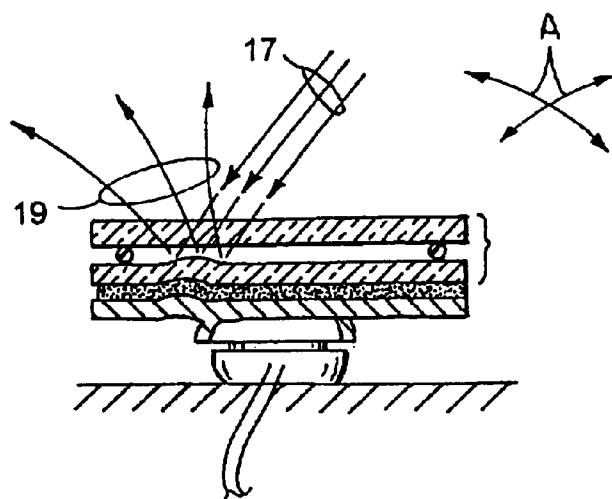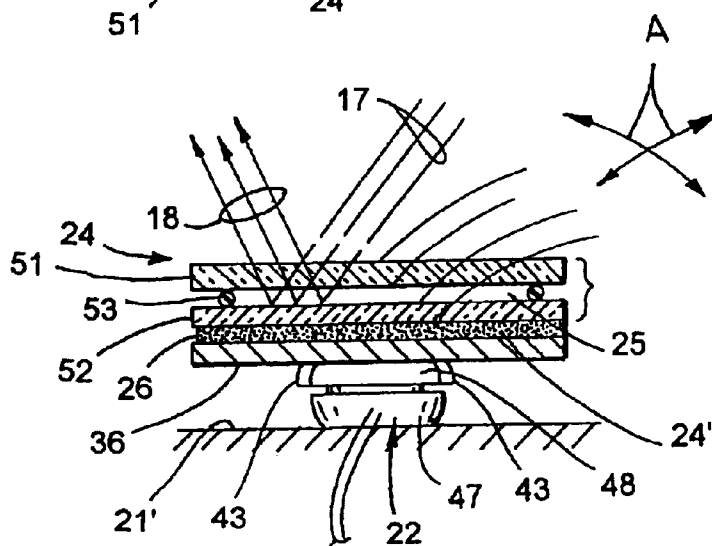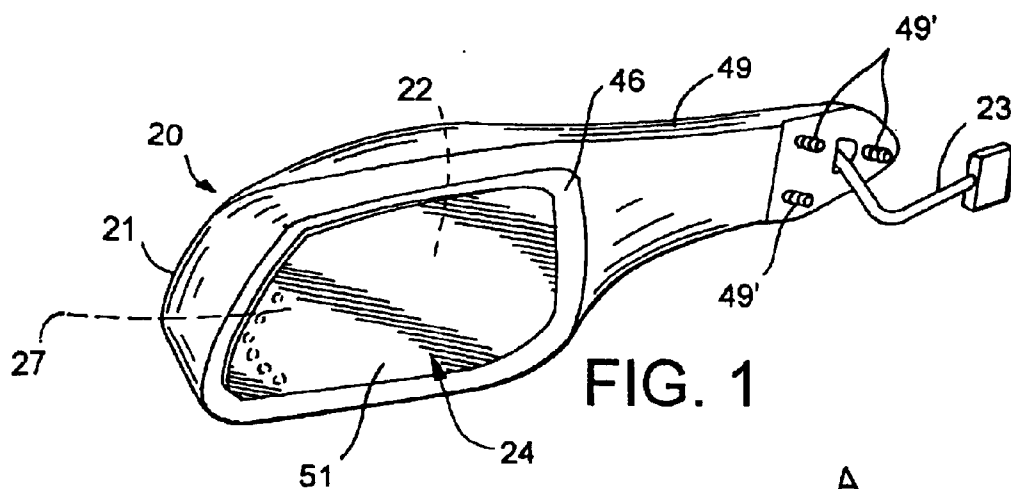

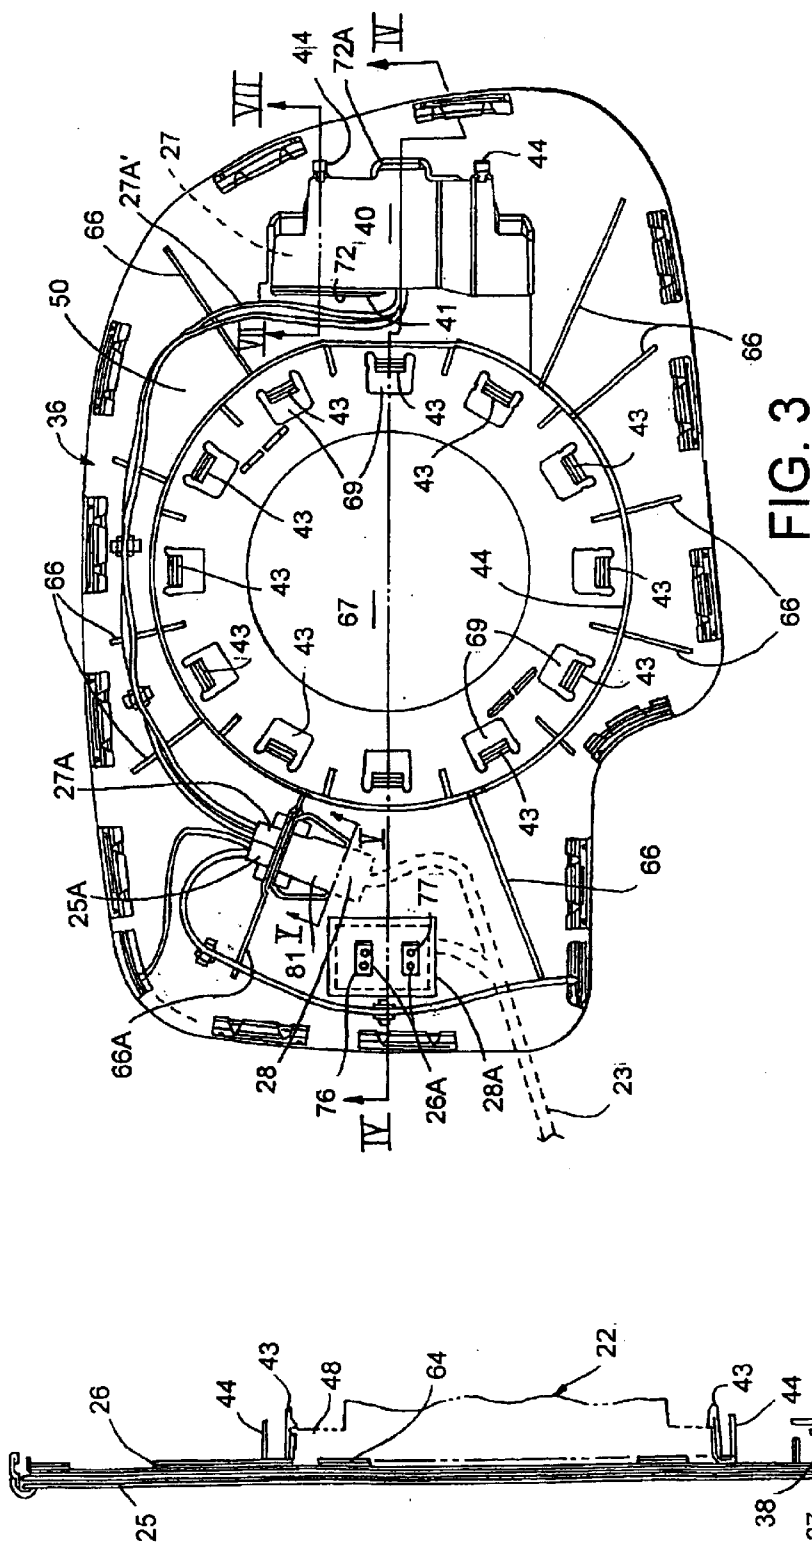

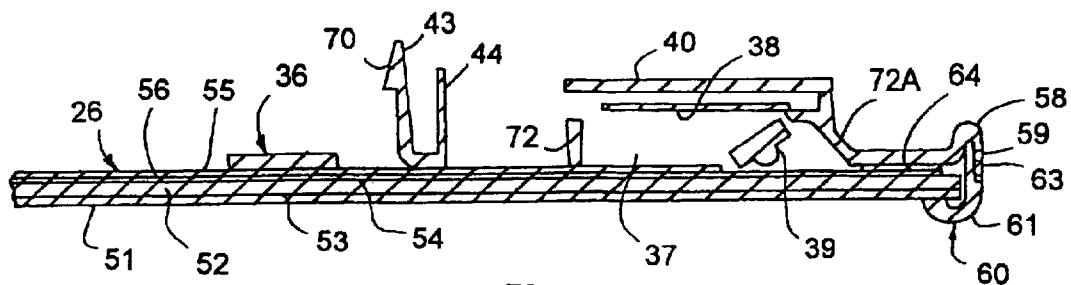


FIG. 6

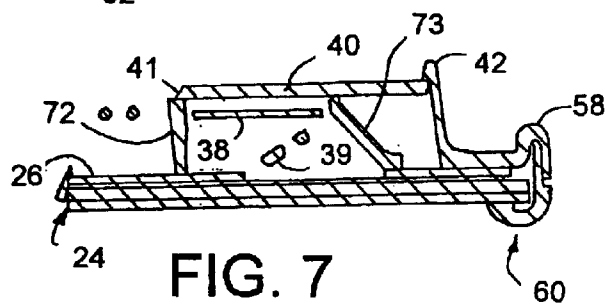


FIG. 7

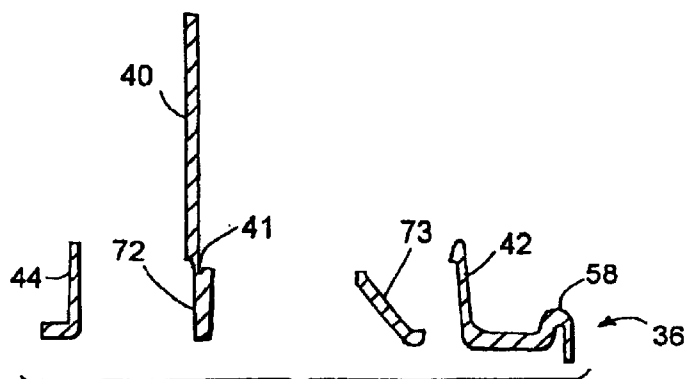


FIG. 8







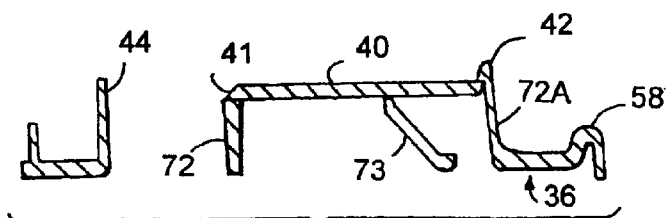


FIG. 9

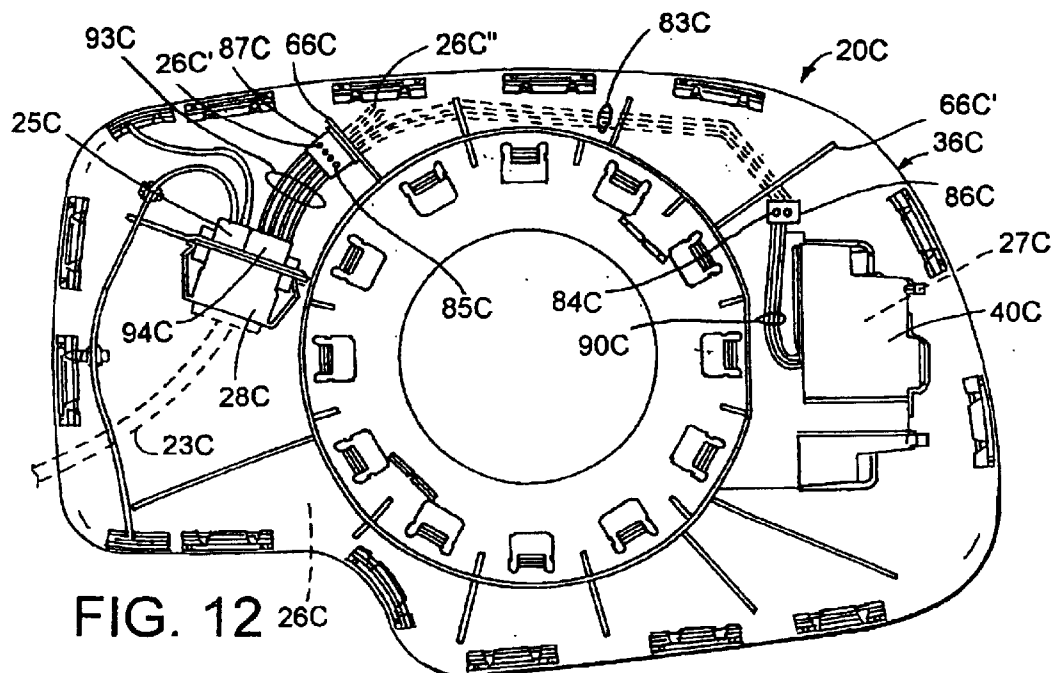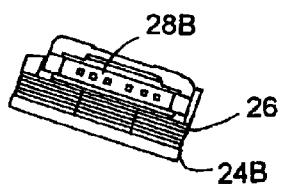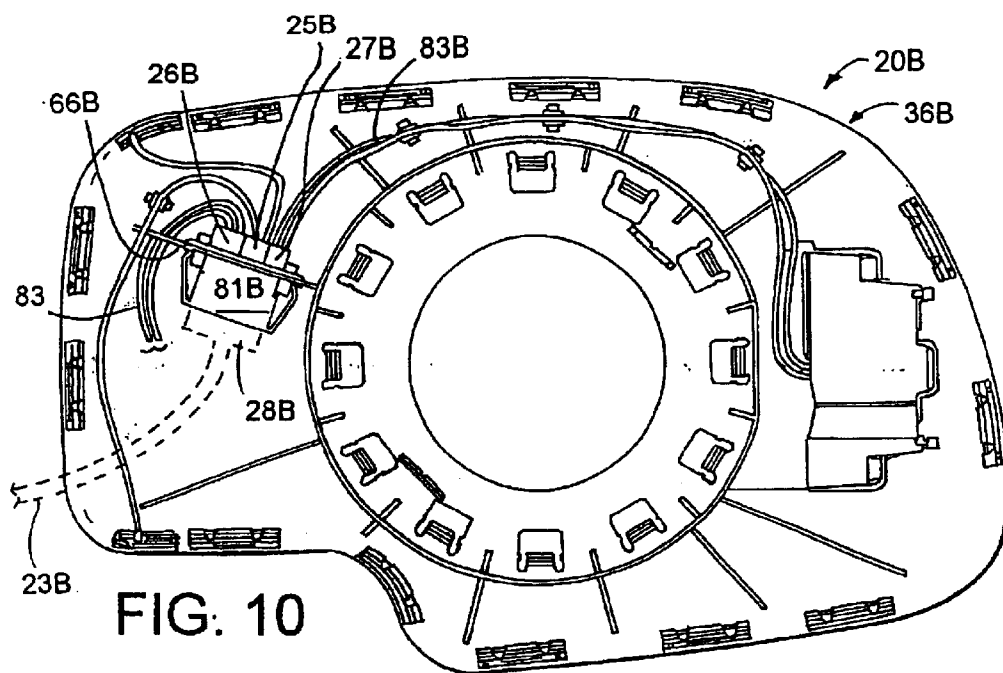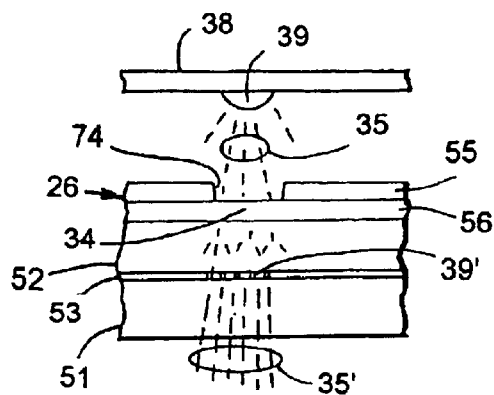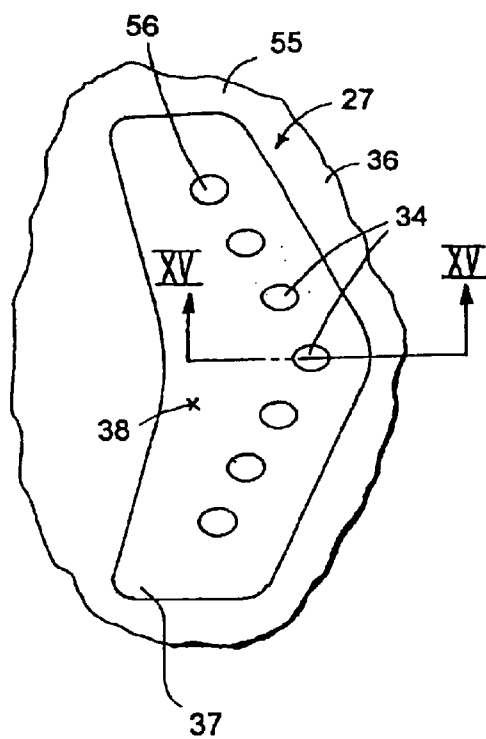

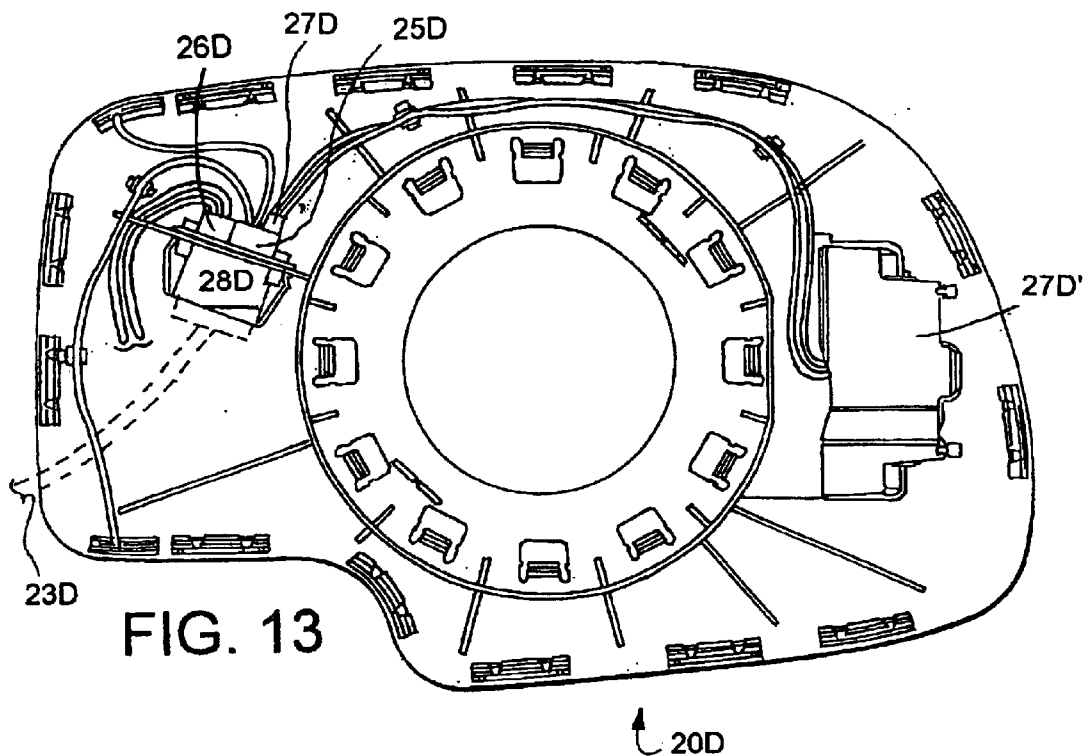

1

REARVIEW MIRROR CONSTRUCTED FOR EFFICIENT ASSEMBLY

CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation of U.S. Pat. No. 6,650, 457 entitled REARVIEW MIRROR CONSTRUCTED FOR EFFICIENT ASSEMBLY, the entire disclosures of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

The present invention relates to a rearview mirror for vehicles constructed for efficient and optimal assembly, including components shaped for efficient and low-scrap molding and manufacture, components having features integrated into them to reduce the overall number of parts, pieces, and total weight, and components arranged to facilitate mechanical assembly and physical layout as well as electrical interconnection and repair of electrical circuits.

Modern vehicle mirrors often include numerous electrical components that must be powered and also controlled. For example, the electrical components of one proposed high-end exterior mirror will include an electrochromic image-darkening mirror subassembly and control circuit, a heater, a turn signal, and a powered angular adjustment mechanism. Other mirrors, such as interior mirrors, include a multitude of sensors, buttons, and readouts/displays. Routing of wires to support the various electrical components can be a logistic nightmare, and further, even if routed carefully and consistently, can take up considerable space. Also, most mirror designs provide electrical connectors so that the mirror can be electrically coupled to a vehicle's electrical system on or about the same time as the mirror is mechanically attached to the vehicle. It is desirable to reduce the amount of time that it takes to arrange wiring and connectors on the mirror, and to reduce the amount of time it takes to manipulate connectors and then electrically connect the multiple electrical components of a mirror to each other and to the vehicle electrical system.

Another problem caused by multiple components in a mirror is that the mirror becomes thicker in order to make room for the wiring and connectors and also heavier due to the connectors, wires, and related support structure. Modern vehicles place a high emphasis on low weight and small size, especially for non-visible components. Weight, even in small amounts, is an issue in electrochromic mirror subassemblies because these mirrors use a pair of glass elements with an electrochromic layer therebetween. They also require the supporting circuitry and hardware. Glass has a relatively high specific gravity, and since electrochromic mirror subassemblies require a pair of glass elements, these mirror subassemblies tend to be heavier than non-electrochromic mirrors. In opposition to the issue of reducing weight by reducing glass thickness, glass elements must be thick enough to prevent distortion of reflected images, since this is related to a vehicle driver's ability to see around and safely drive a vehicle. Most existing mirror glass elements in EC mirror subassemblies are about 2.2-mm in thickness or greater. Vehicle manufacturers have hesitated going below this thickness because the glass elements will bend too easily, resulting in distortion of the reflected images. Further, a way is needed to support the glass elements in a non-stressed manner, especially during wide temperature fluctuations and other stress-rising incidents that occur in the environment of a vehicle in service.

Further, it is preferable that various functions and features be well integrated into the components of a mirror assembly

2

to minimize the total number of parts and pieces. At the same time, it is often desirable to maintain repairability so that expensive components do not have to be scrapped and thrown away when a defect occurs in other components during the last few steps of a manufacturing process for the mirror. There is tension between the concept of "integrated features and components" and "repairability" when trying to optimize a mirror for manufacture. For example, "well integrated features and components" tend to require less electrical connectors and less manual assembly (i.e. since the components are integrated into the mirror), and initially cost less as a result. However, sometimes it is desirable to add electrical connectors so that defective components can be removed and replaced and so that scrap can be better controlled and/or so that assembly efficiency can be improved.

Recently, some manufacturers are considering placing a turn signal in an exterior vehicle mirror. This can cause several difficulties and complications in a mirror. For example, the light-generating turn signal device adds weight and takes up space, such that the resulting assembly is potentially heavier and larger than mirror assemblies not having this feature. Further, the turn signal device requires additional wiring within the mirror assembly, which can cause assembly concerns related to electrical connections and positioning of connectors, as discussed above. Further, a defective turn signal device non-removably attached to an electrochromic mirror subassembly can result in scrapping out and throwing away a "good" electrochromic mirror subassembly, which is a relatively expensive portion of the overall assembly at that same point in time. At the same time, it is desirable to securely attach the turn signal device to the mirror assembly so that it does not come loose while in service. One reason is because, if the turn signal device came loose in an exterior mirror assembly, dirt and light-blocking matter would soon cover the turn signal device, rendering it ineffective. Also, it could rattle and cause other problems.

It is desirable to improve assembly of the electrochromic mirror subassembly to the angular adjustment mechanism (often called a "power pack"). Historically, the power pack includes an electrically-powered angularly-adjustable mount, and the electrochromic mirror subassembly includes a carrier with a connector having resilient fingers shaped to snappingly engage the adjustable mount. However, as the resilient fingers are flexed to engage and then do engage the adjustable mount, the glass-supporting area around the fingers is distorted. This can be a problem since, if the glass is less than about 2.2-mm thick and the carrier thickness is also minimized for reduced weight, the distortion of the glass-supporting area can read through to the glass, causing noticeable and objectionable distortions in the reflected images. Distortion of the glass-supporting area can be reduced by making the fingers flimsier and not as stiff, however this would result in a reduced retention force and less reliable connection of the electrochromic mirror subassembly to the power pack. Distortion of the glass-supporting area can also potentially be reduced by placement of perpendicular reinforcement webs on the carrier. This, however, adds weight and takes up considerable space if the reinforcement webs are made large enough to do an adequate job. Further, testing has shown that it is not a solution to this problem to merely add a few random reinforcement webs, since very minor bending in a direction perpendicular to the glass elements of the mirror subassembly in any localized area can result in objectionable glass distortions, especially with glass elements at or under 1.6-mm thickness. It is

3

important that the insertion force for attaching the carrier to the adjustable mount not be too high of force, that it not be an inconsistent force, and yet that the retention force not permit looseness, sloppiness, poor and inconsistent retention forces.

In addition to the above, it is desirable to design a carrier for the EC mirror subassembly that can be molded with molding dies that are not complicated and that do not include a plurality of movable pulls and slides that are difficult to maintain. Pulls and slides in molding dies are well known, and are often used to mold parts. However, pulls and slides are expensive to build into a die and to maintain, and can result in increased scrap. Further, it is desirable to provide a carrier that provides ease and reliability of assembly, with few parts and pieces, especially having few small parts and pieces such as screws and separate fasteners that must be manipulated and/or connected without stripping.

Accordingly, a mirror assembly is desired solving the aforementioned problems and having the aforementioned advantages.

BRIEF SUMMARY OF THE INVENTION

In one aspect of the present invention, a mirror assembly includes an electrochromic mirror including a first connector operably connected to the electrochromic mirror, and an electrically-operated second component associated with the electrochromic mirror that includes a second connector operably connected to the electrically-operated second component. A primary wire bundle extends from and is configured to communicate power to the electrochromic mirror and to the electrically-operated second component, the primary wire bundle including a main connector. The first connector engages and is electrically connected to the main connector, and the second connector engages and is electrically connected to one of the main connector and the first connector. By this arrangement, the primary wire bundle is configured to communicate power to the electrochromic mirror and to the second component in a manner minimizing the number of electrical connections and connectors necessary during assembly to a mirror housing.

In another aspect of the present invention, a rearview mirror assembly for a vehicle includes a housing, and a mirror subassembly positioned in the housing and including a panel-shaped carrier. First and second electrically-operated components are associated with the mirror subassembly and include first and second connectors, respectively. A primary wire bundle extends from and is configured to communicate power to the first and second components, the primary wire bundle including a main connector. The first and second connectors engage and are electrically directly connected to the main connector. By this arrangement, the primary wire bundle and the first and second connectors are configured to communicate power to the first and second components in a manner minimizing the number of electrical connections necessary during assembly to a vehicle.

In another aspect of the present invention, a rearview mirror assembly for a vehicle includes a mirror subassembly, and a heater positioned relative to the mirror subassembly for heating the mirror subassembly. The heater includes a first connector on one side of the heater and a second connector on another side of the heater with an electrical conductor extending through and across the heater and connecting the first and second connectors. By this arrangement, electrical energy can be communicated by the electrical conductor to different sides of the heater for operating an electrically operated component associated with the mirror subassembly.

4

In a narrower form, the mirror assembly includes an electrically-operated second component associated with the mirror subassembly, the second component including a third connector engaging the second connector for electrifying the second component.

In still another narrower form, the rearview mirror assembly includes a primary wire bundle extending from and configured to communicate power to the heater and the second component, the primary wire bundle including a main connector engaging and electrically connected to the first connector, whereby the primary wire bundle is configured to communicate power to the first and second components in a manner optimizing the positions of electrical connections necessary during assembly to a vehicle.

In another aspect of the present invention, a rearview mirror assembly for a vehicle includes a mirror subassembly, and a heater positioned relative to the mirror subassembly for heating the mirror subassembly. The heater is multi-layered and includes a polymeric layer of light-transmitting material and includes another layer of opaque material with at least one aperture therein for letting light pass through to the light-transmitting material. At least a portion of the light-transmitting material covers the aperture and is configured to diffuse light passing through the portion. A light source directs light at the portion, with the portion diffusing the light so that the light passing therethrough is uniformly distributed.

In another aspect of the present invention, a mirror includes an electrochromic mirror subassembly including a panel-shaped carrier with flanges defining a pocket, and a printed circuit board positioned in the pocket. A releasable retainer releasably secures the printed circuit board in the pocket.

In another aspect of the present invention, an exterior rearview mirror includes a mirror subassembly including a panel-shaped carrier, and a printed circuit board attached to the panel-shaped carrier. The printed circuit board includes light-generating devices positioned in a visible location on the mirror subassembly to generate a visible turn signal and includes at least a portion of a circuit for controlling the light-generating devices. A retainer secures the printed circuit board to the mirror subassembly characteristically without using a separate housing for the printed circuit board.

In another aspect of the present invention, a mirror assembly includes a housing, and an adjustment device attached to the housing. The adjustment device includes an angularly adjustable mount. An electrochromic mirror subassembly includes front and rear glass elements and an electrochromic layer adapted to provide controlled darkening of reflected images, and further includes a panel-shaped carrier with a front surface shaped to uniformly support the rear glass element. The panel-shaped carrier includes a plurality of resilient retainers arranged in a circle. The resilient retainers extend rearwardly from the panel-shaped carrier and engage the adjustable mount. The panel-shaped carrier further includes a continuous hoop-shaped wall extending around and spaced radially from the plurality of resilient retainers. The hoop-shaped wall extends from the rear surface and supports an area around and proximate a base of the plurality of resilient retainers so that significant deflection of the panel-shaped carrier in the area of the resilient retainers is prevented even when the resilient retainers are stressed or have been stressed.

In still another aspect of the present invention, a mirror assembly includes a housing and an adjustment device attached to the housing. The adjustment device includes an

5

angularly adjustable mount. An electrochromic mirror sub-assembly includes front and rear glass elements and an electrochromic layer adapted to provide controlled darkening of reflected images, and further including a panel-shaped carrier with a front surface shaped to uniformly support the rear glass element. The panel-shaped carrier includes a plurality of resilient retainers arranged in a circle and extending rearwardly from the panel-shaped carrier and engaging the adjustable mount. The retainers and adjustable mount are configured to positively engage for secure retention, but are also configured to provide an insertion attachment force of less than 50 pounds force (about 220 N) during assembly of the panel-shaped carrier to the adjustment device.

In yet another aspect of the present invention, an exterior mirror assembly includes a housing with an arm adapting the housing for attachment to a vehicle in a position outside of the vehicle. An adjustment device is attached to the housing and includes an angularly adjustable mount. A mirror sub-assembly includes an electrochromic mirror and a carrier for the electrochromic mirror. The carrier includes a panel-like surface supporting the electrochromic mirror and includes retainers engaging the adjustable mount. The carrier includes a plurality of apertures inboard of a perimeter of the carrier but outboard of a perimeter of the electrochromic mirror, and further, the mirror subassembly includes a bezel with a plurality of resilient hooks that extend past the perimeter of the electrochromic mirror and into the plurality of apertures.

It is an object of the present invention to provide a vehicle mirror that is particularly suited for use as a vehicle mirror, where the mirror includes numerous electrical components that must be powered and also controlled, including such components and features as electrochromic (EC) layers, heaters, turn signals, power packs for powered angular adjustment of the mirror subassembly, sensors, readouts and displays, and turn signals.

It is an object of the present invention to provide electrical connector arrangements that facilitate connection of multiple connectors with minimized manual labor, minimized expensive components, minimized space problems, and optimized locations.

It is an object of the present invention to integrate components to reduce redundant structure, to reduce overall thickness of the assembly, and to eliminate parts.

It is an object of the present invention to incorporate structure for the housing of the turn signal device into other structure within the mirror subassembly, as a way of reducing expense and assembly labor, saving space, saving material and reducing weight of the mirror assembly.

It is an object of the present invention to releasably hold the circuit board in the mirror subassembly, and hence provide a circuit board and electrical component arrangement that is serviceable and repairable in the field and also serviceable and repairable at the time of assembling the mirror assembly. In particular, it is an object to provide a mirror assembly process that reduces scrap and cost of scrap by allowing serviceability as late in the mirror assembly process as possible, and by attaching non-removable components as late as possible in the assembly process.

It is an object of the present invention to provide an electrochromic mirror subassembly that utilizes glass elements having a relatively thin thickness dimension, such as a thickness of 1.6-mm or as low as 1.1-mm or lower, and to support these glass elements in a stress-free and forgiving manner that minimizes distortion. In particular, an object is

6

to provide a carrier that supports the glass elements with minimal stress, yet that allows snap-assembly of a mirror subassembly to a power pack, and that allows snap-assembly of a bezel to the mirror subassembly.

It is an object of the present invention to provide a minimized insertion force when attaching a mirror carrier to a power pack. In particular, it is desired that the insertion force not be unacceptably high, such as below 50 pounds force of insertion, but that it be a consistent force, that it be well-distributed and not be concentrated, that looseness and sloppiness be prevented, that the retention forces be non-distorting to the mirror glass elements, and that stresses resulting from environmental conditions such as temperature fluctuations not unacceptably bend glass elements and read through onto reflected images.

It is an object of the present invention to provide components that can be molded with molding dies that are relatively low-cost to build and maintain, such as by providing parts and components that can be molded using dies without movable pulls and without movable slides, which die pulls and slides are expensive to build into dies and to maintain.

It is an object of the present invention to construct a mirror assembly that includes components that are easy to build and assemble, and that can be assembled reliably and efficiently with low cost.

It is an object of the present invention to provide a mirror assembly that includes relatively few parts and pieces, especially small parts and pieces that must be manipulated and connected during assembly. It is desired to include in the mirror assembly fewer loose parts and pieces, especially parts and pieces that can be mislocated and that can get in the way and/or rattle and/or that must be accurately positioned during assembly.

These and other aspects, objects, and features of the present invention will be understood and appreciated by those skilled in the art upon studying the following specification, claims, and appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of an exterior mirror assembly embodying the present invention;

FIG. 2 is an enlarged schematic view of an angular adjustment mechanism (i.e. an electrical "power pack") attached to an electrochromic mirror subassembly, with the flexible fingers of the mirror carrier being bent in a manner causing distortion of reflected images;

FIG. 2A is a cross section similar to FIG. 2, but showing a deformation of the glass elements in a mirror subassembly caused by bending of the carrier, leading to distortion of a reflected image;

FIG. 3 is a rear view of the mirror subassembly, which shows the rear surface of the carrier and also the wiring and electrical connector arrangement;

FIGS. 4 and 5 are cross-sectional views taken along the lines IV—IV and V—V in FIG. 3;

FIG. 6 is an enlarged view of the circuit-board-holding pocket of the carrier, which is an enlarged view of the right end of FIG. 4;

FIG. 7 is an enlarged cross-sectional view taken along the line VII—VII in FIG. 3;

FIGS. 8 and 9 are cross-sectional views of the carrier and integrally molded door retainer, similar to FIG. 7 but showing only the carrier (i.e. the mirror subassembly and circuit board are not shown), FIG. 8 showing the door retainer in an

7

open position and FIG. 9 showing the door retainer in a closed position (compare to FIG. 7);

FIG. 10 is a rear view of a modified mirror subassembly, including a three-into-one electrical connector arrangement;

FIG. 11 is a fragmentary view of the three-into-one electrical connector of FIG. 10;

FIG. 12 is a rear view of a modified mirror subassembly, including an upstream two-into-one electrical connector and then a downstream two-into-one electrical connector;

FIG. 13 is a rear view of another modified mirror subassembly, including a two-into-one electrical connector and also a "piggyback" electrical connector that plugs into or "piggybacks" onto a back of one of the first electrical connectors;

FIG. 14 is a fragmentary plan view of a heater including a light-blocking layer with apertures for letting light pass through, and including a light-passing layer treated to diffuse light passing therethrough; and

FIG. 15 is a cross-sectional view taken along line XV—XV in FIG. 14.

DETAILED DESCRIPTION

The illustrated mirror assembly 20 (FIG. 1) includes a housing 21, an angular electrically-powered adjustment mechanism 22 (called a "power pack" herein) (FIG. 2) supported in and attached to a wall 21' in the housing 21, and main wiring bundle 23 (FIG. 1) for powering and controlling the power pack 22 and the other components in the mirror assembly 20. An electrochromic mirror subassembly 24 (FIG. 2) includes a carrier 36 snappingly attached to a multi-angularly-adjustable plate 48 on the power pack 22 in a manner that minimizes stress on the glass elements of the mirror subassembly 24, as described below. The present mirror assembly 20 is designed to prevent the problem illustrated in FIG. 2A, where resilient fingers on the carrier are stressed and have caused a deformation on the glass elements of the mirror subassembly, resulting in unacceptable distortion of reflected images, as represented by non-parallel reflected light beams 19. (Compare with FIG. 2, where three light beams 17 representing an image are reflected as an undistorted image represented by parallel light beams 18.) The mirror subassembly 24 (FIG. 2) further includes a layer of electrochromic material 25 and a heater 26, and also an integrally held turn signal device 27 (FIG. 3), each of which requires connection to a powering and control device on the vehicle, as described below.

The components 25, 26, and 27 include individual connectors 25A, 26A, and 27A (FIG. 3) that each plug into a multi-prong, multi-receptacle main connector 28 or secondary connector 28A on the bundle of wires 23. Alternatively, it is contemplated that a pair of the connectors could piggyback into each other (see FIG. 13), with the bottom connector being plugged into the connector 28. Still another alternative is to use an "extension cord-type" arrangement where two two-prong connectors plug into a single four-prong connector and then downstream the extension cord's other connector plugs into the main connector (see FIG. 12). This arrangement can help provide flexibility for assembly, particularly when different options are used for the mirror assembly, the signal device, and the EC mirror subassembly, but also can help with repair and with control over the type, cost, and number of connectors. By this arrangement, commercially available "standard" connectors can be used instead of higher-cost "specialty" connectors. Another alternative arrangement includes a heater that incorporates an internal wire with end connectors for communicating power

8

to opposite sides of the heater (FIG. 12). Optionally, the heater can also include sections of light-transmitting/diffusing material 34 (see FIGS. 14–15) for diffusing light 35 passing from the turn signal device 27 through the diffusing material 34.

The mirror subassembly 24 includes a panel-shaped carrier 36 (FIGS. 6–9) constructed to securely but releasably hold a circuit board 38 of the turn-signal device 27 and also constructed with a continuous hoop flange 44 for rigidity. More specifically, the mirror subassembly 24 includes flanges 72 and 72A forming a pocket 37. A printed circuit board 38 with light-generating devices 39 (such as LEDs) (FIG. 15) for generating a pattern of light for the turn signal fits into the pocket 37. A door retainer 40 (FIGS. 6–9) is integrally molded with the carrier 36, and includes an integral hinge 41 and snap-attach retainers 42 that releasably secure the door retainer 40 in a closed position for securing the printed circuit board 38 in the pocket 37. The carrier 36 also includes a ring-shaped array of resilient fingers or retainers 43 configured to snappingly engage a mounting plate on the power pack 22. A continuous hoop flange 44 (FIG. 3) of carrier 36 extends around the fingers 43 to prevent unacceptable distortion of the carrier 36 when the fingers 43 are attached to the power pack 22.

Exterior mirror housings such as housing 21 (FIG. 1) and also adjustable power packs such as power pack 22 (FIG. 2) are generally well known in the art, such that the present housing 21 and power pack 22 need not be described in great detail for an understanding of the present invention by a person skilled in the art of designing vehicle mirrors. It is sufficient to describe the housing 21 as including a front opening 46 in which the mirror subassembly 24 is adjustably held for angular adjustment by the power pack 22. The power pack 22 includes DC motors 47 for angularly adjusting an adjustable plate or mount 48 in orthogonal X-Y angular directions. The resilient fingers 43 on the carrier 36 snappingly engage the adjustable plate 48 in a manner that facilitates assembly via a low and consistent insertion force, yet positively retain the carrier 36 to the power pack 22 with a consistently high retention force, as described below. The housing 21 further includes a rigid structural arm 49 with attachment bolts 49' shaped for secure attachment to a vehicle body or door (not specifically shown).

The carrier 36 (FIGS. 3–4) includes a panel-like body section 50 shaped to fit inside the opening 46 of housing 21 and to support the mirror subassembly 24. The mirror subassembly 24 (FIG. 6) includes a front glass element 51 having a thickness of about 1.6-mm or that is more preferably about 1.1-mm or less, and a rear glass element 52 having a thickness of about 2.2-mm to 1.1-mm or that is more preferably about 1.6-mm. An electrochromic (EC) substance 53 is located between the glass elements 51 and 52. A reflector layer 54 is applied to a rear of the rear glass element 52 (i.e. a fourth surface reflector) (as illustrated) or to a front of the rear glass element 52 (i.e. a third surface reflector). It is contemplated that the EC substance can be a solution phase material, a solid phase material, a gel material, or a hybrid thereof or any other material that is darkenable in a controlled manner. An electrochromic mirror subassembly 24 of interest having low-thickness glass elements is described in detail in U.S. Pat. No. 6,195,194, which patent is incorporated in its entirety herein by reference.

The heater 26 includes a foam layer 55 and a plastic layer 56 (e.g. Mylar or stiff plastic) with conductive tracings 57 thereon that form the heater element. In the illustrated arrangement, the plastic layer 56 is adhered to the reflector

layer **54**, and the foam layer **55** is adhered to the plastic layer **56** but not adhered to the carrier **36**. Notably, the plastic and foam layers **56** and **55** could be reversed, and/or the adhesive layer could be on the foam layer instead of the plastic layer. The illustrated lack of adhesion between the plastic layer **56** and the carrier **36** is a change from prior art that helps reduce stress on the glass elements **51** and **52**. For example, such stress will occur due to non-uniform thermal expansion, such as may occur during the day and/or occur when the heater is first energized and is heating. This lack of adhesion helps to reduce unacceptable distortion of the glass elements **51** and **52** by permitting some slippage between the heater and the mirror subassembly **24**.

The carrier **36** (FIG. **6**) includes a perimeter section with a U-shaped edge flange **58** having an aperture **59**. A bezel **60** includes a J-shaped body **61** that extends around a perimeter of the mirror subassembly **24**, with a short end of the J-shaped body **61** engaging an area on the front glass **51** just inside of a perimeter of the front glass **51**, and with a long end of the J-shaped body **61** extending past the glass elements **51** and **52** into a groove formed by the U-shaped edge flange **58**. The long end of the J-shaped body **61** is resilient and flexible, and includes a plurality of hooks **63** shaped to snap into the apertures **59**. Due to the shape of the mating U-shaped edge flange **58** and the bezel **60**, the bezel **60** securely and reliably fits into the groove of the U-shaped edge flange **58** and snaps into the apertures **59**. In particular, the shape of the U-shaped edge flange **58** permits an assembler to flex the U-shaped edge flange **58** forwardly, and permits an assembler to flex the short end of the J-shaped body **62** rearwardly, thus helping to assemble the bezel **60** onto the edge flange **58** without "overflexing" and non-uniformly stressing and/or deforming the mirror subassembly **24** or the bezel **60** or the carrier **36**. Also, the arrangement helps prevent permanent "overflexing" or assembly-induced stress which would result in unacceptably/non-uniformly stressing or locally bending an edge of the mirror subassembly **24**. The section **64** of foam layer **55** along the perimeter of the heater **26** forms a compressed sandwich with the mirror subassembly **24**, the bezel **60** and the carrier **36**, with the foam section **64** being compressed to about half its uncompressed thickness. Notably, the bezel **60** transmits compressive forces directly through the glass elements **51** and **52** of the mirror subassembly **24**, thus substantially eliminating undesired torsional and bending stresses.

The carrier **36** also includes the hoop flange **44**, which stabilizes and rigidifies the panel-like body section **50** of the carrier **36** around the power-pack-attachment section (i.e. around the resilient snap-attach fingers **43**). The hoop flange **44** is continuous, such that it inherently has the strength and stress-distributing properties of a hoop. Further, the hoop flange **44** has a height of about 10-mm and a thickness at its top edge of about 0.8-mm. This ratio of dimensions is an optimal compromise permitting moldability (with minimal draft angle), while providing the strength and structure to provide support to resist resonant frequencies that can be problematic to an exterior mirror **20** in the field when a car is in service. Reinforcement ribs **66** (FIG. **3**) extend radially from the outer edge surface of the hoop flange **44** for stabilizing the hoop flange **44** on a rear of the panel-like body section **50**. The ribs **66** are located as needed. Some of the ribs **66** are extended to provide support locations for electrical connectors, such as rib **66A** described below.

A hole **67** is located in the panel-like body section **50** in a middle area of the attachment section (i.e. in a middle area of the ring of fingers **43**). The hole **67** prevents "oil canning",

which is a condition that sometimes occurs on flat molded walls that are surrounded by rigid perimeter structure. "Oil canning" is the condition where flat material flexes between "in" and "out" bowed conditions. The presence of the hole **67** is consistent with the present structure, which emphasizes letting the glass element **51** and **52** of the mirror subassembly **24** float to an unstressed state, rather than attempting to continuously support the glass elements **50** and **51** in all locations across its rear surface. A U-shaped open area **69** is cut away from a root or base of the fingers **43** to provide additional flexure of these fingers **43**. Specifically, the U-shaped open area **69** is cut into the panel-like body section **50** to allow the fingers **43** to flex in a direction perpendicular to the fingers **43**. The U-shaped open area **69** causes the fingers **43** to flex open more easily, and lets them flex without disturbing and over-stressing the panel-like body section **50**. At the same time, an installer can press directly on a back side of the fingers **43** to assure that the fingers **43** are all securely snapped onto the plate mount **48** on the power pack **22**. The fingers **43** (FIG. **6**) include a hook-shaped end having an angled surface **70** and they extend about 14-mm to 15-mm. The angled surface **70** is polished and/or otherwise treated to reduce the friction of insertion. By polishing the angled surface **70**, insertion forces of under 50 pounds force (222 Newtons) have been achieved, which is surprisingly and unexpectedly low for assembling a mirror subassembly **24** onto a power pack **22**. Many previous attempts have been made in the art to reduce insertion forces, while maintaining a sure and consistently tight fit. The present arrangement of polished hook surfaces and flexible fingers **43**, in combination with the compressed foam of the heater **26**, is believed to be novel and non-obvious to a person of ordinary skill in this art, based on the effort that has gone into coming to the present solution to the problem.

The carrier **36** is a molded component having flanges **72** and **72A** (FIG. **6**) on all sides forming a well-defined boomerang-shaped pocket **37**. (See FIG. **14**.) A circuit board **38** (FIG. **6**) is crescent-shaped or boomerang-shaped to fit mateably into the pocket **37**, with edges of the circuit board **38** being captured by the various flanges **72** and **72A**. A resilient angled biasing flange **73** (FIG. **7**) on the carrier **36** is shaped to engage a side edge of the circuit board **38** to assure non-rattling retention of the circuit board **38**. The door-shaped retainer **40** is molded as shown in FIG. **8**, but is bendable about integral living hinge **41** into snapping engagement with the integrally-molded retainers **42**. When closed, the door-shaped retainer **40** includes an edge opposite the living hinge **41** that engages two hook-shaped retainers **42**. However, it is to be understood that retainers **(42)** can be included to engage top and bottom edges of the retainer **40** as well. When closed, the door-shaped retainer **40** engages the resilient biasing flange **73** in a manner that compresses the retainer **40** against the blind surfaces on the hook retainers **42**, thus assuring non-rattling securement of the door-shaped retainer **40**. Notably, the living hinge **41** extends only about half a length of the door **40**, such that wires **27A'** can be slid sideways into the hinge area and routed into the pocket **37** without interference from the door **40** or hinge **41** or flanges **72** and **72A**. The circuit board **38** includes the light-generating devices **39** and circuits necessary for controlling the light-generating devices **39** to generate an arrow-shaped turn signal. It is noted that turn-signals have previously been put on external vehicle rearview mirrors (for example, see U.S. Pat. No. 6,166,848), but it is believed that no one has eliminated the separate turn signal housing shown in U.S. Pat. No. 6,166,848. The

11

present apparatus incorporates the structure for holding the turn signal circuit board and LEDs into the carrier of the mirror subassembly itself. Notably, the illustrated carrier **36** is designed so that it can be molded by dies that do not have any die pulls, slides, cams, or moving components for making blind surfaces. This lowers cost, reduces maintenance, reduces capital investment, reduces scrap, and leads to an improved and more reliable manufacturing process and better parts.

The present structure further incorporates the turn signal device **27** into the mirror subassembly structure by using the plastic layer **56** (FIG. 15) of Mylar in the heater **26** as a diffuser for the light-generating devices **39** on the turn-signal device **27**. Specifically, one or more apertures **74** are cut into the foam layer **55** of the heater **26**. The apertures **74** can be cut entirely through the foam if the light generated by the turn signal device **27** is sufficiently dispersed to provide a uniformly lit turn signal. However, the illustrated heater **26** has a clear plastic layer **56** that extends across the pattern of apertures **74**. The plastic layer **56** is Mylar or similar clear material, and at least the area of sections **34** at the apertures **74** is roughened or otherwise treated to form a light-spreading/diffusing surface **34** over the apertures **74**. This surface causes the light **35** from LEDs **39** to diffuse into a more uniform distribution of light. Bars **39'** (FIG. 15) in the windows on the EC material **53** and the relationship of components causes the emitted light **35'** to be visible. By this method, the need for separate window/light diffusers on the light-generating devices **39** of the turn signal device **27** are eliminated. However, it is conceivable that the pattern of apertures **74** can be cut completely through the heater **26**, and that a separate light diffusing panel(s) could be used instead of the above-described integrated light diffuser that is integrated into the heater **26**.

The arrangement of connectors for interconnecting the electrically powered and controlled components of the present mirror assembly **20** is very important, since connectors take up space, particularly if not well-arranged, since each additional connector adds cost, and since they require manual labor to orient and snap together. Further, each additional connector is another opportunity for misconnection, and/or for an electrical short or dead connection. Connectors and wires also add weight and thickness to a mirror assembly. Four connector arrangements are described below, each solving one or more of the above problems and offering one or more of the above advantages.

Mirror assembly **20** (FIG. 3) includes the connector **26A**, which comprises two protruding conductor leads **76** and **77** connected to the heating traces in the heater **26**. The main wiring bundle **23** includes a first connector **28A** for operably engaging leads **76** and **77**. The main wiring bundle **23** further includes a second connector **28** that snap engages into or that is incorporated into a holder **81**. Holder **81** is snap-attached into an aperture in reinforcement rib **66A**. The connectors **25A** and **27A** are configured to snap side-by-side into the holder **81** and electrically connect to different conductors in the second connector **28** on the main wiring bundle **23**. It is contemplated that the holder **81** can be incorporated into the second connector **28** or into one of the connectors **25A** and **27A**, if desired. By plugging the two connectors **25A** and **27A** side-by-side into the single connector **28**, the total number of connectors is reduced. Also, the orientation and snap engagement of the connectors **25A** and **27A** into connector **28** is easier since there is one location, and the first installed connector helps align and orient the second connector for installation. Also, the connectors **25A**, **27A** and **28** are located close to connector **28A** and leads **76** and **77**,

12

which also facilitates an efficient assembly, since an assembler does not need to waste time "searching for" the connectors.

The mirror assembly **20B** (FIGS. 10–11) includes wires **83B** and a heater connector **26B** that replace the heater leads **76** and **77**. The main wiring bundle **23B** includes a connector **28B** having six prong conductors therein. Main wiring bundle connector **28B** snaps into or is incorporated into the holder **81B**, which is retained by rib **66B**. The EC connector **25B**, the heater connector **26B**, and the turn signal device connector **27B** each plug side-by-side-by-side into the connector **28B** of the main wiring bundle **23B**. As noted above, the side-by-side-by-side relationship of the connectors creates an arrangement that is more efficient to assemble, since all connectors are close together and further since previously installed connectors guide the later-installed connectors. As arranged, the wires of the connectors **25B**, **26B** and **27B** do not overlap, thus leading to a flatter and well-arranged wiring pattern. Preferably, the connectors **25B**, **26B**, and **27B** have different shapes so that they are not interchangeable and cannot be mis-assembled.

The mirror assembly **20C** (FIG. 12) includes conductors **83C** that are integrated into the heater **26C** as part of the heater conductor tracings. The conductors **83C** are used to connect the turn signal device **27C** to the main wiring bundle **23C** in an "extension cord" type arrangement. The turn signal conductors **83C** can extend along any convenient path from the left side to the right side of the mirror subassembly **24C**. The turn signal conductors **83C** are shown in FIG. 12 as extending horizontally along an upper edge of the heater **26C** for convenience so that they are easily seen in the drawing and so that they do not interfere with the heater tracings of the heater **26C**. It is contemplated that the turn signal conductors **83C** could act as heating elements as well, but this is not a preferred mode. Instead, it is contemplated that they will define a separate circuit extending between the turn signal device **27C** and the main wires **23C**.

The integrated turn signal conductors **83C** can be electrically interconnected to the main connector **28C** by various means. The illustrated turn signal conductors **83C** include protruding paired ends **84C** and **85C** that are engaged by "L" connectors **86C** and **87C**, respectively. The turn signal device **27C** is held to the carrier by door retainer **40C**, and includes wires **90C** connected to connector **86C**. Connector **87C** engages the downstream protruding paired ends **85C** for the turn signal device **27C** and further engages the protruding paired ends **26C'** extending from heating tracings **26C''**. Wires **93C** electrically connect the four conductors of the connector **87C** to the second connector **94C** which in turn is connected to the main connector **28C**. The connector **25C** connects the electrochromic material of the EC mirror to the main connector **28C**. Wires **23C** extend from the main connector **28C** and are connected to the vehicle electrical system.

Mirror **20D** (FIG. 13) is similar to the mirror assembly **20B** (FIG. 10), except the connector **27D** from the turn signal device **27D'** connects into a rear of the connector **25D** in a "piggyback" style arrangement, and the connector **25D** (which is four prong) plugs into the main connector **28D** adjacent the "EC" connector **26D**. More specifically, the connector **25D** has two wires from the EC mirror subassembly hard wired into the connector **25D**, and further has four output prongs for connection to main connector **28D**. Connector **26D** attaches to the main connector **28D** beside connector **25D**. Wires **23D** extend from connector **28D** for connection to the vehicle electrical system.

It is to be understood that variations and modifications can be made on the aforementioned structure without departing

13

from the concepts of the present invention, and further it is to be understood that such concepts are intended to be covered by the following claims unless these claims by their language expressly state otherwise.

What is claimed is:

1. An exterior rearview mirror assembly comprising:
an electrochromic mirror element having a front surface and a rear surface, the electrochromic mirror element having a portion allowing light to pass therethrough;
a member located adjacent the rear surface of the electrochromic mirror element, the member including an area aligned with the portion of the electrochromic mirror element; and
a light source emitting light, the light being directed at the area;
the area of the member and the portion of the electrochromic mirror element allowing light from the light source to pass therethrough;
wherein the area includes a diffuser to diffuse light passing through the electrochromic mirror element.
2. The exterior rearview mirror assembly of claim 1, wherein: the electrochromic mirror element comprises an electrochromic mirror subassembly including a front glass element and a rear glass element, with electrochromic material located between the front glass element and the rear glass element.
3. The exterior vehicle mirror assembly of claim 1, wherein:
the light source comprises a LED.
4. The exterior vehicle mirror assembly of claim 1, wherein:
the diffuser is directly applied to the member.
5. The exterior vehicle mirror assembly of claim 4, wherein:
the diffuser is a light diffusing panel placed over the area.
6. The exterior vehicle mirror assembly of claim 1, wherein:
the diffuser is applied to a surface of the member in the area.
7. The exterior vehicle mirror assembly of claim 6, wherein:
the diffuser comprises a roughening of the surface.
8. The exterior vehicle mirror assembly of claim 1, wherein:
the light source directs the light at the portion of the electrochromic mirror element.
9. A method of assembling an exterior rearview mirror assembly comprising:
providing an electrochromic mirror element;
providing a member having an area adapted to allow light to pass therethrough;
positioning the member adjacent the electrochromic mirror element; and
treating the area of the member to diffuse the light passing through the member.
10. The method of claim 9, wherein:
treating comprises directly applying a panel to the member.
11. The method of claim 9, wherein:
treating comprises treating a surface of the member in the area.
12. The method of claim 11, wherein:
treating comprises roughening the surface.
13. An apparatus for an exterior vehicle mirror assembly including an electrochromic reflective element having inner

14

and outer surfaces and a light source positioned to direct light toward the inner surface of the electrochromic reflective element, the apparatus comprising:

- a member extending between the inner surface of the electrochromic reflective element and the light source, the member including an area adapted to allow light from the light source to pass therethrough; and
- a light diffuser positioned over the area of the member to diffuse light passing through the electrochromic reflective element.
14. The apparatus of claim 13, wherein:
the diffuser is directly applied to the member.
15. The apparatus of claim 14, wherein:
the diffuser is a light diffusing panel placed over the area.
16. The apparatus of claim 13, wherein:
the diffuser is applied to a surface of the member in the area.
17. The apparatus of claim 16, wherein:
the diffuser comprises roughening the surface.
18. An apparatus for an exterior vehicle mirror assembly including a reflective element having inner and outer surfaces and a light source positioned to direct light toward the inner surface of the reflective element, the apparatus comprising:
a member extending between the inner surface of the reflective element and the light source, the member including an area adapted to allow light from the light source to pass therethrough;
a conductive layer deposited on the member; and
a light diffuser positioned over an area of the element to diffuse light passing through the member.
19. The apparatus of claim 18, wherein:
the diffuser is directly applied to the member.
20. The apparatus of claim 19, wherein:
the diffuser is a light diffusing panel placed over the area.
21. The apparatus of claim 18, wherein:
the diffuser is applied to a surface of the member in the area.
22. The apparatus of claim 21, wherein:
the diffuser comprises roughening the surface.
23. An apparatus for an exterior vehicle mirror assembly including a reflective element having inner and outer surfaces and a light source positioned to direct light toward the inner surface of the reflective element, the apparatus comprising:
a member extending between the inner surface of the reflective element and the light source, the member including an area adapted to allow light from the light source to pass therethrough, the member including a conductive layer;
the member comprising a material which is substantially impermeable to light except for a patterned opening to allow light to pass therethrough; and
a light diffuser positioned over the area of the member to diffuse light passing through the member.
24. The apparatus of claim 23, wherein:
the diffuser is directly applied to the member.
25. The apparatus of claim 24, wherein:
the diffuser is a light diffusing panel placed over the area.
26. The apparatus of claim 23, wherein:
the diffuser is applied to a surface of the element in the area.
27. The apparatus of claim 26, wherein:
the diffuser comprises roughening the surface.

15

28. An exterior rearview mirror assembly for a vehicle comprising:

- a mirror element;
 - a heater positioned relative to the mirror element for heating the mirror element, the heater including an area for letting light pass therethrough; and
 - a light source emitting light, the light being directed at the area;
- the area diffusing the light so that the light passing therethrough is uniformly distributed.

29. The exterior rearview mirror assembly of claim **28**, wherein:

- the mirror element comprises an electrochromic mirror subassembly including a front glass element and a rear glass element, with electrochromic material located between the front glass element and the rear glass element.

30. The exterior vehicle mirror assembly of claim **29**, wherein:

- the light source comprises a LED.

16

31. The exterior vehicle mirror assembly of claim **28**, wherein:

- the area comprises a diffuser directly applied to the area.

32. The exterior vehicle mirror assembly of claim **31**, wherein:

- the diffuser is a light diffusing panel placed over the area.

33. The exterior vehicle mirror assembly of claim **28**, wherein:

- the area comprises a diffuser applied to a surface of the member in the area.

34. The exterior vehicle mirror assembly of claim **33**, wherein:

- the diffuser comprises roughening the surface.

35. The exterior vehicle mirror assembly of claim **28**, wherein:

- the light source directs the light at the portion of the mirror element.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,963,438 B2
APPLICATION NO. : 10/714330
DATED : November 8, 2005
INVENTOR(S) : Braun et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title Page, under Item (12) delete "Busscher et al." and insert --Braun et al.--.


Title Page, Item (75) Inventors

Remove "**Busscher, Bradley L.** (Grand Rapids, MI); **Northman, Bradley L.** (Belmont, MI); **Ypma; Kenton J.** (Hudsonville, MI); **Beute, Randall J.** (Grand Rapids, MI); **Roberts, John K.** (Grand Rapids, MI); **Jordan, Wayne M.** (Grandville, MI); **DeNave, Edward L.** (Zeeland, MI); **Bostwick, Daniel J.** (Grandville, MI); **Bosch, Gregory A.** (Grandville, MI)" as co-inventors.

Add --**Beute, Randall J.** (Grand Rapids, MI)-- as co-inventor.

Signed and Sealed this

Eighteenth Day of May, 2010

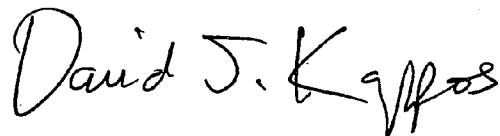A handwritten signature in black ink, reading "David J. Kappos". The signature is written in a cursive, flowing style with a large, stylized 'D' and 'K'.

David J. Kappos
Director of the United States Patent and Trademark Office