



US008585140B2

(12) **United States Patent**
Chang

(10) **Patent No.:** **US 8,585,140 B2**
(45) **Date of Patent:** **Nov. 19, 2013**

(54) **HEADREST-MOUNTED MONITOR**

(76) Inventor: **Chung L. Chang**, Diamond Bar, CA
(US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/475,332**

(22) Filed: **May 29, 2009**

(65) **Prior Publication Data**

US 2009/0235513 A1 Sep. 24, 2009

Related U.S. Application Data

(63) Continuation of application No. 11/777,936, filed on Jul. 13, 2007, now abandoned, which is a continuation of application No. 11/401,475, filed on Apr. 10, 2006, now Pat. No. 7,267,402, which is a continuation of application No. 10/762,630, filed on Jan. 20, 2004, now Pat. No. 7,044,546, which is a continuation-in-part of application No. 10/219,987, filed on Aug. 14, 2002, now Pat. No. 7,036,879.

(60) Provisional application No. 60/451,232, filed on Feb. 28, 2003.

(51) **Int. Cl.**
B60R 11/02 (2006.01)

(52) **U.S. Cl.**
USPC **297/217.3; 348/837**

(58) **Field of Classification Search**
USPC 297/217.1, 217.3; 725/75, 76, 77;
348/837, 838

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,019,050 A 1/1962 Spielman

3,284,041 A 11/1966 Tjaden
3,737,184 A 6/1973 Swartz
3,773,378 A 11/1973 Lewis

(Continued)

FOREIGN PATENT DOCUMENTS

CN 2506484 8/2002
DE 3316818 11/1984

(Continued)

OTHER PUBLICATIONS

Unsolicited letter from Trakker Technologies, Inc., dated Sep. 20, 2005.

(Continued)



Primary Examiner — Peter Brown

(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson & Bear LLP

(57) **ABSTRACT**

A monitor adapted for mounting in an automobile headrest is provided. A screen structure of the monitor is pivotable about an upper edge thereof, such that the monitor occupies little volume within the headrest. A viewing angle of the screen structure is independently adjustable by a viewer, such that the viewer can continuously select the optimum viewing angle with changing conditions inside the automobile. The screen structure automatically retracts into a housing when struck. Thus, the monitor poses little risk of injury to passengers. The housing of the monitor is attachable to the headrest with screws, which provides a very sturdy connection and reduces the chances of the housing becoming detached from the headrest during a vehicle collision. The hinged connection between the screen structure and the housing is preferably constructed of interconnected components made from sturdy materials, such as metals. Hinge components are optionally secured with metal fastening members and fastening apertures made of metal and strong plastics. The hinges are thus unlikely to break during a vehicle collision.

1 Claim, 11 Drawing Sheets

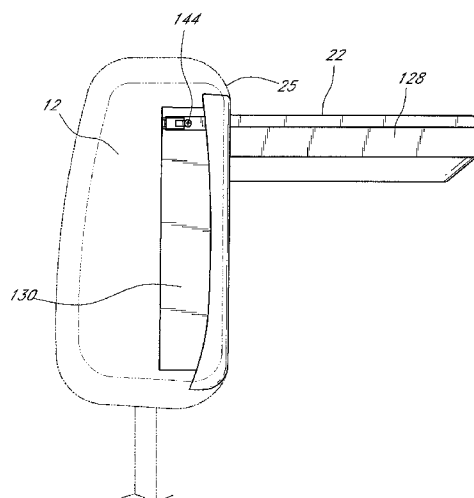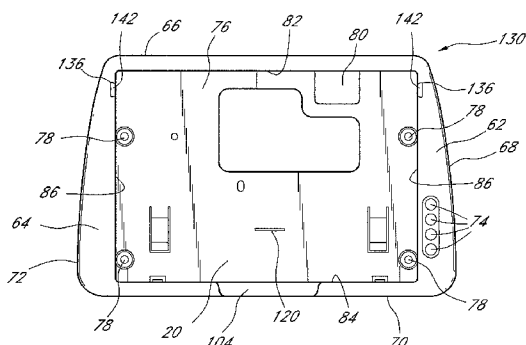

(56)

References Cited

U.S. PATENT DOCUMENTS

3,944,020 A	3/1976	Brown	5,696,861 A	12/1997	Schimmeyer et al.
D246,037 S	10/1977	Kelly	D389,818 S	1/1998	Smith
D247,234 S	2/1978	Stewart	5,705,860 A	1/1998	Ninh et al.
4,079,987 A	3/1978	Bumgardener	5,709,360 A	1/1998	Rosen
4,100,372 A	7/1978	Hypolite	D390,219 S	2/1998	Rosen
4,101,159 A	7/1978	Stewart	5,713,633 A	2/1998	Lu
4,241,870 A	12/1980	Marcus	D394,432 S	5/1998	Rosen
4,281,577 A	8/1981	Middleton	5,775,762 A	7/1998	Vitito
D260,507 S	9/1981	Kosugi et al.	5,808,862 A	9/1998	Robbins
D264,969 S	6/1982	McGourty	5,811,791 A	9/1998	Portman
4,352,200 A	9/1982	Oxman	D399,200 S	10/1998	Rosen
4,394,055 A	7/1983	Smith	5,822,023 A	10/1998	Suman et al.
4,440,443 A	4/1984	Nordskog	5,823,599 A	10/1998	Gray
4,445,750 A	5/1984	Grois et al.	5,831,811 A	11/1998	Van Horn
D280,312 S	8/1985	Simeri et al.	5,842,715 A	12/1998	Jones
D282,251 S	1/1986	Isham et al.	5,847,685 A	12/1998	Otsuki
D282,733 S	2/1986	Giavazzi et al.	D410,458 S	6/1999	Rosen
4,584,603 A	4/1986	Harrison	D410,464 S	6/1999	Hakoda
D284,280 S	6/1986	Mack, Jr. et al.	5,910,882 A	6/1999	Burrell
D285,684 S	9/1986	Akita et al.	5,927,784 A	7/1999	Vitito
4,630,821 A	12/1986	Greenwald	5,940,120 A	8/1999	Frankhouse et al.
4,635,110 A	1/1987	Weinblatt	5,946,055 A	8/1999	Rosen
4,643,606 A	2/1987	Buchner	D413,856 S	9/1999	Scribner
4,647,980 A	3/1987	Stevenson et al.	D413,937 S	9/1999	Smith
4,669,694 A	6/1987	Malick	5,949,345 A	9/1999	Beckert et al.
4,681,366 A	7/1987	Lobanoff	5,959,596 A	9/1999	McCarten et al.
4,702,519 A *	10/1987	Lobanoff	D414,856 S	10/1999	Zuege
4,756,528 A	7/1988	Umashankar	D416,015 S	11/1999	Mitchell
4,758,047 A	7/1988	Hennington	5,982,429 A	11/1999	Kamamoto et al.
4,792,183 A	12/1988	Townsend, III	5,984,347 A	11/1999	Blanc-Rosset
4,797,934 A	1/1989	Hufnagel	5,996,954 A	12/1999	Rosen et al.
4,818,010 A	4/1989	Dillon	5,997,091 A	12/1999	Rech et al.
4,824,159 A	4/1989	Fluharty et al.	6,007,036 A	12/1999	Rosen
4,833,727 A	5/1989	Calvet et al.	6,045,181 A	4/2000	Ikeda et al.
4,843,477 A	6/1989	Mizutani et al.	6,055,478 A	4/2000	Heron
4,867,498 A	9/1989	Delphia et al.	6,056,248 A	5/2000	Ma
4,870,676 A	9/1989	Lewo	6,059,255 A	5/2000	Rosen et al.
4,950,842 A	8/1990	Menninga	6,081,420 A	6/2000	Kim et al.
RE33,423 E	11/1990	Lobanoff	6,092,705 A	7/2000	Meritt
4,982,996 A	1/1991	Vottero-Fin et al.	6,093,039 A	7/2000	Lord
4,983,951 A	1/1991	Igarashi et al.	6,097,448 A	8/2000	Perkins
5,040,990 A	8/1991	Suman et al.	6,102,476 A	8/2000	May et al.
D320,587 S	10/1991	Kapp et al.	6,115,086 A	9/2000	Rosen
5,061,996 A	10/1991	Schiffman	6,124,902 A	9/2000	Rosen
D323,929 S	2/1992	Hodson	6,125,030 A	9/2000	Mola et al.
5,096,271 A	3/1992	Portman	D432,586 S	10/2000	Galli-Zugaro et al.
5,109,572 A	5/1992	Park	6,135,801 A	10/2000	Helot et al.
5,145,128 A	9/1992	Umeda	D434,400 S	11/2000	Rosen
5,163,870 A	11/1992	Cooper	D434,749 S	12/2000	Ito et al.
5,177,616 A	1/1993	Riday	6,157,418 A	12/2000	Rosen
5,188,421 A	2/1993	Arseneault	6,179,263 B1	1/2001	Rosen et al.
5,214,514 A	5/1993	Haberkern	6,181,387 B1	1/2001	Rosen
D338,003 S	8/1993	Nakayama	D437,837 S	2/2001	Harrison et al.
D340,016 S	10/1993	Falcoff	6,186,459 B1	2/2001	Ma
5,255,214 A	10/1993	Ma	6,195,438 B1	2/2001	Yumoto et al.
5,267,337 A	11/1993	Kirma	D438,853 S	3/2001	Iino
5,267,775 A	12/1993	Nguyen	6,199,810 B1	3/2001	Wu et al.
5,303,970 A	4/1994	Young et al.	6,216,927 B1	4/2001	Meritt
5,311,302 A	5/1994	Berry et al.	6,219,927 B1	4/2001	Westermaier
D349,893 S	8/1994	Bennett	6,231,371 B1	5/2001	Helot
5,338,081 A	8/1994	Young et al.	6,246,449 B1	6/2001	Rosen
5,359,349 A	10/1994	Jambor et al.	6,250,967 B1	6/2001	Chu
5,396,340 A	3/1995	Ishii et al.	6,256,837 B1	7/2001	Lan et al.
5,397,160 A	3/1995	Landry	6,266,236 B1	7/2001	Ku et al.
5,410,447 A	4/1995	Miyagawa et al.	6,267,428 B1	7/2001	Baldas et al.
5,467,106 A	11/1995	Salomon	D446,507 S	8/2001	Rosen et al.
5,469,298 A	11/1995	Suman et al.	6,275,376 B1	8/2001	Moon
5,507,556 A	4/1996	Dixon	D448,009 S	9/2001	Lavelle et al.
5,522,638 A	6/1996	Falcoff et al.	6,292,236 B1	9/2001	Rosen
5,529,265 A	6/1996	Sakurai	6,304,173 B2	10/2001	Pala et al.
D371,357 S	7/1996	Nakamura	D450,667 S	11/2001	Scribner
5,547,248 A	8/1996	Marechal	6,321,416 B1	11/2001	Lu
5,555,466 A	9/1996	Scribner et al.	6,339,455 B1	1/2002	Allan et al.
5,583,735 A	12/1996	Pease et al.	6,339,696 B1	1/2002	Chan et al.
5,636,891 A	6/1997	Van Order et al.	D454,121 S	3/2002	Lavelle et al.
			6,361,012 B1	3/2002	Chang
			6,363,204 B1	3/2002	Johnson et al.
			D456,371 S	4/2002	Lavelle et al.
			6,364,390 B1	4/2002	Finneman

(56)

References Cited

U.S. PATENT DOCUMENTS

6,380,978 B1	4/2002	Adams	D564,974 S	3/2008	Berg et al.
6,381,133 B1	4/2002	Chen	7,352,355 B2	4/2008	Troxell et al.
D456,789 S	5/2002	Snyker	7,354,091 B2	4/2008	Lavelle et al.
D457,506 S	5/2002	Scribner	7,360,833 B2	4/2008	Vitito
6,394,551 B1	5/2002	Beukema	7,379,125 B2	5/2008	Chang
6,404,622 B1	6/2002	Chen	7,440,275 B2	10/2008	Schedivy
6,409,242 B1	6/2002	Chang	7,448,679 B2	11/2008	Chang
6,412,848 B1	7/2002	Ceccanese et al.	7,460,187 B2	12/2008	Schedivy
D461,850 S	8/2002	Hussaini et al.	D592,647 S	5/2009	L'Henaff et al.
D462,670 S	9/2002	Kasuga et al.	D592,648 S	5/2009	L'Henaff et al.
6,446,925 B1	9/2002	Wada	D592,649 S	5/2009	L'Henaff et al.
6,466,278 B1	10/2002	Harrison et al.	7,548,413 B2	6/2009	Schedivy et al.
D465,492 S	11/2002	Scribner	7,591,508 B2	9/2009	Chang
D466,107 S	11/2002	Lum	7,636,930 B2	12/2009	Chang
6,480,374 B1	11/2002	Lee	7,653,345 B2	1/2010	Schedivy
D467,234 S	12/2002	Scribner	7,661,759 B2	2/2010	Koontz, II et al.
D467,562 S	12/2002	Chang	7,667,669 B2	2/2010	Lavelle et al.
6,493,546 B2	12/2002	Patsiokas	7,679,578 B2	3/2010	Schedivy
6,510,049 B2	1/2003	Rosen	7,728,855 B2	6/2010	Sakuma
D470,828 S	2/2003	Solland	7,758,117 B2	7/2010	Chang
6,522,368 B1	2/2003	Tuccinardi et al.	7,762,627 B2	7/2010	Chang
6,532,152 B1	3/2003	White et al.	7,780,231 B2	8/2010	Shalam et al.
6,532,592 B1	3/2003	Shintani et al.	7,788,770 B2	9/2010	Vitito et al.
6,549,416 B2	4/2003	Sterner et al.	7,791,586 B2	9/2010	Shalam
6,557,812 B2	5/2003	Kutzehr et al.	7,805,050 B2	9/2010	Lavelle et al.
6,619,605 B2	9/2003	Lambert	7,812,784 B2	10/2010	Chang
6,668,407 B1	12/2003	Reitzel	7,839,355 B2	11/2010	Lavelle et al.
6,669,285 B1	12/2003	Park et al.	7,857,176 B2	12/2010	Schedivy
D485,812 S	1/2004	Park	7,857,382 B2	12/2010	Vitito
6,678,892 B1	1/2004	Lavelle et al.	7,871,115 B2	1/2011	Vitito et al.
6,688,407 B2	2/2004	Etter et al.	7,885,603 B2	2/2011	Santavicca
6,695,376 B1	2/2004	Hirano	7,894,003 B2	2/2011	Chang
6,698,832 B2	3/2004	Boudinot	7,909,396 B2	3/2011	Vitito
6,719,343 B2	4/2004	Emerling et al.	7,909,397 B2	3/2011	Shalam et al.
6,724,317 B1	4/2004	Kitano et al.	7,933,121 B2	4/2011	Schedivy
D489,416 S	5/2004	Chao	7,954,894 B2	6/2011	Schedivy et al.
6,739,654 B1	5/2004	Shen et al.	8,136,777 B2	3/2012	Brawner
D492,944 S	7/2004	Drakoulis et al.	8,141,948 B2	3/2012	Cassellia et al.
6,776,455 B2	8/2004	Longtin et al.	8,162,395 B2	4/2012	Vitito
D502,152 S	2/2005	Peng	8,186,034 B2	5/2012	Vitito
6,871,356 B2	3/2005	Chang	8,201,203 B2	6/2012	Vitito
6,883,870 B2	4/2005	Jost	8,203,657 B2	6/2012	Vitito
6,899,365 B2	5/2005	Lavelle et al.	8,243,215 B2	8/2012	Schedivy
D508,900 S	8/2005	Kawan et al.	8,250,611 B2	8/2012	Vitito
6,928,654 B2	8/2005	Tranchina et al.	8,255,958 B2	8/2012	Vitito
D510,329 S	10/2005	Vitito	8,261,309 B2	9/2012	Vitito
D510,330 S	10/2005	Peng	8,274,615 B2	9/2012	Vitito
D511,332 S	11/2005	Vitito	2001/0001083 A1	5/2001	Helot
6,961,239 B2	11/2005	Schedivy	2001/0001319 A1	5/2001	Beckert et al.
D512,973 S	12/2005	Schedivy	2001/0055071 A1	12/2001	Kawai
6,975,806 B1	12/2005	Lavelle et al.	2002/0005917 A1	1/2002	Rosen
D515,522 S	2/2006	Vitito	2002/0085129 A1	7/2002	Kitazawa
6,994,236 B2	2/2006	Hsu	2002/0105507 A1	8/2002	Tranchina et al.
7,019,794 B2	3/2006	Norvell et al.	2002/0113451 A1	8/2002	Chang
D521,524 S	5/2006	Chang	2002/0149708 A1	10/2002	Nagata et al.
7,036,879 B2	5/2006	Chang	2002/0186531 A1	12/2002	Pokharna et al.
7,040,697 B1	5/2006	Tuccinardi et al.	2003/0020840 A1	1/2003	Hays et al.
7,040,698 B2	5/2006	Park	2003/0021086 A1	1/2003	Landry et al.
7,044,546 B2	5/2006	Chang	2003/0025367 A1	2/2003	Boudinot
7,050,124 B2	5/2006	Schedivy	2003/0036357 A1	2/2003	McGowan
7,066,544 B2	6/2006	Tseng	2003/0112585 A1	6/2003	Silvester
7,084,932 B1	8/2006	Mathias et al.	2003/0128183 A1	7/2003	Chang
7,095,608 B2	8/2006	Simmons et al.	2003/0137584 A1	7/2003	Norvell et al.
7,149,078 B2	12/2006	Schedivy	2003/0140352 A1	7/2003	Kim
7,184,259 B2	2/2007	Marler	2003/0184137 A1	10/2003	Jost
7,201,354 B1	4/2007	Lee	2003/0198008 A1	10/2003	Leapman et al.
7,201,356 B2	4/2007	Huang	2003/0202005 A1	10/2003	Sadahiho
7,218,360 B2	5/2007	Schedivy	2003/0222848 A1	12/2003	Solomon et al.
7,219,942 B2	5/2007	Schedivy	2004/0007906 A1	1/2004	Park et al.
7,245,274 B2	7/2007	Schedivy	2004/0032543 A1	2/2004	Chang
7,267,402 B2	9/2007	Chang	2004/0080213 A1	4/2004	Chang
7,315,729 B2	1/2008	Schedevy	2004/0083491 A1	4/2004	Chang
7,327,225 B2	2/2008	Nicholas et al.	2004/0085337 A1	5/2004	Barrows
7,333,009 B2	2/2008	Schedivy	2004/0085485 A1	5/2004	Schedivy
7,334,243 B2	2/2008	Chengalva et al.	2004/0085718 A1	5/2004	Imsand
			2004/0086259 A1	5/2004	Schedivy
			2004/0125549 A1	7/2004	Iredale
			2004/0130616 A1	7/2004	Tseng
			2004/0160096 A1	8/2004	Boudinot

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0212745 A1 10/2004 Chang
 2004/0212957 A1 10/2004 Schedivy
 2004/0227372 A1 11/2004 Lavelle et al.
 2004/0227695 A1 11/2004 Schedivy
 2004/0227696 A1 11/2004 Schedivy
 2004/0227861 A1 11/2004 Schedivy
 2004/0228622 A1 11/2004 Schedivy
 2004/0237111 A1 11/2004 Iracianios et al.
 2005/0005298 A1 1/2005 Tranchina
 2005/0020320 A1 1/2005 Lavelle et al.
 2005/0024356 A1 2/2005 Lavelle et al.
 2005/0046756 A1 3/2005 Chang
 2005/0052046 A1 3/2005 Lavelle et al.
 2005/0066369 A1 3/2005 Chang
 2005/0098593 A1 5/2005 Schedivy
 2005/0099042 A1 5/2005 Vitito
 2005/0099495 A1 5/2005 Vitito
 2005/0099547 A1 5/2005 Vitito
 2005/0099548 A1 5/2005 Vitito
 2005/0102697 A1 5/2005 Vitito
 2005/0110313 A1 5/2005 Vitito et al.
 2005/0110913 A1 5/2005 Vitito
 2005/0122670 A1 6/2005 Oh
 2005/0132407 A1 6/2005 Boyer, Jr. et al.
 2005/0155068 A1 7/2005 Chang
 2005/0166238 A1 7/2005 Vitito
 2005/0174498 A1 8/2005 Wu
 2005/0200697 A1 9/2005 Schedivy
 2005/0223406 A1 10/2005 Vitito
 2005/0232585 A1 10/2005 Lavelle et al.
 2005/0235326 A1 10/2005 Vitito
 2005/0235327 A1 10/2005 Vitito
 2005/0242636 A1 11/2005 Vitito
 2005/0242637 A1 11/2005 Vitito
 2005/0242638 A1 11/2005 Vitito
 2005/0249357 A1 11/2005 Schedivy
 2005/0251833 A1 11/2005 Schedivy
 2006/0023412 A1 2/2006 Schedivy
 2006/0034040 A1 2/2006 Simmons et al.
 2006/0047426 A1 3/2006 Vitito
 2006/0070102 A1 3/2006 Vitito
 2006/0070103 A1 3/2006 Vitito
 2006/0075934 A1 4/2006 Ram
 2006/0097537 A1 5/2006 Schedivy
 2006/0112144 A1 5/2006 Ireton
 2006/0119151 A1 6/2006 Vitito
 2006/0125295 A1 6/2006 Schedivy
 2006/0128303 A1 6/2006 Schedivy
 2006/0218595 A1 9/2006 Chang
 2006/0227212 A1 10/2006 Schedivy
 2006/0236345 A1 10/2006 Schedivy
 2006/0238529 A1 10/2006 Lavelle et al.
 2006/0290835 A1 12/2006 Sakuma
 2007/0001492 A1 1/2007 Chang
 2007/0001493 A1 1/2007 Chang
 2007/0008094 A1 1/2007 Schedivy
 2007/0052618 A1 3/2007 Shalam
 2007/0057541 A1 3/2007 Huang
 2007/0070259 A1 3/2007 Schedivy
 2007/0091015 A1 4/2007 Lavelle et al.
 2007/0096517 A1 5/2007 Chang
 2007/0096518 A1 5/2007 Chang
 2007/0097210 A1 5/2007 Chang
 2007/0101372 A1 5/2007 Chang
 2007/0105444 A1 5/2007 Macholz
 2007/0108788 A1 5/2007 Shalam et al.
 2007/0164609 A1 7/2007 Shalam et al.
 2008/0067842 A1 3/2008 Chang
 2008/0093956 A1 4/2008 Maxson
 2008/0157574 A1 7/2008 LaRussa
 2008/0165293 A1 7/2008 Tranchina
 2008/0191505 A1 8/2008 Schedivy
 2008/0246319 A1 10/2008 Chang
 2008/0246320 A1 10/2008 Chang
 2008/0252118 A1 10/2008 Chang

2009/0013357 A1 1/2009 Cassellia et al.
 2009/0021036 A1 1/2009 Chang
 2009/0235513 A1 9/2009 Chang
 2009/0315368 A1 12/2009 Mitchell
 2010/0017827 A1 1/2010 Shalam et al.
 2010/0067884 A1 3/2010 Schedivy
 2010/0146563 A1 6/2010 Chang
 2010/0211708 A1 8/2010 Rohaly et al.
 2010/0246155 A1 9/2010 Snider et al.
 2011/0133530 A1 6/2011 Chang
 2011/0167460 A1 7/2011 Tranchina
 2011/0181796 A1 7/2011 Caltabiano et al.
 2012/0162891 A1 6/2012 Tranchina et al.

FOREIGN PATENT DOCUMENTS

DE 3721377 1/1989
 DE 4118711 12/1992
 DE 19943696 3/2001
 EP 0 784 400 7/1997
 FR 2817812 12/2000
 FR 2829980 9/2001
 GB 2276059 A 9/1994
 JP 58-128942 A 8/1983
 JP 61-161151 U 10/1986
 JP 1-94048 4/1989
 JP 2-17777 U 2/1990
 JP 2-144242 6/1990
 JP 2-158437 6/1990
 JP 3-10476 A 1/1991
 JP 3-8513 Y 3/1991
 JP 3-189620 8/1991
 JP 3-45875 Y 9/1991
 JP 3-122482 U 12/1991
 JP 4-5142 1/1992
 JP 4-201639 7/1992
 JP 5-38981 2/1993
 JP 5-50883 3/1993
 JP 5-97098 4/1993
 JP 6-57251 U 8/1994
 JP 7-8680 B 2/1995
 JP 9-224202 8/1997
 JP 10-75389 U 3/1998
 JP 2001-047921 2/2001
 JP 2001-256768 A 9/2001
 JP 2001-354074 12/2001
 JP 2004-25949 A 1/2004
 JP 2004-81385 A 3/2004
 JP 2004-231158 A 8/2004
 JP 2004-231159 A 8/2004
 JP 2004-529688 A 9/2004
 JP 2005-503904 A 2/2005
 JP 2005-525856 A 9/2005
 JP 2005-532224 A 10/2005
 SE 63872 6/1924
 SE 63912 6/1999
 SE 63913 6/1999
 WO WO 00/38951 7/2000
 WO WO 02/074577 9/2002
 WO WO 03/001885 1/2003
 WO WO 03/029050 A1 10/2003
 WO WO 2004/005077 1/2004
 WO WO 2005/038628 4/2005

OTHER PUBLICATIONS

"Multimedia halt Einzug im Auto", p. 38-39, *Automotive Electronics* 2000.
 HR7DDPKG Installation Manual, Audiovox Electronics Corp., dated 2004.
 HR9000PKG Installation Manual, Audiovox Electronics Corp., dated 2006.
 Request for Reexamination of U.S. Patent No. 6,871,356, dated Jul. 28, 2005 (U.S. Reexamination No. 95/000,103).
 Order Granting Request for Reexamination of U.S. Patent No. 6,871,356, dated Sep. 29, 2005 (U.S. Reexamination No. 95/000,103).

(56)


References Cited

OTHER PUBLICATIONS

Action Closing Prosecution for Reexamination of U.S. Patent No. 6,871,356, dated Sep. 29, 2005 (U.S. Reexamination No. 95/000,103).
 Examiner's Answer during appeal of Reexamination of U.S. Patent No. 6,871,356 dated Nov. 20, 2007 (U.S. Reexamination No. 95/000,103).
 Decision on Appeal of Reexamination of U.S. Patent No. 6,871,356 dated Jun. 25, 2009 (U.S. Reexamination No. 95/000,103).
 Office Action for U.S. Appl. No. 10/361,897, now U.S. Patent No. 6,871,356 mailed Aug. 7, 2003.
 Office Action for U.S. Appl. No. 10/361,897, now U.S. Patent No. 6,871,356, mailed Feb. 26, 2004.
 Office Action for U.S. Appl. No. 10/361,897, now U.S. Patent No. 6,871,356, mailed Aug. 23, 2004.
 Compaq Tablet PC TC1000 product summary dated Sep. 3, 2002.
 Compaq Tablet PC TC1000 "Getting Started" guide, dated Nov. 2002.
 Compaq Tablet PC TC1000 Docking Station Reference Guide, dated Nov. 2002.
 Panasonic Color Television Operating Instructions CT-27SX32, dated 2002.
 U.S. Appl. No. 10/985,262, filed Nov. 10, 2004, titled Mobile Video System.
 U.S. Reexamination No. 95/000,103 of U.S. Patent No. 6,871,356, filed Aug. 1, 2005.
 U.S. Reexamination No. 95/000,007 of U.S. Patent No. 6,339,455, filed on Dec. 16, 2002.

U.S. Appl. No. 11/475,735, filed Jun. 26, 2006, titled Headrest Mounted Entertainment System.
 U.S. Appl. No. 12/103638, filed Apr. 15, 2008, titled Headrest-Mounted Entertainment Systems.
 U.S. Appl. No. 12/103651, filed Apr. 15, 2008, titled Headrest-Mounted Entertainment Systems.
 U.S. Appl. No. 11/777,936, filed Jul. 13, 2007, titled Headrest Mounted Monitor.
 U.S. Appl. No. 12/614,364, filed Nov. 6, 2009, titled Mobile Video System.
 U.S. Appl. No. 12/124,082, filed May 20, 2008, titled Flat Thin Screen TV/Monitor Automotive Roof Mount.
 U.S. Appl. No. 12/103,618, filed Apr. 15, 2008, titled Headrest-Mounted Entertainment Systems.
 U.S. Appl. No. 12/103,638, filed Apr. 15, 2008, titled Headrest-Mounted Entertainment Systems.
 U.S. Appl. No. 11/475,734, filed Jun. 26, 2006, titled Headrest Mounted Entertainment System.
 U.S. Appl. No. 11/475,729, filed Jun. 26, 2006, titled Headrest Mounted Entertainment System.
 Reissue U.S. Appl. No. 10/430,713 of U.S. Appl. No. 09/474,582, filed on May 5, 2003.
 U.S. Appl. No. 12/103,651, filed Apr. 15, 2008, titled Headrest-Mounted Entertainment Systems.
 U.S. Appl. No. 12/252,026, filed Oct. 15, 2008, titled Headrest-Mounted Monitor.
 U.S. Appl. No. 12/830,223, filed Jul. 2, 2010, titled Headrest-Mounted Entertainment Systems.

* cited by examiner

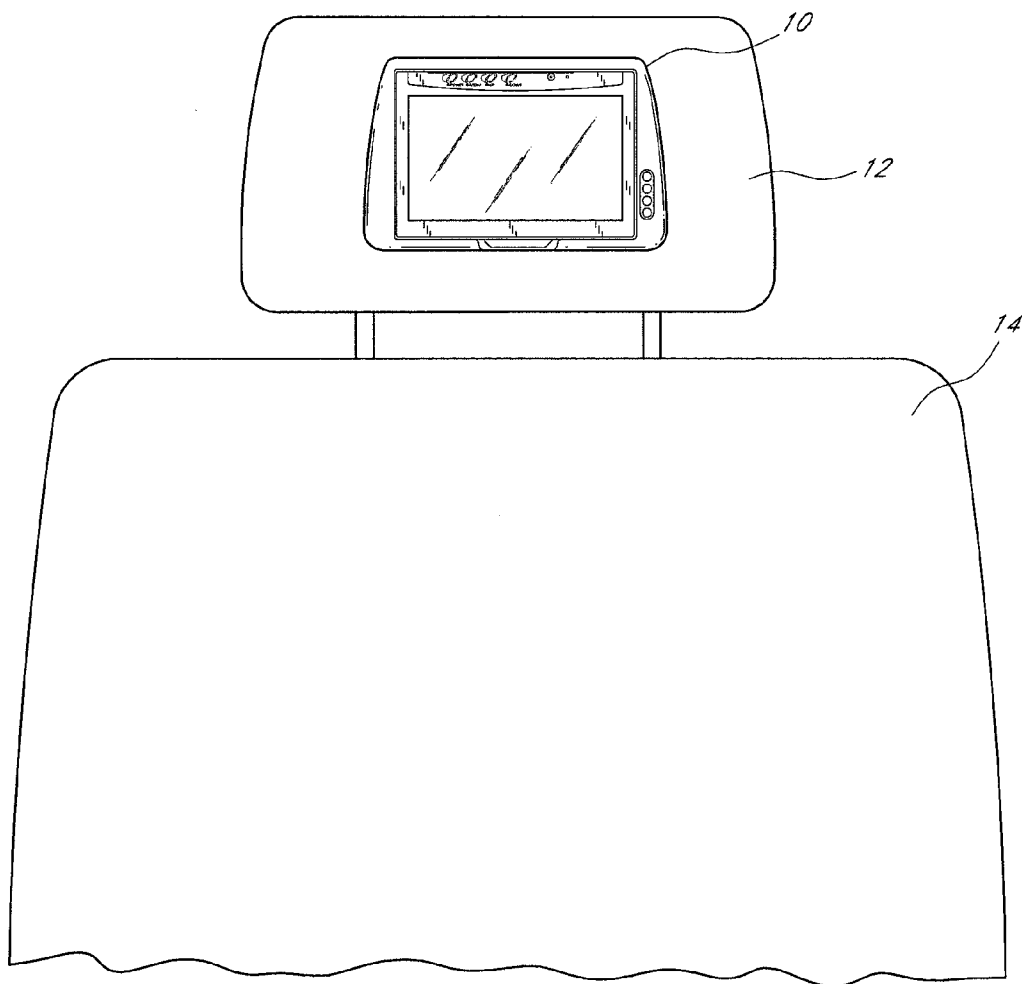*FIG. 1*

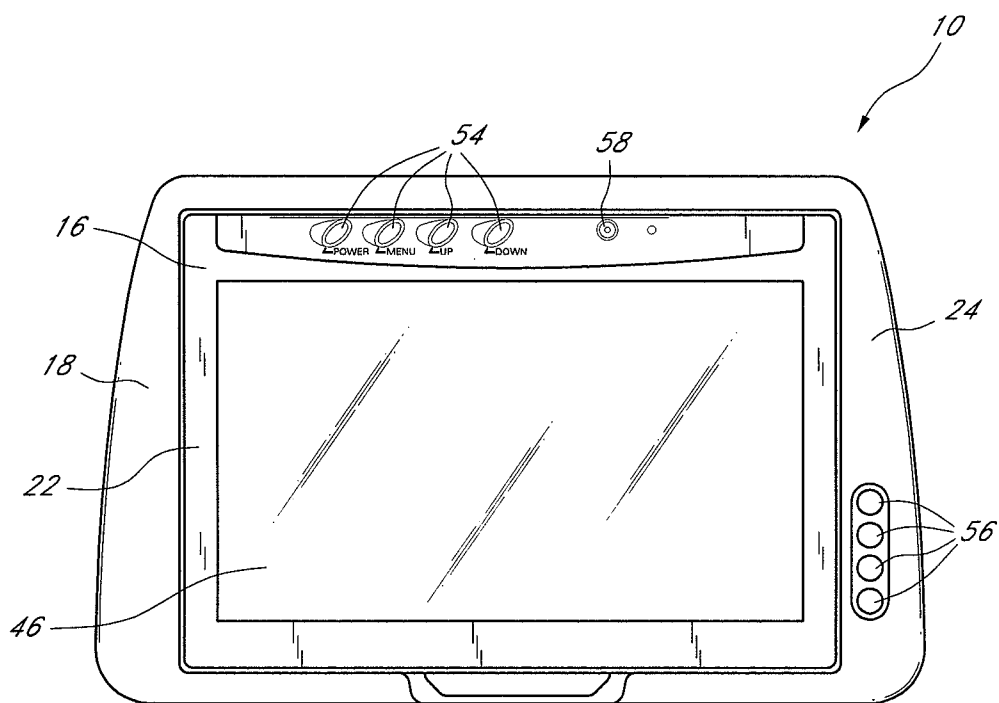


FIG. 1A

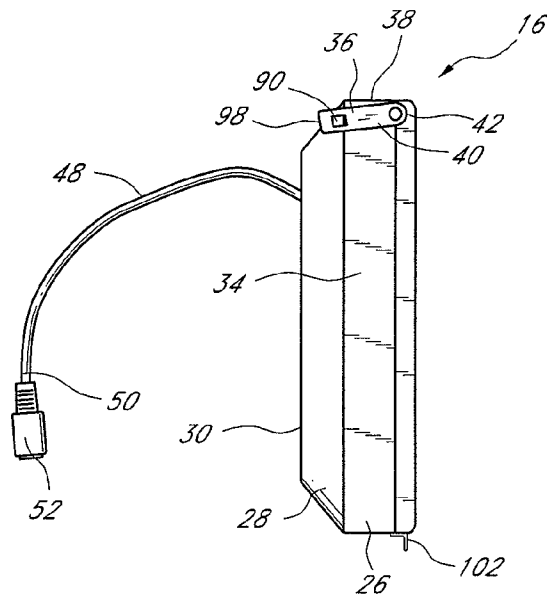


FIG. 2A

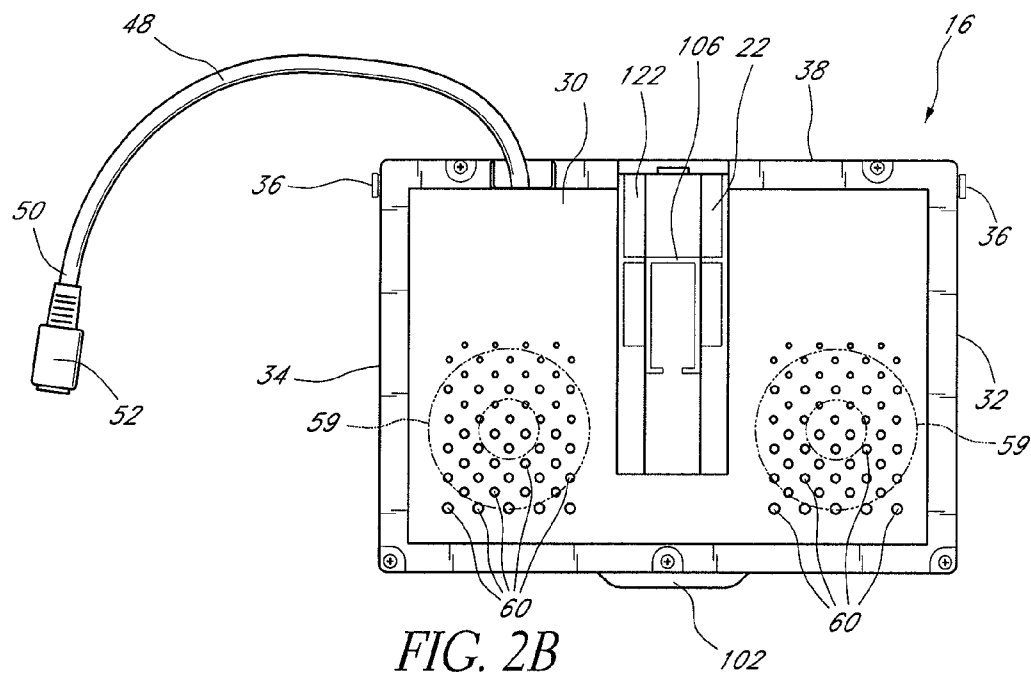
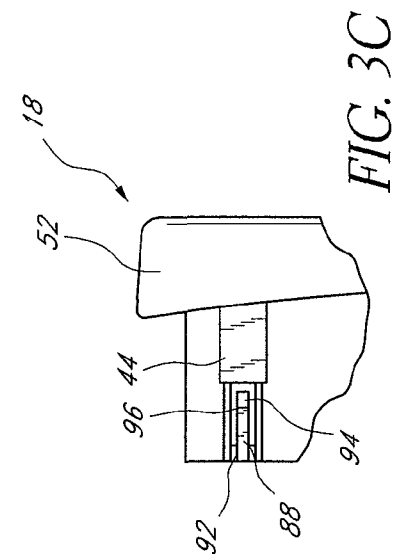
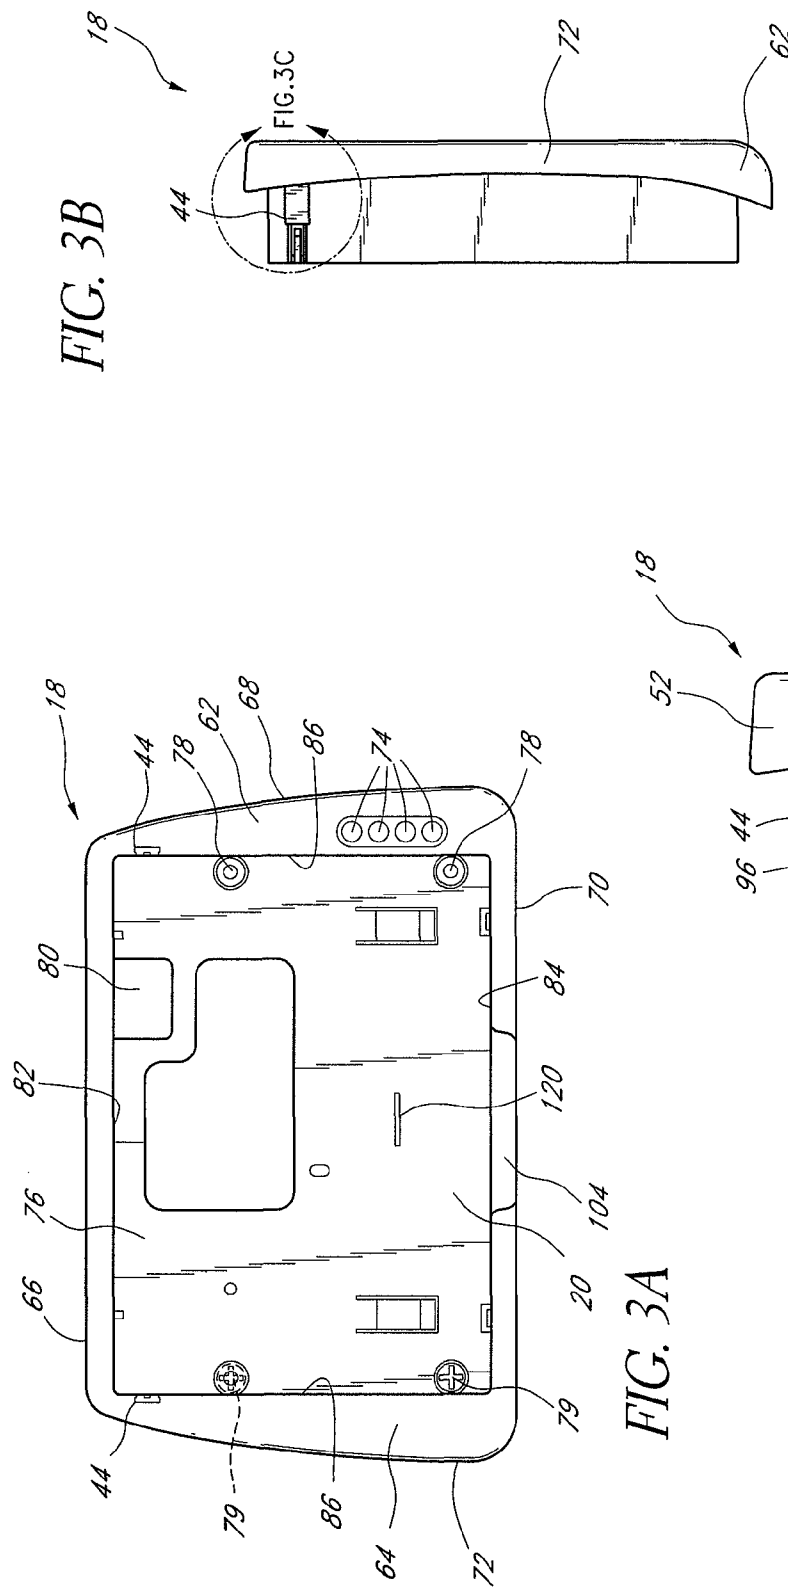
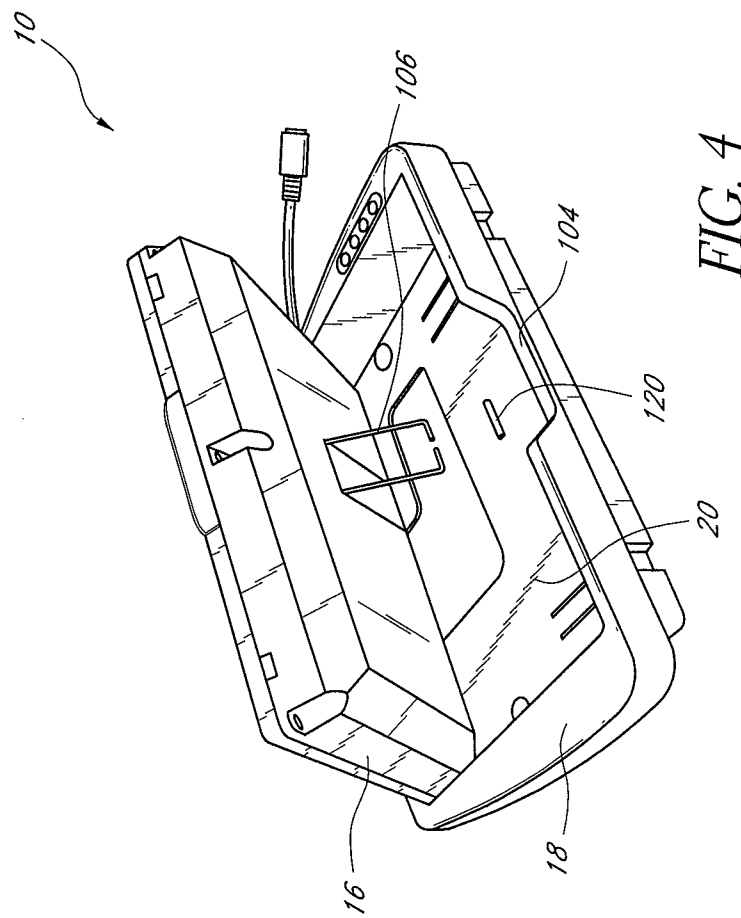


FIG. 2B





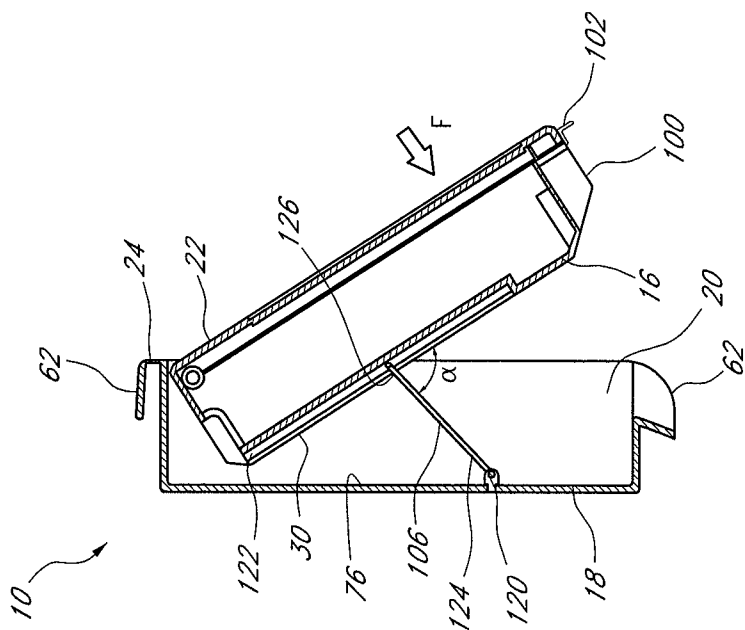


FIG. 5A

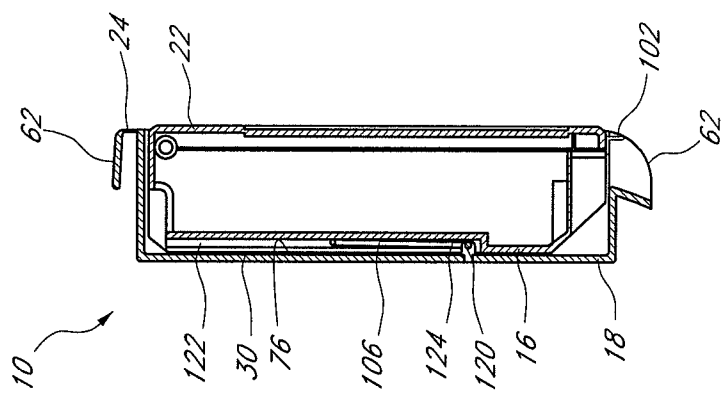
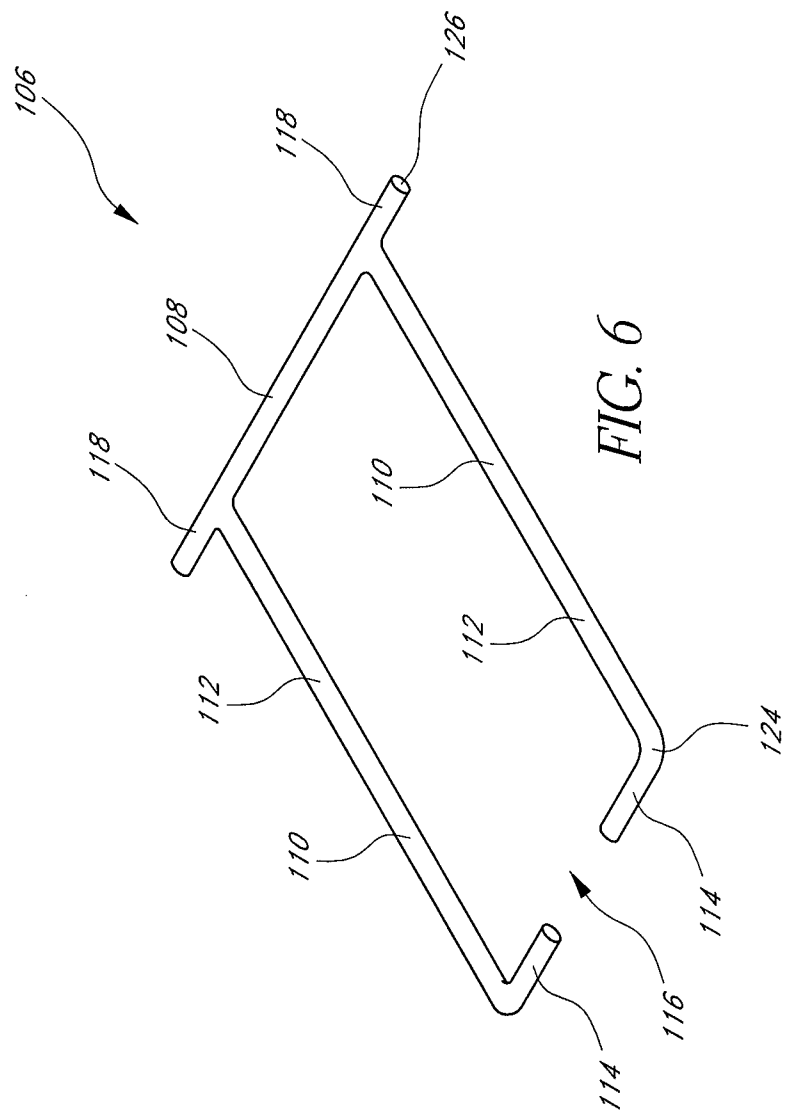


FIG. 5B



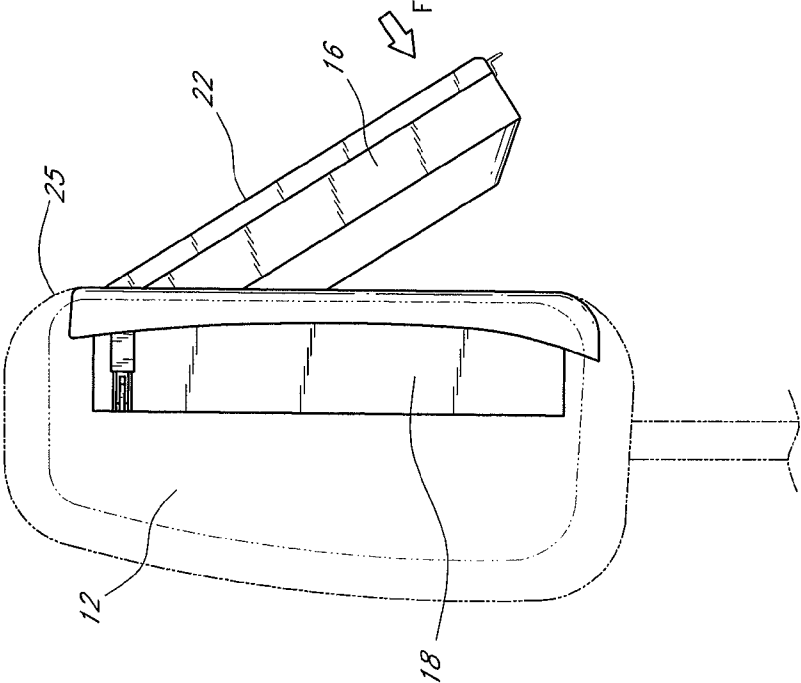


FIG. 7B

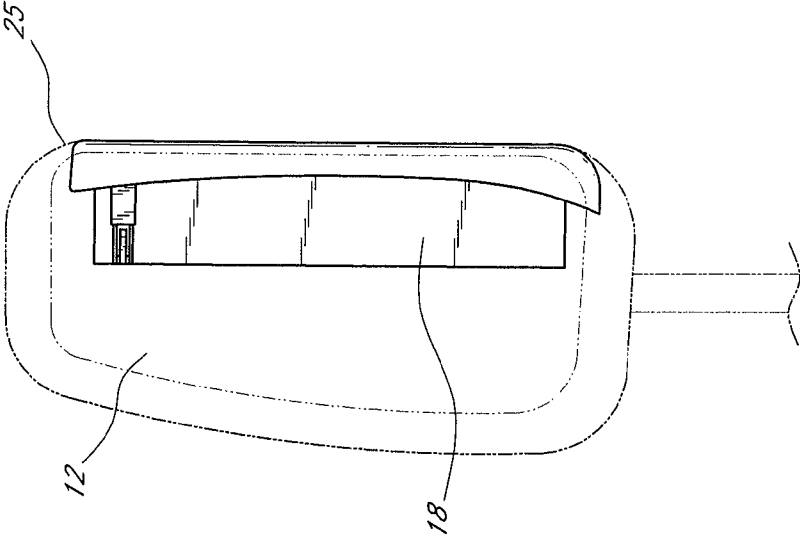


FIG. 7A

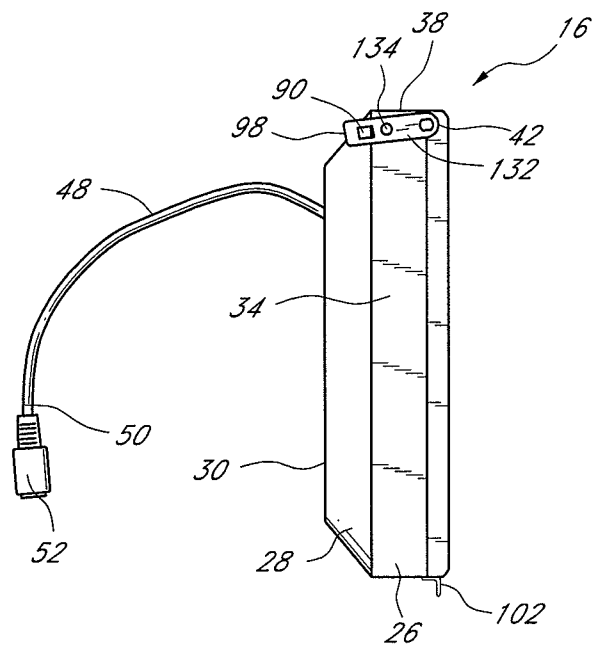


FIG. 8

FIG. 10

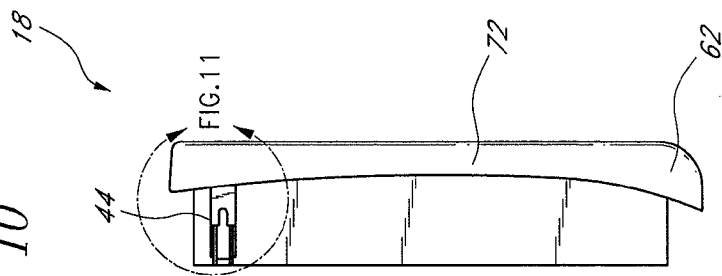


FIG. 11

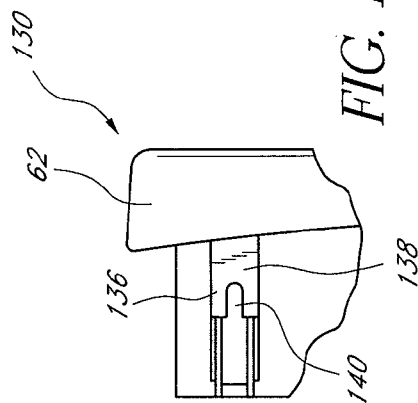
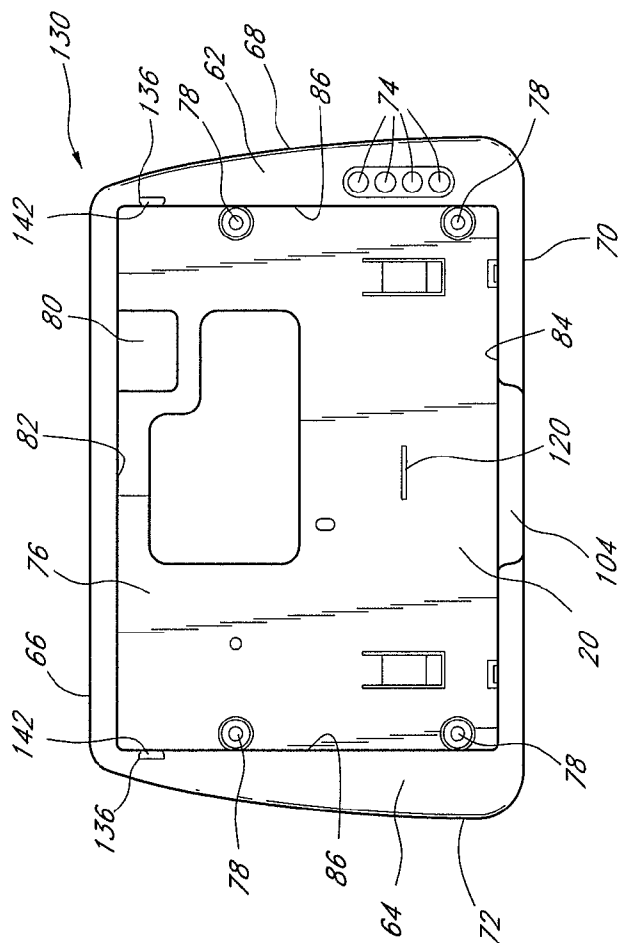


FIG. 9



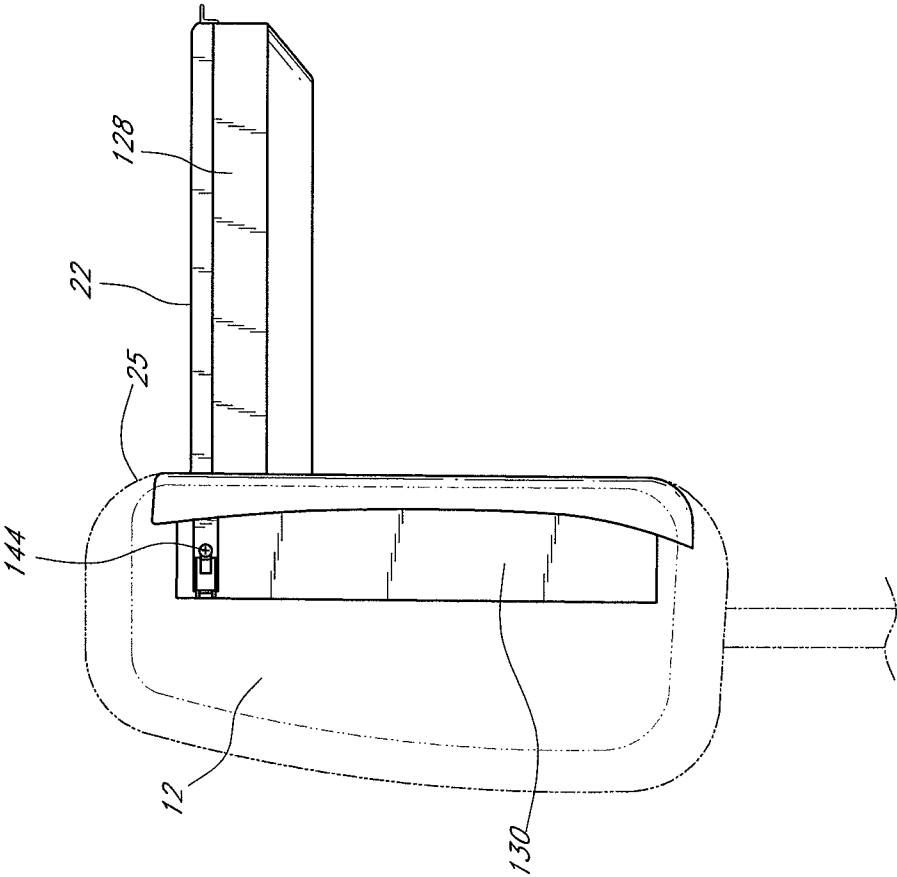


FIG. 12

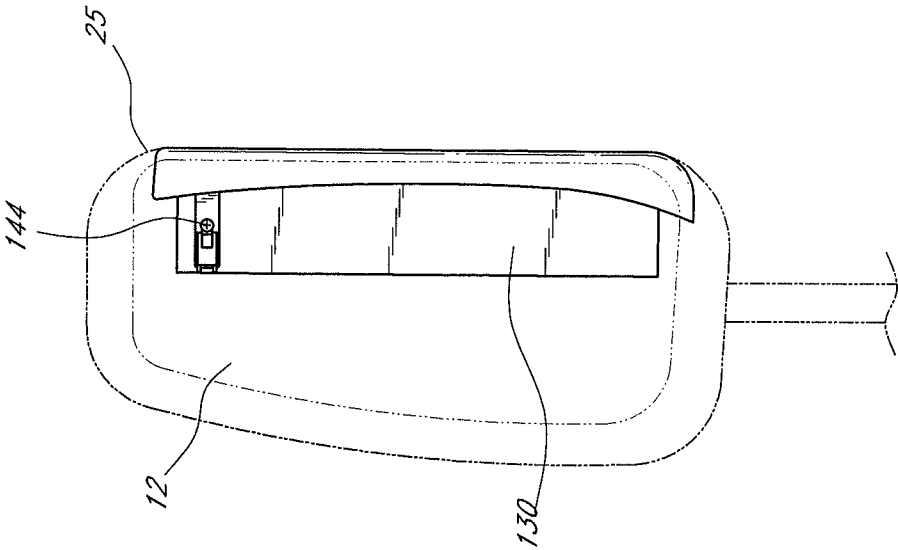


FIG. 13

HEADREST-MOUNTED MONITOR**RELATED APPLICATION**

This application is a continuation of U.S. application Ser. No. 11/777,936, filed Jul. 13, 2007, which is a continuation of U.S. application Ser. No. 11/401,475, filed Apr. 10, 2006, now U.S. Pat. No. 7,267,402, which is a continuation of U.S. application Ser. No. 10/762,630, filed Jan. 20, 2004, now U.S. Pat. No. 7,044,546, which (1) is a continuation-in-part of U.S. application Ser. No. 10/219,987, filed on Aug. 14, 2002, now U.S. Pat. No. 7,036,879 and (2) claims the benefit of U.S. Provisional Application No. 60/451,232, filed Feb. 28, 2003. The entire contents of each of the foregoing applications are hereby expressly incorporated by reference.

BACKGROUND OF THE INVENTION**1. Field of the Invention**

The present invention relates to visual display units for use in vehicles, such as automobiles and aircraft. More specifically, the present monitor is adapted to be mounted in a headrest of a vehicle seat.

2. Description of the Related Art

Monitors for displaying visual images have been commonplace aboard commercial aircraft and motor coaches for quite some time. For example, U.S. Pat. No. 5,267,775 to Nguyen, and U.S. Pat. No. 5,507,556 to Dixon disclose monitors that are adapted to be mounted in a seat back of an aircraft seat. Neither of these monitors is adapted for use in an automobile.

Disadvantageously, each of these monitors pivots automatically with the seat back. A viewer cannot adjust a viewing angle of either monitor independently of a recline angle of the seat back. This limitation prevents a viewer from adjusting the monitor to minimize glare. In an automobile a position and orientation of the vehicle relative to the sun is constantly changing. The movement creates glare at certain times, and viewers prefer to be able to adjust the screen to eliminate the glare. Thus, any monitor for use in an automobile is preferably adjustable so that viewers can minimize glare.

The Nguyen monitor pivots about a lower edge, and pivots into the seat back when a passenger reclines the seat back. Thus, the Nguyen monitor occupies a relatively large depth of the seat back. This configuration is not suitable for use in an automobile headrest, where space is very limited.

The Dixon monitor pivots about an axis located in the upper half of the housing. The axis is spaced downward and inward from the upper outer edge of the monitor (see FIGS. 3-5). The Dixon monitor pivots away from the seat back when a passenger reclines the seat back. However, because of the location of the pivot axis, an upper rear edge of the Dixon monitor moves toward the seat back when the monitor pivots. Like the Nguyen monitor, this configuration occupies a relatively large depth of the seat back and is not well-adapted for use in an automobile headrest, where space is very limited. Further, when the seat of Dixon is in a reclined position, and the monitor is in a position such that a lower edge thereof protrudes from the seat back, tension in a cable within the seat back holds the monitor in position. Thus, if a passenger strikes the monitor in this position, he or she could be injured because the monitor will not retract into the seat back. This configuration is also not appropriate for use in an automobile headrest, where during emergency braking passengers are frequently thrown forward.

Monitors have recently become more popular in private passenger vehicles where space is more limited than in aircraft and motor coaches. For example, U.S. Pat. No. 5,842,

715 to Jones, and U.S. Pat. No. 6,250,976 to Chu disclose monitors that are adapted to be mounted in a head rest of an automobile seat. The Jones and Chu monitors are adapted to be mounted in an automobile headrest. However, neither of these monitors is adjustable independently of the headrest.

Unfortunately, none of these patents teaches a monitor that is adapted to be mounted within an automobile headrest, and is independently adjustable by a viewer to provide an optimum viewing angle and to reduce glare.

Several monitors for use in private passenger vehicles include a plastic housing that is mounted to the vehicle headrest. The housing is glued into a cavity within the headrest, and the screen structure is securable within the housing using a variety of different attachment methods. For example, the housing may include tabs that snap into slots on the screen structure. Unfortunately, the connections between these screen structures and their respective housings are not very sturdy. Furthermore, the glued connections between the housings and their respective headrests are not very sturdy. Thus, during a vehicle collision, the screen structures tend to detach from their housings, and the housings tend to detach from their headrests. The loose screen structures and housings drifting about the passenger compartment pose a threat to the passenger's safety.

SUMMARY OF THE INVENTION

The preferred embodiments of the headrest-mounted monitor have several features, no single one of which is solely responsible for their desirable attributes. Without limiting the scope of this headrest-mounted monitor as expressed by the claims that follow, its more prominent features will now be discussed briefly. After considering this discussion, and particularly after reading the section entitled "Detailed Description of the Preferred Embodiments," one will understand how the features of the preferred embodiments provide advantages, which include adaptability to mounting in an automobile headrest, independent adjustability, sturdy connection between housing and headrest, sturdy connection between monitor and housing, and low risk of injury to passengers.

One preferred embodiment of the present monitor comprises a housing defining a first hinge portion. The housing is mounted to a headrest of a vehicle seat. The monitor further comprises a screen structure defining a second hinge portion. The second hinge portion cooperates with the first hinge portion to pivotably secure the screen structure to the housing.

Another preferred embodiment of the present monitor is adapted to be mounted to a headrest of a vehicle seat. The monitor comprises a housing defining a storage cavity and a first hinge portion adjacent an upper edge thereof. The monitor further comprises a screen structure defining a second hinge portion adjacent an upper edge thereof. The second hinge portion cooperates with the first hinge portion to pivotably secure the screen structure to the housing. The screen structure is adapted to fit substantially within the storage cavity when the screen structure is in a storage configuration. An angular orientation of the screen structure relative to the housing is adjustable without moving the headrest or the seat.

Another preferred embodiment of the present monitor is adapted to be mounted to a headrest of a vehicle seat. The monitor comprises a housing defining a storage cavity and a first hinge portion adjacent an upper edge. The monitor further comprises a screen structure defining a second hinge portion adjacent an upper edge. The second hinge portion cooperates with the first hinge portion to pivotably secure the screen structure to the housing. The screen structure is adapted to fit substantially within the storage cavity when the

3

screen structure is in a storage configuration. When the screen structure is in a viewing configuration, a lower edge of the screen structure protrudes from the housing. When the screen structure is in the viewing configuration, a pushing force applied to a front face of the screen structure adjacent a lower edge thereof pivots the screen structure to a position toward the storage configuration. Upon removal of the force, the screen structure remains in said position.

Another preferred embodiment of the present monitor is adapted to be mounted to a headrest of a vehicle seat. The monitor comprises a housing having a first hinge portion and having a pivot aperture attached to a floor thereof. The monitor further comprises a screen structure having a second hinge portion and a channel in a rear surface. The second hinge portion cooperates with the first hinge portion to pivotably secure the screen structure to the housing. The monitor further comprises a bracket having a first end pivotably retained within the pivot aperture and a second end slidably retained within the channel.

Another preferred embodiment of the present monitor is adapted to be mounted to a headrest of a vehicle seat. The monitor comprises a screen structure defining first and second hinge portions adjacent an upper edge thereof. The monitor further comprises a housing defining a storage cavity adapted to receive the screen structure, and a surface adjacent an upper edge thereof for receiving the first hinge portion. A fastening member secures the first hinge portion to the housing surface. The first and second hinge portions cooperate to pivotably secure the screen structure to the housing.

Another preferred embodiment of the present monitor is adapted to be mounted to a headrest of a vehicle seat. The monitor comprises a screen structure defining first and second hinge portions, and a housing defining a surface for receiving the first hinge portion. The housing is mounted to a headrest of a vehicle seat. The first hinge portion is secured to the housing surface, such that the second hinge portion cooperates with the first hinge portion to pivotably secure the screen structure to the housing, and the screen structure is pivotable ninety-degrees with respect to the housing.

Another preferred embodiment of the present monitor is adapted to be mounted to a headrest of a vehicle seat. The monitor comprises a screen structure defining a post and a first hinge portion pivotably connected thereto. The post is secured adjacent an upper edge of the screen structure. The monitor further comprises a housing defining a storage cavity adapted to receive the screen structure, and a surface adjacent an upper edge thereof for receiving the first hinge portion. The first hinge portion pivotably secures the screen structure to the housing. The post and the first hinge portion are constructed of a sturdy material designed to resist separation of the screen structure and housing.

BRIEF DESCRIPTION OF THE DRAWINGS

The preferred embodiments of the headrest-mounted monitor, illustrating its features, will now be discussed in detail. These embodiments depict the novel and non-obvious headrest-mounted monitor shown in the accompanying drawings, which are for illustrative purposes only. These drawings include the following figures, in which like numerals indicate like parts:

FIG. 1 is a front elevation view of a preferred embodiment of the headrest-mounted monitor according to the present invention, illustrating the monitor installed in a headrest of a vehicle seat;

FIG. 1A is a front elevation view of the headrest-mounted monitor of FIG. 1;

4

FIG. 2A is a left side elevation view of the screen structure of the headrest-mounted monitor of FIG. 1;

FIG. 2B is a rear elevation view of the screen structure of FIG. 2A;

FIG. 3A is a front elevation view of the housing of the headrest-mounted monitor of FIG. 1;

FIG. 3B is a left side elevation view of the housing of FIG. 3A;

FIG. 3C is a detail view of the second hinge portion of the housing of FIG. 3A;

FIG. 4 is a perspective view of the headrest-mounted monitor of FIG. 1, illustrating the screen structure pivoted outward from the housing;

FIG. 5A is a left side section view of the headrest-mounted monitor of FIG. 1, illustrating the screen structure in a storage position;

FIG. 5B is a left side section view of the headrest-mounted monitor of FIG. 1, illustrating the screen structure pivoted outward from the housing;

FIG. 6 is a perspective view of the bracket of the headrest-mounted monitor of FIG. 1;

FIG. 7A is a left side elevation view of the headrest-mounted monitor and headrest of FIG. 1, illustrating the screen structure in a storage position;

FIG. 7B is a left side elevation view of the headrest-mounted monitor and headrest of FIG. 1, illustrating the screen structure pivoted outward from the housing; and

FIG. 8 is a left side elevation view of another preferred embodiment of the screen structure of the headrest-mounted monitor of FIG. 1;

FIG. 9 is a front elevation view of another preferred embodiment of the housing of the headrest-mounted monitor of FIG. 1;

FIG. 10 is a left side elevation view of the housing of FIG. 9;

FIG. 11 is a detail view of the second hinge portion of the housing of FIG. 9;

FIG. 12 is a left side elevation view of the headrest-mounted monitor and headrest of FIG. 1, including the screen structure of FIG. 8, illustrating the screen structure in a storage position; and

FIG. 13 is a left side elevation view of the headrest-mounted monitor and headrest of FIG. 1, including the screen structure of FIG. 8, illustrating the screen structure pivoted outward from the housing.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates a preferred embodiment of a monitor 10 disposed within a headrest 12. The headrest 12 is mounted to a vehicle seatback 14, and 12 is movable independently of the seatback 14 toward and away from the seatback 14. The monitor 10 preferably faces a rear of the vehicle so that images displayed on the monitor 10 are visible to passengers seated behind the seatback 14. Features of the monitor 10, which are described in detail below, reduce the risk of injury to passengers presented by the monitor 10, and enable the monitor 10 to be mounted in the very limited space available within a typical vehicle headrest 12.

As shown in FIGS. 4, 5A and 5B, the monitor 10 includes a screen structure 16 that is pivotably attached to a housing 18. Both the housing 18 and an outer casing of the screen structure 16 are preferably constructed of a high-strength plastic, so that the monitor 10 is lightweight and durable. The housing 18, which is embedded in the headrest 12 as shown in FIGS. 1, 7A and 7B, includes a cavity 20 (FIGS. 3, 4 and 5B)

5

defining a storage space for the screen structure 16. The cavity 20 is substantially the same size and shape as the screen structure 16, such that when the screen structure 16 is in the storage position of FIGS. 5A and 7A, a front face 22 of the screen structure 16 is substantially flush with an outer surface 24 of the housing 18, which is in turn substantially flush with a surface 25 of the headrest 12 (FIG. 7A). The monitor 10 thus preferably protrudes only minimally or not at all from the headrest 12.

In the illustrated embodiment, the screen structure 16 includes a front portion 26 (FIGS. 2A and 2B) that is a substantially rectangular parallelepiped, and a rear portion 28 that tapers inward from the front portion 26 toward a rear face 30. Each of the left and right faces 32, 34 of the screen structure 16 includes a first hinge portion 36 adjacent a top face 38 of the screen structure 16. Each hinge portion 36 comprises a substantially flat bar 40 defining a plane that is parallel to a side face 32, 34 of the screen structure 16. The bar 40 is pivotably secured at a first end 42 to the side face 32, 34 of the screen structure 16, such that the bar 40 is pivotable in the plane defined by the bar 40. The first hinge portions 36 cooperate with second hinge portions 44 (FIGS. 3A-3C) on the housing 18 to pivotably secure the screen structure 16 to the housing 18, as described in detail below. The illustrated first hinge portions 36 are preferred, because they simplify the assembly of the monitor 10, as explained below. However, those of skill in the art will appreciate that a variety of alternate hinge constructions could be used and still achieve a number of advantages of the present monitor 10.

The front surface 22 of the screen structure 16 (FIG. 1A) includes a viewing screen 46 that displays images to passengers. As shown in FIGS. 2A and 2B, the screen structure 16 includes an input cable 48 for receiving an input signal to control the images displayed on the viewing screen 46. A first end 50 of the cable preferably includes a multi-pin connector 52 that enables a variety of input devices to selectively communicate with the monitor 10.

The monitor 10 further includes a plurality of controls for determining characteristics of the displayed images. For example, one control preferably enables power to be selectively applied to the monitor 10. Other controls preferably enable a viewer to select between various input sources for the monitor 10, such as a television tuner, a DVD player, a video game system, etc. Other controls preferably enable adjustment of qualities of the screen images, such as brightness, sharpness, contrast, etc.

In the illustrated embodiment, a first cluster of manual controls 54 is located on the front face 22 of the screen structure 16, and a second cluster of manual controls 56 is located on the outer surface 24 of the housing 18 adjacent the screen structure 16. The front face 22 of the screen structure 16 further includes an infrared sensor 58 for receiving signals from a handheld wireless remote control unit (not shown). Those of skill in the art will appreciate that all controls may be located on the screen structure 16, or all controls may be located on the housing 18. Alternatively, the monitor 10 may include no integrated manual controls, such that the monitor 10 is controllable using only a handheld wired or wireless remote control unit.

An interior of the screen structure 16 preferably includes at least one speaker 59 that produces audible sounds that accompany the images displayed on the screen 46. At least one of the controls 54, 56 on the monitor 10 or on an optional remote control unit preferably enables adjustment of a volume level produced by the at least one speaker 59. The rear face 30 of the screen structure 16, shown in FIG. 2B, includes apertures 60 that enable sounds produced by the speaker 59 to be heard

6

clearly by passengers. Those of skill in the art will appreciate that the apertures 60 are not necessary to achieve many advantages of the present monitor 10.

Those of skill in the art will also appreciate that the monitor 10 need not include a speaker 59. The monitor 10 could, for example, be connected to the vehicle's sound system such that sounds from the monitor 10 are produced by speakers mounted in the vehicle's interior. However, front seat passengers, who are not in a position to view the images on the monitor 10, may wish to listen to, for example, a radio broadcast through the vehicle's sound system. Therefore, providing at least one speaker 59 in the monitor 10 enables rear seat passengers to listen to sounds produced by the monitor 10, and front seat passengers to listen to sounds produced by the vehicle's sound system. To eliminate any dissonance created by two sources of different sounds, the monitor 10 could also include a headphone jack so that only backseat passengers wearing headphones can hear sounds produced by the monitor 10.

As shown in FIGS. 3A-3C, 5A and 5B, front edges of the housing 18 extend outward and backward, thus creating a rim 62 around the cavity 20 having a front face 64 and side faces 66, 68, 70, 72 that are substantially parallel to side faces of the cavity 20. The rim 62 increases the rigidity of the housing 18 without substantially increasing its weight or volume. In the illustrated embodiment, a portion of the front face 64 of the rim 62 adjacent a lower right edge 68 of the housing 18 includes a plurality of apertures 74. The apertures 74 are adapted to house controls, such as buttons or knobs, for adjusting various aspects of the monitor 10, as described above. Those of skill in the art will appreciate that the apertures 74 are not necessary to achieve all the advantages of the monitor 10, since controls may be mounted on the screen structure 16 or on a remote control unit.

A floor 76 of the cavity 20 preferably includes a plurality of apertures 78 (FIG. 3A) that cooperate with mounting hardware, such as screws 79 (FIG. 3A), to secure the housing 18 to the headrest 12. The floor 76 preferably also includes an aperture 80 of sufficient size to allow the input cable 48 to pass through the floor 76 without interference. A top surface 82, bottom surface 84 and opposing side surfaces 86 extend upward from the floor 76. The floor 76 protects the monitor 10 and the headrest 12 during use.

Adjacent the top surface 82, each side surface 86 of the cavity 20 includes a second hinge portion 44 (FIGS. 3A-3C) that cooperates with one of the first hinge portions 36 on the screen structure 16 to pivotably secure the screen structure 16 to the housing 18. Each second hinge portion 44 comprises a slot having a width substantially equal to a thickness of the bar 40 of the first hinge portion 36. The bar 40 is thus slidable within the slot. With the bar 40 disposed within the slot, a position and orientation of the bar 40 is fixed relative to the housing 18. However, because the bar 40 is rotatable with respect to the screen structure 16, the screen structure 16 is pivotable with respect to the housing 18.

A tab 88 within the slot cooperates with an aperture 90 (FIG. 2A) on the bar 40 to lock the bar 40 within the slot. The tab 88 is cantilevered and attached to a side edge 92 of the floor 76 of the cavity 20. The tab 88 includes a forward facing tapered portion 94 (FIG. 3C) that terminates in a ledge 96 that is perpendicular to a longitudinal axis of the tab 88 and faces away from the rim 62. As the bar 40 is inserted within the slot, the bar 40 slides along the outside of the tab 88, and the bar 40 urges the tab 88 inward due to interengagement of the bar 40 with the tapered surface 94. As a leading edge 98 (FIG. 2A) of the bar 40 reaches a rear end of the slot, the tab 88 snaps into position within the aperture 90 of the bar 40. The ledge 96

7

abuts an edge of the aperture 90, thus locking the bar 40 within the slot and securing the screen structure 16 to the housing 18. The present monitor 10 is thus easy to assemble. The bars 40 are simply inserted into the slots until the tabs 88 lock into place within the apertures 90.

While the illustrated second hinge portions 44 are preferred for their ease of assembly together with the illustrated first hinge portions 36, those of skill in the art will appreciate that the illustrated second hinge portions 44 are merely exemplary. A variety of alternate hinge constructions could be used to achieve many advantages of the present monitor 10.

Preferably, the first and second hinge portions 36, 44 are located near an upper edge 38, 82 of the screen structure 16 and housing 18, respectively. The upper edge 38 of the screen structure 16 thus remains substantially fixed with respect to the housing 18, while a lower edge 100 of the screen structure 16 is capable of protruding substantially from the front face 24 of the housing 18, as shown in FIG. 5B. Preferably, a finger catch 102 (FIGS. 2A, 2B, 5A and 5B) extends downward from the lower edge 100 of the screen structure 16. The finger catch 102 provides a convenient surface against which a viewer may place his or her fingers to rotate the screen structure 16 with respect to the housing 18. Preferably, the lower edge 70 of the housing includes a cut out portion 104 (FIGS. 3A and 4) so that a viewer can reach behind the finger catch 102 to pull the screen structure 16 outward from the stowed position of FIG. 5A.

Advantageously, as the screen structure 16 pivots from the stowed position of FIG. 5A to the position of FIG. 5B, no portion of the rear face 30 of the screen structure 16 moves toward the floor 76 of the cavity 20. The floor 76 thus defines a limit for the monitor 10. No portion of the monitor 10, including the screen structure 16, extends beyond the floor 76 into the headrest 12. Thus, the overall monitor 10 occupies relatively little depth of the headrest 12, because the depth occupied by the monitor 10 corresponds roughly to the thickness of the screen structure 16.

With prior art monitors, such as the monitors disclosed in U.S. Pat. No. 5,267,775 to Nguyen, U.S. Pat. No. 5,507,556 to Dixon, and U.S. Pat. No. 5,842,715 to Jones, additional depth beyond the thickness of the screen structure would be required within a headrest to accommodate these monitors. As the screen structures of these monitors pivot from the stowed position to a viewing position, an upper edge of the screen structure would move backward into the headrest. This configuration is disadvantageous because limited space is available within a headrest.

The function of a headrest is to provide padding for comfort and safety. Thus, a headrest must comprise at least a minimum amount of padding. When a monitor is added to a headrest, padding is displaced. The padding may be eliminated entirely, but such elimination makes the headrest less comfortable and less safe. Alternatively, the padding may be retained but moved elsewhere within the headrest. Disadvantageously, this option makes the headrest larger. If the headrest is made wider, the extra width obstructs a larger portion of the driver's view. If instead the headrest is made deeper, (extends farther into rear passenger area) the portion of the headrest that protrudes into the rear passenger area presents an obstacle to rear seat passengers. Therefore, a headrest-mounted monitor desirably occupies minimal space.

Besides defining a thickness of the present monitor 10, the housing 18 also provides a self-contained casing for the monitor 10. The housing 18 thus protects the monitor 10 from impacts, for example. The housing 18 also facilitates installation and removal of the monitor 10. To exchange one monitor 10 for another, for example if the first monitor 10 is

8

defective, the housing 18 and all of the components within the housing are easily removed from the headrest 12. A new monitor 10 is then easily installed by inserting the housing 18 of the new monitor 10 into the headrest 12.

As will be readily recognized by persons of ordinary skill in the art from the disclosure herein, one method of replacing a mobile entertainment system comprises providing a headrest 12 having a first monitor 10 mounted therein, the first monitor 10 comprising: a first housing 18 including a hinge portion 44, the first housing 18 having a first floor 76 defining one or more apertures 78 which cooperate with mounting hardware 79 to secure the first housing 18 to the headrest 12, the first housing 18 having a top wall 82, a bottom wall 84, and two side walls 86 which cooperate to define a first storage cavity 20; and a first screen structure 16 including a hinge portion 36, the hinge portions 44, 36 cooperating to pivotably secure the first screen structure 16 to the first housing 18. The method comprises rotating the first screen structure 16 outward from the first housing 18 to provide access to the first floor 76, removing the mounting hardware 79 from the first floor 76, and removing the first monitor 10 from the headrest 12. The method further comprises providing a second monitor 10 comprising: a second housing 18 including a hinge portion 44, the second housing 18 having a second floor 76 defining one or more apertures 78, the second housing 18 having a top wall 82, a bottom wall 84, and two side walls 86 which cooperate to define a second storage cavity 20; and a second screen structure 16 including a hinge portion 36, the hinge portions 44, 36 cooperating to pivotably secure the second screen structure 16 to the second housing 18. The method further comprises inserting the second monitor 10 into the headrest 12.

As shown in FIGS. 4, 5A and 5B, the monitor 10 preferably includes a bracket 106 that limits a range of pivot of the screen structure 16 relative to the housing 18. Advantageously, the bracket 106 facilitates securing the screen structure 16 in a desired viewing position. The bracket 106 also enhances the safety characteristics of the monitor 10, as explained below. However, those of skill in the art will appreciate that the monitor 10 need not include the bracket 106. Without the bracket 106, the screen structure 16 is pivotable approximately 90° relative to the housing 18. The screen structure 16 can thus be pivoted to the optimum viewing angle.

The shape of the bracket 106, illustrated in FIG. 6, preferably resembles a straight wire 108 with an attached pair of L-shaped wires 110. Of course, the bracket 106 may be produced by many different processes such that the straight wire 108 and L-shaped wires 110 comprise one piece, or separate pieces attached to one another.

All three wires 108, 110, 110 are coplanar, and both L-shaped wires 110 extend from the straight wire 108 in the same direction. The upright portion 112 of each L-shaped wire 110 is substantially perpendicular to the straight wire 108, and the base portion 114 of each L-shaped wire 110 is substantially parallel to the straight wire 108. Further, the base portions 114 of each L-shaped wire 110 extend toward each other, and include a small gap 116 between their ends. The upright portions 112 of the L-shaped wires 110 are attached to the straight wire 108 such that opposite end portions of the straight wire 108, comprising posts 118, extend beyond the attachment points of the L-shaped wires 110.

The base portions 114 of the L-shaped wires 110, which define a first end 124 of the bracket 106, are pivotably retained within a tube 120 (FIGS. 3A, 4 and 5A-5B) on the floor 76 of the cavity 20. The tube 120 defines a first pivot opening and a second pivot opening. The posts 118 of the straight wire 108, which define a second end 126 of the bracket 106, are slidably

retained within a channel 122 on the rear face 30 of the screen structure 16, as shown in FIGS. 2B, 5A and 5B. In the stowed position shown in FIG. 5A, the bracket 106 is substantially parallel to the rear face 30 of the screen structure 16. As the screen structure 16 pivots outward from the cavity 20, the base portions 114 of the L-shaped wires 110 pivot within the tube 120 and the posts 118 slide downward within the channel 122. As FIG. 5B illustrates, the posts 118 eventually reach a lower end of the channel 122, defining a maximum angle of the screen structure 16 relative to the housing 18.

Preferably, the hinges 36, 44 that pivotably connect the screen structure 16 to the housing 18 are self tensioning. Thus, the hinges 36, 44 retain the screen structure 16 in the position of FIG. 5B, and in any position in between the positions of FIG. 5A and FIG. 5B. A viewer can thus position the screen structure 16 anywhere between the limits of rotation to enjoy the optimum viewing angle. For example, the optimum viewing angle often depends upon the position of the sun. Glare from sunlight interferes with the viewer's ability to see images on the screen. Thus, the viewer can orient the screen structure 16 such that glare from sunlight is minimized. Furthermore, as the vehicle travels, its position and orientation with respect to the sun are continuously changing. At one moment, there may be little or no glare on the screen 46, and the next moment the vehicle may round a corner and suddenly there is a substantial glare on the screen 46. Because the present monitor 10 is positionable in a wide range of viewing angles, the monitor 10 enables the viewer to continuously adjust the angle of the screen structure 16 to avoid sun glare occasioned by variations in the vehicle's position and/or orientation with respect to the sun.

The present monitor 10 advantageously collapses toward the storage position (FIGS. 5A and 7A) when a force F is applied to the front surface 22 of the screen structure 16 as shown in FIGS. 5B and 7B. This feature is especially advantageous when a vehicle in which the monitor 10 is installed collides with another vehicle or brakes suddenly, for example. In these situations, a passenger seated behind the monitor 10 is often thrown forward, and may collide with the monitor 10. If the monitor 10 does not quickly collapse upon contact, the monitor 10 could injure the passenger.

As shown in FIG. 5B, the bracket 106 limits the rotation of the screen structure 16 relative to the housing 18. The length of the bracket 106 is fixed, and the first end 124 of the bracket 106 is constrained against translation. Therefore, a maximum angle that the screen structure 16 can be rotated from the stowed position of FIG. 5A coincides with a configuration wherein a longitudinal axis of the bracket 106 is perpendicular to the rear face 30 of the screen structure 16. In such a configuration, a force applied perpendicularly to the front face of the screen structure 16, such as the force F in FIG. 5B, would not have a component that acts on the bracket second end 126 in a direction parallel to the channel 122 and perpendicular to the bracket 106. Instead, the entire magnitude of the force would act in a direction parallel to the bracket 106, and would not cause the bracket second end 126 to slide upward within the channel 122, thus rotating the bracket 106 about its first end. In such a configuration, the bracket 106 would prevent the screen structure 16 from rotating back toward the storage configuration of FIG. 5A. The screen structure 16 would thus pose a danger to a passenger colliding with it, as in a crash or a sudden stop.

However, as explained above and illustrated in FIG. 5B, a lower end of the channel 122 in the rear face 30 of the screen structure 16 limits the travel of the bracket 106 within the channel 122 and prevents the bracket 106 from reaching the configuration wherein the bracket 106 is perpendicular to the

rear face 30 of the screen structure 16. As shown in FIG. 5B, the maximum angle α between the bracket 106 and the rear face 30 of the screen structure 16 is preferably about 80°, and more preferably about 75°. In this configuration, the force F applied perpendicularly to the front face 22 of the screen structure 16 has a component that acts parallel to the channel 122, and a component that acts perpendicularly to the bracket 106. These force components cause the bracket second end 126 to translate upward within the channel 122, causing the bracket 106 to rotate about its first end 124 as the screen structure 16 collapses toward the storage configuration of FIG. 5A. The bracket 106 thus diminishes the injury-causing potential of the monitor 10 by enabling the screen structure 16 to pivot safely out of the way when a passenger collides with it.

FIG. 8 illustrates another preferred embodiment of the screen structure 128. FIGS. 9-11 illustrate another preferred embodiment of the housing 130, which is adapted to receive the screen structure 128 of FIG. 8. FIGS. 12 and 13 illustrate the housing 130 and screen structure 128 secured within a headrest 12. The illustrated screen structure 128 and housing 130 do not include a bracket 106. Thus, as shown in FIG. 13, the screen structure 128 is pivotable 90° with respect to the housing. A viewer can thus adjust the viewing angle of the screen structure 128 to the optimum position. However, those of skill in the art will appreciate that the bracket 106 could be provided with the screen structure 128 and housing 130 in order to limit the pivotability of the screen structure 128 with respect to the housing 130.

The screen structure 128 is substantially similar to the screen structure 16 described above. The first hinge portion 132 of the screen structure 128 is mounted on, and pivotable about, a post imbedded in the screen structure 128. Because the post is a separate component from the rest of the screen structure 128, the post is very easily constructed of a different material than the screen structure 128. The screen structure 128 is preferably constructed of plastic to make it lightweight and less expensive to manufacture. However, the post, which is part of the hinged connection holding the screen structure 128 to the housing 130, is preferably made from a high strength material, such as a metal. Like the first hinge portion 36 on the screen structure 16 described above, both the first hinge portion 132 and the post are preferably constructed of a high-strength material, such as a metal.

The first hinge portion 132 (FIG. 8) of the screen structure 128 includes an aperture 134 near a center thereof, as measured along a long axis of the first hinge portion 132. The aperture 134 is adapted to receive a fastening member to secure the screen structure 128 to the housing 130, as described below.

The housing 130 is substantially similar to the housing 18 described above. However, the second hinge portion 136 of the housing 130 does not include the tab 88 in the second hinge portion 44 of the housing 18. A side wall portion 138 (FIG. 11) of the second hinge portion 136 includes a substantially U-shaped aperture 140 that is adapted to receive a fastening member. Those of skill in the art will appreciate that the aperture 140 in the side wall portion 138 could have any of a variety of shapes.

The first hinge portion 132 on the screen structure 128 is slidable within the slot 142 (FIG. 9) formed by the second hinge portion 136 on the housing 130. When assembling the monitor 10, the first hinge portion 132 is slid into the second hinge portion 136 until the aperture 134 on the first hinge portion 132 aligns with the aperture 140 on the second hinge portion 136. A fastening member 144 (FIGS. 12 and 13), such as a screw, is inserted through the aperture 140 in the side wall

11

portion **138** of the second hinge portion **136**, and through the aperture **134** in the first hinge portion **132**. The fastening member **144** thus secures the first and second hinge portions **132**, **136** to one another, which secures the screen structure **128** to the housing **130**. Advantageously, the slot **142** facilitates the proper positioning of the first hinge portion, particularly during the tightening of the fastening member **144**.

The sturdy construction of the hinged connection between the screen structure **128** and the housing **130** reduces the risk of the screen structure **128** becoming detached from the housing **130** during a collision. The post that is imbedded in the screen structure **128** is preferably metal. Thus, the connection between the post and the screen structure **128** is very strong. The first hinge portion **132** is also preferably metal. Thus, the connection between the first hinge portion **132** and the post is also very strong.

The fastening member is preferably a metal screw, and the second hinge portion **136** is preferably a strong plastic. The interconnection of each of these high-strength materials greatly reduces the likelihood of the hinged connection breaking. Even in a high speed vehicle collision, the screen structure **128** is likely to remain firmly connected to the housing **130**. By preventing the screen structure **128** from becoming detached during a crash, and subsequently drifting throughout the passenger compartment, the sturdy hinged connection of the monitor **10** decreases the likelihood of injury to the vehicle's passengers that might otherwise be caused by a flying screen structure **128**.

SCOPE OF THE INVENTION

The above presents a description of the best mode contemplated for the present headrest-mounted monitor, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains to make and use this headrest-mounted monitor. This headrest-mounted monitor is, however, susceptible to modifications and alternate constructions from that discussed above which are fully equivalent. Consequently, it is not the intention to limit this headrest-mounted monitor to

12

the particular embodiments disclosed. On the contrary, the intention is to cover all modifications and alternate constructions coming within the spirit and scope of the headrest-mounted monitor as generally expressed by the following claims, which particularly point out and distinctly claim the subject matter of the headrest-mounted monitor.

What is claimed is:

1. A method of securing a display to a headrest of a vehicle seat, comprising:

attaching the display having a back to a frame having a floor with at least one mounting hole in an upper half of the floor and at least one mounting hole in a lower half of the floor, and a top wall, a bottom wall, and two side walls which extend from the floor, the floor, top wall, bottom wall, and side walls cooperating to define a cavity, wherein the display is attached to the frame such that the display can be pivoted relative to the frame between a first orientation that permits access to the at least one mounting hole in the upper half of the floor and to the at least one mounting hole in the lower half of the floor of the frame, and a second orientation that is suitable for viewing a front face of the display and inhibits access to the at least one mounting hole in the upper half of the floor and to the at least one mounting hole in the lower half of the floor, wherein the display in the second orientation is closer to the at least one mounting hole in the upper half of the floor and to the at least one mounting hole in the lower half of the floor than the display is in the first orientation;

securing the frame to the headrest by passing at least one mounting fastener through the at least one mounting hole in the floor of the frame from within the cavity, the frame being secured to the headrest such that the front face of the display is substantially flush with a back surface of the headrest when the display is in the second orientation; and

passing an electrical communication cable, which extends from the back of the display, through the floor of the frame.

* * * * *