


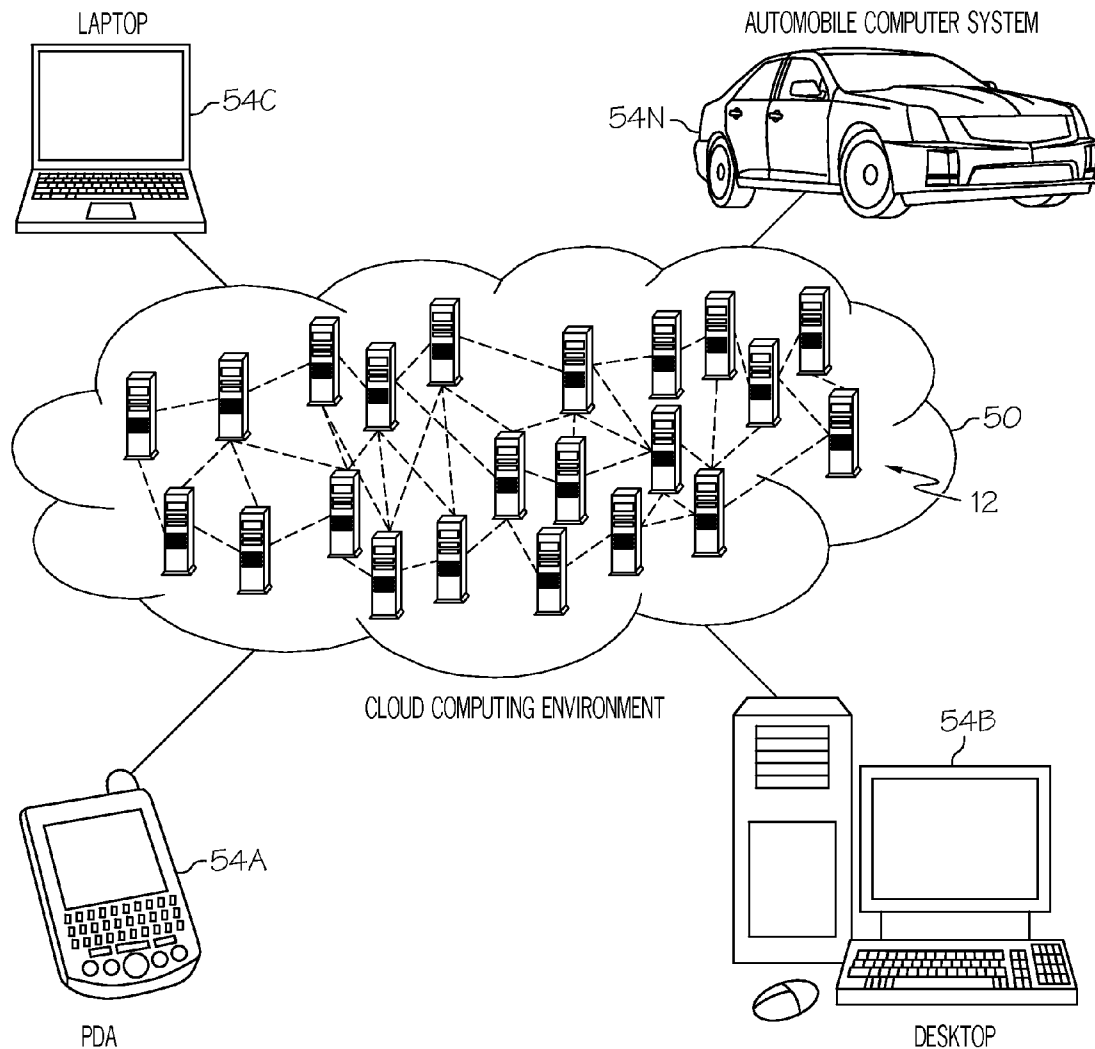

US 20110138034A1

(19) **United States**(12) **Patent Application Publication**
Brookbanks et al.(10) **Pub. No.: US 2011/0138034 A1**(43) **Pub. Date: Jun. 9, 2011**(54) **METERING RESOURCE USAGE IN A CLOUD
COMPUTING ENVIRONMENT****Publication Classification**(51) **Int. Cl.**
G06F 15/173 (2006.01)(52) **U.S. Cl.** **709/224; 709/238**(57) **ABSTRACT**

An approach that provides assigning and tracking inter-Cloud operational transactions within a Cloud computing environment in order to meter Cloud resource usage when processing a Cloud service request. In one embodiment, there is a Cloud usage and accounting tool, including a route management component configured to define and manage the physical implementation of delineation points between Clouds. The Cloud usage and accounting tool further includes a workflow control component configured to track inter-Cloud operational transactions as they pass through the delineation points.

(75) **Inventors:** **Michael D. Brookbanks,**
Nyetimber (GB); **Brendan F.**
Coffey, Rhinebeck, NY (US);
Christopher J. Dawson, Arlington,
VA (US); **Thirumal Nellutla,**
Schaumburg, IL (US); **Robert C.**
Patterson, JR., Sewickley, PA (US)(73) **Assignee:** **International Business Machines**
Corporation, Armonk, NY (US)(21) **Appl. No.:** **12/630,238**(22) **Filed:** **Dec. 3, 2009**

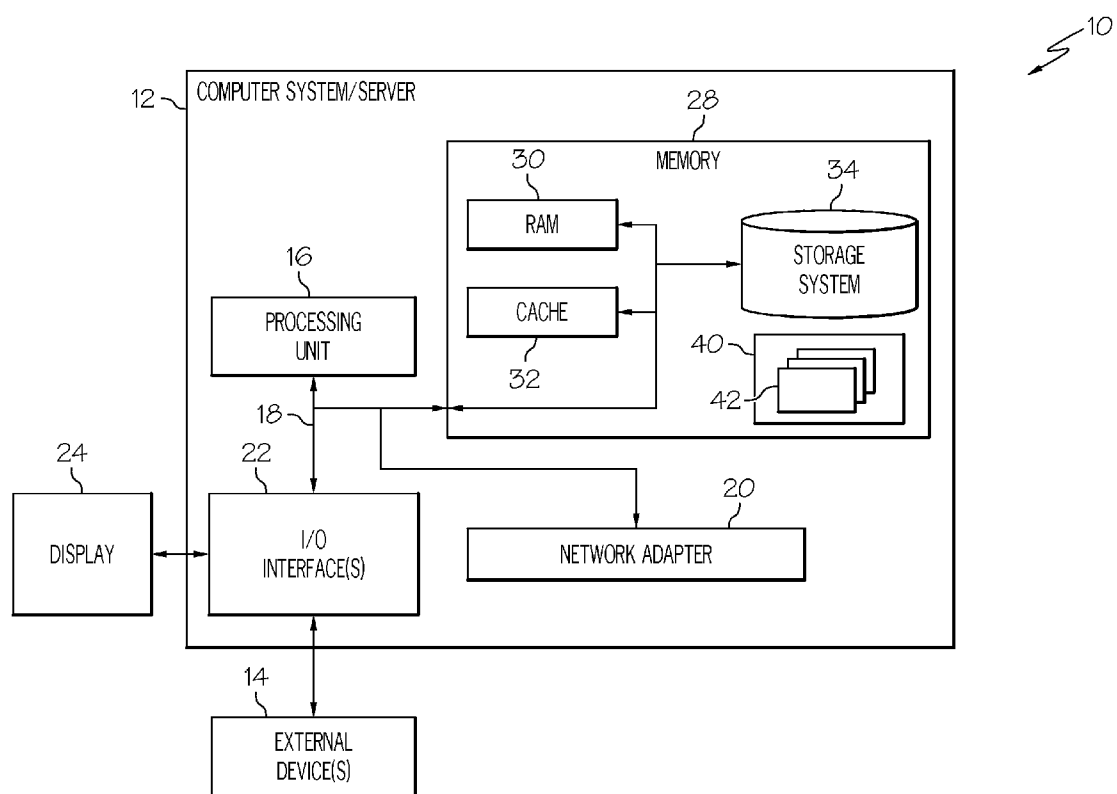


FIG. 1

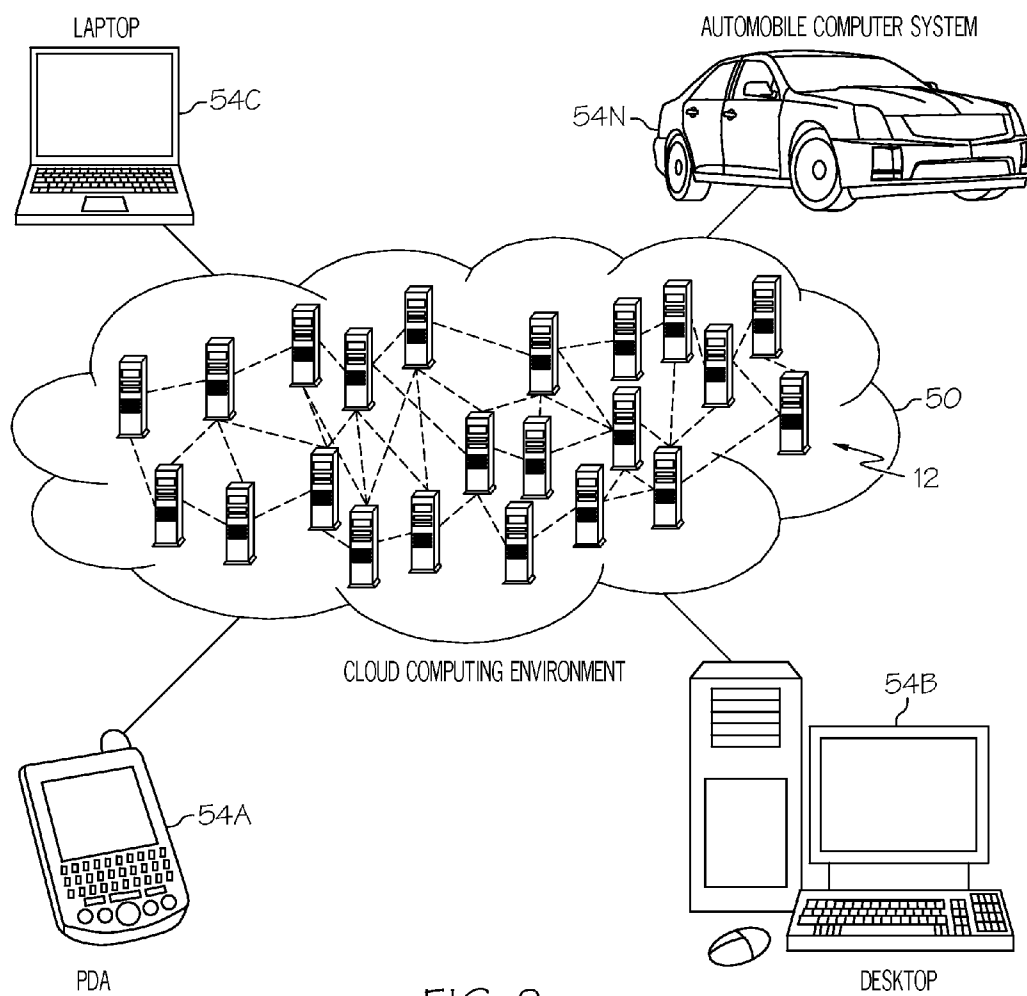


FIG. 2

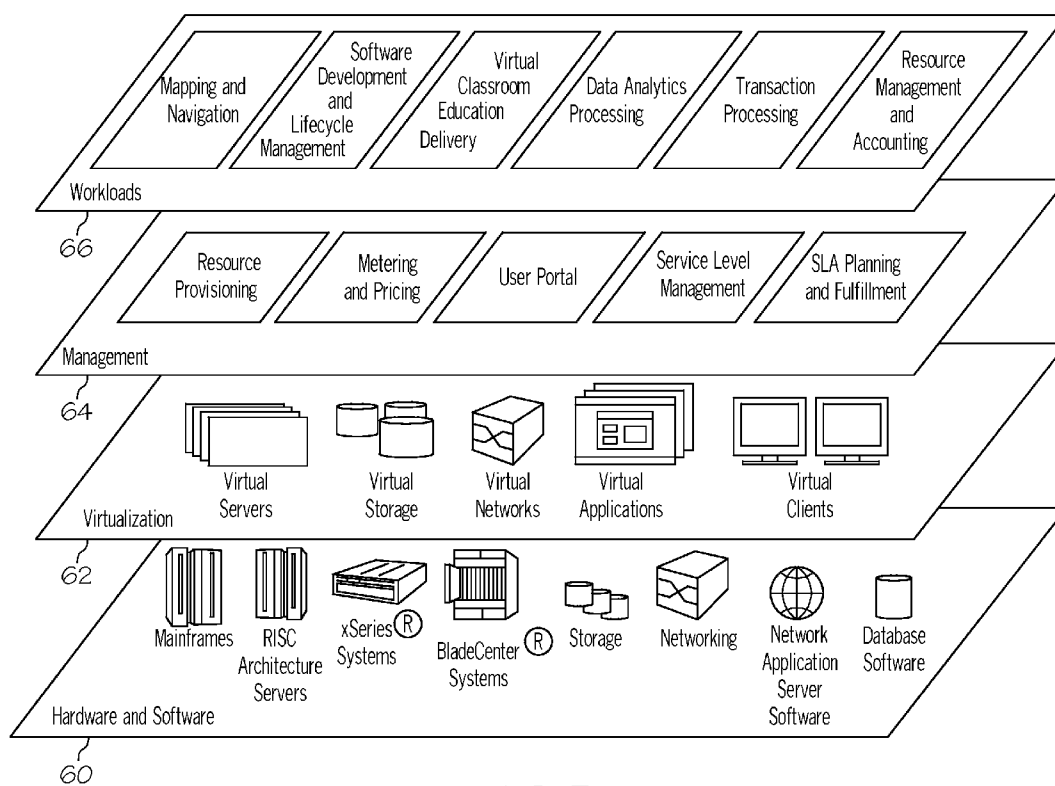
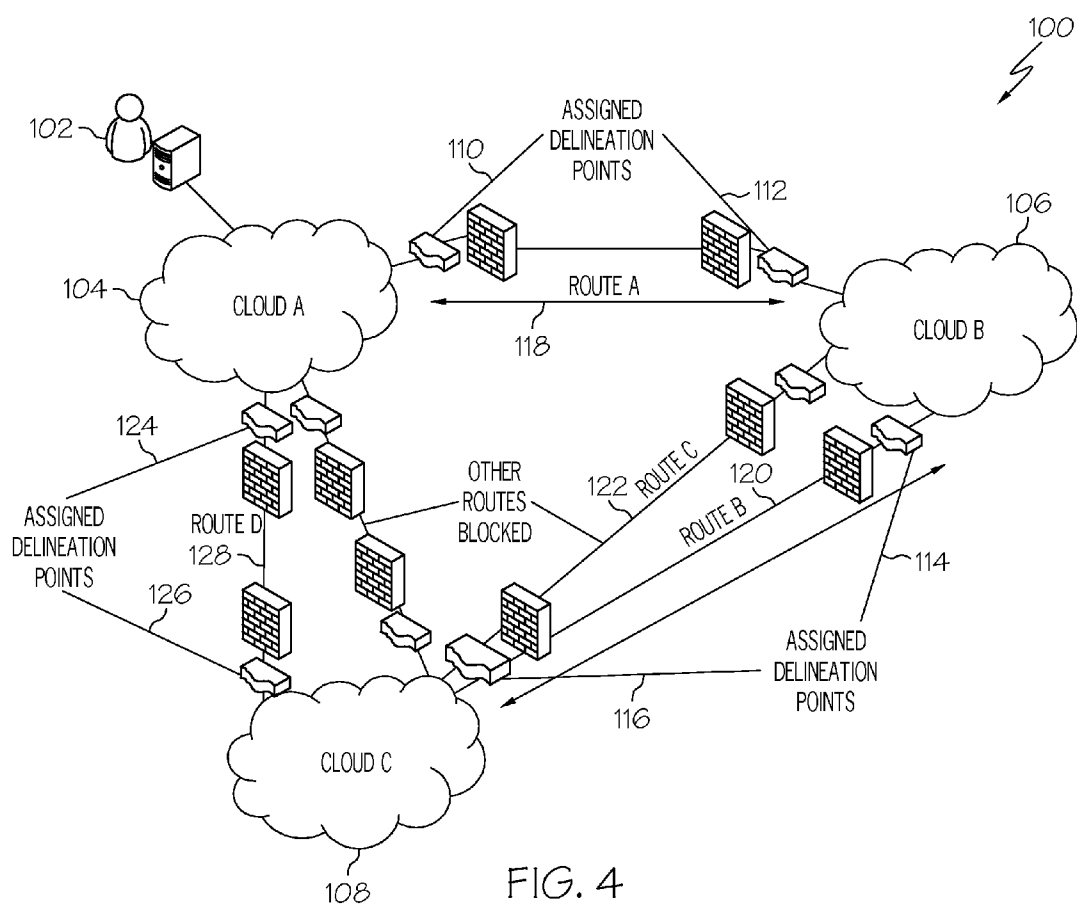


FIG. 3



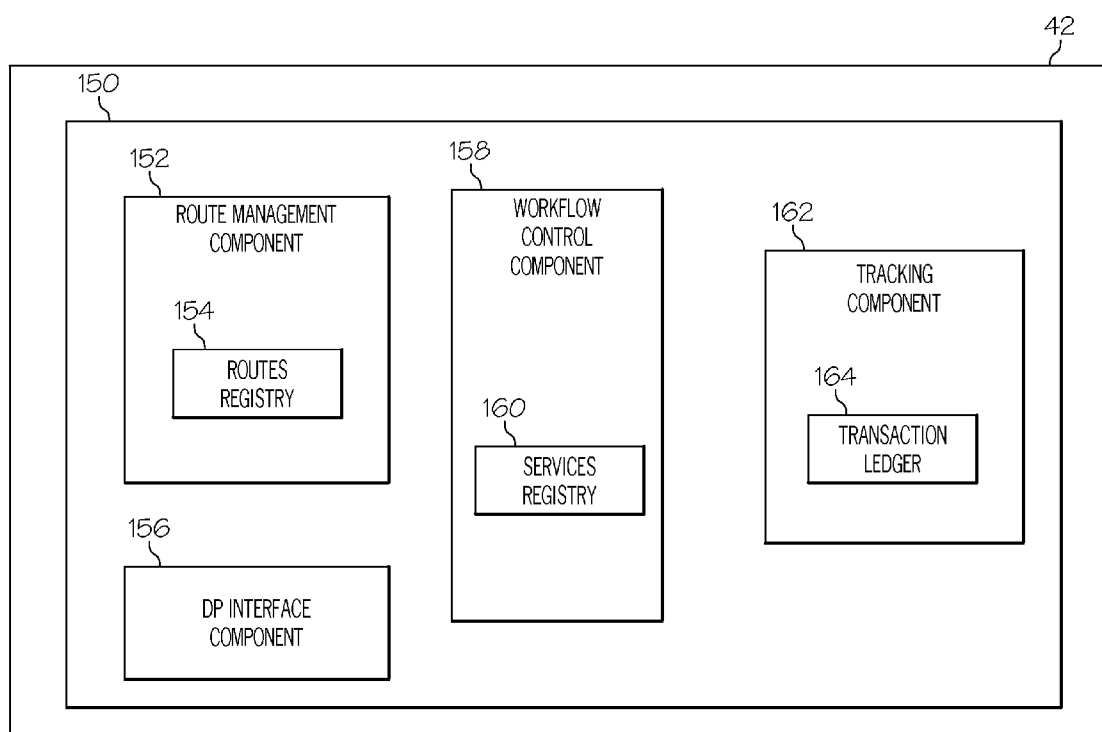


FIG. 5

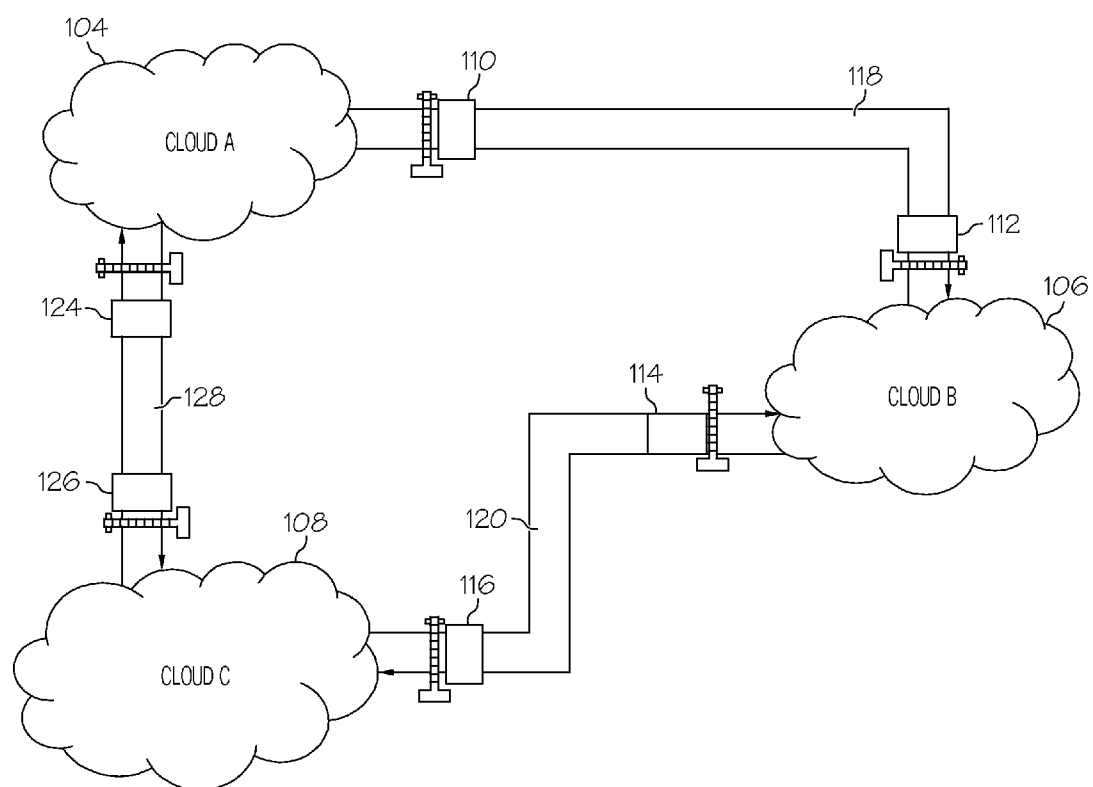


FIG. 6

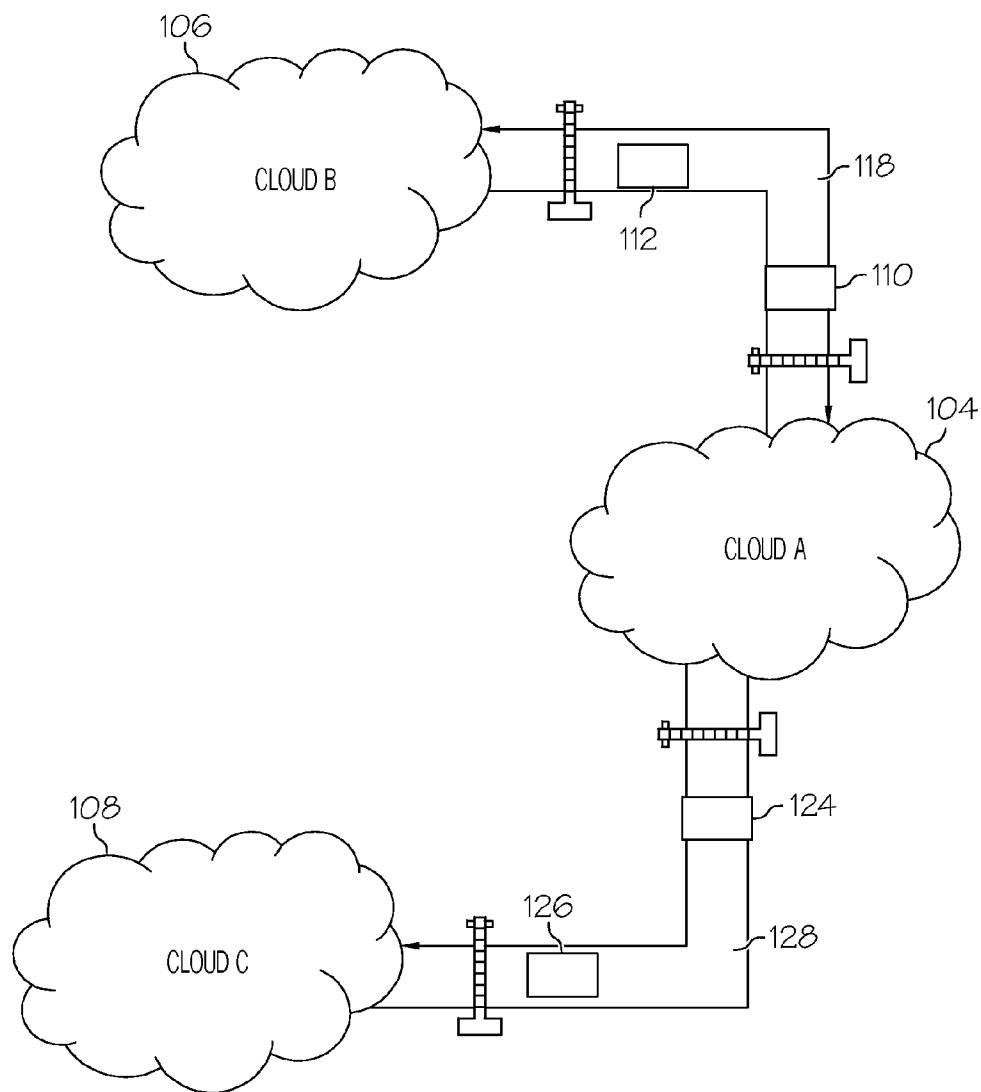


FIG. 7

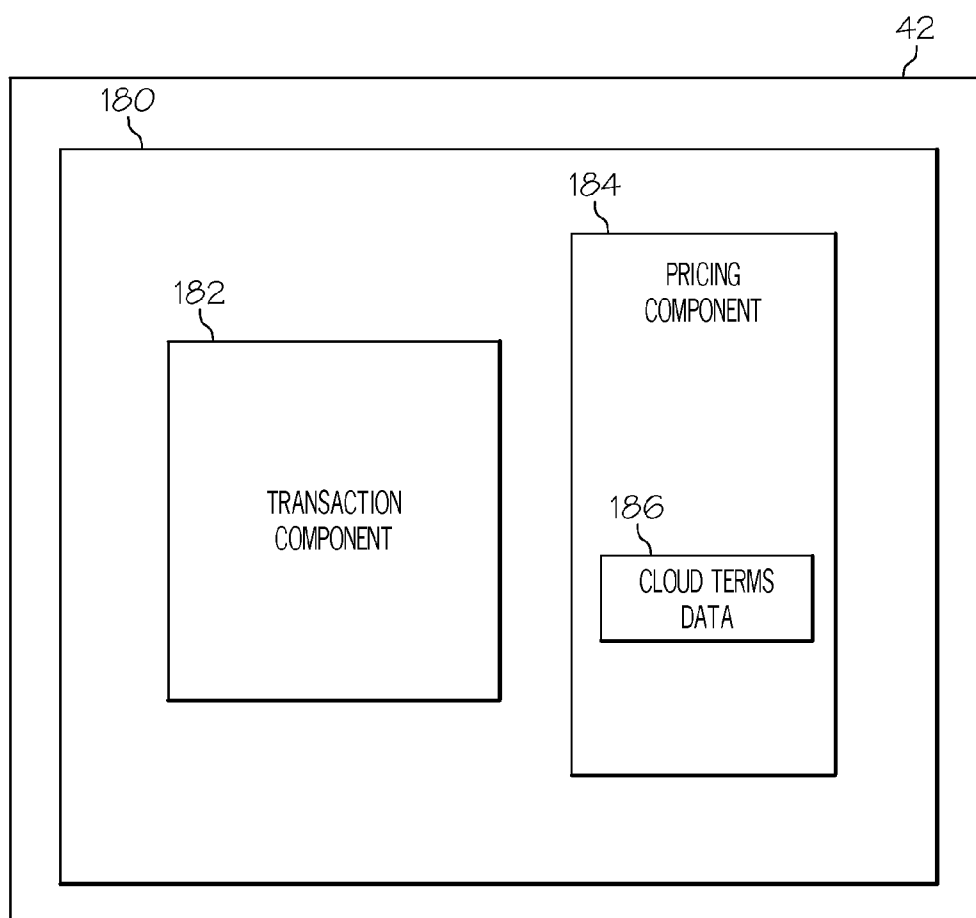


FIG. 8

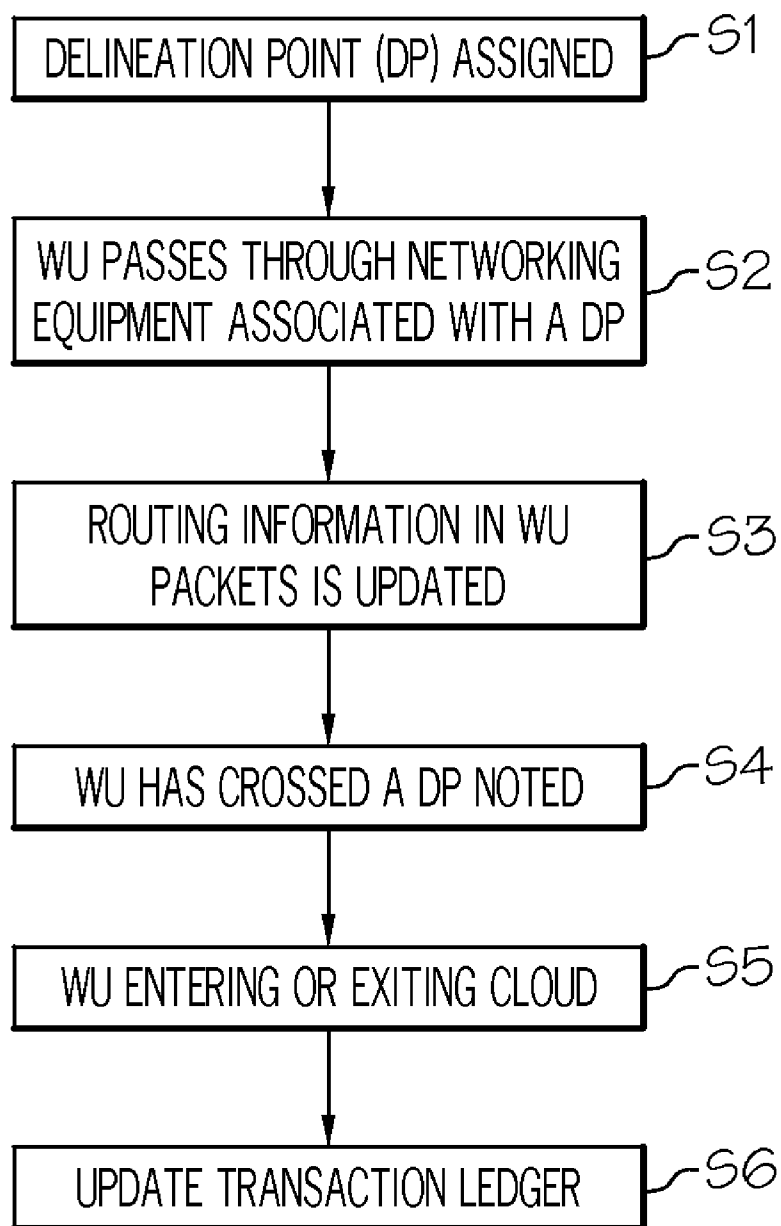


FIG. 9

METERING RESOURCE USAGE IN A CLOUD COMPUTING ENVIRONMENT

FIELD OF THE INVENTION

[0001] This invention relates generally to Cloud computing environments and more specifically to the use of Cloud delineation points to meter Cloud resource usage within a Cloud computing environment when processing a Cloud service request.

BACKGROUND OF THE INVENTION

[0002] Cloud computing is a computing technology that uses the Internet and central remote servers to maintain data and applications. A Cloud provider may employ multiple Clouds when providing a set of services to a customer. There are scenarios where it is necessary for multiple Clouds to inter-operate to provide an overall composite service to a customer. In these instances, it is imperative that a Cloud provider knows exactly what units of work are within its Cloud (and therefore responsibility), what units have been transferred to other Clouds (and when), and what units were transferred into its Cloud (and when).

[0003] Currently, prior art Cloud computing environments provide no known solution for tracking the exchange of information between distinct computing Clouds. As is known in the art, this type of inter-Cloud activity may be necessary when providing a service for the customer. In order to bill the customer accurately, the Cloud provider is required to accurately track and manage usage for inter-Cloud services.

SUMMARY OF THE INVENTION

[0004] This disclosure describes a system and method for assigning and tracking inter-Cloud operational transactions in order to meter Cloud usage in a Cloud computing environment when processing a Cloud service request. Using this system, the Cloud service provider will be able to accurately track and manage usage for inter-Cloud services when employing multiple clouds in processing a Cloud service request.

[0005] A first aspect of the present invention provides a method for metering resource usage in a Cloud computing environment, comprising: defining the physical implementation of delineation points on each of the plurality of Clouds in the environment; tracking each of a plurality of inter-Cloud operational transactions as each transaction passes through a delineation point entering a Cloud; tracking each of the plurality of inter-Cloud operational transactions as each transaction passes through a delineation point exiting a Cloud; maintaining a transaction ledger in each of the plurality of Clouds; calculating an amount of time each of the plurality of operational transactions was within each of the plurality of Clouds; and storing the amount of time in the respective transaction ledger.

[0006] A second aspect of the present invention provides a Cloud usage and accounting tool for metering resource usage within a Cloud computing, comprising: a memory medium comprising instructions; a bus coupled to the memory medium; and a processor coupled to the bus that when executing the instructions causes the Cloud usage and accounting tool to: define the physical implementation of delineation points on a Cloud in the environment; track each of a plurality of inter-Cloud operational transactions as each transaction passes through a delineation point entering the Cloud; track

each of the plurality of inter-Cloud operational transactions as each transaction passes through a delineation point exiting the Cloud; maintain a transaction ledger; calculate amount of time each of the plurality of operational transactions was within the Clouds; and store the amount of time in the transaction ledger.

[0007] A third aspect of the present invention provides a computer-readable medium storing computer instructions which, when executed, enables a computer system to provide metering resource usage within a Cloud computing environment, the computer readable medium comprising program code for causing a computer system to: define the physical implementation of delineation points on a Cloud in the environment; track each of a plurality of inter-Cloud operational transactions as each transaction passes through a delineation point entering the Cloud; track each of the plurality of inter-Cloud operational transactions as each transaction passes through a delineation point exiting the Cloud; maintain a transaction ledger; calculate amount of time each of the plurality of operational transactions was within the Clouds; and store the amount of time in the transaction ledger.

[0008] A fourth aspect of the present invention provides a method for deploying a system for metering resource usage in a Cloud computing environment, comprising: defining the physical implementation of delineation points on a Cloud in the environment; tracking each of a plurality of inter-Cloud operational transactions as each transaction passes through a delineation point entering the Cloud; tracking each of the plurality of inter-Cloud operational transactions as each transaction passes through a delineation point exiting the Cloud; maintain a transaction ledger; calculating an amount of time each of the plurality of operational transactions was within the Clouds; and storing the amount of time in the transaction ledger.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] These and other features of this invention will be more readily understood from the following detailed description of the various aspects of the invention taken in conjunction with the accompanying drawings in which:

[0010] FIG. 1 shows a Cloud system node according to the present invention;

[0011] FIG. 2 shows a Cloud computing environment according to the present invention;

[0012] FIG. 3 shows Cloud abstraction model layers according to the present invention;

[0013] FIG. 4 shows an illustrative example of a Cloud computing environment according to one embodiment of this invention;

[0014] FIG. 5 shows an illustrative example of a Cloud usage and accounting tool according to one embodiment of this invention;

[0015] FIG. 6 shows an illustrative example of the bus control method;

[0016] FIG. 7 shows an illustrative example of the hub/spoke control method;

[0017] FIG. 8 shows an illustrative example of a billing tool according to one embodiment of this invention; and

[0018] FIG. 9 shows a flow diagram of a method according to the present invention;

[0019] The drawings are not necessarily to scale. The drawings are merely schematic representations, not intended to portray specific parameters of the invention. The drawings are intended to depict only typical embodiments of the invention,

and therefore should not be considered as limiting the scope of the invention. In the drawings, like numbering represents like elements.

DETAILED DESCRIPTION OF THE INVENTION

[0020] For convenience, the Detailed Description of the Invention has the following sections:

[0021] I. Cloud Computing Definitions

[0022] II. Implementation of the Present Invention

I. Cloud Computing Definitions

[0023] These definitions have been derived from the “Draft NIST Working Definition of Cloud Computing” by Peter Mell and Tim Grance, dated Oct. 7, 2009, which is cited on an IDS filed herewith, and a copy of which is attached thereto.

[0024] “Cloud computing” is a model for enabling convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction. This Cloud model promotes availability and is comprised of at least five characteristics, three service models, and four deployment models. Characteristics are as follows:

[0025] On-demand self-service: A consumer can unilaterally provision computing capabilities, such as server time and network storage, as needed automatically without requiring human interaction with each service’s provider.

[0026] Broad network access: Capabilities are available over the network and accessed through standard mechanisms that promote use by heterogeneous thin or thick client platforms (e.g., mobile phones, laptops, and PDAs).

[0027] Resource pooling: The provider’s computing resources are pooled to serve multiple consumers using a multi-tenant model, with different physical and virtual resources dynamically assigned and reassigned according to consumer demand. There is a sense of location independence in that the customer generally has no control or knowledge over the exact location of the provided resources but may be able to specify location at a higher level of abstraction (e.g., country, state, or datacenter). Examples of resources include storage, processing, memory, network bandwidth, and virtual machines.

[0028] Rapid elasticity: Capabilities can be rapidly and elastically provisioned, in some cases automatically, to quickly scale out and rapidly released to quickly scale in. To the consumer, the capabilities available for provisioning often appear to be unlimited and can be purchased in any quantity at any time.

[0029] Measured Service: Cloud systems automatically control and optimize resource use by leveraging a metering capability at some level of abstraction appropriate to the type of service (e.g., storage, processing, bandwidth, and active user accounts). Resource usage can be monitored, controlled, and reported providing transparency for both the provider and consumer of the utilized service.

[0030] Service Models are as follows:

[0031] Cloud Software as a Service (SaaS): The capability provided to the consumer is to use the provider’s applications running on a Cloud infrastructure. The applications are accessible from various client devices through a thin client interface such as a web browser (e.g., web-based email). The consumer does not manage or control the underlying Cloud

infrastructure including network, servers, operating systems, storage, or even individual application capabilities, with the possible exception of limited user-specific application configuration settings.

[0032] Cloud Platform as a Service (PaaS): The capability provided to the consumer is to deploy onto the Cloud infrastructure consumer-created or acquired applications created using programming languages and tools supported by the provider. The consumer does not manage or control the underlying Cloud infrastructure including network, servers, operating systems, or storage, but has control over the deployed applications and possibly application hosting environment configurations.

[0033] Cloud Infrastructure as a Service (IaaS): The capability provided to the consumer is to provision processing, storage, networks, and other fundamental computing resources where the consumer is able to deploy and run arbitrary software, which can include operating systems and applications. The consumer does not manage or control the underlying Cloud infrastructure but has control over operating systems, storage, deployed applications, and possibly limited control of select networking components (e.g., host firewalls).

[0034] Deployment Models are as follows:

[0035] Private Cloud: The Cloud infrastructure is operated solely for an organization. It may be managed by the organization or a third party and may exist on premise or off premise.

[0036] Community Cloud: The Cloud infrastructure is shared by several organizations and supports a specific community that has shared concerns (e.g., mission, security requirements, policy, and compliance considerations). It may be managed by the organizations or a third party and may exist on premise or off premise.

[0037] Public Cloud: The Cloud infrastructure is made available to the general public or a large industry group and is owned by an organization selling Cloud services.

[0038] Hybrid Cloud: The Cloud infrastructure is a composition of two or more Clouds (private, community, or public) that remain unique entities but are bound together by standardized or proprietary technology that enables data and application portability (e.g., Cloud bursting for load-balancing between Clouds).

[0039] Cloud software takes full advantage of the Cloud paradigm by being service oriented with a focus on statelessness, low coupling, modularity, and semantic interoperability.

II. Implementation of the Present Invention

[0040] Embodiments of this invention are directed to assigning and tracking inter-Cloud operational transactions within a Cloud computing environment, such that the Cloud provider can accurately track and manage usage for cross-Cloud services. In these embodiments, a Cloud usage and accounting tool provides the capability to meter Cloud usage within a Cloud computing environment when processing a Cloud service request.

[0041] Specifically, the Cloud usage and accounting tool defines and manages the physical implementation of delineation points (DP’s) at the infrastructure level along available routes between computing Clouds. At the packet level, operational transactions pass these points as data makes its way into a Cloud to be processed. Use of delineation points at the infrastructure level allows for tracking transactions as they

pass through the interface points. This information is then used as input to any processes that need to know exactly how long a unit of work was in the Cloud, such as metering and billing applications.

[0042] Referring now to FIG. 1, a schematic of an exemplary cloud computing node is shown. Cloud computing node **10** is only one example of a suitable cloud computing node and is not intended to suggest any limitation as to the scope of use or functionality of the invention described herein. Regardless, cloud computing node **10** is capable of being implemented and/or performing any of the functions set forth in section I above.

[0043] In Cloud computing node **10** there is a computer system/server **12**, which is operational with numerous other general purpose or special purpose computing system environments or configurations. Examples of well-known computing systems, environments, and/or configurations that may be suitable for use with computer system/server **12** include, but are not limited to, personal computer systems, server computer systems, thin clients, thick clients, hand-held or laptop devices, multiprocessor systems, microprocessor-based systems, set top boxes, programmable consumer electronics, network PCs, minicomputer systems, mainframe computer systems, and distributed Cloud computing environments that include any of the above systems or devices, and the like.

[0044] Computer system/server **12** may be described in the general context of computer system-executable instructions, such as program modules, being executed by a computer system. Generally, program modules include routines, programs, objects, components, logic, data structures, and so on that perform particular tasks or implement particular abstract data types. The exemplary computer system/server **12** may be practiced in distributed Cloud computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed Cloud computing environment, program modules may be located in both local and remote computer system storage media including memory storage devices.

[0045] As shown in FIG. 1, computer system/server **12** in Cloud computing node **10** is shown in the form of a general-purpose computing device. The components of computer system/server **12** may include, but are not limited to, one or more processors or processing units **16**, a system memory **28**, and a bus **18** that couples various system components including system memory **28** to processor **16**.

[0046] Bus **18** represents one or more of any of several types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. By way of example, and not limitation, such architectures include Industry Standard Architecture (ISA) bus, Micro Channel Architecture (MCA) bus, Enhanced ISA (EISA) bus, Video Electronics Standards Association (VESA) local bus, and Peripheral Component Interconnects (PCI) bus.

[0047] Computer system/server **12** typically includes a variety of computer system readable media. Such media may be any available media that is accessible by computer system/server **12**, and it includes both volatile and non-volatile media, removable and non-removable media.

[0048] System memory **28** can include computer system readable media in the form of volatile memory, such as random access memory (RAM) **30** and/or cache memory **32**.

Computer system/server **12** may further include other removable/non-removable, volatile/non-volatile computer system storage media. By way of example only, a storage system **34** can be provided for reading from and writing to a non-removable, non-volatile magnetic media (not shown and typically called a "hard drive"). Although not shown a magnetic disk drive for reading from and writing to a removable, non-volatile magnetic disk (e.g., a "floppy disk"), and an optical disk drive for reading from or writing to a removable, non-volatile optical disk such as a CD-ROM, DVD-ROM or other optical media can be provided. In such instances, each can be connected to bus **18** by one or more data media interfaces. As will be further depicted and described below, memory **28** may include at least one program product having a set (e.g., at least one) of program modules that are configured to carry out the functions of the invention.

[0049] Program/utility **40** having a set (at least one) of program modules **42** may be stored in memory **28** by way of example, and not limitation, as well as an operating system, one or more application programs, other program modules, and program data. Each of the operating system, one or more application programs, other program modules, and program data or some combination thereof, may include an implementation of a networking environment. Program modules **42** generally carry out the functions and/or methodologies of the invention as described herein.

[0050] Computer system/server **12** may also communicate with one or more external devices **14** such as a keyboard, a pointing device, a display **24**, etc.; one or more devices that enable a user to interact with computer system/server **12**; and/or any devices (e.g., network card, modem, etc.) that enable computer system/server **12** to communicate with one or more other computing devices. Such communication can occur via I/O interfaces **22**. Still yet, computer system/server **12** can communicate with one or more networks such as a local area network (LAN), a general wide area network (WAN), and/or a public network (e.g., the Internet) via network adapter **20**. As depicted, network adapter **20** communicates with the other components of computer system/server **12** via bus **18**. It should be understood that although not shown, other hardware and/or software components could be used in conjunction with computer system/server **12**. Examples, include, but are not limited to: microcode, device drivers, redundant processing units, external disk drive arrays, RAID systems, tape drives, and data archival storage systems, etc.

[0051] Referring now to FIG. 2, illustrative Cloud computing environment **50** is depicted. As shown, Cloud computing environment **50** comprises one or more Cloud computing nodes **10** with which computing devices such as, for example, personal digital assistant (PDA) or cellular telephone **54A**, desktop computer **54B**, laptop computer **54C**, and/or automobile computer system **54N** communicate. This allows for infrastructure, platforms and/or software to be offered as services (as described above in Section I) from Cloud computing environment **50** so as to not require each client to separately maintain such resources. It is understood that the types of computing devices **54A-N** shown in FIG. 2 are intended to be illustrative only and that Cloud computing environment **50** can communicate with any type of computerized device over any type of network and/or network/addressable connection (e.g., using a web browser).

[0052] Referring now to FIG. 3, a set of functional abstraction layers provided by Cloud computing environment **50**

(FIG. 2) is shown. It should be understood in advance that the components, layers, and functions shown in FIG. 3 are intended to be illustrative only and the invention is not limited thereto. As depicted, the following layers and corresponding functions are provided:

[0053] Hardware and software layer **60** includes hardware and software components. Examples of hardware components include mainframes, in one example IBM® zSeries® systems; RISC (Reduced Instruction Set Computer) architecture based servers, in one example IBM pSeries® systems; IBM xSeries® systems; IBM BladeCenter® systems; storage devices; networks and networking components. Examples of software components include network application server software, in one example IBM WebSphere® application server software; and database software, in one example IBM DB2® database software. (IBM, zSeries, pSeries, xSeries, BladeCenter, WebSphere, and DB2 are trademarks of International Business Machines Corporation in the United States, other countries, or both.)

[0054] Virtualization layer **62** provides an abstraction layer from which the following exemplary virtual entities may be provided: virtual servers; virtual storage; virtual networks, including virtual private networks; virtual applications; and virtual clients.

[0055] Management layer **64** provides the exemplary functions described below. Resource provisioning provides dynamic procurement of computing resources and other resources that are utilized to perform tasks within the Cloud computing environment. Metering and Pricing provide cost tracking as resources are utilized within the Cloud computing environment, and billing or invoicing for consumption of these resources. In one example, these resources may comprise application software licenses. Security provides identity verification for users and tasks, as well as protection for data and other resources. User portal provides access to the Cloud computing environment for both users and system administrators. Service level management provides Cloud computing resource allocation and management such that required service levels are met. Service Level Agreement (SLA) planning and fulfillment provides pre-arrangement for, and procurement of, Cloud computing resources for which a future requirement is anticipated in accordance with an SLA.

[0056] Workloads layer **66** provides functionality for which the Cloud computing environment is utilized. Examples of workloads and functions which may be provided from this layer include: mapping and navigation; software development and lifecycle management; virtual classroom education delivery; data analytics processing; transaction processing; and Cloud usage and accounting.

[0057] FIG. 4 shows a detailed view of an exemplary Cloud computing node **10** according to one embodiment of this invention in which inter-Cloud transactions are assigned and tracked. A customer has a relationship with a Cloud provider. When a customer makes a service request to the Cloud provider, the Cloud provider may need to utilize multiple Clouds when providing the service to the customer. The customer only recognizes and expects to deal with the primary provider, but in the background other Clouds are utilized. The Cloud provider is required to accurately track and manage customer's usage for the cross-Cloud services. When managing a service that spans multiple Clouds, close attention to which Clouds are running what (and at what time) need to be understood.

[0058] An exemplary Cloud computing environment **100** is shown in FIG. 4. In this environment, each Cloud is a system unto itself. The infrastructure discussed below applies to each Cloud in the environment. Prior to receiving any service requests, logical interface points on each Cloud's physical network infrastructure are identified as allowable points of entry/exit for the Cloud to accurately track the inter-Cloud transactions required when fulfilling a service request. These entry/exit, or delineation, points may be in the form of a 'network' type barrier, such as a firewall or other logging computer that manages the points.

[0059] After the infrastructure is in place for each Cloud, customer makes a service request from Cloud A **104**. From the customer's point of view, the completed service comes from only Cloud A **104**. In reality, Cloud A **104** determines it needs services from Cloud B **106** in order to accommodate customer's request. Additionally, while in Cloud B **106**, Cloud B **106** determines it needs to interact with Cloud C **108**. Utilizing the delineation points defined for each Cloud, the processing flow is controlled and tracked, as discussed in more detail below.

[0060] FIG. 4 depicts Clouds, delineation points, and routes between Clouds in an exemplary Cloud computing environment. The number of Clouds, delineation points, and routes shown in FIG. 4 are only for illustration purposes and those skilled in the art will recognize that there may be more or fewer Clouds, delineation points, and/or routes defined in a typical Cloud computing environment.

[0061] FIG. 5 shows a more detailed view of usage and accounting mechanism of Workloads layer **66** shown in FIG. 3 needed to control and track the processing flow. Cloud usage and accounting tool **150** comprises a route management component **152** configured to manage routing of traffic into and out of the Cloud in order to accurately account for processing flows. To accomplish this, route management component **152** defines and manages the allowable delineation points of the Cloud. Once the delineation points are assigned, route management component **152** is further configured to block all other available routes to ensure that all traffic passes through a delineation point as it enters and exits the Cloud.

[0062] Information relating to location of delineation points, as well as available and blocked routes is stored in routes registry **154**. Given the dynamic nature of Cloud infrastructures, it is possible that the physical or logical components that support a DP can change autonomically. Therefore, route management component **152** is further configured to monitor the state of each DP to ensure the accuracy of routes registry **154**.

[0063] Referring back to FIG. 4, DP **110** is defined for Cloud A **104**. DP's **112**, **114** are defined for Cloud B **106**. DP **116** is defined for Cloud C **108**. Route A **118** is the only route between Cloud A **104** and Cloud B **106**. Route B **120** is the available route between the Cloud B **106** and Cloud C **108**. Route C **122** is blocked. Data relating to a Cloud's delineation points and routes is stored in the Cloud's routes registry **154**.

[0064] Customer **102** initiates a service request from Cloud A **104**. Cloud A determines that there is a need to utilize the services of Cloud B **106** and a network transfer of a work unit (WU), or operational transaction, along route A **118** is utilized. As used herein, a WU is defined as the routing data and other data necessary for the target Cloud to perform the needed service(s). Additionally, WU is tagged with customer

number, service request number and work unit number. Units of work are transferred in one or more data packets along network routes.

[0065] Cloud usage and accounting tool **150** further comprises DP interface component **156** configured to allow a delineation point to receive WU packets. DP interface component **156** of Cloud B **106** is configured to perform a handshake to receive the WU packets from Cloud A **104**. In one embodiment, DP interface component **156** is further configured to acknowledge receipt of WU packets to sending Cloud. DP interface component **156** of Cloud B **106** updates the routing data of the WU packets with the time WU packets were received by Cloud B **106**.

[0066] Workflow control component **158** is a control mechanism configured to ‘handover’ control between DP’s and their associated Clouds. Also, workflow control component **158** controls the processing workflow. In one embodiment, the delineation point operates ‘internally’ with each workflow control component **158** communicating and detailing the Cloud services that are provided. Based on the resources needed, workflow control component **158** reads services registry **160** to determine where to route the workflow. In this embodiment, services registry **160** must be maintained on each Cloud. Services registry **160** contains information relating to the availability and resource data of each Cloud residing in the Cloud computing environment.

[0067] In another embodiment, the originating Cloud controls workflow using expanded token passing algorithms. In this embodiment, once a Cloud has completes or exhausts its own Cloud resource, the token passes (i.e., control) to the next Cloud. Each token contains routing information and details of which Clouds have been used to provide the service. Using the token passing method, work unit packets are passed along with the token. Two different token passing algorithms can be used, as discussed below.

[0068] In FIG. 6, the token is passed between Clouds using a bus control method. As each Cloud passes the token, the receiving Cloud takes control and completes the necessary work then hands over control to the next Cloud, and so on until the service request is completed. In the example of FIG. 6, Cloud A **104** determines it needs services from Cloud B **106** and Cloud C **108**. Using the bus control method, DP **110** of Cloud A passes control to DP **112** of Cloud B **106** through change in token. DP **112** assumes control and acknowledges receipt of token to DP **110**. Cloud B **106** completes required work. DP **114** of Cloud B **106** passes control to DP **116** of Cloud C **108** through change in token. DP **108** assumes control and acknowledges receipt of token to DP **114**. Cloud C **108** completes required work. DP **126** of Cloud C **108** passes control to DP **124** of Cloud A **104** through change in token. Route D **128** is a blocked route. DP **124** assumes control and acknowledges receipt of token to DP **126**. Cloud A **104** completes required work thereby fulfilling customer’s service request.

[0069] In FIG. 7, tokens are passed between Clouds using a hub/spoke method with the originating Cloud acting as the hub. As each Cloud passes the token, the receiving Cloud (spoke) takes control and completes the necessary work then hands over control back to the originating Cloud (hub). This continues until the service request is completed. In the example of FIG. 7, Cloud A **104** determines it needs services from Cloud B **106** and Cloud C **108**. Using the hub/spoke control method, DP **110** of Cloud A passes control to DP **112** of Cloud B **106** through change in token. Cloud B **106** com-

pletes required work. DP **112** of Cloud B **106** passes control back to DP **110** of Cloud A **104** through change in token. DP **124** of Cloud A passes control to DP **126** of Cloud C **108** through change in token. Cloud C completes required work. DP **126** of Cloud C passes control back to DP **124** of Cloud A **104**. Cloud A **104** completes required work thereby fulfilling customer’s service request.

[0070] In each method, each token consists of more than ownership details. The token may also contain ‘higher level’ control details such as service level response time. Typical token passing algorithms could be used using typical transport or session layer attributes to control the environment.

[0071] Once the work unit packets are in the Cloud, the Cloud is able to complete the needed services or determine it requires resources from another Cloud. After completing this work, workflow control component **158** then controls the handover from the Cloud to the DP. DP interface point receives the work unit packets, updates the routing data in the packets, and transfers the packets along an available route.

[0072] As WU packets exit the Cloud, tracking component **162** is configured to update Cloud transaction ledger **164**. Transaction component captures the accounting for work unit flows by reading data from work unit packets. Transaction ledger **164** includes Cloud consumer, Cloud provider, service request number, work unit number, work unit usage (time spent in the Cloud), and status information (open, complete or error). An example is shown below.

Transaction Ledger **164**:

[0073]

Cloud Customer	Cloud Provider	Service Request #	Work Unit #	Work Unit Usage	Status
Consumer	ACME	133	223	53	Complete

[0074] In another embodiment of this invention, billing tool **180** is used as to calculate fees when providing services to customers. Billing tool **180** resides either on one of the Clouds in the Cloud computing environment, typically the originating Cloud, or outside of the Clouds in the environment. As shown in FIG. 8, billing tool **180** includes transaction component **182** configured to read data from each transaction ledger **164** in the Cloud computing environment. Billing tool **180** also includes terms component **184** configured to read Cloud terms data **186** for each Cloud in the Cloud computing environment. Billing tool **180** uses data from each transaction ledger **164** and terms data for each Cloud to calculate customer fees.

[0075] In this embodiment, the Cloud provider or a third party service provider could offer this charging service by performing the functionalities described herein on a subscription and/or fee basis. In this case, the Cloud provider or the third party service provider can create, deploy, maintain, support, etc., transaction tool that performs the processes described below. In return, the Cloud provider or the third party service provider can receive payment from the Cloud customers requesting services.

[0076] FIG. 9 depicts the methodologies disclosed herein. According to one embodiment, in step S1, Cloud usage and accounting tool **150** assigns allowable entry/exit points for the Cloud. In S2, a work unit passes through networking

equipment associated with a DP. In S3, routing information in WU packets is updated. In S4, routing data is read and it is noted that WU has crossed a DP. In S5, WU leaves the DP and either enters or exits the Cloud. In S6, when the WU exits the Cloud, the transaction ledger 164 is updated with information ascertained from tracking the WU.

[0077] The flowchart of FIG. 9 illustrates the architecture, functionality, and operation of possible implementations of systems, methods and computer program products according to various embodiments of the present invention. In this regard, each block in the flowchart may represent a module, segment, or portion of code, which comprises one or more executable instructions for implementing the specified logical function(s). It should also be noted that, in some alternative implementations, the functions noted in the blocks may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently. It will also be noted that each block of flowchart illustration can be implemented by special purpose hardware-based systems that perform the specified functions or acts, or combinations of special purpose hardware and computer instructions.

[0078] While shown and described herein as a solution for metering Cloud usage within a Cloud computing environment when processing a Cloud service request, it is understood that the invention further provides various alternative embodiments. For example, in one embodiment, the invention provides a computer-readable/useable medium that includes computer program code to enable a computer infrastructure to provide metering Cloud usage functionality as discussed herein. To this extent, the computer-readable/useable medium includes program code that implements each of the various processes of the invention. It is understood that the terms computer-readable medium or computer-useable medium comprises one or more of any type of physical embodiment of the program code. In particular, the computer-readable/useable medium can comprise program code embodied on one or more portable storage articles of manufacture (e.g., a compact disc, a magnetic disk, a tape, etc.), on one or more data storage portions of a computing device, such as memory 28 (FIG. 1) and/or storage system 34 (FIG. 1) (e.g., a fixed disk, a read-only memory, a random access memory, a cache memory, etc.), and/or as a data signal (e.g., a propagated signal) traveling over a network (e.g., during a wired/wireless electronic distribution of the program code).

[0079] In another embodiment, the invention provides a method that performs the process of the invention on a subscription, advertising, and/or fee basis. That is, a service provider, such as a Solution Integrator, could offer to provide query protection and/or masking functionality. In this case, the service provider can create, maintain, support, etc., a computer infrastructure, such as computer system 102 (FIG. 1) that performs the process of the invention for one or more customers. In return, the service provider can receive payment from the customer(s) under a subscription and/or fee agreement and/or the service provider can receive payment from the sale of advertising content to one or more third parties.

[0080] In still another embodiment, the invention provides a computer-implemented method for providing metering Cloud usage within a Cloud computing environment when processing a Cloud service request functionality. In this case, a computer infrastructure, such as computer system 102 (FIG. 1), can be provided and one or more systems for performing

the process of the invention can be obtained (e.g., created, purchased, used, modified, etc.) and deployed to the computer infrastructure. To this extent, the deployment of a system can comprise one or more of: (1) installing program code on a computing device, such as computer system 102 (FIG. 1), from a computer-readable medium; (2) adding one or more computing devices to the computer infrastructure; and (3) incorporating and/or modifying one or more existing systems of the computer infrastructure to enable the computer infrastructure to perform the process of the invention.

[0081] As used herein, it is understood that the terms “program code” and “computer program code” are synonymous and mean any expression, in any language, code or notation, of a set of instructions intended to cause a computing device having an information processing capability to perform a particular function either directly or after either or both of the following: (a) conversion to another language, code or notation; and/or (b) reproduction in a different material form. To this extent, program code can be embodied as one or more of: an application/software program, component software/a library of functions, an operating system, a basic device system/driver for a particular computing device, and the like.

[0082] A data processing system suitable for storing and/or executing program code can be provided hereunder and can include at least one processor communicatively coupled, directly or indirectly, to memory element(s) through a system bus. The memory elements can include, but are not limited to, local memory employed during actual execution of the program code, bulk storage, and cache memories that provide temporary storage of at least some program code in order to reduce the number of times code must be retrieved from bulk storage during execution. Input/output or device devices (including, but not limited to, keyboards, displays, pointing devices, etc.) can be coupled to the system either directly or through intervening device controllers.

[0083] Network adapters also may be coupled to the system to enable the data processing system to become coupled to other data processing systems, remote printers, storage devices, and/or the like, through any combination of intervening private or public networks. Illustrative network adapters include, but are not limited to, modems, cable modems, and Ethernet cards.

[0084] The foregoing description of various aspects of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed and, obviously, many modifications and variations are possible. Such modifications and variations that may be apparent to a person skilled in the art are intended to be included within the scope of the invention as defined by the accompanying claims.

What is claimed is:

1. A method for metering usage of a plurality of cloud resources in a cloud computing environment when processing a cloud service request, comprising:

- defining the physical implementation of delineation points on each of the plurality of clouds in the environment;
- tracking each of a plurality of inter-cloud operational transactions as each transaction passes through a delineation point entering a cloud;
- tracking each of the plurality of inter-cloud operational transactions as each transaction passes through a delineation point exiting a cloud;
- maintaining a transaction ledger in each of the plurality of clouds;

calculating an amount of time each of the plurality of operational transactions was within each of the plurality of clouds; and
storing the amount of time in the respective transaction ledger.

2. The method according to claim **1** further comprising:
accessing a routes registry in each of the plurality of clouds, the registry containing information on the state of each delineation point of the respective cloud; and
monitoring the state of each delineation point of each of the plurality of clouds; when the state of at least one delineation point changes, updating the respective routes registry.

3. The method according to claim **1** further comprising:
blocking routes into each of the plurality of clouds not having at least one delineation point; and
storing blocked routes data in the respective routes registry.

4. The method according to claim **1** further comprising
accessing a services registry in each of the plurality of clouds, the registry containing availability and resources of each of the plurality of clouds.

5. The method according to method according to claim **4** further comprising:
accessing availability and resources data from services registry;
accessing routing data from routes registry; and
routing the operational transaction along an available route based on the data.

6. The method according to claim **5** further maintaining a cloud terms registry, the registry containing usage rates for each of the plurality of clouds.

7. The method according to claim **6** further comprising:
accessing cloud usage fee rates from cloud terms registry;
accessing time within each cloud from transaction ledger of each of the plurality of clouds for all transactions associated with a service request; and
calculating a cloud usage fee for processing the service request using data.

8. A Cloud usage and accounting tool for metering cloud resource usage in a Cloud computing environment, comprising:

a memory medium comprising instructions;
a bus coupled to the memory medium; and
a processor coupled to the bus that when executing the instructions causes the Cloud usage and accounting tool to:

define the physical implementation of delineation points of a cloud in the environment;

track each of a plurality of inter-cloud operational transactions as each transaction passes through a delineation point entering the cloud;

track each of a plurality of inter-cloud operational transactions as each transaction passes through a delineation point exiting the cloud;

maintain a transaction ledger in the cloud;

calculate amount of time each of the plurality of operational transactions was within the cloud; and

store the amount of time in the transaction ledger.

9. The Cloud usage and accounting tool according to claim **8** being further caused to maintain a routes registry in the cloud, the registry containing information on the state of each delineation point of the cloud; and monitor the state of each delineation point of the cloud; when the state of at least one delineation point changes, update the routes registry.

10. The Cloud usage and accounting tool according to claim **8** being further caused to block routes into the cloud not containing at least one delineation point; and store information relating to blocked routes in the routes registry.

11. The cloud usage and accounting tool according to claim **8** being further caused to access a services registry, the registry containing availability and resources of each of the plurality of clouds.

12. The cloud usage and accounting tool according to claim **11** being further caused to access availability and resources data from services registry; access routing data from routes registry; and route operational transaction along an available route based on the data.

13. The cloud usage and accounting tool according to claim **12** being further caused to access cloud terms registry, the registry containing usage rates for the cloud.

14. The cloud usage and accounting tool according to claim **13** being further caused to access cloud usage fee rates from cloud terms registry; access time within the cloud from the transaction ledger of the cloud; and calculate a cloud usage fee based on the data.

15. A computer-readable medium storing computer instructions, which when executed, enables a computer system to meter usage of a plurality of cloud resources in a cloud computing environment when processing a cloud service request, comprising:

define the physical implementation of delineation points of a cloud in the environment;

track each of a plurality of inter-cloud operational transactions as each transaction passes through a delineation point entering the cloud;

track each of a plurality of inter-cloud operational transactions as each transaction passes through a delineation point exiting the cloud;

maintain a transaction ledger in the cloud;

calculate amount of time each of the plurality of operational transactions was within the cloud; and

store the amount of time in the transaction ledger.

16. The computer readable medium containing the program product of claim **15**, the computer readable medium further comprising program code for causing the computer system to maintain a routes registry, the registry containing information on the state of each delineation point of the cloud; and monitor the state of each delineation point of each of the plurality of clouds; when the state of at least one delineation point changes, updating the respective routes registry.

17. The computer readable medium containing the program product of claim **15**, the computer readable medium further comprising program code for causing the computer system to block routes into the cloud not containing at least one delineation point; and store information relating to blocked routes in the routes registry.

18. The computer readable medium containing the program product of claim **15**, the computer readable medium further comprising program code for causing the computer system to maintain a services registry, the registry containing information relating to the availability and resources of each of the plurality of clouds.

19. The computer readable medium containing the program product of claim **18**, the computer readable medium further comprising program code for causing the computer system to access availability and resources data from services

registry; access routing data from routes registry; and routing the operational transaction along an available route based on the data.

20. The computer readable medium containing the program product of claim **19**, the computer readable medium further comprising program code for causing the computer system to maintain a cloud terms registry, the registry containing usage rates for the cloud.

21. The computer readable medium containing the program product of claim **20**, the computer readable medium further comprising program code for causing the computer system to access cloud usage rates from cloud terms registry; access time within the cloud from transaction ledger; and calculate a cloud usage fee based on the data.

22. A method for deploying a system for metering cloud resource usage in a Cloud computing environment, comprising:

providing a computer infrastructure being operable to:

define the physical implementation of delineation points on a cloud in the environment;

track each of a plurality of inter-cloud operational transactions as each transaction passes through a delineation point entering the cloud;

track each of the plurality of inter-cloud operational transactions as each transaction passes through a delineation point exiting the cloud;

maintain a transaction ledger;

calculate amount of time each of the plurality of operational transactions was within the cloud; and

store the amount of time in the transaction ledger.

* * * * *