

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

MALEK MOSS PLLC
Kevin N. Malek (*pro hac vice*)
340 Madison Avenue, FL 19
New York, New York 10173
(212) 812-1491
kevin.malek@malekmoss.com

ALVERSON, TAYLOR,
MORTENSEN & SANDERS
Kurt R. Bonds
Nevada Bar No. 6228
Adam R. Knecht
Nevada Bar No. 13166
7401 W. Charleston Boulevard
Las Vegas, NV 89117
(702) 384-7000
efile@alversontaylor.com

CARLSON & MESSER LLP
David Kaminski
kaminskid@cmtlaw.com
J. Grace Felipe
felipeg@cmtlaw.com
5901 W. Century Boulevard
Suite 1200
Los Angeles, California 90045
Tel: (310) 242-2200
Fax: (310) 242-2222

Attorneys for Plaintiff

**UNITED STATES DISTRICT COURT
NORTHERN DISTRICT OF CALIFORNIA
(SAN JOSE DIVISION)**

VOIP-PAL.COM, INC., a Nevada corporation,

Plaintiff,

v.

APPLE, INC.,

Defendants.

Case No. 5:18-cv-06216-LHK

FIRST AMENDED COMPLAINT

Jury Trial Demanded

1 Pursuant to Fed. R. Civ. P. 15(a)(1)(b), Plaintiff VoIP-Pal.com, Inc. (“VoIP-Pal”), for its
2 First Amended Complaint against Defendant Apple, Inc. (“Apple” also referred to as the
3 “Defendant”) hereby alleges as follows:
4

5 **PARTIES**

6 1. Plaintiff VoIP-Pal is a Nevada corporation with its principal place of business
7 located at 10900 NE 4th Street, Suite 2300, Bellevue, Washington 98004.

8 2. Defendant Apple is a California corporation with its principal place of business at 1
9 Infinite Loop, Cupertino, California 95014. On information and belief, Apple regularly conducts
10 and transacts business in the District of Nevada and throughout the United States, and, as set forth
11 below, has committed and continues to commit, tortious acts of patent infringement within the
12 District of Nevada.
13

14 **NATURE OF THE ACTION**

15 3. This is a civil action for infringement of United States Patent No. 9,537,762 (the
16 “‘762 Patent”), United States Patent No. 9,813,330 (the “‘330 Patent”), United States Patent No.
17 9,826,002 (the “‘002 Patent”), and United States Patent No. 9,948,549 (the “‘549 Patent,” and
18 together with the ‘762 Patent, the ‘330 Patent and the ‘002 Patent, the “Patents-in-Suit”) under the
19 Patent Laws of the United States, 35 U.S.C. § 1 *et seq.*
20

21 **JURISDICTION AND VENUE**

22 4. This Court has jurisdiction over the subject matter of this action pursuant to 28
23 U.S.C. §§ 1331 and 1338(a).

24 5. This Court has personal jurisdiction over Apple because, among other things,
25 Apple has committed, aided, abetted, contributed to, and/or participated in the commission of
26 patent infringement in this judicial district and elsewhere that led to foreseeable harm and injury to
27 VoIP-Pal.
28

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

6. This Court also has personal jurisdiction over Apple because, among other things, Apple has established minimum contacts within the forum such that the exercise of jurisdiction over Apple will not offend traditional notions of fair play and substantial justice. Moreover, Apple has placed products and provided services that practice the claimed inventions of the Patents-in-Suit into the stream of commerce with the reasonable expectation and/or knowledge that purchasers and users of such products and services were located within this District. Apple has sold, advertised, marketed, distributed and made available products and services in this District that practice the claimed inventions of the Patents-in-Suit.

7. Venue is proper in this district pursuant to 28 U.S.C. § 1400(b).

BACKGROUND OF THE TECHNOLOGY AND THE PATENTS-IN-SUIT

8. United States Patent No. 9,537,762 (the “‘762 Patent”) entitled “Producing Routing Messages For Voice Over IP Communications” was duly and legally issued by the United States Patent and Trademark Office on January 3, 2017. A copy of the ‘762 Patent is attached hereto as Exhibit 1.

9. United States Patent No. 9,813,330 (the “‘330 Patent”) entitled “Producing Routing Messages For Voice Over IP Communications” was duly and legally issued by the United States Patent and Trademark Office on November 7, 2017. A copy of the ‘330 Patent is attached hereto as Exhibit 2.

10. United States Patent No. 9,826,002 (the “‘002 Patent”) entitled “Producing Routing Messages For Voice Over IP Communications” was duly and legally issued by the United States Patent and Trademark Office November 21, 2017. A copy of the ‘762 Patent is attached hereto as Exhibit 3.

11. United States Patent No. 9,948,549 (the “‘549 Patent”) entitled “Producing Routing Messages For Voice Over IP Communications” was duly and legally issued by the United States Patent and Trademark Office on April 17, 2008. A copy of the ‘549 Patent is attached hereto as

Exhibit 4.

1 12. The ‘762 Patent, ‘330 Patent, ‘002 Patent and ‘549 Patent are collectively referred
2 to herein as the “Patents-In-Suit”.

3 13. The inventions of the Patents-In-Suit originated from breakthrough work and
4 development in the internet protocol communications field.

5 14. VoIP-Pal has provided significant improvements to communications technology by
6 the invention of novel methods, processes and apparatuses that facilitate communications between
7 internet protocol based systems and networks, such as internally controlled systems and external
8 networks (e.g., between private networks and public networks), including the classification and
9 routing thereof.
10

11 15. The earliest telephone systems to receive public use within the United States
12 involved a telephone directly connected to a human operator. A portion of the phone rested on a
13 mechanical hook such that the operator was signaled when the portion was lifted from the hook. A
14 caller would then say the name of the person they wished to call to the operator. If the callee was
15 connected to the same telephone switch board the operator would physically pull out a cable
16 associated with the caller’s phone and plug the cable into a socket associated with the callee’s
17 telephone. If the callee was associated with a different switchboard, and thus out of reach of the
18 operator, a second operator would be involved to bridge the gap to the appropriate switchboard.
19 While initially very effective compared to no telephone service, this structure quickly proved error
20 prone (operators would connect the wrong party), and limiting the number of possible telephones
21 because of the physical limits of switchboards and cable to be pulled. This basic system
22 corresponds to the introduction of a Plain Old Telephone Service (“POTS”) connection to the
23 operator. In these configurations, there was a dedicated, point-to-point electrical connection
24 between the caller and the callee.
25
26
27

28 16. Rotary dialing eventually was introduced, beginning at around the turn of the 20th

1 century, where a rotary disk was marked with numbers from zero to nine. A caller would spin the
2 wheel and a mechanical device in the telephone would cause a sequence of electrical pulses to be
3 sent to the network corresponding to the digit dialed, for example, four pulses would be sent for
4 the number four. Rather than speaking to a human operator, an electric device would count the
5 pulses and begin to route a call once an appropriate and valid sequence of digits was dialed by the
6 caller. This advancement improved reliability of call routing and reduced the time required to
7 initiate a call. But, even so, there was a dedicated, point-to-point electrical connection between the
8 caller and the callee. As multiple companies entered the market of telephone service and the
9 number of customers increased, an issue emerged where a caller would be a customer of one
10 telephone company and the callee would be a customer of another. The solution that emerged to
11 this problem was to introduce trunk lines, which connect one company to another.
12

13 17. Eventually, as the number of companies continued to increase and telephone
14 services spread over much larger geographic areas, the notion of a Public Switched Telephone
15 Service (“PSTN”) emerged. The term derives from the notion, at least in part, that the dedicated
16 wires used to connect the caller and callee were “circuit-switched” to connect the two. The PSTN
17 developed gradually into the middle of the 20th century, still built around the notion of rotary
18 dialing and POTS connections to the individual telephones. These calls involved analog
19 communications over circuit-switched electrical connections. A circuit-switched network involves
20 assigning dedicated resources, such as switch settings and specific wires, to establish a link from
21 the caller to the callee. While the call is ongoing these resources cannot be used for any other
22 communications.
23

24 18. The next important advancement for consumer telephone service, introduced
25 broadly during the second half of the 20th century, was the introduction of push-button
26 telephones. With such telephones the rotary dial was replaced by a matrix of buttons, each labeled
27 with a digit from zero through nine along with the additions of ‘*’ and ‘#’. The underlying
28

1 signaling technology was called dual-tone multiple-frequency (“DTMF”) and involves two
2 different audible tones being sent simultaneously from the telephone into the telephone network.
3 A receiver within the network decoded these tones and formed them into a sequence of digits
4 indicating the number of the callee.

5 19. Around this same time a scheme for international telephone addressing was
6 introduced, with a numeric protocol for identifying one country from another and providing
7 country-specific routing within the destination country. The E.164 standard now documents how a
8 caller anywhere in the world, for example in Ann Arbor, Michigan, can cause a telephone call to
9 be routed to any other location, such as Avignon, France. While many of these advances, such as
10 DTMF dialing and automated international routing, may have been originally introduced via *ad*
11 *hoc* methods, eventually they required multiple parties (companies and governments) to agree on
12 protocols to enable wide-spread reliable use and inter-operability among different physical
13 communications networks. Even with all these advances, the systems still relied on circuit-
14 switched technology that dedicated resources between the caller and the callee during the duration
15 of a call. The move to take human operators out of the loop, with the introduction of rotary
16 dialing, combined with the fast increase in demand for telephone services throughout the 20th
17 century, resulted in the development of automated telephone switches. These devices comprise a
18 set of input ports, each dedicated to, and associated with a specific caller, and output ports, each
19 associated with a callee. A small local telephone system may have had a single switch while a
20 larger service would use a large number of switches that were connected to each other. Eventually
21 a switch from a local service provider would be connected to a trunk line which then connected to
22 an input switch of another service provider. These switches originally supported analog voice calls
23 initiated via rotary dialing and dedicating input and output ports as well as physical wires for each
24 circuit-switched call.
25
26
27

28 20. Eventually analog voice services were replaced within the network with digital

1 voice. Digital voice is communicated using a sequence of chunks (or packets) of data. This
2 advancement allowed the physical resources to be shared among multiple calls over short bursts of
3 time. For example, a physical wire can move a packet for one call at a specific instance in time
4 and then move a packet for a totally different call subsequently, only to later return to transfer a
5 new packet for the original call. This advance is called packet-switched communications and
6 provided an important increase in network reliability and efficiency while driving down the cost.
7 However, in most situations throughout the 20th century (and often still today), the connection to
8 the end user's physical telephone is analog. While network switches operate via digital circuitry,
9 and often comprises programmable processors executing software, they tend to be dedicated
10 special-purpose devices. The conversion between analog and digital encoding is typically done at
11 the point where the PSTN network switch connects to the POTS handset, for example, at a device
12 called a Class-5 telephone switch, which connects the customer POTS handset to the PSTN
13 network of a service provider's central office.
14

15 21. The Internet became important to consumers, via broad deployment, during the late
16 1980's and early 1990's. Eventually available bandwidth and reliability increased to the point
17 where pioneers began to experiment with techniques to carry voice communications over the
18 Internet. These early efforts then began to focus on techniques called Voice Over Internet Protocol
19 (VOIP) and session initiation protocol (SIP). VOIP provided a consistent set of protocols and
20 mechanisms for moving digital voice packets between two callers using the Internet rather than
21 existing PSTN networks. SIP provided a mechanism for establishing and terminating these calls
22 between users of a VOIP service. For example, a callee could register with a VOIP service so that
23 an identifier (such as their name, email address or a nickname) could be associated with the
24 computer to which they are logged in. Eventually VOIP services increased to provide
25 interoperability with the existing PSTN services. For example, the company Skype began to allow
26 a user to call a PSTN number using a feature marketed as "Skype out". However, the user was
27
28

1 required to explicitly classify the call as a PSTN call by specifying a real physical telephone
2 number. In this case the VOIP system must include a gateway to bridge from the VOIP network to
3 the PSTN network in order to route to the physical telephone. Calls that use a proprietary non-
4 PSTN user identifier such as an email or nickname remain within the VOIP network and are not
5 routed to the PSTN network and do not connect to a POTS telephone.

6 22. The advent of VOIP technology allowed customers to physically move their
7 telephones from one location to another, even from one continent to another, with no fundamental
8 change in its operation from the point of view of a caller once a connection to the Internet was
9 established. However, the integration of network gateways to route between different types of
10 networks using VOIP, for example from a VOIP caller in Europe to a PSTN callee in the United
11 States, introduced a number of new complications. The VOIP service needed to be able to
12 distinguish between callees that were within the VOIP network and those that were outside of it
13 and thus required different methods for identifying callees and routing to them depending on
14 whether the callees were within or outside the VOIP network. One way to identify callees on the
15 VOIP network was to use a predefined proprietary user identifier such as an email or nickname.
16 The VOIP service provider also needed to interpret dialed PSTN numbers in order to correctly
17 route calls to a PSTN callee. A VOIP caller had to use different types of callee identifier
18 depending on whether or not the destination (callee) they were calling was within the VOIP
19 network or not. The caller's choice of the type of callee identifier thus specified the network of the
20 destination to be called. However, the asserted patents disclose and claim a distinct manner of call
21 routing.
22
23

24 23. Digifonica, a wholly owned subsidiary of Patent Owner VoIP-Pal, starting in 2004
25 eventually came to employ over a dozen top professionals (e.g., software developers, system
26 administrators, QA/test analysts) including three Ph.D.'s with engineering backgrounds, to
27 develop innovative software solutions for communications. Digifonica spent over \$15,000,000
28

1 researching, developing, and testing a communication solution capable of seamlessly integrating a
2 private voice-over-IP (“VoIP”) communication network with an external network (i.e., the “public
3 switched telephone network” or “PSTN”), by bridging the disparate protocols, destination
4 identifiers and addressing schemes used in the two networks. By the mid-2000’s, Digifonica had
5 successfully tested intra- and inter-network communications (i.e., communications within the
6 Digifonica system and between the Digifonica system and the PSTN) by implementing high-
7 capacity communication nodes across three geographic regions, including actual working nodes in
8 Vancouver (Canada) and London (UK). *See* ‘762 Patent at Fig. 1 (nodes 11, 21) and 13:19-35¹.
9 Digifonica’s R&D efforts led to a number of patent grants, including U.S. Patent No. 8,542,815, to
10 which the Patents-In-Suit claim priority.
11

12 24. Prior to the ‘815 Patent, private branch exchange (PBX) systems typically enabled
13 users to call destinations internal to the PBX by dialing an extension (i.e., “private number”) and
14 destinations external to the PBX on the public switched telephone network (PSTN) by dialing a
15 “public number.” Such PBX systems relied on a user-specified classification of the dialed number
16 to interpret the number and route the call. For example, a user placing a call to the public network
17 dialed a predefined prefix such as “9” to indicate that subsequent digits were to be interpreted as a
18 public PSTN number. If no prefix was dialed, the dialed digits were to be interpreted as a private
19 PBX extension. The number alone, as dialed, dictated how the call was routed. Thus, the user
20 made an affirmative decision when placing a call as to whether the call would be public or private.
21

22 25. Digifonica’s system employed an approach fundamentally different from
23 traditional PBX’s: it did not rely on a caller-specified classification (e.g., a prefix digit) to
24 distinguish private calls from PSTN calls. Digifonica provided flexible, user-specific dialing
25 features and could decouple the type of number being called from the manner in which the call
26

27 _____
28 ¹ References to citations herein to the ‘762 Patent are made in the following format col:lines of
the specification, e.g., column 6, lines 5 through 9 of the ‘762 Patent is cited as ‘762 Patent 6:5-9.

1 would be handled. For example, even if a public PSTN number was dialed, Digifonica's system
2 could determine that the call should be routed to the private network, thus allowing the advantages
3 of private network calling even if callers were unaware that the call recipient ("callee") was a
4 Digifonica system subscriber.

5 26. VoIP-Pal's/Digifonica's technology and patents represent fundamental
6 advancements to Internet Protocol ("IP") based communication, including improved functioning,
7 classification, routing and reliability of Voice-over-IP (VoIP) and IP-based transmission of video,
8 photographs, messages and mixed media, as well as improved interoperability of IP-based private
9 communication networks with external networks, such as the public switched telephone network
10 (PSTN), interconnected with the private communication networks via one or more gateways.

11 27. The Patents-In-Suit provide, *inter alia*, improvements in routing controllers,
12 processes, and networks. Several illustrative examples of such improvements are briefly described
13 below, although the patented invention is not limited to these specific improvements or examples.

14 28. The public switched telephone network (PSTN) connected callers through nodes
15 such as central offices or exchanges. Because these nodes were limited to providing services only
16 to subscribers in a "local calling service area," they required callers to place calls in a specific
17 manner, e.g., by requiring the use of certain dialing patterns and conventions associated with that
18 local area. *See* '762 Patent at 1:36-42. For example, PSTN nodes conventionally required PSTN
19 callers to dial in a manner compatible with a local numbering plan (e.g., a plan consistent with the
20 "North American Numbering Plan" or "National Numbering Plan," in use by AT&T as early as
21 about the 1940's and further developed in later years) as well as to dial in a manner compatible
22 with international standards such as those of the International Telecommunications Union (ITU)
23 Telecommunications Standardization Sector (ITU-T). *See* '762 Patent at 19:5-17. For example, it
24 is known in the field of telephony that early numbering plans assigned an "area code" of 312 for
25 calling Illinois, and that this code (312) remains in use even today as an area code for Chicago. To
26
27
28

1 take another example, the ITU designates “44” as a “country code” for calling the United
2 Kingdom. *Id.* at Fig. 12 (“County Code” attribute for London user is “44”).

3 29. Large organizations were able to avoid PSTN dialing constraints, at least for
4 internal calls, by using private branch exchanges (PBXs) and private numbering plans for their
5 internal private telephone networks, but these PBXs also needed to provide caller access to the
6 PSTN. *See* ‘762 Patent at 1:22-33. As Andy Valdar has explained in his textbook, “Businesses
7 which have more than a few telephones use a private branch exchange system, known as a PBX,
8 to provide call connections between each telephone (which become ‘extensions’) and links into
9 the PSTN... The PBX is really a small version of the PSTN exchanges, typically ranging in sizes
10 from 10 up to 5,000 extensions. A private numbering scheme is required to enable extension to
11 extension dialing, also *special codes (e.g. ‘dial 9’)* are required to enable calls to be made to the
12 PSTN. [...] In the case where a company extends over two or more sites (e.g. office or factory
13 buildings) the PBXs on each site can be linked by private circuits, thus enabling calling between
14 all the extensions. This is known as a ‘private corporate network’ (or just ‘private network’). In
15 this case the private numbering scheme extends across all the PBXs and usually each PBX is
16 linked to the PSTN.” (*See* Valdar, Andy, *Understanding Telecommunications Networks*, The
17 Institution of Engineering and Technology, London, UK, 2006, p. 38 (emphasis added)).

18 30. It was well-understood, routine and conventional for PBXs to require users to dial a
19 special code (e.g., a prefix digit of “9”) if they wanted to place a call on the PSTN, as noted by
20 Valdar and numerous other sources. For example, one telecom dictionary distinguishes between
21 dialing an “internal PBX station number” and an “external number,” wherein in the latter case,
22 “the user must dial an access code in order to gain access to an external trunk connected to the
23 public switched telephone network (PSTN)... The conventional access code is nine (9) in the
24 United States and Canada, and zero (0) in most other countries”. (*See* Ray Horak, *Webster's New*
25 *World Telecom Dictionary*, Wiley Publishing, Inc., Indianapolis, Indiana, 2008, p.133 [emphasis
26
27
28

1 added]). To take another example, U.S. Patent No. 3,725,596 to Maxon et al. (“Maxon”), filed in
2 1971, discloses an early private branch exchange (PBX) having equipment for
3 automatically generating and transmitting calling station and trunk number information to a central
4 office on outgoing calls. Maxon indicates that “a calling party at station ST10... dials a prefix
5 digit, such as the conventional prefix digit 9, to initiate an outgoing call to the central office. The
6 digit 9 is... detected by the dial 9 detector 152. Upon the detection of this digit, the register control
7 circuit 153 advises common control that the digit 9 has been dialed for a central office call.”
8 [emphasis added]. Maxon at 9:66-10:6; see also Fig. 1B (152), 8:58-68, 9:21, 9:38-40, 13:3-6,
9 14:6-7 and at 14:59. Webster’s New World Telecom dictionary and Maxon both confirm that it
10 was considered “conventional” to use a prefix digit such as “9” to place a PSTN call from a PBX.
11 The Patents-In-Suit eschewed such well-understood, routine and conventional approaches to
12 integrating these two networks.
13

14 31. A person of skill in the art (POSITA), upon review of the Patents-in-Suit, would
15 understand that the disclosed embodiments are inherently computer based. The POSITA would
16 further appreciate that the asserted claims of the Patent-In-Suit are necessarily rooted in computer
17 technology for the operation of communication networks, and provide technical improvements to
18 overcome certain technical limitations of prior art routing processes, systems and networks, viz.,
19 that the asserted claims provide technology solutions for one or more of: (1) user-specific call
20 handling, (2) transparent routing, and (3) network resiliency and (4) communication blocking.
21

22 32. ***User-Specific Call Handling:*** Many prior art communication systems required
23 users to place a call by using a specific callee identifier format or by following certain dialing
24 conventions with no opportunity for defining a user-specific manner of placing calls. For example,
25 as discussed above, PSTN nodes were typically limited to supporting only the dialing conventions
26 of their local calling service area and processed calls locally (See ‘762 Patent at 1:36-42) and did
27 not support user-specific calling. The technology disclosed in the Patents-in-Suit and recited in the
28

1 asserted claims overcomes such technical limitations and supports user-specific calling styles, e.g.,
2 calling styles from any continent or country based on the application of user-specific attributes to
3 callee identifiers and network classification criteria to route a call. It is unnecessary for the user to
4 do anything special to “trigger” such user-specific call processing. *See, e.g.*, ‘762 Patent at 15:50-
5 58 (storing user-specific parameters including a “continent code” and “country code” in
6 association with each subscriber), 18:40-58 (disclosing a user-specific “dialing profile” capable of
7 supporting numerous global styles of dialing), and Figs. 8A-8D (disclosing steps for processing a
8 routing request). By evaluating a called party identifier based on profile settings (“attributes”)
9 associated with the calling party, the technology provides an individually customizable manner of
10 initiating a communication to a destination party. To be clear, it is not a calling party’s identifier
11 (i.e., “caller ID” or “caller identifier”) that is used as the basis for evaluating the called party’s
12 identifier (e.g., “callee identifier”); rather, the calling party’s identifier is used to locate a caller-
13 specific *profile* identifying calling party attributes to be used to evaluate the called party’s
14 identifier and to determine the routing destination, as between two networks, and to engage
15 infrastructure for effecting the communication. This approach is capable of fulfilling the
16 individual service preferences of users (e.g., any desired PSTN dialing style) (*id.* at 19:38-50); it
17 also supports unconventional dialing styles and special callee identifiers such as usernames (*id.* at
18 17:61-63). All of the asserted claims of the Patents-In-Suit enable user-specific handling of
19 communications; *viz.*, every claim recites user-specific attributes that are used for determining and
20 establishing routing.
21
22

23 33. ***Routing Transparency***: Some prior art communication systems required a user to
24 explicitly signal how a call should be processed or to manually “trigger” special call handling. For
25 example, as discussed above, it was well-understood, routine and conventional for PBX systems in
26 large organizations to rely on a user-specified classification of the dialed number to interpret the
27 number and route the call—e.g., a user placing a call to the PSTN would dial a predefined prefix
28

1 such as “9” to indicate that subsequent digits were to be interpreted as a PSTN number. If no
2 prefix was dialed, the dialed digits were interpreted as a private PBX extension. The dialed digits
3 alone dictated how the call was routed, and thus the user made an affirmative decision when
4 placing a call as to how the call’s routing would take place. In the foregoing example, the PBX
5 fails not only to provide user-specific call handling, but also *routing transparency*. In contrast, the
6 asserted claims of the Patents-In-Suit use a caller’s attributes to evaluate a callee identifier against
7 network routing criteria to cause a call to automatically be routed over a system network or
8 another network (e.g., such as the PSTN) interconnected to the system network through a gateway,
9 *transparently* to the user, without the user manually specifying which network to use for routing
10 by the user’s manner of placing the call (e.g., by dialing a prefix of “9” to make a PSTN call).
11

12 34. To illustrate this with one embodiment disclosed in the ‘762 Patent, if a Vancouver
13 user (user profile in Fig. 10) dialed the PSTN phone number of the London user (user profile in
14 Fig. 12), the system would evaluate the dialed digits based on the caller’s attributes, determine that
15 the London user is a subscriber to the system, and classify the call as a system network call,
16 identifying a subscriber username such as “44011062444” (*See* ‘762 Patent at Fig. 8B, Fig. 12,
17 20:61-22:15). A routing controller (*Id.* at 16 in Fig. 1) determines that the London user is
18 associated with a different node than the Vancouver user, and produces a routing message (*Id.* at
19 Fig. 16; *see also id.* at 21:12-36; Fig. 8A at 280, 302, 350, 381) for receipt by a call controller (*id.*
20 at 14 in Fig. 1), thereby causing the call controller to establish the call (*id.* at 27:44-47). The caller
21 in this illustrative embodiment need not be aware that the London user is a subscriber and need not
22 know whether or not the call is being placed over the PSTN. Thus, the identification of the
23 destination network is transparent to the user; the same manner of initiating a communication can
24 reach destinations on either network. All the claims of the Patents-In-Suit recite features which
25 enable such transparent routing.
26
27

28 35. Furthermore, in some claimed embodiments of the invention, a node associated

1 with the callee is identified (e.g., from a callee profile stored in the communication system) and
2 the communication is automatically forwarded to that node for handling. *See* ‘762 Patent at Fig.
3 8A (302, 350, 381). This, too, is transparent to the originator of the communication, who does not
4 have to take any action to “trigger” the identification of, or routing to, a node with which the callee
5 is associated. In this manner, the system architecture can distribute the load of very large numbers
6 of subscribers from a large geographic area without imposing any requirement users to know how
7 to route to the node at which the callee is currently registered. *See* ‘762 Patent at 13:20-44. If the
8 system operator should reassign subscribers or adds nodes to the system, as needed, for better
9 performance or to maintain quality of service, the caller need not know this—the node can be
10 identified dynamically. In contrast, in the PSTN, when a new “area code” is overlaid to handle
11 larger number of customers, callers are inconvenienced by having to learn new phone numbers or
12 styles of dialing. Digifonica’s system architecture and operation not only provided improved
13 transparency in routing via multiple nodes of the system (as well as via gateways), it also gave rise
14 to improved system resiliency, aspects of which are described below in greater detail with
15 reference to the patent specification.
16

17 36. Yet another benefit was that Digifonica’s technology enabled automatic network
18 selection based on determination of a callee’s registration status. Because Digifonica’s system
19 supported the use of PSTN numbers both for subscribers on its own private network as well as for
20 non-subscribers on a public network (e.g., the PSTN), a caller might know the PSTN number of a
21 destination without knowing whether the destination was reachable via Digifonica’s IP-based
22 network. Digifonica’s technology automatically determined whether the destination was a
23 subscriber and, if so, routed over Digifonica’s network notwithstanding that a PSTN number had
24 been dialed. This enabled callers to receive the advantages of IP-based private network calling
25 even when callers were unaware that the callee was a Digifonica system subscriber; such calls
26 could be transparently placed over Digifonica’s IP-based network at lower cost, with better quality
27
28

1 and/or higher reliability than if the call had been sent over the PSTN network. In comparison to
2 the prior art examples described above, Digifonica's approach was unconventional in that it
3 decoupled the type of number being dialed from the classification and routing of the call. As a
4 further aspect, Digifonica's network was designed to support multiple resellers of its
5 communication services: *See, e.g.*, '762 Patent at 19:23-25, 31:48-32:57 and Figs. 9-12 (field
6 273), 41, 43, 45, 47-50, disclosing support for different resellers (e.g., phone companies retailing
7 communication services based on Digifonica's network under their own brand). Using the
8 aforesaid technology, calls by callers to callees who were affiliated with a different reseller of
9 communication services based on Digifonica's network, would automatically and transparently be
10 routed over Digifonica's IP-based network even without the caller or callee knowing that both
11 parties were Digifonica subscribers. Such network selection was especially helpful to overcome
12 the costs and limitations of public networks when the calls were international, e.g., from callers
13 using Digifonica's node in North America (Vancouver) to callees associated with the node in
14 Europe (London). *Id.* at Fig. 1.

15
16 37. **Resiliency:** Some prior art provided service to a limited area (*See* '762 Patent at
17 1:50-53: "such as one location, or a small number of branch offices") but was incapable of
18 providing reliable service to a large number of subscribers dispersed over a geographically
19 dispersed area such as a continent (*id.* at 1:47-50). For example, PSTN exchanges and nodes were
20 limited to serving a "local calling service area" (*id.* at 1:36-38), whereas the PBX systems
21 described above in the Valdar textbook were "really a small version of the PSTN exchanges,
22 typically ranging in sizes from 10 up to 5,000 extensions" (see Valdar, *supra*; cf. '762 Patent at
23 1:50-53). Furthermore, at a system-level, such networks did not always have "other nodes... able
24 to take up the load" if a particular node failed, e.g., due to a natural disaster (*See* '762 Patent at
25 1:42-46). In contrast, the patented inventions can provide reliable service to large areas including
26 countries and continents. This gave rise to technical challenges regarding how to handle issues
27
28

1 such as a very large number of subscribers, bursts of excessive demand and/or communication
2 node failure, all of which affected system reliability. The patented inventions describe a
3 technology for flexibly assigning nodes to particular geographical areas, including the option of
4 adding redundant nodes with overlapping responsibility for load sharing. *See* ‘762 Patent at 13:20-
5 40 (disclosing a network of super nodes providing communication services to large geographical
6 regions) and 13:41-44 (disclosing special nodes for “call load sharing”). The technology
7 performed call routing by identifying a suitable system network “node” or a gateway (e.g., a
8 gateway to the PSTN) in response to evaluation of the caller’s attributes, the callee identifier, and
9 available routing resources. This design made it simple to allocate or add new nodes and gateways
10 to particular regions (*See* ‘762 Patent at 13:20-44; 25:51-64, 27:44-47; 27:64-28:7). The use of
11 caller attributes, callee identifier and dynamic routing criteria to produce the routing message, as
12 described in the Patents-in-Suit, allowed such new nodes and gateways to be identified in the
13 routing message, to increase service availability to subscribers as needed without redesigning the
14 routing apparatus and process, to create an improved, resilient and reliable global routing system.
15 Unlike some prior art systems, the Digifonica technology did not require access to PSTN
16 databases (cf. ‘762 Patent at 1:33-35), eliminating such dependence as a possible point of failure.
17 Digifonica’s technology also supported routing through an *available* gateway selected from
18 among many supplier gateways, which also improved overall system resilience. *See* ‘762 Patent at
19 27:64-28:23. At least some of these improvements are recited by certain claims that have been
20 asserted from the Patents-In-Suit.
21
22

23 38. ***Communication Blocking***: Digifonica’s inventions, among other important
24 advances, enabled various methods of communication blocking. Callers can have caller-specific
25 attributes associated with their profile for determining, in a caller-specific manner, whether or not
26 they are permitted to initiate a communication. *See* ‘762 Patent at 20:14-32. Furthermore, the
27 caller-specific attributes associated with the caller’s profile can provide a basis for establishing
28

1 whether an attempted communication is valid, e.g., by checking the validity of the called party
2 identifier. *See* '762 Patent at 20:30-34 and Fig. 8B. Notably, what constitutes a valid initiation of
3 a communication was a user-specific determination because it depended on user-specific profile
4 attributes. Digifonica's approach in this regard was *unconventional* compared to the prior art,
5 which imposed a manner of call placement (e.g., dialing style) on all users that was not
6 configurable in a user-specific manner: e.g., conventionally, all PBX users had to dial a *particular*
7 predefined digit to dial PSTN calls, or all PSTN users in a local area could dial only according to
8 the local numbering plan. Finally, callee-specific information was supported in Digifonica's
9 technology for identifying how an incoming communication to each particular subscriber was to
10 be handled, to enable the communication system to implement selective call blocking, selective
11 call forwarding, and/or selectively routing communications to voice mail without interrupting the
12 callee or the caller making an explicit choice. *See* '762 Patent at Fig. 8A (e.g., steps 602, 608,
13 610), Fig. 8B, Figs. 26-32 and 26:2-27:43. At least some of these improvements are recited in
14 asserted claims of the Patents-In-Suit.
15

16 39. The '815 Patent and the '005 Patent, to which the Patents-In-Suit claim priority,
17 have survived eight *inter partes* reviews ("IPR's") by the U.S. Patent Office based on prior art
18 disclosing making routing decisions. *See* IPR2016-01201 and IPR2016-01198, filed by Apple
19 (final written decisions upholding validity of all challenged claims); IPR2017-01383, IPR2017-
20 01384 and IPR2017-01385, filed by AT&T (all denied institution); and IPR2016-01082, filed by
21 Unified Patents (denied institution). The U.S. Patent and Trademark Office rejected all of the
22 cited communication routing art as not rendering the '815 Patent and the '005 Patent invalid. On
23 information and belief, the asserted claims are inventive over the art cited against the parent
24 patents.
25

26 40. As described above, Digifonica eschewed the conventional approaches for bridging
27 the requirements of disparate networks (different communication-initiation methods, identifiers,
28

1 protocols and/or addressing schemes). Instead, one “inventive concept” embodied in the Patents-
2 in-Suit—and *not* well-understood, routine or conventional for persons of skill in the art at the time
3 of the invention—was an improved routing process, apparatus and system, in which user-specific
4 “attributes” (e.g., “attributes” associated with a first participant in a communication) are utilized to
5 evaluate a “second participant identifier” to identify, in a “routing message,” an appropriate
6 routing “address” (e.g., an address in the system associated with the second participant or of a
7 “gateway” to an external network), the routing message causing routing of the communication to
8 the destination, as between the two networks, using the address in the system or of the gateway.

9 41. The Patents-In-Suit represent fundamental advancements to the art of internet
10 protocol (IP) based communication, including improved functioning, routing and reliability for
11 communications over the internet.
12

13 42. For example, claim 1 of the ‘762 Patent recites:

14 A method of routing communications in a system in which a first
15 participant identifier is associated with a first participant registered
16 with the system and wherein a second participant identifier is
17 associated with a second participant, the first participant being
18 associated with a first participant device operable to establish a
communication using the system to a second participant device
associated with the second participant, the system comprising at
least one processor operably configured to execute program code
stored in at least one memory, the method comprising:

19 in response to the first participant device initiating the
20 communication to the second participant device, receiving the first
21 participant identifier and the second participant identifier from the
first participant device;

22 using the first participant identifier to locate, via the at least one
23 processor, a first participant profile from among a plurality of
24 participant profiles that are stored in a database, the first participant
profile comprising one or more attributes associated with the first
participant;

25 processing the second participant identifier, via the at least one
26 processor, based on at least one of the one or more attributes from
the first participant profile, to produce a new second participant
identifier;

27 classifying the communication, via the at least one processor, using
28 the new second participant identifier, as a first network
communication if a first network classification criterion is met and

1 as a second network communication if a second network
2 classification criterion is met;

3 when the first network classification criterion is met, producing, via
4 the at least one processor, a first network routing message, the first
5 network routing message identifying an address in the system, the
6 address being associated with the second participant device;

7 and when the second network classification criterion is met,
8 producing, via the at least one processor, a second network routing
9 message, the second network routing message identifying an
10 address associated with a gateway to a network external to the
11 system, wherein the second network classification criterion is met if
12 the second participant is not registered with the system.

13 43. For example, claim 1 of the '330 Patent recites:

14 A method for routing a communication in a communication system
15 between an Internet-connected first participant device associated
16 with a first participant and a second participant device associated
17 with a second participant, the method comprising:

18 in response to initiation of the communication by the first
19 participant device, receiving, by a controller comprising at least one
20 processor, over an Internet protocol (IP) network a first participant
21 identifier and a second participant identifier;

22 causing at least one processor to access at least one database
23 comprising user profiles using the first participant identifier, each
24 user profile comprising a respective plurality of attributes for a
25 respective user, to locate a user profile for the first participant
26 including a plurality of first participant attributes;

27 comparing at least a portion of the second participant identifier,
28 using the at least one processor, with at least one of the plurality of
first participant attributes obtained from the user profile for the first
participant;

causing at least one processor to access the at least one database to
search for a user profile for the second participant;

classifying the communication, based on the comparing, as a system
communication or an external network communication, using the at
least one processor;

when the communication is classified as a system communication,
producing a system routing message identifying an Internet address
of a communication system node associated with the second
participant device based on the user profile for the second
participant, using the at least one processor, wherein the system
routing message causes the communication to be established to the
second participant device; and

when the communication is classified as an external network
communication, producing an external network routing message
identifying an Internet address associated with a gateway to an

1 external network, using the at least one processor, wherein the
2 external network routing message causes the communication to the
3 second participant device to be established using the gateway to the
4 external network.

5 44. For example, claim 1 of the '002 Patent recites:

6 A method of routing a communication in a communication system
7 between an Internet-connected first participant device associated
8 with a first participant and a second participant device associated
9 with a second participant, the method comprising:

10 in response to initiation of the communication by the first
11 participant device, receiving, by a controller comprising at least one
12 processor, over an Internet protocol (IP) network a first participant
13 identifier and a second participant identifier, the second participant
14 identifier being associated with the second participant device;

15 causing at least one processor to access a database comprising user
16 profiles, using the first participant identifier, each user profile
17 associating a respective plurality of attributes with a respective user,
18 to locate a plurality of first participant attributes;

19 processing the second participant identifier, using the at least one
20 processor, based on at least one of the plurality of first participant
21 attributes obtained from a user profile for the first participant, to
22 produce a new second participant identifier;

23 classifying the communication, based on the new second participant
24 identifier, as a system communication or an external network
25 communication, using the at least one processor;

26 when the communication is classified as a system communication,
27 producing a system routing message identifying an Internet address
28 associated with the second participant device, using the at least one
processor, wherein the system routing message causes the
communication to be established to the second participant device;
and

when the communication is classified as an external network
communication, producing an external network routing message
identifying an Internet address associated with a gateway to an
external network, using the at least one processor, wherein the
external network routing message causes the communication to the
second participant device to be established using the gateway to the
external network.

45. For example, claim 1 of the '549 Patent recites:

A method of routing a communication in a communication system
between an Internet-connected first participant device associated
with a first participant and a second participant device associated
with a second participant, the method comprising:

causing at least one processor to access at least one memory storing
a first participant profile identifying at least one first participant

attribute;

1 receiving, by the at least one processor, a second participant
2 identifier inputted by the first participant using the first participant
3 device to initiate a communication, the second participant identifier
4 being associated with the second participant device;

5 processing the second participant identifier, based on the at least
6 one first participant attribute obtained from the first participant
7 profile, to produce a new second participant identifier;

8 classifying the communication as a system communication or an
9 external network communication;

10 when the communication is classified as a system communication,
11 producing a system routing message, based on the new second
12 participant identifier, that identifies an Internet Protocol (IP)
13 address of a network element through which the communication is
14 to be routed thereby causing the communication to be established to
15 the second participant device; and

16 when the communication is classified as an external network
17 communication, producing an external network routing message,
18 based on the new second participant identifier, that identifies an
19 address associated with a gateway to an external network thereby
20 causing the communication to the second participant device to be
21 established by use of the gateway to the external network.

22 46. VoIP-Pal is the sole owner and assignee of the entire right title and interest in the
23 ‘762 Patent, the ‘330 Patent, the ‘002 Patent and the ‘549 Patent and has the right to sue and
24 recover damages for any current or past infringement of the ‘762 Patent, the ‘330 Patent, the ‘002
25 Patent and the ‘549 Patent.

26 **OVERVIEW OF THE ACCUSED INSTRUMENTALITIES**

27 47. Each of the instrumentalities described herein made, used, sold and/or offered for
28 sale by Apple comprises systems and devices relating to and supporting communications using
29 devices, computers, servers, systems and methods used by, operated by and performed by Apple.

30 48. Apple’s iMessage® system and service allows devices to communicate between
31 participants, e.g., as between a first participant or user registered with Apple (such as through an
32 Apple identifier) or that is using an Apple device, and a second user or participant that may or may
33 not be a user registered with Apple or that may or may not be using an Apple device. The system
34 makes use of attributes that are part of a profile for the first participant in order to classify

communications.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

49. Apple’s Facetime® system and service allows devices to initiate an audio or video/audio communication between at least two participants which may or may not be associated with an Apple identification or Apple devices/software. The system makes use of attributes that are part of a user profile in order to classify the communication.

50. Apple enables the use of WiFi Calling in conjunction with its iMessage® and Facetime® systems and services, which allows an Apple device to initiate communications between participants using internet protocol (IP) based communication methods and participants using external networks, such as the PSTN. Apple also enables the use of mobile devices that communicate directly with external networks, such as iPhone® devices that can communicate over cellular networks.

COUNT I

Infringement Of The ‘762 Patent

51. Paragraphs 1 through 50 are incorporated by reference as if fully stated herein.

52. Apple, either alone or in conjunction with others, has infringed and continues to infringe, both directly and indirectly, one or more claims of the ‘762 Patent, including at least exemplary claim 1, under 35 U.S.C. § 271, either literally and/or under the doctrine of equivalents, by using, offering to sell, selling and/or importing into the United States at least certain methods, apparatuses, products and services used for communication, including, without limitation, messaging (iMessage®), video/audio communication (Facetime®), WiFi calling, telephony functionality, smartphone (iPhone®), tablet (iPad®), Apple Watch® and/or mobile devices, handheld and desktop computers including Mac® and the like (collectively, “the ‘762 Accused Instrumentalities”).

53. For example, Apple infringes exemplary claim 1 of the ‘762 Patent by using, offering to sell, selling and/or importing into the United States at least the ‘762 Accused

1 Instrumentalities, which '762 Accused Instrumentalities comprise a method for routing
2 communications in a system:

- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- in which a first participant identifier is associated with a first participant registered with the system (e.g., Apple's iMessage® system and Facetime® system associate a first participant with an identifier such as a phone number or other identifier of the participant) and wherein a second participant identifier is associated with a second participant (e.g., Apple's iMessage® system and Facetime® system associate a second participant with an identifier such as a phone number or other identifier of the participant), the first participant being associated with a first participant device operable to establish a communication using the system to a second participant device associated with the second participant (e.g., Apple's iMessage® system and Facetime® system associate the participants with devices such as an iPhone® or a Mac® desktop computer or other mobile or desktop devices), the system comprising at least one processor operably configured to execute program code stored in at least one memory, the method comprising (e.g., Apple's iMessage® system and Facetime® system comprise at least computers and/or servers that comprise processors configured to execute program code stored in memory):
 - in response to the first participant device initiating the communication to the second participant device, receiving the first participant identifier and the second participant identifier from the first participant device (e.g., in Apple's iMessage® system and Facetime® system, the communication is initiated by the first participant and the first participant identifier and the second participant identifier are received by the system , the identifiers
- 22
- 23
- 24
- 25
- 26
- 27
- 28

being a phone number or other identification of the participants);

- 1 • using the first participant identifier to locate, via the at least one processor,
2 a first participant profile from among a plurality of participant profiles that
3 are stored in a database, the first participant profile comprising one or more
4 attributes associated with the first participant (e.g., in Apple's iMessage®
5 system and Facetime® system, the first participant profile is located within
6 at least one database that stores profiles associated with participants, using
7 the identifier such as a phone number, Apple ID or other identification of
8 the first participant);
- 9 • processing the second participant identifier, via the at least one processor,
10 based on at least one of the one or more attributes from the first participant
11 profile, to produce a new second participant identifier (e.g., Apple's
12 iMessage® system and Facetime® system processes the participant
13 identifier using the first participant profile to produce a new second
14 participant identifier);
- 15 • classifying the communication, via the at least one processor, using the new
16 second participant identifier, as a first network communication if a first
17 network classification criterion is met and as a second network
18 communication if a second network classification criterion is met (e.g.,
19 Apple's iMessage® system and Facetime® system classify the
20 communication through a server or computer, using the new second
21 participant identifier, such as when the identifier represents an Apple
22 registered device, and classifies it as the appropriate network
23 communication when the corresponding network criterion is met);
- 24 • when the first network classification criterion is met, producing, via the at
25
26
27
28

1 least one processor, a first network routing message, the first network
2 routing message identifying an address in the system, the address being
3 associated with the second participant device (e.g., Apple's iMessage®
4 system and Facetime® system send or receive a produced routing message
5 that identifies an address on the system that is associated with the second
6 participant for routing to an Apple device);

- 7 • and when the second network classification criterion is met, producing, via
8 the at least one processor, a second network routing message, the second
9 network routing message identifying an address associated with a gateway
10 to a network external to the system, wherein the second network
11 classification criterion is met if the second participant is not registered with
12 the system (e.g., Apple's iMessage® system and Facetime® system can
13 send and receive communications to and from external networks, for
14 example, SMS/MMS messages to be communicated over WiFi Calling or a
15 cellular network, or audio communications using a PSTN network over
16 WiFi Calling; and a routing message that identifies an address associated
17 with a gateway to such an external network is produced for routing to a
18 non-Apple device).

19
20
21 54. On information and belief, Apple has had knowledge of the '762 Patent since at
22 least April 12, 2018 when VoIP-Pal issues a press release announcing the issuance of the '762
23 Patent. (*See* <https://www.voip-pal.com/voip-pal-strengthens-patent-holding>).

24 55. Despite its knowledge and notice of the '762 Patent and its infringement of that
25 patent, Apple has continued to make, use, sell and offer to sell the '762 Accused Instrumentalities
26 in the United States. Accordingly, Apple's infringement has been and continues to be willful.
27

28 56. Apple has induced infringement, and continues to induce infringement, of one or

1 more claims of the '762 Patent under 35 U.S.C. § 271(b). Apple actively, knowingly, and
2 intentionally induced, and continues to actively, knowingly and intentionally induce infringement
3 of the '762 Patent by selling or otherwise making available and/or supplying the '762 Accused
4 Instrumentalities; with the knowledge and intent that third parties will use the '762 Accused
5 Instrumentalities supplied by Apple to infringe the '762 Patent; and with the knowledge and intent
6 to encourage and facilitate third party infringement through the dissemination of the '762 Accused
7 Instrumentalities and/or the creation and dissemination of promotional and marketing materials,
8 supporting materials, instructions, product manuals, and/or technical information related to the
9 '762 Accused Instrumentalities.

10 57. Apple specifically intended and was aware that the ordinary and customary use of
11 the '762 Accused Instrumentalities would infringe the '762 Patent. For example, Apple sells, uses,
12 makes available and provides the '762 Accused Instrumentalities, which when used in their
13 ordinary and customary manner intended by Apple, infringe one or more claims of the '762
14 Patent, including at least exemplary claim 1. Upon information and belief, Apple further provides
15 product manuals and other technical information that cause Apple customers and other third
16 parties to use and to operate the '762 Accused Instrumentalities for their ordinary and customary
17 use. Apple customers and other third parties have directly infringed the '762 Patent, including at
18 least exemplary claim 1, through the normal and customary use of the '762 Accused
19 Instrumentalities. By providing instruction and training to customers and other third parties on
20 how to use the '762 Accused Instrumentalities in an infringing manner, Apple specifically
21 intended to induce infringement of the '762 Patent, including at least exemplary claim 1. Apple
22 accordingly has induced and continues to induce Apple customers and other users of the '762
23 Accused Instrumentalities in their ordinary and customary way to infringe the '762 Patent,
24 knowing, or at least being willful blind to the fact, that such use constitutes infringement of the
25 '762 Patent.
26
27
28

1 58. VoIP-Pal has been and continues to be damaged by Apple’s infringement of the
2 ‘762 Patent.

3 59. Apple’s conduct in infringing the ‘762 Patent renders this case exceptional within
4 the meaning of 35 U.S.C. § 285.

5 **COUNT II**

6 **Infringement Of The ‘330 Patent**

7 60. Paragraphs 1 through 59 are incorporated by reference as if fully stated herein.

8 61. Apple, either alone or in conjunction with others, has infringed and continues to
9 infringe, both directly and indirectly, one or more claims of the ‘330 Patent, including at least
10 exemplary claim 1, under 35 U.S.C. § 271, either literally and/or under the doctrine of equivalents,
11 by using, offering to sell, selling and/or importing into the United States at least certain methods,
12 apparatuses, products and services used for communication, including, without limitation,
13 messaging (iMessage®) and video/audio communication (Facetime®), WiFi calling, telephony
14 functionality, smartphone (iPhone®), tablet (iPad®), Apple Watch® and/or mobile devices,
15 handheld and desktop computers, including Mac® and the like (collectively, “the ‘330 Accused
16 Instrumentalities”).
17

18 62. For example, Apple infringes exemplary claim 1 of the ‘330 Patent by using,
19 offering to sell, selling and/or importing into the United States at least the ‘330 Accused
20 Instrumentalities, which ‘330 Accused Instrumentalities comprise a method for routing a
21 communication in a system:
22

- 23 • between an Internet-connected first participant device associated with a
24 first participant and a second participant device associated with a second
25 participant, the method comprising (e.g., Apple’s iMessage® system and
26 Facetime® system comprises various servers that perform a method of
27 routing communications in a system where first participants or senders of a
28

1 communication have one or more Apple devices that can be connected to
2 the Internet):

- 3
- 4 • in response to initiation of the communication by the first participant
5 device, receiving, by a controller comprising at least one processor, over an
6 Internet protocol (IP) network a first participant identifier and a second
7 participant identifier (e.g., in Apple's iMessage® system and Facetime®
8 system, the communication is initiated by the first participant and the first
9 participant identifier and the second participant identifier are received over
10 an IP network by the system, the identifiers being a phone number or
11 other identification of the participants);
 - 12 • causing at least one processor to access at least one database comprising
13 user profiles using the first participant identifier, each user profile
14 comprising a respective plurality of attributes for a respective user, to
15 locate a user profile for the first participant including a plurality of first
16 participant attributes (e.g., in Apple's iMessage® system and Facetime®
17 system, the first participant profile is located within at least one database
18 that stores profiles associated with users or participants);
 - 19 • comparing at least a portion of the second participant identifier, using the at
20 least one processor, with at least one of the plurality of first participant
21 attributes obtained from the user profile for the first participant (e.g.,
22 Apple's iMessage® system and Facetime® system compare at least one of
23 the attributes of the first participant or sender's profile, such as the IDD or
24 NDD, to a least a portion of the second participant's or recipient's
25 identifier);
 - 26 • causing at least one processor to access the at least one database to search
27
28

1 for a user profile for the second participant (e.g. Apple's iMessage®
2 system and Facetime® system search at least one database of registered
3 users for a profile for the second participant);

- 4 • classifying the communication, based on the comparing, as a system
5 communication or an external network communication, using the at least
6 one processor (e.g., Apple's iMessage® system and Facetime® system
7 allow communications to be made to and from external networks, for
8 example, messages using SMS/MMS over WiFi Calling or a cellular
9 network, or audio to be communicated to and from PSTN networks over
10 WiFi Calling; Apple's systems classify whether the communication is a
11 system communication or an external network communication, using at
12 least one processor);
- 14 • when the communication is classified as a system communication,
15 producing a system routing message identifying an Internet address of a
16 communication system node associated with the second participant device
17 based on the user profile for the second participant, using the at least one
18 processor, wherein the system routing message causes the communication
19 to be established to the second participant device (e.g., in Apple's
20 iMessage® system and Facetime® system, if the communication is
21 classified as a system communication, a routing message is produced, using
22 at least one processor, to identify an address in the system such that
23 communication can be established to an Apple device associated with the
24 second participant); and
- 27 • when the communication is classified as an external network
28 communication, producing an external network routing message

1 identifying an Internet address associated with a gateway to an external
2 network, using the at least one processor, wherein the external network
3 routing message causes the communication to the second participant device
4 to be established using the gateway to the external network (e.g., in Apple's
5 iMessage® system and Facetime® system, if the communication is
6 classified as an external communication, a routing message is produced,
7 using at least one processor to identify an address associated with a
8 gateway to an external network, e.g., for messages sent via SMS/MMS or
9 communications over the PSTN).

10
11 63. On information and belief, Apple has had knowledge of the '330 Patent since at
12 least April 12, 2018 when VoIP-Pal issues a press release announcing the issuance of the '330
13 Patent. (*See* <https://www.voip-pal.com/voip-pal-strengthens-patent-holding>).

14 64. Despite its knowledge and notice of the '330 Patent and its infringement of that
15 patent, Apple has continued to make, use, sell and offer to sell the '330 Accused Instrumentalities
16 in the United States. Accordingly, Apple's infringement has been and continues to be willful.

17 65. Apple has induced infringement, and continues to induce infringement, of one or
18 more claims of the '330 Patent under 35 U.S.C. § 271(b). Apple actively, knowingly, and
19 intentionally induced, and continues to actively, knowingly and intentionally induce infringement
20 of the '330 Patent by selling or otherwise making available and/or supplying the '330 Accused
21 Instrumentalities; with the knowledge and intent that third parties will use the '330 Accused
22 Instrumentalities supplied by Apple to infringe the '330 Patent; and with the knowledge and intent
23 to encourage and facilitate third party infringement through the dissemination of the '330 Accused
24 Instrumentalities and/or the creation and dissemination of promotional and marketing materials,
25 supporting materials, instructions, product manuals, and/or technical information related to the
26 '330 Accused Instrumentalities.
27
28

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

66. Apple specifically intended and was aware that the ordinary and customary use of the ‘330 Accused Instrumentalities would infringe the ‘330 Patent. For example, Apple sells, uses, makes available and provides the ‘330 Accused Instrumentalities, which when used in their ordinary and customary manner intended by Apple, infringe one or more claims of the ‘330 Patent, including at least exemplary claim 1. Upon information and belief, Apple further provides product manuals and other technical information that cause Apple customers and other third parties to use and to operate the ‘330 Accused Instrumentalities for their ordinary and customary use. Apple customers and other third parties have directly infringed the ‘330 Patent, including at least exemplary claim 1, through the normal and customary use of the ‘330 Accused Instrumentalities. By providing instruction and training to customers and other third parties on how to use the ‘330 Accused Instrumentalities in an infringing manner, Apple specifically intended to induce infringement of the ‘330 Patent, including at least exemplary claim 1. Apple accordingly has induced and continues to induce Apple customers and other users of the ‘330 Accused Instrumentalities in their ordinary and customary way to infringe the ‘330 Patent, knowing, or at least being willful blind to the fact, that such use constitutes infringement of the ‘330 Patent.

67. VoIP-Pal has been and continues to be damaged by Apple’s infringement of the ‘330 Patent.

68. Apple’s conduct in infringing the ‘330 Patent renders this case exceptional within the meaning of 35 U.S.C. § 285.

COUNT III

Infringement Of The ‘002 Patent

69. Paragraphs 1 through 68 are incorporated by reference as if fully stated herein.

70. Apple, either alone or in conjunction with others, has infringed and continues to infringe, both directly and indirectly, one or more claims of the ‘002 Patent, including at least

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

exemplary claim 1, under 35 U.S.C. § 271, either literally and/or under the doctrine of equivalents, by using, offering to sell, selling and/or importing into the United States at least certain methods, apparatuses, products and services used for communication, including, without limitation, messaging (iMessage®), video/audio communication (Facetime®), WiFi calling, telephony functionality, smartphone (iPhone®), tablet (iPad®), Apple Watch® and/or mobile devices, handheld and desktop computers, including Mac® and the like (collectively, “the ‘002 Accused Instrumentalities”).

71. For example, Apple infringes exemplary claim 1 of the ‘002 Patent by using, offering to sell, selling and/or importing into the United States at least the ‘002 Accused Instrumentalities, which ‘002 Accused Instrumentalities comprise a method for routing a communication in a system:

- between an Internet-connected first participant device associated with a first participant and a second participant device associated with a second participant, the method comprising (e.g., in Apple’s iMessage® system and Facetime® system, the system comprises various servers that communicate with first participants or senders with Apple devices, such as desktop computers, laptops, tablets or mobile handheld devices that can be connected to the Internet and that can send communications):
- in response to initiation of the communication by the first participant device, receiving, by a controller comprising at least one processor, over an Internet protocol (IP) network a first participant identifier and a second participant identifier, the second participant identifier being associated with the second participant device (e.g., in Apple’s iMessage® system and Facetime® system, the system receives identifiers for the participants when a communication is initiated by the user of the Apple device, where the

1 participants' identifiers may be an Apple identifier or a phone number, for
2 example, which is handled by a controller and at least one processor);

- 3 • causing at least one processor to access a database comprising user profiles,
4 using the first participant identifier, each user profile associating a
5 respective plurality of attributes with a respective user, to locate a plurality
6 of first participant attributes (e.g., in Apple's iMessage® system and
7 Facetime® system, attributes associated with the first participant are
8 located within at least one database that stores profiles associated with
9 users , using an identifier such as a phone number of other identification of
10 the first participant);
- 11 • processing the second participant identifier, using the at least one
12 processor, based on at least one of the plurality of first participant attributes
13 obtained from a user profile for the first participant, to produce a new
14 second participant identifier (e.g., in Apple's iMessage® system and
15 Facetime® system, a new second participant identifier is produced based
16 on the first participant attributes);
- 17 • classifying the communication, based on the new second participant
18 identifier, as a system communication or an external network
19 communication, using the at least one processor (e.g., Apple's iMessage®
20 system and Facetime® system allow communications to be made to and
21 from external networks, for example, communication of SMS/MMS
22 messages over WiFi Calling or a cellular network, or audio communication
23 to or from a PSTN networks over WiFi Calling, and such a communication
24 is classified as a system communication or external network
25 communication using at least one processor);

- 1 • when the communication is classified as a system communication,
2 producing a system routing message identifying an Internet address
3 associated with the second participant device, using the at least one
4 processor, wherein the system routing message causes the communication
5 to be established to the second participant device (e.g., Apple's iMessage®
6 system and Facetime® system classifies the system communication and
7 produces a routing message that identifies an Internet address associated
8 with the second participant for routing to an Apple device of the second
9 participant such that the communication can be established); and
10 • when the communication is classified as an external network
11 communication, producing an external network routing message
12 identifying an Internet address associated with a gateway to an external
13 network, using the at least one processor, wherein the external network
14 routing message causes the communication to the second participant device
15 to be established using the gateway to the external network (e.g., in Apple's
16 iMessage® system and Facetime® system, if the communication is
17 classified as an external communication, an external network routing
18 message is produced that identifies an Internet address associated with a
19 gateway to an external network, for example, for messages using
20 SMS/MMS over WiFi calling or cellular, or for communicating audio using
21 the PSTN over WiFi calling, such that the communication is established to
22 the device of the second participant).

23 72. On information and belief, Apple has had knowledge of the '002 Patent since at
24 least April 12, 2018 when VoIP-Pal issues a press release announcing the issuance of the '002
25 Patent. (*See* <https://www.voip-pal.com/voip-pal-strengthens-patent-holding>).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

73. Despite its knowledge and notice of the '002 Patent and its infringement of that patent, Apple has continued to make, use, sell and offer to sell the '002 Accused Instrumentalities in the United States. Accordingly, Apple's infringement has been and continues to be willful.

74. Apple has induced infringement, and continues to induce infringement, of one or more claims of the '002 Patent under 35 U.S.C. § 271(b). Apple actively, knowingly, and intentionally induced, and continues to actively, knowingly and intentionally induce infringement of the '002 Patent by selling or otherwise making available and/or supplying the '002 Accused Instrumentalities; with the knowledge and intent that third parties will use the '002 Accused Instrumentalities supplied by Apple to infringe the '002 Patent; and with the knowledge and intent to encourage and facilitate third party infringement through the dissemination of the '002 Accused Instrumentalities and/or the creation and dissemination of promotional and marketing materials, supporting materials, instructions, product manuals, and/or technical information related to the '002 Accused Instrumentalities.

75. Apple specifically intended and was aware that the ordinary and customary use of the '002 Accused Instrumentalities would infringe the '002 Patent. For example, Apple sells, uses, makes available and provides the '002 Accused Instrumentalities, which when used in their ordinary and customary manner intended by Apple, infringe one or more claims of the '002 Patent, including at least exemplary claim 1. Upon information and belief, Apple further provides product manuals and other technical information that cause Apple customers and other third parties to use and to operate the '002 Accused Instrumentalities for their ordinary and customary use. Apple customers and other third parties have directly infringed the '002 Patent, including at least exemplary claim 1, through the normal and customary use of the '002 Accused Instrumentalities. By providing instruction and training to customers and other third parties on how to use the '002 Accused Instrumentalities in an infringing manner, Apple specifically intended to induce infringement of the '002 Patent, including at least exemplary claim 1. Apple

1 accordingly has induced and continues to induce Apple customers and other users of the ‘002
2 Accused Instrumentalities in their ordinary and customary way to infringe the ‘002 Patent,
3 knowing, or at least being willful blind to the fact, that such use constitutes infringement of the
4 ‘002 Patent.

5 76. VoIP-Pal has been and continues to be damaged by Apple’s infringement of the
6 ‘002 Patent.

7 77. Apple’s conduct in infringing the ‘002 Patent renders this case exceptional within
8 the meaning of 35 U.S.C. § 285.

9 **COUNT IV**

10 **Infringement Of The ‘549 Patent**

11 78. Paragraphs 1 through 77 are incorporated by reference as if fully stated herein.

12 79. Apple, either alone or in conjunction with others, has infringed and continues to
13 infringe, both directly and indirectly, one or more claims of the ‘549 Patent, including at least
14 exemplary claim 1, under 35 U.S.C. § 271, either literally and/or under the doctrine of equivalents,
15 by using, offering to sell, selling and/or importing into the United States at least certain methods,
16 apparatuses, products and services used for communication, including, without limitation,
17 messaging (iMessage®), video/audio communication (Facetime®), WiFi calling, telephony
18 functionality, smartphone (iPhone®), tablet (iPad®), Apple Watch® and/or mobile devices,
19 handheld and desktop computers, including Mac® and the like (collectively, “the ‘549 Accused
20 Instrumentalities”).
21
22

23 80. For example, Apple infringes exemplary claim 1 of the ‘549 Patent by using,
24 offering to sell, selling and/or importing into the United States at least the ‘549 Accused
25 Instrumentalities, which ‘549 Accused Instrumentalities comprise a method for routing a
26 communication in a system:
27

- 28
- between an Internet-connected first participant device associated with a

1 first participant and a second participant device associated with a second
2 participant, the method comprising (e.g., in Apple's iMessage® system and
3 Facetime® system, the system comprises various servers that communicate
4 with first participants or senders with Apple devices, such as desktop
5 computers, laptops, tablets or mobile handheld devices that are connected
6 to a network and that can send communications; alternatively or in
7 addition, the system comprises functionality incorporated within Apple
8 devices such as desktop computer, laptops, tablets or mobile handheld
9 devices):

- 10 • causing at least one processor to access at least one memory storing a first
11 participant profile identifying at least one first participant attribute (e.g.,
12 Apple's iMessage® system and Facetime® system locate a participant
13 profile stored on an Apple server; alternatively or in addition, the first
14 participant profile is stored on an Apple device such as a laptop computer
15 or mobile device);
- 16 • receiving, by the at least one processor, a second participant identifier
17 inputted by the first participant using the first participant device to initiate a
18 communication, the second participant identifier being associated with the
19 second participant device (e.g., in Apple's iMessage® system and
20 Facetime® system, when a communication is initiated by the first
21 participant inputting of the second participant's identifier, such as a phone
22 number, Apple identifier or other identifier that is associated with the
23 device of the second participant, the second participant identifier is
24 received by an Apple server; alternatively or in addition, the second
25 participant identifier is received by a portion of an Apple device such as a
26
27
28

laptop computer or mobile device);

- 1 • processing the second participant identifier, based on the at least one first
2 participant attribute obtained from the first participant profile, to produce a
3 new second participant identifier (e.g., Apple's iMessage® system and
4 Facetime® system processes the second participant's or receiver's
5 identifier using at least one processor to produce a new identifier for the
6 second participant based on attributes obtained from the first participant's
7 profile, such as where at least one participant's attribute indicates that the
8 first participant is blocked or at least one participant's attribute indicates
9 processing of dialing conventions associated with the first participant;
10 alternatively or in addition, a contact list stored on an Apple device such as
11 a laptop computer or mobile device may be consulted to produce a new
12 second participant identifier);
- 13 • classifying the communication as a system communication or an external
14 network communication (e.g., Apple's iMessage® system and Facetime®
15 system allow communications to be made to other Apple devices and to
16 and from external networks, and the communication may be classified as a
17 system communication or external network communication using a
18 processor on an Apple server; alternatively, the communication may be
19 classified using a processor on an Apple device such as a laptop computer
20 or mobile handheld device);
- 21 • when the communication is classified as a system communication,
22 producing a system routing message, based on the new second participant
23 identifier, that identifies an Internet Protocol (IP) address of a network
24 element through which the communication is to be routed thereby causing
25
26
27
28

1 the communication to be established to the second participant device (e.g.,
2 Apple's iMessage® system and Facetime® system classifies the system
3 communication and produces a routing message on an Apple server that
4 identifies an internet protocol (IP) address associated with the second
5 participant device for routing to an Apple device; alternatively, a system
6 routing message may be produced on an Apple device such as a laptop
7 computer or mobile handheld device); and

- 8 • when the communication is classified as an external network
9 communication, producing an external network routing message, based on
10 the new second participant identifier, that identifies an address associated
11 with a gateway to an external network thereby causing the communication
12 to the second participant device to be established by use of the gateway to
13 the external network (e.g., in Apple's iMessage® system and Facetime®
14 system, if the communication is classified as an external communication,
15 an external network routing message is produced by an Apple server that
16 identifies an internet address associated with a gateway to an external
17 network, for example, a gateway for the communication of SMS/MMS
18 messages or a PSTN gateway for communicating audio, such that the
19 communication is established to the device of the second participant by use
20 of the gateway; alternatively, the external routing message may be
21 produced by an Apple device such as a laptop computer or mobile
22 handheld device).

23
24
25 81. On information and belief, Apple has had knowledge of the '549 Patent since at
26 least April 12, 2018 when VoIP-Pal issues a press release announcing the issuance of the '549
27 Patent. (*See* <https://www.voip-pal.com/voip-pal-strengthens-patent-holding>).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

82. Despite its knowledge and notice of the ‘549 Patent and its infringement of that patent, Apple has continued to make, use, sell and offer to sell the ‘549 Accused Instrumentalities in the United States. Accordingly, Apple’s infringement has been and continues to be willful.

83. Apple has induced infringement, and continues to induce infringement, of one or more claims of the ‘549 Patent under 35 U.S.C. § 271(b). Apple actively, knowingly, and intentionally induced, and continues to actively, knowingly and intentionally induce infringement of the ‘549 Patent by selling or otherwise making available and/or supplying the ‘549 Accused Instrumentalities; with the knowledge and intent that third parties will use the ‘549 Accused Instrumentalities supplied by Apple to infringe the ‘549 Patent; and with the knowledge and intent to encourage and facilitate third party infringement through the dissemination of the ‘549 Accused Instrumentalities and/or the creation and dissemination of promotional and marketing materials, supporting materials, instructions, product manuals, and/or technical information related to the ‘549 Accused Instrumentalities.

84. Apple specifically intended and was aware that the ordinary and customary use of the ‘549 Accused Instrumentalities would infringe the ‘549 Patent. For example, Apple sells, uses, makes available and provides the ‘549 Accused Instrumentalities, which when used in their ordinary and customary manner intended by Apple, infringe one or more claims of the ‘549 Patent, including at least exemplary claim 1. Upon information and belief, Apple further provides product manuals and other technical information that cause Apple customers and other third parties to use and to operate the ‘549 Accused Instrumentalities for their ordinary and customary use. Apple customers and other third parties have directly infringed the ‘549 Patent, including at least exemplary claim 1, through the normal and customary use of the ‘549 Accused Instrumentalities. By providing instruction and training to customers and other third parties on how to use the ‘549 Accused Instrumentalities in an infringing manner, Apple specifically intended to induce infringement of the ‘549 Patent, including at least exemplary claim 1. Apple

1 accordingly has induced and continues to induce Apple customers and other users of the ‘549
2 Accused Instrumentalities in their ordinary and customary way to infringe the ‘549 Patent,
3 knowing, or at least being willful blind to the fact, that such use constitutes infringement of the
4 ‘549 Patent.

5 85. VoIP-Pal has been and continues to be damaged by Apple’s infringement of the
6 ‘549 Patent.

7 86. Apple’s conduct in infringing the ‘549 Patent renders this case exceptional within
8 the meaning of 35 U.S.C. § 285.

9 **PRAYER FOR RELIEF**

10 WHEREFORE, VoIP-Pal respectfully requests that this Court enter judgment against
11 Apple as follows:

- 12
- 13 A. That Apple has infringed the Patents-In-Suit;
- 14 B. That VoIP-Pal be awarded damages adequate to compensate VoIP-Pal for Apple’s
15 past infringement and any continuing and future infringement up until the date such
16 judgment is entered, including pre- and post-judgment interests, costs,
17 disbursements as justified under 35 U.S.C. § 284;
- 18 C. That any award of damages be enhanced under 35 U.S.C. § 284 as a result of
19 Apple’s willful infringement;
- 20 D. That this case be declared an exceptional case within the meaning of 35 U.S.C. §
21 285 and that VoIP-Pal be awarded reasonable attorney fees;
- 22 E. A judgment requiring that VoIP-Pal be awarded a compulsory ongoing licensing
23 fee or reasonable royalty; and
- 24 F. That VoIP-Pal be awarded such other and further relief at law or equity as this
25 Court deems just and proper.
26
27

28 **DEMAND FOR JURY TRIAL**

Plaintiff VoIP-Pal demands a trial by jury on all claims and issues so triable.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28

New York, New York

May 17, 2019

Respectfully submitted,

/s/ Kevin N. Malek
MALEK MOSS PLLC
Kevin N. Malek (*pro hac vice*)
340 Madison Avenue, FL 19
New York, New York 10173
(212) 812-1491
kevin.malek@malekmoss.com

CARLSON & MESSER LLP
David Kaminski
kaminskid@cmtlaw.com
J. Grace Felipe
felipeg@cmtlaw.com
5901 W. Century Boulevard
Suite 1200
Los Angeles, California 90045
Tel: (310) 242-2200
Fax: (310) 242-2222

ALVERSON, TAYLOR,
MORTENSEN & SANDERS
Kurt R. Bonds
Nevada Bar No. 6228
Adam R. Knecht
Nevada Bar No. 13166
7401 W. Charleston Boulevard
Las Vegas, NV 89117
(702) 384-7000
efile@alversontaylor.com

CERTIFICATE OF SERVICE

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28

The undersigned hereby certifies that a true and correct copy of the above and foregoing PLAINTIFF VOIP-PAL'S FIRST AMENDED COMPLAINT has been served on May 17, 2019, to all counsel for Defendant through the Court's CM/ECF system.

/s/ Kevin N. Malek

EXHIBIT 1



US009537762B2

(12) **United States Patent**
Perreault et al.

(10) **Patent No.:** **US 9,537,762 B2**

(45) **Date of Patent:** **Jan. 3, 2017**

(54) **PRODUCING ROUTING MESSAGES FOR VOICE OVER IP COMMUNICATIONS**

A61K 45/06; C07K 16/18; H04M 3/4221; H04M 7/0075; H04M 15/51; H04M 15/56

See application file for complete search history.

(71) Applicant: **DIGIFONICA (INTERNATIONAL) LIMITED**, Vancouver (CA)

(56) **References Cited**

(72) Inventors: **Clay Perreault**, Panama (PA); **Steve Nicholson**, Hamilton (NZ); **Rod Thomson**, North Vancouver (CA); **Johan Emil Viktor Björzell**, Vancouver (CA); **Fuad Arafa**, Vancouver (CA)

U.S. PATENT DOCUMENTS

4,747,124 A 5/1988 Ladd
4,916,491 A 4/1990 Kato
(Continued)

(73) Assignee: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

FOREIGN PATENT DOCUMENTS

BR PI 0718312-7 A2 11/2013
BR PI 0719682-2 A2 1/2014
(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

(21) Appl. No.: **14/877,570**

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. VoIP-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated Jun. 15, 2016. 70 sheets.

(22) Filed: **Oct. 7, 2015**

(65) **Prior Publication Data**

US 2016/0028619 A1 Jan. 28, 2016

(Continued)

Related U.S. Application Data

Primary Examiner — Simon Sing

(63) Continuation of application No. 13/966,096, filed on Aug. 13, 2013, now Pat. No. 9,179,005, which is a
(Continued)

(74) Attorney, Agent, or Firm — Knobbe Martens Olson & Bear LLP


(51) **Int. Cl.**
H04M 7/00 (2006.01)
H04L 12/725 (2013.01)
(Continued)

(57) **ABSTRACT**

A process and apparatus to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated is disclosed. In response to initiation of a call by a calling subscriber, a caller identifier and a callee identifier are received. Call classification criteria associated with the caller identifier are used to classify the call as a public network call or a private network call. A routing message identifying an address, on the private network, associated with the callee is produced when the call is classified as a private network call and a routing message identifying a

(52) **U.S. Cl.**
CPC **H04L 45/3065** (2013.01); **A61K 39/39558** (2013.01); **A61K 45/06** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H04L 45/3065; H04L 45/93226; H04L 12/14; H04L 12/1439; A61K 39/39558;

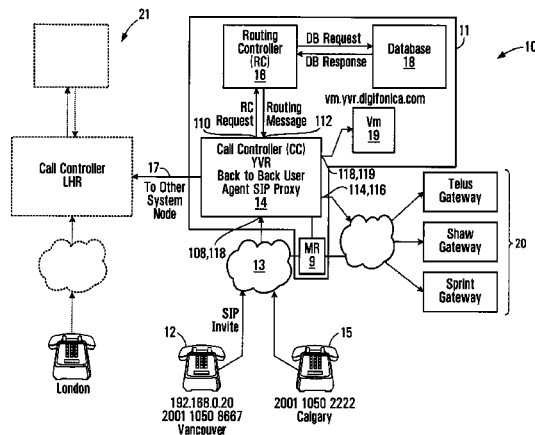

US 9,537,762 B2

Page 2

gateway to the public network is produced when the call is classified as a public network call.

45 Claims, 32 Drawing Sheets

Related U.S. Application Data

continuation of application No. 12/513,147, filed as application No. PCT/CA2007/001956 on Nov. 1, 2007, now Pat. No. 8,542,815.

(60) Provisional application No. 60/856,212, filed on Nov. 2, 2006.

(51) Int. Cl.

H04L 9/32 (2006.01)
H04L 12/14 (2006.01)
H04L 12/66 (2006.01)
H04Q 3/66 (2006.01)
H04Q 3/70 (2006.01)
H04M 15/00 (2006.01)
H04M 3/42 (2006.01)
A61K 39/395 (2006.01)
A61K 45/06 (2006.01)
C07K 16/18 (2006.01)

(52) U.S. Cl.

CPC *C07K 16/18* (2013.01); *H04L 9/3226* (2013.01); *H04L 12/14* (2013.01); *H04L 12/1439* (2013.01); *H04L 12/1496* (2013.01); *H04L 12/66* (2013.01); *H04M 3/4211* (2013.01); *H04M 7/0075* (2013.01); *H04M 15/51* (2013.01); *H04M 15/56* (2013.01); *H04M 15/8083* (2013.01); *H04M 15/8228* (2013.01); *H04M 15/887* (2013.01); *H04M 15/888* (2013.01); *H04Q 3/66* (2013.01); *H04Q 3/70* (2013.01); *H04Q 2213/1322* (2013.01); *H04Q 2213/13091* (2013.01); *H04Q 2213/13141* (2013.01); *H04Q 2213/13196* (2013.01); *H04Q 2213/13384* (2013.01)

(56) References Cited

U.S. PATENT DOCUMENTS

4,992,971 A	2/1991	Hayashi	5,737,414 A	4/1998	Walker et al.
5,146,491 A	9/1992	Silver et al.	5,742,596 A	4/1998	Baratz et al.
5,247,571 A	9/1993	Kay et al.	5,751,961 A	5/1998	Smyk
5,303,297 A	4/1994	Hillis	5,793,762 A	8/1998	Penners et al.
5,325,421 A	6/1994	Hou et al.	5,799,072 A	8/1998	Vulcan et al.
5,359,642 A	10/1994	Castro	5,802,502 A	9/1998	Gell et al.
5,425,085 A	6/1995	Weinberger et al.	5,825,863 A	10/1998	Walker
5,440,621 A	8/1995	Castro	5,828,740 A	10/1998	Khuc et al.
5,454,030 A	9/1995	de Oliveira et al.	5,838,682 A	11/1998	Dekelbaum et al.
5,469,497 A	11/1995	Pierce et al.	5,845,267 A	12/1998	Ronen
5,506,893 A	4/1996	Buscher et al.	5,850,433 A	12/1998	Rondeau
5,519,769 A	5/1996	Weinberger et al.	5,864,610 A	1/1999	Ronen
5,559,871 A	9/1996	Smith	5,867,495 A	2/1999	Elliott et al.
5,590,133 A	12/1996	Billstrom et al.	5,883,810 A	3/1999	Franklin et al.
5,608,786 A	3/1997	Gordon	5,883,891 A	3/1999	Williams et al.
5,621,787 A	4/1997	McKoy et al.	5,889,774 A	3/1999	Mirashrafi et al.
5,633,913 A	5/1997	Talarmo	5,905,736 A	5/1999	Ronen et al.
5,661,790 A	8/1997	Hsu	5,907,547 A	5/1999	Foladare et al.
5,677,955 A	10/1997	Doggett et al.	5,910,946 A	6/1999	Csapo
5,712,907 A	1/1998	Wegner et al.	5,915,005 A	6/1999	He
5,719,926 A	2/1998	Hill	5,915,093 A	6/1999	Berlin et al.
5,722,067 A	2/1998	Fognies et al.	5,917,899 A	6/1999	Moss et al.
5,724,355 A	3/1998	Bruno et al.	5,923,659 A	7/1999	Curry et al.
5,726,984 A	3/1998	Kubler et al.	5,930,343 A	7/1999	Vasquez
			5,937,045 A	8/1999	Yaoya et al.
			5,940,598 A	8/1999	Strauss et al.
			5,953,504 A	9/1999	Sokal et al.
			5,956,391 A	9/1999	Melen et al.
			5,970,477 A	10/1999	Roden
			5,974,043 A	10/1999	Solomon
			5,991,291 A	11/1999	Asai et al.
			5,991,378 A	11/1999	Apel
			6,005,870 A	12/1999	Leung et al.
			6,005,926 A	12/1999	Mashinsky
			6,014,379 A	1/2000	White et al.
			6,021,126 A	2/2000	White et al.
			6,029,062 A	2/2000	Hanson
			6,052,445 A	4/2000	Bashoura et al.
			6,058,300 A	5/2000	Hanson
			6,069,890 A	5/2000	White et al.
			6,073,013 A	6/2000	Agre et al.
			6,078,647 A	6/2000	D'Eletto
			6,104,704 A	8/2000	Buhler et al.
			6,104,711 A	8/2000	Voit
			6,115,737 A	9/2000	Ely et al.
			6,128,304 A	10/2000	Gardell et al.
			6,137,869 A	10/2000	Voit et al.
			6,141,404 A	10/2000	Westerlage et al.
			6,151,385 A	11/2000	Reich et al.
			6,173,272 B1	1/2001	Thomas et al.
			6,188,752 B1	2/2001	Lesley
			6,243,689 B1	6/2001	Norton
			6,249,573 B1	6/2001	Hudson
			6,282,574 B1	8/2001	Voit
			6,298,062 B1	10/2001	Gardell et al.
			6,327,351 B1	12/2001	Walker et al.
			6,351,464 B1	2/2002	Galvin et al.
			6,359,880 B1	3/2002	Curry et al.
			6,430,275 B1	8/2002	Voit et al.
			6,434,143 B1 *	8/2002	Donovan H04L 51/36 370/351
			6,445,694 B1	9/2002	Swartz
			6,507,644 B1	1/2003	Henderson et al.
			6,553,025 B1	4/2003	Kung et al.
			6,560,224 B1	5/2003	Kung et al.
			6,574,328 B1	6/2003	Wood et al.
			6,597,686 B1	7/2003	Smyk
			6,597,783 B1	7/2003	Tada et al.
			6,603,977 B1	8/2003	Walsh et al.
			6,636,833 B1	10/2003	Flitcroft et al.
			6,650,641 B1	11/2003	Albert et al.
			6,674,745 B1	1/2004	Schuster et al.
			6,724,860 B2	4/2004	Stumer et al.
			6,744,858 B1	6/2004	Ryan et al.
			6,766,159 B2	7/2004	Lindholm
			6,772,188 B1	8/2004	Cloutier
			6,775,534 B2	8/2004	Lindgren et al.
			6,785,266 B2	8/2004	Swartz

US 9,537,762 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

6,798,767 B1 *	9/2004	Alexander	H04L 12/66 370/352	7,907,551 B2	3/2011	Croy et al.
6,819,929 B2	11/2004	Antonucci et al.		7,929,955 B1	4/2011	Bonner
6,873,599 B1	3/2005	Han		7,944,909 B2	5/2011	James
6,892,184 B1	5/2005	Komem et al.		7,950,046 B2	5/2011	Kropivny
6,934,279 B1	8/2005	Sollee et al.		7,958,233 B2	6/2011	Fernández Gutierrez
6,937,713 B1	8/2005	Kung et al.		7,965,645 B2	6/2011	Pelletier
6,954,453 B1	10/2005	Schindler		7,979,529 B2	7/2011	Kreusch et al.
6,961,334 B1	11/2005	Kaczmarczyk		7,995,589 B2	8/2011	Sollee et al.
6,963,557 B2	11/2005	Knox		8,024,785 B2	9/2011	Andress et al.
6,963,739 B2	11/2005	Dorenbosch et al.		8,027,333 B2	9/2011	Grabelsky et al.
6,985,440 B1	1/2006	Albert et al.		8,036,366 B2	10/2011	Chu
6,993,015 B2	1/2006	Kobayashi		8,041,022 B1	10/2011	Andreasen et al.
7,006,508 B2	2/2006	Bondy et al.		8,050,273 B2	11/2011	Gass
7,010,727 B1	3/2006	Stucker		8,060,887 B2	11/2011	Kropivny
7,027,564 B2	4/2006	James		8,078,164 B2	12/2011	Ganesan
7,042,985 B1	5/2006	Wright		8,111,690 B2	2/2012	Hussain et al.
7,046,658 B1	5/2006	Kundaje		8,116,307 B1	2/2012	Thesayi et al.
7,051,072 B2	5/2006	Stewart et al.		8,125,982 B2	2/2012	Feuer
7,055,174 B1	5/2006	Cope et al.		8,127,005 B2	2/2012	Fernández Gutierrez
7,068,668 B2	6/2006	Feuer		8,145,182 B2	3/2012	Rudolf et al.
7,068,772 B1	6/2006	Widger et al.		8,161,078 B2	4/2012	Gaurav et al.
7,079,526 B1	7/2006	Wipliez et al.		8,166,533 B2	4/2012	Yuan
7,120,682 B1	10/2006	Salama		8,166,547 B2	4/2012	Bevan et al.
7,151,772 B1	12/2006	Kalmanek, Jr. et al.		8,189,568 B2	5/2012	Qiu et al.
7,174,156 B1	2/2007	Mangal		8,190,739 B2	5/2012	Fernández Gutierrez
7,177,399 B2	2/2007	Dawson et al.		8,200,575 B2	6/2012	Torres et al.
7,203,478 B2	4/2007	Benco et al.		8,204,044 B2	6/2012	Lebizay
7,212,522 B1	5/2007	Shankar et al.		8,219,115 B1	7/2012	Nelissen
7,218,722 B1	5/2007	Turner et al.		8,223,927 B2	7/2012	Di Serio et al.
7,277,528 B2	10/2007	Rao et al.		8,228,837 B2	7/2012	Sheriff et al.
7,330,835 B2	2/2008	Deggendorf		8,228,897 B2	7/2012	Mitchell
7,366,157 B1	4/2008	Valentine et al.		8,243,730 B1	8/2012	Wong et al.
7,400,881 B2	7/2008	Kallio		8,244,204 B1	8/2012	Chen et al.
7,426,492 B1	9/2008	Bishop et al.		8,275,404 B2	9/2012	Berger et al.
7,436,835 B2	10/2008	Castleberry et al.		8,300,632 B2	10/2012	Davis et al.
7,437,665 B2	10/2008	Perham		8,306,063 B2	11/2012	Erdal et al.
7,440,442 B2	10/2008	Grabelsky et al.		8,315,521 B2	11/2012	Leiden et al.
7,447,707 B2	11/2008	Gaurav et al.		8,363,647 B2	1/2013	Fangman et al.
7,454,200 B2	11/2008	Cai et al.		8,364,172 B2	1/2013	Guanfeng et al.
7,454,510 B2	11/2008	Kleyman et al.		8,396,445 B2	3/2013	Crawford et al.
7,486,664 B2	2/2009	Swartz		8,410,907 B2	4/2013	Twitchell, Jr.
7,486,667 B2	2/2009	Feuer		8,417,791 B1	4/2013	Peretz et al.
7,486,684 B2	2/2009	Chu et al.		8,422,507 B2	4/2013	Björzell et al.
7,512,117 B2	3/2009	Swartz		8,423,791 B1	4/2013	Yu et al.
7,565,131 B2	7/2009	Rollender		8,427,981 B2	4/2013	Wyss et al.
7,573,982 B2	8/2009	Breen et al.		8,437,340 B2	5/2013	James
7,580,886 B1	8/2009	Schulz		8,462,915 B2	6/2013	Breen et al.
7,587,036 B2	9/2009	Wood et al.		8,468,196 B1	6/2013	Roskind et al.
7,593,390 B2	9/2009	Lebizay		8,493,931 B1	7/2013	Nix
7,593,884 B2	9/2009	Rothman et al.		8,509,225 B2	8/2013	Grabelsky et al.
7,599,944 B2	10/2009	Gaurav et al.		8,526,306 B2	9/2013	Jungck et al.
7,639,792 B2	12/2009	Qiu et al.		8,532,075 B2	9/2013	Rassool et al.
7,644,037 B1	1/2010	Ostrovsky		8,537,805 B2	9/2013	Björzell et al.
7,647,500 B2	1/2010	Machiraju et al.		8,542,815 B2	9/2013	Perreault et al.
7,657,011 B1	2/2010	Zielinski et al.		8,543,477 B2	9/2013	Love et al.
7,664,495 B1	2/2010	Bonner et al.		8,594,298 B2	11/2013	Klein et al.
7,676,215 B2	3/2010	Chin et al.		8,599,747 B1	12/2013	Saleem et al.
7,676,431 B2	3/2010	O'Leary et al.		8,599,837 B2	12/2013	Kyle
7,680,114 B2	3/2010	Yazaki et al.		8,605,714 B2	12/2013	Lebizay
7,680,737 B2	3/2010	Smith et al.		8,605,869 B1	12/2013	Mobarak et al.
7,702,308 B2	4/2010	Rollender		8,607,323 B2	12/2013	Yuan
7,715,821 B2	5/2010	Rollender		8,611,354 B2	12/2013	Keränen et al.
7,734,544 B2	6/2010	Schleicher		8,625,578 B2	1/2014	Roy et al.
7,738,384 B2	6/2010	Pelletier		8,627,211 B2	1/2014	Kropivny
7,764,777 B2	7/2010	Wood et al.		8,630,234 B2	1/2014	Björzell et al.
7,764,944 B2	7/2010	Rollender		8,634,838 B2	1/2014	Hellwig et al.
7,765,261 B2	7/2010	Kropivny		8,675,566 B2	3/2014	Huttunen et al.
7,765,266 B2	7/2010	Kropivny		8,682,919 B1	3/2014	Golliher
7,774,711 B2 *	8/2010	Valeski	G06F 3/0481 715/745	8,702,505 B2	4/2014	Kropivny
7,797,459 B1	9/2010	Roy et al.		8,713,098 B1	4/2014	Adya et al.
7,882,011 B2	2/2011	Sandhu et al.		8,724,643 B2	5/2014	Feuer
7,894,441 B2	2/2011	Yazaki et al.		8,749,610 B1	6/2014	Gossweiler et al.
7,899,742 B2	3/2011	Berkert et al.		8,750,290 B2	6/2014	Vance et al.
				8,763,081 B2	6/2014	Bogdanovic et al.
				8,767,717 B2	7/2014	Siegel et al.
				8,768,951 B2	7/2014	Crago
				8,774,171 B2	7/2014	Mitchell
				8,774,378 B2	7/2014	Björzell et al.
				8,774,721 B2	7/2014	Hertel et al.

US 9,537,762 B2

Page 4

(56)

References Cited

U.S. PATENT DOCUMENTS

8,780,703 B1	7/2014	Eidelson et al.	2006/0013266 A1	1/2006	Vega-Garcia et al.
8,792,374 B1	7/2014	Jain et al.	2006/0030290 A1	2/2006	Rudolf et al.
8,792,905 B1	7/2014	Li et al.	2006/0036522 A1	2/2006	Perham
8,804,705 B2	8/2014	Fangman et al.	2006/0072547 A1	4/2006	Florkey et al.
8,805,345 B2	8/2014	Ling et al.	2006/0072550 A1	4/2006	Davis et al.
8,810,392 B1	8/2014	Teller et al.	2006/0078094 A1	4/2006	Breen et al.
8,819,566 B2	8/2014	Mehin et al.	2006/0093135 A1	5/2006	Fiatal et al.
8,837,360 B1	9/2014	Mishra et al.	2006/0095320 A1	5/2006	Jones
8,838,539 B1	9/2014	Ashcraft et al.	2006/0109960 A1	5/2006	D'Evelyn et al.
8,848,887 B2	9/2014	Willman et al.	2006/0111116 A1	5/2006	Palmer et al.
8,862,701 B2	10/2014	Havrilik	2006/0116892 A1	6/2006	Grimes et al.
8,885,609 B2	11/2014	Nix	2006/0142011 A1	6/2006	Kallio
8,903,051 B2	12/2014	Li et al.	2006/0146797 A1	7/2006	Lebizay
8,903,360 B2	12/2014	Celi, Jr. et al.	2006/0153342 A1	7/2006	Sasaki
8,909,556 B2	12/2014	Huxham	2006/0160565 A1	7/2006	Singh et al.
8,938,209 B2	1/2015	Crawford et al.	2006/0177035 A1	8/2006	Cope et al.
8,938,534 B2	1/2015	Le et al.	2006/0189303 A1	8/2006	Rollender
8,948,061 B2	2/2015	Sridhar	2006/0195398 A1	8/2006	Dheer et al.
8,972,612 B2	3/2015	Le et al.	2006/0205383 A1	9/2006	Rollender et al.
8,982,719 B2	3/2015	Seetharaman et al.	2006/0209768 A1	9/2006	Yan et al.
8,995,428 B2	3/2015	Haster	2006/0233317 A1	10/2006	Coster et al.
9,003,306 B2	4/2015	Mehin et al.	2006/0248186 A1	11/2006	Smith
9,137,385 B2	9/2015	Björzell et al.	2006/0251056 A1	11/2006	Feuer
9,143,608 B2	9/2015	Björzell et al.	2006/0258328 A1	11/2006	Godoy
9,154,417 B2	10/2015	Huttunen et al.	2006/0264200 A1	11/2006	Laiho et al.
9,179,005 B2	11/2015	Perreault et al.	2006/0268921 A1	11/2006	Ekstrom et al.
2001/0027478 A1	10/2001	Meier et al.	2006/0281437 A1	12/2006	Cook
2001/0052081 A1	12/2001	McKibben et al.	2007/0016524 A1	1/2007	Diveley et al.
2002/0002041 A1	1/2002	Lindgren et al.	2007/0036139 A1	2/2007	Patel et al.
2002/0018445 A1	2/2002	Kobayashi	2007/0036143 A1	2/2007	Alt et al.
2002/0051518 A1	5/2002	Bondy et al.	2007/0047548 A1	3/2007	Yazaki et al.
2002/0057764 A1	5/2002	Salvucci et al.	2007/0053382 A1	3/2007	Bevan et al.
2002/0116464 A1	8/2002	Mak	2007/0064919 A1	3/2007	Chen et al.
2002/0122391 A1	9/2002	Shalit	2007/0092070 A1	4/2007	Croy et al.
2002/0141352 A1	10/2002	Fangman et al.	2007/0112964 A1	5/2007	Guedalia et al.
2003/0012196 A1	1/2003	Ramakrishnan	2007/0115935 A1	5/2007	Qiu et al.
2003/0043974 A1*	3/2003	Emerson, III	2007/0121593 A1	5/2007	Vance et al.
		H04L 29/06	2007/0127676 A1	6/2007	Khadri
		379/88.13	2007/0174469 A1	7/2007	Andress et al.
			2007/0217354 A1	9/2007	Buckley
			2007/0220038 A1	9/2007	Crago
			2007/0253418 A1	11/2007	Shiri et al.
			2007/0253429 A1	11/2007	James
2003/0095539 A1	5/2003	Feuer	2007/0263609 A1	11/2007	Mitchell
2003/0179747 A1	9/2003	Pyke et al.	2007/0297376 A1	12/2007	Gass
2003/0200311 A1	10/2003	Baum	2008/0013523 A1	1/2008	Nambakkam
2003/0219103 A1	11/2003	Rao et al.	2008/0037715 A1	2/2008	Prozeniuk et al.
2004/0022237 A1	2/2004	Elliot et al.	2008/0056235 A1	3/2008	Albina et al.
2004/0034793 A1	2/2004	Yuan	2008/0056243 A1	3/2008	Roy et al.
2004/0157629 A1	8/2004	Kallio et al.	2008/0056302 A1	3/2008	Erdal et al.
2004/0165709 A1	8/2004	Pence et al.	2008/0063153 A1	3/2008	Krivorot et al.
2004/0181599 A1	9/2004	Kreusch et al.	2008/0160953 A1	7/2008	Mia et al.
2004/0202295 A1	10/2004	Shen et al.	2008/0166999 A1	7/2008	Guedalia et al.
2004/0203565 A1	10/2004	Chin et al.	2008/0167019 A1	7/2008	Guedalia et al.
2004/0203582 A1	10/2004	Dorenbosch et al.	2008/0167020 A1	7/2008	Guedalia et al.
2004/0240439 A1	12/2004	Castleberry et al.	2008/0167039 A1	7/2008	Guedalia et al.
2004/0255126 A1	12/2004	Reith	2008/0187122 A1	8/2008	Baker
2005/0007999 A1	1/2005	Becker et al.	2008/0188198 A1	8/2008	Patel et al.
2005/0025043 A1	2/2005	Mussman et al.	2008/0188227 A1	8/2008	Guedalia et al.
2005/0063519 A1	3/2005	James	2008/0205378 A1	8/2008	Wyss et al.
2005/0069097 A1*	3/2005	Hanson	2008/0310599 A1	12/2008	Purnadi et al.
		H04M 3/42153	2009/0003535 A1	1/2009	Grabelsky et al.
		379/88.12	2009/0017842 A1	1/2009	Fukasaku
			2009/0028146 A1	1/2009	Kleyman et al.
2005/0083911 A1	4/2005	Grabelsky et al.	2009/0129566 A1	5/2009	Feuer
2005/0094651 A1	5/2005	Lutz et al.	2009/0135724 A1	5/2009	Zhang et al.
2005/0131813 A1	6/2005	Gallagher et al.	2009/0135735 A1	5/2009	Zhang et al.
2005/0169248 A1	8/2005	Truesdale et al.	2009/0141883 A1	6/2009	Bastien
2005/0171898 A1	8/2005	Bishop et al.	2009/0213839 A1	8/2009	Davis et al.
2005/0174937 A1	8/2005	Scoggins et al.	2009/0214000 A1	8/2009	Patel et al.
2005/0177843 A1	8/2005	Williams	2009/0238168 A1	9/2009	Lavoie et al.
2005/0188081 A1	8/2005	Gibson et al.	2009/0268615 A1	10/2009	Pelletier
2005/0190892 A1	9/2005	Dawson et al.	2009/0292539 A1	11/2009	Jaroker
2005/0192897 A1	9/2005	Rogers et al.	2009/0296900 A1	12/2009	Breen et al.
2005/0192901 A1	9/2005	McCoy et al.	2009/0325558 A1	12/2009	Pridmore et al.
2005/0198499 A1	9/2005	Salapaka et al.	2010/0002701 A1	1/2010	Hsieh et al.
2005/0202799 A1	9/2005	Rollender	2010/0008345 A1	1/2010	Lebizay
2005/0222952 A1	10/2005	Garrett et al.	2010/0039946 A1	2/2010	Imbimbo et al.
2005/0267842 A1	12/2005	Weichert et al.	2010/0083364 A1	4/2010	Fernández Gutierrez
2005/0287979 A1	12/2005	Rollender			
2006/0006224 A1	1/2006	Modi			
2006/0007940 A1	1/2006	Sollée et al.			

US 9,537,762 B2

Page 5

(56)

References Cited

U.S. PATENT DOCUMENTS

2010/0086119 A1 4/2010 De Luca et al.
 2010/0105379 A1 4/2010 Bonner et al.
 2010/0114896 A1 5/2010 Clark et al.
 2010/0115018 A1 5/2010 Yoon et al.
 2010/0142382 A1 6/2010 Jungck et al.
 2010/0150138 A1 6/2010 Björnsell et al.
 2010/0150328 A1 6/2010 Perreault et al.
 2010/0172345 A1 7/2010 Björnsell et al.
 2010/0177671 A1 7/2010 Qiu et al.
 2010/0220852 A1 9/2010 Willman et al.
 2010/0233991 A1 9/2010 Crawford et al.
 2010/0246589 A1 9/2010 Pelletier
 2010/0272242 A1 10/2010 Croy et al.
 2010/0278534 A1 11/2010 Leiden et al.
 2010/0316195 A1 12/2010 Di Serio et al.
 2011/0013541 A1 1/2011 Croy et al.
 2011/0072095 A1 3/2011 Havriluk
 2011/0122827 A1 5/2011 Björnsell et al.
 2011/0153809 A1 6/2011 Ghanem et al.
 2011/0167164 A1 7/2011 Fernández Gutierrez
 2011/0176541 A1 7/2011 James
 2011/0201321 A1 8/2011 Bonner
 2011/0208859 A1 8/2011 Fernández Gutierrez
 2011/0235543 A1 9/2011 Seetharaman et al.
 2011/0255553 A1 10/2011 Bobba et al.
 2011/0261717 A1 10/2011 Akuzuwa et al.
 2011/0267986 A1 11/2011 Grabelsky et al.
 2011/0273526 A1 11/2011 Mehin et al.
 2011/0276903 A1 11/2011 Mehin et al.
 2011/0276904 A1 11/2011 Mehin et al.
 2011/0292929 A1 12/2011 Haster
 2012/0014383 A1 1/2012 Geromel et al.
 2012/0089717 A1 4/2012 Chen
 2012/0096145 A1 4/2012 Le et al.
 2012/0099599 A1 4/2012 Keränen et al.
 2012/0113981 A1 5/2012 Feuer
 2012/0155333 A1 6/2012 Yoon et al.
 2012/0170574 A1 7/2012 Huttunen et al.
 2012/0195236 A1 8/2012 Knight
 2012/0195415 A1 8/2012 Wyss et al.
 2012/0227101 A1 9/2012 Yuan
 2012/0250624 A1 10/2012 Lebizay
 2012/0259975 A1 10/2012 Le et al.
 2012/0270554 A1 10/2012 Hellwig et al.
 2012/0282881 A1 11/2012 Mitchell
 2012/0314699 A1 12/2012 Qiu et al.
 2013/0039226 A1 2/2013 Sridhar
 2013/0097308 A1 4/2013 Le et al.
 2013/0114589 A1 5/2013 Fangman et al.
 2013/0128879 A1 5/2013 Kyle
 2013/0148549 A1 6/2013 Crawford et al.
 2013/0173534 A1 7/2013 Nelakonda et al.
 2013/0223276 A1 8/2013 Padgett
 2013/0229950 A1 9/2013 Björnsell et al.
 2013/0237198 A1 9/2013 Vashi et al.
 2013/0254301 A1 9/2013 Lin et al.
 2013/0272297 A1 10/2013 Breen et al.
 2013/0281147 A1 10/2013 Denman et al.
 2013/0287006 A1 10/2013 Nix
 2013/0310002 A1 11/2013 Cell, Jr. et al.
 2013/0318166 A1 11/2013 Jungck et al.
 2013/0329722 A1 12/2013 Perreault et al.
 2013/0329864 A1 12/2013 Björnsell et al.
 2014/0010119 A1 1/2014 Björnsell et al.
 2014/0016764 A1 1/2014 Björnsell et al.
 2014/0024367 A1 1/2014 Björnsell et al.
 2014/0101749 A1 4/2014 Yuan
 2014/0141884 A1 5/2014 Kropivny
 2014/0153477 A1 6/2014 Huttunen et al.
 2014/0211789 A1 7/2014 Feuer
 2014/0215642 A1 7/2014 Huxham
 2014/0220944 A1 8/2014 Balasubramanian
 2014/0244393 A1 8/2014 Rimmer et al.
 2014/0247730 A1 9/2014 Thota et al.
 2014/0269624 A1 9/2014 Khay-Ibbat et al.

2014/0307858 A1 10/2014 Li et al.
 2014/0321333 A1 10/2014 Björnsell et al.
 2014/0324969 A1 10/2014 Riddle
 2014/0337961 A1 11/2014 Chien et al.
 2014/0337962 A1 11/2014 Brandstatter
 2014/0349602 A1 11/2014 Majumdar et al.
 2015/0327320 A1 11/2015 Huttunen et al.
 2015/0358470 A1 12/2015 Björnsell et al.
 2016/0006882 A1 1/2016 Björnsell et al.
 2016/0028619 A1 1/2016 Perreault et al.

FOREIGN PATENT DOCUMENTS

CA 2 218 218 A1 10/1997
 CA 2249668 A1 4/1999
 CA 2 299 037 A1 8/2000
 CA 2 437 275 A1 10/2002
 CA 2 598 200 A1 2/2008
 CA 2668025 A1 5/2008
 CA 2670510 A1 6/2008
 CA 2 681 984 A1 10/2008
 CA 2 690 236 A1 12/2008
 CA 2 659 007 A1 9/2009
 CA 2732148 A1 2/2010
 CA 2 778 905 A1 8/2010
 CA 2812174 A1 3/2011
 CN 1498029 A 5/2004
 CN 1498482 A 5/2004
 CN 1668137 A 9/2005
 CN 1274114 C 9/2006
 CN 101005503 A 7/2007
 CN 101069390 A 11/2007
 CN 101095329 A 12/2007
 CN 101584150 A 11/2009
 CN 101584166 A 11/2009
 CN 101605342 A 12/2009
 CN 1498029 B 5/2010
 CN 101772929 A 7/2010
 CN 101069390 B 12/2010
 CN 102137024 A 7/2011
 CN 102457494 A 5/2012
 CN 102484656 A 5/2012
 CN 102572123 A 7/2012
 CN 101095329 B 10/2012
 CN 101605342 B 12/2012
 CN 102833232 A 12/2012
 CN 101005503 B 1/2013
 CN 101772929 B 7/2014
 CN 102457494 B 10/2014
 DE 602 01 827 T2 11/2005
 DE 11 2005 003 306 T5 1/2008
 DE 601 33 316 T2 7/2008
 DE 603 17 751 T2 11/2008
 EP 0 841 832 A2 5/1998
 EP 0 841 832 A3 5/1999
 EP 1 032 224 A2 8/2000
 EP 1 032 224 A3 8/2000
 EP 1 244 250 A1 9/2002
 EP 1 266 516 A2 12/2002
 EP 1 362 456 A2 11/2003
 EP 1 371 173 A1 12/2003
 EP 1 389 862 A1 2/2004
 EP 1 411 743 A1 4/2004
 EP 1 389 862 B1 11/2004
 EP 1 526 697 A2 4/2005
 EP 1 362 456 A4 5/2005
 EP 1 575 327 A1 9/2005
 EP 1 610 583 A1 12/2005
 EP 1 526 697 A3 3/2006
 EP 1 721 446 A1 11/2006
 EP 1 829 300 A1 9/2007
 EP 1 371 173 B1 11/2007
 EP 1 411 743 B1 11/2007
 EP 1 362 456 B1 3/2008
 EP 1 974 304 A2 10/2008
 EP 1 974 304 A4 10/2008
 EP 1 610 583 B1 8/2009
 EP 2 084 868 8/2009
 EP 2 090 024 8/2009

US 9,537,762 B2

Page 6

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	2 127 232	A1	12/2009
EP	2 165 489	A1	3/2010
EP	2 215 755	A1	8/2010
EP	2 227 048	A1	9/2010
EP	2 127 232	A4	3/2011
EP	2 165 489	A4	3/2011
EP	2 311 292		4/2011
EP	1 829 300	A4	5/2012
EP	2 449 749	A1	5/2012
EP	2 478 678		7/2012
EP	2 215 755	A4	10/2012
EP	1 829 300	B1	11/2012
EP	2 449 749	B1	3/2014
EP	1 266 516	B1	5/2014
ID	W-00200902627		9/2009
IN	24/2009		6/2009
IN	29/2009		7/2009
JP	2011-199384	A	10/2011
KR	10-2009-0086428	A	8/2009
KR	10-2009-0095621	A	9/2009
MX	2009004811	A	8/2009
MX	2009005751	A	8/2009
SG	151991	A1	6/2009
SG	152752	A1	6/2009
SG	155474		10/2009
WO	WO 01/50693	A1	7/2001
WO	WO 01/69899	A2	9/2001
WO	WO 01/69899	A3	9/2001
WO	WO 01/80587	A1	10/2001
WO	WO 01/89145	A2	11/2001
WO	WO 02/082728	A1	10/2002
WO	WO 02/082782	A2	10/2002
WO	WO 02/082782	A3	10/2002
WO	WO 03/027801	A2	4/2003
WO	WO 2005/084002	A1	9/2005
WO	WO 2006/067269	A1	6/2006
WO	WO 2006/072099	A1	7/2006
WO	WO 2006/078175	A2	7/2006
WO	WO 2006/078175	A3	7/2006
WO	WO 2007/044454	A2	4/2007
WO	WO 2007/056158	A2	5/2007
WO	WO 2007/087077	A2	8/2007
WO	WO 2007/087077	A3	8/2007
WO	WO 2008/027065	A1	3/2008
WO	WO 2008/052340	A1	5/2008
WO	WO 2008/064481	A1	6/2008
WO	WO 2008/085614	A2	7/2008
WO	WO 2008/085614	A3	7/2008
WO	WO 2008/086350	A2	7/2008
WO	WO 2008/086350	A3	7/2008
WO	WO 2008/103652	A1	8/2008
WO	WO 2008/116296	A1	10/2008
WO	WO 2008/085614	A8	12/2008
WO	WO 2008/151406	A1	12/2008
WO	WO 2008/151406	A8	12/2008
WO	WO 2009/070202	A1	6/2009
WO	WO 2009/070278	A1	6/2009
WO	WO 2010/012090	A2	2/2010
WO	WO 2011/000405	A1	1/2011
WO	WO 2011/032256	A1	3/2011
WO	WO 2013/013189	A2	1/2013
WO	WO 2013/120069	A1	8/2013
WO	WO 2014/066155	A2	5/2014
WO	WO 2014/117599	A1	8/2014
WO	WO 2014/166258	A1	10/2014

OTHER PUBLICATIONS

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 9,179,005; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Nov. 3, 2015; Application Filed: Aug. 13, 2013; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages

for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. VoIP-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated Jun. 15, 2016. 67 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 8,542,815; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Sep. 24, 2013; Application Filed: Nov. 1, 2007; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Technical Report, "3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Study into routing of MT-SMs via the HPLMN (Release 7)," 3GPP TR 23,840 V0.1.0 (Feb. 2006), 13 pages.

Communication for European Patent Application No. EP 07 816 106.4—Invitation pursuant to Article 94(3) and Rule 71(1) EPC dated Apr. 15, 2016. All pages.

Canadian Office Action dated Jun. 8, 2016 for Canadian Patent Application No. CA 2,916,217. All pages.

Document Title: Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc., Petitioner v. VoIP-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Dated May 24, 2016. 64 sheets.

Document Title: Declaration of Michael Caloyannides; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc., Petitioner v. VoIP-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed May 23, 2016; Filed May 24, 2016. 84 sheets.

Document Title: Public Switched Telephone Networks: A Network Analysis of Emerging Networks; Daniel Livengood, Jijun Lin and Chintan Vaishnav; Engineering Systems Division; Massachusetts Institute of Technology; Submitted May 16, 2006; To Dan Whitney, Joel Moses and Chris Magee. 27 sheets.

Document Title: A Brief History of VoIP; Document One—The Past; Joe Hallock; joe@sitedifference.com; date on cover page: Nov. 26, 2004; Evolution and Trends in Digital Media Technologies—COM 538; Masters of Communication in Digital Media; University of Washington. 17 sheets.

Document Title: Petitioner's Voluntary Interrogatory Responses; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc., Petitioner v. VoIP-Pal.com Inc.*, Patent Owner; IPR20161082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed and Filed not later than May 24, 2016. 8 sheets.

Document Title: Voip-Pal, The World is Calling!, "Over \$7 Billion in Lawsuits Filed by Voip-Pal.com Inc. vs Apple, Verizon and AT&T for Various Patent Infringements," *Business Wire*, A Berkshire Hathaway Company, Feb. 11, 2016. 2 sheets.

Canadian Office Action dated Mar. 3, 2016 for Canadian Patent Application No. CA 2,670,510.

Patent Owner's Preliminary Response, Case No. IPR2016-01082, U.S. Pat. No. 8,542,815, *Unified Patents Inc., Petitioner, v. VoIP-Pal.com Inc.*, Patent Owner, Filing Date: Aug. 26, 2016, 80 pages. Voip-Pal.com, Inc. Exhibit 2001, Comparison of portions of Petition with portions of Declaration, IPR2016-01082, *Unified Patents v. Voip-Pal*, Filing Date: Aug. 26, 2016, 9 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, *Apple Inc., Petitioner, v. VoIP-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 19, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01201, *Apple v. Voip-Pal*, Filing Date: Sep. 19, 2016, 19 pages.

US 9,537,762 B2

Page 7

(56) References Cited

OTHER PUBLICATIONS

Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 21, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01198, *Apple v. Voip-Pal*, Filing Date: Sep. 21, 2016, 21 pages.

Complaint for Patent Infringement, United States District Court, District of Nevada, Case No. 2:16-cv-2338, *VoIP-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendant, Filed Oct. 6, 2016, 8 pages.

Civil Docket for Case #: 2:16-cv-02338-RFB-CWH, United States District Court, District of Nevada (Las Vegas), *VoIP-Pal.com, Inc. v. Twitter, Inc.*, Date Filed: Oct. 6, 2016, 2 pages.

Table of Exhibits, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, 1 page.

Exhibit A, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 8,542,815 B2, Issued Sep. 24, 2013, to Clay Perrault et al., 60 pages.

Exhibit B, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 9,179,005 B2, Issued Nov. 3, 2015, to Clay Perrault et al., 63 pages.

Exhibit C, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Letter dated Dec. 18, 2015 giving notice of U.S. Pat. Nos. 8,542,815 B2; 9,179,005 B2; and related Patents listed in Attachment A, 4 pages.

Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Asserted Claims and Infringement Conditions, United States District Court, District of Nevada, *VoIP-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendants, 6 pages.

Chart 1 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 1, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 8,542,815, United States District Court, District of Nevada, *VoIP-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendants, 20 pages.

Chart 2 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 2, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 9,179,005, United States District Court, District of Nevada, *VoIP-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendants, 28 pages.

Exhibit E, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, VPLM Active U.S. Patent Matters As of Oct. 1, 2016, 2 pages.

Exhibit F, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Twitter Royalty Monetization Analysis Overview, 4 pages.

Canadian Office Action dated Aug. 16, 2016 for Canadian Patent Application No. 2,681,984.

European Examination Report dated Aug. 29, 2016 for European Patent Application No. EP 07 855 436.7.

Communication under Rule 71(3) EPC—Intention to Grant—dated Oct. 14, 2016 for European Patent Application No. EP 07 816 106.4.

Document Title: Complaint for Patent Infringement [Jury Demand]; Case Title: *VoIP-Pal.com, Inc., a Nevada corporation*, Plaintiff, v. *Verizon Wireless Services, LLC, a Delaware limited liability corporation*; *Verizon Communications, Inc., a Delaware corporation*; *AT&T, Inc., a Delaware corporation*; *AT&T Corp., a Delaware corporation*; and DOES I through X, inclusive, Defendants; Case No: 2:16-CV-00271; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Exhibit E; Chart 1 to Exhibit E; Chart 2 to Exhibit E; Chart 3 to Exhibit E; Chart 4 to Exhibit E; Chart 5 to Exhibit E; Chart 6 to Exhibit E; Exhibit F; Chart 1 to Exhibit F; Chart 2 to Exhibit F; Chart 3 to Exhibit F; Chart 4 to Exhibit F; Chart 5 to Exhibit F; Chart 6 to Exhibit F; Exhibit G; Exhibit H; and Addendum I to Exhibit H.

Document Title: Complaint for Patent Infringement [Jury Demand]; Case Title: *VoIP-Pal.com, Inc., a Nevada corporation*,

Plaintiff, v. *Apple, Inc., a California corporation*; Defendants; Case No: 2:16-CV-00260; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Chart 1 to Exhibit D; Chart 2 to Exhibit D; Chart 3 to Exhibit D; Chart 4 to Exhibit D; Exhibit E; Exhibit F; and Addendum 1 to Exhibit F.

Letter dated Nov. 30, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Apple Inc. in the U.S.

Letter dated Dec. 1, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Verizon Communications in the U.S.

Letters dated Dec. 18, 2015, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Airtel in India; Alcatel-Lucent in France; Avaya Inc. in the U.S.; AT&T in the U.S.; Blackberry in Canada; Cable One in the U.S.; CenturyLink in the U.S.; Charter Communications in the U.S.; Cisco Systems in the U.S.; Comcast in the U.S.; Cox Communications in the U.S.; Cricket Wireless in the U.S.; Facebook in the U.S.; Freedom Pop in the U.S.; Frontier Communications in the U.S.; Google Inc. in the U.S.; HP in the U.S.; Juniper Networks in the U.S.; LoopPay, Inc. in the U.S.; Magic Jack in the U.S.; MetroPCS in the U.S.; Ooma in the U.S.; PayPal in the U.S.; Republic Wireless in the U.S.; Rok Mobile in the U.S.; Samsung Electronics—America in the U.S.; ShoreTel, Inc. in the U.S.; Siemens in Germany; Skype USA in the U.S.; Sprint in the U.S.; Square Cash in the U.S.; Suddenlink Communications in the U.S.; Talktone in the U.S.; Tango in the U.S.; Time Warner Cable in the U.S.; T-Mobile in the U.S.; Twitter in the U.S.; US Cellular in the U.S.; Venmo in the U.S.; Virgin Mobile USA in the U.S.; Vodafone in the UK; and Vonage in the U.S.

Letters dated Jan. 4, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Rogers Communications Inc. in Canada; Shaw Cable in Canada; Walmart in Alaska; and WIND Mobile in Canada.

Letters dated Jan. 21, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Alibaba (China) Co., Ltd in China; Comwave Telecommunications in Canada; and Intel in the U.S.

Letters dated Feb. 2, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Netflix Inc. in the U.S.; Skype Technologies in the U.S.; and WhatsApp Inc. in the U.S.

Canadian Office Action dated Nov. 18, 2015 for Canadian Patent Application No. CA 2,681,984.

Canadian Office Action dated Dec. 1, 2015 for Canadian Patent Application No. CA 2,812,174.

Canadian Office Action dated Jan. 22, 2016 for Canadian Patent Application No. CA 2,916,220.

European Examination Report dated Nov. 26, 2015 for European Patent Application No. EP 07 816 106.4.

Abrazhevich, Dennis. "Electronic Payment Systems: a User-Centered Perspective and Interaction Design," *Thesis under the auspices of the J.F. Schouten School for User-System Interaction Research*, Technische Universiteit Eindhoven, Netherlands, 2004, pages Cover page—p. 189.

(56) **References Cited**

OTHER PUBLICATIONS

- Baker et al., "Cisco Support for Lawful Intercept in IP Networks," Internet Draft—working document of the Internet Engineering Task Force (IETF), accessible at <http://www.ietf.org/ietf/lid-abstracts.txt>, Apr. 2003, expires Sep. 30, 2003, pp. 1-15.
- F. Baker et al. "RFC 3924—Cisco Architecture for Lawful Intercept in IP Networks." Oct. 2004.
- Bhushan et al., "Federated Accounting: Service Charging and Billing in a Business-to-Business Environment," 0-7803-6719-7/01, © 2001 IEEE, pp. 107-121.
- Cisco. "Lawful Intercept Requirements Summary." <http://www.faqs.org/rfcs/rfc3924.html>. Nov. 8, 2006.
- DOTS IP Address Validation, "Overview", http://www.serviceobjects.com/products/dots_ipgeo.asp; printed Jun. 21, 2012.
- DOTS Phone Exchange, "Overview", <http://www.serviceobjects.com/demos/PhoneExchangeDemo.asp> (URL no longer valid, current URL is <http://www.serviceobjects.com/products/phone/phone-exchange>); printed Jun. 21, 2012.
- ETSI Technical Specification. "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 5: Service-specific details for IP Multimedia Services." Apr. 2008, 25 pgs, v.2.3.1, France.
- Handley, M. et al. "RFC 2543—SIP: Session Initiation Protocol." Mar. 1999.
- IETF ENUM WG R STASTNY OEFEG Informational Numbering for VoIP and Other IP Communications: "Numbering for ViOP and other IP Communications, draft-stastny-enum-numbering-voip-00.txt", Oct. 1, 2003, Oct. 1, 2003, pp. 1-43, XP015035676, ISSN: 0000-0004.
- IP2Location, <http://www.ip2location.com/>; printed Jun. 20, 2012.
- ETSI TS 122 173 V12.7.0 (Oct. 2014) Digital cellular telecommunications system (Phase 2+); Technical Specification 8.2.2.3—Interoperability with PSTN/ISDN and mobile CS Networks, Contents and Forward, pp. 1-9; Sec. 8, pp. 14-17.
- Huitema et al., "Architecture for Internet Telephony Service for Residential Customers," Academic Paper for Bellcore, Mar. 2, 1999, pp. 1-14.
- Jajszczyk et al., "Emergency Calls in Flow-Aware Networks," *IEEE Communications Letters*, vol. 11, No. 9, Sep. 2007, pp. 753-755.
- Ketchpel et al. "U-PAI: A universal payment application interface" *Second USENIX Workshop on Electronic Commerce Proceedings*, Aug. 1996, pp. 1-17.
- Kim et al., "An Enhanced VoIP Emergency Services Prototype," *Proceedings of the 3rd International ISCRAM Conference (B. Van de Walle and M. Turoff, eds.)*, Newark, NJ (USA), May 2006, pp. 1-8.
- Kornfeld et al., "DVB-H and IP Datacast-Broadcast to Handheld Devices," *IEEE Transactions on Broadcasting*, vol. 53, No. 1, Mar. 2007, pp. 161-170.
- Kortebi et al., "SINR-Based Routing in Multi-Hop Wireless Networks to Improve VoIP Applications Support," 1-4244-0667-6/07, © 2007 IEEE, pp. 491-496.
- Lee et al., "VoIP Interoperation with KT-NGN," in *The 6th International Conference on Advanced Communication Technology*, Technical Proceedings, 2004, pp. 126-128, accompanied by Title and Contents—4 pages.
- Lin et al., "Effective VoIP Call Routing in WLAN and Cellular Integration," *IEEE Communications Letters*, vol. 9, No. 10, Oct. 2005, pp. 874-876.
- Lind AT&T S: "ENUM Call Flows for VoIP, Interworking; draft-lind-enum-callflows-03.txt", Feb. 1, 2002, No. 3, Feb. 1, 2002, pp. 1-17, XP015004214, ISSN: 0000-0004.
- List of North American Numbering Plan area codes, http://en.wikipedia.org/wiki/List_of_NANP_area_codes; printed Jun. 20, 2012.
- Ma et al., "Realizing MPEG4 Video Transmission Based on Mobile Station over GPRS," 0-7803-9335-X/05, © 2005 IEEE, pp. 1241-1244.
- Mintz-Habib et al., "A VoIP Emergency Services Architecture and Prototype," {mm2571,asr,hgs,xiaotaow}@cs.columbia.edu, 0-7803-9428-3/05, © 2005 IEEE, pp. 523-528.
- Moberg & Drummond, "MIME-Based Secure Peer-to-Peer Business Data Interchange Using HTTP, Applicability Statement 2 (AS2)," *Network Working Group, Request for Comments: 4130, Category: Standards Track*, Copyright © The Internet Society Jul. 2005, pp. 1-47.
- Munir, Muhammad Farukh, "Study of an Adaptive Scheme for Voice Transmission on IP in a Wireless Networking Environment 802.11e," *Dept. of Networks and Distributed Computing, Ecole Supérieure En Sciences Informatiques (ESSI), Université De Nice*, Jun. 2005, (pp. 1-35), Best Available Copy—pp. 1-11.
- Rosenberg, et al.; "RFC 3261—SIP: Session Initiation Protocol", Jun. 2002.
- Sippy SIP B2BUA. "About Sippy RTPproxy." <http://www.rtpproxy.org>. Jul. 15, 2009.
- Sripanidkulchai et al., "Call Routing Management in Enterprise VoIP Networks," Copyright 2007 ACM 978-1-59593-788-9/07/0008, 6 pages.
- Stallings, William, "The Session Initiation Protocol," *The Internet Protocol Journal*, vol. 6, No. 1, Mar. 2003, pp. 20-30.
- Thernelius, Fredrik, "SIP, NAT, and Firewalls," Master's Thesis, *ERICSSON, Department of Teleinformatics*, May 2000, pp. 1-69.
- Townsend, et al.; "RFC 2661—Layer Two Tunneling Protocol 'L2TP'", Aug. 1999.
- Trad et al., "Adaptive VoIP Transmission over Heterogeneous Wired/Wireless Networks," *V. Roca and F. Rousscau (Eds.): MIPS 2004, LNCS 3311*, pp. 25-36, 2004, © Springer-Verlag Berlin Heidelberg 2004.
- Wikipedia, "International mobile subscriber identity (IMSI)," <http://en.wikipedia.org/wiki/IMSI>, Jul. 16, 2013.
- Wikipedia, "Roaming," <http://en.wikipedia.org/wiki/Roaming>, Jul. 16, 2013.
- Yu et al., "Service-Oriented Issues: Mobility, Security, Charging and Billing Management in Mobile Next Generation Networks," *IEEE BeN2006*, 1-4244-0146-1/06, © 2006 IEEE, pp. 1-10.
- The International Search Report and Written Opinion of the International Searching Authority completed Jun. 6, 2008 for PCT Application No. PCT/CA2008/000545.
- The International Search Report and Written Opinion of the International Searching Authority completed Feb. 6, 2008 for PCT Application No. PCT/CA2007/001956.
- The International Preliminary Report on Patentability mailed May 14, 2009 for PCT Application No. PCT/CA2007/001956.
- The International Search Report and Written Opinion of the International Searching Authority completed Mar. 3, 2008 for PCT Application No. PCT/CA2007/002150.
- The International Preliminary Report on Patentability mailed Feb. 13, 2009 for PCT Application No. PCT/CA2007/002150.
- The International Preliminary Report on Patentability and Written Opinion of the International Searching Authority mailed Feb. 10, 2011 for PCT Application No. PCT/CA2009/001062, Feb. 1, 2011.
- The Written Opinion and International Search Report completed on Jun. 18, 2010 for PCT Application No. PCT/CA2009/001317.
- The International Search Report and Written Opinion mailed on Mar. 12, 2010 for PCT Application No. PCT/CA2009/001062.
- The International Preliminary Report on Patentability issued on Sep. 29, 2009 for PCT Application No. PCT/CA2008/000545.
- The International Preliminary Report on Patentability issued on Mar. 20, 2012 for PCT Application No. PCT/CA2009/001317.
- Extended European Search Report dated Nov. 2, 2012 for European Application No. EP 07 855 436.7.
- Extended European Search Report dated Dec. 20, 2013 for European Application No. EP 09 849 358.8.
- Extended European Search Report dated Apr. 16, 2014 for European Application No. EP 09 802 316.1.
- Supplementary European Search Report for European Application No. 07 816 106, dated Jun. 18, 2012.
- Supplementary European Search Report for European Application No. 07 816 106, dated Nov. 2, 2012.
- Canadian Office Action dated Jan. 27, 2015 for Canadian Application No. CA 2,681,984.
- Chinese Office Action dated Mar. 24, 2011 for Chinese Application No. CN 200780049791.5.

US 9,537,762 B2

Page 9

(56)

References Cited

OTHER PUBLICATIONS

Chinese Office Action dated Jun. 23, 2011 for Chinese Application No. CN 200780049136.X.

Indonesian Examination Report dated Jul. 5, 2012 for Indonesian Application No. W-00200901414.

Indonesian Examination Report dated Feb. 8, 2013 for Indonesian Application No. W-00200901165.

Mexican Exam Report dated Jul. 11, 2011 for Mexican Application No. MX/a/2009/004811.

Mexican Notice of Allowance dated Sep. 2, 2011 for Mexican Application No. MX/a/2009/005751.

First Examination Report dated Dec. 9, 2015, India Patent Application No. 1047/MUMNP/2009.

Decision: Denying Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Unified Patents Inc.*, Petitioner v. *Voip-Pal.Com Inc.*, Patent Owner, Case IPR2016-01082, U.S. Pat. No. 8,542,815 B2, Paper 8, Entered: Nov. 18, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.Com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Paper 6, Entered: Nov. 21, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.Com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Paper 6, Entered: Nov. 21, 2016.

Scheduling Order: United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.Com Inc.*, Patent Owner, Cases IPR2016-01201, IPR2016-01198, U.S. Pat. No. 8,542,815 B2, U.S. Pat. No. 9,179,005 B2, Paper 7, Entered: Nov. 21, 2016.

* cited by examiner

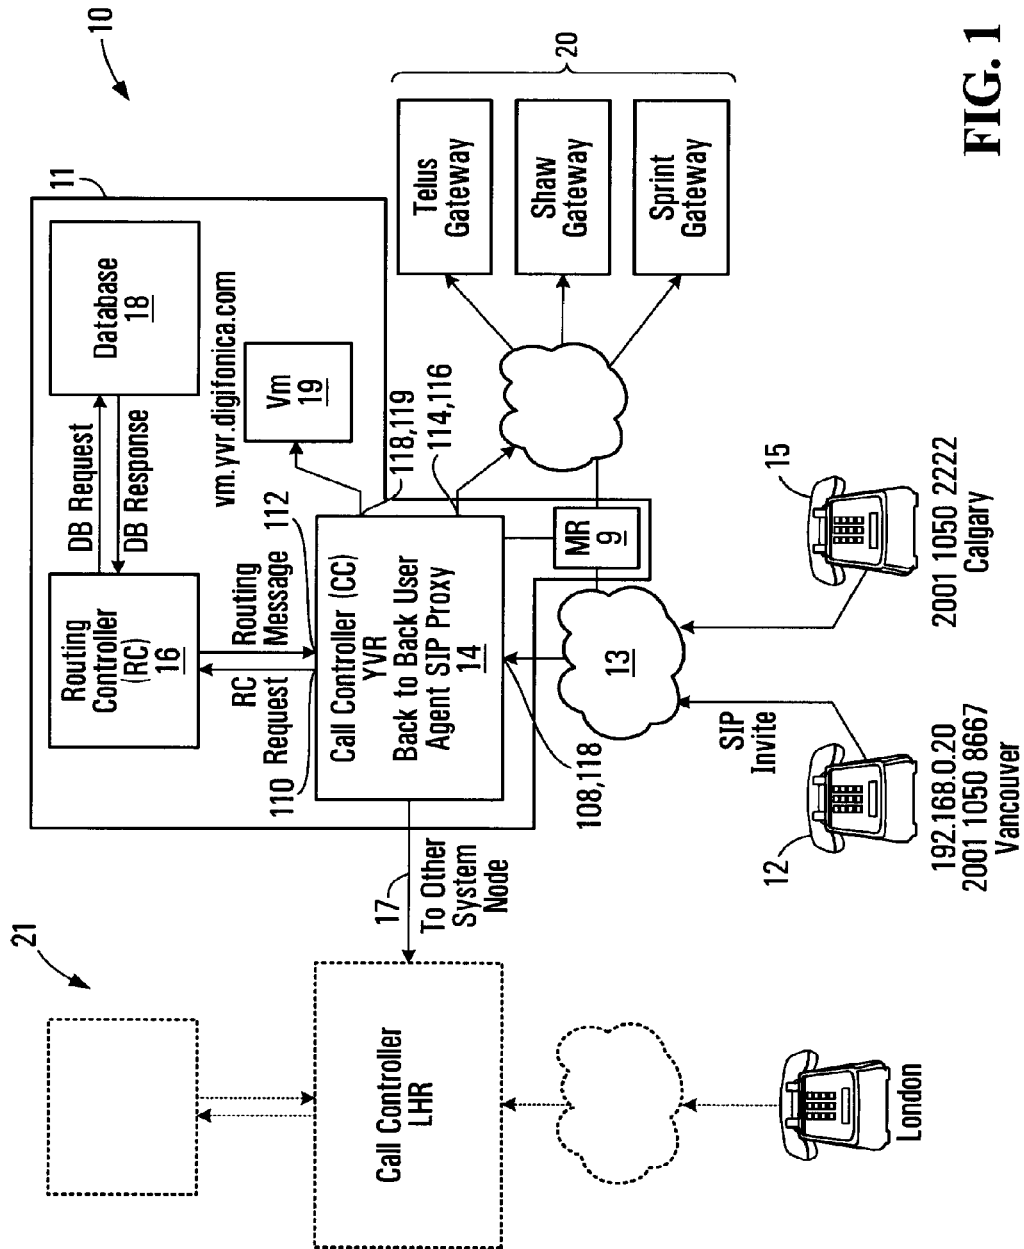


FIG. 1

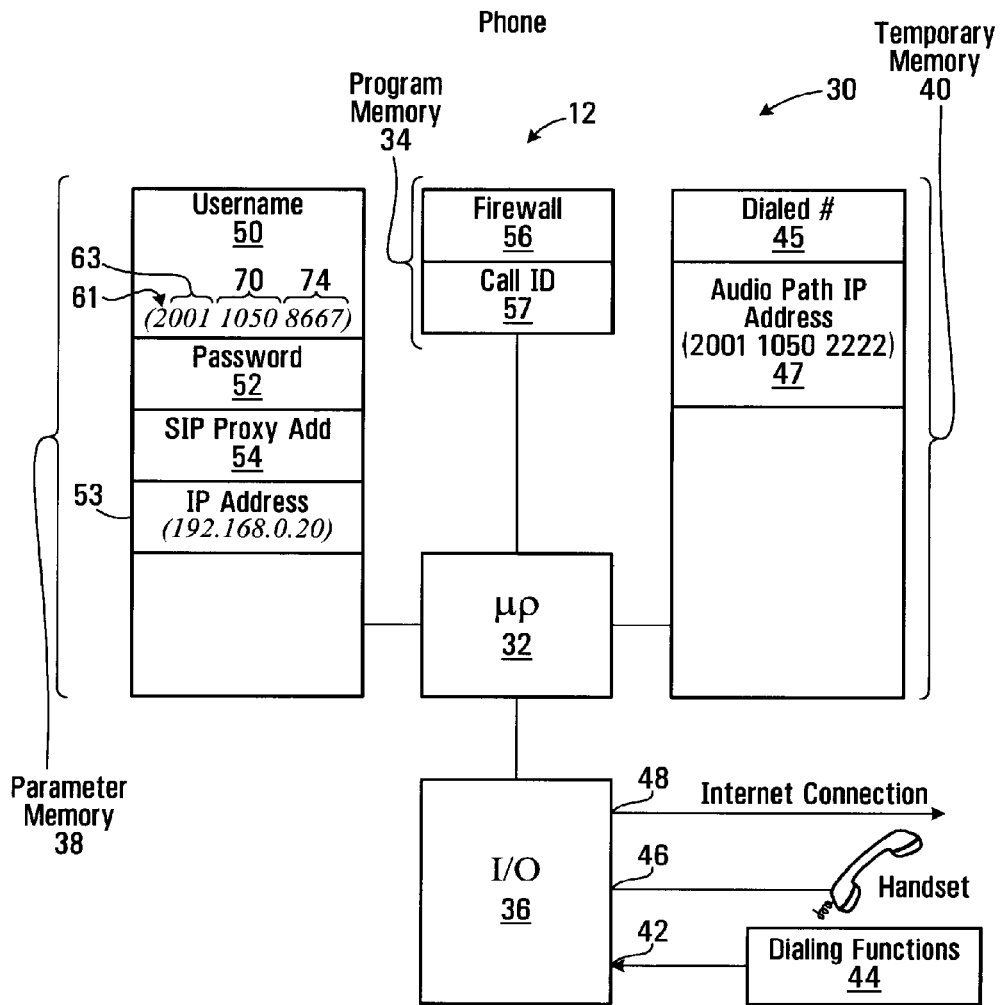


FIG. 2

SIP Invite Message

60 ~ Caller 2001 1050 8667
 62 ~ Callee 2001 1050 2222
 64 ~ Digest Parameters XXXXXX
 65 ~ Call ID FF10@ 192.168.0.20
 67 ~ IP Address 192.168.0.20
 69 ~ Caller UDP Port 1

FIG. 3

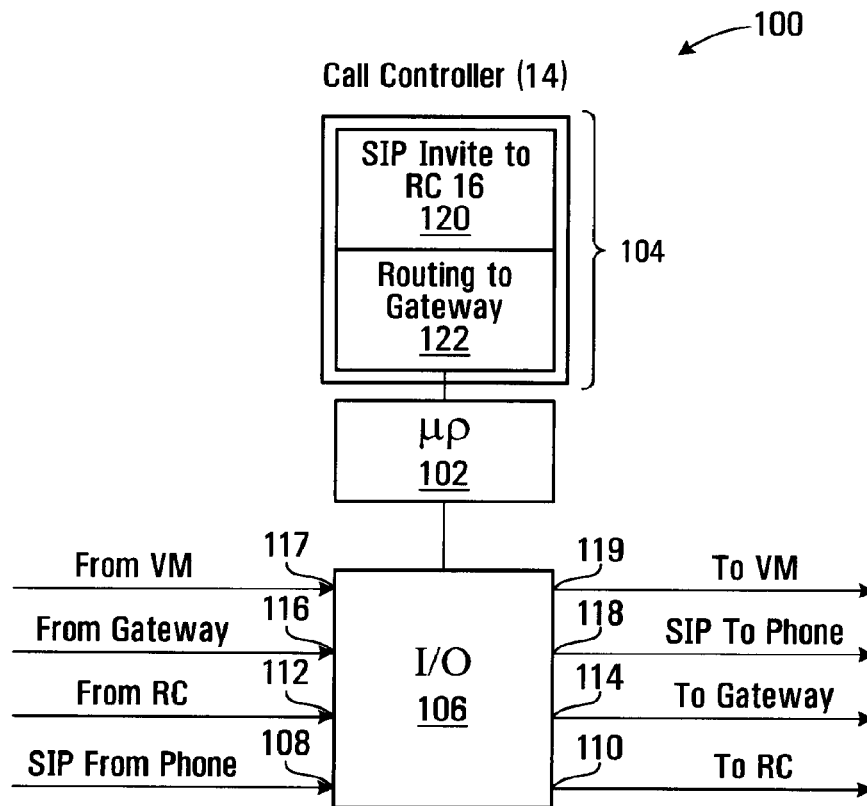


FIG. 4

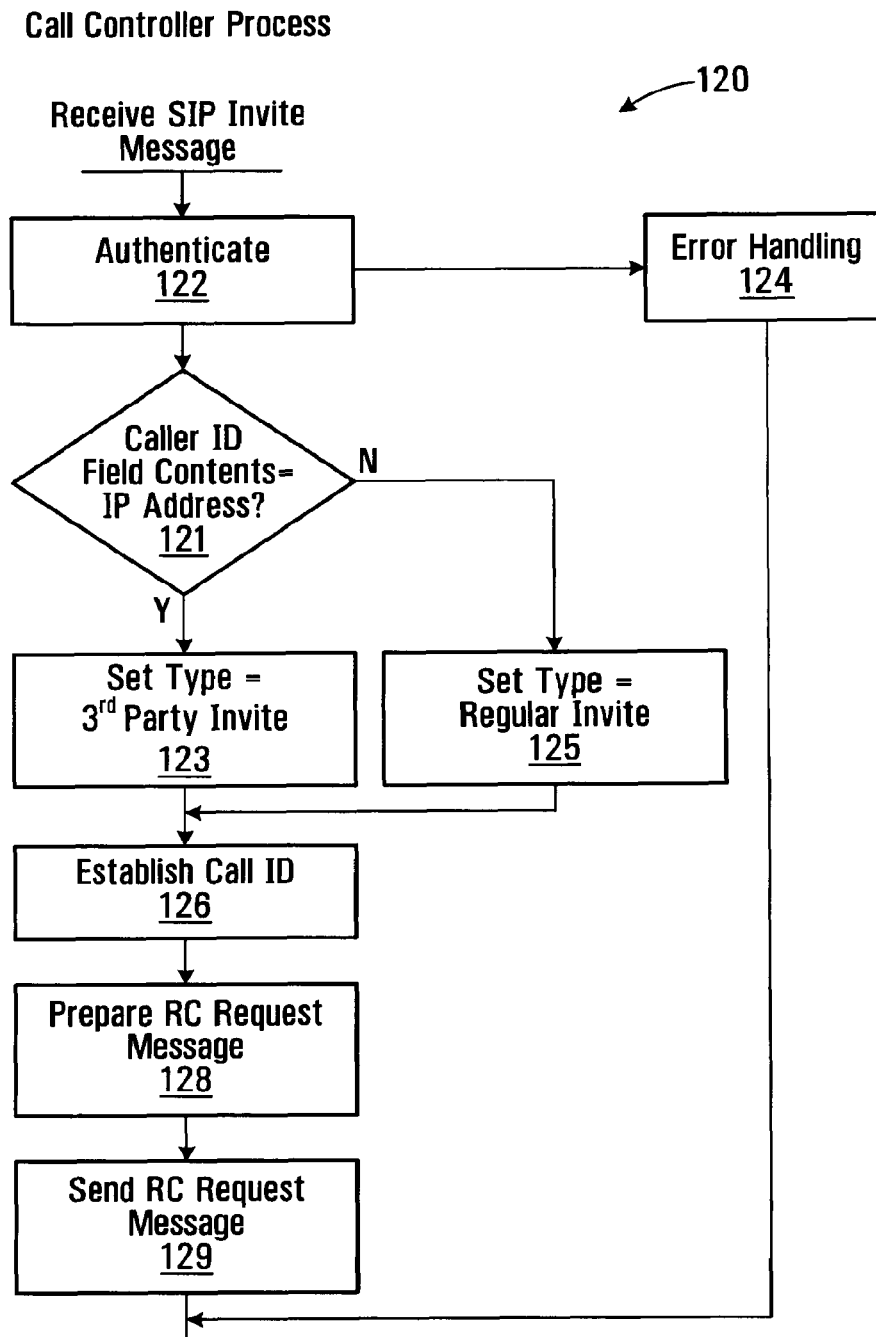


FIG. 5

150

RC Request Message

152 ~ Caller 2001 1050 8667
 154 ~ Callee 2001 1050 2222
 156 ~ Digest XXXXXX
 158 ~ Call ID FF10@ 192.168.0.20
 160 ~ Type Subscriber

FIG. 6

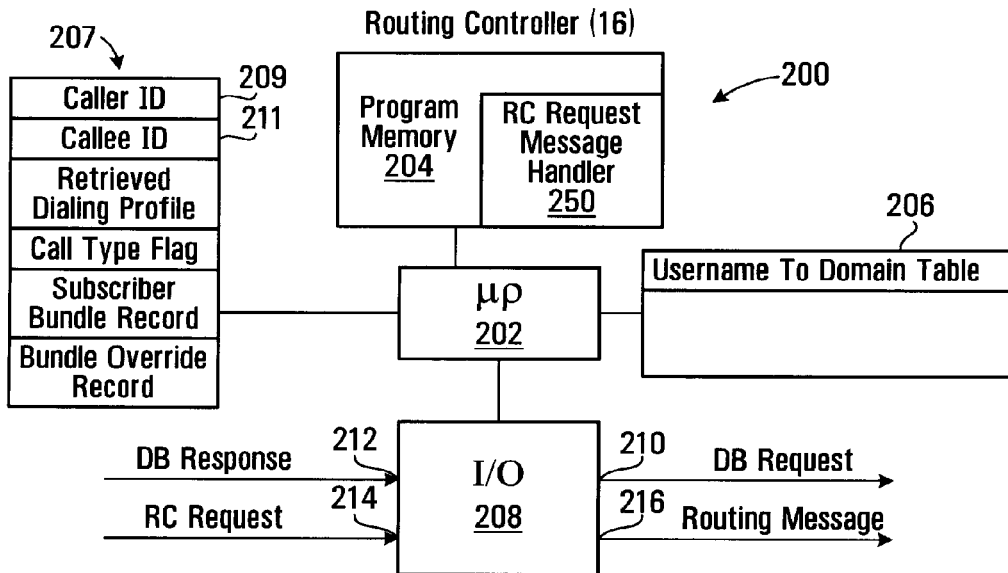


FIG. 7

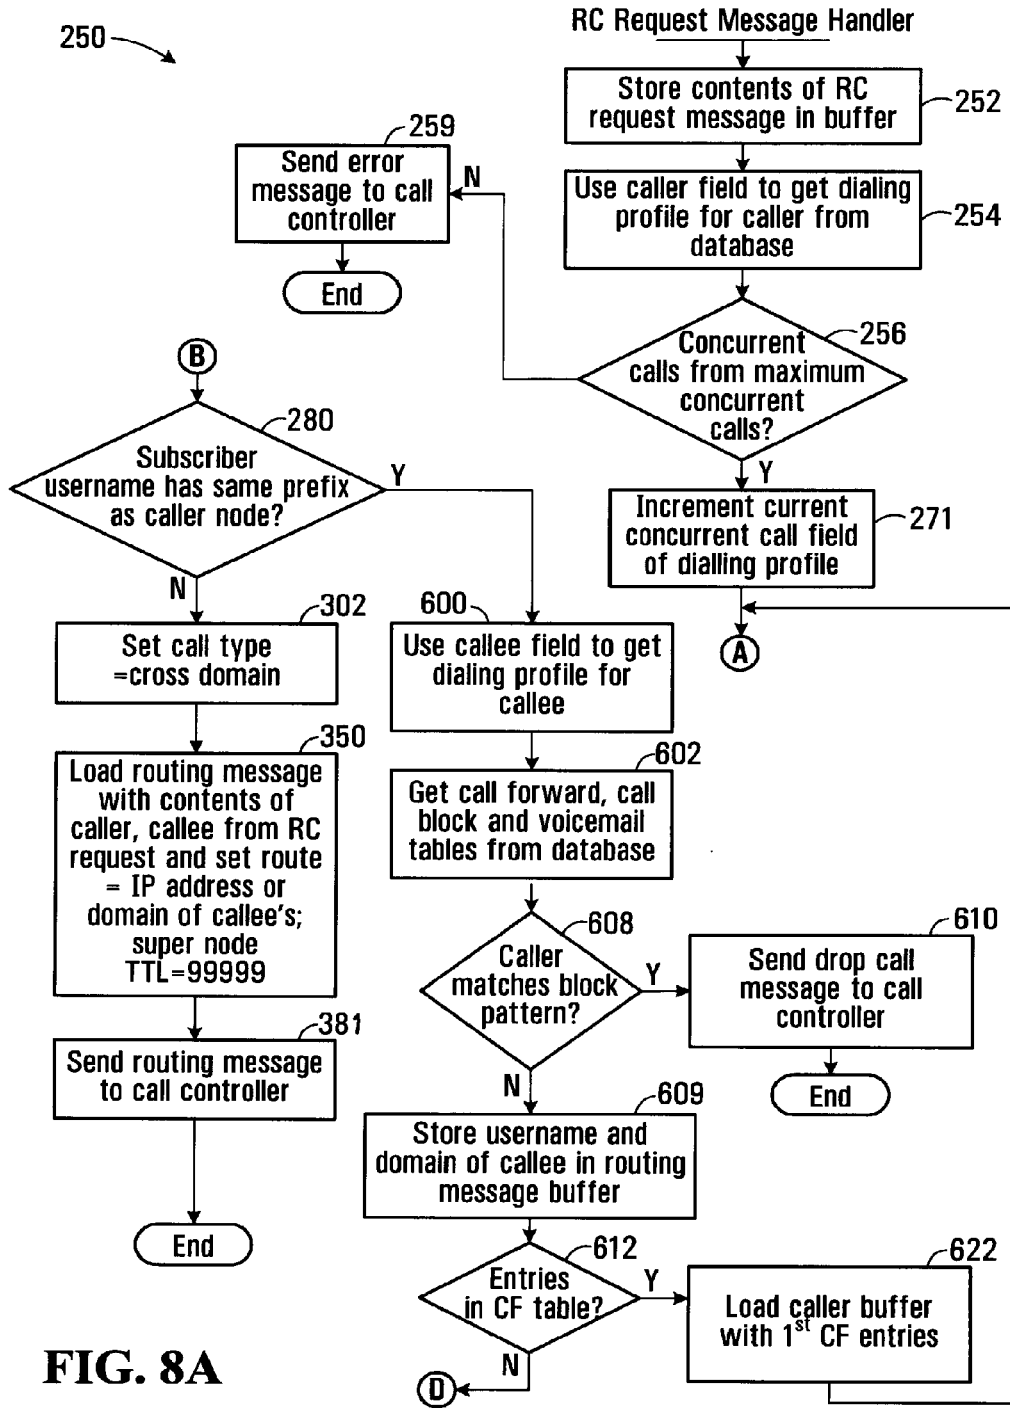
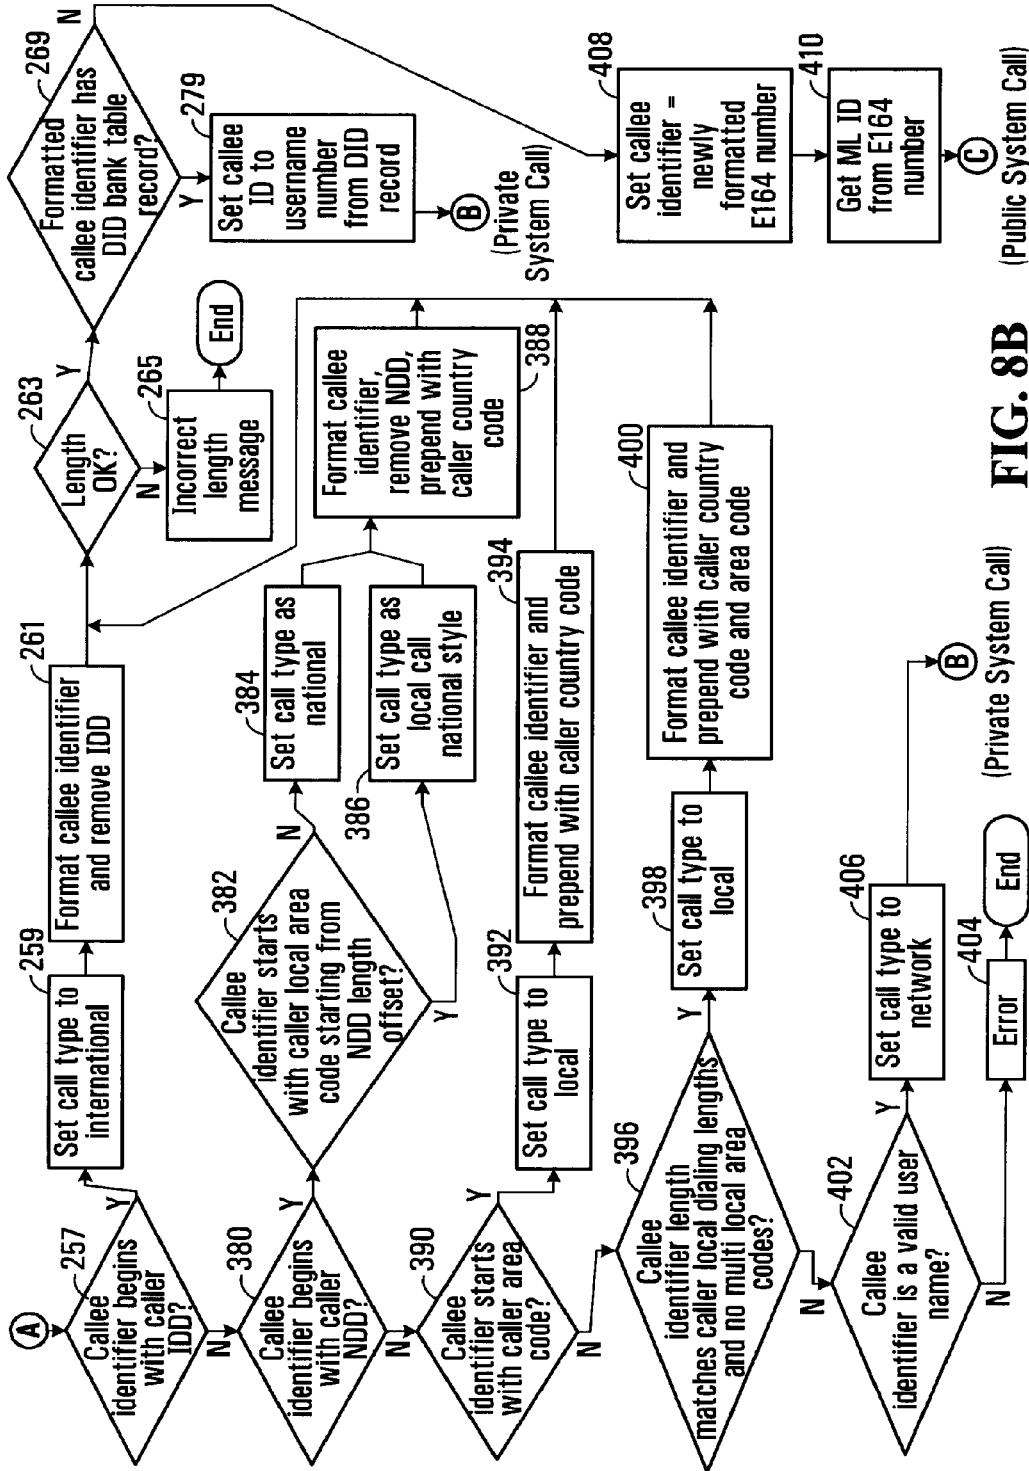


FIG. 8A



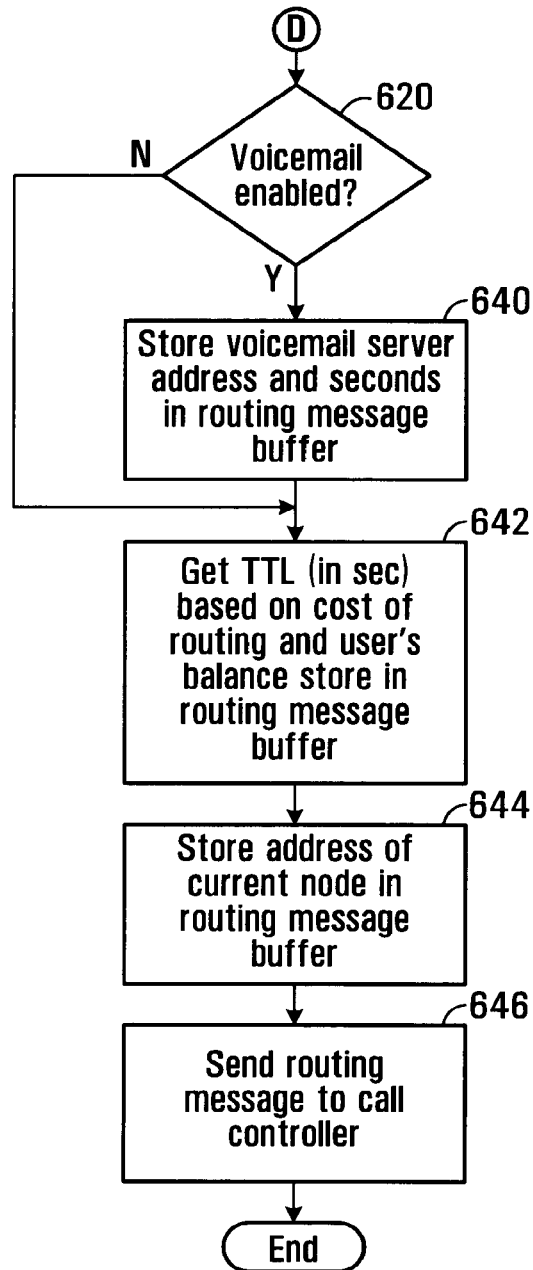
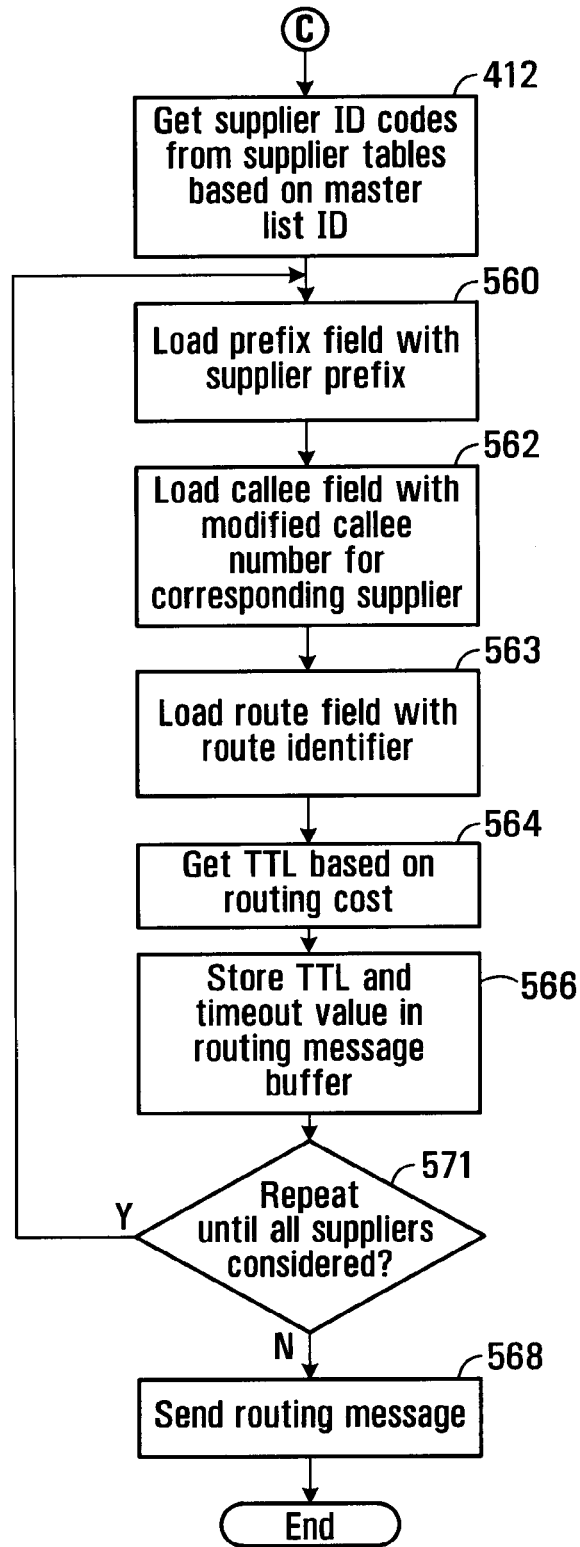


FIG. 8C

**FIG. 8D**

↖ 253

Dialing Profile for a User

258 ~ Username	Assigned on Subscription
260 ~ Domain	Domain Associated with User
262 ~ NDD	1
264 ~ IDD	011
266 ~ Country Code	1
267 ~ Local Area Codes	604;778
268 ~ Caller Minimum Local Length	10
270 ~ Caller Maximum Local Length	10
273 ~ Reseller	Retailer
275 ~ Maximum # of concurrent calls	Assigned on Subscription
277 ~ Current # of concurrent calls	Assigned on Subscription

FIG. 9

Dialing Profile for Caller (Vancouver Subscriber)

258 ~ Username	2001 1050 8667	↖ 276
260 ~ Domain	sp.yvr.digifonica.com	← 282
262 ~ NDD	1	
264 ~ IDD	011	
266 ~ Country Code	1	
267 ~ Local Area Codes	604;778 (Vancouver)	
268 ~ Caller Minimum Local Length	10	
270 ~ Caller Maximum Local Length	10	
273 ~ Reseller	Klondike	
275 ~ Maximum # of concurrent calls	5	
277 ~ Current # of concurrent calls	0	

61
 284 ↖ 63 70 74
 286 288 290

FIG. 10

Callee Profile for Calgary Subscriber

Username	2001 1050 2222
Domain	sp.yvr.digifonica.com
NDD	1
IDD	011
Country Code	1
Local Area Codes	403 (Calgary)
Caller Minimum Local Length	7
Caller Maximum Local Length	10
Reseller	Deerfoot
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 11**Callee Profile for London Subscriber**

Username	4401 1062 4444
Domain	sp.lhr.digifonica.com
NDD	0
IDD	00
Country Code	44
Local Area Codes	20 (London)
Caller Minimum Local Length	10
Caller Maximum Local Length	11
Reseller	Marble Arch
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 12

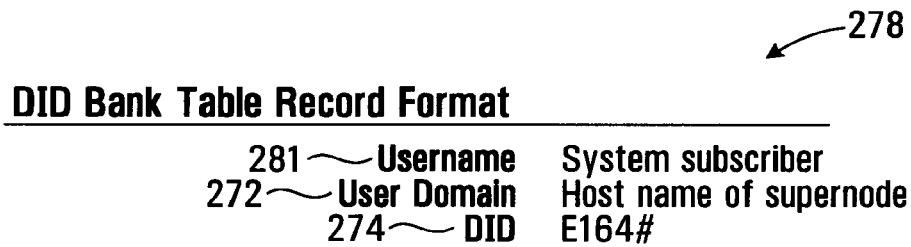


FIG. 13

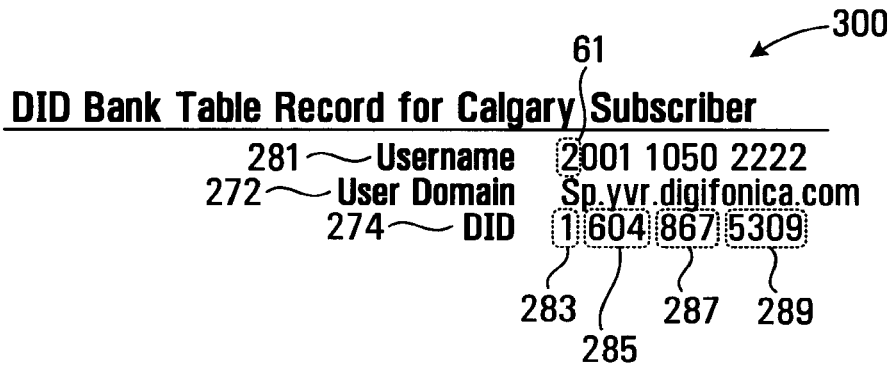


FIG. 14

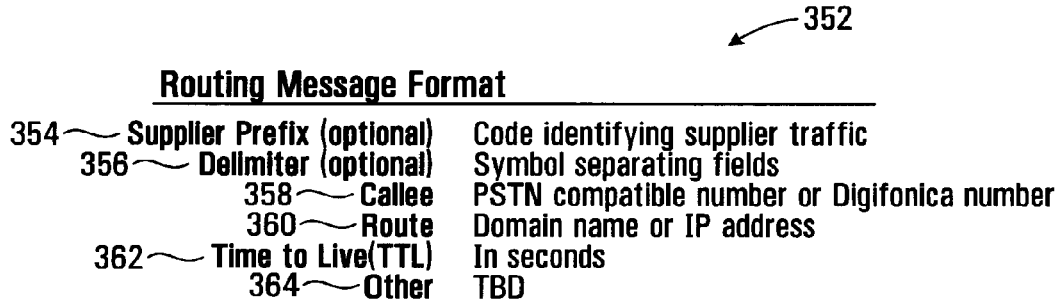


FIG. 15



FIG. 16

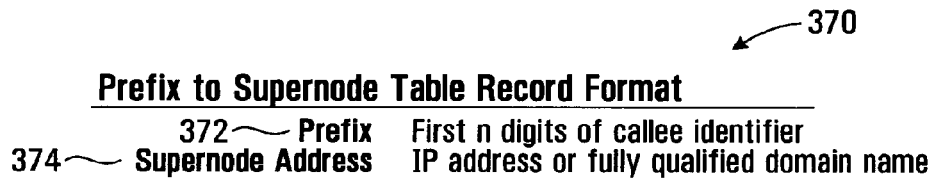


FIG. 17



FIG. 18

Master List Record Format

500	~	ml_id	Alphanumeric
502	~	Dialing code	Number Sequence
504	~	Country code	The country code is the national prefix to be used when dialing TO a particular country FROM another country.
506	~	Nat Sign #(Area Code)	Number Sequence
508	~	Min Length	Numeric
510	~	Max Length	Numeric
512	~	NDD	The NDD prefix is the access code used to make a call WITHIN that country from one city to another (when calling another city in the same vicinity, this may not be necessary).
514	~	IDD	The IDD prefix is the international prefix needed to dial a call FROM the country listed TO another country.
516	~	Buffer rate	Safe change rate above the highest rate charged by suppliers

FIG. 19

Example: Master List Record with Populated Fields

ml_id	1019
Dialing code	1604
Country code	1
Nat Sign #(Area Code)	604
Min Length	7
Max Length	7
NDD	1
IDD	011
Buffer rate	\$0.009/min

FIG. 20

Suppliers List Record Format

540	~ Sup_id	Name code
542	~ MI_id	Numeric code
544	~ Prefix (optional)	String identifying supplier's traffic #
546	~ Specific Route	IP address
548	~ NDD/IDD rewrite	
550	~ Rate	Cost per second to Digifonica to use this route
551	~ Timeout	Maximum time to wait for a response when requesting this gateway

FIG. 21**Telus Supplier Record**

Sup_id	2010 (Telus)
MI_id	1019
Prefix (optional)	4973#
Specific Route	72.64.39.58
NDD/IDD rewrite	011
Rate	\$0.02/min
Timeout	20

FIG. 22**Shaw Supplier Record**

Sup_id	2011 (Shaw)
MI_id	1019
Prefix (optional)	4974#
Specific Route	73.65.40.59
NDD/IDD rewrite	011
Rate	\$0.025/min
Timeout	30

FIG. 23**Sprint Supplier Record**

Sup_id	2012 (Sprint)
MI_id	1019
Prefix (optional)	4975#
Specific Route	74.66.41.60
NDD/IDD rewrite	011
Rate	\$0.03/min
Timeout	40

FIG. 24

Routing Message Buffer for Gateway Call

4973#0116048675309@72.64.39.58;tll=3600;to=20 ~ 570
 4974#0116048675309@73.65.40.59;tll=3600;to=30 ~ 572
 4975#0116048675309@74.66.41.60;tll=3600;to=40 ~ 574

FIG. 25**Call Block Table Record Format**

604 ~ Username Digifonica #
 606 ~ Block Pattern PSTN compatible or Digifonica #

FIG. 26**Call Block Table Record for Calgary Callee**

604 ~ Username of Callee 2001 1050 2222
 606 ~ Block Pattern 2001 1050 8664

FIG. 27**Call Forwarding Table Record Format for Callee**

614 ~ Username of Callee Digifonica #
 616 ~ Destination Number Digifonica #
 618 ~ Sequence Number Integer indicating order to try this

FIG. 28**Call Forwarding Table Record for Calgary Callee**

614 ~ Username of Callee 2001 1050 2222
 616 ~ Destination Number 2001 1055 2223
 618 ~ Sequence Number 1

FIG. 29

Voicemail Table Record Format

624	Username of Callee	Digifonica #
626	Vm Server	domain name
628	Seconds to Voicemail	time to wait before engaging voicemail
630	Enabled	yes/no

FIG. 30**Voicemail Table Record for Calgary Callee**

Username of Callee	2001 1050 2222
Vm Server	vm.yvr.digifonica.com
Seconds to Voicemail	20
Enabled	1

FIG. 31**Routing Message Buffer - Same Node**

650	200110502222@sp.yvr.digifonica.com;ttl=3600
652	200110552223@sp.yvr.digifonica.com;ttl=3600
654	vm.yvr.digifonica.com;20;ttl=60
656	sp.yvr.digifonica.com

FIG. 32

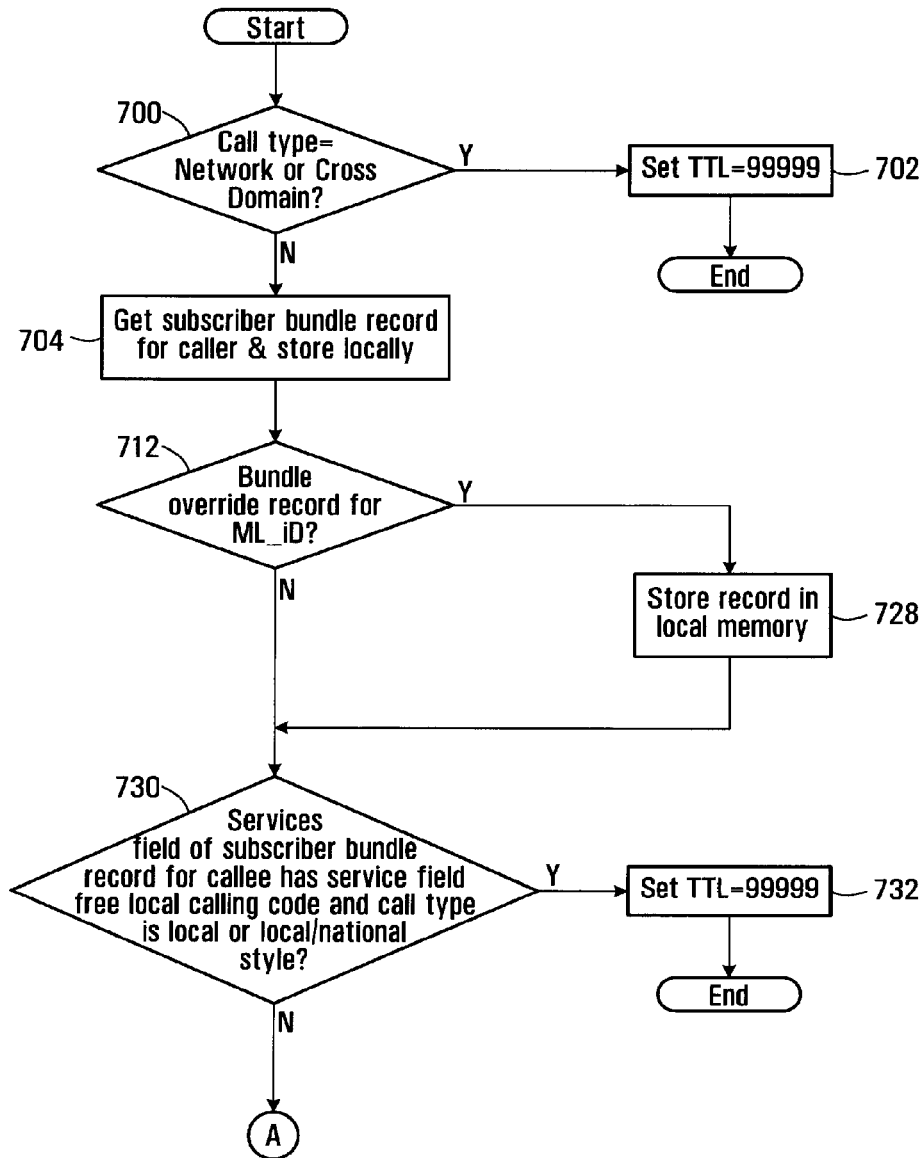


FIG. 33A

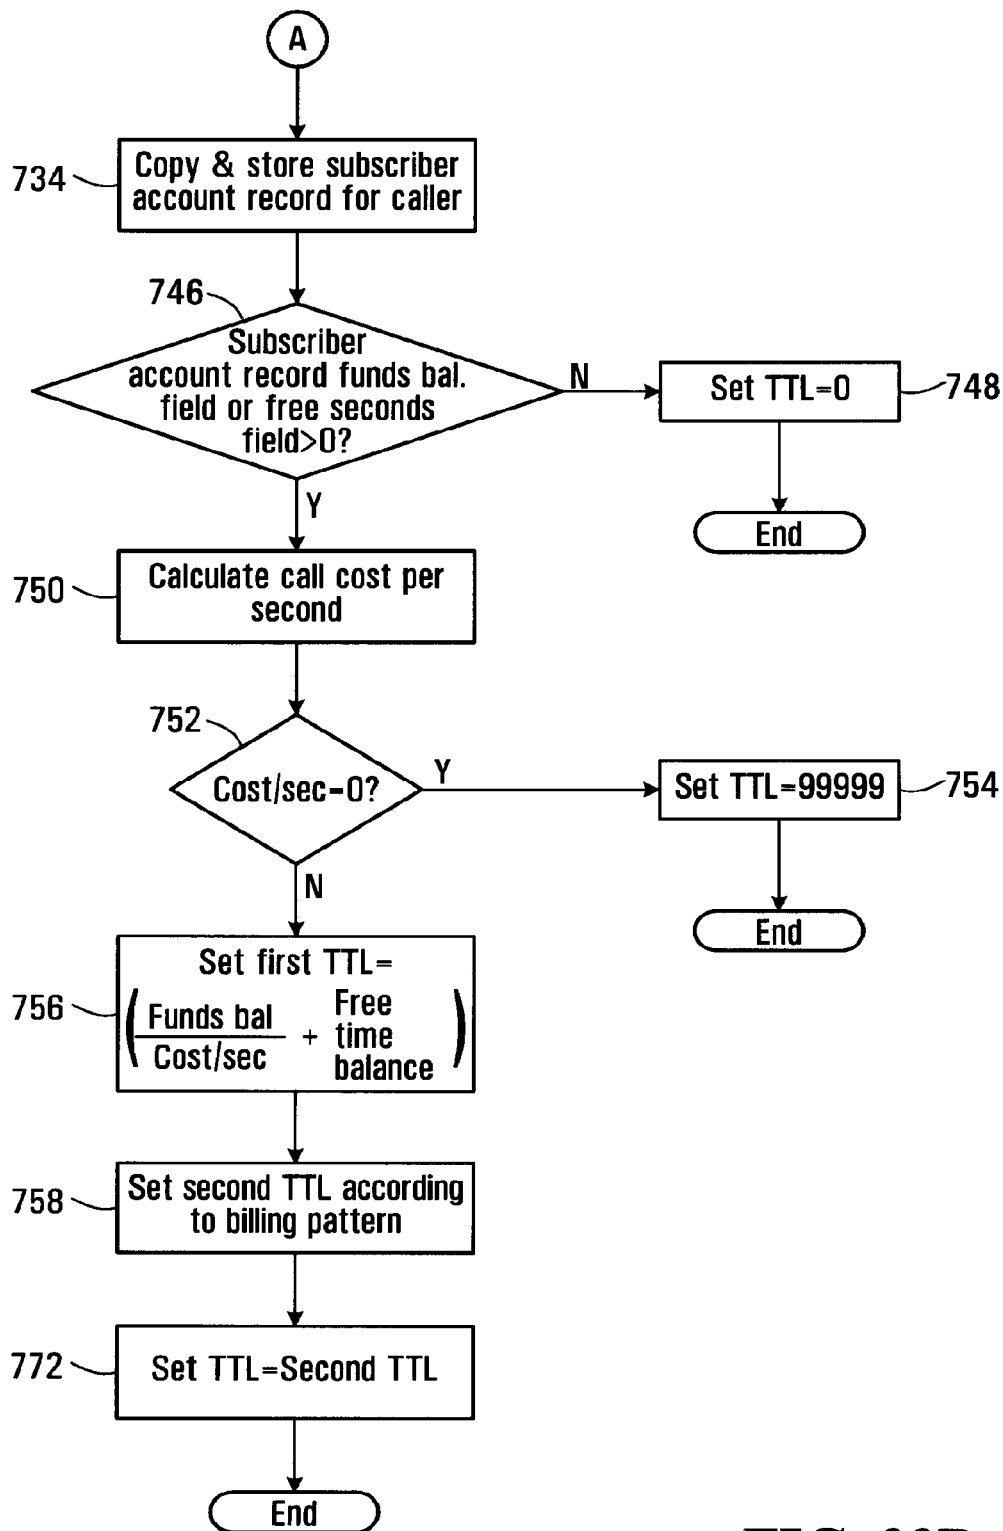


FIG. 33B

706 ↙

Subscriber Bundle Table Record

708 ~	Username	Subscriber username
710 ~	Services	Codes identifying service features (e.g. Free local calling; call blocking, voicemail)

FIG. 34

Subscriber Bundle Record for Vancouver Caller

708 ~	Username	2001 1050 8667
710 ~	Services	10; 14; 16

FIG. 35

714 ↙

Bundle Override Table Record

716 ~	ML_Id	Master list ID code
718 ~	Override type	Fixed; percent; cents
720 ~	Override value	real number representing value of override type
722 ~	Inc1	first level of charging (minimum # of seconds) charge
724 ~	Inc2	second level of charging

FIG. 36

726 ↙

Bundle Override Record for Located ML_id

716 ~	ML_Id	1019
718 ~	Override type	percent
720 ~	Override value	10.0
722 ~	Inc1	30 seconds
724 ~	Inc2	6 seconds


FIG. 37

		736
<u>Subscriber Account Table Record</u>		↙
738 ~	Username	Subscriber username
740 ~	Funds balance	real number representing \$ value of credit
742 ~	Free time balance	integer representing # of free seconds

FIG. 38

		744
<u>Subscriber Account Record for Vancouver Caller</u>		↙
738 ~	Username	2001 1050 8667
740 ~	Funds balance	\$10.00
742 ~	Free time balance	100

FIG. 39

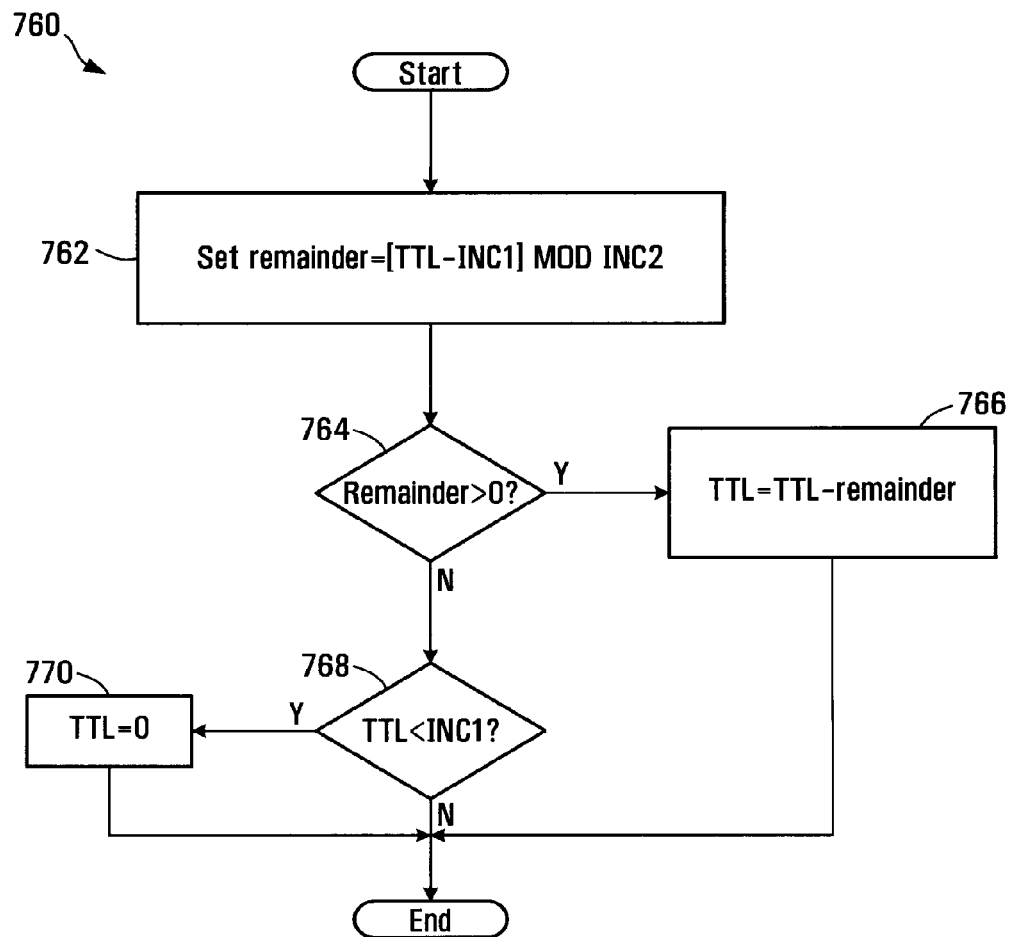**FIG. 40**

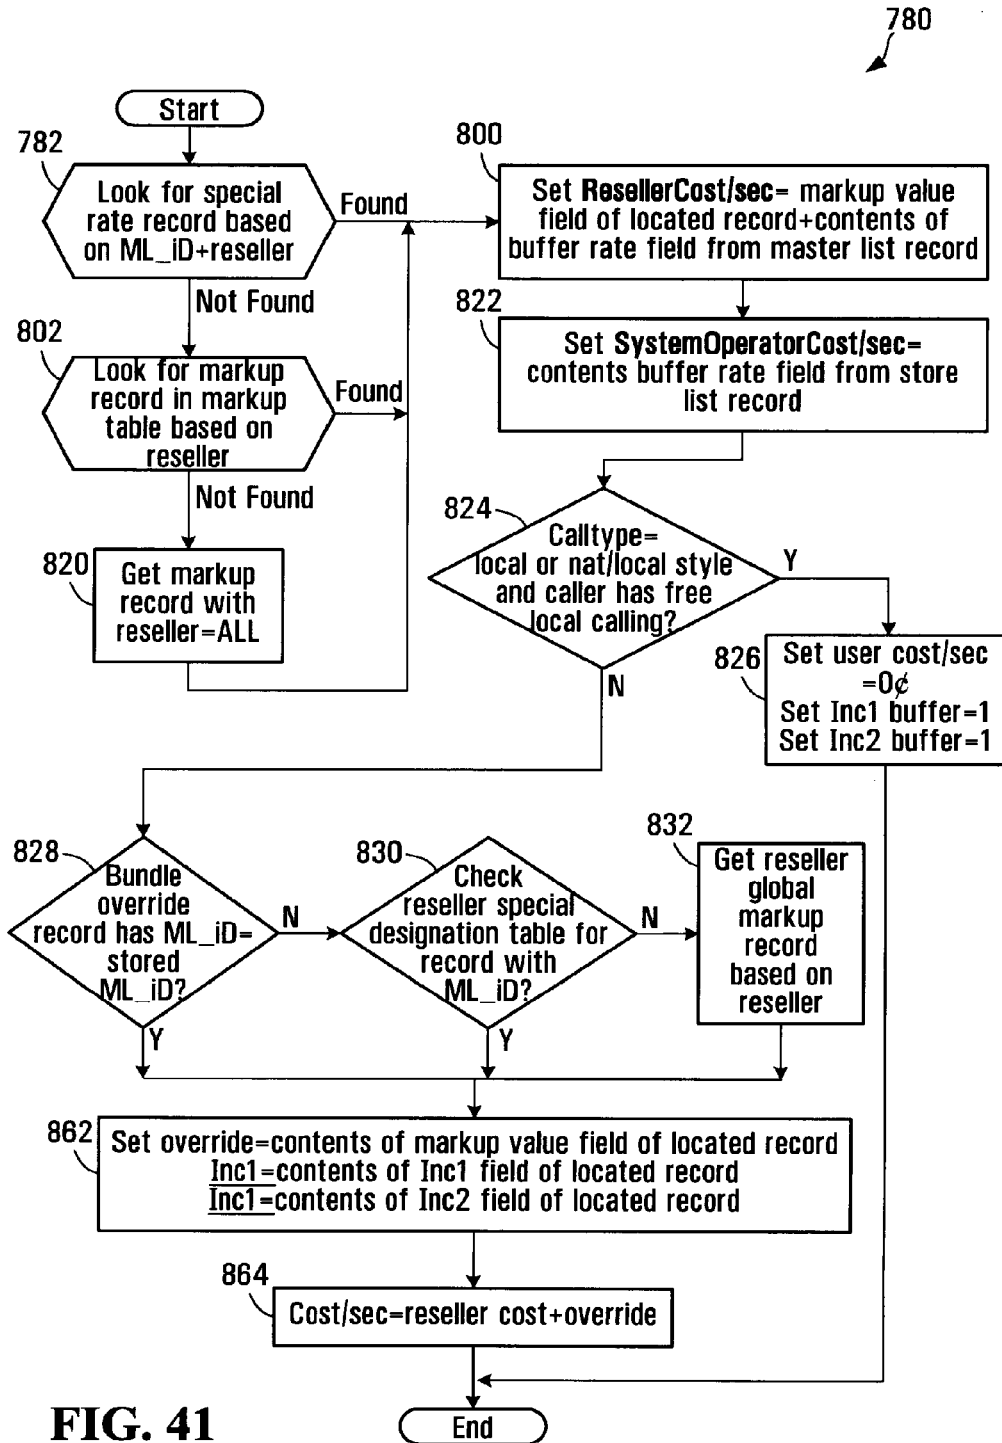


FIG. 41

784
↙

System Operator Special Rates Table Record

786	Reseller	retailer id
788	ML_Id	master list id
790	Markup Table	fixed; percent; cents
792	Markup Value	real number representing value of markup type
794	Inc1	first level of charging (minimum # of seconds) charge
796	Inc2	second level of charging

FIG. 42

798
↙

System Operator Special Rates Table Record for Klondike

786	Reseller	Klondike
788	ML_Id	1019
790	Markup Table	cents
792	Markup Value	\$0.001
794	Inc1	30
796	Inc2	6

FIG. 43

804

System Operator Markup Table Record

806	Reseller	reseller id code
808	Markup Table	fixed; percent; cents
810	Markup Value	real number representing value of markup type
812	Inc1	first level of charging (minimum # of seconds) charge
814	Inc2	second level of charging

FIG. 44

System Operator Markup Table Record for the Reseller Klondike

806	Reseller	Klondike
808	Markup Table	cents
810	Markup Value	\$0.01
812	Inc1	30
814	Inc2	6

FIG. 45

System Operator Markup Table Record

806	Reseller	all
808	Markup Table	percent
810	Markup Value	1.0
812	Inc1	30
814	Inc2	6

FIG. 46

Reseller Special Destinations Table Record

834	Reseller	reseller id code
836	ML_id	Master List ID code
838	Markup Table	fixed; percent; cents
840	Markup Value	real number representing value of markup type
842	Inc1	first level of charging (minimum # of seconds) charge
844	Inc2	second level of charging

FIG. 47

Reseller Special Destinations Table Record for the Reseller Klondike

834	Reseller	Klondike
836	ML_id	1019
838	Markup Table	percent
840	Markup Value	5%
842	Inc1	30
844	Inc2	6

FIG. 48

Reseller Global Markup Table Record

850	Reseller	reseller id code
852	Markup Table	fixed; percent; cents
854	Markup Value	real number representing value of markup type
856	Inc1	first level of charging (minimum # of seconds) charge
858	Inc2	second level of charging

FIG. 49

Reseller Global Markup Table Record for the Reseller Klondike

850	Reseller	Klondike
852	Markup Table	percent
854	Markup Value	10%
856	Inc1	30
858	Inc2	6

FIG. 50

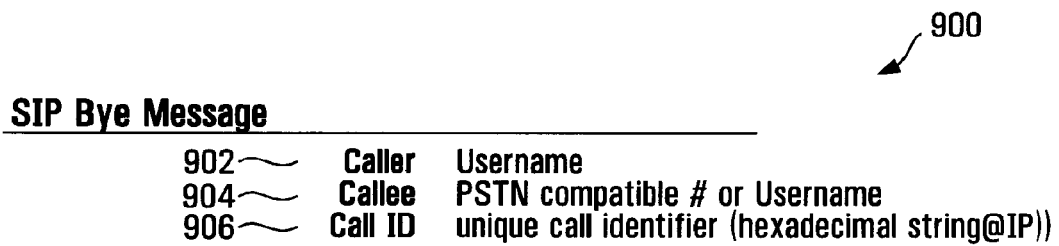


FIG. 51

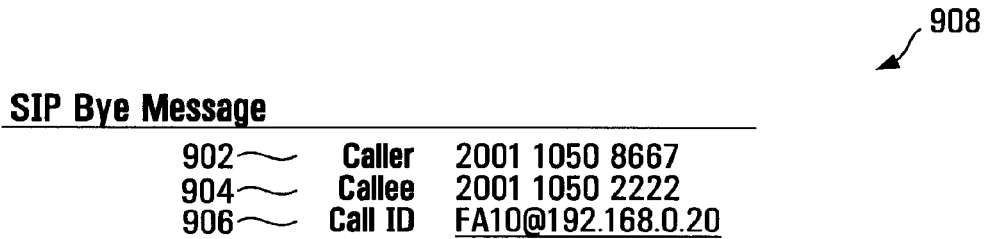
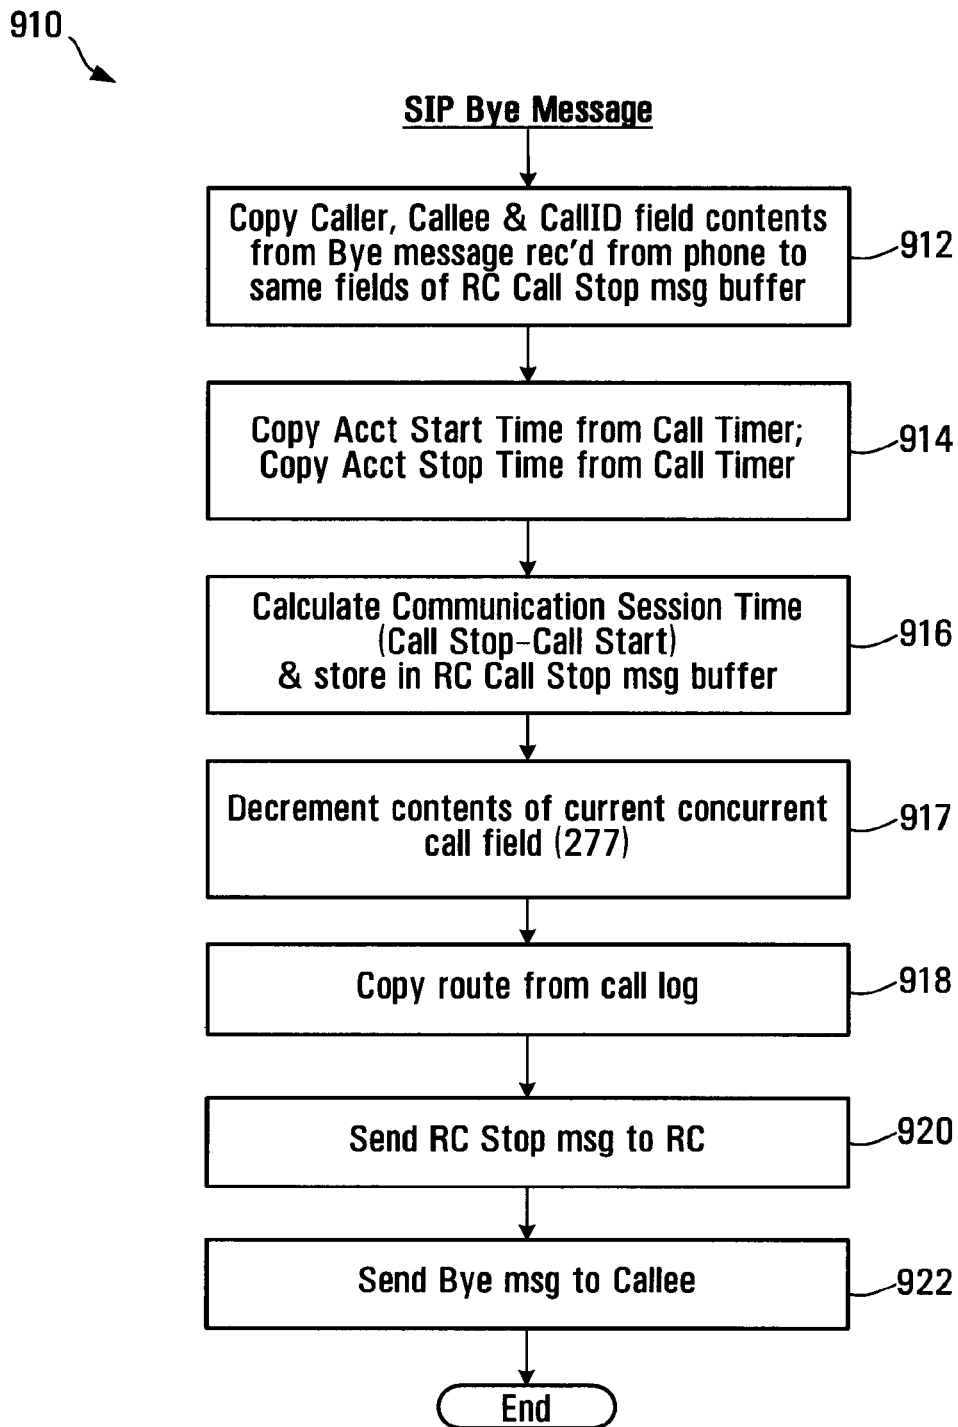


FIG. 52

**FIG. 53**

1000

RC Call Stop Message

1002	Caller	Username
1004	Callee	PSTN compatible # or Username
1006	Call ID	unique call identifier (hexadecimal string@IP)
1008	Acct Start Time	start time of call
1010	Acct Stop Time	time the call ended
1012	Acct Session Time	start time-stop time (in seconds)
1014	Route	IP address for the communications link that was established

FIG. 54

1020

RC Call Stop Message for Calgary Callee

1002	Caller	2001 1050 8667
1004	Callee	2001 1050 2222
1006	Call ID	FA10@192.168.0.20
1008	Acct Start Time	2006-12-30 12:12:12
1010	Acct Stop Time	2006-12-30 12:12:14
1012	Acct Session Time	2
1014	Route	72.64.39.58

FIG. 55

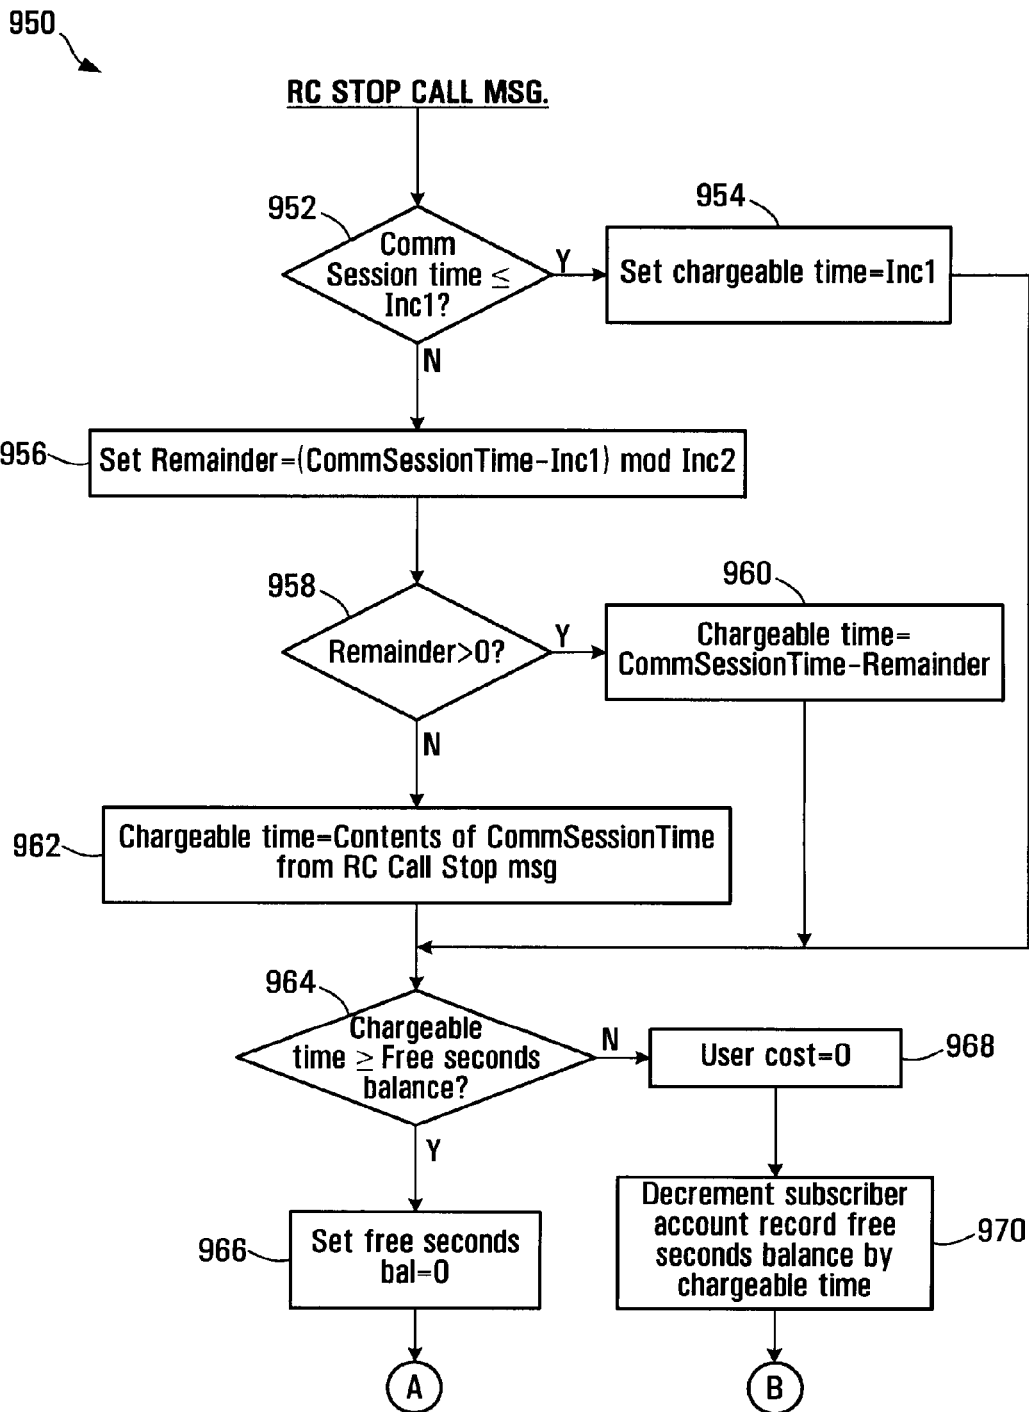


FIG. 56A

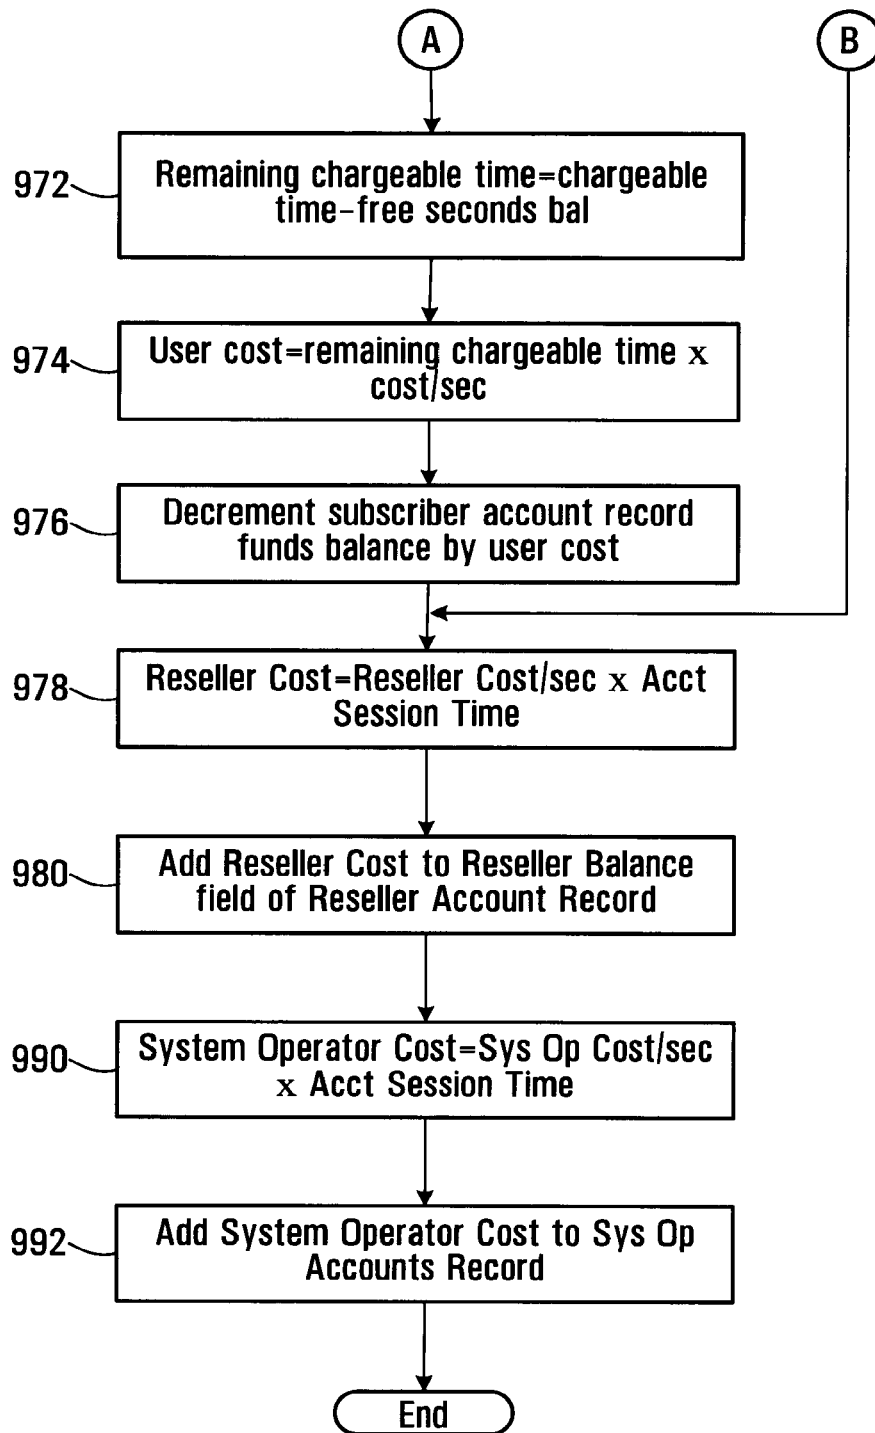


FIG. 56B

982

Reseller Accounts Table Record

984 ~	Reseller ID	reseller id code
986 ~	Reseller balance	accumulated balance of charges

FIG. 57

988

Reseller Accounts Table Record for Klondike

984 ~	Reseller ID	Klondike
986 ~	Reseller balance	\$100.02

FIG. 58

994

System Operator Accounts Table Record

996 ~	System Operator balance	accumulated balance of charges
-------	-------------------------	--------------------------------

FIG. 59

System Operator Accounts Record for this System Operator

996 ~	System Operator balance	\$1000.02
-------	-------------------------	-----------

FIG. 60

US 9,537,762 B2

1

**PRODUCING ROUTING MESSAGES FOR
VOICE OVER IP COMMUNICATIONS****INCORPORATION BY REFERENCE TO ANY
PRIORITY APPLICATIONS**

This application is a continuation of U.S. application Ser. No. 13/966,096, filed Aug. 13, 2013, now U.S. Pat. No. 9,179,005, which is a continuation of U.S. application Ser. No. 12/513,147, filed Mar. 1, 2010, now U.S. Pat. No. 8,542,815, which is a national phase entry of PCT/CA2007/001956, filed Nov. 1, 2007, which claims priority to U.S. Provisional Application No. 60/856,212, filed Nov. 2, 2006, all of which are incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION**1. Field of Invention**

This invention relates to voice over IP communications and methods and apparatus for routing and billing.

2. Description of Related Art

Internet protocol (IP) telephones are typically personal computer (PC) based telephones connected within an IP network, such as the public Internet or a private network of a large organization. These IP telephones have installed "voice-over-IP" (VoIP) software enabling them to make and receive voice calls and send and receive information in data and video formats.

IP telephony switches installed within the IP network enable voice calls to be made within or between IP networks, and between an IP network and a switched circuit network (SCN), such as the public switched telephone network (PSTN). If the IP switch supports the Signaling System 7 (SS7) protocol, the IP telephone can also access PSTN databases.

The PSTN network typically includes complex network nodes that contain all information about a local calling service area including user authentication and call routing. The PSTN network typically aggregates all information and traffic into a single location or node, processes it locally and then passes it on to other network nodes, as necessary, by maintaining route tables at the node. PSTN nodes are redundant by design and thus provide reliable service, but if a node should fail due to an earthquake or other natural disaster, significant, if not complete service outages can occur, with no other nodes being able to take up the load.

Existing VoIP systems do not allow for high availability and resiliency in delivering Voice Over IP based Session Initiation Protocol (SIP) Protocol service over a geographically dispersed area such as a city, region or continent. Most resiliency originates from the provision of IP based telephone services to one location or a small number of locations such as a single office or network of branch offices.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, there is provided a process for operating a call routing controller to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The process involves, in response to initiation of a call by a calling subscriber, receiving a caller identifier and a callee identifier. The process also involves using call classification criteria associated with the caller identifier to classify the call as a public network call or a private network call. The process further involves producing a routing message identifying an address, on the

2

private network, associated with the callee when the call is classified as a private network call. The process also involves producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The process may involve receiving a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

Using the call classification criteria may involve searching a database to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

Locating a record may involve locating a caller dialing profile comprising a user name associated with the caller, a domain associated with the caller, and at least one calling attribute.

Using the call classification criteria may involve comparing calling attributes associated with the caller dialing profile with aspects of the callee identifier.

Comparing may involve determining whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier has a length within a range specified in the caller dialing profile.

The process may involve formatting the callee identifier into a pre-defined digit format to produce a reformatted callee identifier.

Formatting may involve removing an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

Formatting may involve removing a national dialing digit from the callee identifier and prepending a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

Formatting may involve prepending a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

Formatting may involve prepending a caller country code and an area code to the callee identifier when the callee identifier has a length that matches a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The process may involve classifying the call as a private network call when the reformatted callee identifier identifies a subscriber to the private network.

The process may involve determining whether the callee identifier complies with a pre-defined user name format and if so, classifying the call as a private network call.

The process may involve causing a database of records to be searched to locate a direct in dial (DID) bank table record associating a public telephone number with the reformatted callee identifier and if the DID bank table record is found, classifying the call as a private network call and if a DID bank table record is not found, classifying the call as a public network call.

US 9,537,762 B2

3

Producing the routing message identifying a node on the private network may involve setting a callee identifier in response to a user name associated with the DID bank table record.

Producing the routing message may involve determining whether a node associated with the reformatted callee identifier is the same as a node associated the caller identifier.

Determining whether a node associated with the reformatted callee identifier is the same as a node associated the caller identifier may involve determining whether a prefix of the reformatted callee identifier matches a corresponding prefix of a user name associated with the caller dialing profile.

When the node associated with the caller is not the same as the node associated with the callee, the process involves producing a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and communicating the routing message to a call controller.

When the node associated with the caller is the same as the node associated with the callee, the process involves determining whether to perform at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee.

Producing the routing message may involve producing a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The process may involve communicating the routing message to a call controller.

Producing a routing message identifying a gateway to the public network may involve searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve loading a routing message buffer with the reformatted callee identifier and an identification of specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The process may involve communicating a routing message involving the contents of the routing message buffer to a call controller.

The process may involve causing the dialing profile to include a maximum concurrent call value and a concurrent call count value and causing the concurrent call count value to be incremented when the user associated with the dialing profile initiates a call and causing the concurrent call count value to be decremented when a call with the user associated with the dialing profile is ended.

In accordance with another aspect of the invention, there is provided a call routing apparatus for facilitating communications between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The apparatus includes receiving provisions for receiving a caller identifier and a callee identifier, in response to initiation of a call by a calling subscriber. The

4

apparatus also includes classifying provisions for classifying the call as a private network call or a public network call according to call classification criteria associated with the caller identifier. The apparatus further includes provisions for producing a routing message identifying an address, on the private network, associated with the callee when the call is classified as a private network call. The apparatus also includes provisions for producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The receiving provisions may be operably configured to receive a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

The apparatus may further include searching provisions for searching a database including records associating calling attributes with subscribers to the private network to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

The records may include dialing profiles each including a user name associated with the subscriber, an identification of a domain associated with the subscriber, and an identification of at least one calling attribute associated with the subscriber.

The call classification provisions may be operably configured to compare calling attributes associated with the caller dialing profile with aspects of the callee identifier.

The calling attributes may include an international dialing digit and call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

The calling attributes may include a national dialing digit and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

The calling attributes may include an area code and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

The calling attribute may include a number length range and the call classification provisions may be operably configured to determine whether the callee identifier has a length within a number length range specified in the caller dialing profile.

The apparatus may further include formatting provisions for formatting the callee identifier into a pre-defined digit format to produce a reformatted callee identifier.

The formatting provisions may be operably configured to remove an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

The formatting provisions may be operably configured to remove a national dialing digit from the callee identifier and prepend a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

The formatting provisions may be operably configured to prepend a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

The formatting provisions may be operably configured to prepend a caller country code and area code to the callee identifier when the callee identifier has a length that matches a caller dialing number format specified by the caller dialing

US 9,537,762 B2

5

profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The classifying provisions may be operably configured to classify the call as a private network call when the reformatted callee identifier identifies a subscriber to the private network.

The classifying provisions may be operably configured to classify the call as a private network call when the callee identifier complies with a pre-defined user name format.

The apparatus may further include provisions for searching a database of records to locate a direct in dial (DID) bank table record associating a public telephone number with the reformatted callee identifier and the classifying provisions may be operably configured to classify the call as a private network call when the DID bank table record is found and to classify the call as a public network call when a DID bank table record is not found.

The private network routing message producing provisions may be operably configured to produce a routing message having a callee identifier set according to a user name associated with the DID bank table record.

The private network routing message producing provisions may be operably configured to determine whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier.

The private network routing provisions may include provisions for determining whether a prefix of the reformatted callee identifier matches a corresponding prefix of a user name associated with the caller dialing profile.

The private network routing message producing provisions may be operably configured to produce a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and to communicate the routing message to a call controller.

The private network routing message producing provisions may be operably configured to perform at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee, when the node associated with the caller is the same as the node associated with the callee.

The provisions for producing the private network routing message may be operably configured to produce a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The apparatus further includes provisions for communicating the routing message to a call controller.

The provisions for producing a public network routing message identifying a gateway to the public network may include provisions for searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The apparatus further includes provisions for searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The apparatus further includes a routing message buffer and provisions for loading the routing message buffer with the reformatted callee identifier and an identification of specific routes associated respective ones of the supplier

6

records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The apparatus further includes provisions for communicating a routing message including the contents of the routing message buffer to a call controller.

The apparatus further includes means for causing said dialing profile to include a maximum concurrent call value and a concurrent call count value and for causing said concurrent call count value to be incremented when the user associated with said dialing profile initiates a call and for causing said concurrent call count value to be decremented when a call with said user associated with said dialing profile is ended.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes dialing profile records comprising fields for associating with respective subscribers to the system, a subscriber user name, direct-in-dial records comprising fields for associating with respective subscriber user names, a user domain and a direct-in-dial number, prefix to node records comprising fields for associating with at least a portion of the respective subscriber user names, a node address of a node in the system, whereby a subscriber name can be used to find a user domain, at least a portion of the a subscriber name can be used to find a node with which the subscriber identified by the subscriber name is associated, and a user domain and subscriber name can be located in response to a direct-in-dial number.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes master list records comprising fields for associating a dialing code with respective master list identifiers and supplier list records linked to master list records by the master list identifiers, said supplier list records comprising fields for associating with a communications services supplier, a supplier ID, a master list ID, a route identifier and a billing rate code, whereby communications services suppliers are associated with dialing codes, such that dialing codes can be used to locate suppliers capable of providing a communications link associated with a given dialing code.

In accordance with another aspect of the invention, there is provided a method for determining a time to permit a communication session to be conducted. The method involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Calculating the first time value may involve retrieving a record associated with the participant and obtaining from the record at least one of the free time and the funds balance.

Producing the second time value may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

US 9,537,762 B2

7

Producing the second time value may involve setting a difference between the first time value and the remainder as the second time value.

The method may further involve setting the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

Calculating the cost per unit time may involve locating a record in a database, the record comprising a mark-up type indicator, a mark-up value and a billing pattern and setting a reseller rate equal to the sum of the mark-up value and the buffer rate.

Locating the record in a database may involve locating at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller and a default reseller mark-up record.

Calculating the cost per unit time value further may involve locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator mark-up record specifying a default cost per unit time.

The method may further involve setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a reseller balance by the product of the reseller rate and the communication session time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided an apparatus for determining a time to permit a communication session to be conducted. The apparatus includes a processor circuit, a computer readable medium coupled to the processor circuit and encoded with instructions for directing the processor circuit to calculate a cost per unit time for the communication session, calculate a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and produce a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

The instructions may include instructions for directing the processor circuit to retrieve a record associated with the participant and obtain from the record at least one of the free time and the funds balance.

The instructions may include instructions for directing the processor circuit to produce the second time value by producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

The instructions may include instructions for directing the processor circuit to produce the second time value comprises

8

setting a difference between the first time value and the remainder as the second time value.

The instructions may include instructions for directing the processor circuit to set the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

The instructions for directing the processor circuit to calculate the cost per unit time may include instructions for directing the processor circuit to locate a record in a database, the record comprising a mark-up type indicator, a mark-up value and a billing pattern and set a reseller rate equal to the sum of the mark-up value and the buffer rate.

The instructions for directing the processor circuit to locate the record in a database may include instructions for directing the processor circuit to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller mark-up record. The instructions for directing the processor circuit to calculate the cost per unit time value may further include instructions for directing the processor circuit to locate at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator mark-up record specifying a default cost per unit time.

The instructions may include instructions for directing the processor circuit to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a reseller balance by the product of the reseller rate and the communication session time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided a process for attributing charges for communications services. The process involves determining a first chargeable time in response to a communication session time and a pre-defined billing pattern, determining a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, changing an account balance associated with the user in response to a user cost per unit time. The process may further involve changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

Determining the first chargeable time may involve locating at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default

US 9,537,762 B2

9

cost per unit time and billing pattern and setting as the pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may involve a first billing interval and a second billing interval.

Determining the first chargeable time may involve setting the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

Determining the first chargeable time may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and setting the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and setting the first chargeable time to the communication session time when the remainder is not greater than zero.

The process may further involve determining a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Determining the second chargeable time may involve setting the second chargeable time to a difference between the first chargeable time.

The process may further involve resetting the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Changing an account balance associated with the user may involve calculating a user cost value in response to the second chargeable time and the user cost per unit time.

The process may further involve changing a user free cost balance in response to the user cost value.

The process may further involve setting the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The process may further involve changing a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided an apparatus for attributing charges for communications services. The apparatus includes a processor circuit, a computer readable medium in communication with the processor circuit and encoded with instructions for directing the processor circuit to determine a first chargeable time in response to a communication session time and a pre-defined billing pattern, determine a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, change an account balance associated with the user in response to a user cost per unit time.

The instructions may further include instructions for changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

The instructions for directing the processor circuit to determine the first chargeable time may further include instructions for causing the processor circuit to communicate with a database to locate at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the commu-

10

nication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and instructions for setting as the pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may include a first billing interval and a second billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for directing the processor circuit to set the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and instructions for causing the processor circuit to set the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and instructions for causing the processor circuit to set the first chargeable time to the communication session time when the remainder is not greater than zero.

The instructions may further include instructions for causing the processor circuit to determine a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to determine the second chargeable time may include instructions for causing the processor circuit to set the second chargeable time to a difference between the first chargeable time.

The instructions may further include instructions for causing the processor circuit to reset the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to change an account balance associated with the user may include instructions for causing the processor circuit to calculate a user cost value in response to the second chargeable time and the user cost per unit time.

The instructions may further include instructions for causing the processor circuit to change a user free cost balance in response to the user cost value.

The instructions may further include instructions for causing the processor circuit to set the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The instructions may further include instructions for causing the processor circuit to change a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided a computer readable medium encoded with codes for directing a processor circuit to execute one or more of the methods described above and/or variants thereof.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon

US 9,537,762 B2

11

review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention,

FIG. 1 is a block diagram of a system according to a first embodiment of the invention;

FIG. 2 is a block diagram of a caller telephone according to the first embodiment of the invention;

FIG. 3 is a schematic representation of a SIP invite message transmitted between the caller telephone and a controller shown in FIG. 1;

FIG. 4 is a block diagram of a call controller shown in FIG. 1;

FIG. 5 is a flowchart of a process executed by the call controller shown in FIG. 1;

FIG. 6 is a schematic representation of a routing, billing and rating (RC) request message produced by the call controller shown in FIG. 1;

FIG. 7 is a block diagram of a processor circuit of a routing, billing, rating element of the system shown in FIG. 1;

FIGS. 8A-8D is a flowchart of an RC request message handler executed by the RC processor circuit shown in FIG. 7;

FIG. 9 is a tabular representation of a dialing profile stored in a database accessible by the RC shown in FIG. 1;

FIG. 10 is a tabular representation of a dialing profile for a caller using the caller telephone shown in FIG. 1;

FIG. 11 is a tabular representation of a callee profile for a callee located in Calgary;

FIG. 12 is a tabular representation of a callee profile for a callee located in London;

FIG. 13 is a tabular representation of a Direct-in-Dial (DID) bank table record stored in the database shown in FIG. 1;

FIG. 14 is a tabular representation of an exemplary DID bank table record for the Calgary callee referenced in FIG. 11;

FIG. 15 is a tabular representation of a routing message transmitted from the RC to the call controller shown in FIG. 1;

FIG. 16 is a schematic representation of a routing message buffer holding a routing message for routing a call to the Calgary callee referenced in FIG. 11;

FIG. 17 is a tabular representation of a prefix to supernode table record stored in the database shown in FIG. 1;

FIG. 18 is a tabular representation of a prefix to supernode table record that would be used for the Calgary callee referenced in FIG. 11;

FIG. 19 is a tabular representation of a master list record stored in a master list table in the database shown in FIG. 1;

FIG. 20 is a tabular representation of a populated master list record;

FIG. 21 is a tabular representation of a suppliers list record stored in the database shown in FIG. 1;

FIG. 22 is a tabular representation of a specific supplier list record for a first supplier;

FIG. 23 is a tabular representation of a specific supplier list record for a second supplier;

FIG. 24 is a tabular representation of a specific supplier list record for a third supplier;

12

FIG. 25 is a schematic representation of a routing message, held in a routing message buffer, identifying to the controller a plurality of possible suppliers that may carry the call;

FIG. 26 is a tabular representation of a call block table record;

FIG. 27 is a tabular representation of a call block table record for the Calgary callee;

FIG. 28 is a tabular representation of a call forwarding table record;

FIG. 29 is a tabular representation of a call forwarding table record specific for the Calgary callee;

FIG. 30 is a tabular representation of a voicemail table record specifying voicemail parameters to enable the caller to leave a voicemail message for the callee;

FIG. 31 is a tabular representation of a voicemail table record specific to the Calgary callee;

FIG. 32 is a schematic representation of an exemplary routing message, held in a routing message buffer, indicating call forwarding numbers and a voicemail server identifier;

FIGS. 33A and 33B are respective portions of a flowchart of a process executed by the RC processor for determining a time to live value;

FIG. 34 is a tabular representation of a subscriber bundle table record;

FIG. 35 is a tabular representation of a subscriber bundle record for the Vancouver caller;

FIG. 36 is a tabular representation of a bundle override table record;

FIG. 37 is a tabular representation of a bundle override record for a located master list ID;

FIG. 38 is a tabular representation of a subscriber account table record;

FIG. 39 is a tabular representation of a subscriber account record for the Vancouver caller;

FIG. 40 is a flowchart of a process for producing a second time value executed by the RC processor circuit shown in FIG. 7;

FIG. 41 is a flowchart for calculating a call cost per unit time;

FIG. 42 is a tabular representation of a system operator special rates table record;

FIG. 43 is a tabular representation of a system operator special rates table record for a reseller named Klondike;

FIG. 44 is a tabular representation of a system operator mark-up table record;

FIG. 45 is a tabular representation of a system operator mark-up table record for the reseller Klondike;

FIG. 46 is a tabular representation of a default system operator mark-up table record;

FIG. 47 is a tabular representation of a reseller special destinations table record;

FIG. 48 is a tabular representation of a reseller special destinations table record for the reseller Klondike;

FIG. 49 is a tabular representation of a reseller global mark-up table record;

FIG. 50 is a tabular representation of a reseller global mark-up table record for the reseller Klondike;

FIG. 51 is a tabular representation of a SIP bye message transmitted from either of the telephones shown in FIG. 1 to the call controller;

FIG. 52 is a tabular representation of a SIP bye message sent to the controller from the Calgary callee;

FIG. 53 is a flowchart of a process executed by the call controller for producing an RC stop message in response to receipt of a SIP bye message;

US 9,537,762 B2

13

FIG. 54 is a tabular representation of an exemplary RC call stop message;

FIG. 55 is a tabular representation of an RC call stop message for the Calgary callee;

FIGS. 56A and 56B are respective portions of a flowchart of an RC call stop message handling routine executed by the RC shown in FIG. 1;

FIG. 57 is a tabular representation of a reseller accounts table record;

FIG. 58 is a tabular representation of a reseller accounts table record for the reseller Klondike;

FIG. 59 is a tabular representation of a system operator accounts table record; and

FIG. 60 is a tabular representation of a system operator accounts record for the system operator described herein.

DETAILED DESCRIPTION

Referring to FIG. 1, a system for making voice over IP telephone/videophone calls is shown generally at 10. The system includes a first supernode shown generally at 11 and a second supernode shown generally at 21. The first supernode 11 is located in a geographical area, such as Vancouver, B.C., Canada for example and the second supernode 21 is located in London, England, for example. Different supernodes may be located in different geographical regions throughout the world to provide telephone/videophone service to subscribers in respective regions. These supernodes may be in communication with each other by high speed/high data throughput links including optical fiber, satellite and/or cable links, forming a backbone to the system. These supernodes may alternatively or, in addition, be in communication with each other through conventional internet services.

In the embodiment shown, the Vancouver supernode 11 provides telephone/videophone service to western Canadian customers from Vancouver Island to Ontario. Another node (not shown) may be located in Eastern Canada to provide services to subscribers in that area.

Other nodes of the type shown may also be employed within the geographical area serviced by a supernode, to provide for call load sharing, for example within a region of the geographical area serviced by the supernode. However, in general, all nodes are similar and have the properties described below in connection with the Vancouver supernode 11.

In this embodiment, the Vancouver supernode includes a call controller (C) 14, a routing controller (RC) 16, a database 18 and a voicemail server 19 and a media relay 9. Each of these may be implemented as separate modules on a common computer system or by separate computers, for example. The voicemail server 19 need not be included in the node and can be provided by an outside service provider.

Subscribers such as a subscriber in Vancouver and a subscriber in Calgary communicate with the Vancouver supernode using their own internet service providers which route internet traffic from these subscribers over the internet shown generally at 13 in FIG. 1. To these subscribers the Vancouver supernode is accessible at a pre-determined internet protocol (IP) address or a fully qualified domain name that can be accessed in the usual way through a subscriber's internet service provider. The subscriber in Vancouver uses a telephone 12 that is capable of communicating with the Vancouver supernode 11 using Session Initiation Protocol (SIP) messages and the Calgary subscriber uses a similar telephone 15, in Calgary, AB.

14

It should be noted that throughout the description of the embodiments of this invention, the IP/UDP addresses of all elements such as the caller and callee telephones, call controller, media relay, and any others, will be assumed to be valid IP/UDP addresses directly accessible via the Internet or a private IP network, for example, depending on the specific implementation of the system. As such, it will be assumed, for example, that the caller and callee telephones will have IP/UDP addresses directly accessible by the call controllers and the media relays on their respective supernodes, and those addresses will not be obscured by Network Address Translation (NAT) or similar mechanisms. In other words, the IP/UDP information contained in SIP messages (for example the SIP Invite message or the RC Request message which will be described below) will match the IP/UDP addresses of the IP packets carrying these SIP messages.

It will be appreciated that in many situations, the IP addresses assigned to various elements of the system may be in a private IP address space, and thus not directly accessible from other elements. Furthermore, it will also be appreciated that NAT is commonly used to share a "public" IP address between multiple devices, for example between home PCs and IP telephones sharing a single Internet connection. For example, a home PC may be assigned an IP address such as 192.168.0.101 and a Voice over IP telephone may be assigned an IP address of 192.168.0.103. These addresses are located in so called "non-routable" (IP) address space and cannot be accessed directly from the Internet. In order for these devices to communicate with other computers located on the Internet, these IP addresses have to be converted into a "public" IP address, for example 24.10.10.123 assigned by the Internet Service Provider to the subscriber, by a device performing NAT, typically a home router. In addition to translating the IP addresses, NAT typically also translates UDP port numbers, for example an audio path originating at a VoIP telephone and using a UDP port 12378 at its private IP address, may have been translated to a UDP port 23465 associated with the public IP address of the NAT device. In other words, when a packet originating from the above VoIP telephone arrives at an Internet-based supernode, the source IP/UDP address contained in the IP packet header will be 24.10.10.1:23465, whereas the source IP/UDP address information contained in the SIP message inside this IP packet will be 192.168.0.103:12378. The mismatch in the IP/UDP addresses may cause a problem for SIP-based VoIP systems because, for example, a supernode will attempt to send messages to a private address of a telephone but the messages will never get there.

Referring to FIG. 1, in an attempt to make a call by the Vancouver telephone/videophone 12 to the Calgary telephone/videophone 15, the Vancouver telephone/videophone sends a SIP invite message to the Vancouver supernode 11 and in response, the call controller 14 sends an RC request message to the RC 16 which makes various enquiries of the database 18 to produce a routing message which is sent back to the call controller 14. The call controller 14 then communicates with the media relay 9 to cause a communications link including an audio path and a videophone (if a video-path call) to be established through the media relay to the same node, a different node or to a communications supplier gateway as shown generally at 20 to carry audio, and where applicable, video traffic to the call recipient or callee.

Generally, the RC 16 executes a process to facilitate communication between callers and callees. The process involves, in response to initiation of a call by a calling

US 9,537,762 B2

15

subscriber, receiving a callee identifier from the calling subscriber, using call classification criteria associated with the calling subscriber to classify the call as a public network call or a private network call and producing a routing message identifying an address on the private network, associated with the callee when the call is classified as a private network call and producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

Subscriber Telephone

In greater detail, referring to FIG. 2, in this embodiment, the telephone/videophone 12 includes a processor circuit shown generally at 30 comprising a microprocessor 32, program memory 34, an input/output (I/O) port 36, parameter memory 38 and temporary memory 40. The program memory 34, I/O port 36, parameter memory 38 and temporary memory 40 are all in communication with the microprocessor 32. The I/O port 36 has a dial input 42 for receiving a dialled telephone/videophone number from a keypad, for example, or from a voice recognition unit or from pre-stored telephone/videophone numbers stored in the parameter memory 38, for example. For simplicity, in FIG. 2 a box labelled dialing functions 44 represents any device capable of informing the microprocessor 32 of a callee identifier, e.g., a callee telephone/videophone number.

The processor 32 stores the callee identifier in a dialled number buffer 45. In this case, assume the dialled number is 2001 1050 2222 and that it is a number associated with the Calgary subscriber. The I/O port 36 also has a handset interface 46 for receiving and producing signals from and to a handset that the user may place to his ear. This interface 46 may include a BLUETOOTH™ wireless interface, a wired interface or speaker phone, for example. The handset acts as a termination point for an audio path (not shown) which will be appreciated later. The I/O port 36 also has an internet connection 48 which is preferably a high speed internet connection and is operable to connect the telephone/videophone to an internet service provider. The internet connection 48 also acts as a part of the voice path, as will be appreciated later. It will be appreciated that where the subscriber device is a videophone, a separate video path is established in the same way an audio path is established. For simplicity, the following description refers to a telephone call, but it is to be understood that a videophone call is handled similarly, with the call controller causing the media relay to facilitate both an audio path and a video path instead of only an audio path.

The parameter memory 38 has a user name field 50, a password field 52, an IP address field 53 and a SIP proxy address field 54, for example. The user name field 50 is operable to hold a user name, which in this case is 2001 1050 8667. The user name is assigned upon subscription or registration into the system and, in this embodiment, includes a twelve digit number having a continent code 61, a country code 63, a dealer code 70 and a unique number code 74. The continent code 61 is comprised of the first or left-most digit of the user name in this embodiment. The country code 63 is comprised of the next three digits. The dealer code 70 is comprised of the next four digits and the unique number code 74 is comprised of the last four digits. The password field 52 holds a password of up to 512 characters, in this example. The IP address field 53 stores an IP address of the telephone, which for this explanation is 192.168.0.20. The SIP proxy address field 54 holds an IP protocol compatible proxy address which may be provided to the telephone through the internet connection 48 as part of a registration procedure.

16

The program memory 34 stores blocks of codes for directing the processor 32 to carry out the functions of the telephone, one of which includes a firewall block 56 which provides firewall functions to the telephone, to prevent access by unauthorized persons to the microprocessor 32 and memories 34, 38 and 40 through the internet connection 48. The program memory 34 also stores codes 57 for establishing a call ID. The call ID codes 57 direct the processor 32 to produce a call identifier having a format comprising a hexadecimal string at an IP address, the IP address being the IP address of the telephone. Thus, an exemplary call identifier might be FF10@192.168.0.20.

Generally, in response to picking up the handset interface 46 and activating a dialing function 44, the microprocessor 32 produces and sends a SIP invite message as shown in FIG. 3, to the routing controller 16 shown in FIG. 1. This SIP invite message is essentially to initiate a call by a calling subscriber.

Referring to FIG. 3, the SIP invite message includes a caller ID field 60, a callee identifier field 62, a digest parameters field 64, a call ID field 65, an IP address field 67 and a caller UDP port field 69. In this embodiment, the caller ID field 60 includes the user name 2001 1050 8667 that is the Vancouver user name stored in the user name field 50 of the parameter memory 38 in the telephone 12 shown in FIG. 2. In addition, referring back to FIG. 3, the callee identifier field 62 includes a callee identifier which in this embodiment is the user name 2001 1050 2222 that is the dialled number of the Calgary subscriber stored in the dialled number buffer 45 shown in FIG. 2. The digest parameters field 64 includes digest parameters and the call ID field 65 includes a code comprising a generated prefix code (FF10) and a suffix which is the Internet Protocol (IP) address of the telephone 12 stored in the IP address field 53 of the telephone. The IP address field 67 holds the IP address assigned to the telephone, in this embodiment 192.168.0.20, and the caller UDP port field 69 includes a UDP port identifier identifying a UDP port at which the audio path will be terminated at the caller's telephone.

Call Controller

Referring to FIG. 4, a call controller circuit of the call controller 14 (FIG. 1) is shown in greater detail at 100. The call controller circuit 100 includes a microprocessor 102, program memory 104 and an I/O port 106. The circuit 100 may include a plurality of microprocessors, a plurality of program memories and a plurality of I/O ports to be able to handle a large volume of calls. However, for simplicity, the call controller circuit 100 will be described as having only one microprocessor 102, program memory 104 and I/O port 106, it being understood that there may be more.

Generally, the I/O port 106 includes an input 108 for receiving messages such as the SIP invite message shown in FIG. 3, from the telephone shown in FIG. 2. The I/O port 106 also has an RC request message output 110 for transmitting an RC request message to the RC 16 of FIG. 1, an RC message input 112 for receiving routing messages from the RC 16, a gateway output 114 for transmitting messages to one of the gateways 20 shown in FIG. 1 to advise the gateway to establish an audio path, for example, and a gateway input 116 for receiving messages from the gateway. The I/O port 106 further includes a SIP output 118 for transmitting messages to the telephone 12 to advise the telephone of the IP addresses of the gateways which will establish the audio path. The I/O port 106 further includes a voicemail server input and output 117, 119 respectively for communicating with the voicemail server 19 shown in FIG. 1.

US 9,537,762 B2

17

While certain inputs and outputs have been shown as separate, it will be appreciated that some may be a single IP address and IP port. For example, the messages sent to the RC 16 and received from the RC 16 may be transmitted and received on the same single IP port.

The program memory 104 includes blocks of code for directing the microprocessor 102 to carry out various functions of the call controller 14. For example, these blocks of code include a first block 120 for causing the call controller circuit 100 to execute a SIP invite to RC request process to produce an RC request message in response to a received SIP invite message. In addition, there is a routing message to gateway message block 122 which causes the call controller circuit 100 to produce a gateway query message in response to a received routing message from the RC 16.

Referring to FIG. 5, the SIP invite to RC request process is shown in more detail at 120. On receipt of a SIP invite message of the type shown in FIG. 3, block 122 of FIG. 5 directs the call controller circuit 100 of FIG. 4 to authenticate the user. This may be done, for example, by prompting the user for a password, by sending a message back to the telephone 12 which is interpreted at the telephone as a request for a password entry or the password may automatically be sent to the call controller 14 from the telephone, in response to the message. The call controller 14 may then make enquiries of databases to which it has access, to determine whether or not the user's password matches a password stored in the database. Various functions may be used to pass encryption keys or hash codes back and forth to ensure that the transmittal of passwords is secure.

Should the authentication process fail, the call controller circuit 100 is directed to an error handling routine 124 which causes messages to be displayed at the telephone 12 to indicate there was an authentication problem. If the authentication procedure is passed, block 121 directs the call controller circuit 100 to determine whether or not the contents of the caller ID field 60 of the SIP invite message received from the telephone is an IP address. If it is an IP address, then block 123 directs the call controller circuit 100 to set the contents of a type field variable maintained by the microprocessor 102 to a code representing that the call type is a third party invite. If at block 121 the caller ID field contents do not identify an IP address, then block 125 directs the microprocessor to set the contents of the type field to a code indicating that the call is being made by a system subscriber. Then, block 126 directs the call controller circuit to read the call identifier 65 provided in the SIP invite message from the telephone 12, and at block 128 the processor is directed to produce an RC request message that includes that call ID. Block 129 then directs the call controller circuit 100 to send the RC request to the RC 16.

Referring to FIG. 6, an RC request message is shown generally at 150 and includes a caller field 152, a callee field 154, a digest field 156, a call ID field 158 and a type field 160. The caller, callee, digest call ID fields 152, 154, 156 and 158 contain copies of the caller, callee, digest parameters and call ID fields 60, 62, 64 and 65 of the SIP invite message shown in FIG. 3. The type field 160 contains the type code established at blocks 123 or 125 of FIG. 5 to indicate whether the call is from a third party or system subscriber, respectively. The caller identifier field may include a PSTN number or a system subscriber user name as shown, for example.

Routing Controller (RC)

Referring to FIG. 7, the RC 16 is shown in greater detail and includes an RC processor circuit shown generally at 200. The RC processor circuit 200 includes a processor 202,

18

program memory 204, a table memory 206, buffer memory 207, and an I/O port 208, all in communication with the processor 202. (As earlier indicated, there may be a plurality of processor circuits (202), memories (204), etc.)

The buffer memory 207 includes a caller ID buffer 209 and a callee ID buffer 211.

The I/O port 208 includes a database request port 210 through which a request to the database (18 shown in FIG. 1) can be made and includes a database response port 212 for receiving a reply from the database 18. The I/O port 208 further includes an RC request message input 214 for receiving the RC request message from the call controller (14 shown in FIG. 1) and includes a routing message output 216 for sending a routing message back to the call controller 14. The I/O port 208 thus acts to receive caller identifier and a callee identifier contained in the RC request message from the call controller, the RC request message being received in response to initiation of a call by a calling subscriber.

The program memory 204 includes blocks of codes for directing the processor 202 to carry out various functions of the RC (16). One of these blocks includes an RC request message handler 250 which directs the RC to produce a routing message in response to a received RC request message. The RC request message handler process is shown in greater detail at 250 in FIGS. 8A through 8D.

RC Request Message Handler

Referring to FIG. 8A, the RC request message handler begins with a first block 252 that directs the RC processor circuit (200) to store the contents of the RC request message (150) in buffers in the buffer memory 207 of FIG. 7, one of which includes the caller ID buffer 209 of FIG. 7 for separately storing the contents of the callee field 154 of the RC request message. Block 254 then directs the RC processor circuit to use the contents of the caller field 152 in the RC request message shown in FIG. 6, to locate and retrieve from the database 18 a record associating calling attributes with the calling subscriber. The located record may be referred to as a dialing profile for the caller. The retrieved dialing profile may then be stored in the buffer memory 207, for example.

Referring to FIG. 9, an exemplary data structure for a dialing profile is shown generally at 253 and includes a user name field 258, a domain field 260, and calling attributes comprising a national dialing digits (NDD) field 262, an international dialing digits (IDD) field 264, a country code field 266, a local area codes field 267, a caller minimum local length field 268, a caller maximum local length field 270, a reseller field 273, a maximum number of concurrent calls field 275 and a current number of concurrent calls field 277. Effectively the dialing profile is a record identifying calling attributes of the caller identified by the caller identifier. More generally, dialing profiles represent calling attributes of respective subscribers.

An exemplary caller profile for the Vancouver subscriber is shown generally at 276 in FIG. 10 and indicates that the user name field 258 includes the user name (2001 1050 8667) that has been assigned to the subscriber and is stored in the user name field 50 in the telephone as shown in FIG. 2.

Referring back to FIG. 10, the domain field 260 includes a domain name as shown at 282, including a node type identifier 284, a location code identifier 286, a system provider identifier 288 and a domain portion 290. The domain field 260 effectively identifies a domain or node associated with the user identified by the contents of the user name field 258.

In this embodiment, the node type identifier 284 includes the code "sp" identifying a supernode and the location

identifier **286** identifies the supernode as being in Vancouver (YVR). The system provider identifier **288** identifies the company supplying the service and the domain portion **290** identifies the “com” domain.

The national dialled digit field **262** in this embodiment includes the digit “1” and, in general, includes a number specified by the International Telecommunications Union (ITU-T) Telecommunications Standardization Sector (ITU-T) E. 164 Recommendation which assigns national dialing digits to countries.

The international dialing digit field **264** includes a code also assigned according to the ITU-T according to the country or location of the user.

The country code field **266** also includes the digit “1” and, in general, includes a number assigned according to the ITU-T to represent the country in which the user is located.

The local area codes field **267** includes a list of area codes that have been assigned by the ITU-T to the geographical area in which the subscriber is located. The caller minimum and maximum local number length fields **268** and **270** hold numbers representing minimum and maximum local number lengths permitted in the area code(s) specified by the contents of the local area codes field **267**. The reseller field **273** is optional and holds a code identifying a retailer of the services, in this embodiment “Klondike”. The maximum number of concurrent calls field **275** holds a code identifying the maximum number of concurrent calls that the user is entitled to cause to concurrently exist. This permits more than one call to occur concurrently while all calls for the user are billed to the same account. The current number of concurrent calls field **277** is initially 0 and is incremented each time a concurrent call associated with the user is initiated and is decremented when a concurrent call is terminated.

The area codes associated with the user are the area codes associated with the location code identifier **286** of the contents of the domain field **260**.

A dialing profile of the type shown in FIG. 9 is produced whenever a user registers with the system or agrees to become a subscriber to the system. Thus, for example, a user wishing to subscribe to the system may contact an office maintained by a system operator and personnel in the office may ask the user certain questions about his location and service preferences, whereupon tables can be used to provide office personnel with appropriate information to be entered into the user name **258**, domain **260**, NDD **262**, IDD **264**, country code **266**, local area codes **267**, caller minimum and maximum local length fields **268** and **270**, reseller field **273** and concurrent call fields **275** and **277** to establish a dialing profile for the user.

Referring to FIGS. 11 and 12, callee dialing profiles for users in Calgary and London, respectively for example, are shown.

In addition to creating dialing profiles when a user registers with the system, a direct-in-dial (DID) record of the type shown at **278** in FIG. 13 is added to a direct-in-dial bank table in the database (**18** in FIG. 1) to associate the user name and a host name of the supernode with which the user is associated, with an E.164 number associated with the user on the PSTN network.

An exemplary DID table record entry for the Calgary callee is shown generally at **300** in FIG. 14. The user name field **281** and user domain field **272** are analogous to the user name and user domain fields **258** and **260** of the caller dialing profile shown in FIG. 10. The contents of the DID field **274** include a E.164 public telephone number including a country code **283**, an area code **285**, an exchange code **287**

and a number **289**. If the user has multiple telephone numbers, then multiple records of the type shown at **300** would be included in the DID bank table, each having the same user name and user domain, but different DID field **274** contents reflecting the different telephone numbers associated with that user.

In addition to creating dialing profiles as shown in FIG. 9 and DID records as shown in FIG. 13 when a user registers with the system, call blocking records of the type shown in FIG. 26, call forwarding records of the type shown in FIG. 28 and voicemail records of the type shown in FIG. 30 may be added to the database **18** when a new subscriber is added to the system.

Referring back to FIG. 8A, after retrieving a dialing profile for the caller, such as shown at **276** in FIG. 10, the RC processor circuit **200** is directed to block **256** which directs the processor circuit (**200**) to determine whether the contents of the concurrent call field **277** are less than the contents of the maximum concurrent call field **275** of the dialing profile for the caller and, if so, block **271** directs the processor circuit to increment the contents of the concurrent call field **277**. If the contents of concurrent call field **277** are equal to or greater than the contents of the maximum concurrent call field **275**, block **259** directs the processor circuit **200** to send an error message back to the call controller (**14**) to cause the call controller to notify the caller that the maximum number of concurrent calls has been reached and no further calls can exist concurrently, including the presently requested call.

Assuming block **256** allows the call to proceed, the RC processor circuit **200** is directed to perform certain checks on the callee identifier provided by the contents of the callee field **154** in FIG. 6, of the RC request message **150**. These checks are shown in greater detail in FIG. 8B.

Referring to FIG. 8B, the processor (**202** in FIG. 7) is directed to a first block **257** that causes it to determine whether a digit pattern of the callee identifier (**154**) provided in the RC request message (**150**) includes a pattern that matches the contents of the international dialing digits (IDD) field **264** in the caller profile shown in FIG. 10. If so, then block **259** directs the processor (**202**) to set a call type code identifier variable maintained by the processor to indicate that the call is an international call and block **261** directs the processor to produce a reformatted callee identifier by reformatting the callee identifier into a predefined digit format. In this embodiment, this is done by removing the pattern of digits matching the IDD field contents **264** of the caller dialing profile to effectively shorten the callee identifier. Then, block **263** directs the processor **202** to determine whether or not the callee identifier has a length which meets criteria establishing it as a number compliant with the E.164 Standard set by the ITU. If the length does not meet this criteria, block **265** directs the processor **202** to send back to the call controller (**14**) a message indicating the length is not correct. The process is then ended. At the call controller **14**, routines (not shown) stored in the program memory **104** may direct the processor (**102** of FIG. 4) to respond to the incorrect length message by transmitting a message back to the telephone (**12** shown in FIG. 1) to indicate that an invalid number has been dialed.

Still referring to FIG. 8B, if the length of the amended callee identifier meets the criteria set forth at block **263**, block **269** directs the processor (**202** of FIG. 7) to make a database request to determine whether or not the amended callee identifier is found in a record in the direct-in-dial bank (DID) table. Referring back to FIG. 8B, at block **269**, if the processor **202** receives a response from the database indi-

US 9,537,762 B2

21

cating that the reformatted callee identifier produced at block 261 is found in a record in the DID bank table, then the callee is a subscriber to the system and the call is classified as a private network call by directing the processor to block 279 which directs the processor to copy the contents of the corresponding user name field (281 in FIG. 14) from the callee DID bank table record (300 in FIG. 14) into the callee ID buffer (211 in FIG. 7). Thus, the processor 202 locates a subscriber user name associated with the reformatted callee identifier. The processor 202 is then directed to point B in FIG. 8A.

Subscriber to Subscriber Calls Between Different Nodes

Referring to FIG. 8A, block 280 directs the processor (202 of FIG. 7) to execute a process to determine whether or not the node associated with the reformatted callee identifier is the same node that is associated with the caller identifier. To do this, the processor 202 determines whether or not a prefix (e.g., continent code 61) of the callee name held in the callee ID buffer (211 in FIG. 7), is the same as the corresponding prefix of the caller name held in the user name field 258 of the caller dialing profile shown in FIG. 10. If the corresponding prefixes are not the same, block 302 in FIG. 8A directs the processor (202 in FIG. 7) to set a call type flag in the buffer memory (207 in FIG. 7) to indicate the call is a cross-domain call. Then, block 350 of FIG. 8A directs the processor (202 of FIG. 7) to produce a routing message identifying an address on the private network with which the callee identified by the contents of the callee ID buffer is associated and to set a time to live for the call at a maximum value of 99999, for example.

Thus the routing message includes a caller identifier, a call identifier set according to a user name associated with the located DID bank table record and includes an identifier of a node on the private network with which the callee is associated.

The node in the system with which the callee is associated is determined by using the callee identifier to address a supernode table having records of the type as shown at 370 in FIG. 17. Each record 370 has a prefix field 372 and a supernode address field 374. The prefix field 372 includes the first n digits of the callee identifier. In this embodiment n=2. The supernode address field 374 holds a code representing the IP address or a fully qualified domain name of the node associated with the code stored in the callee identifier prefix field 372. Referring to FIG. 18, for example, if the prefix is 20, the supernode address associated with that prefix is sp.yvr.digifonica.com.

Referring to FIG. 15, a generic routing message is shown generally at 352 and includes an optional supplier prefix field 354, and optional delimiter field 356, a callee user name field 358, at least one route field 360, a time to live field 362 and other fields 364. The optional supplier prefix field 354 holds a code for identifying supplier traffic. The optional delimiter field 356 holds a symbol that delimits the supplier prefix code from the callee user name field 358. In this embodiment, the symbol is a number sign (#). The route field 360 holds a domain name or IP address of a gateway or node that is to carry the call, and the time to live field 362 holds a value representing the number of seconds the call is permitted to be active, based on subscriber available minutes and other billing parameters.

Referring to FIG. 8A and FIG. 16, an example of a routing message produced by the processor at block 350 for a caller associated with a different node than the caller is shown generally at 366 and includes only a callee field 359, a route field 361 and a time to live field 362.

22

Referring to FIG. 8A, having produced a routing message as shown in FIG. 16, block 381 directs the processor (202 of FIG. 7) to send the routing message shown in FIG. 16 to the call controller 14 shown in FIG. 1.

Referring back to FIG. 8B, if at block 257, the callee identifier stored in the callee ID buffer (211 in FIG. 7) does not begin with an international dialing digit, block 380 directs the processor (202) to determine whether or not the callee identifier begins with the same national dial digit code as assigned to the caller. To do this, the processor (202) is directed to refer to the retrieved caller dialing profile as shown in FIG. 10. In FIG. 10, the national dialing digit code 262 is the number 1. Thus, if the callee identifier begins with the number 1, then the processor (202) is directed to block 382 in FIG. 8B.

Block 382 directs the processor (202 of FIG. 7) to examine the callee identifier to determine whether or not the digits following the NDD digit identify an area code that is the same as any of the area codes identified in the local area codes field 267 of the caller dialing profile 276 shown in FIG. 10. If not, block 384 of FIG. 8B directs the processor 202 to set the call type flag to indicate that the call is a national call. If the digits following the NDD digit identify an area code that is the same as a local area code associated with the caller as indicated by the caller dialing profile, block 386 directs the processor 202 to set the call type flag to indicate a local call, national style. After executing blocks 384 or 386, block 388 directs the processor 202 to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by removing the national dialled digit and prepending a caller country code identified by the country code field 266 of the caller dialing profile shown in FIG. 10. The processor (202) is then directed to block 263 of FIG. 8B to perform other processing as already described above.

If at block 380, the callee identifier does not begin with a national dialled digit, block 390 directs the processor (202) to determine whether the callee identifier begins with digits that identify the same area code as the caller. Again, the reference for this is the retrieved caller dialing profile shown in FIG. 10. The processor (202) determines whether or not the first few digits of the callee identifier identify an area code corresponding to the local area code field 267 of the retrieved caller dialing profile. If so, then block 392 directs the processor 202 to set the call type flag to indicate that the call is a local call and block 394 directs the processor (202) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending the caller country code to the callee identifier, the caller country code being determined from the country code field 266 of the retrieved caller dialing profile shown in FIG. 10. The processor (202) is then directed to block 263 for further processing as described above.

Referring back to FIG. 8B, at block 390, the callee identifier does not start with the same area code as the caller, block 396 directs the processor (202 of FIG. 7) to determine whether the number of digits in the callee identifier, i.e., the length of the callee identifier, is within the range of digits indicated by the caller minimum local number length field 268 and the caller maximum local number length field 270 of the retrieved caller dialing profile shown in FIG. 10. If so, then block 398 directs the processor (202) to set the call type flag to indicate a local call and block 400 directs the processor (202) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending to the callee identifier the caller country code (as indicated by the country code field 266 of the

US 9,537,762 B2

23

retrieved caller dialing profile shown in FIG. 10) followed by the caller area code (as indicated by the local area code field 267 of the caller profile shown in FIG. 10). The processor (202) is then directed to block 263 of FIG. 8B for further processing as described above.

Referring back to FIG. 8B, if at block 396, the callee identifier has a length that does not fall within the range specified by the caller minimum local number length field (268 in FIG. 10) and the caller maximum local number length field (270 in FIG. 10), block 402 directs the processor 202 of FIG. 7 to determine whether or not the callee identifier identifies a valid user name. To do this, the processor 202 searches through the database (18 of FIG. 10) of dialing profiles to find a dialing profile having user name field contents (258 in FIG. 10) that match the callee identifier. If no match is found, block 404 directs the processor (202) to send an error message back to the call controller (14). If at block 402, a dialing profile having a user name field 258 that matches the callee identifier is found, block 406 directs the processor 202 to set the call type flag to indicate that the call is a private network call and then the processor is directed to block 280 of FIG. 8A. Thus, the call is classified as a private network call when the callee identifier identifies a subscriber to the private network.

From FIG. 8B, it will be appreciated that there are certain groups of blocks of codes that direct the processor 202 in FIG. 7 to determine whether the callee identifier has certain features such as an international dialing digit, a national dialing digit, an area code and a length that meet certain criteria, and cause the processor 202 to reformat the callee identifier stored in the callee ID buffer 211, as necessary into a predetermined target format including only a country code, area code, and a normal telephone number, for example, to cause the callee identifier to be compatible with the E.164 number plan standard in this embodiment. This enables block 269 in FIG. 8B to have a consistent format of callee identifiers for use in searching through the DID bank table records of the type shown in FIG. 13 to determine how to route calls for subscriber to subscriber calls on the same system. Effectively, therefore blocks 257, 380, 390, 396 and 402 establish call classification criteria for classifying the call as a public network call or a private network call. Block 269 classifies the call, depending on whether or not the formatted callee identifier has a DID bank table record and this depends on how the call classification criteria are met and block 402 directs the processor 202 of FIG. 7 to classify the call as a private network call when the callee identifier complies with a pre-defined format, i.e., is a valid user name and identifies a subscriber to the private network, after the callee identifier has been subjected to the classification criteria of blocks 257, 380, 390 and 396.

Subscriber to Non-Subscriber Calls

Not all calls will be subscriber to subscriber calls and this will be detected by the processor 202 of FIG. 7 when it executes block 269 in FIG. 8B, and does not find a DID bank table record that is associated with the callee, in the DID bank table. When this occurs, the call is classified as a public network call by directing the processor 202 to block 408 of FIG. 8B which causes it to set the contents of the callee ID buffer 211 of FIG. 7 equal to the newly formatted callee identifier, i.e., a number compatible with the E.164 standard. Then, block 410 of FIG. 8B directs the processor (202) to search a database of route or master list records associating route identifiers with dialing codes shown in FIG. 19 to locate a router having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

24

Referring to FIG. 19, a data structure for a master list or route list record is shown. Each master list record includes a master list ID field 500, a dialing code field 502, a country code field 504, a national sign number field 506, a minimum length field 508, a maximum length field 510, a national dialled digit field 512, an international dialled digit field 514 and a buffer rate field 516.

The master list ID field 500 holds a unique code such as 1019, for example, identifying the record. The dialing code field 502 holds a predetermined number pattern that the processor 202 of FIG. 7 uses at block 410 in FIG. 8B to find the master list record having a dialing code matching the first few digits of the amended callee identifier stored in the callee ID buffer 211. The country code field 504 holds a number representing the country code associated with the record and the national sign number field 506 holds a number representing the area code associated with the record. (It will be observed that the dialing code is a combination of the contents of the country code field 504 and the national sign number field 506.) The minimum length field 508 holds a number representing the minimum length of digits associated with the record and the maximum length field 51 holds a number representing the maximum number of digits in a number with which the record may be compared. The national dialled digit (NDD) field 512 holds a number representing an access code used to make a call within the country specified by the country code, and the international dialled digit (IDD) field 514 holds a number representing the international prefix needed to dial a call from the country indicated by the country code.

Thus, for example, a master list record may have a format as shown in FIG. 20 with exemplary field contents as shown.

Referring back to FIG. 8B, using the country code and area code portions of the reformatted callee identifier stored in the callee ID buffer 211, block 410 directs the processor 202 of FIG. 7 to find a master list record such as the one shown in FIG. 20 having a dialing code that matches the country code (1) and area code (604) of the callee identifier. Thus, in this example, the processor (202) would find a master list record having an ID field containing the number 1019. This number may be referred to as a route ID. Thus, a route ID number is found in the master list record associated with a predetermined number pattern in the reformatted callee identifier.

After executing block 411 in FIG. 8B, the process continues as shown in FIG. 8D. Referring to FIG. 8D, block 412 directs the processor 202 of FIG. 7 to use the route ID number to search a database of supplier records associating supplier identifiers with route identifiers to locate at least one supplier record associated with the route identifier to identify at least one supplier operable to supply a communications link for the route.

Referring to FIG. 21, a data structure for a supplier list record is shown. Supplier list records include a supplier ID field 540, a master list ID field 542, an optional prefix field 544, a specific route identifier field 546, a NDD/IDD rewrite field 548, a rate field 550, and a timeout field 551. The supplier ID field 540 holds a code identifying the name of the supplier and the master list ID field 542 holds a code for associating the supplier record with a master list record. The prefix field 544 holds a string used to identify the supplier traffic and the specific route identifier field 546 holds an IP address of a gateway operated by the supplier indicated by the supplier ID field 540. The NDD/IDD rewrite field 548 holds a code representing a rewritten value of the NDD/IDD associated with this route for this supplier, and the rate field 550 holds a code indicating the cost per second to the system

US 9,537,762 B2

25

operator to use the route provided by the gateway specified by the contents of the route identifier field **546**. The timeout field **551** holds a code indicating a time that the call controller should wait for a response from the associated gateway before giving up and trying the next gateway. This time value may be in seconds, for example. Exemplary supplier records are shown in FIGS. **22**, **23** and **24** for the exemplary suppliers shown at **20** in FIG. **1**, namely Telus, Shaw and Sprint.

Referring back to FIG. **8D**, at block **412** the processor **202** finds all supplier records that identify the master list ID found at block **410** of FIG. **8B**.

Referring back to FIG. **8D**, block **560** directs the processor **202** of FIG. **7** to begin to produce a routing message of the type shown in FIG. **15**. To do this, the processor **202** loads a routing message buffer as shown in FIG. **25** with a supplier prefix of the least costly supplier where the least costly supplier is determined from the rate fields **550** of FIG. **21** of the records associated with respective suppliers.

Referring to FIGS. **22-24**, in the embodiment shown, the supplier "Telus" has the lowest number in the rate field **550** and therefore the prefix **4973** associated with that supplier is loaded into the routing message buffer shown in FIG. **25** first.

Block **562** in FIG. **8D** directs the processor to delimit the prefix **4973** by the number sign (#) and to next load the reformatted callee identifier into the routing message buffer shown in FIG. **25**. At block **563** of FIG. **8D**, the contents of the route identifier field **546** of FIG. **21** of the record associated with the supplier "Telus" are added by the processor **202** of FIG. **7** to the routing message buffer shown in FIG. **25** after an @ sign delimiter, and then block **564** in FIG. **8D** directs the processor to get a time to live value, which in one embodiment may be 3600 seconds, for example. Block **566** then directs the processor **202** to load this time to live value and the timeout value (**551**) in FIG. **21** in the routing message buffer of FIG. **25**. Accordingly, a first part of the routing message for the Telus gateway is shown generally at **570** in FIG. **25**.

Referring back to FIG. **8D**, block **571** directs the processor **202** back to block **560** and causes it to repeat blocks **560**, **562**, **563**, **564** and **566** for each successive supplier until the routing message buffer is loaded with information pertaining to each supplier identified by the processor at block **412**. Thus, a second portion of the routing message as shown at **572** in FIG. **25** relates to the second supplier identified by the record shown in FIG. **23**. Referring back to FIG. **25**, a third portion of the routing message as shown at **574** and is associated with a third supplier as indicated by the supplier record shown in FIG. **24**.

Consequently, referring to FIG. **25**, the routing message buffer holds a routing message identifying a plurality of different suppliers able to provide gateways to the public telephone network (i.e., specific routes) to establish at least part of a communication link through which the caller may contact the callee. In this embodiment, each of the suppliers is identified, in succession, according to rate. Other criteria for determining the order in which suppliers are listed in the routing message may include preferred supplier priorities which may be established based on service agreements, for example.

Referring back to FIG. **8D**, block **568** directs the processor **202** of FIG. **7** to send the routing message shown in FIG. **25** to the call controller **14** in FIG. **1**.

Subscriber to Subscriber Calls Within the Same Node

Referring back to FIG. **8A**, if at block **280**, the callee identifier received in the RC request message has a prefix

26

that identifies the same node as that associated with the caller, block **600** directs the processor **202** to use the callee identifier in the callee ID buffer **211** to locate and retrieve a dialing profile for the callee. The dialing profile may be of the type shown in FIG. **11** or **12**, for example. Block **602** of FIG. **8A** then directs the processor **202** of FIG. **7** to get call block, call forward and voicemail records from the database **18** of FIG. **1** based on the user name identified in the callee dialing profile retrieved by the processor at block **600**. Call block, call forward and voicemail records may be as shown in FIGS. **26**, **27**, **28** and **30** for example.

Referring to FIG. **26**, the call block records include a user name field **604** and a block pattern field **606**. The user name field holds a user name corresponding to the user name in the user name field (**258** in FIG. **10**) of the callee profile and the block pattern field **606** holds one or more E.164-compatible numbers or user names identifying PSTN numbers or system subscribers from whom the subscriber identified in the user name field **604** does not wish to receive calls.

Referring to FIG. **8A** and FIG. **27**, block **608** directs the processor **202** of FIG. **7** to determine whether or not the caller identifier received in the RC request message matches a block pattern stored in the block pattern field **606** of the call block record associated with the callee identified by the contents of the user name field **604** in FIG. **26**. If the caller identifier matches a block pattern, block **610** directs the processor to send a drop call or non-completion message to the call controller (**14**) and the process is ended. If the caller identifier does not match a block pattern associated with the callee, block **609** directs the processor to store the user name and domain of the callee, as determined from the callee dialing profile, and a time to live value in the routing message buffer as shown at **650** in FIG. **32**. Referring back to FIG. **8A**, block **612** then directs the processor **202** to determine whether or not call forwarding is required.

Referring to FIG. **28**, the call forwarding records include a user name field **614**, a destination number field **616**, and a sequence number field **618**. The user name field **614** stores a code representing a user with which the record is associated. The destination number field **616** holds a user name representing a number to which the current call should be forwarded, and the sequence number field **618** holds an integer number indicating the order in which the user name associated with the corresponding destination number field **616** should be attempted for call forwarding. The call forwarding table may have a plurality of records for a given user. The processor **202** of FIG. **7** uses the contents of the sequence number field **618** to place the records for a given user in order. As will be appreciated below, this enables the call forwarding numbers to be tried in an ordered sequence.

Referring to FIG. **8A** and FIG. **29**, if at block **612**, the call forwarding record for the callee identified by the callee identifier contains no contents in the destination number field **616** and accordingly no contents in the sequence number field **618**, there are no call forwarding entries for this callee, and the processor **202** is directed to block **620** in FIG. **8C**. If there are entries in the call forwarding table **27**, block **622** in FIG. **8A** directs the processor **202** to search the dialing profile table to find a dialing profile record as shown in FIG. **9**, for the user identified by the destination number field **616** of the call forward record shown in FIG. **28**. The processor **202** of FIG. **7** is further directed to store the user name and domain for that user and a time to live value in the routing message buffer as shown at **652** in FIG. **32**, to produce a routing message as illustrated. This process is repeated for each call forwarding record associated with the callee identified by the callee ID buffer **211** in FIG. **7** to add

27

to the routing message buffer all call forwarding user names and domains associated with the callee.

Referring back to FIG. 8A, if at block 612 there are no call forwarding records, then at block 620 in FIG. 8C the processor 202 is directed to determine whether or not the user identified by the callee identifier has paid for voicemail service. This is done by checking to see whether or not a flag is set in a voicemail record of the type shown in FIG. 30 in a voicemail table stored in the database 18 shown in FIG. 1.

Referring to FIG. 30, voicemail records in this embodiment may include a user name field 624, a voicemail server field 626, a seconds to voicemail field 628 and an enable field 630. The user name field 624 stores the user name of the callee. The voicemail server field 626 holds a code identifying a domain name of a voicemail server associated with the user identified by the user name field 624. The seconds to voicemail field 628 holds a code identifying the time to wait before engaging voicemail, and the enable field 630 holds a code representing whether or not voicemail is enabled for the user. Referring back to FIG. 8C, at block 620 if the processor 202 of FIG. 7 finds a voicemail record as shown in FIG. 30 having user name field 624 contents matching the callee identifier, the processor is directed to examine the contents of the enabled field 630 to determine whether or not voicemail is enabled. If voicemail is enabled, then block 640 in FIG. 8C directs the processor 202 to FIG. 7 to store the contents of the voicemail server field 626 and the contents of the seconds to voicemail field 628 in the routing message buffer, as shown at 654 in FIG. 32. Block 642 then directs the processor 202 to get time to live values for each path specified by the routing message according to the cost of routing and the user's balance. These time to live values are then appended to corresponding paths already stored in the routing message buffer.

Referring back to FIG. 8C, block 644 then directs the processor 202 of FIG. 7 to store the IP address of the current node in the routing message buffer as shown at 656 in FIG. 32. Block 646 then directs the processor 202 to send the routing message shown in FIG. 32 to the call controller 14 in FIG. 1. Thus in the embodiment described the routing controller will produce a routing message that will cause at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server.

Referring back to FIG. 1, the routing message whether of the type shown in FIG. 16, 25 or 32, is received at the call controller 14 and the call controller interprets the receipt of the routing message as a request to establish a call.

Referring to FIG. 4, the program memory 104 of the call controller 14 includes a routing to gateway routine depicted generally at 122.

Where a routing message of the type shown in FIG. 32 is received by the call controller 14, the routing to gateway routine 122 shown in FIG. 4 may direct the processor 102 to cause a message to be sent back through the internet 13 shown in FIG. 1 to the callee telephone 15, knowing the IP address of the callee telephone 15 from the user name.

Alternatively, if the routing message is of the type shown in FIG. 16, which identifies a domain associated with another node in the system, the call controller may send a SIP invite message along the high speed backbone 17 connected to the other node. The other node functions as explained above, in response to receipt of a SIP invite message.

If the routing message is of the type shown in FIG. 25 where there are a plurality of gateway suppliers available, the call controller sends a SIP invite message to the first supplier, in this case Telus, using a dedicated line or an

28

internet connection to determine whether or not Telus is able to handle the call. If the Telus gateway returns a message indicating it is not able to handle the call, the call controller 14 then proceeds to send a SIP invite message to the next supplier, in this case Shaw. The process is repeated until one of the suppliers responds indicating that it is available to carry the call. Once a supplier responds indicating that it is able to carry the call, the supplier sends back to the call controller 14 an IP address for a gateway provided by the supplier through which the call or audio path of the call will be carried. This IP address is sent in a message from the call controller 14 to the media relay 9 which responds with a message indicating an IP address to which the caller telephone should send its audio/video, traffic and an IP address to which the gateway should send its audio/video for the call. The call controller conveys the IP address at which the media relay expects to receive audio/video from the caller telephone, to the caller telephone 12 in a message. The caller telephone replies to the call controller with an IP address at which it would like to receive audio/video and the call controller conveys that IP address to the media relay. The call may then be conducted between the caller and callee through the media relay and gateway.

Referring back to FIG. 1, if the call controller 14 receives a routing message of the type shown in FIG. 32, and which has at least one call forwarding number and/or a voicemail number, the call controller attempts to establish a call to the callee telephone 15 by seeking from the callee telephone a message indicating an IP address to which the media relay should send audio/video. If no such message is received from the callee telephone, no call is established. If no call is established within a pre-determined time, the call controller 14 attempts to establish a call with the next user identified in the call routing message in the same manner. This process is repeated until all call forwarding possibilities have been exhausted, in which case the call controller communicates with the voicemail server 19 identified in the routing message to obtain an IP address to which the media relay should send audio/video and the remainder of the process mentioned above for establishing IP addresses at the media relay 9 and the caller telephone is carried out to establish audio/video paths to allowing the caller to leave a voicemail message with the voicemail server.

When an audio/video path through the media relay is established, a call timer maintained by the call controller 14 logs the start date and time of the call and logs the call ID and an identification of the route (i.e., audio/video path IP address) for later use in billing.

Time to Live

Referring to FIGS. 33A and 33B, a process for determining a time to live value for any of blocks 642 in FIG. 8C, 350 in FIG. 8A or 564 in FIG. 8D above is described. The process is executed by the processor 202 shown in FIG. 7. Generally, the process involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Referring to FIG. 33A, in this embodiment, the process begins with a first block 700 that directs the RC processor to determine whether or not the call type set at block 302 in FIG. 8A indicates the call is a network or cross-domain call.

US 9,537,762 B2

29

If the call is a network or cross-domain call, block 702 of FIG. 33A directs the RC processor to set the time to live equal to 99999 and the process is ended. Thus, the network or cross-domain call type has a long time to live. If at block 700 the call type is determined not to be a network or cross-domain type, block 704 directs the RC processor to get a subscriber bundle table record from the database 18 in FIG. 1 and store it locally in the subscriber bundle record buffer at the RC 14.

Referring to FIG. 34, a subscriber bundle table record is shown generally at 706. The record includes a user name field 708 and a services field 710. The user name field 708 holds a code identifying the subscriber user name and the services field 710 holds codes identifying service features assigned to the subscriber, such as free local calling, call blocking and voicemail, for example.

FIG. 35 shows an exemplary subscriber bundle record for the Vancouver caller. In this record the user name field 708 is loaded with the user name 2001 1050 8667 and the services field 710 is loaded with codes 10, 14 and 16 corresponding to free local calling, call blocking and voicemail, respectively. Thus, user 2001 1050 8667 has free local calling, call blocking and voicemail features.

Referring back to FIG. 33A, after having loaded a subscriber bundle record into the subscriber bundle record buffer, block 712 directs the RC processor to search the database (18) to determine whether or not there is a bundle override table record for the master list ID value that was determined at block 410 in FIG. 8B. An exemplary bundle override table record is shown at 714 in FIG. 36. The bundle table record includes a master list ID field 716, an override type field 718, an override value field 720 a first interval field 722 and a second interval field 724. The master list ID field 716 holds a master list ID code. The override type field 718 holds an override type code indicating a fixed, percent or cent amount to indicate the amount by which a fee will be increased. The override value field 720 holds a real number representing the value of the override type. The first interval field 722 holds a value indicating the minimum number of seconds for a first level of charging and the second interval field 724 holds a number representing a second level of charging.

Referring to FIG. 37, a bundle override record for the located master list ID code is shown generally at 726 and includes a master list ID field 716 holding the code 1019 which was the code located in block 410 of FIG. 8B. The override type field 718 includes a code indicating the override type is a percentage value and the override value field 720 holds the value 10.0 indicating that the override will be 10.0% of the charged value. The first interval field 722 holds a value representing 30 seconds and the second interval field 724 holds a value representing 6 seconds. The 30 second value in the first interval field 722 indicates that charges for the route will be made at a first rate for 30 seconds and thereafter the charges will be made at a different rate in increments of 6 seconds, as indicated by the contents of the second interval field 724.

Referring back to FIG. 33A, if at block 712 the processor finds a bundle override record of the type shown in FIG. 37, block 728 directs the processor to store the bundle override record in local memory. In the embodiment shown, the bundle override record shown in FIG. 37 is stored in the bundle override record buffer at the RC as shown in FIG. 7. Still referring to FIG. 33A, block 730 then directs the RC processor to determine whether or not the subscriber bundle table record 706 in FIG. 35 has a services field including a code identifying that the user is entitled to free local calling

30

and also directs the processor to determine whether or not the call type is not a cross domain cell, i.e., it is a local or local/national style. If both of these conditions are satisfied, block 732 directs the processor to set the time to live equal to 99999, giving the user a long period of time for the call. The process is then ended. If the conditions associated with block 730 are not satisfied, block 734 of FIG. 33B directs the RC processor to retrieve a subscriber account record associated with a participant in the call. This is done by copying and storing in the subscriber account record buffer a subscriber account record for the caller.

Referring to FIG. 38, an exemplary subscriber account table record is shown generally at 736. The record includes a user name field 738, a funds balance field 740 and a free time field 742. The user name field 738 holds a subscriber user name, the funds balance field 740 holds a real number representing the dollar value of credit available to the subscriber and the free time field 742 holds an integer representing the number of free seconds that the user is entitled to.

An exemplary subscriber account record for the Vancouver caller is shown generally at 744 in FIG. 39, wherein the user name field 738 holds the user name 2001 1050 8667, the funds balance field 740 holds the value \$10.00, and the free time field 742 holds the value 100. The funds balance field holding the value of \$10.00 indicates the user has \$10.00 worth of credit and the free time field having the value of 100 indicates that the user has a balance of 100 free seconds of call time.

Referring back to FIG. 33B, after copying and storing the subscriber account record shown in FIG. 39 from the database to the subscriber account record buffer RC, block 746 directs the processor to determine whether or not the subscriber account record funds balance field 740 or free time field 742 are greater than zero. If they are not greater than zero, block 748 directs the processor to set the time to live equal to zero and the process is ended. The RC then sends a message back to the call controller to cause the call controller to deny the call to the caller. If the conditions associated with block 746 are satisfied, block 750 directs the processor to calculate the call cost per unit time. A procedure for calculating the call cost per unit time is described below in connection with FIG. 41.

Assuming the procedure for calculating the cost per second returns a number representing the call cost per second, block 752 directs the processor 202 in FIG. 7 to determine whether or not the cost per second is equal to zero. If so, block 754 directs the processor to set the time to live to 99999 to give the caller a very long length of call and the process is ended.

If at block 752 the call cost per second is not equal to zero, block 756 directs the processor 202 in FIG. 7 to calculate a first time to live value as a sum of a free time attributed to the participant in the communication session and the quotient of the funds balance held by the participant to the cost per unit time value. To do this, the processor 202 of FIG. 7 is directed to set a first time value or temporary time to live value equal to the sum of the free time provided in the free time field 742 of the subscriber account record shown in FIG. 39 and the quotient of the contents of the funds balance field 740 in the subscriber account record for the call shown in FIG. 39 and the cost per second determined at block 750 of FIG. 33B. Thus, for example, if at block 750 the cost per second is determined to be three cents per second and the funds balance field holds the value \$10.00, the quotient of the funds balance and cost per second is 333 seconds and

31

this is added to the contents of the free time field **742**, which is **100**, resulting in a time to live of 433 seconds.

Block **758** then directs the RC processor to produce a second time value in response to the first time value and the billing pattern associated with the participant as established by the bundle override record shown in FIG. **37**. This process is shown in greater detail at **760** in FIG. **40** and generally involves producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

Referring to FIG. **40**, the process for producing the second time value begins with a first block **762** that directs the processor **202** in FIG. **7** to set a remainder value equal to the difference between the time to live value calculated at block **756** in FIG. **33B** and the contents of the first interval field **722** of the record shown in FIG. **37** modulus the contents of the second interval field **724** of FIG. **37**. Thus, in the example given, the difference between the time to live field and the first interval field is 433 minus 30, which is 403 and therefore the remainder produced by 403 divided by 6 is 1. Block **764** then directs the processor to determine whether or not this remainder value is greater than zero and, if so, block **766** directs the processor to subtract the remainder from the first time value and set the difference as the second time value. To do this the processor is directed to set the time to live value equal to the current time to live of 433 minus the remainder of 1, i.e., 432 seconds. The processor is then returned back to block **758** of FIG. **33B**.

Referring back to FIG. **40**, if at block **764** the remainder is not greater than zero, block **768** directs the processor **202** of FIG. **7** to determine whether or not the time to live is less than the contents of the first interval field **722** in the record shown in FIG. **37**. If so, then block **770** of FIG. **40** directs the processor to set the time to live equal to zero. Thus, the second time value is set to zero when the remainder is not greater than zero and the first time value is less than the first billing interval. If at block **768** the conditions of that block are not satisfied, the processor returns the first time to live value as the second time to live value.

Thus, referring to FIG. **33B**, after having produced a second time to live value, block **772** directs the processor to set the time to live value for use in blocks **342**, **350** or **564**.

Cost Per Second

Referring back to FIG. **33B**, at block **750** it was explained that a call cost per unit time is calculated. The following explains how that call cost per unit time value is calculated.

Referring to FIG. **41**, a process for calculating a cost per unit time is shown generally at **780**. The process is executed by the processor **202** in FIG. **7** and generally involves locating a record in a database, the record comprising a mark-up type indicator, a mark-up value and a billing pattern and setting a reseller rate equal to the sum of the mark-up value and the buffer rate, locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default operator mark-up record specifying a default cost per unit time and setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The process begins with a first set of blocks **782**, **802** and **820** which direct the processor **202** in FIG. **7** to locate at least one of a record associated with a reseller and a route

32

associated with the reseller, a record associated with the reseller, and a default reseller mark-up record. Block **782**, in particular, directs the processor to address the database **18** to look for a record associated with a reseller and a route with the reseller by looking for a special rate record based on the master list ID established at block **410** in FIG. **8C**.

Referring to FIG. **42**, a system operator special rate table record is shown generally at **784**. The record includes a reseller field **786**, a master list ID field **788**, a mark-up type field **790**, a mark-up value field **792**, a first interval field **794** and a second interval field **796**. The reseller field **786** holds a reseller ID code and the master list ID field **788** holds a master list ID code. The mark-up type field **790** holds a mark-up type such as fixed percent or cents and the mark-up value field **792** holds a real number representing the value corresponding to the mark-up type. The first interval field **794** holds a number representing a first level of charging and the second interval field **796** holds a number representing a second level of charging.

An exemplary system operator special rate table for a reseller known as "Klondike" is shown at **798** in FIG. **43**. In this record, the reseller field **786** holds a code indicating the retailer ID is Klondike, the master list ID field **788** holds the code **1019** to associate the record with the master list ID code **1019**. The mark-up type field **790** holds a code indicating the mark-up type is cents and the mark-up value field **792** holds a mark-up value indicating $\frac{1}{10}$ of one cent. The first interval field **794** holds the value 30 and the second interval field **796** holds the value 6, these two fields indicating that the operator allows 30 seconds for free and then billing is done in increments of 6 seconds after that.

Referring back to FIG. **41**, if at block **782** a record such as the one shown in FIG. **43** is located in the system operator special rates table, the processor is directed to block **800** in FIG. **41**. If such a record is not found in the system operator special rates table, block **802** directs the processor to address the database **18** to look in a system operator mark-up table for a mark-up record associated with the reseller.

Referring to FIG. **44**, an exemplary system operator mark-up table record is shown generally at **804**. The record includes a reseller field **806**, a mark-up type field **808**, a mark-up value field **810**, a first interval field **812** and a second interval field **814**. The reseller mark-up type, mark-up value, first interval and second interval fields are as described in connection with the fields by the same names in the system operator special rates table shown in FIG. **42**.

FIG. **45** provides an exemplary system operator mark-up table record for the reseller known as Klondike and therefore the reseller field **806** holds the value "Klondike", the mark-up type field **808** holds the value cents, the mark-up value field holds the value 0.01, the first interval field **812** holds the value 30 and the second interval field **814** holds the value 6. This indicates that the reseller "Klondike" charges by the cent at a rate of one cent per minute. The first 30 seconds of the call are free and billing is charged at the rate of one cent per minute in increments of 6 seconds.

FIG. **46** provides an exemplary system operator mark-up table record for cases where no specific system operator mark-up table record exists for a particular reseller, i.e., a default reseller mark-up record. This record is similar to the record shown in FIG. **45** and the reseller field **806** holds the value "all", the mark-up type field **808** is loaded with a code indicating mark-up is based on a percentage, the mark-up value field **810** holds the percentage by which the cost is marked up, and the first and second interval fields **812** and **814** identify first and second billing levels.

Referring back to FIG. 41, if at block 802 a specific mark-up record for the reseller identified at block 782 is not located, block 820 directs the processor to get the mark-up record shown in FIG. 46, having the “all” code in the reseller field 806. The processor is then directed to block 800.

Referring back to FIG. 41, at block 800, the processor 202 of FIG. 7 is directed to set a reseller rate equal to the sum of the mark-up value of the record located by blocks 782, 802 or 820 and the buffer rate specified by the contents of the buffer rate field 516 of the master list record shown in FIG. 20. To do this, the RC processor sets a variable entitled “reseller cost per second” to a value equal to the sum of the contents of the mark-up value field (792, 810) of the associated record, plus the contents of the buffer rate field (516) from the master list record associated with the master list ID. Then, block 822 directs the processor to set a system operator cost per second variable equal to the contents of the buffer rate field (516) from the master list record. Block 824 then directs the processor to determine whether the call type flag indicates the call is local or national/local style and whether the caller has free local calling. If both these conditions are met, then block 826 sets the user cost per second variable equal to zero and sets two increment variables equal to one, for use in later processing. The cost per second has thus been calculated and the process shown in FIG. 41 is ended.

If at block 824 the conditions of that block are not met, the processor 202 of FIG. 7 is directed to locate at least one of a bundle override table record specifying a route cost per unit time associated with a route associated with the communication session, a reseller special destinations table record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default reseller global mark-up record specifying a default cost per unit time.

To do this block 828 directs the processor 202 of FIG. 7 to determine whether or not the bundle override record 726 in FIG. 37 located at block 712 in FIG. 33A has a master list ID equal to the stored master list ID that was determined at block 410 in FIG. 8B. If not, block 830 directs the processor to find a reseller special destinations table record in a reseller special destinations table in the database (18), having a master list ID code equal to the master list ID code of the master list ID that was determined at block 410 in FIG. 8B. An exemplary reseller special destinations table record is shown in FIG. 47 at 832. The reseller special destinations table record includes a reseller field 834, a master list ID field 836, a mark-up type field 838, a mark-up value field 840, a first interval field 842 and a second interval field 844. This record has the same format as the system operator special rates table record shown in FIG. 42, but is stored in a different table to allow for different mark-up types and values and time intervals to be set according to resellers’ preferences. Thus, for example, an exemplary reseller special destinations table record for the reseller “Klondike” is shown at 846 in FIG. 48. The reseller field 834 holds a value indicating the reseller as the reseller “Klondike” and the master list ID field holds the code 1019. The mark-up type field 838 holds a code indicating the mark-up type is percent and the mark-up value field 840 holds a number representing the mark-up value as 5%. The first and second interval fields identify different billing levels used as described earlier.

Referring back to FIG. 41, the record shown in FIG. 48 may be located at block 830, for example. If at block 830

such a record is not found, then block 832 directs the processor to get a default operator global mark-up record based on the reseller ID.

Referring to FIG. 49, an exemplary default reseller global mark-up table record is shown generally at 848. This record includes a reseller field 850, a mark-up type field 852, a mark-up value field 854, a first interval field 856 and a second interval field 858. The reseller field 850 holds a code identifying the reseller. The mark-up type field 852, the mark-up value field 854 and the first and second interval fields 856 and 858 are of the same type as described in connection with fields of the same name in FIG. 47, for example. The contents of the fields of this record 860 may be set according to system operator preferences, for example.

Referring to FIG. 50, an exemplary reseller global mark-up table record is shown generally at 860. In this record, the reseller field 850 holds a code indicating the reseller is “Klondike”, the mark-up type field 852 holds a code indicating the mark-up type is percent, the mark-up value field 854 holds a value representing 10% as the mark-up value, the first interval field 856 holds the value 30 and the second interval field 858 holds the values 30 and 6 respectively to indicate the first 30 seconds are free and billing is to be done in 6 second increments after that.

Referring back to FIG. 41, should the processor get to block 832, the reseller global mark-up table record as shown in FIG. 50 is retrieved from the database and stored locally at the RC. As seen in FIG. 41, it will be appreciated that if the conditions are met in blocks 828 or 830, or if the processor executes block 832, the processor is then directed to block 862 which causes it to set an override value equal to the contents of the mark-up value field of the located record, to set the first increment variable equal to the contents of the first interval field of the located record and to set the second increment variable equal to the contents of the second interval field of the located record. (The increment variables were alternatively set to specific values at block 826 in FIG. 41.)

It will be appreciated that the located record could be a bundle override record of the type shown in FIG. 37 or the located record could be a reseller special destination record of the type shown in FIG. 48 or the record could be a reseller global mark-up table record of the type shown in FIG. 50. After the override and first and second increment variables have been set at block 862, the processor 202 of FIG. 7 is directed to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time, depending on which record was located. To do this, block 864 directs the processor to set the cost per unit time equal to the sum of the reseller cost set at block 800 in FIG. 41, plus the contents of the override variable calculated in block 862 in FIG. 41. The cost per unit time has thus been calculated and it is this cost per unit time that is used in block 752 of FIG. 33B, for example.

Terminating the Call

In the event that either the caller or the callee terminates a call, the telephone of the terminating party sends a SIP bye message to the controller 14. An exemplary SIP bye message is shown at 900 in FIG. 51 and includes a caller field 902, a callee field 904 and a call ID field 906. The caller field 902 holds a twelve digit user name, the callee field 904 holds a PSTN compatible number or user name, and the call ID field 906 holds a unique call identifier field of the type shown in the call ID field 65 of the SIP invite message shown in FIG. 3.

US 9,537,762 B2

35

Thus, for example, referring to FIG. 52, a SIP bye message for the Calgary callee is shown generally at 908 and the caller field 902 holds a user name identifying the caller, in this case 2001 1050 8667, the callee field 904 holds a user name identifying the Calgary callee, in this case 2001 1050 2222, and the call ID field 906 holds the code FA10 @ 192.168.0.20, which is the call ID for the call.

The SIP bye message shown in FIG. 52 is received at the call controller 14 and the call controller executes a process as shown generally at 910 in FIG. 53. The process includes a first block 912 that directs the call controller processor 202 of FIG. 7 to copy the caller, callee and call ID field contents from the SIP bye message received from the terminating party to corresponding fields of an RC stop message buffer (not shown). Block 914 then directs the processor to copy the call start time from the call timer and to obtain a call stop time from the call timer. Block 916 then directs the call controller to calculate a communication session time by determining the difference in time between the call start time and the call stop time. This session time is then stored in a corresponding field of the RC call stop message buffer. Block 917 then directs the processor to decrement the contents of the current concurrent call field 277 of the dialing profile for the caller as shown in FIG. 10, to indicate that there is one less concurrent call in progress. A copy of the amended dialing profile for the caller is then stored in the database 18 of FIG. 1. Block 918 then directs the processor to copy the route from the call log. An RC call stop message produced as described above is shown generally at 1000 in FIG. 54. An RC call stop message specifically associated with the call made to the Calgary callee is shown generally at 1020 in FIG. 55.

Referring to FIG. 54, the RC stop call message includes a caller field 1002, callee field 1004, a call ID field 1006, an account start time field 1008, an account stop time field 1010, a communication session time 1012 and a route field 1014. The caller field 1002 holds a user name, the callee field 1004 holds a PSTN-compatible number or system number, the call ID field 1006 holds the unique call identifier received from the SIP invite message shown in FIG. 3, the account start time field 1008 holds the date and start time of the call, the account stop time field 1010 holds the date and time the call ended, the communication session time field 1012 holds a value representing the difference between the start time and the stop time, in seconds, and the route field 1014 holds the IP address for the communications link that was established.

Referring to FIG. 55, an exemplary RC stop call message for the Calgary callee is shown generally at 1020. In this example the caller field 1002 holds the user name 2001 1050 8667 identifying the Vancouver-based caller and the callee field 1004 holds the user name 2001 1050 2222 identifying the Calgary callee. The contents of the call ID field 1006 are FA10 @ 192.168.0.20. The contents of the account start time field 1008 are 2006-12-30 12:12:12 and the contents of the account stop time field are 2006-12-30 12:12:14. The contents of the communication session time field 1012 are 2 to indicate 2 seconds call duration and the contents of the route field are 72.64.39.58.

Referring back to FIG. 53, after having produced an RC call stop message, block 920 directs the processor 202 in FIG. 7 to send the RC stop message compiled in the RC call stop message buffer to the RC 16 of FIG. 1. Block 922 directs the call controller 14 to send a "bye" message back to the party that did not terminate the call.

The RC 16 of FIG. 1 receives the call stop message and an RC call stop message process is invoked at the RC, the

36

process being shown at 950 in FIGS. 56A, 56B and 56C. Referring to FIG. 56A, the RC stop message process 950 begins with a first block 952 that directs the processor 202 in FIG. 7 to determine whether or not the communication session time is less than or equal to the first increment value set by the cost calculation routine shown in FIG. 41, specifically blocks 826 or 862 thereof. If this condition is met, then block 954 of FIG. 56A directs the RC processor to set a chargeable time variable equal to the first increment value set at block 826 or 862 of FIG. 41. If at block 952 of FIG. 56A the condition is not met, block 956 directs the RC processor to set a remainder variable equal to the difference between the communication session time and the first increment value mod the second increment value produced at block 826 or 862 of FIG. 41. Then, the processor is directed to block 958 of FIG. 56A which directs it to determine whether or not the remainder is greater than zero. If so, block 960 directs the RC processor to set the chargeable time variable equal to the difference between the communication session time and the remainder value. If at block 958 the remainder is not greater than zero, block 962 directs the RC processor to set the chargeable time variable equal to the contents of the communication session time from the RC stop message. The processor is then directed to block 964. In addition, after executing block 954 or block 960, the processor is directed to block 964.

Block 964 directs the processor 202 of FIG. 7 to determine whether or not the chargeable time variable is greater than or equal to the free time balance as determined from the free time field 742 of the subscriber account record shown in FIG. 39. If this condition is satisfied, block 966 of FIG. 56A directs the processor to set the free time field 742 in the record shown in FIG. 39, to zero. If the chargeable time variable is not greater than or equal to the free time balance, block 968 directs the RC processor to set a user cost variable to zero and block 970 then decrements the free time field 742 of the subscriber account record for the caller by the chargeable time amount determined by block 954, 960 or 962.

If at Block 964 the processor 202 of FIG. 7 was directed to block 966 which causes the free time field (742 of FIG. 39) to be set to zero, referring to FIG. 56B, block 972 directs the processor to set a remaining chargeable time variable equal to the difference between the chargeable time and the contents of the free time field (742 of FIG. 39). Block 974 then directs the processor to set the user cost variable equal to the product of the remaining chargeable time and the cost per second calculated at block 750 in FIG. 33B. Block 976 then directs the processor to decrement the funds balance field (740) of the subscriber account record shown in FIG. 39 by the contents of the user cost variable calculated at block 974.

After completing block 976 or after completing block 970 in FIG. 56A, block 978 of FIG. 56B directs the processor 202 of FIG. 7 to calculate a reseller cost variable as the product of the reseller rate as indicated in the mark-up value field 810 of the system operator mark-up table record shown in FIG. 45 and the communication session time determined at block 916 in FIG. 53. Then, block 980 of FIG. 56B directs the processor to add the reseller cost to the reseller balance field 986 of a reseller account record of the type shown in FIG. 57 at 982.

The reseller account record includes a reseller ID field 984 and the aforementioned reseller balance field 986. The reseller ID field 984 holds a reseller ID code, and the reseller balance field 986 holds an accumulated balance of charges.

US 9,537,762 B2

37

Referring to FIG. 58, a specific reseller accounts record for the reseller "Klondike" is shown generally at 988. In this record the reseller ID field 984 holds a code representing the reseller "Klondike" and the reseller balance field 986 holds a balance of \$100.02. Thus, the contents of the reseller balance field 986 in FIG. 58 are incremented by the reseller cost calculated at block 978 of FIG. 56B.

Still referring to FIG. 56B, after adding the reseller cost to the reseller balance field as indicated by block 980, block 990 directs the processor to 202 of FIG. 7 calculate a system operator cost as the product of the system operator cost per second, as set at block 822 in FIG. 41, and the communication session time as determined at block 916 in FIG. 53. Block 992 then directs the processor to add the system operator cost value calculated at block 990 to a system operator accounts table record of the type shown at 994 in FIG. 59. This record includes a system operator balance field 996 holding an accumulated charges balance. Referring to FIG. 60 in the embodiment described, the system operator balance field 996 may hold the value \$1,000.02 for example, and to this value the system operator cost calculated at block 990 is added when the processor executes block 992 of FIG. 56B.

Ultimately, the final reseller balance 986 in FIG. 58 holds a number representing an amount owed to the reseller by the system operator and the system operator balance 996 of FIG. 59 holds a number representing an amount of profit for the system operator.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

What is claimed is:

1. A method of routing communications in a system in which a first participant identifier is associated with a first participant registered with the system and wherein a second participant identifier is associated with a second participant, the first participant being associated with a first participant device operable to establish a communication using the system to a second participant device associated with the second participant, the system comprising at least one processor operably configured to execute program code stored in at least one memory, the method comprising:

in response to the first participant device initiating the communication to the second participant device, receiving the first participant identifier and the second participant identifier from the first participant device; using the first participant identifier to locate, via the at least one processor, a first participant profile from among a plurality of participant profiles that are stored in a database, the first participant profile comprising one or more attributes associated with the first participant;

processing the second participant identifier, via the at least one processor, based on at least one of the one or more attributes from the first participant profile, to produce a new second participant identifier;

classifying the communication, via the at least one processor, using the new second participant identifier, as a first network communication if a first network classification criterion is met and as a second network communication if a second network classification criterion is met;

when the first network classification criterion is met, producing, via the at least one processor, a first network routing message, the first network routing message

38

identifying an address in the system, the address being associated with the second participant device; and when the second network classification criterion is met, producing, via the at least one processor, a second network routing message, the second network routing message identifying an address associated with a gateway to a network external to the system, wherein the second network classification criterion is met if the second participant is not registered with the system.

2. The method of claim 1, further comprising determining, based on at least one of the one or more attributes, whether a third network classification criterion is met, and when the third network classification criterion is met, producing an error message that prevents the communication from being established.

3. The method of claim 2, further comprising: updating the first participant profile to cause at least one of the one or more attributes to be modified.

4. The method of claim 2, wherein the classifying comprises: causing a database of records to be searched with the new second participant identifier.

5. The method of claim 4, wherein the classifying further comprises:

classifying the communication as the first network communication if a record is found in the database and classifying the communication as the second network communication if the record is not found in the database.

6. The method of claim 2, wherein if the third network classification criterion is met, the error message is sent to a call controller.

7. The method of claim 1, wherein the processing comprises:

comparing at least one of the one or more attributes from the first participant profile with at least a portion of the second participant identifier.

8. The method of claim 7, wherein the comparing comprises at least one of:

determining whether the second participant identifier includes a portion that matches an international dialing digit (IDD) associated with the first participant profile; determining whether the second participant identifier includes a portion that matches a national dialing digit (NDD) associated with the first participant profile; determining whether the second participant identifier includes a portion that matches an area code associated with the first participant profile; and

determining whether the second participant identifier has a length within a range specified in the first participant profile.

9. The method of claim 1, wherein the system comprises an IP network and the first participant device is in data communication with the IP network, wherein the first network routing message causes the communication to take place entirely over the IP network, and wherein the network external to the system is a circuit switched network.

10. The method of claim 9, wherein the first network routing message identifies a first IP address, and wherein the second network routing message identifies a second IP address.

11. The method of claim 9, further comprising: updating the first participant profile to cause at least one of the one or more attributes to be modified.

12. The method of claim 1, wherein the second participant identifier is a plurality of dialing digits.

US 9,537,762 B2

39

13. The method of claim 1, wherein the processing comprises at least one of:

- removing an international dialing digit (IDD) from the second participant identifier;
- removing a national dialing digit (NDD) from the second participant identifier and prepending a first participant country code to the second participant identifier;
- prepending a first participant country code to the second participant identifier; and
- prepending a first participant country code and area code to the second participant identifier.

14. The method of claim 1, wherein the classifying comprises:

- causing a database of records to be searched with the new second participant identifier and determining whether the second participant is registered with the system.

15. The method of claim 14, wherein the classifying further comprises:

- classifying the communication as the first network communication if a record is found in the database and classifying the communication as the second network communication if the record is not found in the database.

16. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 14.

17. The method of claim 1, wherein the new second participant identifier is in a pre-defined format.

18. The method of claim 17, wherein the pre-defined format comprises a number compliant with an E.164 international standard.

19. The method of claim 1, wherein if the first network classification criterion is met, the second participant is registered with the system.

20. The method of claim 1 further comprising registering the second participant with the system including storing a second participant profile comprising one or more attributes associated with the second participant in the plurality of participant profiles that are stored in the database.

21. A method of routing communications in a system in which a first participant identifier is associated with a first participant registered with the system and wherein a second participant identifier is associated with a second participant, the first participant being associated with a first participant device operable to establish a communication using the system to a second participant device associated with the second participant, the system comprising at least one processor operably configured to execute program code stored in at least one memory, the method comprising:

- in response to the first participant device initiating the communication to the second participant device, receiving the first participant identifier and the second participant identifier from the first participant device;
- using the first participant identifier to locate, via the at least one processor, a first participant profile from among a plurality of participant profiles that are stored in a database, the first participant profile comprising one or more attributes associated with the first participant;

when at least one of the one or more attributes and at least a portion of the second participant identifier meet a first network classification criterion, producing, via the at least one processor, a first network routing message, the first network routing message identifying an address in the system, the address being associated with the second participant device;

40

when at least one of the one or more attributes and at least a portion of the second participant identifier meet a second network classification criterion, producing, via the at least one processor, a second network routing message, the second network routing message identifying an address associated with a gateway to a network external to the system, wherein the second network classification criterion is met if the second participant is not registered with the system; and

when at least one of the one or more attributes meets a third network classification criterion, producing, via the at least one processor, an error message and causing prevention of the communication from being established.

22. The method of claim 21, wherein the system comprises an IP network and the first participant device is in data communication with the IP network, wherein the first network routing message identifies a first IP address, wherein the second network routing message identifies a second IP address, wherein the first network routing message causes the communication to take place entirely over the IP network, and wherein the network external to the system is a circuit switched network.

23. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 22.

24. The method of claim 21, further comprising: updating the first participant profile to cause at least one of the one or more attributes to be modified.

25. A system for routing communications in which a first participant is registered with the system and has an associated first participant identifier and wherein a second participant has an associated second participant identifier, the first participant being associated with a first participant device operable to establish a communication using the system to a second participant device associated with the second participant, the system comprising:

a controller comprising:

at least one processor operably configured to access at least one memory, wherein the at least one processor is operably configured to:

in response to the first participant device initiating the communication, receive the first participant identifier and the second participant identifier from the first participant device;

locate, using the first participant identifier, a first participant profile from among a plurality of participant profiles that are stored in a database, the first participant profile comprising one or more attributes associated with the first participant;

process the second participant identifier, based on at least one of the one or more attributes, to produce a new second participant identifier;

classify the communication, using the new second participant identifier, as a first network communication if a first network classification criterion is met and as a second network communication if a second network classification criterion is met;

produce a first network routing message when a first network classification criterion is met, the first network routing message identifying an address in the system, the address being associated with the second participant device; and

produce a second network routing message when the second network classification criterion is met, the second network routing message identifying an address associated with a gateway to a network

US 9,537,762 B2

41

external to the system, wherein the second network classification criterion is met if the second participant is not registered with the system.

26. The system of claim 25, wherein the at least one processor is further operably configured to determine, based on at least one of the one or more attributes, if a third network classification criterion is met, and when the third network classification criterion is met, the at least one processor is further operably configured to produce an error message that causes prevention of the communication from being established.

27. The system of claim 26, wherein the at least one processor is further operably configured to:

update the first participant profile to cause at least one of the one or more attributes to be modified.

28. The system of claim 26, wherein the at least one processor is operably configured to:

cause a database of records to be searched using the new second participant identifier and determine whether the second participant is registered with the system.

29. The system of claim 28, wherein the at least one processor is further operably configured to:

classify the communication as the first network communication if a record is found in the database and classify the communication as the second network communication if the record is not found in the database.

30. The system of claim 25, wherein the at least one processor is operably configured to:

compare at least one of the one or more attributes with at least a portion of the second participant identifier.

31. The system of claim 30, wherein the at least one processor is operably configured to perform at least one of:

determine whether the second participant identifier includes a portion that matches an international dialing digit (IDD) associated with the first participant profile; determine whether the second participant identifier includes a portion that matches a national dialing digit (NDD) associated with the first participant profile; determine whether the second participant identifier includes a portion that matches an area code associated with the first participant profile; and

determine whether the second participant identifier has a length within a range specified in the first participant profile.

32. The system of claim 25, wherein the system comprises an IP network and the first participant device is in data communication with the IP network, wherein the first network routing message causes the communication to take place entirely over the IP network, and wherein the network external to the system is a circuit switched network.

33. The system of claim 32, wherein the first network routing message identifies a first IP address, and wherein the second network routing message identifies a second IP address.

34. The system of claim 25, wherein the second participant identifier is a plurality of dialing digits.

35. The system of claim 25, wherein the at least one processor is further operably configured to:

update the first participant profile to cause at least one of the one or more attributes to be modified.

36. The system of claim 25, wherein the at least one processor is operably configured to perform at least one of: remove an international dialing digit (IDD) from the second participant identifier;

remove a national dialing digit (NDD) from the second participant identifier and prepend a first participant country code to the second participant identifier;

42

prepend a first participant country code to the second participant identifier; and
prepend a first participant country code and area code to the second participant identifier.

37. The system of claim 25, wherein the at least one processor is operably configured to:

cause a database of records to be searched using the new second participant identifier.

38. The system of claim 37, wherein the at least one processor is further operably configured to:

classify the communication as the first network communication if a record is found in the database and classify the communication as the second network communication if the record is not found in the database.

39. The system of claim 25, wherein the new second participant identifier is in a pre-defined format.

40. The system of claim 39, wherein the pre-defined format comprises a number compliant with an E.164 international standard.

41. The system of claim 25, wherein if the first network classification criterion is met, the second participant is registered with the system.

42. The system of claim 25, wherein the controller is further operably configured to register the second participant with the system including to store a second participant profile in the plurality of participant profiles that are stored in the database.

43. A system for routing communications in which a first participant is registered with the system and has an associated first participant identifier and wherein a second participant has an associated second participant identifier, the first participant being associated with a first participant device operable to establish a communication using the system to a second participant device associated with the second participant, the system comprising:

a controller having at least one processor operably configured to access at least one memory storing program code that, when executed, operably configures the controller to:

in response to the first participant device initiating the communication, receive the first participant identifier and the second participant identifier from the first participant device;

locate, using the first participant identifier, a first participant profile from among a plurality of participant profiles that are stored in a database, the first participant profile comprising one or more attributes associated with the first participant;

produce a first network routing message when at least one of the one or more attributes and at least a portion of the second participant identifier meet a first network classification criterion, the first network routing message identifying an address in the system, the address being associated with the second participant device;

produce a second network routing message when at least one of the one or more attributes and at least a portion of the second participant identifier meet a second network classification criterion, the second network routing message identifying an address associated with a gateway to a network external to the system, wherein the second network classification criterion is met if the second participant is not registered with the system; and

produce an error message when at least one of the one or more attributes meets a third network classifica-

tion criterion, the error message preventing the communication from being established.

44. The system of claim 43, wherein the system comprises an IP network and the first participant device is in data communication with the IP network, wherein the first network routing message identifies a first IP address, and wherein the second network routing message identifies a second IP address, wherein the first network routing message causes the communication to take place entirely over the IP network, and wherein the network external to the system is a circuit switched network.

45. The system of claim 43, wherein the at least one processor is further operably configured to:
update the first participant profile to cause at least one of the one or more attributes to be modified.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 9,537,762 B2
APPLICATION NO. : 14/877570
DATED : January 3, 2017
INVENTOR(S) : Clay Perreault et al.

Page 1 of 2

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page

In Column 2 (page 6, item (56)) at Line 18, Under Other Publications, change “23,840” to --23.840--.

In Column 2 (page 7, item (56)) at Line 35, Under Other Publications, change “Talktone” to --Talkatone--.

In Column 1 (page 8, item (56)) at Line 27, Under Other Publications, change “ViOP” to --VoIP--.

In Column 1 (page 8, item (56)) at Line 29, Under Other Publications, change “Oct. 1, 2003, Oct. 1, 2003,” to --Oct. 1, 2003,--.

In Column 1 (page 8, item (56)) at Line 61, Under Other Publications, change “Feb. 1, 2002, No. 3, Feb. 1, 2002,” to --No. 3, Feb. 1, 2002,--.

In Column 2 (page 8, item (56)) at Line 28, Under Other Publications, change “subscriber” to --subscriber--.

In the Drawings

Sheet 6 of 32 (Reference Numeral 271, FIG. 8A) at Line 3, Change “dialling” to --dialing--.


Sheet 7 of 32 (Reference Numeral 408, FIG. 8B) at Line 5, Change “E164” to --E.164--.

Sheet 7 of 32 (Reference Numeral 410, FIG. 8A) at Line 2, Change “E164” to --E.164--.

Sheet 12 of 32 (Reference Numeral 274, FIG. 13) at Line 1, Change “E164#” to --E.164#--.

Sheet 13 of 32 (Reference Numeral 354, FIG. 15) at Line 1, Change “Suppller” to --Supplier--.

Signed and Sealed this
Sixth Day of June, 2017



Michelle K. Lee
Director of the United States Patent and Trademark Office

CERTIFICATE OF CORRECTION (continued)

Page 2 of 2

U.S. Pat. No. 9,537,762 B2

In the Specification

In Column 6 at Line 28, Change “the a” to --the--.

In Column 18 at Line 4, After “etc.)” insert --,--.

In Column 24 at Line 45, Change “411” to --410--.

EXHIBIT 2



US009813330B2

(12) **United States Patent**
Perreault et al.

(10) **Patent No.:** **US 9,813,330 B2**
 (45) **Date of Patent:** ***Nov. 7, 2017**

(54) **PRODUCING ROUTING MESSAGES FOR VOICE OVER IP COMMUNICATIONS**

(58) **Field of Classification Search**
 None
 See application file for complete search history.

(71) Applicant: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

(56) **References Cited**

(72) Inventors: **Clay Perreault**, Panama (PA); **Steve Nicholson**, Hamilton (NZ); **Rod Thomson**, North Vancouver (CA); **Johan Emil Viktor Björzell**, Vancouver (CA); **Fuad Arafa**, Vancouver (CA)

U.S. PATENT DOCUMENTS

4,747,124 A 5/1988 Ladd
 4,916,491 A 4/1990 Katoh
 (Continued)

(73) Assignee: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

FOREIGN PATENT DOCUMENTS

BR PI 0718312-7 A2 11/2013
 BR PI 0719682-2 A2 1/2014
 (Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

This patent is subject to a terminal disclaimer.

Abrazhevich, Dennis. "Electronic Payment Systems; a User-Centered Perspective and Interaction Design," *Thesis under the auspices of the J.F. Schouten School for User-System Interaction Research*, Technische Universiteit Eindhoven, Netherlands, 2004, pp. Cover page-p. 189.

(21) Appl. No.: **15/396,344**

(Continued)

(22) Filed: **Dec. 30, 2016**

(65) **Prior Publication Data**

US 2017/0111265 A1 Apr. 20, 2017

Primary Examiner — Kodzovi Acolatse

(74) Attorney, Agent, or Firm — Knobbe Martens Olson & Bear LLP

Related U.S. Application Data

(63) Continuation of application No. 14/877,570, filed on Oct. 7, 2015, now Pat. No. 9,537,762, which is a (Continued)

(57) **ABSTRACT**

A process and apparatus to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated is disclosed. In response to initiation of a call by a calling subscriber, a caller identifier and a callee identifier are received. Call classification criteria associated with the caller identifier are used to classify the call as a public network call or a private network call. A routing message identifying an address, on the private network, associated with the callee is produced when the call is classified as a private network call and a routing message identifying a

(Continued)


(51) **Int. Cl.**

H04L 12/725 (2013.01)
H04Q 3/70 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H04L 45/3065** (2013.01); **H04M 3/4211** (2013.01); **H04M 7/006** (2013.01); **H04M 7/0075** (2013.01); **H04Q 3/70** (2013.01)

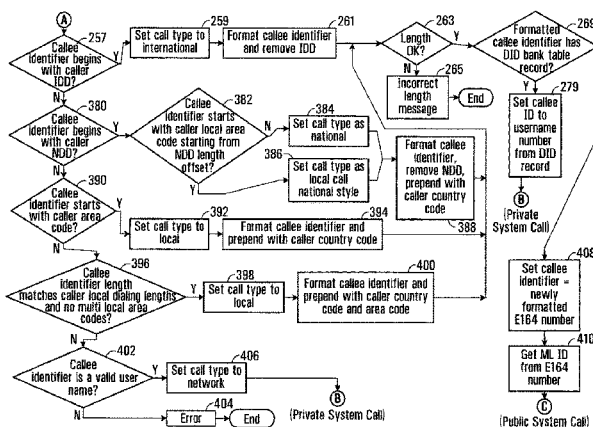

US 9,813,330 B2

Page 2

gateway to the public network is produced when the call is classified as a public network call.

40 Claims, 32 Drawing Sheets**Related U.S. Application Data**

continuation of application No. 13/966,096, filed on Aug. 13, 2013, now Pat. No. 9,179,005, which is a continuation of application No. 12/513,147, filed as application No. PCT/CA2007/001956 on Nov. 1, 2007, now Pat. No. 8,542,815.

(60) Provisional application No. 60/856,212, filed on Nov. 2, 2006.

(51) Int. Cl.

H04M 3/42 (2006.01)

H04M 7/00 (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

4,992,971 A	2/1991	Hayashi	5,940,598 A	8/1999	Strauss et al.
5,146,491 A	9/1992	Silver et al.	5,953,504 A	9/1999	Sokal et al.
5,247,571 A	9/1993	Kay et al.	5,956,391 A	9/1999	Melen et al.
5,303,297 A	4/1994	Hillis	5,970,477 A	10/1999	Roden
5,325,421 A	6/1994	Hou et al.	5,974,043 A	10/1999	Solomon
5,359,642 A	10/1994	Castro	5,991,291 A	11/1999	Asai et al.
5,425,085 A	6/1995	Weinberger et al.	5,991,378 A	11/1999	Apel
5,440,621 A	8/1995	Castro	6,005,870 A	12/1999	Leung et al.
5,454,030 A	9/1995	de Oliveira et al.	6,005,926 A	12/1999	Mashinsky
5,469,497 A	11/1995	Pierce et al.	6,014,379 A	1/2000	White et al.
5,506,893 A	4/1996	Buscher et al.	6,021,126 A	2/2000	White et al.
5,519,769 A	5/1996	Weinberger et al.	6,029,062 A	2/2000	Hanson
5,559,871 A	9/1996	Smith	6,052,445 A	4/2000	Bashoura et al.
5,590,133 A	12/1996	Billstrom et al.	6,058,300 A	5/2000	Hanson
5,608,786 A	3/1997	Gordon	6,069,890 A	5/2000	White et al.
5,621,787 A	4/1997	McKoy et al.	6,073,013 A	6/2000	Agre et al.
5,633,913 A	5/1997	Talamo	6,078,647 A	6/2000	D'Eletto
5,661,790 A	8/1997	Hsu	6,104,704 A	8/2000	Buhler et al.
5,677,955 A	10/1997	Doggett et al.	6,104,711 A	8/2000	Voit
5,712,907 A	1/1998	Wegner et al.	6,115,737 A	9/2000	Ely et al.
5,719,926 A	2/1998	Hill	6,128,304 A	10/2000	Gardell et al.
5,722,067 A	2/1998	Fougnes et al.	6,137,869 A	10/2000	Voit et al.
5,724,355 A	3/1998	Bruno et al.	6,141,404 A	10/2000	Westerlage et al.
5,726,984 A	3/1998	Kubler et al.	6,151,385 A	11/2000	Reich et al.
5,737,414 A	4/1998	Walker et al.	6,173,272 B1	1/2001	Thomas et al.
5,742,596 A	4/1998	Baratz et al.	6,188,752 B1	2/2001	Lesley
5,751,961 A	5/1998	Smyk	6,240,449 B1	5/2001	Nadeau
5,768,521 A	6/1998	Dedrick	6,243,689 B1	6/2001	Norton
5,793,762 A	8/1998	Penners et al.	6,249,573 B1	6/2001	Hudson
5,799,072 A	8/1998	Vulcan et al.	6,282,574 B1	8/2001	Voit
5,802,502 A	9/1998	Gell et al.	6,298,062 B1	10/2001	Gardell et al.
5,825,863 A	10/1998	Walker	6,327,351 B1	12/2001	Walker et al.
5,828,740 A	10/1998	Khuc et al.	6,351,464 B1	2/2002	Galvin et al.
5,838,682 A	11/1998	Dekelbaum et al.	6,359,880 B1	3/2002	Curry et al.
5,845,267 A	12/1998	Ronen	6,430,275 B1	8/2002	Voit et al.
5,850,433 A	12/1998	Rondeau	6,434,143 B1	8/2002	Donovan
5,864,610 A	1/1999	Ronen	6,445,694 B1	9/2002	Swartz
5,867,495 A	2/1999	Elliott et al.	6,507,644 B1	1/2003	Henderson et al.
5,883,810 A	3/1999	Franklin et al.	6,553,025 B1	4/2003	Kung et al.
5,883,891 A	3/1999	Williams et al.	6,560,224 B1	5/2003	Kung et al.
5,889,774 A	3/1999	Mirashrafi et al.	6,574,328 B1	6/2003	Wood et al.
5,905,736 A	5/1999	Ronen et al.	6,594,254 B1	7/2003	Kelly
5,907,547 A	5/1999	Foladare et al.	6,597,686 B1	7/2003	Smyk
5,910,946 A	6/1999	Csapo	6,597,783 B1	7/2003	Tada et al.
5,915,005 A	6/1999	He	6,603,977 B1	8/2003	Walsh et al.
5,915,093 A	6/1999	Berlin et al.	6,636,833 B1	10/2003	Flitcroft et al.
5,917,899 A	6/1999	Moss et al.	6,650,641 B1	11/2003	Albert et al.
5,923,659 A	7/1999	Curry et al.	6,674,745 B1	1/2004	Schuster et al.
5,930,343 A	7/1999	Vasquez	6,674,850 B2	1/2004	Vu et al.
5,937,045 A	8/1999	Yaoya et al.	6,724,860 B2	4/2004	Stumer et al.
			6,744,858 B1	6/2004	Ryan et al.
			6,760,324 B1	7/2004	Scott et al.
			6,766,159 B2	7/2004	Lindholm
			6,772,188 B1	8/2004	Cloutier
			6,775,534 B2	8/2004	Lindgren et al.
			6,785,266 B2	8/2004	Swartz
			6,798,767 B1	9/2004	Alexander et al.
			6,819,929 B2	11/2004	Antonucci et al.
			6,873,599 B1	3/2005	Han
			6,892,184 B1	5/2005	Komen et al.
			6,934,279 B1	8/2005	Sollee et al.
			6,937,713 B1	8/2005	Kung et al.
			6,947,531 B1	9/2005	Lewis et al.
			6,954,453 B1	10/2005	Schindler
			6,961,334 B1	11/2005	Kaczmarczyk
			6,963,557 B2	11/2005	Knox
			6,963,739 B2	11/2005	Dorenbosch et al.
			6,985,440 B1	1/2006	Albert et al.
			6,993,015 B2	1/2006	Kobayashi
			7,006,508 B2	2/2006	Bondy et al.
			7,010,727 B1	3/2006	Stucker
			7,027,564 B2	4/2006	James
			7,042,985 B1	5/2006	Wright
			7,046,658 B1	5/2006	Kundaje
			7,051,072 B2	5/2006	Stewart et al.
			7,055,174 B1	5/2006	Cope et al.
			7,068,668 B2	6/2006	Feuer
			7,068,772 B1	6/2006	Widger et al.
			7,079,526 B1	7/2006	Wipliez et al.

US 9,813,330 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

7,120,682	B1	10/2006	Salama	8,161,078	B2	4/2012	Gaurav et al.
7,151,772	B1	12/2006	Kalmanek, Jr. et al.	8,166,533	B2	4/2012	Yuan
7,174,156	B1	2/2007	Mangal	8,166,547	B2	4/2012	Bevan et al.
7,177,399	B2	2/2007	Dawson et al.	8,189,568	B2	5/2012	Qiu et al.
7,203,478	B2	4/2007	Benco et al.	8,190,739	B2	5/2012	Fernández Gutierrez
7,212,522	B1	5/2007	Shankar et al.	8,200,575	B2	6/2012	Torres et al.
7,218,722	B1	5/2007	Turner et al.	8,204,044	B2	6/2012	Lebizay
7,277,528	B2	10/2007	Rao et al.	8,219,115	B1	7/2012	Nelissen
7,330,835	B2	2/2008	Deggendorf	8,223,927	B2	7/2012	Di Serio et al.
7,366,157	B1	4/2008	Valentine et al.	8,228,837	B2	7/2012	Sheriff et al.
7,400,881	B2	7/2008	Kallio	8,228,897	B2	7/2012	Mitchell
7,426,492	B1	9/2008	Bishop et al.	8,243,730	B1	8/2012	Wong et al.
7,436,835	B2	10/2008	Castleberry et al.	8,244,204	B1	8/2012	Chen et al.
7,437,665	B2	10/2008	Perham	8,275,404	B2	9/2012	Berger et al.
7,440,442	B2	10/2008	Grabelsky et al.	8,300,632	B2	10/2012	Davis et al.
7,447,707	B2	11/2008	Gaurav et al.	8,306,063	B2	11/2012	Erdal et al.
7,454,200	B2	11/2008	Cai et al.	8,315,521	B2	11/2012	Leiden et al.
7,454,510	B2	11/2008	Kleyman et al.	8,363,647	B2	1/2013	Fangman et al.
7,477,843	B1*	1/2009	Peeters	8,364,172	B2	1/2013	Guanfeng et al.
				8,396,445	B2	3/2013	Crawford et al.
				8,410,907	B2	4/2013	Twitchell, Jr.
				8,417,791	B1	4/2013	Peretz et al.
				8,422,507	B2	4/2013	Björzell et al.
				8,423,791	B1	4/2013	Yu et al.
				8,427,981	B2	4/2013	Wyss et al.
7,486,664	B2	2/2009	Swartz	8,437,340	B2	5/2013	James
7,486,667	B2	2/2009	Feuer	8,462,915	B2	6/2013	Breen et al.
7,486,684	B2	2/2009	Chu et al.	8,468,196	B1	6/2013	Roskind et al.
7,512,117	B2	3/2009	Swartz	8,493,931	B1	7/2013	Nix
7,565,131	B2	7/2009	Rollender	8,509,225	B2	8/2013	Grabelsky et al.
7,573,982	B2	8/2009	Breen et al.	8,526,306	B2	9/2013	Jungck et al.
7,580,886	B1	8/2009	Schulz	8,532,075	B2	9/2013	Rassool et al.
7,587,036	B2	9/2009	Wood et al.	8,537,805	B2	9/2013	Björzell et al.
7,593,390	B2	9/2009	Lebizay	8,542,815	B2	9/2013	Perreault et al.
7,593,884	B2	9/2009	Rothman et al.	8,543,477	B2	9/2013	Love et al.
7,599,944	B2	10/2009	Gaurav et al.	8,594,298	B2	11/2013	Klein et al.
7,639,792	B2	12/2009	Qiu et al.	8,599,747	B1	12/2013	Saleem et al.
7,644,037	B1	1/2010	Ostrovsky	8,599,837	B2	12/2013	Kyle
7,647,500	B2	1/2010	Machiraju et al.	8,605,714	B2	12/2013	Lebizay
7,657,011	B1	2/2010	Zielinski et al.	8,605,869	B1	12/2013	Mobarak et al.
7,664,495	B1	2/2010	Bonner et al.	8,607,323	B2	12/2013	Yuan
7,676,215	B2	3/2010	Chin et al.	8,611,354	B2	12/2013	Keränen et al.
7,676,431	B2	3/2010	O'Leary et al.	8,625,578	B2	1/2014	Roy et al.
7,680,114	B2	3/2010	Yazaki et al.	8,627,211	B2	1/2014	Kropivny
7,680,737	B2	3/2010	Smith et al.	8,630,234	B2	1/2014	Björzell et al.
7,702,308	B2	4/2010	Rollender	8,634,838	B2	1/2014	Hellwig et al.
7,715,413	B2	5/2010	Vaziri et al.	8,675,566	B2	3/2014	Huttunen et al.
7,715,821	B2	5/2010	Rollender	8,682,919	B1	3/2014	Golliher
7,734,544	B2	6/2010	Schleicher	8,702,505	B2	4/2014	Kropivny
7,738,384	B2	6/2010	Pelletier	8,713,098	B1	4/2014	Adya et al.
7,764,777	B2	7/2010	Wood et al.	8,724,643	B2	5/2014	Feuer
7,764,944	B2	7/2010	Rollender	8,749,610	B1	6/2014	Gossweiler et al.
7,765,261	B2	7/2010	Kropivny	8,750,290	B2	6/2014	Vance et al.
7,765,266	B2	7/2010	Kropivny	8,763,081	B2	6/2014	Bogdanovic et al.
7,774,711	B2	8/2010	Valeski	8,767,717	B2	7/2014	Siegel et al.
7,797,459	B1	9/2010	Roy et al.	8,768,951	B2	7/2014	Crago
7,882,011	B2	2/2011	Sandhu et al.	8,774,171	B2	7/2014	Mitchell
7,894,441	B2	2/2011	Yazaki et al.	8,774,378	B2	7/2014	Björzell et al.
7,899,742	B2	3/2011	Berkert et al.	8,774,721	B2	7/2014	Hertel et al.
7,907,551	B2	3/2011	Croy et al.	8,780,703	B1	7/2014	Eidelson et al.
7,907,714	B2	3/2011	Baniak et al.	8,792,374	B1	7/2014	Jain et al.
7,929,955	B1	4/2011	Bonner	8,792,905	B1	7/2014	Li et al.
7,944,909	B2	5/2011	James	8,804,705	B2	8/2014	Fangman et al.
7,950,046	B2	5/2011	Kropivny	8,805,345	B2	8/2014	Ling et al.
7,958,233	B2	6/2011	Fernández Gutierrez	8,810,392	B1	8/2014	Teller et al.
7,965,645	B2	6/2011	Pelletier	8,819,566	B2	8/2014	Mehin et al.
7,979,529	B2	7/2011	Kreusch et al.	8,837,360	B1	9/2014	Mishra et al.
7,995,589	B2	8/2011	Sollee et al.	8,838,539	B1	9/2014	Ashcraft et al.
8,024,785	B2	9/2011	Andress et al.	8,848,887	B2	9/2014	Willman et al.
8,027,333	B2	9/2011	Grabelsky et al.	8,862,701	B2	10/2014	Havriluk
8,036,366	B2	10/2011	Chu	8,885,609	B2	11/2014	Nix
8,041,022	B1	10/2011	Andreasen et al.	8,903,051	B2	12/2014	Li et al.
8,050,273	B2	11/2011	Gass	8,903,360	B2	12/2014	Celi, Jr. et al.
8,060,887	B2	11/2011	Kropivny	8,909,556	B2	12/2014	Huxham
8,078,164	B2	12/2011	Ganesan	8,938,209	B2	1/2015	Crawford et al.
8,111,690	B2	2/2012	Hussain et al.	8,938,534	B2	1/2015	Le et al.
8,116,307	B1	2/2012	Thesayi et al.	8,948,061	B2	2/2015	Sridhar
8,125,982	B2	2/2012	Feuer	8,972,612	B2	3/2015	Le et al.
8,127,005	B2	2/2012	Fernández Gutierrez	8,982,719	B2	3/2015	Seetharaman et al.
8,145,182	B2	3/2012	Rudolf et al.				

H04Q 11/0062
398/49

US 9,813,330 B2

Page 4

(56)	References Cited					
	U.S. PATENT DOCUMENTS					
	8,995,428 B2	3/2015	Haster	2006/0177035 A1	8/2006	Cope et al.
	9,003,306 B2	4/2015	Mehin et al.	2006/0189303 A1	8/2006	Rollender
	9,137,385 B2	9/2015	Björnsell et al.	2006/0195398 A1	8/2006	Dheer et al.
	9,143,608 B2	9/2015	Björnsell et al.	2006/0195584 A1*	8/2006	Baumann H04M 3/54 709/227
	9,154,417 B2	10/2015	Huttunen et al.	2006/0205383 A1	9/2006	Rollender et al.
	9,179,005 B2	11/2015	Perreault et al.	2006/0209768 A1	9/2006	Yan et al.
	9,537,762 B2	1/2017	Perreault et al.	2006/0233317 A1	10/2006	Coster et al.
	9,549,071 B2	1/2017	Björnsell et al.	2006/0248186 A1	11/2006	Smith
	9,565,307 B2	2/2017	Björnsell et al.	2006/0251056 A1	11/2006	Feuer
	2001/0027478 A1	10/2001	Meier et al.	2006/0258328 A1	11/2006	Godoy
	2001/0052081 A1	12/2001	McKibben et al.	2006/0264200 A1	11/2006	Laiho et al.
	2002/0002041 A1	1/2002	Lindgren et al.	2006/0268921 A1	11/2006	Ekstrom et al.
	2002/0018445 A1	2/2002	Kobayashi	2006/0281437 A1	12/2006	Cook
	2002/0051518 A1	5/2002	Bondy et al.	2007/0016524 A1	1/2007	Diveley et al.
	2002/0057764 A1	5/2002	Salvucci et al.	2007/0036139 A1	2/2007	Patel et al.
	2002/0116464 A1	8/2002	Mak	2007/0036143 A1	2/2007	Alt et al.
	2002/0122391 A1	9/2002	Shalit	2007/0047548 A1	3/2007	Yazaki et al.
	2002/0122547 A1	9/2002	Hinchey et al.	2007/0053382 A1	3/2007	Bevan et al.
	2002/0141352 A1	10/2002	Fangman et al.	2007/0064919 A1	3/2007	Chen et al.
	2002/0150080 A1*	10/2002	Bhattacharya H04L 29/06027 370/351	2007/0092070 A1	4/2007	Croy et al.
				2007/0112964 A1	5/2007	Guedalia et al.
				2007/0115935 A1	5/2007	Qiu et al.
				2007/0121590 A1*	5/2007	Turner H04L 12/66 370/352
	2003/0012196 A1	1/2003	Ramakrishnan	2007/0121593 A1	5/2007	Vance et al.
	2003/0043974 A1	3/2003	Emerson, III	2007/0121602 A1*	5/2007	Sin H04L 12/6418 370/356
	2003/0095539 A1	5/2003	Feuer	2007/0127676 A1	6/2007	Khadri
	2003/0179747 A1	9/2003	Pyke et al.	2007/0174469 A1	7/2007	Andress et al.
	2003/0200311 A1	10/2003	Baum	2007/0217354 A1	9/2007	Buckley
	2003/0219103 A1	11/2003	Rao et al.	2007/0220038 A1	9/2007	Crago
	2004/0022237 A1	2/2004	Elliot et al.	2007/0253418 A1	11/2007	Shiri et al.
	2004/0034793 A1	2/2004	Yuan	2007/0253429 A1	11/2007	James
	2004/0157629 A1	8/2004	Kallio et al.	2007/0263609 A1	11/2007	Mitchell
	2004/0165709 A1	8/2004	Pence et al.	2007/0297376 A1	12/2007	Gass
	2004/0181599 A1	9/2004	Kreusch et al.	2008/0013523 A1	1/2008	Nambakkam
	2004/0202295 A1	10/2004	Shen et al.	2008/0037715 A1	2/2008	Prozeniuk et al.
	2004/0203565 A1	10/2004	Chin et al.	2008/0043718 A1*	2/2008	Chu H04M 7/0075 370/352
	2004/0203582 A1	10/2004	Dorenbosch et al.	2008/0056235 A1	3/2008	Albina et al.
	2004/0218748 A1	11/2004	Fisher	2008/0056243 A1	3/2008	Roy et al.
	2004/0240439 A1	12/2004	Castleberry et al.	2008/0056302 A1	3/2008	Erdal et al.
	2004/0255126 A1	12/2004	Reith	2008/0063153 A1	3/2008	Krivorot et al.
	2005/0007999 A1	1/2005	Becker et al.	2008/0160953 A1	7/2008	Mia et al.
	2005/0025043 A1	2/2005	Mussman et al.	2008/0166999 A1	7/2008	Guedalia et al.
	2005/0063519 A1	3/2005	James	2008/0167019 A1	7/2008	Guedalia et al.
	2005/0069097 A1	3/2005	Hanson et al.	2008/0167020 A1	7/2008	Guedalia et al.
	2005/0083911 A1	4/2005	Grabelsky et al.	2008/0167039 A1	7/2008	Guedalia et al.
	2005/0094651 A1	5/2005	Lutz et al.	2008/0187122 A1	8/2008	Baker
	2005/0131813 A1	6/2005	Gallagher et al.	2008/0188198 A1	8/2008	Patel et al.
	2005/0169248 A1	8/2005	Truesdale et al.	2008/0188227 A1	8/2008	Guedalia et al.
	2005/0171898 A1	8/2005	Bishop et al.	2008/0205378 A1	8/2008	Wyss et al.
	2005/0174937 A1	8/2005	Scoggins et al.	2008/0310599 A1	12/2008	Purnadi et al.
	2005/0177843 A1	8/2005	Williams	2009/0003535 A1	1/2009	Grabelsky et al.
	2005/0188081 A1	8/2005	Gibson et al.	2009/0017842 A1	1/2009	Fukasaku
	2005/0190892 A1	9/2005	Dawson et al.	2009/0028146 A1	1/2009	Kleyman et al.
	2005/0192897 A1	9/2005	Rogers et al.	2009/0129566 A1	5/2009	Feuer
	2005/0192901 A1	9/2005	McCoy et al.	2009/0135724 A1	5/2009	Zhang et al.
	2005/0198499 A1	9/2005	Salapaka et al.	2009/0135735 A1	5/2009	Zhang et al.
	2005/0202799 A1	9/2005	Rollender	2009/0141883 A1	6/2009	Bastien
	2005/0222952 A1	10/2005	Garrett et al.	2009/0213839 A1	8/2009	Davis et al.
	2005/0267842 A1	12/2005	Weichert et al.	2009/0214000 A1	8/2009	Patel et al.
	2005/0287979 A1	12/2005	Rollender	2009/0238168 A1	9/2009	Lavoie et al.
	2006/0006224 A1	1/2006	Modi	2009/0268615 A1	10/2009	Pelletier
	2006/0007940 A1	1/2006	Sollee et al.	2009/0292539 A1	11/2009	Jaroker
	2006/0013266 A1	1/2006	Vega-Garcia et al.	2009/0296900 A1	12/2009	Breen et al.
	2006/0030290 A1	2/2006	Rudolf et al.	2009/0325558 A1	12/2009	Pridmore et al.
	2006/0036522 A1	2/2006	Perham	2010/0002701 A1	1/2010	Hsieh et al.
	2006/0072547 A1	4/2006	Florkey et al.	2010/0008345 A1	1/2010	Lebizay
	2006/0072550 A1	4/2006	Davis et al.	2010/0039946 A1	2/2010	Imbimbo et al.
	2006/0078094 A1	4/2006	Breen et al.	2010/0083364 A1	4/2010	Fernández Gutierrez
	2006/0093135 A1	5/2006	Fiatal et al.	2010/0086119 A1	4/2010	De Luca et al.
	2006/0095320 A1	5/2006	Jones	2010/0105379 A1	4/2010	Bonner et al.
	2006/0109960 A1	5/2006	D'Evelyn et al.	2010/0114896 A1	5/2010	Clark et al.
	2006/0111116 A1	5/2006	Palmer et al.	2010/0115018 A1	5/2010	Yoon et al.
	2006/0116892 A1	6/2006	Grimes et al.	2010/0142382 A1	6/2010	Jungck et al.
	2006/0142011 A1	6/2006	Kallio	2010/0150138 A1	6/2010	Björnsell et al.
	2006/0146797 A1	7/2006	Lebizay	2010/0150328 A1	6/2010	Perreault et al.
	2006/0153342 A1	7/2006	Sasaki			
	2006/0160565 A1	7/2006	Singh et al.			

US 9,813,330 B2

Page 5

(56)

References Cited

U.S. PATENT DOCUMENTS

2010/0172345 A1 7/2010 Björsell et al.
 2010/0177671 A1 7/2010 Qiu et al.
 2010/0220852 A1 9/2010 Willman et al.
 2010/0233991 A1 9/2010 Crawford et al.
 2010/0246589 A1 9/2010 Pelletier
 2010/0272242 A1 10/2010 Croy et al.
 2010/0278534 A1 11/2010 Leiden et al.
 2010/0316195 A1 12/2010 Di Serio et al.
 2011/0013541 A1 1/2011 Croy et al.
 2011/0072095 A1 3/2011 Havriluk
 2011/0122827 A1 5/2011 Björsell et al.
 2011/0153809 A1 6/2011 Ghanem et al.
 2011/0167164 A1 7/2011 Fernández Gutierrez
 2011/0176541 A1 7/2011 James
 2011/0201321 A1 8/2011 Bonner
 2011/0208859 A1 8/2011 Fernández Gutierrez
 2011/0235543 A1 9/2011 Seetharaman et al.
 2011/0255553 A1 10/2011 Bobba et al.
 2011/0261717 A1 10/2011 Akuzuwa et al.
 2011/0267986 A1 11/2011 Grabelsky et al.
 2011/0273526 A1 11/2011 Mehin et al.
 2011/0276903 A1 11/2011 Mehin et al.
 2011/0276904 A1 11/2011 Mehin et al.
 2011/0292929 A1 12/2011 Haster
 2012/0014383 A1 1/2012 Geromel et al.
 2012/0089717 A1 4/2012 Chen
 2012/0096145 A1 4/2012 Le et al.
 2012/0099599 A1 4/2012 Keränen et al.
 2012/0113981 A1 5/2012 Feuer
 2012/0155333 A1 6/2012 Yoon et al.
 2012/0170574 A1 7/2012 Huttunen et al.
 2012/0195236 A1 8/2012 Knight
 2012/0195415 A1 8/2012 Wyss et al.
 2012/0227101 A1 9/2012 Yuan
 2012/0250624 A1 10/2012 Lebizay
 2012/0259975 A1 10/2012 Le et al.
 2012/0270554 A1 10/2012 Hellwig et al.
 2012/0282881 A1 11/2012 Mitchell
 2012/0314699 A1 12/2012 Qiu et al.
 2013/0039226 A1 2/2013 Sridhar
 2013/0097308 A1 4/2013 Le et al.
 2013/0114589 A1 5/2013 Fangman et al.
 2013/0128879 A1 5/2013 Kyle
 2013/0148549 A1 6/2013 Crawford et al.
 2013/0173534 A1 7/2013 Nelakonda et al.
 2013/0223276 A1 8/2013 Padgett
 2013/0229950 A1 9/2013 Björsell et al.
 2013/0237198 A1 9/2013 Vashi et al.
 2013/0254301 A1 9/2013 Lin et al.
 2013/0272297 A1 10/2013 Breen et al.
 2013/0281147 A1 10/2013 Denman et al.
 2013/0287006 A1 10/2013 Nix
 2013/0310002 A1 11/2013 Celi, Jr. et al.
 2013/0318166 A1 11/2013 Jungck et al.
 2013/0329722 A1 12/2013 Perrault et al.
 2013/0329864 A1 12/2013 Björsell et al.
 2014/0010119 A1 1/2014 Björsell et al.
 2014/0016764 A1 1/2014 Björsell et al.
 2014/0024367 A1 1/2014 Björsell et al.
 2014/0101749 A1 4/2014 Yuan
 2014/0141884 A1 5/2014 Kropivny
 2014/0153477 A1 6/2014 Huttunen et al.
 2014/0211789 A1 7/2014 Feuer
 2014/0215642 A1 7/2014 Huxham
 2014/0220944 A1 8/2014 Balasubramanian
 2014/0244393 A1 8/2014 Rimmer et al.
 2014/0247730 A1 9/2014 Thota et al.
 2014/0269624 A1 9/2014 Khay-Ibbat et al.
 2014/0307858 A1 10/2014 Li et al.
 2014/0321333 A1 10/2014 Björsell et al.
 2014/0324969 A1 10/2014 Riddle
 2014/0337961 A1 11/2014 Chien et al.
 2014/0337962 A1 11/2014 Brandstatter
 2014/0349602 A1 11/2014 Majumdar et al.
 2015/0327320 A1 11/2015 Huttunen et al.

2015/0358470 A1 12/2015 Björsell et al.
 2016/0006882 A1 1/2016 Björsell et al.
 2016/0028619 A1 1/2016 Perreault et al.
 2017/0104868 A1 4/2017 Björsell et al.
 2017/0111265 A1 4/2017 Perreault et al.
 2017/0126752 A1 5/2017 Perreault et al.
 2017/0142256 A1 5/2017 Björsell et al.

FOREIGN PATENT DOCUMENTS

CA 2 218 218 A1 10/1997
 CA 2249668 A1 4/1999
 CA 2 299 037 A1 8/2000
 CA 2 437 275 A1 10/2002
 CA 2598200 A1 2/2008
 CA 2668025 A1 5/2008
 CA 2670510 A1 6/2008
 CA 2 681 984 A1 10/2008
 CA 2 690 236 A1 12/2008
 CA 2 659 007 A1 9/2009
 CA 2732148 A1 2/2010
 CA 2 778 905 A1 8/2010
 CA 2812174 A1 3/2011
 CN 1498029 A 5/2004
 CN 1498482 A 5/2004
 CN 1668137 A 9/2005
 CN 1274114 C 9/2006
 CN 101005503 A 7/2007
 CN 101069390 A 11/2007
 CN 101095329 A 12/2007
 CN 101584150 A 11/2009
 CN 101584166 A 11/2009
 CN 101605342 A 12/2009
 CN 1498029 B 5/2010
 CN 101772929 A 7/2010
 CN 101069390 B 12/2010
 CN 102137024 A 7/2011
 CN 102457494 A 5/2012
 CN 102484656 A 5/2012
 CN 102572123 A 7/2012
 CN 101095329 B 10/2012
 CN 101605342 B 12/2012
 CN 102833232 A 12/2012
 CN 101005503 B 1/2013
 CN 101772929 B 7/2014
 CN 102457494 B 10/2014
 DE 602 01 827 T2 11/2005
 DE 11 2005 003 306 T5 1/2008
 DE 601 33 316 T2 7/2008
 DE 603 17 751 T2 11/2008
 EP 0 841 832 A2 5/1998
 EP 0 841 832 A3 5/1999
 EP 1 032 224 A2 8/2000
 EP 1 032 224 A3 2/2001
 EP 1 244 250 A1 9/2002
 EP 1 266 516 A2 12/2002
 EP 1 362 456 A2 11/2003
 EP 1 371 173 A1 12/2003
 EP 1 389 862 A1 2/2004
 EP 1 411 743 A1 4/2004
 EP 1 389 862 B1 11/2004
 EP 1 526 697 A2 4/2005
 EP 1 362 456 A4 5/2005
 EP 1 575 327 A1 9/2005
 EP 1 610 583 A1 12/2005
 EP 1 526 697 A3 3/2006
 EP 1 721 446 A1 11/2006
 EP 1 829 300 A1 9/2007
 EP 1 371 173 B1 11/2007
 EP 1 411 743 B1 11/2007
 EP 1 362 456 B1 3/2008
 EP 1 974 304 A2 10/2008
 EP 1 974 304 A4 10/2008
 EP 1 610 583 B1 8/2009
 EP 2 084 868 8/2009
 EP 2 090 024 8/2009
 EP 2 127 232 A1 12/2009
 EP 2 165 489 A1 3/2010
 EP 2 215 755 A1 8/2010

US 9,813,330 B2

Page 6

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	2 227 048	A1	9/2010
EP	2 127 232	A4	3/2011
EP	2 165 489	A4	3/2011
EP	2 311 292		4/2011
EP	1 829 300	A4	5/2012
EP	2 449 749	A1	5/2012
EP	2 478 678		7/2012
EP	2 215 755	A4	10/2012
EP	1 829 300	B1	11/2012
EP	2 449 749	B1	3/2014
EP	1 266 516	B1	5/2014
GB	2 332 337	A	6/1999
ID	W00200902627		9/2009
IN	24/2009		6/2009
IN	29/2009		7/2009
IN	287412		9/2017
JP	2011-199384	A	10/2011
KR	10-2009-0086428	A	8/2009
KR	10-2009-0095621	A	9/2009
MX	2009004811	A	8/2009
MX	2009005751	A	8/2009
SG	151991	A1	6/2009
SG	152752	A1	6/2009
SG	155474		10/2009
WO	WO 01/50693	A1	7/2001
WO	WO 01/69899	A2	9/2001
WO	WO 01/69899	A3	9/2001
WO	WO 01/80587	A1	10/2001
WO	WO 01/89145	A2	11/2001
WO	WO 02/082728	A1	10/2002
WO	WO 02/082782	A2	10/2002
WO	WO 02/082782	A3	10/2002
WO	WO 03/027801	A2	4/2003
WO	WO 2005/084002	A1	9/2005
WO	WO 2006/067269	A1	6/2006
WO	WO 2006/072099	A1	7/2006
WO	WO 2006/078175	A2	7/2006
WO	WO 2006/078175	A3	7/2006
WO	WO 2007/044454	A2	4/2007
WO	WO 2007/056158	A2	5/2007
WO	WO 2007/087077	A2	8/2007
WO	WO 2007/087077	A3	8/2007
WO	WO 2008/027065	A1	3/2008
WO	WO 2008/052340	A1	5/2008
WO	WO 2008/064481	A1	6/2008
WO	WO 2008/085614	A2	7/2008
WO	WO 2008/085614	A3	7/2008
WO	WO 2008/086350	A2	7/2008
WO	WO 2008/086350	A3	7/2008
WO	WO 2008/103652	A1	8/2008
WO	WO 2008/116296	A1	10/2008
WO	WO 2008/085614	A8	12/2008
WO	WO 2008/151406	A1	12/2008
WO	WO 2008/151406	A8	12/2008
WO	WO 2009/070202	A1	6/2009
WO	WO 2009/070278	A1	6/2009
WO	WO 2010/012090	A2	2/2010
WO	WO 2011/000405	A1	1/2011
WO	WO 2011/032256	A1	3/2011
WO	WO 2013/013189	A2	1/2013
WO	WO 2013/120069	A1	8/2013
WO	WO 2014/066155	A2	5/2014
WO	WO 2014/117599	A1	8/2014
WO	WO 2014/166258	A1	10/2014

OTHER PUBLICATIONS

Baker et al., "Cisco Support for Lawful Intercept in IP Networks," Internet Draft—working document of the Internet Engineering Task Force (IETF), accessible at <http://www.ietf.org/ietf/lid-abstracts.txt>, Apr. 2003, expires Sep. 30, 2003, pp. 1-15.
 F. Baker et al., "RFC 3924—Cisco Architecture for Lawful Intercept in IP Networks." Oct. 2004.

Bhushan et al., "Federated Accounting: Service Charging and Billing in a Business-to-Business Environment," 0-7803-6719-7/01, © 2001 IEEE, pp. 107-121.

Cisco, "Lawful Intercept Requirements Summary." <http://www.faqs.org/rfcs/rfc3924.html>. Nov. 8, 2006.

DOTS IP Address Validation, "Overview", http://www.serviceobjects.com/products/dots_ipgeo.asp; printed Jun. 21, 2012.
 DOTS Phone Exchange, "Overview", <http://www.serviceobjects.com/demos/PhoneExchangeDemo.asp> (URL no longer valid, current URL is <http://www.serviceobjects.com/products/phone/phone-exchange/>); printed Jun. 21, 2012.

ETSI Technical Specification. "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 5: Service-specific details for IP Multimedia Services." Apr. 2008, 25 pgs, v.2.3.1, France.

Handley, M. et al, "RFC 2543—SIP; Session Initiation Protocol." Mar. 1999.

IETF ENUM WG R STASTNY OEFEG Informational Numbering for VOIP and Other IP Communications: "Numbering for ViOP and other IP Communications, draft-stastny-enum-numbering-voip-00.txt", 20031001, Oct. 1, 2003, pp. 1-43, XP015035676, ISSN: 0000-0004.

IP2Location, <http://www.ip2location.com/>; printed Jun. 20, 2012.

ETSI TS 122 173 V12.7.0 (Oct. 2014) Digital cellular telecommunications system (Phase 2+); Technical Specification 8.2.2.3—Interoperability with PSTN/ISDN and mobile CS Networks, Contents and Forward, pp. 1-9; Sec. 8, pp. 14-17.

Huitema et al., "Architecture for Internet Telephony Service for Residential Customers," Academic Paper for *Bellcore*, Mar. 2, 1999, pp. 1-14.

Jajszczyk et al., "Emergency Calls in Flow-Aware Networks," *IEEE Communications Letters*, vol. 11, No. 9, Sep. 2007, pp. 753-755.

Ketchpel et al. "U-PAI: A universal payment application interface" *Second USENIX Workshop on Electronic Commerce Proceedings*, 1996-8, pp. 1-17.

Kim et al., "An Enhanced VoIP Emergency Services Prototype," *Proceedings of the 3rd International ISCRAM Conference* (B. Van de Walle and M. Turoff, eds.), Newark, NJ (USA), May 2006, pp. 1-8.

Kornfeld et al., "DVB-H and IP Datacast—Broadcast to Handheld Devices," *IEEE Transactions on Broadcasting*, vol. 53, No. 1, Mar. 2007, pp. 161-170.

Kortebi et al., "SINR-Based Routing in Multi-Hop Wireless Networks to Improve VoIP Applications Support," 1-4244-0667-6/07, © 2007 IEEE, pp. 491-496.

Lee et al., "VoIP Interoperation with KT-NGN," in *The 6th International Conference on Advanced Communication Technology*, Technical Proceedings, 2004, pp. 126-128, accompanied by Title and Contents—4 pages.

Lin et al., "Effective VoIP Call Routing in WLAN and Cellular Integration," *IEEE Communications Letters*, vol. 9, No. 10, Oct. 2005, pp. 874-876.

Lind AT&T S: "ENUM Call Flows for VoIP Interworking; draft-lind-enum-callflows-03.txt", 20020201, No. 3, Feb. 1, 2002, pp. 1-17, XP015004214, ISSN: 0000-0004.

List of North American Numbering Plan area codes, http://en.wikipedia.org/wiki/List_of_NANP_area_codes; printed Jun. 20, 2012.

Ma et al., "Realizing MPEG4 Video Transmission Based on Mobile Station over GPRS," 0-7803-9335-X/05, © 2005 IEEE, pp. 1241-1244.

Mintz-Habib et al., "A VoIP Emergency Services Architecture and Prototype," {mm2571,asr,hgs,xiaotaow}@cs.columbia.edu, 0-7803-9428-3/05, © 2005 IEEE, pp. 523-528.

Moberg & Drummond, "MIME-Based Secure Peer-to-Peer Business Data Interchange Using HTTP, Applicability Statement 2 (AS2)," *Network Working Group, Request for Comments: 4130, Category: Standards Track*, Copyright © The Internet Society Jul. 2005, pp. 1-47.

Munir, Muhammad Farukh, "Study of an Adaptive Scheme for Voice Transmission on IP in a Wireless Networking Environment 802.11e," *Dept. of Networks and Distributed Computing, Ecole Supérieure En Sciences Informatiques (ESSI), Université De Nice*, Jun. 2005, (pp. 1-35), Best Available Copy—pp. 1-11.

US 9,813,330 B2

Page 7

(56) References Cited

OTHER PUBLICATIONS

- Rosenberg, et al.; "RFC 3261—SIP: Session Initiation Protocol", Jun. 2002.
- Sippy SIP B2BUA. "About Sippy RTPproxy." <http://www.rtpproxy.org>. Jul. 15, 2009.
- Sripanidkulchai et al., "Call Routing Management in Enterprise VoIP Networks," *Copyright 2007 ACM 978-1-59593-788-9/07/0008*, 6 pages.
- Stallings, William, "The Session Initiation Protocol," *The Internet Protocol Journal*, vol. 6, No. 1, Mar. 2003, pp. 20-30.
- Technical Report, "3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Study into routing of MT-SMs via the HPLMN (Release 7)," 3GPP TR 23.840 V0.1.0 (Feb. 2006), 13 pages.
- Thernelius, Fredrik, "SIP, NAT, and Firewalls," Master's Thesis, *Ericsson, Department of Teleinformatics*, May 2000, pp. 1-69.
- Townsend, et al.; "RFC 2661—Layer Two Tunneling Protocol 'L2TP'", Aug. 1999.
- Trad et al., "Adaptive VoIP Transmission over Heterogeneous Wired/Wireless Networks," *V. Roca and F. Rousseau (Eds.): MIPS 2004, LNCS 3311*, pp. 25-36, 2004, © Springer-Verlag Berlin Heidelberg 2004.
- Wikipedia, "International mobile subscriber identity (IMSI)," <http://en.wikipedia.org/wiki/IMSI>, Jul. 16, 2013.
- Wikipedia, "Roaming," <http://en.wikipedia.org/wiki/Roaming>, Jul. 16, 2013.
- Yu et al., "Service-Oriented Issues: Mobility, Security, Charging and Billing Management in Mobile Next Generation Networks," *IEEE BeN2006*, 1-4244-0146-1/06, © 2006 IEEE, pp. 1-10.
- International Search Report and Written Opinion of the International Searching Authority dated Jun. 6, 2008 for PCT/CA2008/000545.
- International Search Report and Written Opinion of the International Searching Authority dated Feb. 6, 2008 for PCT/CA2007/001956.
- International Preliminary Report on Patentability dated May 14, 2009 for PCT/CA2007/001956.
- International Search Report and Written Opinion of the International Searching Authority dated Mar. 3, 2008 for PCT/CA2007/002150.
- International Preliminary Report on Patentability dated Feb. 13, 2009 for PCT/CA2007/002150.
- International Preliminary Report on Patentability and Written Opinion of the International Searching Authority dated Feb. 10, 2011 for PCT/CA2009/001062.
- International Search Report and Written Opinion dated on Jun. 18, 2010 for PCT/CA2009/001317.
- International Search Report and Written Opinion dated Mar. 12, 2010 for PCT/CA2009/001062.
- International Preliminary Report on Patentability dated Sep. 29, 2009 for PCT/CA2008/000545.
- International Preliminary Report on Patentability dated Mar. 20, 2012 for PCT/CA2009/001317.
- Extended European Search Report dated Nov. 2, 2012 for European Application No. EP 07 855 436.7.
- Extended European Search Report dated Dec. 20, 2013 for European Application No. EP 09 849 358.8.
- Extended European Search Report dated Apr. 16, 2014 for European Patent Application No. EP 09 802 316.1.
- Supplementary European Search Report for European Application No. 07 816 106, dated Jun. 18, 2012.
- Supplementary European Search Report for European Application No. 07 816 106, dated Nov. 2, 2012.
- European Examination Report dated Nov. 26, 2015 for European Patent Application No. EP 07 816 106.4.
- Communication for European Patent Application No. EP 07 816 106.4—Invitation pursuant to Article 94(3) and Rule 71(1) EPC dated Apr. 15, 2016. All pages.
- European Examination Report dated Aug. 29, 2016 for European Patent Application No. EP 07 855 436.7.
- Communication under Rule 71(3) EPC—Intention to Grant—dated Oct. 14, 2016 for European Patent Application No. EP 07 816 106.4.
- Canadian Office Action dated Jan. 27, 2015 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Nov. 18, 2015 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Dec. 1, 2015 for Canadian Patent Application No. CA 2,812,174.
- Canadian Office Action dated Jan. 22, 2016 for Canadian Patent Application No. CA 2,916,220.
- Canadian Office Action dated Mar. 3, 2016 for Canadian Patent Application No. CA 2,670,510.
- Canadian Office Action dated Jun. 8, 2016 for Canadian Patent Application No. CA 2,916,217.
- Canadian Office Action dated Aug. 16, 2016 for Canadian Patent Application No. CA 2,681,984.
- Chinese Office Action dated Mar. 24, 2011 for Chinese Patent Application No. CN 200780049791.5.
- Chinese Office Action dated Jun. 23, 2011 for Chinese Patent Application No. CN 200780049136.X.
- Indonesian Examination Report dated Jul. 5, 2012 for Indonesian Patent Application No. W-00200901414.
- Indonesian Examination Report dated Feb. 8, 2013 for Indonesian Patent Application No. W-00200901165.
- First Examination Report dated Dec. 9, 2015, India Patent Application No. 1047/MUMNP/2009, which corresponds to subject U.S. Appl. No. 14/802,929.
- Mexican Exam Report dated Jul. 11, 2011 for Mexican Patent Application No. MX/a/2009/004811.
- Mexican Notice of Allowance dated Sep. 2, 2011 for Mexican Patent Application No. MX/a/2009/005751.
- Document Title: Complaint for Patent Infringement [Jury Demand]; Case Title: *VoIP.Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Verizon Wireless Services, LLC*, a Delaware limited liability corporation; *Verizon Communications, Inc.*, a Delaware corporation; *AT&T, Inc.*, a Delaware corporation; *AT&T Corp.*, a Delaware corporation; and *DOES 1 through X*, inclusive, Defendants; Case No: 2:16-CV-00271; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Exhibit E; Chart 1 to Exhibit E; Chart 2 to Exhibit E; Chart 3 to Exhibit E; Chart 4 to Exhibit E; Chart 5 to Exhibit E; Chart 6 to Exhibit E; Exhibit F; Chart 1 to Exhibit F; Chart 2 to Exhibit F; Chart 3 to Exhibit F; Chart 4 to Exhibit F; Chart 5 to Exhibit F; Chart 6 to Exhibit F; Exhibit G; Exhibit H; and Addendum 1 to Exhibit H.
- Document Title: Complaint for Patent Infringement [Jury Demand]; Case Title: *VoIP.Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation; Defendants; Case No: 2:16-CV-00260; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Chart 1 to Exhibit D; Chart 2 to Exhibit D; Chart 3 to Exhibit D; Chart 4 to Exhibit D; Exhibit E; Exhibit F; and Addendum 1 to Exhibit F.
- Letter dated Nov. 30, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. No. 9,179,005 and U.S. Pat. No. 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Apple Inc. in the U.S.
- Letter dated Dec. 1, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. No. 9,179,005 and U.S. Pat. No. 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Verizon Communications in the U.S.
- Letters dated Dec. 18, 2015, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. No. 9,179,005 and U.S. Pat. No. 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Airtel in India; Alcatel-Lucent in France; Avaya Inc. in the U.S.; AT&T in the U.S.; Blackberry in Canada; Cable One in the U.S.; CenturyLink in the U.S.; Charter Communications in the U.S.; Cisco Systems in the U.S.; Comcast in the U.S.; Cox Communications in the U.S.; Cricket Wireless in the

US 9,813,330 B2

Page 8

(56) References Cited

OTHER PUBLICATIONS

U.S.; Facebook in the U.S.; Freedom Pop in the U.S.; Frontier Communications in the U.S.; Google Inc. in the U.S.; HP in the U.S.; Juniper Networks in the U.S.; LoopPay, Inc. in the U.S.; Magic Jack in the U.S.; MetroPCS in the U.S.; Ooma in the U.S.; PayPal in the U.S.; Republic Wireless in the U.S.; Rok Mobile in the U.S.; Samsung Electronics—America in the U.S.; ShoreTel, Inc. in the U.S.; Siemens in Germany; Skype USA in the U.S.; Sprint in the U.S.; Square Cash in the U.S.; Suddenlink Communications in the U.S.; Talktone in the U.S.; Tango in the U.S.; Time Warner Cable in the U.S.; T-mobile in the U.S.; Twitter in the U.S.; US Cellular in the U.S.; Venmo in the U.S.; Virgin Mobile USA in the U.S.; Vodafone in the UK; and Vonage in the U.S.

Letters dated Jan. 4, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. No. 9,179,005 and U.S. Pat. No. 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Rogers Communications Inc. in Canada; Shaw Cable in Canada; Walmart in Alaska; and WIND Mobile in Canada.

Letters dated Jan. 21, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. No. 9,179,005 and U.S. Pat. No. 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Alibaba (China) Co., Ltd in China; Comwave Telecommunications in Canada; and Intel in the U.S.

Letters dated Feb. 2, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. No. 9,179,005 and U.S. Pat. No. 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Netflix Inc. in the U.S.; Skype Technologies in the U.S.; and WhatsApp Inc. in the U.S.

Document Title: Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Dated May 24, 2016. 64 sheets.

Document Title: Declaration of Michael Caloyannides; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed May 23, 2016; filed May 24, 2016. 84 sheets.

Document Title: Public Switched Telephone Networks: A Network Analysis of Emerging Networks; Daniel Livengood, Jijun Lin and Chintan Vaishnav; Engineering Systems Division; Massachusetts Institute of Technology; Submitted May 16, 2006; to Dan Whitney, Joel Moses and Chris Magee, 27 sheets.

Document Title: A Brief History of VoIP; Document One—The Past; Joe Hallock; joe@sitelifference.com; date on cover page: Nov. 26, 2004; Evolution and Trends in Digital Media Technologies—COM 538; Masters of Communication in Digital Media; University of Washington. 17 sheets.

Document Title: Petitioner's Voluntary Interrogatory Responses; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; IPR20161082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed and Filed not later than May 24, 2016. 8 sheets.

Document Title: VoIP-PAL, The World is Calling!, "Over \$7 Billion in Lawsuits File by Voip-Pal.com Inc. vs Apple, Verizon and AT&T for Various Patent Infringements," *Business Wire*, A Berkshire Hathaway Company, Feb. 11, 2016. 2 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No.

9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated Jun. 15, 2016. 70 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; in re U.S. Pat. No. 9,179,005; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Nov. 3, 2015; Application Filed: Aug. 13, 2013; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated Jun. 15, 2016. 67 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 8,542,815; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Sep. 24, 2013; Application Filed: Nov. 1, 2007; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Complaint for Patent Infringement, United States District Court, District of Nevada, Case No.: 2:16-cv-2338, *VoIP-Pal.com Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendant, Filed Oct. 6, 2016, 8 pages.

Civil Docket for Case #: 2:16-cv-02338-RFB-CWH, United States District Court, District of Nevada (Las Vegas), *VoIP-Pal.com Inc. v. Twitter, Inc.*, Date Filed: Oct. 6, 2016, 2 pages.

Table of Exhibits, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, 1 page.

Exhibit A, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 8,542,815 B2, Issued Sep. 24, 2013, to Clay Perrault et al., 60 pages.

Exhibit B, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 9,179,005 B2, Issued Nov. 3, 2015, to Clay Perrault et al., 63 pages.

Exhibit C, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Letter dated Dec. 18, 2015 giving notice of U.S. Pat. No. 8,542,815 B2; U.S. Pat. No. 9,179,005 B2; and related Patents listed in Attachment A, 4 pages.

Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Asserted Claims and Infringement Conditions, United States District Court, District of Nevada, *VoIP-Pal.com Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 6 pages.

Chart 1 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 1, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 8,542,815, United States District Court, District of Nevada, *VoIP-Pal.com Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 20 pages.

Chart 2 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 2, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 9,179,005, United States District Court, District of Nevada, *VoIP-Pal.com Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 28 pages.

Exhibit E, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, VPLM Active U.S. Patent Matters as of October 1, 2016, 2 pages.

Exhibit F, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Twitter Royalty Monetization Analysis Overview, 4 pages.

Patent Owner's Preliminary Response, Case No. IPR2016-01082, U.S. Pat. No. 8,542,815, *Unified Patents Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Filing Date: Aug. 26, 2016, 80 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of portions of Petition with portions of Declaration, IPR2016-01082, *Unified Patents v. Voip-Pal*, Filing Date: Aug. 26, 2016, 9 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 19, 2016, 74 pages.

(56)

References Cited

OTHER PUBLICATIONS

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01201, *Apple v. Voip-Pal*, Filing Date: Sep. 19, 2016, 19 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 21, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01198, *Apple v. Voip-Pal*, Filing Date: Sep. 21, 2016, 21 pages.

Decision: Denying Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01082, U.S. Pat. No. 8,542,815 B2, Paper 8, Entered: Nov. 18, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Paper 6, Entered: Nov. 21, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Paper 6, Entered: Nov. 21, 2016.

Scheduling Order: United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Cases IPR2016-01201, IPR2016-01198, U.S. Pat. No. 8,542,815 B2, U.S. Pat. No. 9,179,005 B2, Paper 7, Entered: Nov. 21, 2016.

Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 76 pages. Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01201, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01201, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01201, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, to: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01201, Memo—"Subject: Digifonica TEchnology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; to: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01201, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, to: John Rutter, et al., 3 pages.

Voip-Pal Ex. 2007, IPR2016-01201, DigiFonica International Inc Memo—" [Fwd: Digifonica Technical Review—draft report]," From Clay Perreault, to: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01201, John Rutter—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01201, Stuart Gare—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01201, Pentti Kalevi Huttunen—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01201, Ryan Purita—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex. 2012, IPR2016-01201, Johan Emil Viktor Björnell—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01201, Clay Perreault—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01201, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

Voip-Pal Ex. 2015, IPR2016-01201, RBR Source Code Log for Trunk Directory, "r1879 | cdelalande | Oct. 31, 2006 17:07:46-0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016, IPR2016-01201, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 82 pages.

Voip-Pal Ex. 2017, IPR2016-01201, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, to: Emil Björnell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01201, David Terry—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01201, DF DigiFonica International Inc Memo—"Software release 10:30 am PST-11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, to: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01201, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies. Technology Overview, Draft Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. to: E. Björnell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01201, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björnell to: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

US 9,813,330 B2

Page 10

(56)

References Cited

OTHER PUBLICATIONS

Voip-Pal Ex. 2023, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 353 added, 1 message" Fuad A. to: E. Björzell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 358 added, 1 message" Fuad A. to: E. Björzell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 361 updated, 1 message" Fuad A. to: E. Björzell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" David Terry to: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" Emil Björzell to: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Rev 541 updated, 1 message" Fuad A. to: E. Björzell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" David Terry to: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björzell to: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 554 added, 1 message" Fuad A. to: Emil Björzell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry to: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björzell to: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01201, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards to: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff to: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01201, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01201, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

Voip-Pal Ex. 2047, IPR2016-01201, "Merlin® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.

Voip-Pal Ex. 2048, IPR2016-01201, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.

Voip-Pal Ex. 2049, IPR2016-01201, Valdar, Andy, *Understanding Telecommunications Networks*, © The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.

Voip-Pal Ex. 2050, IPR2016-01201, Horak, Ray, "Webster's New World® Telecom Dictionary," ©2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.

Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 78 pages.

Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01198, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01198, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01198, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, to: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01198, Memo—"Subject: Digifonica Technology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; to: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01198, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, to: John Rutter, et al., 3 pages.

Voip-Pal Ex. 2007, IPR2016-01198, DigiFonica International Inc Memo—" [Fwd: Digifonica Technical Review—draft report], " From Clay Perreault, to: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01198, John Rutter—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01198, Stuart Gare—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01198, Pentti Kalevi Huttunen—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01198, Ryan Purita—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex. 2012, IPR2016-01198, Johan Emil Viktor Björzell—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01198, Clay Perreault—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No.

US 9,813,330 B2

Page 11

(56) References Cited

OTHER PUBLICATIONS

IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01198, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

Voip-Pal Ex. 2015, IPR2016-01198, RBR Source Code Log for Trunk Directory, "r1879 | cdellalande | Oct. 31, 2006 17:07:46-0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016, IPR2016-01198, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 96 pages.

Voip-Pal Ex. 2017, IPR2016-01198, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, to: Emil Björzell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01198, David Terry—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01198, DF DigiFonica International Inc Memo—"Software release 10:30 am PST-11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, to: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01198, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies, Technology Overview, Draft Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. to: E. Björzell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01198, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björzell to: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

Voip-Pal Ex. 2023, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 353 added, 1 message" Fuad A. to: E. Björzell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 358 added, 1 message" Fuad A. to: E. Björzell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 361 updated, 1 message" Fuad A. to: E. Björzell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" David Terry to: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" Emil Björzell to: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Rev 541 updated, 1 message" Fuad A. to: E. Björzell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" David Terry to: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björzell to: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 554 added, 1 message" Fuad A. to: Emil Björzell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry to: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björzell to: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01198, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards to: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff to: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01198, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01198, "Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01198, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01198, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

Voip-Pal Ex. 2047, IPR2016-01198, "Merlin® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.

Voip-Pal Ex. 2048, IPR2016-01198, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.

Voip-Pal Ex. 2049, IPR2016-01198, Valdar, Andy, *Understanding Telecommunications Networks*, © 2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.

Voip-Pal Ex. 2050, IPR2016-01198, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.

Canadian Office Action dated May 29, 2017 for Candian Patent Application No. CA 2,668,025.

Canadian Office Action dated Jun. 9, 2017 for Candian Patent Application No. CA 2,916,217.

European Examination Report dated May 12, 2017 for European Patent Application No. EP 09-802-316.1.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*,

US 9,813,330 B2

Page 12

(56) References Cited

OTHER PUBLICATIONS

Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01201, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01198, *Apple Inc. vs. VoIP-Pal.com Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Order, *Conduct of Proceeding*, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. No. 9,179,005 B2 and U.S. Pat. No. 8,542,815 B2, Paper No. 37, Filed: Jun. 13, 2017, 3 pages.

Canadian Office Action dated Mar. 31, 2017 for Canadian Patent Application No. CA 2,916,220.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated May 9, 2017, 63 pages.

Petitioner Apple Inc. Exhibit 1003, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.

Petitioner Apple Inc. Exhibit 1004, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.

Petitioner Apple Inc. Exhibit 1005, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Declaration of Henry H. Hough, PhD, 45 pages.

Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Patent of VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 9, 2017. 54 pages.

Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.

Petitioner Apple Inc. Exhibit 1007, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.

Petitioner Apple Inc. Exhibit 1008, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Declaration of Henry H. Hough, PhD, 41 pages.

Petitioner Apple Inc. Exhibit 1009, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, Case No. IPR2017-01382; U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated May 8, 2017, 84 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 8,542,815, Inter Partes Review No. IPR2017-01382; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; with Appendices A through II, 2113 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix A, James R. Bress, Curriculum Vitae, 26 pages. Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix B, Chapter 5, Telecommunications Essentials, Lillian Goleniewski, © 2002, 40 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix C, Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 41 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix D, ITU-T Recommendation E.164 (May 1997), 27 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix E, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 3-8-3-14, 9 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix F, Chapter 4, Telecommunications Essentials, Lillian Goleniewski, © 2002, pp. 99-100, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix G, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 18-1-18-20, 22 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix H, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 2, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix I, Telecommunications Act of 1996, 104th Congress of the U.S.A., Jan. 1996, 128 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix J, Perspectives on the AIN Architecture, Berman et al., IEEE Communications Magazine, Feb. 1992, 6 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix K, U.S. Pat. No. 7,907,714 B2, to Baniak et al., 21 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix L, The IMS, Poikselkä & Mayer, © 2009, John Wiley & Sons Ltd, Chapter 1 Introduction, 14 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix M, The IMS, Poikselkä & Mayer, © 2009, John Wiley & Sons Ltd, pp. 24-25 and 86-94, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix N, Chapter 9, Telecommunications Essentials, Lillian Goleniewski, © 2002, 42 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix O, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, pp. 238-239, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix P, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 4, pp. 67-86, 22 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Q, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 5, pp. 87-112, 28 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix R, Telecommunications Essentials, Lillian Goleniewski, © 2002, p. 221, 3 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix S, Network Working Group, RFC (Request for Comments): 1122, Internat Engineering Task Force, R. Braden, Ed., Oct. 1989, pp. 18-25, 9 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix T, RFC (Request for Comments): 791, Internet

US 9,813,330 B2

Page 13

(56) References Cited

OTHER PUBLICATIONS

Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix U, Network Working Group, RFC (Request for Comments): 1034, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix V, Network Working Group, RFC (Request for Comments): 1035, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix W, Network Working Group, RFC (Request for Comments): 3761, P. Fallstrom et al., Apr. 2004, pp. 1-18, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix X, U.S. Pat. No. 6,594,254 B1, to Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Y, ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Z, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 6-306-6-309, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix AA, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-10-14-13, 6 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix BB, The Internet Engineering Task Force (IETF®), May 5, 2017, 2 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix CC, Network Working Group, RFC (Request for Comments): 3261, J. Rosenberg et al., Jun. 2002, 269 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix DD, Network Working Group, RFC (Request for Comments): 3666, A. Johnston et al., Dec. 2003, 118 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix EE, Network Working Group; RFC (Request for Comments): 3665, A. Johnston et al., Dec. 2003, 94 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix FF, Network Working Group; RFC (Request for Comments): 2327, M. Handley et al., Apr. 1998, 42 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix GG, ITU-T Recommendation Q.931 (May 1998), 345 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix HH, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-76-14-77, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix II, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01382; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01382; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01382; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003 to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01382; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01382; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 33 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01382; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01382; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01382; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01382; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International)* Limited Patent Owner, Case No. IPR2017-01383; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 8, 2017, 92 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board: *AT&T Services, Inc.*, Petitioner v. *Digifonica (International)* Limited Patent Owner, U.S. Pat. No. 9,179,005, Inter Partes Review No. IPR2017-01383; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2094 pages. Appendices A through II are identical to those previously listed hereinabove as cite Nos. 28-62.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01383; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01383; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01383; U.S. Publication No. 2004/0218748 A1, Published Nov. 4, 2004, by Stephen Fisher, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01383; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01383; U.S. Pat. No. 6,674,850 B2, Issued Jan. 6, 2004, to Vu et al., 10 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01383; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01383; Patent Owner Response to Petition, Filed Feb. 10, 2017, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, 78 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International)* Limited Patent Owner, Case No. IPR2017-01384; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 7, 2017, 70 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International)* Limited Patent Owner, U.S. Pat. No. 9,179,005, Inter Partes Review No. IPR2017-01384; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2085 pages. Appendices A through II are identical to those previously listed hereinabove as cite Nos. 28-62.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01384; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01384; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

US 9,813,330 B2

Page 14

(56) References Cited

OTHER PUBLICATIONS

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01384; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01384; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01384; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01384; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01384; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01384; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01384; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Petitioner's Reply to Patent Owner's Response, Dated May 17, 2017, 34 pages.

Petitioner Apple Inc. Exhibit 1007, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1008, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1009, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *VoIP-Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Johan Emil Viktor Bjorsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., Erise IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . ." from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Email dated May 1, 2017 to Adam P. Seitz et al., Erise IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Petitioner's Reply to Patent Owner's Response, Paper 34, Dated May 17, 2017, 33 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *voip-pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1015, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Johan Emil Viktor Bjorsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1016, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., Erise IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . ." from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1017, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Email dated May 1, 2017 to Adam P. Seitz et al., Erise IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-*

US 9,813,330 B2

Page 15

(56)

References Cited

OTHER PUBLICATIONS

Pal.com Inc., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Voip-Pal Ex. 2053, IPR2016-01198, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Voip-Pal Ex. 2053, IPR2016-01201, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Order, Conduct of Proceeding, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.Com, Inc.*, Patent Owner. Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. No. 9,179,005 B2 and U.S. Pat. No. 8,542,815 B2, Paper No. 43, Filed: Jun. 22, 2017, 4 pages.

Order, Trial Hearing, 37 C.F.R. § 42.70, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.Com, Inc.*, Patent Owner. Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. No. 9,179,005 B2 and U.S. Pat. No. 8,542,815 B2, Paper No. 45, Filed: Jun. 26, 2017, 4 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 26, 2017, 15 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 26, 2017, 15 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR 2016-01198, U.S. Pat. No. 9,179,005, filed Jul. 3, 2017, 8 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR 2016-01201, U.S. Pat. No. 8,542,815, filed Jul. 3, 2017, 8 pages.

Voip-Pal Ex. 2054, IPR2016-01198, Voip-PAL's Demonstratives for Oral Hearing, *Apple Inc. v. Voip-Pal.Com, Inc.*, Case IPR2016-

01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Voip-Pal Ex. 2054, IPR2016-01201, Voip-PAL's Demonstratives for Oral Hearing, *Apple Inc. v. Voip-Pal.Com, Inc.*, Case IPR2016-01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Petitioner Apple Inc. Ex. 1018, Petitioner's Demonstrative Exhibits, Inter Partes Reviews, U.S. Pat. No. 9,179,005 & U.S. Pat. No. 8,542,815, Oral Argument, Jul. 20, 2017, *Apple Inc. v. Voip-Pal.com, Inc.*, Case IPR2016-01198; U.S. Pat. No. 9,179,005, Case IPR2016-01201; U.S. Pat. No. 8,542,815, 46 pages.

Canadian Office Action dated Aug. 2, 2017 for Canadian Patent Application No. CA 2,681,984.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01382, U.S. Pat. No. 8,542,815, dated Aug. 24, 2017, 71 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01383, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 74 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01384, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 61 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01398, U.S. Pat. No. 9,179,005, dated Aug. 25, 2017, 76 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01399, U.S. Pat. No. 8,542,815, dated Aug. 25, 2017, 77 pages.

Indian Office Action dated Jun. 21, 2017 for Indian Patent Application No. IN 1227/MUMNP/2009.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com., Inc.* Patent Owner; Cases IPR2016-01198 and IPR2016-01201; U.S. Pat. No. 9,179,006 B2 and U.S. Pat. No. 8,642,815 B2; Record of Oral Hearing, Held: Jul. 20, 2017; Before Josiah C. Cocks, Jennifer Meyer Chagnon, and John A. Hudalla, Administrative Patent Judges, 83 pages.

Intimation of the grant and recordal of India Patent No. 287412 entitled "Producing Routing Messages for Voice Over IP Communications", dated Sep. 15, 2017, for India Patent Application No. IN 1047/MUMNP/2009 filed Nov. 1, 2007.

* cited by examiner

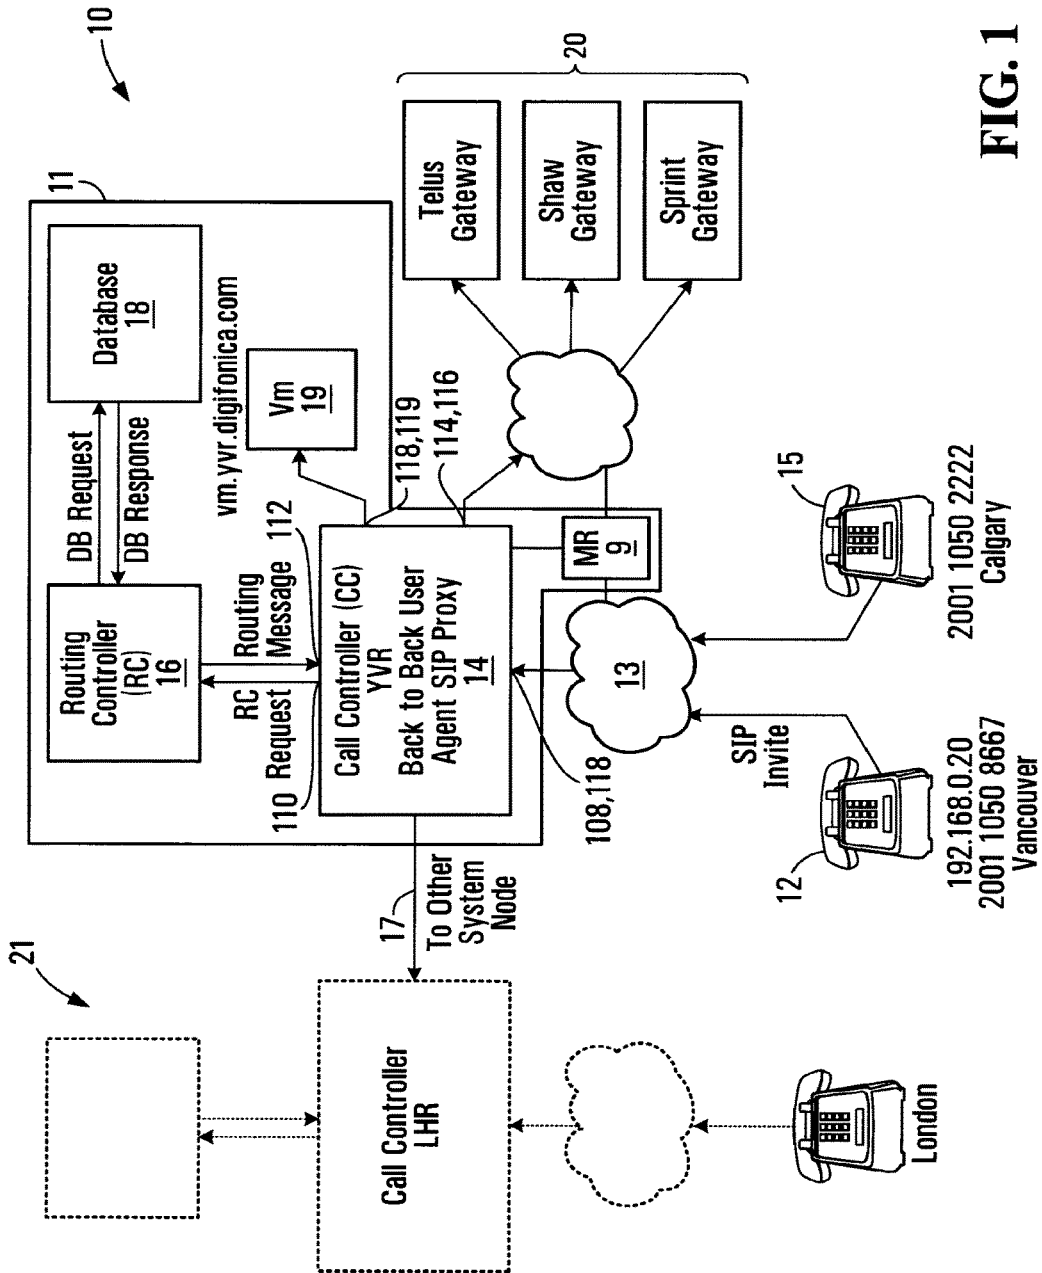


FIG. 1

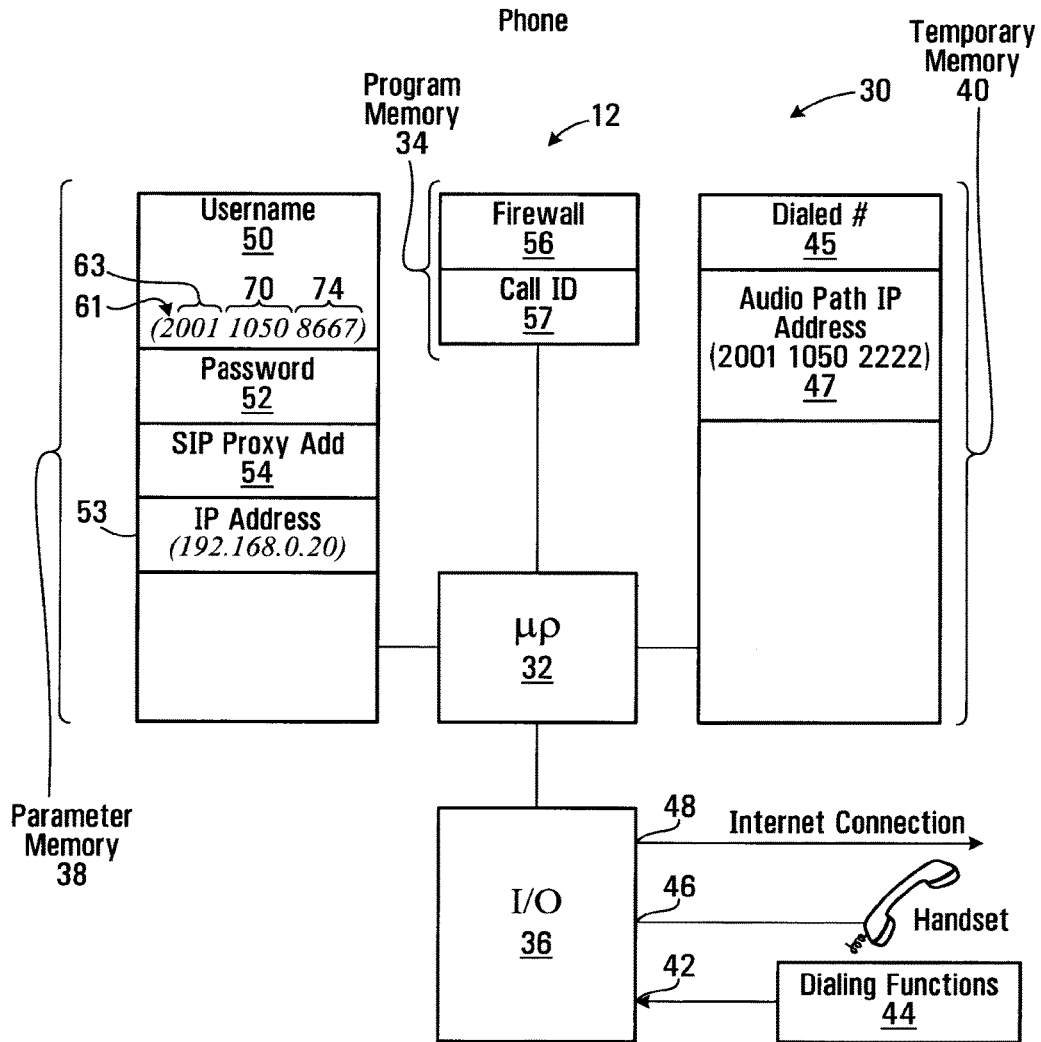


FIG. 2

SIP Invite Message

60 ~ Caller 2001 1050 8667
 62 ~ Callee 2001 1050 2222
 64 ~ Digest Parameters XXXXXXX
 65 ~ Call ID FF10@ 192.168.0.20
 67 ~ IP Address 192.168.0.20
 69 ~ Caller UDP Port 1

FIG. 3

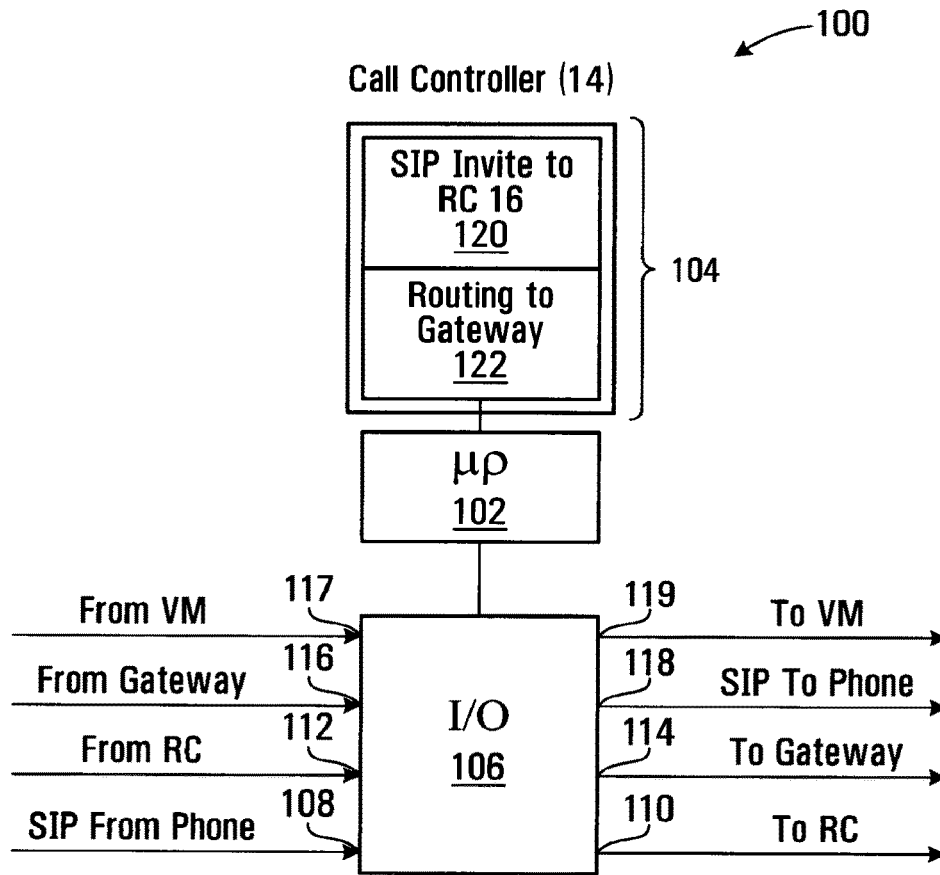


FIG. 4

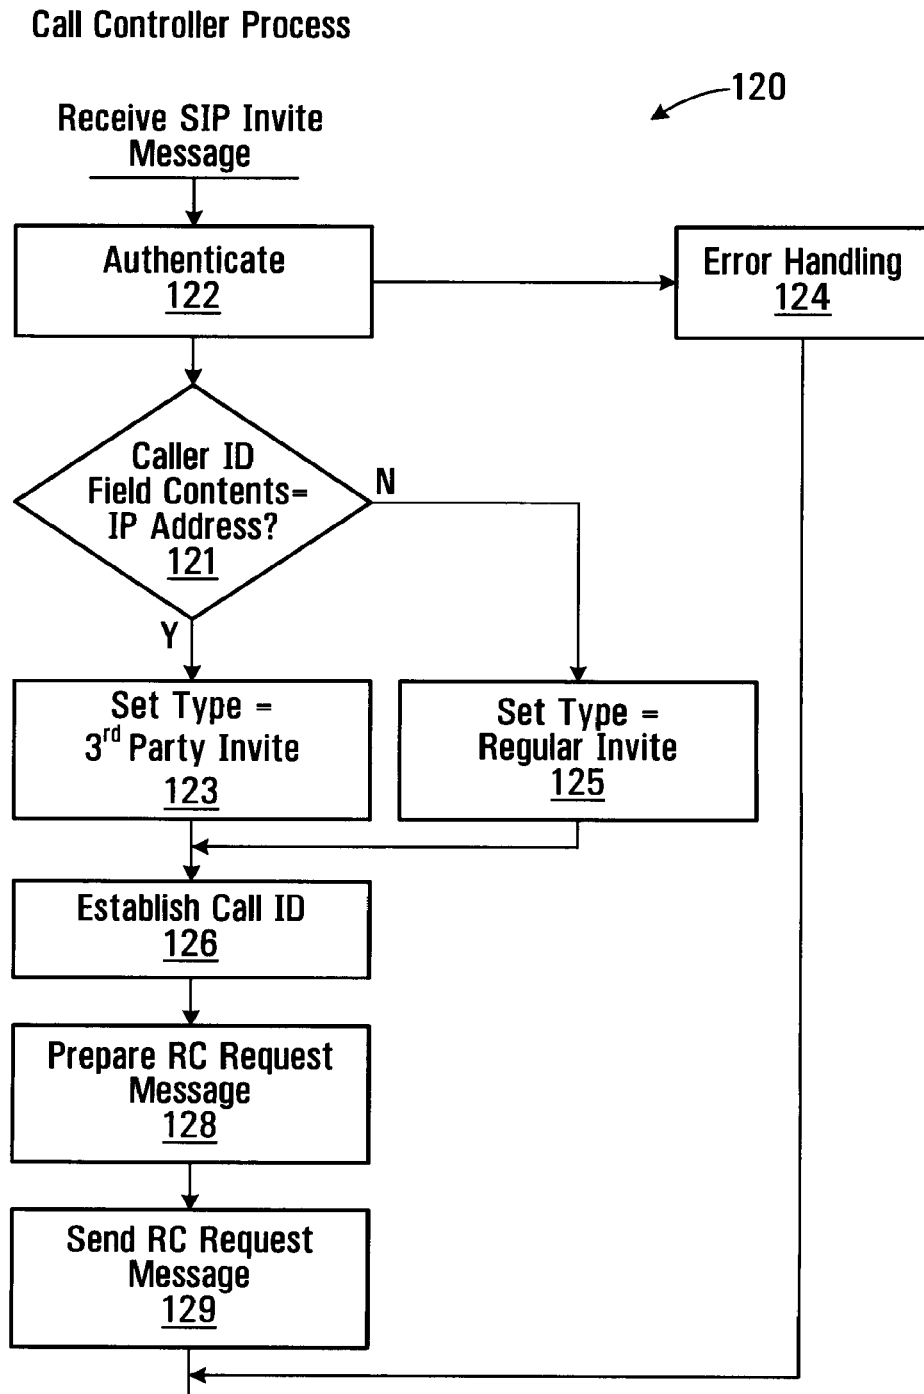


FIG. 5

150

RC Request Message

152 ~ Caller 2001 1050 8667
 154 ~ Callee 2001 1050 2222
 156 ~ Digest XXXXXXXX
 158 ~ Call ID FF10@ 192.168.0.20
 160 ~ Type Subscriber

FIG. 6

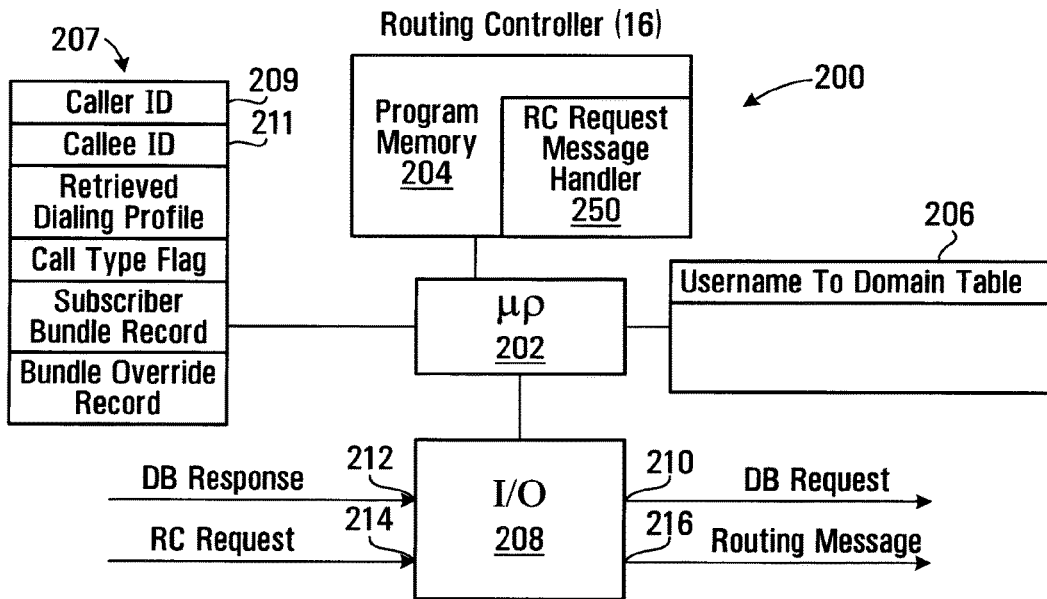


FIG. 7

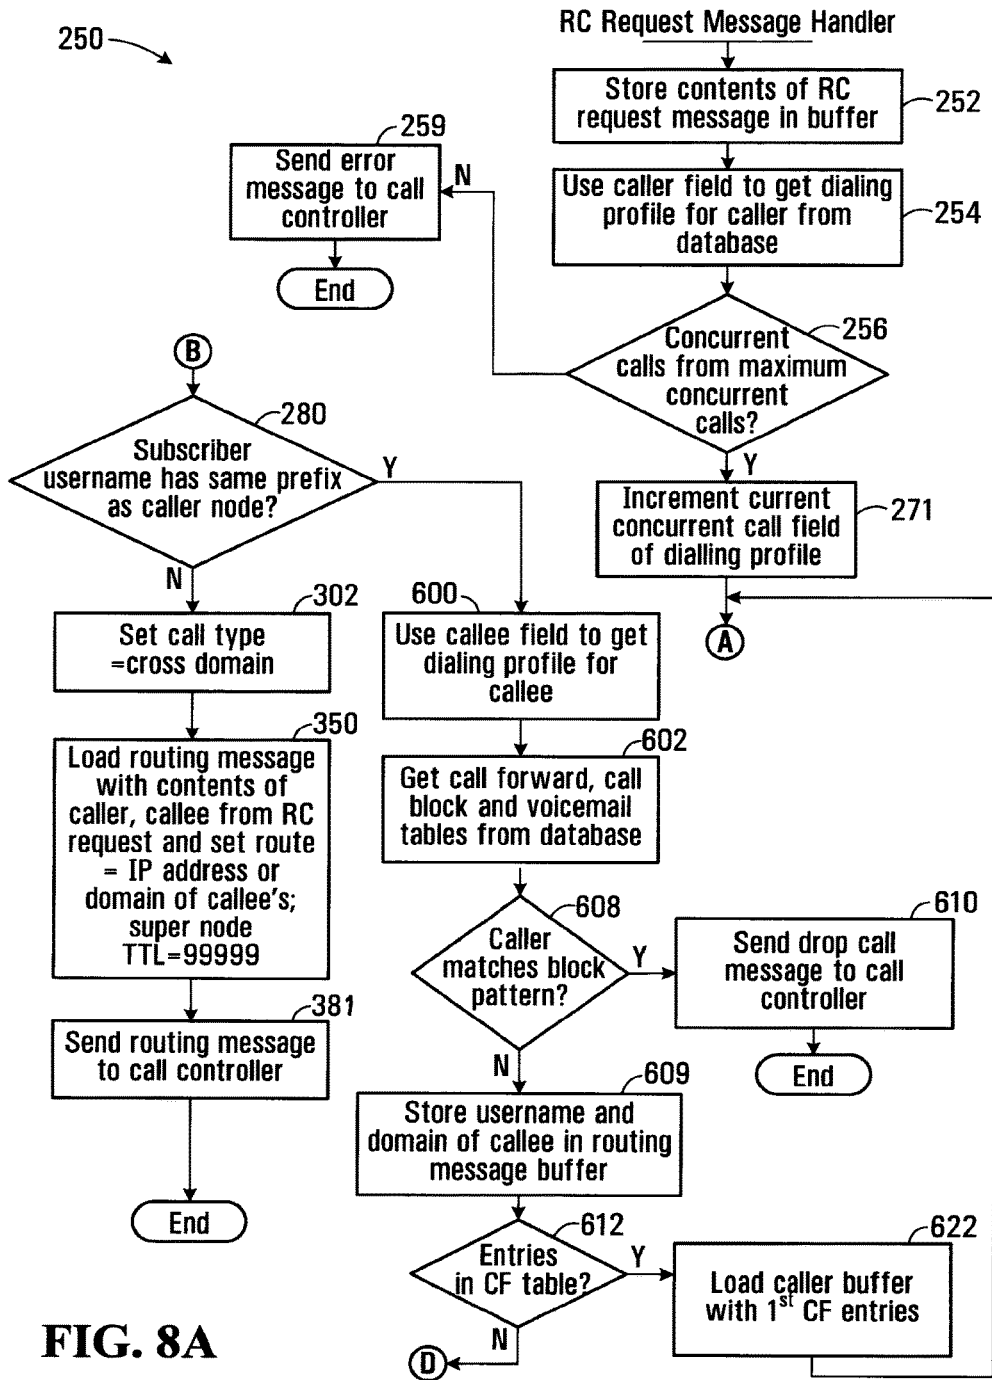


FIG. 8A

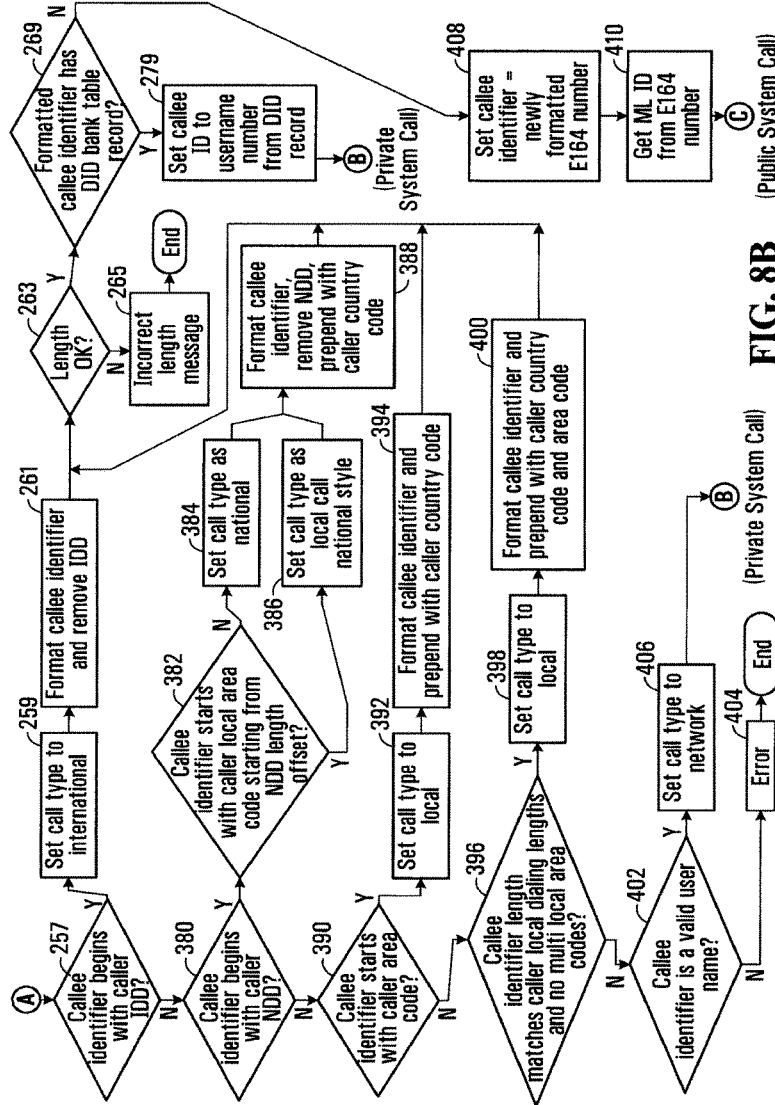
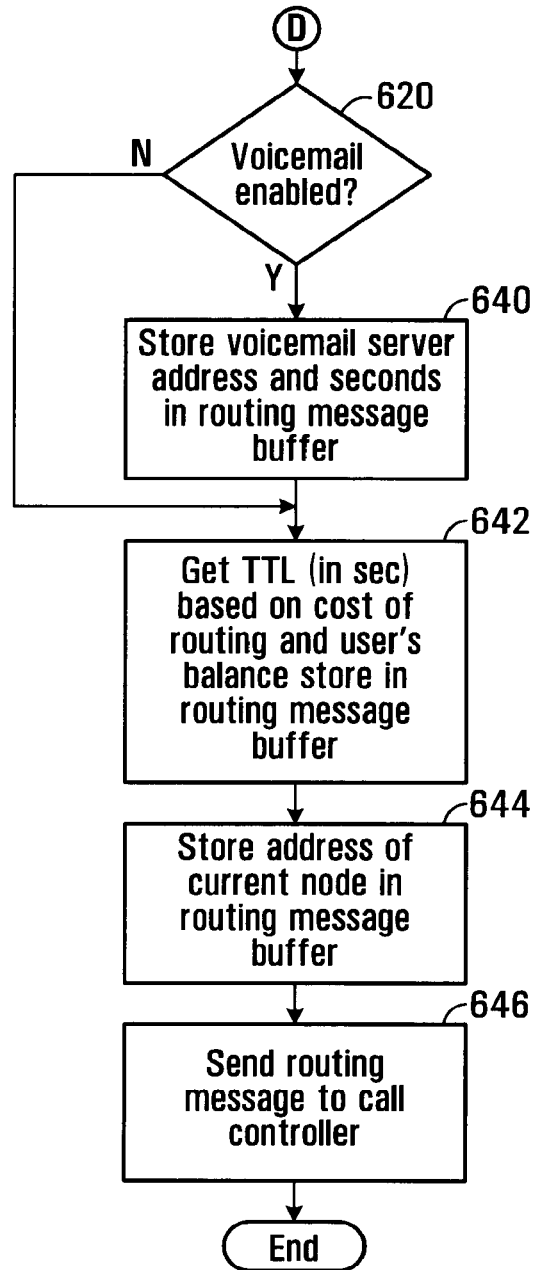


FIG. 8B

(Private System Call)

(Public System Call)

**FIG. 8C**

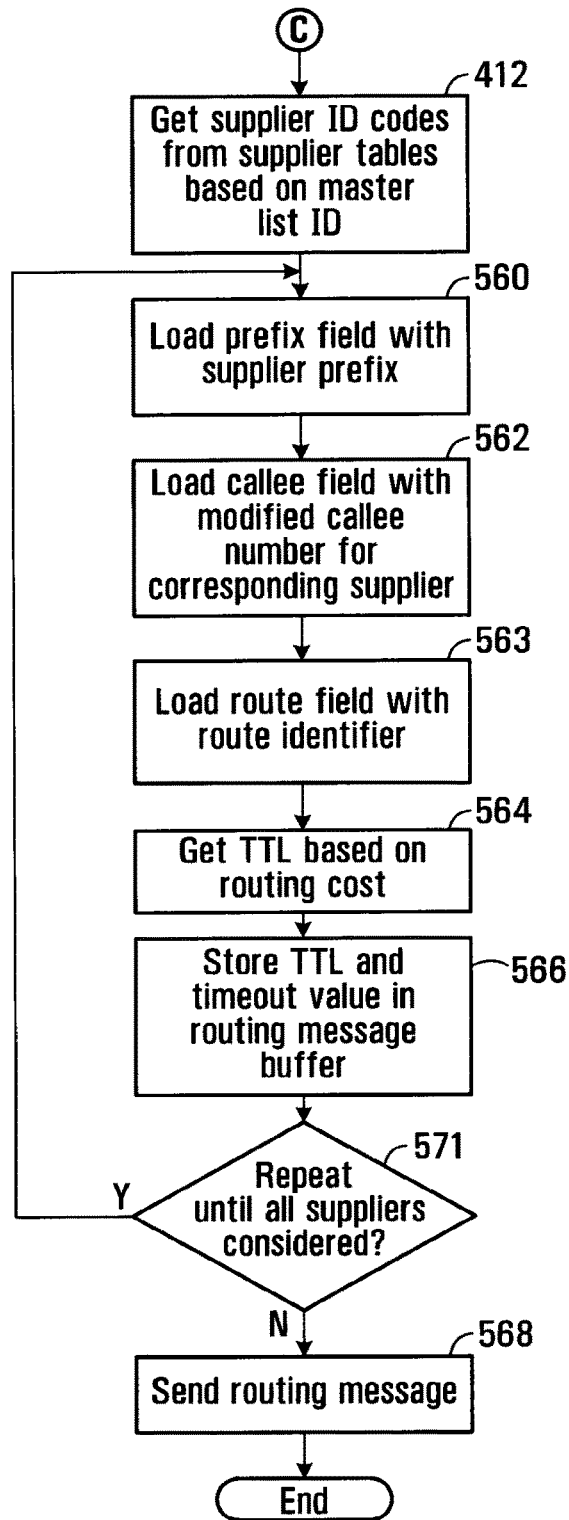


FIG. 8D

↖ 253

Dialing Profile for a User

258 ~ Username	Assigned on Subscription
260 ~ Domain	Domain Associated with User
262 ~ NDD	1
264 ~ IDD	011
266 ~ Country Code	1
267 ~ Local Area Codes	604;778
268 ~ Caller Minimum Local Length	10
270 ~ Caller Maximum Local Length	10
273 ~ Reseller	Retailer
275 ~ Maximum # of concurrent calls	Assigned on Subscription
277 ~ Current # of concurrent calls	Assigned on Subscription

FIG. 9

Dialing Profile for Caller (Vancouver Subscriber)

258 ~ Username	284	61	63	70	74	
260 ~ Domain	2001	1050	8667			
262 ~ NDD	sp.yvr.digifonica.com					282
264 ~ IDD	1	286	288	290		
266 ~ Country Code	011					
267 ~ Local Area Codes	1					
268 ~ Caller Minimum Local Length	604;778 (Vancouver)					
270 ~ Caller Maximum Local Length	10					
273 ~ Reseller	10					
275 ~ Maximum # of concurrent calls	10					
277 ~ Current # of concurrent calls	5					
	0					

↖ 276

FIG. 10

Callee Profile for Calgary Subscriber

Username	2001 1050 2222
Domain	sp.yvr.digifonica.com
NDD	1
IDD	011
Country Code	1
Local Area Codes	403 (Calgary)
Caller Minimum Local Length	7
Caller Maximum Local Length	10
Reseller	Deerfoot
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 11**Callee Profile for London Subscriber**

Username	4401 1062 4444
Domain	sp.lhr.digifonica.com
NDD	0
IDD	00
Country Code	44
Local Area Codes	20 (London)
Caller Minimum Local Length	10
Caller Maximum Local Length	11
Reseller	Marble Arch
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 12

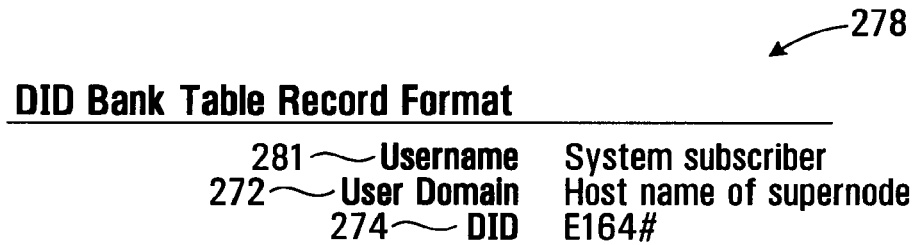


FIG. 13

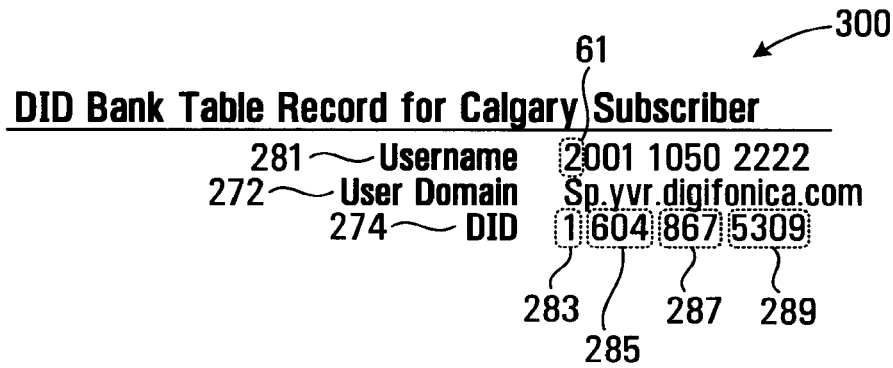


FIG. 14

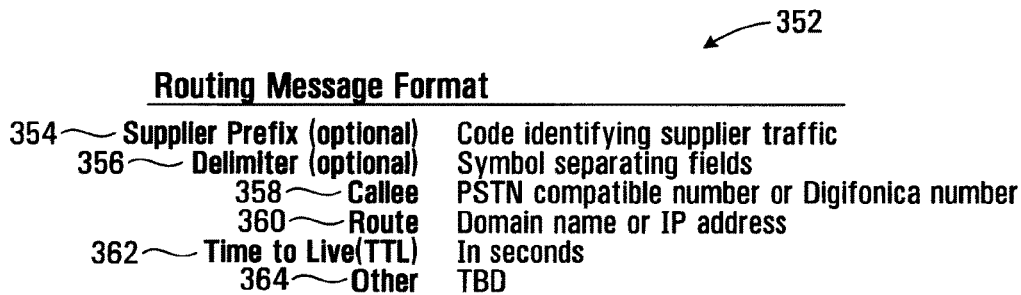


FIG. 15



FIG. 16

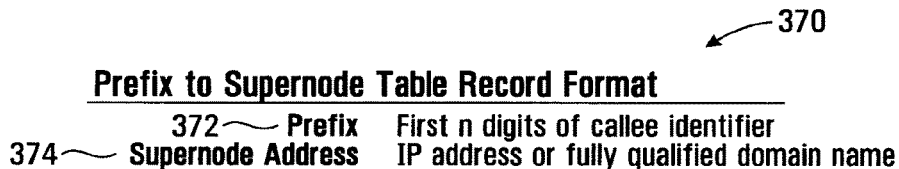


FIG. 17



FIG. 18

Master List Record Format

500	~ ml_id	Alphanumeric
502	~ Dialing code	Number Sequence
504	~ Country code	The country code is the national prefix to be used when dialing TO a particular country FROM another country.
506	~ Nat Sign #(Area Code)	Number Sequence
508	~ Min Length	Numeric
510	~ Max Length	Numeric
512	~ NDD	The NDD prefix is the access code used to make a call WITHIN that country from one city to another (when calling another city in the same vicinity, this may not be necessary).
514	~ IDD	The IDD prefix is the international prefix needed to dial a call FROM the country listed TO another country.
516	~ Buffer rate	Safe change rate above the highest rate charged by suppliers

FIG. 19**Example: Master List Record with Populated Fields**

ml_id	1019
Dialing code	1604
Country code	1
Nat Sign #(Area Code)	604
Min Length	7
Max Length	7
NDD	1
IDD	011
Buffer rate	\$0.009/min

FIG. 20

Suppliers List Record Format

540 ~	Sup_id	Name code
542 ~	MI_id	Numeric code
544 ~	Prefix (optional)	String identifying supplier's traffic #
546 ~	Specific Route	IP address
548 ~	NDD/IDD rewrite	
550 ~	Rate	Cost per second to Digifonica to use this route
551 ~	Timeout	Maximum time to wait for a response when requesting this gateway

FIG. 21**Telus Supplier Record**

Sup_id	2010 (Telus)
MI_id	1019
Prefix (optional)	4973#
Specific Route	72.64.39.58
NDD/IDD rewrite	011
Rate	\$0.02/min
Timeout	20

FIG. 22**Shaw Supplier Record**

Sup_id	2011 (Shaw)
MI_id	1019
Prefix (optional)	4974#
Specific Route	73.65.40.59
NDD/IDD rewrite	011
Rate	\$0.025/min
Timeout	30

FIG. 23**Sprint Supplier Record**

Sup_id	2012 (Sprint)
MI_id	1019
Prefix (optional)	4975#
Specific Route	74.66.41.60
NDD/IDD rewrite	011
Rate	\$0.03/min
Timeout	40

FIG. 24

Routing Message Buffer for Gateway Call

4973#0116048675309@72.64.39.58;tli=3600;to=20 ~ 570
 4974#0116048675309@73.65.40.59;tli=3600;to=30 ~ 572
 4975#0116048675309@74.66.41.60;tli=3600;to=40 ~ 574

FIG. 25**Call Block Table Record Format**

604 ~ Username Digifonica #
 606 ~ Block Pattern PSTN compatible or Digifonica #

FIG. 26**Call Block Table Record for Calgary Callee**

604 ~ Username of Callee 2001 1050 2222
 606 ~ Block Pattern 2001 1050 8664

FIG. 27**Call Forwarding Table Record Format for Callee**

614 ~ Username of Callee Digifonica #
 616 ~ Destination Number Digifonica #
 618 ~ Sequence Number Integer indicating order to try this

FIG. 28**Call Forwarding Table Record for Calgary Callee**

614 ~ Username of Callee 2001 1050 2222
 616 ~ Destination Number 2001 1055 2223
 618 ~ Sequence Number 1

FIG. 29

Voicemail Table Record Format

624	Username of Callee	Digifonica #
626	Vm Server	domain name
628	Seconds to Voicemail	time to wait before engaging voicemail
630	Enabled	yes/no

FIG. 30

Voicemail Table Record for Calgary Callee

Username of Callee	2001 1050 2222
Vm Server	vm.yvr.digifonica.com
Seconds to Voicemail	20
Enabled	1

FIG. 31

Routing Message Buffer - Same Node

650	200110502222@sp.yvr.digifonica.com;ttl=3600
652	200110552223@sp.yvr.digifonica.com;ttl=3600
654	vm.yvr.digifonica.com;20;ttl=60
656	sp.yvr.digifonica.com

FIG. 32

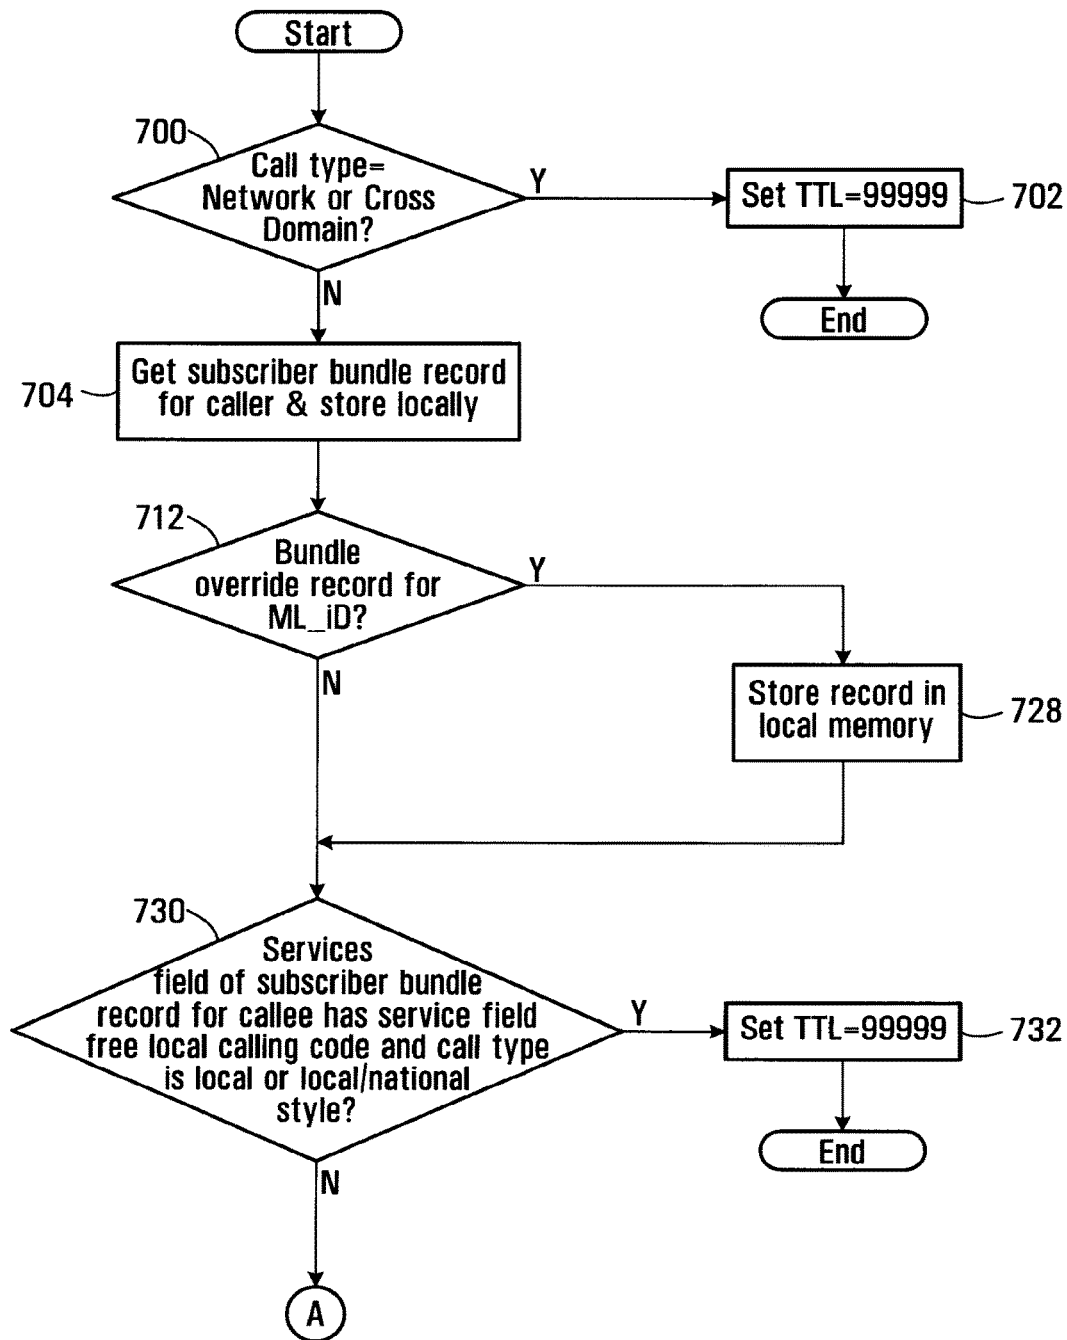


FIG. 33A

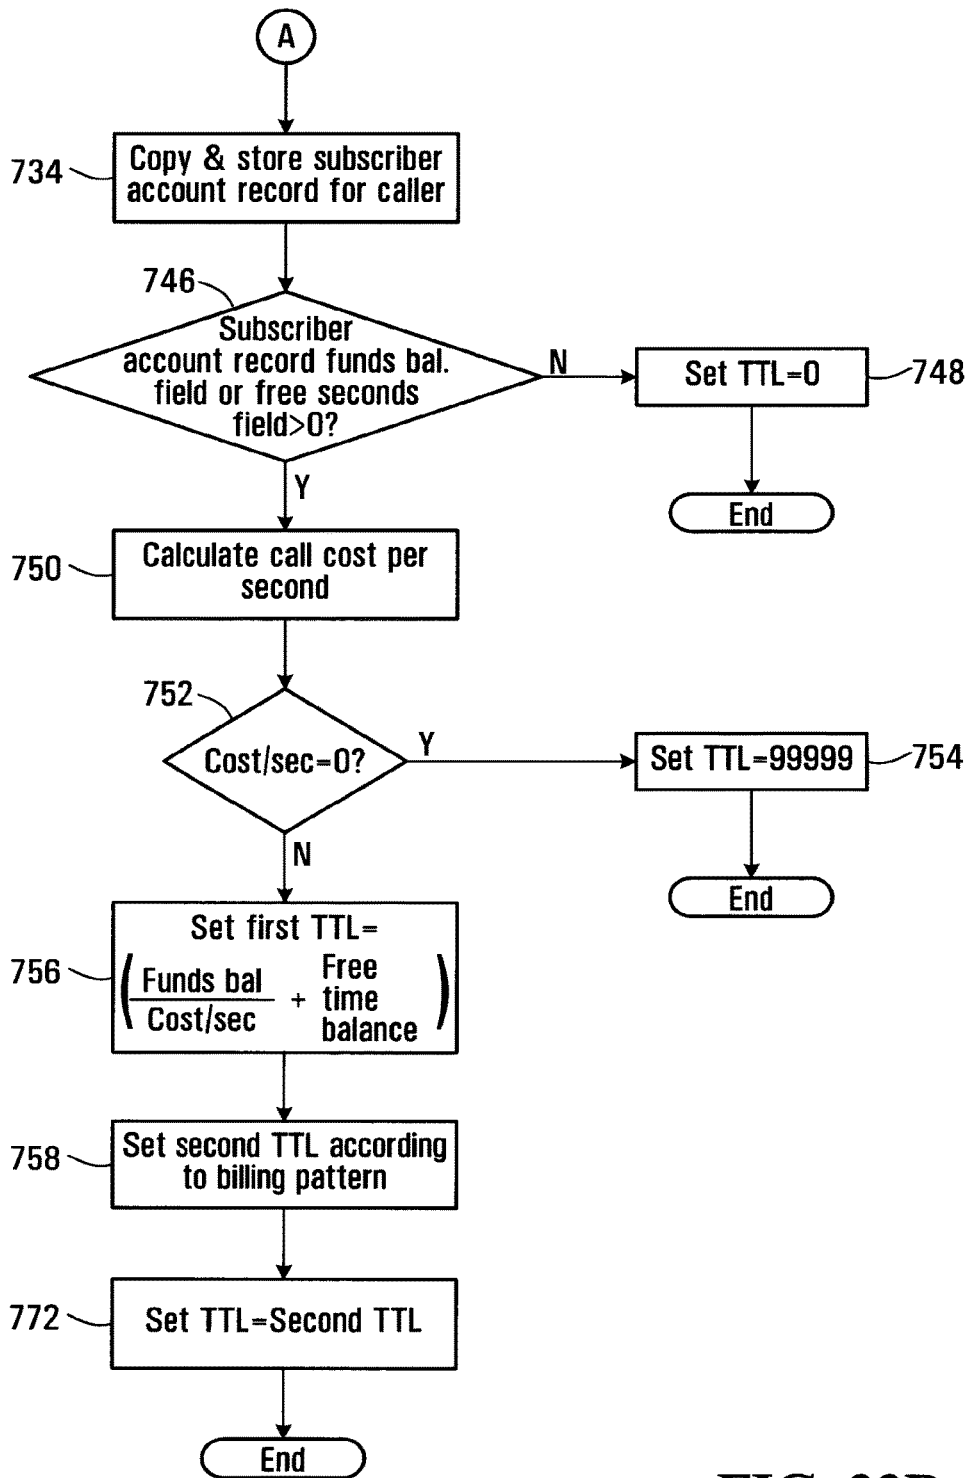


FIG. 33B

706 ↙

Subscriber Bundle Table Record

708 ~	Username	Subscriber username
710 ~	Services	Codes identifying service features (e.g. Free local calling; call blocking, voicemail)

FIG. 34

Subscriber Bundle Record for Vancouver Caller

708 ~	Username	2001 1050 8667
710 ~	Services	10; 14; 16

FIG. 35

714 ↙

Bundle Override Table Record

716 ~	ML_Id	Master list ID code
718 ~	Override type	Fixed; percent; cents
720 ~	Override value	real number representing value of override type
722 ~	Inc1	first level of charging (minimum # of seconds) charge
724 ~	Inc2	second level of charging

FIG. 36

726 ↙

Bundle Override Record for Located ML_ID

716 ~	ML_Id	1019
718 ~	Override type	percent
720 ~	Override value	10.0
722 ~	Inc1	30 seconds
724 ~	Inc2	6 seconds

FIG. 37

Subscriber Account Table Record			736
	738 ~	Username	Subscriber username
	740 ~	Funds balance	real number representing \$ value of credit
742 ~		Free time balance	integer representing # of free seconds

FIG. 38

Subscriber Account Record for Vancouver Caller			744
	738 ~	Username	2001 1050 8667
	740 ~	Funds balance	\$10.00
742 ~		Free time balance	100

FIG. 39

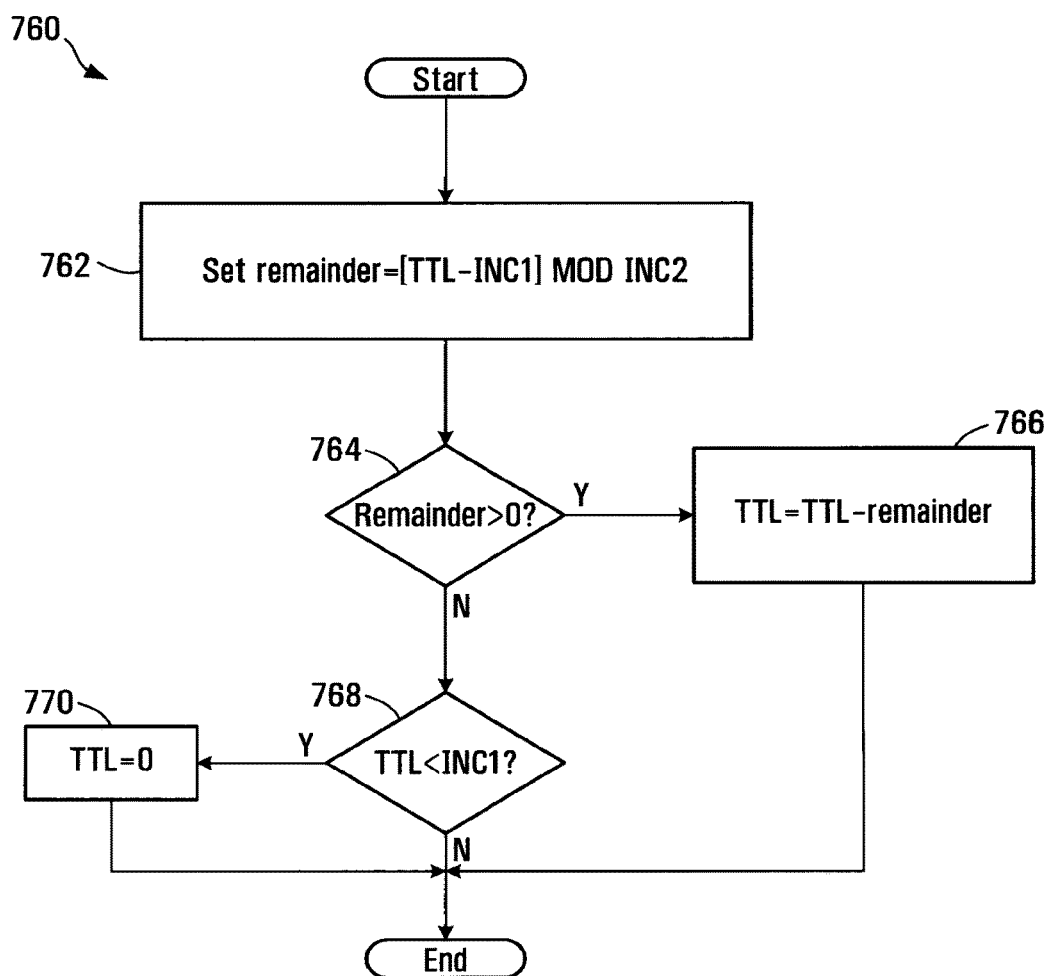


FIG. 40

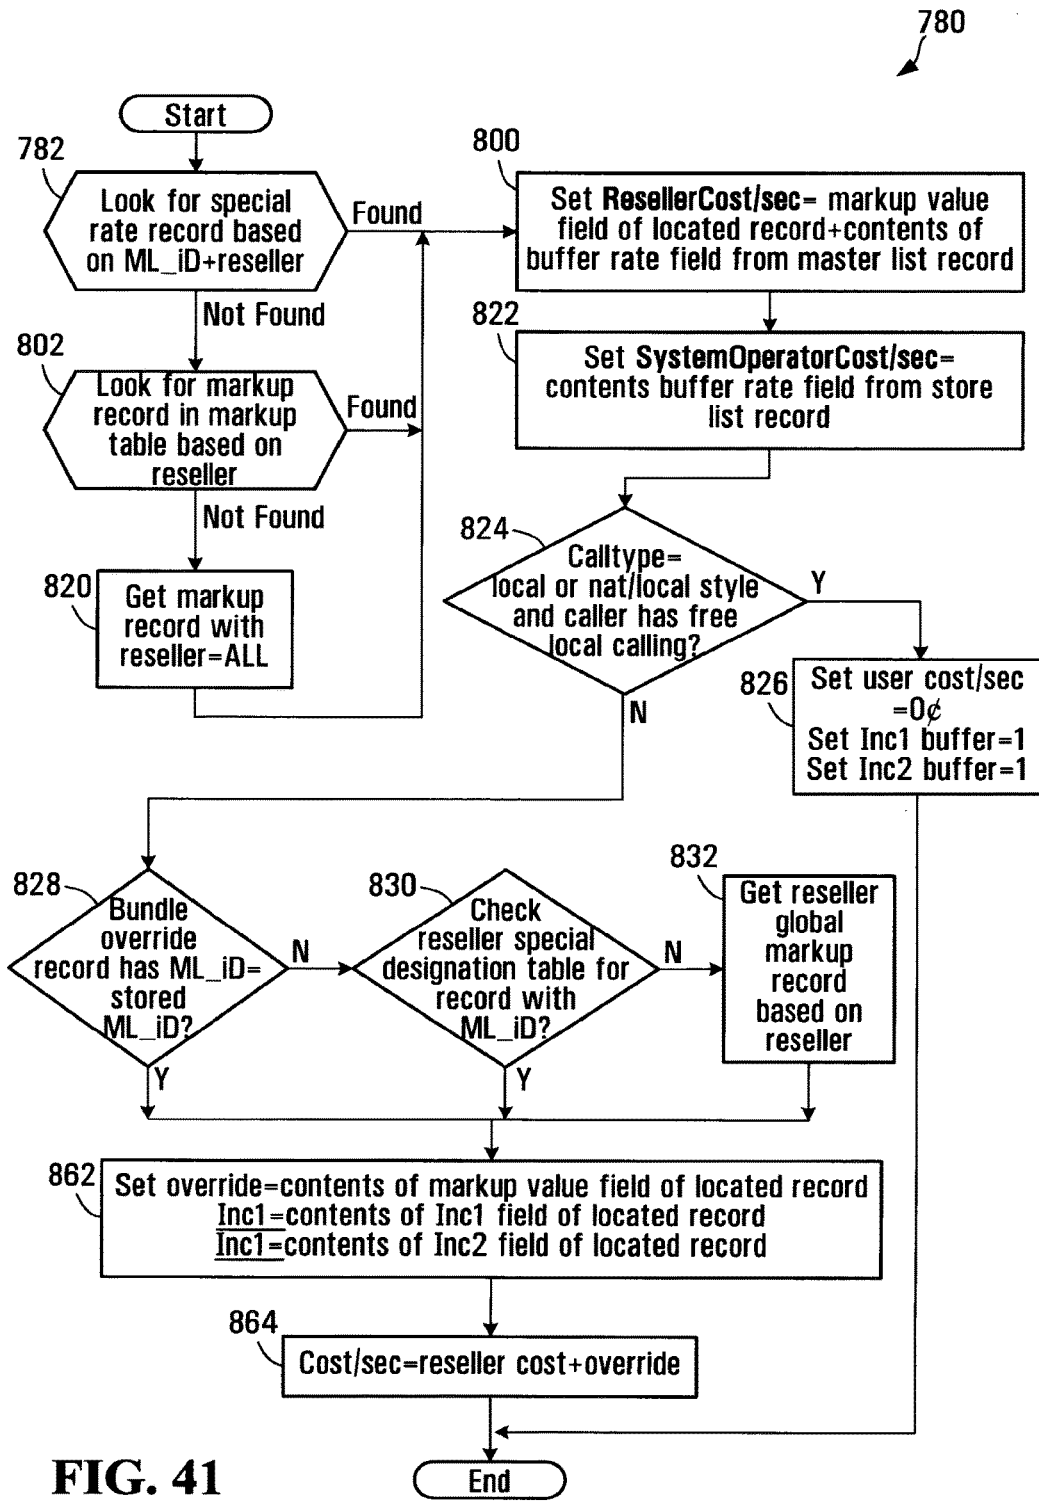


FIG. 41

784
↙

System Operator Special Rates Table Record

786	Reseller	retailer id
788	ML_Id	master list id
790	Markup Table	fixed; percent; cents
792	Markup Value	real number representing value of markup type
794	Inc1	first level of charging (minimum # of seconds) charge
796	Inc2	second level of charging

FIG. 42

798
↙

System Operator Special Rates Table Record for Klondike

786	Reseller	Klondike
788	ML_Id	1019
790	Markup Table	cents
792	Markup Value	\$0.001
794	Inc1	30
796	Inc2	6

FIG. 43

804
↙

System Operator Markup Table Record

806	~	Reseller	reseller id code
808	~	Markup Table	fixed; percent; cents
810	~	Markup Value	real number representing value of markup type
		812 ~ Inc1	first level of charging (minimum # of seconds) charge
		814 ~ Inc2	second level of charging

FIG. 44

System Operator Markup Table Record for the Reseller Klondike

806	~	Reseller	Klondike
808	~	Markup Table	cents
810	~	Markup Value	\$0.01
		812 ~ Inc1	30
		814 ~ Inc2	6

FIG. 45

System Operator Markup Table Record

806	~	Reseller	all
808	~	Markup Table	percent
810	~	Markup Value	1.0
		812 ~ Inc1	30
		814 ~ Inc2	6

FIG. 46

Reseller Special Destinations Table Record

834	Reseller	reseller id code
836	ML_id	Master List ID code
838	Markup Table	fixed; percent; cents
840	Markup Value	real number representing value of markup type
842	Inc1	first level of charging (minimum # of seconds) charge
844	Inc2	second level of charging

FIG. 47

Reseller Special Destinations Table Record for the Reseller Klondike

834	Reseller	Klondike
836	ML_id	1019
838	Markup Table	percent
840	Markup Value	5%
842	Inc1	30
844	Inc2	6

FIG. 48

Reseller Global Markup Table Record

850	Reseller	reseller id code
852	Markup Table	fixed; percent; cents
854	Markup Value	real number representing value of markup type
856	Inc1	first level of charging (minimum # of seconds) charge
858	Inc2	second level of charging

FIG. 49

Reseller Global Markup Table Record for the Reseller Klondike

850	Reseller	Klondike
852	Markup Table	percent
854	Markup Value	10%
856	Inc1	30
858	Inc2	6

FIG. 50

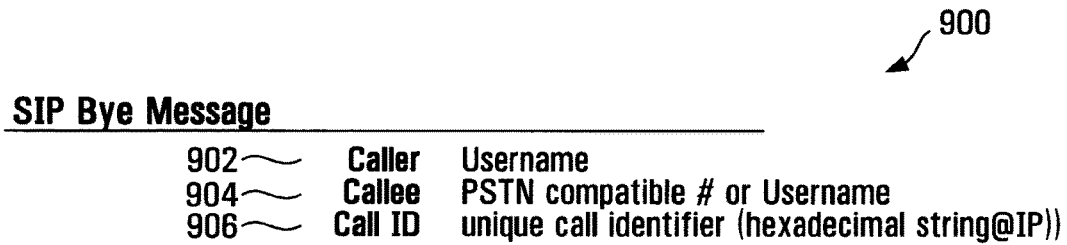


FIG. 51

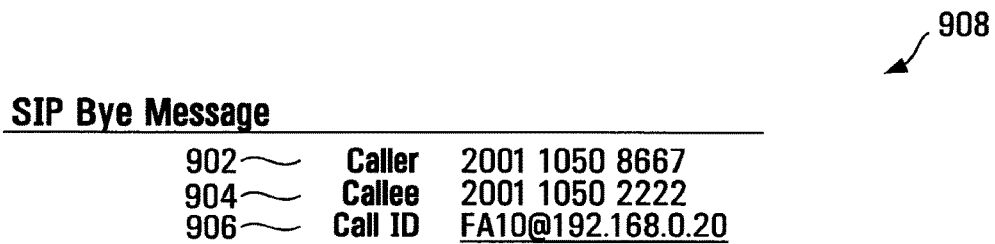


FIG. 52

910 ↘

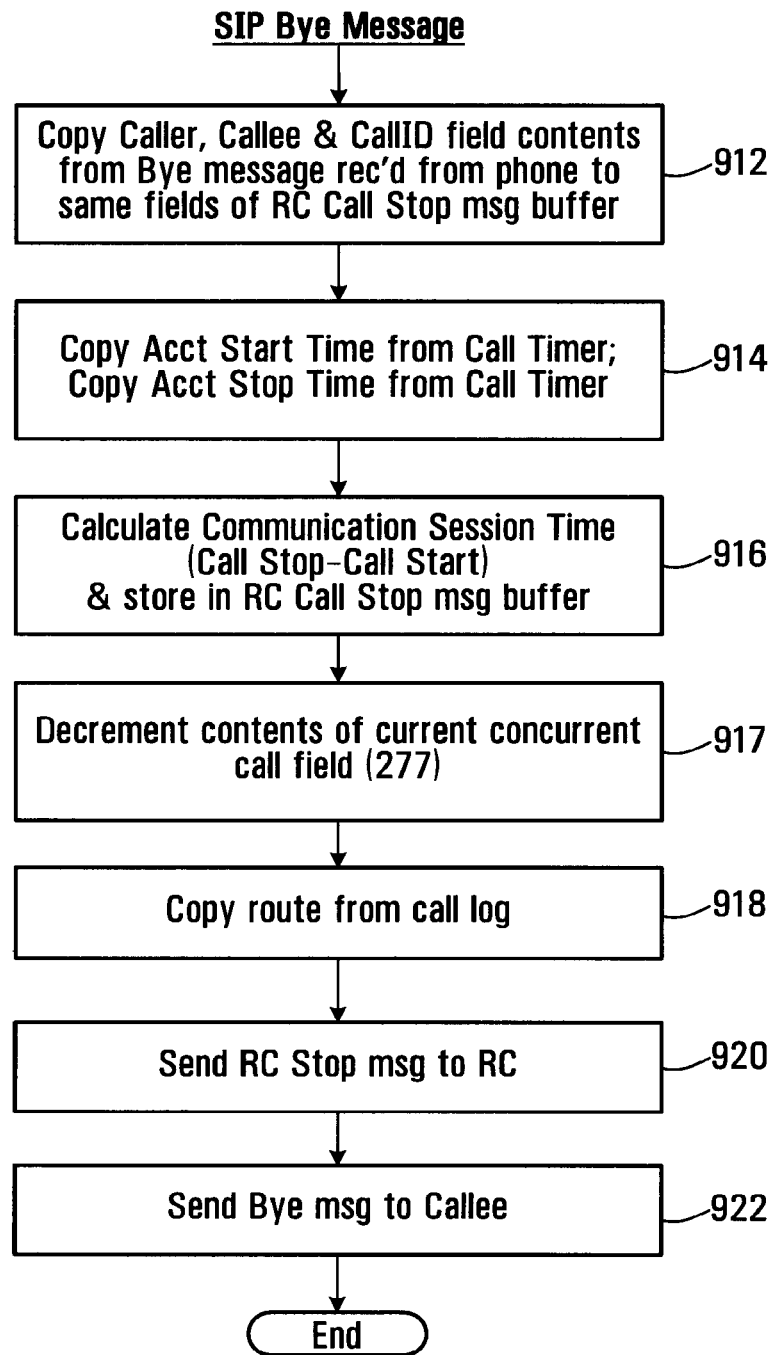


FIG. 53

1000

RC Call Stop Message

1002	Caller	Username
1004	Callee	PSTN compatible # or Username
1006	Call ID	unique call identifier (hexadecimal string@IP)
1008	Acct Start Time	start time of call
1010	Acct Stop Time	time the call ended
1012	Acct Session Time	start time-stop time (in seconds)
1014	Route	IP address for the communications link that was established

FIG. 54

1020

RC Call Stop Message for Calgary Callee

1002	Caller	2001 1050 8667
1004	Callee	2001 1050 2222
1006	Call ID	FA10@192.168.0.20
1008	Acct Start Time	2006-12-30 12:12:12
1010	Acct Stop Time	2006-12-30 12:12:14
1012	Acct Session Time	2
1014	Route	72.64.39.58

FIG. 55

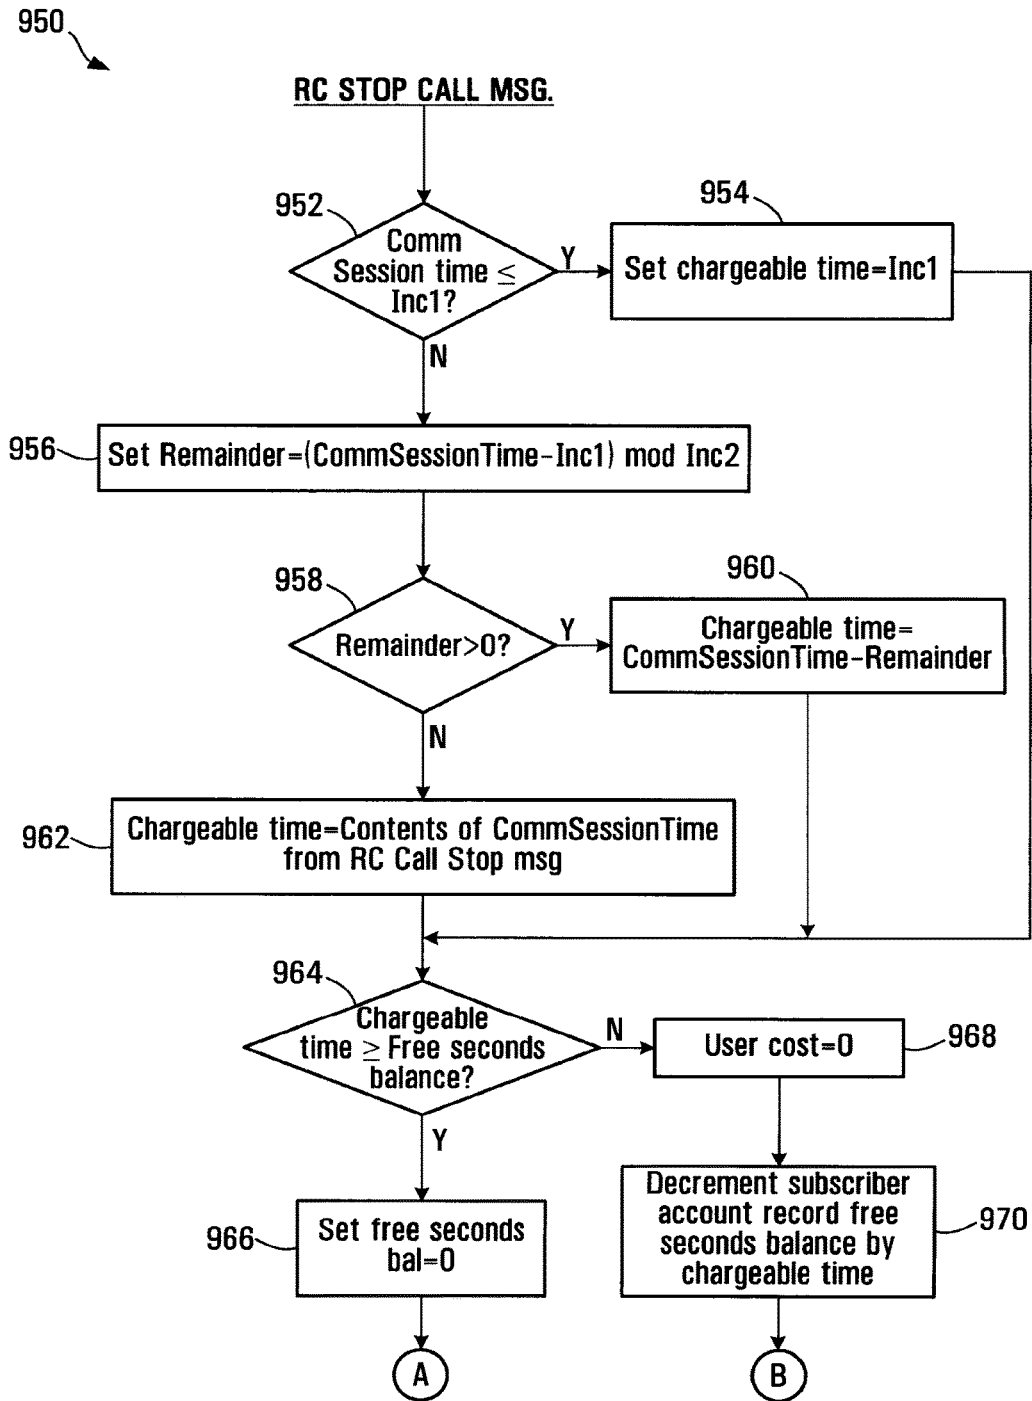


FIG. 56A

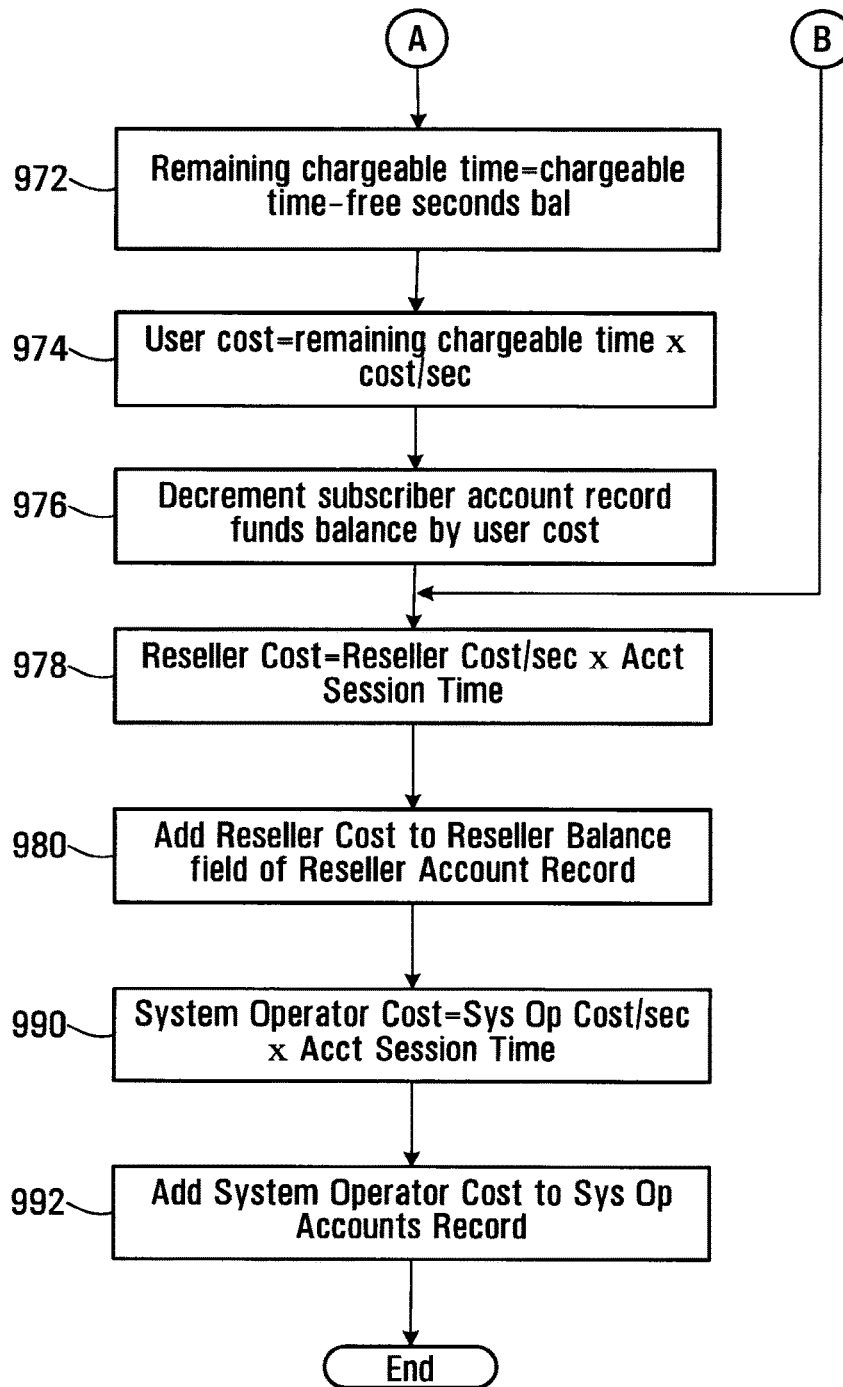


FIG. 56B

982

Reseller Accounts Table Record

984	Reseller ID	reseller id code
986	Reseller balance	accumulated balance of charges

FIG. 57

988

Reseller Accounts Table Record for Klondike

984	Reseller ID	Klondike
986	Reseller balance	\$100.02

FIG. 58

994

System Operator Accounts Table Record

996	System Operator balance	accumulated balance of charges
-----	-------------------------	--------------------------------

FIG. 59

System Operator Accounts Record for this System Operator

996	System Operator balance	\$1000.02
-----	-------------------------	-----------

FIG. 60

US 9,813,330 B2

1

**PRODUCING ROUTING MESSAGES FOR
VOICE OVER IP COMMUNICATIONS**

This application is a continuation of U.S. application Ser. No. 14/877,570, filed Oct. 7, 2015, now U.S. Pat. No. 9,537,762, which is a continuation of U.S. application Ser. No. 13/966,096, filed Aug. 13, 2013, now U.S. Pat. No. 9,179,005, which is a continuation of U.S. application Ser. No. 12/513,147, filed Mar. 1, 2010, now U.S. Pat. No. 8,542,815, which is a national phase entry of PCT/CA2007/001956, filed Nov. 1, 2007, which claims priority to U.S. Provisional Application No. 60/856,212, filed Nov. 2, 2006, all of which are incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION**1. Field of Invention**

This invention relates to voice over IP communications and methods and apparatus for routing and billing.

2. Description of Related Art

Internet protocol (IP) telephones are typically personal computer (PC) based telephones connected within an IP network, such as the public Internet or a private network of a large organization. These IP telephones have installed "voice-over-IP" (VoIP) software enabling them to make and receive voice calls and send and receive information in data and video formats.

IP telephony switches installed within the IP network enable voice calls to be made within or between IP networks, and between an IP network and a switched circuit network (SCN), such as the public switched telephone network (PSTN). If the IP switch supports the Signaling System 7 (SS7) protocol, the IP telephone can also access PSTN databases.

The PSTN network typically includes complex network nodes that contain all information about a local calling service area including user authentication and call routing. The PSTN network typically aggregates all information and traffic into a single location or node, processes it locally and then passes it on to other network nodes, as necessary, by maintaining route tables at the node. PSTN nodes are redundant by design and thus provide reliable service, but if a node should fail due to an earthquake or other natural disaster, significant, if not complete service outages can occur, with no other nodes being able to take up the load.

Existing VoIP systems do not allow for high availability and resiliency in delivering Voice Over IP based Session Initiation Protocol (SIP) Protocol service over a geographically dispersed area such as a city, region or continent. Most resiliency originates from the provision of IP based telephone services to one location or a small number of locations such as a single office or network of branch offices.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, there is provided a process for operating a call routing controller to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The process involves, in response to initiation of a call by a calling subscriber, receiving a caller identifier and a callee identifier. The process also involves using call classification criteria associated with the caller identifier to classify the call as a public network call or a private network call. The process further involves producing a routing message identifying an address, on the private network, associated with the callee when the call is

2

classified as a private network call. The process also involves producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The process may involve receiving a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

Using the call classification criteria may involve searching a database to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

Locating a record may involve locating a caller dialing profile comprising a username associated with the caller, a domain associated with the caller, and at least one calling attribute.

Using the call classification criteria may involve comparing calling attributes associated with the caller dialing profile with aspects of the callee identifier.

Comparing may involve determining whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier has a length within a range specified in the caller dialing profile.

The process may involve formatting the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier.

Formatting may involve removing an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

Formatting may involve removing a national dialing digit from the callee identifier and prepending a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

Formatting may involve prepending a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

Formatting may involve prepending a caller country code and an area code to the callee identifier when the callee identifier has a length that matches a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The process may involve classifying the call as a private network call when the re-formatted callee identifier identifies a subscriber to the private network.

The process may involve determining whether the callee identifier complies with a pre-defined username format and if so, classifying the call as a private network call.

The process may involve causing a database of records to be searched to locate a direct in dial (DID) bank table record associating a public telephone number with the re-formatted callee identifier and if the DID bank table record is found, classifying the call as a private network call and if a DID bank table record is not found, classifying the call as a public network call.

US 9,813,330 B2

3

Producing the routing message identifying a node on the private network may involve setting a callee identifier in response to a username associated with the DID bank table record.

Producing the routing message may involve determining whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier.

Determining whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier may involve determining whether a prefix of the re-formatted callee identifier matches a corresponding prefix of a username associated with the caller dialing profile.

When the node associated with the caller is not the same as the node associated with the callee, the process involves producing a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and communicating the routing message to a call controller.

When the node associated with the caller is the same as the node associated with the callee, the process involves determining whether to perform at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee.

Producing the routing message may involve producing a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The process may involve communicating the routing message to a call controller.

Producing a routing message identifying a gateway to the public network may involve searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve loading a routing message buffer with the reformatted callee identifier and an identification of specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The process may involve communicating a routing message involving the contents of the routing message buffer to a call controller.

The process may involve causing the dialing profile to include a maximum concurrent call value and a concurrent call count value and causing the concurrent call count value to be incremented when the user associated with the dialing profile initiates a call and causing the concurrent call count value to be decremented when a call with the user associated with the dialing profile is ended.

In accordance with another aspect of the invention, there is provided a call routing apparatus for facilitating communications between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The apparatus includes receiving provisions for receiving a caller identifier and a callee identifier, in

4

response to initiation of a call by a calling subscriber. The apparatus also includes classifying provisions for classifying the call as a private network call or a public network call according to call classification criteria associated with the caller identifier. The apparatus further includes provisions for producing a routing message identifying an address, on the private network, associated with the callee when the call is classified as a private network call. The apparatus also includes provisions for producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The receiving provisions may be operably configured to receive a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

The apparatus may further include searching provisions for searching a database including records associating calling attributes with subscribers to the private network to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

The records may include dialing profiles each including a username associated with the subscriber, an identification of a domain associated with the subscriber, and an identification of at least one calling attribute associated with the subscriber.

The call classification provisions may be operably configured to compare calling attributes associated with the caller dialing profile with aspects of the callee identifier.

The calling attributes may include an international dialing digit and call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

The calling attributes may include a national dialing digit and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

The calling attributes may include an area code and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

The calling attribute may include a number length range and the call classification provisions may be operably configured to determine whether the callee identifier has a length within a number length range specified in the caller dialing profile.

The apparatus may further include formatting provisions for formatting the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier.

The formatting provisions may be operably configured to remove an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

The formatting provisions may be operably configured to remove a national dialing digit from the callee identifier and prepend a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

The formatting provisions may be operably configured to prepend a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

The formatting provisions may be operably configured to prepend a caller country code and area code to the callee identifier when the callee identifier has a length that matches

US 9,813,330 B2

5

a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The classifying provisions may be operably configured to classify the call as a private network call when the re-formatted callee identifier identifies a subscriber to the private network.

The classifying provisions may be operably configured to classify the call as a private network call when the callee identifier complies with a pre-defined username format.

The apparatus may further include searching provisions for searching a database of records to locate a direct in dial (DID) bank table record associating a public telephone number with the re-formatted callee identifier and the classifying provisions may be operably configured to classify the call as a private network call when the DID bank table record is found and to classify the call as a public network call when a DID bank table record is not found

The private network routing message producing provisions may be operably configured to produce a routing message having a callee identifier set according to a username associated with the DID bank table record.

The private network routing message producing provisions may be operably configured to determine whether a node associated with the re-formatted callee identifier is the same as a node associated with the caller identifier.

The private network routing provisions may include provisions for determining whether a prefix of the re-formatted callee identifier matches a corresponding prefix of a username associated with the caller dialing profile.

The private network routing message producing provisions may be operably configured to produce a routing message including the caller identifier, the re-formatted callee identifier and an identification of a private network node associated with the callee and to communicate the routing message to a call controller.

The private network routing message producing provisions may be operably configured to perform at least one of the following forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee, when the node associated with the caller is the same as the node associated with the callee.

The provisions for producing the private network routing message may be operably configured to produce a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The apparatus further includes provisions for communicating the routing message to a call controller.

The provisions for producing a public network routing message identifying a gateway to the public network may include provisions for searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the re-formatted callee identifier.

The apparatus further includes provisions for searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the re-formatted callee identifier.

The apparatus further includes a routing message buffer and provisions for loading the routing message buffer with the re-formatted callee identifier and an identification of

6

specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The apparatus further includes provisions for communicating a routing message including the contents of the routing message buffer to a call controller.

The apparatus further includes means for causing said dialing profile to include a maximum concurrent call value and a concurrent call count value and for causing said concurrent call count value to be incremented when the user associated with said dialing profile initiates a call and for causing said concurrent call count value to be decremented when a call with said user associated with said dialing profile is ended.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes dialing profile records comprising fields for associating with respective subscribers to the system, a subscriber user name, direct-in-dial records comprising fields for associating with respective subscriber usernames, a user domain and a direct-in-dial number, prefix to node records comprising fields for associating with at least a portion of the respective subscriber usernames, a node address of a node in the system, whereby a subscriber name can be used to find a user domain, at least a portion of the a subscriber name can be used to find a node with which the subscriber identified by the subscriber name is associated, and a user domain and subscriber name can be located in response to a direct-in-dial number.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes master list records comprising fields for associating a dialing code with respective master list identifiers and supplier list records linked to master list records by the master list identifiers, said supplier list records comprising fields for associating with a communications services supplier, a supplier id, a master list id, a route identifier and a billing rate code, whereby communications services suppliers are associated with dialing codes, such that dialing codes can be used to locate suppliers capable of providing a communications link associated with a given dialing code.

In accordance with another aspect of the invention, there is provided a method for determining a time to permit a communication session to be conducted. The method involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Calculating the first time value may involve retrieving a record associated with the participant and obtaining from the record at least one of the free time and the funds balance.

Producing the second time value may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

US 9,813,330 B2

7

Producing the second time value may involve setting a difference between the first time value and the remainder as the second time value.

The method may further involve setting the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

Calculating the cost per unit time may involve locating a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and setting a reseller rate equal to the sum of the markup value and the buffer rate.

Locating the record in a database may involve locating at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller and a default reseller markup record.

Calculating the cost per unit time value further may involve locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator markup record specifying a default cost per unit time.

The method may further involve setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a reseller balance by the product of the reseller rate and the communication session time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided an apparatus for determining a time to permit a communication session to be conducted. The apparatus includes a processor circuit, a computer readable medium coupled to the processor circuit and encoded with instructions for directing the processor circuit to calculate a cost per unit time for the communication session, calculate a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and produce a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

The instructions may include instructions for directing the processor circuit to retrieve a record associated with the participant and obtain from the record at least one of the free time and the funds balance.

The instructions may include instructions for directing the processor circuit to produce the second time value by producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

The instructions may include instructions for directing the processor circuit to produce the second time value comprises setting a difference between the first time value and the

8

remainder as the second time value. The instructions may include instructions for directing the processor circuit to set the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

The instructions for directing the processor circuit to calculate the cost per unit time may include instructions for directing the processor circuit to locate a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and set a reseller rate equal to the sum of the markup value and the buffer rate.

The instructions for directing the processor circuit to locate the record in a database may include instructions for directing the processor circuit to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller markup record. The instructions for directing the processor circuit to calculate the cost per unit time value may further include instructions for directing the processor circuit to locate at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator markup record specifying a default cost per unit time.

The instructions may include instructions for directing the processor circuit to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a reseller balance by the product of the reseller rate and the communication session time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided a process for attributing charges for communications services. The process involves determining a first chargeable time in response to a communication session time and a pre-defined billing pattern, determining a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, changing an account balance associated with the user in response to a user cost per unit time. The process may further involve changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

Determining the first chargeable time may involve locating at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and setting as the

US 9,813,330 B2

9

pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may involve a first billing interval and a second billing interval.

Determining the first chargeable time may involve setting the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

Determining the first chargeable time may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and setting the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and setting the first chargeable time to the communication session time when the remainder is not greater than zero.

The process may further involve determining a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Determining the second chargeable time may involve setting the second chargeable time to a difference between the first chargeable time.

The process may further involve resetting the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Changing an account balance associated with the user may involve calculating a user cost value in response to the second chargeable time and the user cost per unit time.

The process may further involve changing a user free cost balance in response to the user cost value.

The process may further involve setting the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The process may further involve changing a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided an apparatus for attributing charges for communications services. The apparatus includes a processor circuit, a computer readable medium in communication with the processor circuit and encoded with instructions for directing the processor circuit to determine a first chargeable time in response to a communication session time and a pre-defined billing pattern, determine a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, change an account balance associated with the user in response to a user cost per unit time.

The instructions may further include instructions for changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

The instructions for directing the processor circuit to determine the first chargeable time may further include instructions for causing the processor circuit to communicate with a database to locate at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller

10

of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and instructions for setting as the pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may include a first billing interval and a second billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for directing the processor circuit to set the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and instructions for causing the processor circuit to set the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and instructions for causing the processor circuit to set the first chargeable time to the communication session time when the remainder is not greater than zero.

The instructions may further include instructions for causing the processor circuit to determine a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to determine the second chargeable time may include instructions for causing the processor circuit to set the second chargeable time to a difference between the first chargeable time.

The instructions may further include instructions for causing the processor circuit to reset the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to change an account balance associated with the user may include instructions for causing the processor circuit to calculate a user cost value in response to the second chargeable time and the user cost per unit time.

The instructions may further include instructions for causing the processor circuit to change a user free cost balance in response to the user cost value.

The instructions may further include instructions for causing the processor circuit to set the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The instructions may further include instructions for causing the processor circuit to change a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided a computer readable medium encoded with codes for directing a processor circuit to execute one or more of the methods described above and/or variants thereof.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon

US 9,813,330 B2

11

review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention,

FIG. 1 is a block diagram of a system according to a first embodiment of the invention;

FIG. 2 is a block diagram of a caller telephone according to the first embodiment of the invention;

FIG. 3 is a schematic representation of a SIP invite message transmitted between the caller telephone and a controller shown in FIG. 1;

FIG. 4 is a block diagram of a call controller shown in FIG. 1;

FIG. 5 is a flowchart of a process executed by the call controller shown in FIG. 1;

FIG. 6 is a schematic representation of a routing, billing and rating (RC) request message produced by the call controller shown in FIG. 1;

FIG. 7 is a block diagram of a processor circuit of a routing, billing, rating element of the system shown in FIG. 1;

FIGS. 8A-8D is a flowchart of a RC request message handler executed by the RC processor circuit shown in FIG. 7;

FIG. 9 is a tabular representation of a dialing profile stored in a database accessible by the RC shown in FIG. 1;

FIG. 10 is a tabular representation of a dialing profile for a caller using the caller telephone shown in FIG. 1;

FIG. 11 is a tabular representation of a callee profile for a callee located in Calgary;

FIG. 12 is a tabular representation of a callee profile for a callee located in London;

FIG. 13 is a tabular representation of a Direct-in-Dial (DID) bank table record stored in the database shown in FIG. 1;

FIG. 14 is a tabular representation of an exemplary DID bank table record for the Calgary callee referenced in FIG. 11;

FIG. 15 is a tabular representation of a routing message transmitted from the RC to the call controller shown in FIG. 1;

FIG. 16 is a schematic representation of a routing message buffer holding a routing message for routing a call to the Calgary callee referenced in FIG. 11;

FIG. 17 is a tabular representation of a prefix to supernode table record stored in the database shown in FIG. 1;

FIG. 18 is a tabular representation of a prefix to supernode table record that would be used for the Calgary callee referenced in FIG. 11;

FIG. 19 is a tabular representation of a master list record stored in a master list table in the database shown in FIG. 1;

FIG. 20 is a tabular representation of a populated master list record;

FIG. 21 is a tabular representation of a suppliers list record stored in the database shown in FIG. 1;

FIG. 22 is a tabular representation of a specific supplier list record for a first supplier;

FIG. 23 is a tabular representation of a specific supplier list record for a second supplier;

FIG. 24 is a tabular representation of a specific supplier list record for a third supplier;

12

FIG. 25 is a schematic representation of a routing message, held in a routing message buffer, identifying to the controller a plurality of possible suppliers that may carry the call;

FIG. 26 is a tabular representation of a call block table record;

FIG. 27 is a tabular representation of a call block table record for the Calgary callee;

FIG. 28 is a tabular representation of a call forwarding table record;

FIG. 29 is a tabular representation of a call forwarding table record specific for the Calgary callee;

FIG. 30 is a tabular representation of a voicemail table record specifying voicemail parameters to enable the caller to leave a voicemail message for the callee;

FIG. 31 is a tabular representation of a voicemail table record specific to the Calgary callee;

FIG. 32 is a schematic representation of an exemplary routing message, held in a routing message buffer, indicating call forwarding numbers and a voicemail server identifier;

FIGS. 33A and 33B are respective portions of a flowchart of a process executed by the RC processor for determining a time to live value;

FIG. 34 is a tabular representation of a subscriber bundle table record;

FIG. 35 is a tabular representation of a subscriber bundle record for the Vancouver caller;

FIG. 36 is a tabular representation of a bundle override table record;

FIG. 37 is a tabular representation of bundle override record for a located master list ID;

FIG. 38 is a tabular representation of a subscriber account table record;

FIG. 39 is a tabular representation of a subscriber account record for the Vancouver caller;

FIG. 40 is a flowchart of a process for producing a second time value executed by the RC processor circuit shown in FIG. 7;

FIG. 41 is a flowchart for calculating a call cost per unit time;

FIG. 42 is a tabular representation of a system operator special rates table record;

FIG. 43 is a tabular representation of a system operator special rates table record for a reseller named Klondike;

FIG. 44 is a tabular representation of a system operator mark-up table record;

FIG. 45 is a tabular representation of a system operator mark-up table record for the reseller Klondike;

FIG. 46 is a tabular representation of a default system operator mark-up table record;

FIG. 47 is a tabular representation of a reseller special destinations table record;

FIG. 48 is a tabular representation of a reseller special destinations table record for the reseller Klondike;

FIG. 49 is a tabular representation of a reseller global mark-up table record;

FIG. 50 is a tabular representation of a reseller global mark-up table record for the reseller Klondike;

FIG. 51 is a tabular representation of a SIP bye message transmitted from either of the telephones shown in FIG. 1 to the call controller;

FIG. 52 is a tabular representation of a SIP bye message sent to the controller from the Calgary callee;

FIG. 53 is a flowchart of a process executed by the call controller for producing a RC stop message in response to receipt of a SIP bye message;

US 9,813,330 B2

13

FIG. 54 is a tabular representation of an exemplary RC call stop message;

FIG. 55 is a tabular representation of an RC call stop message for the Calgary callee;

FIGS. 56A and 56B are respective portions of a flowchart of a RC call stop message handling routine executed by the RC shown in FIG. 1;

FIG. 57 is a tabular representation of a reseller accounts table record;

FIG. 58 is a tabular representation of a reseller accounts table record for the reseller Klondike;

FIG. 59 is a tabular representation of a system operator accounts table record; and

FIG. 60 is a tabular representation of a system operator accounts record for the system operator described herein.

DETAILED DESCRIPTION

Referring to FIG. 1, a system for making voice over IP telephone/videophone calls is shown generally at 10. The system includes a first super node shown generally at 11 and a second super node shown generally at 21. The first super node 11 is located in geographical area, such as Vancouver, B.C., Canada for example and the second super node 21 is located in London, England, for example. Different super nodes may be located in different geographical regions throughout the world to provide telephone/videophone service to subscribers in respective regions. These super nodes may be in communication with each other by high speed/high data throughput links including optical fiber, satellite and/or cable links, forming a backbone to the system. These super nodes may alternatively or, in addition, be in communication with each other through conventional internet services.

In the embodiment shown, the Vancouver supernode 11 provides telephone/videophone service to western Canadian customers from Vancouver Island to Ontario. Another node (not shown) may be located in Eastern Canada to provide services to subscribers in that area.

Other nodes of the type shown may also be employed within the geographical area serviced by a supernode, to provide for call load sharing, for example within a region of the geographical area serviced by the supernode. However, in general, all nodes are similar and have the properties described below in connection with the Vancouver supernode 11.

In this embodiment, the Vancouver supernode includes a call controller (C) 14, a routing controller (RC) 16, a database 18 and a voicemail server 19 and a media relay 9. Each of these may be implemented as separate modules on a common computer system or by separate computers, for example. The voicemail server 19 need not be included in the node and can be provided by an outside service provider.

Subscribers such as a subscriber in Vancouver and a subscriber in Calgary communicate with the Vancouver supernode using their own internet service providers which route internet traffic from these subscribers over the internet shown generally at 13 in FIG. 1. To these subscribers the Vancouver supernode is accessible at a pre-determined internet protocol (IP) address or a fully qualified domain name that can be accessed in the usual way through a subscriber's internet service provider. The subscriber in Vancouver uses a telephone 12 that is capable of communicating with the Vancouver supernode 11 using Session Initiation Protocol (SIP) messages and the Calgary subscriber uses a similar telephone 15, in Calgary AB.

14

It should be noted that throughout the description of the embodiments of this invention, the IP/UDP addresses of all elements such as the caller and callee telephones, call controller, media relay, and any others, will be assumed to be valid IP/UDP addresses directly accessible via the Internet or a private IP network, for example, depending on the specific implementation of the system. As such, it will be assumed, for example, that the caller and callee telephones will have IP/UDP addresses directly accessible by the call controllers and the media relays on their respective supernodes, and those addresses will not be obscured by Network Address Translation (NAT) or similar mechanisms. In other words, the IP/UDP information contained in SIP messages (for example the SIP Invite message or the RC Request message which will be described below) will match the IP/UDP addresses of the IP packets carrying these SIP messages.

It will be appreciated that in many situations, the IP addresses assigned to various elements of the system may be in a private IP address space, and thus not directly accessible from other elements. Furthermore, it will also be appreciated that NAT is commonly used to share a "public" IP address between multiple devices, for example between home PCs and IP telephones sharing a single Internet connection. For example, a home PC may be assigned an IP address such as 192.168.0.101 and a Voice over IP telephone may be assigned an IP address of 192.168.0.103. These addresses are located in so called "non-routable" (IP) address space and cannot be accessed directly from the Internet. In order for these devices to communicate with other computers located on the Internet, these IP addresses have to be converted into a "public" IP address, for example 24.10.10.123 assigned by the Internet Service Provider to the subscriber, by a device performing NAT, typically a home router. In addition to translating the IP addresses, NAT typically also translates UDP port numbers, for example an audio path originating at a VoIP telephone and using a UDP port 12378 at its private IP address, may have been translated to a UDP port 23465 associated with the public IP address of the NAT device. In other words, when a packet originating from the above VoIP telephone arrives at an Internet-based supernode, the source IP/UDP address contained in the IP packet header will be 24.10.10.1:23465, whereas the source IP/UDP address information contained in the SIP message inside this IP packet will be 192.168.0.103:12378. The mismatch in the IP/UDP addresses may cause a problem for SIP-based VoIP systems because, for example, a supernode will attempt to send messages to a private address of a telephone but the messages will never get there.

Referring to FIG. 1, in an attempt to make a call by the Vancouver telephone/videophone 12 to the Calgary telephone/videophone 15, the Vancouver telephone/videophone sends a SIP invite message to the Vancouver supernode 11 and in response, the call controller 14 sends an RC request message to the RC 16 which makes various enquiries of the database 18 to produce a routing message which is sent back to the call controller 14. The call controller 14 then communicates with the media relay 9 to cause a communications link including an audio path and a videophone (if a video-path call) to be established through the media relay to the same node, a different node or to a communications supplier gateway as shown generally at 20 to carry audio, and where applicable, video traffic to the call recipient or callee.

Generally, the RC 16 executes a process to facilitate communication between callers and callees. The process involves, in response to initiation of a call by a calling

US 9,813,330 B2

15

subscriber, receiving a callee identifier from the calling subscriber, using call classification criteria associated with the calling subscriber to classify the call as a public network call or a private network call and producing a routing message identifying an address on the private network, associated with the callee when the call is classified as a private network call and producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

Subscriber Telephone

In greater detail, referring to FIG. 2, in this embodiment, the telephone/videophone 12 includes a processor circuit shown generally at 30 comprising a microprocessor 32, program memory 34, an input/output (I/O) port 36, parameter memory 38 and temporary memory 40. The program memory 34, I/O port 36, parameter memory 38 and temporary memory 40 are all in communication with the microprocessor 32. The I/O port 36 has a dial input 42 for receiving a dialled telephone/videophone number from a keypad, for example, or from a voice recognition unit or from pre-stored telephone/videophone numbers stored in the parameter memory 38, for example. For simplicity, in FIG. 2 a box labelled dialing functions 44 represents any device capable of informing the microprocessor 32 of a callee identifier, e.g., a callee telephone/videophone number.

The processor 32 stores the callee identifier in a dialled number buffer 45. In this case, assume the dialled number is 2001 1050 2222 and that it is a number associated with the Calgary subscriber. The I/O port 36 also has a handset interface 46 for receiving and producing signals from and to a handset that the user may place to his ear. This interface 46 may include a BLUETOOTH™ wireless interface, a wired interface or speaker phone, for example. The handset acts as a termination point for an audio path (not shown) which will be appreciated later. The I/O port 36 also has an internet connection 48 which is preferably a high speed internet connection and is operable to connect the telephone/videophone to an internet service provider. The internet connection 48 also acts as a part of the voice path, as will be appreciated later. It will be appreciated that where the subscriber device is a videophone, a separate video path is established in the same way an audio path is established. For simplicity, the following description refers to a telephone call, but it is to be understood that a videophone call is handled similarly, with the call controller causing the media relay to facilitate both an audio path and a video path instead of only an audio path.

The parameter memory 38 has a username field 50, a password field 52 an IP address field 53 and a SIP proxy address field 54, for example. The user name field 50 is operable to hold a user name, which in this case is 2001 1050 8667. The user name is assigned upon subscription or registration into the system and, in this embodiment, includes a twelve digit number having a continent code 61, a country code 63, a dealer code 70 and a unique number code 74. The continent code 61 is comprised of the first or left-most digit of the user name in this embodiment. The country code 63 is comprised of the next three digits. The dealer code 70 is comprised of the next four digits and the unique number code 74 is comprised of the last four digits. The password field 52 holds a password of up to 512 characters, in this example. The IP address field 53 stores an IP address of the telephone, which for this explanation is 192.168.0.20. The SIP proxy address field 54 holds an IP protocol compatible proxy address which may be provided to the telephone through the internet connection 48 as part of a registration procedure.

16

The program memory 34 stores blocks of codes for directing the processor 32 to carry out the functions of the telephone, one of which includes a firewall block 56 which provides firewall functions to the telephone, to prevent access by unauthorized persons to the microprocessor 32 and memories 34, 38 and 40 through the internet connection 48. The program memory 34 also stores codes 57 for establishing a call ID. The call ID codes 57 direct the processor 32 to produce a call identifier having a format comprising a hexadecimal string at an IP address, the IP address being the IP address of the telephone. Thus, an exemplary call identifier might be FF10@192.168.0.20. Generally, in response to picking up the handset interface 46 and activating a dialing function 44, the microprocessor 32 produces and sends a SIP invite message as shown in FIG. 3, to the routing controller 16 shown in FIG. 1. This SIP invite message is essentially to initiate a call by a calling subscriber.

Referring to FIG. 3, the SIP invite message includes a caller ID field 60, a callee identifier field 62, a digest parameters field 64, a call ID field 65 an IP address field 67 and a caller UDP port field 69. In this embodiment, the caller ID field 60 includes the user name 2001 1050 8667 that is the Vancouver user name stored in the user name field 50 of the parameter memory 38 in the telephone 12 shown in FIG. 2. In addition, referring back to FIG. 3, the callee identifier field 62 includes a callee identifier which in this embodiment is the user name 2001 1050 2222 that is the dialled number of the Calgary subscriber stored in the dialled number buffer 45 shown in FIG. 2. The digest parameters field 64 includes digest parameters and the call ID field 65 includes a code comprising a generated prefix code (FF10) and a suffix which is the Internet Protocol (IP) address of the telephone 12 stored in the IP address field 53 of the telephone. The IP address field 67 holds the IP address assigned to the telephone, in this embodiment 192.168.0.20, and the caller UDP port field 69 includes a UDP port identifier identifying a UDP port at which the audio path will be terminated at the caller's telephone.

Call Controller

Referring to FIG. 4, a call controller circuit of the call controller 14 (FIG. 1) is shown in greater detail at 100. The call controller circuit 100 includes a microprocessor 102, program memory 104 and an I/O port 106. The circuit 100 may include a plurality of microprocessors, a plurality of program memories and a plurality of I/O ports to be able to handle a large volume of calls. However, for simplicity, the call controller circuit 100 will be described as having only one microprocessor 102, program memory 104 and I/O port 106, it being understood that there may be more.

Generally, the I/O port 106 includes an input 108 for receiving messages such as the SIP invite message shown in FIG. 3, from the telephone shown in FIG. 2. The I/O port 106 also has an RC request message output 110 for transmitting an RC request message to the RC 16 of FIG. 1, an RC message input 112 for receiving routing messages from the RC 16, a gateway output 114 for transmitting messages to one of the gateways 20 shown in FIG. 1 to advise the gateway to establish an audio path, for example, and a gateway input 116 for receiving messages from the gateway. The I/O port 106 further includes a SIP output 118 for transmitting messages to the telephone 12 to advise the telephone of the IP addresses of the gateways which will establish the audio path. The I/O port 106 further includes a voicemail server input and output 117, 119 respectively for communicating with the voicemail server 19 shown in FIG. 1.

US 9,813,330 B2

17

While certain inputs and outputs have been shown as separate, it will be appreciated that some may be a single IP address and IP port. For example, the messages sent to the RC 16 and received from the RC 16 may be transmitted and received on the same single IP port.

The program memory 104 includes blocks of code for directing the microprocessor 102 to carry out various functions of the call controller 14. For example, these blocks of code include a first block 120 for causing the call controller circuit 100 to execute a SIP invite to RC request process to produce an RC request message in response to a received SIP invite message. In addition, there is a routing message to gateway message block 122 which causes the call controller circuit 100 to produce a gateway query message in response to a received routing message from the RC 16.

Referring to FIG. 5, the SIP invite to RC request process is shown in more detail at 120. On receipt of a SIP invite message of the type shown in FIG. 3, block 122 of FIG. 5 directs the call controller circuit 100 of FIG. 4 to authenticate the user. This may be done, for example, by prompting the user for a password, by sending a message back to the telephone 12 which is interpreted at the telephone as a request for a password entry or the password may automatically be sent to the call controller 14 from the telephone, in response to the message. The call controller 14 may then make enquiries of databases to which it has access, to determine whether or not the user's password matches a password stored in the database. Various functions may be used to pass encryption keys or hash codes back and forth to ensure that the transmittal of passwords is secure.

Should the authentication process fail, the call controller circuit 100 is directed to an error handling routine 124 which causes messages to be displayed at the telephone 12 to indicate there was an authentication problem. If the authentication procedure is passed, block 121 directs the call controller circuit 100 to determine whether or not the contents of the caller ID field 60 of the SIP invite message received from the telephone is an IP address. If it is an IP address, then block 123 directs the call controller circuit 100 to set the contents of a type field variable maintained by the microprocessor 102 to a code representing that the call type is a third party invite. If at block 121 the caller ID field contents do not identify an IP address, then block 125 directs the microprocessor to set the contents of the type field to a code indicating that the call is being made by a system subscriber. Then, block 126 directs the call controller circuit to read the call identifier 65 provided in the SIP invite message from the telephone 12, and at block 128 the processor is directed to produce an RC request message that includes that call ID. Block 129 then directs the call controller circuit 100 to send the RC request to the RC 16.

Referring to FIG. 6, an RC request message is shown generally at 150 and includes a caller field 152, a callee field 154, a digest field 156, a call ID field 158 and a type field 160. The caller, callee, digest call ID fields 152, 154, 156 and 158 contain copies of the caller, callee, digest parameters and call ID fields 60, 62, 64 and 65 of the SIP invite message shown in FIG. 3. The type field 160 contains the type code established at blocks 123 or 125 of FIG. 5 to indicate whether the call is from a third party or system subscriber, respectively. The caller identifier field may include a PSTN number or a system subscriber username as shown, for example.

Routing Controller (RC)

Referring to FIG. 7, the RC 16 is shown in greater detail and includes an RC processor circuit shown generally at 200. The RC processor circuit 200 includes a processor 202,

18

program memory 204, a table memory 206, buffer memory 207, and an I/O port 208, all in communication with the processor 202. (As earlier indicated, there may be a plurality of processor circuits (202), memories (204), etc.)

5 The buffer memory 207 includes a caller id buffer 209 and a callee id buffer 211.

The I/O port 208 includes a database request port 210 through which a request to the database (18 shown in FIG. 1) can be made and includes a database response port 212 for receiving a reply from the database 18. The I/O port 208 further includes an RC request message input 214 for receiving the RC request message from the call controller (14 shown in FIG. 1) and includes a routing message output 216 for sending a routing message back to the call controller 14. The I/O port 208 thus acts to receive caller identifier and a callee identifier contained in the RC request message from the call controller, the RC request message being received in response to initiation of a call by a calling subscriber.

The program memory 204 includes blocks of codes for directing the processor 202 to carry out various functions of the RC (16). One of these blocks includes an RC request message handler 250 which directs the RC to produce a routing message in response to a received RC request message. The RC request message handler process is shown in greater detail at 250 in FIGS. 8A through 8D.

RC Request Message Handler

Referring to FIG. 8A, the RC request message handler begins with a first block 252 that directs the RC processor circuit (200) to store the contents of the RC request message (150) in buffers in the buffer memory 207 of FIG. 7, one of which includes the caller ID buffer 209 of FIG. 7 for separately storing the contents of the callee field 154 of the RC request message. Block 254 then directs the RC processor circuit to use the contents of the caller field 152 in the RC request message shown in FIG. 6, to locate and retrieve from the database 18 a record associating calling attributes with the calling subscriber. The located record may be referred to as a dialing profile for the caller. The retrieved dialing profile may then be stored in the buffer memory 207, for example.

Referring to FIG. 9, an exemplary data structure for a dialing profile is shown generally at 253 and includes a user name field 258, a domain field 260, and calling attributes comprising a national dialing digits (NDD) field 262, an international dialing digits (IDD) field 264, a country code field 266, a local area codes field 267, a caller minimum local length field 268, a caller maximum local length field 270, a reseller field 273, a maximum number of concurrent calls field 275 and a current number of concurrent calls field 277. Effectively the dialing profile is a record identifying calling attributes of the caller identified by the caller identifier. More generally, dialing profiles represent calling attributes of respective subscribers.

An exemplary caller profile for the Vancouver subscriber is shown generally at 276 in FIG. 10 and indicates that the user name field 258 includes the user name (2001 1050 8667) that has been assigned to the subscriber and is stored in the user name field 50 in the telephone as shown in FIG. 2.

Referring back to FIG. 10, the domain field 260 includes a domain name as shown at 282, including a node type identifier 284, a location code identifier 286, a system provider identifier 288 and a domain portion 290. The domain field 260 effectively identifies a domain or node associated with the user identified by the contents of the user name field 258.

In this embodiment, the node type identifier 284 includes the code "sp" identifying a supernode and the location

US 9,813,330 B2

19

identifier **286** identifies the supernode as being in Vancouver (YVR). The system provider identifier **288** identifies the company supplying the service and the domain portion **290** identifies the “com” domain.

The national dialled digit field **262** in this embodiment includes the digit “1” and, in general, includes a number specified by the International Telecommunications Union (ITU) Telecommunications Standardization Sector (ITU-T) E. 164 Recommendation which assigns national dialing digits to countries.

The international dialing digit field **264** includes a code also assigned according to the ITU-T according to the country or location of the user.

The country code field **266** also includes the digit “1” and, in general, includes a number assigned according to the ITU-T to represent the country in which the user is located.

The local area codes field **267** includes a list of area codes that have been assigned by the ITU-T to the geographical area in which the subscriber is located. The caller minimum and maximum local number length fields **268** and **270** hold numbers representing minimum and maximum local number lengths permitted in the area code(s) specified by the contents of the local area codes field **267**. The reseller field **273** is optional and holds a code identifying a retailer of the services, in this embodiment “Klondike”. The maximum number of concurrent calls field **275** holds a code identifying the maximum number of concurrent calls that the user is entitled to cause to concurrently exist. This permits more than one call to occur concurrently while all calls for the user are billed to the same account. The current number of concurrent calls field **277** is initially 0 and is incremented each time a concurrent call associated with the user is initiated and is decremented when a concurrent call is terminated. The area codes associated with the user are the area codes associated with the location code identifier **286** of the contents of the domain field **260**.

A dialing profile of the type shown in FIG. 9 is produced whenever a user registers with the system or agrees to become a subscriber to the system. Thus, for example, a user wishing to subscribe to the system may contact an office maintained by a system operator and personnel in the office may ask the user certain questions about his location and service preferences, whereupon tables can be used to provide office personnel with appropriate information to be entered into the user name **258**, domain **260**, NDD **262**, IDD **264**, country code **266**, local area codes **267**, caller minimum and maximum local length fields **268** and **270** reseller field **273** and concurrent call fields **275** and **277** to establish a dialing profile for the user.

Referring to FIGS. 11 and 12, callee dialing profiles for users in Calgary and London, respectively for example, are shown.

In addition to creating dialing profiles when a user registers with the system, a direct-in-dial (DID) record of the type shown at **278** in FIG. 13 is added to a direct-in-dial bank table in the database (**18** in FIG. 1) to associate the username and a host name of the supernode with which the user is associated, with an E.164 number associated with the user on the PSTN network.

An exemplary DID table record entry for the Calgary callee is shown generally at **300** in FIG. 14. The user name field **281** and user domain field **272** are analogous to the user name and user domain fields **258** and **260** of the caller dialing profile shown in FIG. 10. The contents of the DID field **274** include a E.164 public telephone number including a country code **283**, an area code **285**, an exchange code **287** and a number **289**. If the user has multiple telephone

20

numbers, then multiple records of the type shown at **300** would be included in the DID bank table, each having the same user name and user domain, but different DID field **274** contents reflecting the different telephone numbers associated with that user.

In addition to creating dialing profiles as shown in FIG. 9 and DID records as shown in FIG. 13 when a user registers with the system, call blocking records of the type shown in FIG. 26, call forwarding records of the type shown in FIG. 28 and voicemail records of the type shown in FIG. 30 may be added to the database **18** when a new subscriber is added to the system.

Referring back to FIG. 8A, after retrieving a dialing profile for the caller, such as shown at **276** in FIG. 10, the RC processor circuit **200** is directed to block **256** which directs the processor circuit (**200**) to determine whether the contents of the concurrent call field **277** are less than the contents of the maximum concurrent call field **275** of the dialing profile for the caller and, if so, block **271** directs the processor circuit to increment the contents of the concurrent call field **277**. If the contents of concurrent call field **277** are equal to or greater than the contents of the maximum concurrent call field **275**, block **259** directs the processor circuit **200** to send an error message back to the call controller (**14**) to cause the call controller to notify the caller that the maximum number of concurrent calls has been reached and no further calls can exist concurrently, including the presently requested call.

Assuming block **256** allows the call to proceed, the RC processor circuit **200** is directed to perform certain checks on the callee identifier provided by the contents of the callee field **154** in FIG. 6, of the RC request message **150**. These checks are shown in greater detail in FIG. 8B.

Referring to FIG. 8B, the processor (**202** in FIG. 7) is directed to a first block **257** that causes it to determine whether a digit pattern of the callee identifier (**154**) provided in the RC request message (**150**) includes a pattern that matches the contents of the international dialing digits (IDD) field **264** in the caller profile shown in FIG. 10. If so, then block **259** directs the processor (**202**) to set a call type code identifier variable maintained by the processor to indicate that the call is an international call and block **261** directs the processor to produce a reformatted callee identifier by reformatting the callee identifier into a predefined digit format. In this embodiment, this is done by removing the pattern of digits matching the IDD field contents **264** of the caller dialing profile to effectively shorten the callee identifier. Then, block **263** directs the processor **202** to determine whether or not the callee identifier has a length which meets criteria establishing it as a number compliant with the E.164 Standard set by the ITU. If the length does not meet this criteria, block **265** directs the processor **202** to send back to the call controller (**14**) a message indicating the length is not correct. The process is then ended. At the call controller **14**, routines (not shown) stored in the program memory **104** may direct the processor (**102** of FIG. 4) to respond to the incorrect length message by transmitting a message back to the telephone (**12** shown in FIG. 1) to indicate that an invalid number has been dialed.

Still referring to FIG. 8B, if the length of the amended callee identifier meets the criteria set forth at block **263**, block **269** directs the processor (**202** of FIG. 7) to make a database request to determine whether or not the amended callee identifier is found in a record in the direct-in-dial bank (DID) table. Referring back to FIG. 8B, at block **269**, if the processor **202** receives a response from the database indicating that the reformatted callee identifier produced at

US 9,813,330 B2

21

block **261** is found in a record in the DID bank table, then the callee is a subscriber to the system and the call is classified as a private network call by directing the processor to block **279** which directs the processor to copy the contents of the corresponding user name field (**281** in FIG. **14**) from the callee DID bank table record (**300** in FIG. **14**) into the callee ID buffer (**211** in FIG. **7**). Thus, the processor **202** locates a subscriber user name associated with the reformatted callee identifier. The processor **202** is then directed to point B in FIG. **8A**.

Subscriber to Subscriber Calls Between Different Nodes

Referring to FIG. **8A**, block **280** directs the processor (**202** of FIG. **7**) to execute a process to determine whether or not the node associated with the reformatted callee identifier is the same node that is associated with the caller identifier. To do this, the processor **202** determines whether or not a prefix (e.g., continent code **61**) of the callee name held in the callee ID buffer (**211** in FIG. **7**), is the same as the corresponding prefix of the caller name held in the username field **258** of the caller dialing profile shown in FIG. **10**. If the corresponding prefixes are not the same, block **302** in FIG. **8A** directs the processor (**202** in FIG. **7**) to set a call type flag in the buffer memory (**207** in FIG. **7**) to indicate the call is a cross-domain call. Then, block **350** of FIG. **8A** directs the processor (**202** of FIG. **7**) to produce a routing message identifying an address on the private network with which the callee identified by the contents of the callee ID buffer is associated and to set a time to live for the call at a maximum value of 99999, for example.

Thus the routing message includes a caller identifier, a call identifier set according to a username associated with the located DID bank table record and includes an identifier of a node on the private network with which the callee is associated.

The node in the system with which the callee is associated is determined by using the callee identifier to address a supernode table having records of the type as shown at **370** in FIG. **17**. Each record **370** has a prefix field **372** and a supernode address field **374**. The prefix field **372** includes the first *n* digits of the callee identifier. In this embodiment *n*=2. The supernode address field **374** holds a code representing the IP address or a fully qualified domain name of the node associated with the code stored in the callee identifier prefix field **372**. Referring to FIG. **18**, for example, if the prefix is 20, the supernode address associated with that prefix is sp.yvr.digifonica.com.

Referring to FIG. **15**, a generic routing message is shown generally at **352** and includes an optional supplier prefix field **354**, and optional delimiter field **356**, a callee user name field **358**, at least one route field **360**, a time to live field **362** and other fields **364**. The optional supplier prefix field **354** holds a code for identifying supplier traffic. The optional delimiter field **356** holds a symbol that delimits the supplier prefix code from the callee user name field **358**. In this embodiment, the symbol is a number sign (#). The route field **360** holds a domain name or IP address of a gateway or node that is to carry the call, and the time to live field **362** holds a value representing the number of seconds the call is permitted to be active, based on subscriber available minutes and other billing parameters.

Referring to FIG. **8A** and FIG. **16**, an example of a routing message produced by the processor at block **350** for a caller associated with a different node than the caller is shown generally at **366** and includes only a callee field **359**, a route field **361** and a time to live field **362**.

Referring to FIG. **8A**, having produced a routing message as shown in FIG. **16**, block **381** directs the processor (**202** of

22

FIG. **7**) to send the routing message shown in FIG. **16** to the call controller **14** shown in FIG. **1**.

Referring back to FIG. **8B**, if at block **257**, the callee identifier stored in the callee id buffer (**211** in FIG. **7**) does not begin with an international dialing digit, block **380** directs the processor (**202**) to determine whether or not the callee identifier begins with the same national dial digit code as assigned to the caller. To do this, the processor (**202**) is directed to refer to the retrieved caller dialing profile as shown in FIG. **10**. In FIG. **10**, the national dialing digit code **262** is the number 1. Thus, if the callee identifier begins with the number 1, then the processor (**202**) is directed to block **382** in FIG. **8B**.

Block **382** directs the processor (**202** of FIG. **7**) to examine the callee identifier to determine whether or not the digits following the NDD digit identify an area code that is the same as any of the area codes identified in the local area codes field **267** of the caller dialing profile **276** shown in FIG. **10**. If not, block **384** of FIG. **8B** directs the processor **202** to set the call type flag to indicate that the call is a national call. If the digits following the NDD digit identify an area code that is the same as a local area code associated with the caller as indicated by the caller dialing profile, block **386** directs the processor **202** to set the call type flag to indicate a local call, national style. After executing blocks **384** or **386**, block **388** directs the processor **202** to format the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier by removing the national dialled digit and prepending a caller country code identified by the country code field **266** of the caller dialing profile shown in FIG. **10**. The processor (**202**) is then directed to block **263** of FIG. **8B** to perform other processing as already described above.

If at block **380**, the callee identifier does not begin with a national dialled digit, block **390** directs the processor (**202**) to determine whether the callee identifier begins with digits that identify the same area code as the caller. Again, the reference for this is the retrieved caller dialing profile shown in FIG. **10**. The processor (**202**) determines whether or not the first few digits of the callee identifier identify an area code corresponding to the local area code field **267** of the retrieved caller dialing profile. If so, then block **392** directs the processor **202** to set the call type flag to indicate that the call is a local call and block **394** directs the processor (**202**) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending the caller country code to the callee identifier, the caller country code being determined from the country code field **266** of the retrieved caller dialing profile shown in FIG. **10**. The processor (**202**) is then directed to block **263** for further processing as described above.

Referring back to FIG. **8B**, at block **390**, the callee identifier does not start with the same area code as the caller, block **396** directs the processor (**202** of FIG. **7**) to determine whether the number of digits in the callee identifier, i.e. the length of the callee identifier, is within the range of digits indicated by the caller minimum local number length field **268** and the caller maximum local number length field **270** of the retrieved caller dialing profile shown in FIG. **10**. If so, then block **398** directs the processor (**202**) to set the call type flag to indicate a local call and block **400** directs the processor (**202**) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending to the callee identifier the caller country code (as indicated by the country code field **266** of the retrieved caller dialing profile shown in FIG. **10**) followed by the caller area code (as indicated by the local area code

US 9,813,330 B2

23

field 267 of the caller profile shown in FIG. 10). The processor (202) is then directed to block 263 of FIG. 8B for further processing as described above.

Referring back to FIG. 8B, if at block 396, the callee identifier has a length that does not fall within the range specified by the caller minimum local number length field (268 in FIG. 10) and the caller maximum local number length field (270 in FIG. 10), block 402 directs the processor 202 of FIG. 7 to determine whether or not the callee identifier identifies a valid user name. To do this, the processor 202 searches through the database (18 of FIG. 10 of dialing profiles to find a dialing profile having user name field contents (258 in FIG. 10) that match the callee identifier. If no match is found, block 404 directs the processor (202) to send an error message back to the call controller (14). If at block 402, a dialing profile having a user name field 258 that matches the callee identifier is found, block 406 directs the processor 202 to set the call type flag to indicate that the call is a private network call and then the processor is directed to block 280 of FIG. 8A. Thus, the call is classified as a private network call when the callee identifier identifies a subscriber to the private network.

From FIG. 8B, it will be appreciated that there are certain groups of blocks of codes that direct the processor 202 in FIG. 7 to determine whether the callee identifier has certain features such as an international dialing digit, a national dialing digit, an area code and a length that meet certain criteria, and cause the processor 202 to reformat the callee identifier stored in the callee id buffer 211, as necessary into a predetermined target format including only a country code, area code, and a normal telephone number, for example, to cause the callee identifier to be compatible with the E.164 number plan standard in this embodiment. This enables block 269 in FIG. 8B to have a consistent format of callee identifiers for use in searching through the DID bank table records of the type shown in FIG. 13 to determine how to route calls for subscriber to subscriber calls on the same system. Effectively, therefore blocks 257, 380, 390, 396 and 402 establish call classification criteria for classifying the call as a public network call or a private network call. Block 269 classifies the call, depending on whether or not the formatted callee identifier has a DID bank table record and this depends on how the call classification criteria are met and block 402 directs the processor 202 of FIG. 7 to classify the call as a private network call when the callee identifier complies with a pre-defined format, i.e. is a valid user name and identifies a subscriber to the private network, after the callee identifier has been subjected to the classification criteria of blocks 257, 380, 390 and 396.

Subscriber to Non-Subscriber Calls

Not all calls will be subscriber to subscriber calls and this will be detected by the processor 202 of FIG. 7 when it executes block 269 in FIG. 8B, and does not find a DID bank table record that is associated with the callee, in the DID bank table. When this occurs, the call is classified as a public network call by directing the processor 202 to block 408 of FIG. 8B which causes it to set the contents of the callee id buffer 211 of FIG. 7 equal to the newly formatted callee identifier, i.e., a number compatible with the E.164 standard. Then, block 410 of FIG. 8B directs the processor (202) to search a database of route or master list records associating route identifiers with dialing codes shown in FIG. 19 to locate a router having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

Referring to FIG. 19, a data structure for a master list or route list record is shown. Each master list record includes

24

a master list ID field 500, a dialing code field 502, a country code field 504, a national sign number field 506, a minimum length field 508, a maximum length field 510, a national dialled digit field 512, an international dialled digit field 514 and a buffer rate field 516.

The master list ID field 500 holds a unique code such as 1019, for example, identifying the record. The dialing code field 502 holds a predetermined number pattern that the processor 202 of FIG. 7 uses at block 410 in FIG. 8B to find the master list record having a dialing code matching the first few digits of the amended callee identifier stored in the callee id buffer 211. The country code field 504 holds a number representing the country code associated with the record and the national sign number field 506 holds a number representing the area code associated with the record. (It will be observed that the dialing code is a combination of the contents of the country code field 504 and the national sign number field 506.) The minimum length field 508 holds a number representing the minimum length of digits associated with the record and the maximum length field 51 holds a number representing the maximum number of digits in a number with which the record may be compared. The national dialled digit (NDD) field 512 holds a number representing an access code used to make a call within the country specified by the country code, and the international dialled digit (IDD) field 514 holds a number representing the international prefix needed to dial a call from the country indicated by the country code.

Thus, for example, a master list record may have a format as shown in FIG. 20 with exemplary field contents as shown.

Referring back to FIG. 8B, using the country code and area code portions of the reformatted callee identifier stored in the callee id buffer 211, block 410 directs the processor 202 of FIG. 7 to find a master list record such as the one shown in FIG. 20 having a dialing code that matches the country code (1) and area code (604) of the callee identifier. Thus, in this example, the processor (202) would find a master list record having an ID field containing the number 1019. This number may be referred to as a route ID. Thus, a route ID number is found in the master list record associated with a predetermined number pattern in the reformatted callee identifier.

After executing block 410 in FIG. 8B, the process continues as shown in FIG. 8D. Referring to FIG. 8D, block 412 directs the processor 202 of FIG. 7 to use the route ID number to search a database of supplier records associating supplier identifiers with route identifiers to locate at least one supplier record associated with the route identifier to identify at least one supplier operable to supply a communications link for the route.

Referring to FIG. 21, a data structure for a supplier list record is shown. Supplier list records include a supplier ID field 540, a master list ID field 542, an optional prefix field 544, a specific route identifier field 546, a NDD/IDD rewrite field 548, a rate field 550, and a timeout field 551. The supplier ID field 540 holds a code identifying the name of the supplier and the master list ID field 542 holds a code for associating the supplier record with a master list record. The prefix field 544 holds a string used to identify the supplier traffic and the specific route identifier field 546 holds an IP address of a gateway operated by the supplier indicated by the supplier ID field 540. The NDD/IDD rewrite field 548 holds a code representing a rewritten value of the NDD/IDD associated with this route for this supplier, and the rate field 550 holds a code indicating the cost per second to the system operator to use the route provided by the gateway specified by the contents of the route identifier field 546. The timeout

US 9,813,330 B2

25

field **551** holds a code indicating a time that the call controller should wait for a response from the associated gateway before giving up and trying the next gateway. This time value may be in seconds, for example. Exemplary supplier records are shown in FIGS. **22**, **23** and **24** for the exemplary suppliers shown at **20** in FIG. **1**, namely Telus, Shaw and Sprint.

Referring back to FIG. **8D**, at block **412** the processor **202** finds all supplier records that identify the master list ID found at block **410** of FIG. **8B**.

Referring back to FIG. **8D**, block **560** directs the processor **202** of FIG. **7** to begin to produce a routing message of the type shown in FIG. **15**. To do this, the processor **202** loads a routing message buffer as shown in FIG. **25** with a supplier prefix of the least costly supplier where the least costly supplier is determined from the rate fields **550** of FIG. **21** of the records associated with respective suppliers.

Referring to FIGS. **22-24**, in the embodiment shown, the supplier "Telus" has the lowest number in the rate field **550** and therefore the prefix **4973** associated with that supplier is loaded into the routing message buffer shown in FIG. **25** first.

Block **562** in FIG. **8D** directs the processor to delimit the prefix **4973** by the number sign (#) and to next load the reformatted callee identifier into the routing message buffer shown in FIG. **25**. At block **563** of FIG. **8D**, the contents of the route identifier field **546** of FIG. **21** of the record associated with the supplier "Telus" are added by the processor **202** of FIG. **7** to the routing message buffer shown in FIG. **25** after an @ sign delimiter, and then block **564** in FIG. **8D** directs the processor to get a time to live value, which in one embodiment may be 3600 seconds, for example. Block **566** then directs the processor **202** to load this time to live value and the timeout value (**551**) in FIG. **21** in the routing message buffer of FIG. **25**. Accordingly, a first part of the routing message for the Telus gateway is shown generally at **570** in FIG. **25**.

Referring back to FIG. **8D**, block **571** directs the processor **202** back to block **560** and causes it to repeat blocks **560**, **562**, **563**, **564** and **566** for each successive supplier until the routing message buffer is loaded with information pertaining to each supplier identified by the processor at block **412**. Thus, a second portion of the routing message as shown at **572** in FIG. **25** relates to the second supplier identified by the record shown in FIG. **23**. Referring back to FIG. **25**, a third portion of the routing message as shown at **574** and is associated with a third supplier as indicated by the supplier record shown in FIG. **24**.

Consequently, referring to FIG. **25**, the routing message buffer holds a routing message identifying a plurality of different suppliers able to provide gateways to the public telephone network (i.e. specific routes) to establish at least part of a communication link through which the caller may contact the callee. In this embodiment, each of the suppliers is identified, in succession, according to rate. Other criteria for determining the order in which suppliers are listed in the routing message may include preferred supplier priorities which may be established based on service agreements, for example. Referring back to FIG. **8D**, block **568** directs the processor **202** of FIG. **7** to send the routing message shown in FIG. **25** to the call controller **14** in FIG. **1**.

Subscriber to Subscriber Calls Within the Same Node

Referring back to FIG. **8A**, if at block **280**, the callee identifier received in the RC request message has a prefix that identifies the same node as that associated with the caller, block **600** directs the processor **202** to use the callee identifier in the callee id buffer **211** to locate and retrieve a

26

dialing profile for the callee. The dialing profile may be of the type shown in FIG. **11** or **12**, for example. Block **602** of FIG. **8A** then directs the processor **202** of FIG. **7** to get call block, call forward and voicemail records from the database **18** of FIG. **1** based on the user name identified in the callee dialing profile retrieved by the processor at block **600**. Call block, call forward and voicemail records may be as shown in FIGS. **26**, **27**, **28** and **30** for example.

Referring to FIG. **26**, the call block records include a user name field **604** and a block pattern field **606**. The user name field holds a user name corresponding to the user name in the user name field (**258** in FIG. **10**) of the callee profile and the block pattern field **606** holds one or more E.164-compatible numbers or user names identifying PSTN numbers or system subscribers from whom the subscriber identified in the user name field **604** does not wish to receive calls.

Referring to FIG. **8A** and FIG. **27**, block **608** directs the processor **202** of FIG. **7** to determine whether or not the caller identifier received in the RC request message matches a block pattern stored in the block pattern field **606** of the call block record associated with the callee identified by the contents of the user name field **604** in FIG. **26**. If the caller identifier matches a block pattern, block **610** directs the processor to send a drop call or non-completion message to the call controller (**14**) and the process is ended. If the caller identifier does not match a block pattern associated with the callee, block **609** directs the processor to store the username and domain of the callee, as determined from the callee dialing profile, and a time to live value in the routing message buffer as shown at **650** in FIG. **32**. Referring back to FIG. **8A**, block **612** then directs the processor **202** to determine whether or not call forwarding is required.

Referring to FIG. **28**, the call forwarding records include a user name field **614**, a destination number field **616**, and a sequence number field **618**. The user name field **614** stores a code representing a user with which the record is associated. The destination number field **616** holds a user name representing a number to which the current call should be forwarded, and the sequence number field **618** holds an integer number indicating the order in which the user name associated with the corresponding destination number field **616** should be attempted for call forwarding. The call forwarding table may have a plurality of records for a given user. The processor **202** of FIG. **7** uses the contents of the sequence number field **618** to place the records for a given user in order. As will be appreciated below, this enables the call forwarding numbers to be tried in an ordered sequence.

Referring to FIG. **8A** and FIG. **29**, if at block **612**, the call forwarding record for the callee identified by the callee identifier contains no contents in the destination number field **616** and accordingly no contents in the sequence number field **618**, there are no call forwarding entries for this callee, and the processor **202** is directed to block **620** in FIG. **8C**. If there are entries in the call forwarding table **27**, block **622** in FIG. **8A** directs the processor **202** to search the dialing profile table to find a dialing profile record as shown in FIG. **9**, for the user identified by the destination number field **616** of the call forward record shown in FIG. **28**. The processor **202** of FIG. **7** is further directed to store the username and domain for that user and a time to live value in the routing message buffer as shown at **652** in FIG. **32**, to produce a routing message as illustrated. This process is repeated for each call forwarding record associated with the callee identified by the callee id buffer **211** in FIG. **7** to add to the routing message buffer all call forwarding usernames and domains associated with the callee.

US 9,813,330 B2

27

Referring back to FIG. 8A, if at block 612 there are no call forwarding records, then at block 620 in FIG. 8C the processor 202 is directed to determine whether or not the user identified by the callee identifier has paid for voicemail service. This is done by checking to see whether or not a flag is set in a voicemail record of the type shown in FIG. 30 in a voicemail table stored in the database 18 shown in FIG. 1.

Referring to FIG. 30, voicemail records in this embodiment may include a user name field 624, a voicemail server field 626, a seconds to voicemail field 628 and an enable field 630. The user name field 624 stores the user name of the callee. The voicemail server field 626 holds a code identifying a domain name of a voicemail server associated with the user identified by the user name field 624. The seconds to voicemail field 628 holds a code identifying the time to wait before engaging voicemail, and the enable field 630 holds a code representing whether or not voicemail is enabled for the user. Referring back to FIG. 8C, at block 620 if the processor 202 of FIG. 7 finds a voicemail record as shown in FIG. 30 having user name field 624 contents matching the callee identifier, the processor is directed to examine the contents of the enable field 630 to determine whether or not voicemail is enabled. If voicemail is enabled, then block 640 in FIG. 8C directs the processor 202 to FIG. 7 to store the contents of the voicemail server field 626 and the contents of the seconds to voicemail field 628 in the routing message buffer, as shown at 654 in FIG. 32. Block 642 then directs the processor 202 to get time to live values for each path specified by the routing message according to the cost of routing and the user's balance. These time to live values are then appended to corresponding paths already stored in the routing message buffer.

Referring back to FIG. 8C, block 644 then directs the processor 202 of FIG. 7 to store the IP address of the current node in the routing message buffer as shown at 656 in FIG. 32. Block 646 then directs the processor 202 to send the routing message shown in FIG. 32 to the call controller 14 in FIG. 1. Thus in the embodiment described the routing controller will produce a routing message that will cause at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server.

Referring back to FIG. 1, the routing message whether of the type shown in FIG. 16, 25 or 32, is received at the call controller 14 and the call controller interprets the receipt of the routing message as a request to establish a call.

Referring to FIG. 4, the program memory 104 of the call controller 14 includes a routing to gateway routine depicted generally at 122.

Where a routing message of the type shown in FIG. 32 is received by the call controller 14, the routing to gateway routine 122 shown in FIG. 4 may direct the processor 102 to cause a message to be sent back through the interne 13 shown in FIG. 1 to the callee telephone 15, knowing the IP address of the callee telephone 15 from the user name.

Alternatively, if the routing message is of the type shown in FIG. 16, which identifies a domain associated with another node in the system, the call controller may send a SIP invite message along the high speed backbone 17 connected to the other node. The other node functions as explained above, in response to receipt of a SIP invite message.

If the routing message is of the type shown in FIG. 25 where there are a plurality of gateway suppliers available, the call controller sends a SIP invite message to the first supplier, in this case Telus, using a dedicated line or an internet connection to determine whether or not Telus is able to handle the call. If the Telus gateway returns a message

28

indicating it is not able to handle the call, the call controller 14 then proceeds to send a SIP invite message to the next supplier, in this case Shaw. The process is repeated until one of the suppliers responds indicating that it is available to carry the call. Once a supplier responds indicating that it is able to carry the call, the supplier sends back to the call controller 14 an IP address for a gateway provided by the supplier through which the call or audio path of the call will be carried. This IP address is sent in a message from the call controller 14 to the media relay 9 which responds with a message indicating an IP address to which the caller telephone should send its audio/video, traffic and an IP address to which the gateway should send its audio/video for the call. The call controller conveys the IP address at which the media relay expects to receive audio/video from the caller telephone, to the caller telephone 12 in a message. The caller telephone replies to the call controller with an IP address at which it would like to receive audio/video and the call controller conveys that IP address to the media relay. The call may then be conducted between the caller and callee through the media relay and gateway.

Referring back to FIG. 1, if the call controller 14 receives a routing message of the type shown in FIG. 32, and which has at least one call forwarding number and/or a voicemail number, the call controller attempts to establish a call to the callee telephone 15 by seeking from the callee telephone a message indicating an IP address to which the media relay should send audio/video. If no such message is received from the callee telephone, no call is established. If no call is established within a pre-determined time, the call controller 14 attempts to establish a call with the next user identified in the call routing message in the same manner. This process is repeated until all call forwarding possibilities have been exhausted, in which case the call controller communicates with the voicemail server 19 identified in the routing message to obtain an IP address to which the media relay should send audio/video and the remainder of the process mentioned above for establishing IP addresses at the media relay 9 and the caller telephone is carried out to establish audio/video paths to allowing the caller to leave a voicemail message with the voicemail server.

When an audio/video path through the media relay is established, a call timer maintained by the call controller 14 logs the start date and time of the call and logs the call ID and an identification of the route (i.e., audio/video path IP address) for later use in billing.

Time to Live

Referring to FIGS. 33A and 33B, a process for determining a time to live value for any of blocks 642 in FIG. 8C, 350 in FIG. 8A or 564 in FIG. 8D above is described. The process is executed by the processor 202 shown in FIG. 7. Generally, the process involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Referring to FIG. 33A, in this embodiment, the process begins with a first block 700 that directs the RC processor to determine whether or not the call type set at block 302 in FIG. 8A indicates the call is a network or cross-domain call. If the call is a network or cross-domain call, block 702 of FIG. 33A directs the RC processor to set the time to live

US 9,813,330 B2

29

equal to 99999 and the process is ended. Thus, the network or cross-domain call type has a long time to live. If at block 700 the call type is determined not to be a network or cross-domain type, block 704 directs the RC processor to get a subscriber bundle table record from the database 18 in FIG. 1 and store it locally in the subscriber bundle record buffer at the RC 14.

Referring to FIG. 34, a subscriber bundle table record is shown generally at 706. The record includes a user name field 708 and a services field 710. The user name field 708 holds a code identifying the subscriber user name and the services field 710 holds codes identifying service features assigned to the subscriber, such as free local calling, call blocking and voicemail, for example.

FIG. 35 shows an exemplary subscriber bundle record for the Vancouver caller. In this record the user name field 708 is loaded with the user name 2001 1050 8667 and the services field 710 is loaded with codes 10, 14 and 16 corresponding to free local calling, call blocking and voicemail, respectively. Thus, user 2001 1050 8667 has free local calling, call blocking and voicemail features.

Referring back to FIG. 33A, after having loaded a subscriber bundle record into the subscriber bundle record buffer, block 712 directs the RC processor to search the database (18) to determine whether or not there is a bundle override table record for the master list ID value that was determined at block 410 in FIG. 8B. An exemplary bundle override table record is shown at 714 in FIG. 36. The bundle table record includes a master list ID field 716, an override type field 718, an override value field 720 a first interval field 722 and a second interval field 724. The master list ID field 716 holds a master list ID code. The override type field 718 holds an override type code indicating a fixed, percent or cent amount to indicate the amount by which a fee will be increased. The override value field 720 holds a real number representing the value of the override type. The first interval field 722 holds a value indicating the minimum number of seconds for a first level of charging and the second interval field 724 holds a number representing a second level of charging.

Referring to FIG. 37, a bundle override record for the located master list ID code is shown generally at 726 and includes a master list ID field 716 holding the code 1019 which was the code located in block 410 of FIG. 8B. The override type field 718 includes a code indicating the override type is a percentage value and the override value field 720 holds the value 10.0 indicating that the override will be 10.0% of the charged value. The first interval field 722 holds a value representing 30 seconds and the second interval field 724 holds a value representing 6 seconds. The 30 second value in the first interval field 722 indicates that charges for the route will be made at a first rate for 30 seconds and thereafter the charges will be made at a different rate in increments of 6 seconds, as indicated by the contents of the second interval field 724.

Referring back to FIG. 33A, if at block 712 the processor finds a bundle override record of the type shown in FIG. 37, block 728 directs the processor to store the bundle override record in local memory. In the embodiment shown, the bundle override record shown in FIG. 37 is stored in the bundle override record buffer at the RC as shown in FIG. 7. Still referring to FIG. 33A, block 730 then directs the RC processor to determine whether or not the subscriber bundle table record 706 in FIG. 35 has a services field including a code identifying that the user is entitled to free local calling and also directs the processor to determine whether or not the call type is not a cross domain cell, i.e. it is a local or

30

local/national style. If both of these conditions are satisfied, block 732 directs the processor to set the time to live equal to 99999, giving the user a long period of time for the call. The process is then ended. If the conditions associated with block 730 are not satisfied, block 734 of FIG. 33B directs the RC processor to retrieve a subscriber account record associated with a participant in the call. This is done by copying and storing in the subscriber account record buffer a subscriber account record for the caller.

Referring to FIG. 38, an exemplary subscriber account table record is shown generally at 736. The record includes a user name field 738, a funds balance field 740 and a free time field 742. The user name field 738 holds a subscriber user name, the funds balance field 740 holds a real number representing the dollar value of credit available to the subscriber and the free time field 742 holds an integer representing the number of free seconds that the user is entitled to.

An exemplary subscriber account record for the Vancouver caller is shown generally at 744 in FIG. 39, wherein the user name field 738 holds the user name 2001 1050 8667, the funds balance field 740 holds the value \$10.00, and the free time field 742 holds the value 100. The funds balance field holding the value of \$10.00 indicates the user has \$10.00 worth of credit and the free time field having the value of 100 indicates that the user has a balance of 100 free seconds of call time.

Referring back to FIG. 33B, after copying and storing the subscriber account record shown in FIG. 39 from the database to the subscriber account record buffer RC, block 746 directs the processor to determine whether or not the subscriber account record funds balance field 740 or free time field 742 are greater than zero. If they are not greater than zero, block 748 directs the processor to set the time to live equal to zero and the process is ended. The RC then sends a message back to the call controller to cause the call controller to deny the call to the caller. If the conditions associated with block 746 are satisfied, block 750 directs the processor to calculate the call cost per unit time. A procedure for calculating the call cost per unit time is described below in connection with FIG. 41.

Assuming the procedure for calculating the cost per second returns a number representing the call cost per second, block 752 directs the processor 202 in FIG. 7 to determine whether or not the cost per second is equal to zero. If so, block 754 directs the processor to set the time to live to 99999 to give the caller a very long length of call and the process is ended.

If at block 752 the call cost per second is not equal to zero, block 756 directs the processor 202 in FIG. 7 to calculate a first time to live value as a sum of a free time attributed to the participant in the communication session and the quotient of the funds balance held by the participant to the cost per unit time value. To do this, the processor 202 of FIG. 7 is directed to set a first time value or temporary time to live value equal to the sum of the free time provided in the free time field 742 of the subscriber account record shown in FIG. 39 and the quotient of the contents of the funds balance field 740 in the subscriber account record for the call shown in FIG. 39 and the cost per second determined at block 750 of FIG. 33B. Thus, for example, if at block 750 the cost per second is determined to be three cents per second and the funds balance field holds the value \$10.00, the quotient of the funds balance and cost per second is 333 seconds and this is added to the contents of the free time field 742, which is 100, resulting in a time to live of 433 seconds.

Block **758** then directs the RC processor to produce a second time value in response to the first time value and the billing pattern associated with the participant as established by the bundle override record shown in FIG. **37**. This process is shown in greater detail at **760** in FIG. **40** and generally involves producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

Referring to FIG. **40**, the process for producing the second time value begins with a first block **762** that directs the processor **202** in FIG. **7** to set a remainder value equal to the difference between the time to live value calculated at block **756** in FIG. **33B** and the contents of the first interval field **722** of the record shown in FIG. **37** modulus the contents of the second interval field **724** of FIG. **37**. Thus, in the example given, the difference between the time to live field and the first interval field is 433 minus 30, which is 403 and therefore the remainder produced by 403 divided by 6 is 1.

Block **764** then directs the processor to determine whether or not this remainder value is greater than zero and, if so, block **766** directs the processor to subtract the remainder from the first time value and set the difference as the second time value. To do this the processor is directed to set the time to live value equal to the current time to live of 433 minus the remainder of 1, i.e., 432 seconds. The processor is then returned back to block **758** of FIG. **33B**.

Referring back to FIG. **40**, if at block **764** the remainder is not greater than zero, block **768** directs the processor **202** of FIG. **7** to determine whether or not the time to live is less than the contents of the first interval field **722** in the record shown in FIG. **37**. If so, then block **770** of FIG. **40** directs the processor to set the time to live equal to zero. Thus, the second time value is set to zero when the remainder is not greater than zero and the first time value is less than the first billing interval. If at block **768** the conditions of that block are not satisfied, the processor returns the first time to live value as the second time to live value.

Thus, referring to FIG. **33B**, after having produced a second time to live value, block **772** directs the processor to set the time to live value for use in blocks **642**, **350** or **564**. Cost Per Second

Referring back to FIG. **33B**, at block **750** it was explained that a call cost per unit time is calculated. The following explains how that call cost per unit time value is calculated.

Referring to FIG. **41**, a process for calculating a cost per unit time is shown generally at **780**. The process is executed by the processor **202** in FIG. **7** and generally involves locating a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and setting a reseller rate equal to the sum of the markup value and the buffer rate, locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default operator markup record specifying a default cost per unit time and setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The process begins with a first set of blocks **782**, **802** and **820** which direct the processor **202** in FIG. **7** to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller mark-up record. Block **782**, in

particular, directs the processor to address the database **18** to look for a record associated with a reseller and a route with the reseller by looking for a special rate record based on the master list ID established at block **410** in Figure **8B**.

Referring to FIG. **42**, a system operator special rate table record is shown generally at **784**. The record includes a reseller field **786**, a master list ID field **788**, a mark-up type field **790**, a mark-up value field **792**, a first interval field **794** and a second interval field **796**. The reseller field **786** holds a reseller ID code and the master list ID field **788** holds a master list ID code. The mark-up type field **790** holds a mark-up type such as fixed percent or cents and the mark-up value field **792** holds a real number representing the value corresponding to the mark-up type. The first interval field **794** holds a number representing a first level of charging and the second interval field **796** holds a number representing a second level of charging.

An exemplary system operator special rate table for a reseller known as "Klondike" is shown at **798** in FIG. **43**. In this record, the reseller field **786** holds a code indicating the retailer ID is Klondike, the master list ID field **788** holds the code **1019** to associate the record with the master list ID code **1019**. The mark-up type field **790** holds a code indicating the mark-up type is cents and the mark-up value field **792** holds a mark-up value indicating $\frac{1}{10}$ of one cent. The first interval field **794** holds the value 30 and the second interval field **796** holds the value 6, these two fields indicating that the operator allows 30 seconds for free and then billing is done in increments of 6 seconds after that.

Referring back to FIG. **41**, if at block **782** a record such as the one shown in FIG. **43** is located in the system operator special rates table, the processor is directed to block **800** in FIG. **41**. If such a record is not found in the system operator special rates table, block **802** directs the processor to address the database **18** to look in a system operator mark-up table for a mark-up record associated with the reseller.

Referring to FIG. **44**, an exemplary system operator mark-up table record is shown generally at **804**. The record includes a reseller field **806**, a mark-up type field **808**, a mark-up value field **810**, a first interval field **812** and a second interval field **814**. The reseller mark-up type, mark-up value, first interval and second interval fields are as described in connection with the fields by the same names in the system operator special rates table shown in FIG. **42**.

FIG. **45** provides an exemplary system operator mark-up table record for the reseller known as Klondike and therefore the reseller field **806** holds the value "Klondike", the mark-up type field **808** holds the value cents, the mark-up value field holds the value 0.01, the first interval field **812** holds the value 30 and the second interval field **814** holds the value 6. This indicates that the reseller "Klondike" charges by the cent at a rate of one cent per minute. The first 30 seconds of the call are free and billing is charged at the rate of one cent per minute in increments of 6 seconds.

FIG. **46** provides an exemplary system operator mark-up table record for cases where no specific system operator mark-up table record exists for a particular reseller, i.e., a default reseller mark-up record. This record is similar to the record shown in FIG. **45** and the reseller field **806** holds the value "all", the mark-up type field **808** is loaded with a code indicating mark-up is based on a percentage, the mark-up value field **810** holds the percentage by which the cost is marked up, and the first and second interval fields **812** and **814** identify first and second billing levels.

Referring back to FIG. **41**, if at block **802** a specific mark-up record for the reseller identified at block **782** is not located, block **820** directs the processor to get the mark-up

US 9,813,330 B2

33

record shown in FIG. 46, having the “all” code in the reseller field 806. The processor is then directed to block 800.

Referring back to FIG. 41, at block 800, the processor 202 of FIG. 7 is directed to set a reseller rate equal to the sum of the mark-up value of the record located by blocks 782, 802 or 820 and the buffer rate specified by the contents of the buffer rate field 516 of the master list record shown in FIG. 20. To do this, the RC processor sets a variable entitled “reseller cost per second” to a value equal to the sum of the contents of the mark-up value field (792, 810) of the associated record, plus the contents of the buffer rate field (516) from the master list record associated with the master list ID. Then, block 822 directs the processor to set a system operator cost per second variable equal to the contents of the buffer rate field (516) from the master list record. Block 824 then directs the processor to determine whether the call type flag indicates the call is local or national/local style and whether the caller has free local calling. If both these conditions are met, then block 826 sets the user cost per second variable equal to zero and sets two increment variables equal to one, for use in later processing. The cost per second has thus been calculated and the process shown in FIG. 41 is ended.

If at block 824 the conditions of that block are not met, the processor 202 of FIG. 7 is directed to locate at least one of a bundle override table record specifying a route cost per unit time associated with a route associated with the communication session, a reseller special destinations table record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default reseller global markup record specifying a default cost per unit time.

To do this block 828 directs the processor 202 of FIG. 7 to determine whether or not the bundle override record 726 in FIG. 37 located at block 712 in FIG. 33A has a master list ID equal to the stored master list ID that was determined at block 410 in FIG. 8B. If not, block 830 directs the processor to find a reseller special destinations table record in a reseller special destinations table in the database (18), having a master list ID code equal to the master list ID code of the master list ID that was determined at block 410 in FIG. 8B. An exemplary reseller special destinations table record is shown in FIG. 47 at 832. The reseller special destinations table record includes a reseller field 834, a master list ID field 836, a mark-up type field 838, a mark-up value field 840, a first interval field 842 and a second interval field 844. This record has the same format as the system operator special rates table record shown in FIG. 42, but is stored in a different table to allow for different mark-up types and values and time intervals to be set according to resellers’ preferences. Thus, for example, an exemplary reseller special destinations table record for the reseller “Klondike” is shown at 846 in FIG. 48. The reseller field 834 holds a value indicating the reseller as the reseller “Klondike” and the master list ID field holds the code 1019. The mark-up type field 838 holds a code indicating the mark-up type is percent and the mark-up value field 840 holds a number representing the mark-up value as 5%. The first and second interval fields identify different billing levels used as described earlier.

Referring back to FIG. 41, the record shown in FIG. 48 may be located at block 830, for example. If at block 830 such a record is not found, then block 832 directs the processor to get a default operator global mark-up record based on the reseller ID.

Referring to FIG. 49, an exemplary default reseller global mark-up table record is shown generally at 848. This record

34

includes a reseller field 850, a mark-up type field 852, a mark-up value field 854, a first interval field 856 and a second interval field 858. The reseller field 850 holds a code identifying the reseller. The mark-up type field 852, the mark-up value field 854 and the first and second interval fields 856 and 858 are of the same type as described in connection with fields of the same name in FIG. 47, for example. The contents of the fields of this record 860 may be set according to system operator preferences, for example.

Referring to FIG. 50, an exemplary reseller global mark-up table record is shown generally at 860. In this record, the reseller field 850 holds a code indicating the reseller is “Klondike”, the mark-up type field 852 holds a code indicating the mark-up type is percent, the mark-up value field 854 holds a value representing 10% as the mark-up value, the first interval field 856 holds the value 30 and the second interval field 858 holds the values 30 and 6 respectively to indicate the first 30 seconds are free and billing is to be done in 6 second increments after that.

Referring back to FIG. 41, should the processor get to block 832, the reseller global mark-up table record as shown in FIG. 50 is retrieved from the database and stored locally at the RC. As seen in FIG. 41, it will be appreciated that if the conditions are met in blocks 828 or 830, or if the processor executes block 832, the processor is then directed to block 862 which causes it to set an override value equal to the contents of the mark-up value field of the located record, to set the first increment variable equal to the contents of the first interval field of the located record and to set the second increment variable equal to the contents of the second interval field of the located record. (The increment variables were alternatively set to specific values at block 826 in FIG. 41.)

It will be appreciated that the located record could be a bundle override record of the type shown in FIG. 37 or the located record could be a reseller special destination record of the type shown in FIG. 48 or the record could be a reseller global mark-up table record of the type shown in FIG. 50. After the override and first and second increment variables have been set at block 862, the processor 202 of FIG. 7 is directed to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time, depending on which record was located. To do this, block 864 directs the processor to set the cost per unit time equal to the sum of the reseller cost set at block 800 in FIG. 41, plus the contents of the override variable calculated in block 862 in FIG. 41. The cost per unit time has thus been calculated and it is this cost per unit time that is used in block 752 of FIG. 33B, for example.

Terminating the Call

In the event that either the caller or the callee terminates a call, the telephone of the terminating party sends a SIP bye message to the controller 14. An exemplary SIP bye message is shown at 900 in FIG. 51 and includes a caller field 902, a callee field 904 and a call ID field 906. The caller field 902 holds a twelve digit user name, the callee field 904 holds a PSTN compatible number or user name, and the call ID field 906 holds a unique call identifier field of the type shown in the call ID field 65 of the SIP invite message shown in FIG. 3.

Thus, for example, referring to FIG. 52, a SIP bye message for the Calgary callee is shown generally at 908 and the caller field 902 holds a user name identifying the caller, in this case 2001 1050 8667, the callee field 904 holds a user name identifying the Calgary callee, in this case 2001 1050

US 9,813,330 B2

35

2222, and the call ID field **906** holds the code FA10 @ 192.168.0.20, which is the call ID for the call.

The SIP bye message shown in FIG. **52** is received at the call controller **14** and the call controller executes a process as shown generally at **910** in FIG. **53**. The process includes a first block **912** that directs the call controller processor **102** of FIG. **4** to copy the caller, callee and call ID field contents from the SIP bye message received from the terminating party to corresponding fields of an RC stop message buffer (not shown). Block **914** then directs the processor to copy the call start time from the call timer and to obtain a call stop time from the call timer. Block **916** then directs the call controller to calculate a communication session time by determining the difference in time between the call start time and the call stop time. This session time is then stored in a corresponding field of the RC call stop message buffer. Block **917** then directs the processor to decrement the contents of the current concurrent call field **277** of the dialing profile for the caller as shown in FIG. **10**, to indicate that there is one less concurrent call in progress. A copy of the amended dialing profile for the caller is then stored in the database **18** of FIG. **1**. Block **918** then directs the processor to copy the route from the call log. An RC call stop message produced as described above is shown generally at **1000** in FIG. **54**. An RC call stop message specifically associated with the call made to the Calgary callee is shown generally at **1020** in FIG. **55**.

Referring to FIG. **54**, the RC stop call message includes a caller field **1002**, callee field **1004**, a call ID field **1006**, an account start time field **1008**, an account stop time field **1010**, a communication session time **1012** and a route field **1014**. The caller field **1002** holds a username, the callee field **1004** holds a PSTN-compatible number or system number, the call ID field **1006** hold the unique call identifier received from the SIP invite message shown in FIG. **3**, the account start time field **1008** holds the date and start time of the call, the account stop time field **1010** holds the date and time the call ended, the communication session time field **1012** holds a value representing the difference between the start time and the stop time, in seconds, and the route field **1014** holds the IP address for the communications link that was established.

Referring to FIG. **55**, an exemplary RC stop call message for the Calgary callee is shown generally at **1020**. In this example the caller field **1002** holds the user name 2001 1050 8667 identifying the Vancouver-based caller and the callee field **1004** holds the user name 2001 1050 2222 identifying the Calgary callee. The contents of the call ID field **1006** are FA10 @ 192.168.0.20. The contents of the account start time field **1008** are 2006-12-30 12:12:12 and the contents of the account stop time field are 2006-12-30 12:12:14. The contents of the communication session time field **1012** are 2 to indicate 2 seconds call duration and the contents of the route field are 72.64.39.58.

Referring back to FIG. **53**, after having produced an RC call stop message, block **920** directs the processor **102** of FIG. **4** to send the RC stop message compiled in the RC call stop message buffer to the RC **16** of FIG. **1**. Block **922** directs the call controller **14** to send a “bye” message back to the party that did not terminate the call.

The RC **16** of FIG. **1** receives the call stop message and an RC call stop message process is invoked at the RC, the process being shown at **950** in FIGS. **56A**, **56B** and **56C**. Referring to FIG. **56A**, the RC stop message process **950** begins with a first block **952** that directs the processor **202** in FIG. **7** to determine whether or not the communication session time is less than or equal to the first increment value

36

set by the cost calculation routine shown in FIG. **41**, specifically blocks **826** or **862** thereof. If this condition is met, then block **954** of FIG. **56A** directs the RC processor to set a chargeable time variable equal to the first increment value set at block **826** or **862** of FIG. **41**. If at block **952** of FIG. **56A** the condition is not met, block **956** directs the RC processor to set a remainder variable equal to the difference between the communication session time and the first increment value mod the second increment value produced at block **826** or **862** of FIG. **41**. Then, the processor is directed to block **958** of FIG. **56A** which directs it to determine whether or not the remainder is greater than zero. If so, block **960** directs the RC processor to set the chargeable time variable equal to the difference between the communication session time and the remainder value. If at block **958** the remainder is not greater than zero, block **962** directs the RC processor to set the chargeable time variable equal to the contents of the communication session time from the RC stop message. The processor is then directed to block **964**. In addition, after executing block **954** or block **960**, the processor is directed to block **964**.

Block **964** directs the processor **202** of FIG. **7** to determine whether or not the chargeable time variable is greater than or equal to the free time balance as determined from the free time field **742** of the subscriber account record shown in FIG. **39**. If this condition is satisfied, block **966** of FIG. **56A** directs the processor to set the free time field **742** in the record shown in FIG. **39**, to zero. If the chargeable time variable is not greater than or equal to the free time balance, block **968** directs the RC processor to set a user cost variable to zero and Block **970** then decrements the free time field **742** of the subscriber account record for the caller by the chargeable time amount determined by block **954**, **960** or **962**.

If at Block **964** the processor **202** of FIG. **7** was directed to Block **966** which causes the free time field (**742** of FIG. **39**) to be set to zero, referring to FIG. **56B**, Block **972** directs the processor to set a remaining chargeable time variable equal to the difference between the chargeable time and the contents of the free time field (**742** of FIG. **39**). Block **974** then directs the processor to set the user cost variable equal to the product of the remaining chargeable time and the cost per second calculated at Block **750** in FIG. **33B**. Block **976** then directs the processor to decrement the funds balance field (**740**) of the subscriber account record shown in FIG. **39** by the contents of the user cost variable calculated at Block **974**.

After completing Block **976** or after completing Block **970** in FIG. **56A**, block **978** of FIG. **56B** directs the processor **202** of FIG. **7** to calculate a reseller cost variable as the product of the reseller rate as indicated in the mark-up value field **810** of the system operator mark-up table record shown in FIG. **45** and the communication session time determined at Block **916** in FIG. **53**. Then, Block **980** of FIG. **56B** directs the processor to add the reseller cost to the reseller balance field **986** of a reseller account record of the type shown in FIG. **57** at **982**.

The reseller account record includes a reseller ID field **984** and the aforementioned reseller balance field **986**. The reseller ID field **984** holds a reseller ID code, and the reseller balance field **986** holds an accumulated balance of charges.

Referring to FIG. **58**, a specific reseller accounts record for the reseller “Klondike” is shown generally at **988**. In this record the reseller ID field **984** holds a code representing the reseller “Klondike” and the reseller balance field **986** holds a balance of \$100.02. Thus, the contents of the reseller

US 9,813,330 B2

37

balance field **986** in FIG. **58** are incremented by the reseller cost calculated at block **978** of FIG. **56B**.

Still referring to FIG. **56B**, after adding the reseller cost to the reseller balance field as indicated by Block **980**, Block **990** directs the processor to **202** of FIG. **7** calculate a system operator cost as the product of the system operator cost per second, as set at block **822** in FIG. **41**, and the communication session time as determined at Block **916** in FIG. **53**. Block **992** then directs the processor to add the system operator cost value calculated at Block **990** to a system operator accounts table record of the type shown at **994** in FIG. **59**. This record includes a system operator balance field **996** holding an accumulated charges balance. Referring to FIG. **60** in the embodiment described, the system operator balance field **996** may hold the value \$1,000.02 for example, and to this value the system operator cost calculated at Block **990** is added when the processor executes Block **992** of FIG. **56B**.

Ultimately, the final reseller balance **986** in FIG. **58** holds a number representing an amount owed to the reseller by the system operator and the system operator balance **996** of FIG. **59** holds a number representing an amount of profit for the system operator.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

What is claimed is:

1. A method for routing a communication in a communication system between an Internet-connected first participant device associated with a first participant and a second participant device associated with a second participant, the method comprising:

in response to initiation of the communication by the first participant device, receiving, by a controller comprising at least one processor, over an Internet protocol (IP) network a first participant identifier and a second participant identifier;

causing the at least one processor to access at least one database comprising user profiles using the first participant identifier, each user profile comprising a respective plurality of attributes for a respective user, to locate a user profile for the first participant including a plurality of first participant attributes;

comparing at least a portion of the second participant identifier, using the at least one processor, with at least one of the plurality of first participant attributes obtained from the user profile for the first participant; causing the at least one processor to access the at least one database to search for a user profile for the second participant;

classifying the communication, based on the comparing, as a system communication or an external network communication, using the at least one processor;

when the communication is classified as a system communication, producing a system routing message identifying an Internet address of a communication system node associated with the second participant device based on the user profile for the second participant, using the at least one processor, wherein the system routing message causes the communication to be established to the second participant device; and

when the communication is classified as an external network communication, producing an external network routing message identifying an Internet address associated with a gateway to an external network, using

38

the at least one processor, wherein the external network routing message causes the communication to the second participant device to be established using the gateway to the external network.

2. The method of claim **1**,

wherein producing the system routing message causes the communication to be established over an Internet protocol (IP) network; and

wherein producing the external network routing message causes a portion of a path taken by the communication to be established over a circuit switched network.

3. The method of claim **1**,

wherein the Internet address associated with the second participant device comprises an IP address or domain name of the communication system node associated with the second participant device, the communication system node being one of a plurality of communication system nodes each operably configured to provide communications services to a plurality of communication system subscribers.

4. The method of claim **1**, wherein:

(a) the causing the at least one processor to access the at least one database to search for the user profile for the second participant is based on the comparing at least a portion of the second participant identifier with the at least one of the plurality of first participant attributes; and

(b) the classifying the communication is based on the causing the at least one processor to access the at least one database to search for the user profile for the second participant.

5. The method of claim **2**, further comprising:

accessing the at least one database to locate communication blocking information for the second participant, using the at least one processor; and

blocking the communication when the communication blocking information identifies the first participant identifier.

6. The method of claim **1**, further comprising:

accessing the at least one database to locate communication forwarding information for the second participant, using the at least one processor; and

wherein classifying the communication is based on the communication forwarding information for the second participant.

7. The method of claim **6**, wherein the communication forwarding information for the second participant comprises a plurality of destination identifiers.

8. The method of claim **1**, further comprising:

processing a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication, wherein the plurality of communications are concurrent; and

producing a respective plurality of routing messages, based on the classifying of each respective one of the plurality of communications, each respective routing message identifying an Internet address associated with a recipient device or identifying an Internet address associated with a gateway to an external network.

9. The method of claim **1**, further comprising updating the first participant profile, via the at least one processor, to cause at least one of the plurality of first participant attributes to be modified.

US 9,813,330 B2

39

10. The method of claim 8, further comprising updating the first participant profile, via the at least one processor, to cause at least one of the plurality of first participant attributes to be modified.

11. The method of claim 2, wherein the external network routing message comprises a code identifying a communication supplier associated with the gateway to the external network.

12. An apparatus for routing communications in a communication system that includes an Internet-connected first participant device associated with a first participant, the first participant device operable to initiate a communication to a second participant device associated with a second participant, the apparatus comprising:

a controller comprising at least one processor in communication with at least one memory storing processor readable instructions, wherein the at least one processor is operably configured by the processor readable instructions to:

in response to initiation of the communication by the first participant device, receive over an Internet protocol (IP) network a first participant identifier and a second participant identifier;

access at least one database comprising user profiles using the first participant identifier, each user profile comprising a respective plurality of attributes for a respective user, to locate a user profile for the first participant including a plurality of first participant attributes;

compare at least a portion of the second participant identifier with at least one of the plurality of first participant attributes obtained from the user profile for the first participant to generate a comparison result;

access the at least one database to search for a user profile for the second participant;

classify the communication, based on the comparison result, as a system communication or an external network communication;

when the communication is classified as a system communication, produce a system routing message identifying an Internet address of a communication system node associated with the second participant device based on the user profile for the second participant, wherein the system routing message causes the communication to be established to the second participant device; and

when the communication is classified as an external network communication, produce an external network routing message identifying an Internet address associated with a gateway to an external network, wherein the external network routing message causes the communication to the second participant device to be established using the gateway to the external network.

13. The apparatus of claim 12,

wherein the at least one processor is operably configured to cause the communication to be established over an Internet protocol (IP) network when the communication is classified as a system communication; and

wherein the at least one processor is operably configured to cause a portion of a path taken by the communication to be established over a circuit switched network when the communication is classified as an external network communication.

14. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

access the at least one database to locate communication blocking information associated with the second participant; and

40

block the communication when the communication blocking information identifies the first participant identifier.

15. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

access the at least one database to locate communication forwarding information, associated with the second participant, comprising a plurality of destination identifiers; and

use the communication forwarding information associated with the second participant to classify the communication.

16. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

process a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication, wherein the plurality of communications are concurrent; and

produce a respective plurality of routing messages, based on the classifying of each respective one of the plurality of communications, each respective routing message identifying an Internet address associated with a recipient device or identifying an Internet address associated with a gateway to an external network.

17. An apparatus for routing communications in a communication system that includes an Internet-connected first participant device associated with a first participant, the first participant device operable to initiate a communication to a second participant device associated with a second participant, the apparatus comprising:

a controller comprising at least one processor in communication with at least one memory storing processor-readable instruction codes, wherein the at least one processor is operably configured by the processor-readable instruction codes to:

in response to initiation of the communication by the first participant device over the Internet, receive a first participant identifier and a second participant identifier;

access at least one database comprising user profiles using the first participant identifier, each user profile comprising a respective plurality of attributes for a respective user, to locate a user profile for the first participant including a plurality of first participant attributes;

compare at least a portion of the second participant identifier with at least one of the plurality of first participant attributes obtained from the user profile for the first participant to generate a comparison result;

access the at least one database to search for a user profile for the second participant and communication blocking information for the second participant;

classify the communication, based on at least one of the comparison result and the communication blocking information for the second participant, as a system communication, an external network communication or a blocked communication;

when the communication is classified as a system communication, produce a system routing message identifying a first Internet address associated with the second participant device, causing the communication to be established entirely over an Internet protocol (IP) network; and

US 9,813,330 B2

41

when the communication is classified as an external network communication, produce an external routing message identifying an Internet address associated with a gateway to a network that is external to the communication system, causing a portion of a path taken by the communication to be established over a circuit switched network.

18. The apparatus of claim 17,

wherein the first Internet address identifies a first communication system node operably configured to establish the communication to the second participant device, wherein the second participant device uses a second Internet address distinct from the first Internet address;

wherein the user profile for the second participant is associated with communication forwarding information identifying at least one other destination device for the communication; and

wherein the at least one processor is further operably configured to use the communication forwarding information for the second participant to cause the first communication system node to establish the communication to the at least one other destination device using a third Internet address distinct from the first and second Internet addresses.

19. The apparatus of claim 17, wherein the at least one processor is further operably configured to update the first participant profile to cause at least one of the plurality of first participant attributes to be modified.

20. A non-transitory computer readable medium encoded with

program code for directing the at least one processor to execute the method of claim 1.

21. The apparatus of claim 17,

wherein the first Internet address associated with the second participant device comprises an IP address or domain name of a communication system node associated with the second participant device, the communication system node being one of a plurality of communication system nodes each operably configured to provide communications services to a plurality of communication system subscribers.

22. The apparatus of claim 17, wherein the external routing message comprises a code identifying a communication supplier associated with the gateway to the network that is external to the communication system.

23. The apparatus of claim 17, wherein the at least one processor is further operably configured to:

access the at least one database to locate communication forwarding information, associated with the second participant, comprising a plurality of destination identifiers; and

use the communication forwarding information associated with the second participant to classify the communication.

24. The apparatus of claim 17, wherein the at least one processor is further operably configured to:

determine whether the second participant device is operably configured to communicate via the Internet; and if the second participant device is not operably configured to communicate via the Internet, classify the communication as the external network communication.

25. The apparatus of claim 17, wherein the at least one processor is further operably configured to:

determine whether the user profile for the second participant exists in the at least one database; and

42

if the user profile for the second participant does not exist in the at least one database, classify the communication as the external network communication.

26. The apparatus of claim 17, wherein the at least one processor is further operably configured to:

if the user profile for the second participant exists in the at least one database, classify the communication as the system communication, wherein the first Internet address associated with the second participant device is determined based on the user profile for the second participant.

27. The apparatus of claim 17,

wherein producing the external routing message comprises causing the at least one processor to select the Internet address associated with the gateway from among a plurality of Internet addresses associated with a respective plurality of gateways to the network that is external to the communication system, and wherein the external routing message comprises a code identifying a communication supplier associated with the gateway.

28. The method of claim 1,

wherein the Internet address of the communication system node comprises a first Internet address and wherein the second participant device uses a second Internet address distinct from the first Internet address;

wherein the user profile for the second participant is associated with communication forwarding information identifying at least one other destination device for the communication; and

wherein the at least one processor is further operably configured to use the communication forwarding information associated with the second participant to cause the communication system node to establish the communication to the at least one other destination device using a third Internet address distinct from the first and second Internet addresses.

29. The method of claim 1, further comprising causing the at least one processor to:

determine whether the second participant device is operably configured to communicate via the Internet; and if the second participant device is not operably configured to communicate via the Internet, classify the communication as the external network communication.

30. The method of claim 1, further comprising causing the at least one processor to:

determine whether the user profile for the second participant exists in the at least one database; and if the user profile for the second participant does not exist in the at least one database, classify the communication as the external network communication.

31. The method of claim 1, further comprising causing the at least one processor to:

if the user profile for the second participant exists in the at least one database, classify the communication as the system communication.

32. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 3.

33. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 4.

34. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 5.

35. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 6.

36. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 8.

37. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 28. 5

38. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 29.

39. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 30. 10

40. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 31. 15

* * * * *

EXHIBIT 3



US009826002B2

(12) **United States Patent**
Perreault et al.

(10) **Patent No.:** **US 9,826,002 B2**

(45) **Date of Patent:** ***Nov. 21, 2017**

(54) **PRODUCING ROUTING MESSAGES FOR VOICE OVER IP COMMUNICATIONS**

(58) **Field of Classification Search**

None
 See application file for complete search history.

(71) Applicant: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

(56) **References Cited**

(72) Inventors: **Clay Perreault**, Panama (PA); **Steve Nicholson**, Hamilton (NZ); **Rod Thomson**, North Vancouver (CA); **Johan Emil Viktor Björzell**, Vancouver (CA); **Fuad Arafa**, Vancouver (CA)

U.S. PATENT DOCUMENTS

4,747,124 A 5/1988 Ladd
 4,916,491 A 4/1990 Katoh
 (Continued)

(73) Assignee: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

FOREIGN PATENT DOCUMENTS

BR PI 0718312-7 A2 11/2013
 BR PI 0719682-2 A2 1/2014
 (Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

This patent is subject to a terminal disclaimer.

Canadian Office Action dated May 29, 2017 for Candian Patent Application No. CA 2,668,025.

(Continued)

(21) Appl. No.: **15/405,188**

Primary Examiner — Kodzovi Acolatse

(22) Filed: **Jan. 12, 2017**

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear LLP

(65) **Prior Publication Data**

US 2017/0126752 A1 May 4, 2017

(57) **ABSTRACT**

A process and apparatus to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated is disclosed. In response to initiation of a call by a calling subscriber, a caller identifier and a callee identifier are received. Call classification criteria associated with the caller identifier are used to classify the call as a public network call or a private network call. A routing message identifying an address, on the private network, associated with the callee is produced when the call is classified as a private network call and a routing message identifying a gateway to the public network is produced when the call is classified as a public network call.

Related U.S. Application Data

(63) Continuation of application No. 15/396,344, filed on Dec. 30, 2016, which is a continuation of application (Continued)


(51) **Int. Cl.**

H04L 29/06 (2006.01)
H04L 29/12 (2006.01)
H04M 7/00 (2006.01)

(52) **U.S. Cl.**

CPC **H04L 65/1069** (2013.01); **H04L 61/2007** (2013.01); **H04L 65/1033** (2013.01); **H04M 7/006** (2013.01)

40 Claims, 32 Drawing Sheets

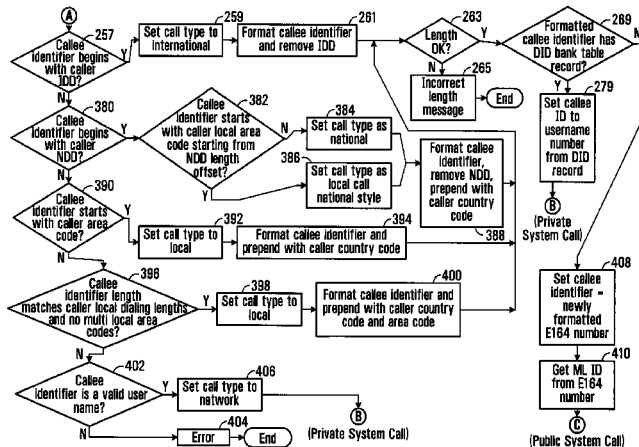

US 9,826,002 B2

Page 2

Related U.S. Application Data

- No. 14/877,570, filed on Oct. 7, 2015, now Pat. No. 9,537,762, which is a continuation of application No. 13/966,096, filed on Aug. 13, 2013, now Pat. No. 9,179,005, which is a continuation of application No. 12/513,147, filed as application No. PCT/CA2007/001956 on Nov. 1, 2007, now Pat. No. 8,542,815.
- (60) Provisional application No. 60/856,212, filed on Nov. 2, 2006.

(56)

References Cited

U.S. PATENT DOCUMENTS

4,992,971 A	2/1991	Hayashi	6,052,445 A	4/2000	Bashoura et al.
5,146,491 A	9/1992	Silver et al.	6,058,300 A	5/2000	Hanson
5,247,571 A	9/1993	Kay et al.	6,069,890 A	5/2000	White et al.
5,303,297 A	4/1994	Hillis	6,073,013 A	6/2000	Agre et al.
5,325,421 A	6/1994	Hou et al.	6,078,647 A	6/2000	D'Eletto
5,359,642 A	10/1994	Castro	6,104,704 A	8/2000	Buhler et al.
5,425,085 A	6/1995	Weinberger et al.	6,104,711 A	8/2000	Voit
5,440,621 A	8/1995	Castro	6,115,737 A	9/2000	Ely et al.
5,454,030 A	9/1995	de Oliveira et al.	6,128,304 A	10/2000	Gardell et al.
5,469,497 A	11/1995	Pierce et al.	6,137,869 A	10/2000	Voit et al.
5,506,893 A	4/1996	Buscher et al.	6,141,404 A	10/2000	Westerlage et al.
5,519,769 A	5/1996	Weinberger et al.	6,151,385 A	11/2000	Reich et al.
5,559,871 A	9/1996	Smith	6,173,272 B1	1/2001	Thomas et al.
5,590,133 A	12/1996	Billstrom et al.	6,188,752 B1	2/2001	Lesley
5,608,786 A	3/1997	Gordon	6,240,449 B1	5/2001	Nadeau
5,621,787 A	4/1997	McKoy et al.	6,243,689 B1	6/2001	Norton
5,633,913 A	5/1997	Talarino	6,249,573 B1	6/2001	Hudson
5,661,790 A	8/1997	Hsu	6,282,574 B1	8/2001	Voit
5,677,955 A	10/1997	Doggett et al.	6,298,062 B1	10/2001	Gardell et al.
5,712,907 A	1/1998	Wegner et al.	6,327,351 B1	12/2001	Walker et al.
5,719,926 A	2/1998	Hill	6,351,464 B1	2/2002	Galvin et al.
5,722,067 A	2/1998	Fognies et al.	6,359,880 B1	3/2002	Curry et al.
5,724,355 A	3/1998	Bruno et al.	6,430,275 B1	8/2002	Voit et al.
5,726,984 A	3/1998	Kubler et al.	6,434,143 B1	8/2002	Donovan
5,737,414 A	4/1998	Walker et al.	6,445,694 B1	9/2002	Swartz
5,742,596 A	4/1998	Baratz et al.	6,507,644 B1	1/2003	Henderson et al.
5,751,961 A	5/1998	Smyk	6,553,025 B1	4/2003	Kung et al.
5,768,521 A	6/1998	Dedrick	6,560,224 B1	5/2003	Kung et al.
5,793,762 A	8/1998	Penners et al.	6,574,328 B1	6/2003	Wood et al.
5,799,072 A	8/1998	Vulcan et al.	6,594,254 B1	7/2003	Kelly
5,802,502 A	9/1998	Gell et al.	6,597,686 B1	7/2003	Smyk
5,825,863 A	10/1998	Walker	6,597,783 B1	7/2003	Tada et al.
5,828,740 A	10/1998	Khuc et al.	6,603,977 B1	8/2003	Walsh et al.
5,838,682 A	11/1998	Dekelbaum et al.	6,636,833 B1	10/2003	Flitcroft et al.
5,845,267 A	12/1998	Ronen	6,650,641 B1	11/2003	Albert et al.
5,850,433 A	12/1998	Rondeau	6,674,745 B1	1/2004	Schuster et al.
5,864,610 A	1/1999	Ronen	6,674,850 B2	1/2004	Vu et al.
5,867,495 A	2/1999	Elliott et al.	6,724,860 B2	4/2004	Stumer et al.
5,883,810 A	3/1999	Franklin et al.	6,744,858 B1	6/2004	Ryan et al.
5,883,891 A	3/1999	Williams et al.	6,760,324 B1	7/2004	Scott et al.
5,889,774 A	3/1999	Mirashrafi et al.	6,766,159 B2	7/2004	Lindholm
5,905,736 A	5/1999	Ronen et al.	6,772,188 B1	8/2004	Cloutier
5,907,547 A	5/1999	Foladare et al.	6,775,534 B2	8/2004	Lindgren et al.
5,910,946 A	6/1999	Csapo	6,785,266 B2	8/2004	Swartz
5,915,005 A	6/1999	He	6,798,767 B1	9/2004	Alexander et al.
5,915,093 A	6/1999	Berlin et al.	6,819,929 B2	11/2004	Antonucci et al.
5,917,899 A	6/1999	Moss et al.	6,873,599 B1	3/2005	Han
5,923,659 A	7/1999	Curry et al.	6,892,184 B1	5/2005	Komen et al.
5,930,343 A	7/1999	Vasquez	6,934,279 B1	8/2005	Sollee et al.
5,937,045 A	8/1999	Yaoya et al.	6,937,713 B1	8/2005	Kung et al.
5,940,598 A	8/1999	Strauss et al.	6,947,531 B1	9/2005	Lewis et al.
5,953,504 A	9/1999	Sokal et al.	6,954,453 B1	10/2005	Schindler
5,956,391 A	9/1999	Melen et al.	6,961,334 B1	11/2005	Kaczmarczyk
5,970,477 A	10/1999	Roden	6,963,557 B2	11/2005	Knox
5,974,043 A	10/1999	Solomon	6,963,739 B2	11/2005	Dorenbosch et al.
5,991,291 A	11/1999	Asai et al.	6,985,440 B1	1/2006	Albert et al.
5,991,378 A	11/1999	Apel	6,993,015 B2	1/2006	Kobayashi
6,005,870 A	12/1999	Leung et al.	7,006,508 B2	2/2006	Bondy et al.
6,005,926 A	12/1999	Mashinsky	7,010,727 B1	3/2006	Stucker
6,014,379 A	1/2000	White et al.	7,027,564 B2	4/2006	James
6,021,126 A	2/2000	White et al.	7,042,985 B1	5/2006	Wright
6,029,062 A	2/2000	Hanson	7,046,658 B1	5/2006	Kundaje
			7,051,072 B2	5/2006	Stewart et al.
			7,055,174 B1	5/2006	Cope et al.
			7,068,668 B2	6/2006	Feuer
			7,068,772 B1	6/2006	Widger et al.
			7,079,526 B1	7/2006	Wipliez et al.
			7,120,682 B1	10/2006	Salama
			7,151,772 B1	12/2006	Kalmanek, Jr. et al.
			7,174,156 B1	2/2007	Mangal
			7,177,399 B2	2/2007	Dawson et al.
			7,203,478 B2	4/2007	Benco et al.
			7,212,522 B1	5/2007	Shankar et al.
			7,218,722 B1	5/2007	Turner et al.
			7,277,528 B2	10/2007	Rao et al.
			7,330,835 B2	2/2008	Deggendorf
			7,366,157 B1	4/2008	Valentine et al.
			7,400,881 B2	7/2008	Kallio
			7,426,492 B1	9/2008	Bishop et al.

US 9,826,002 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

7,436,835 B2	10/2008	Castleberry et al.	8,244,204 B1	8/2012	Chen et al.
7,437,665 B2	10/2008	Perham	8,275,404 B2	9/2012	Berger et al.
7,440,442 B2	10/2008	Grabelsky et al.	8,300,632 B2	10/2012	Davis et al.
7,447,707 B2	11/2008	Gaurav et al.	8,306,063 B2	11/2012	Erdal et al.
7,454,200 B2	11/2008	Cai et al.	8,315,521 B2	11/2012	Leiden et al.
7,454,510 B2	11/2008	Kleyman et al.	8,363,647 B2	1/2013	Fangman et al.
7,477,843 B1*	1/2009	Peeters H04Q 11/0062 398/49	8,364,172 B2	1/2013	Guanfeng et al.
7,486,664 B2	2/2009	Swartz	8,396,445 B2	3/2013	Crawford et al.
7,486,667 B2	2/2009	Feuer	8,410,907 B2	4/2013	Twitchell, Jr.
7,486,684 B2	2/2009	Chu et al.	8,417,791 B1	4/2013	Peretz et al.
7,512,117 B2	3/2009	Swartz	8,422,507 B2	4/2013	Björzell et al.
7,565,131 B2	7/2009	Rollender	8,423,791 B1	4/2013	Yu et al.
7,573,982 B2	8/2009	Breen et al.	8,427,981 B2	4/2013	Wyss et al.
7,580,886 B1	8/2009	Schulz	8,437,340 B2	5/2013	James
7,587,036 B2	9/2009	Wood et al.	8,462,915 B2	6/2013	Breen et al.
7,593,390 B2	9/2009	Lebizay	8,468,196 B1	6/2013	Roskind et al.
7,593,884 B2	9/2009	Rothman et al.	8,493,931 B1	7/2013	Nix
7,599,944 B2	10/2009	Gaurav et al.	8,509,225 B2	8/2013	Grabelsky et al.
7,639,792 B2	12/2009	Qiu et al.	8,526,306 B2	9/2013	Jungck et al.
7,644,037 B1	1/2010	Ostrovsky	8,532,075 B2	9/2013	Rassool et al.
7,647,500 B2	1/2010	Machiraju et al.	8,537,805 B2	9/2013	Björzell et al.
7,657,011 B1	2/2010	Zielinski et al.	8,542,815 B2	9/2013	Perreault et al.
7,664,495 B1	2/2010	Bonner et al.	8,543,477 B2	9/2013	Love et al.
7,676,215 B2	3/2010	Chin et al.	8,594,298 B2	11/2013	Klein et al.
7,676,431 B2	3/2010	O'Leary et al.	8,599,747 B1	12/2013	Saleem et al.
7,680,114 B2	3/2010	Yazaki et al.	8,599,837 B2	12/2013	Kyle
7,680,737 B2	3/2010	Smith et al.	8,605,714 B2	12/2013	Lebizay
7,702,308 B2	4/2010	Rollender	8,605,869 B1	12/2013	Mobarak et al.
7,715,413 B2	5/2010	Vaziri et al.	8,607,323 B2	12/2013	Yuan
7,715,821 B2	5/2010	Rollender	8,611,354 B2	12/2013	Keränen et al.
7,734,544 B2	6/2010	Schleicher	8,625,578 B2	1/2014	Roy et al.
7,738,384 B2	6/2010	Pelletier	8,627,211 B2	1/2014	Kropivny
7,764,777 B2	7/2010	Wood et al.	8,630,234 B2	1/2014	Björzell et al.
7,764,944 B2	7/2010	Rollender	8,634,838 B2	1/2014	Hellwig et al.
7,765,261 B2	7/2010	Kropivny	8,675,566 B2	3/2014	Huttunen et al.
7,765,266 B2	7/2010	Kropivny	8,682,919 B1	3/2014	Golliher
7,774,711 B2	8/2010	Valeski	8,702,505 B2	4/2014	Kropivny
7,797,459 B1	9/2010	Roy et al.	8,713,098 B1	4/2014	Adya et al.
7,882,011 B2	2/2011	Sandhu et al.	8,724,643 B2	5/2014	Feuer
7,894,441 B2	2/2011	Yazaki et al.	8,749,610 B1	6/2014	Gossweiler et al.
7,899,742 B2	3/2011	Benkert et al.	8,750,290 B2	6/2014	Vance et al.
7,907,551 B2	3/2011	Croy et al.	8,763,081 B2	6/2014	Bogdanovic et al.
7,907,714 B2	3/2011	Baniak et al.	8,767,717 B2	7/2014	Siegel et al.
7,929,955 B1	4/2011	Bonner	8,768,951 B2	7/2014	Crago
7,944,909 B2	5/2011	James	8,774,171 B2	7/2014	Mitchell
7,950,046 B2	5/2011	Kropivny	8,774,378 B2	7/2014	Björzell et al.
7,958,233 B2	6/2011	Gutierrez	8,774,721 B2	7/2014	Hertel et al.
7,965,645 B2	6/2011	Pelletier	8,780,703 B1	7/2014	Eidelson et al.
7,979,529 B2	7/2011	Kreusch et al.	8,792,374 B1	7/2014	Jain et al.
7,995,589 B2	8/2011	Sollee et al.	8,792,905 B1	7/2014	Li et al.
8,024,785 B2	9/2011	Andress et al.	8,804,705 B2	8/2014	Fangman et al.
8,027,333 B2	9/2011	Grabelsky et al.	8,805,345 B2	8/2014	Ling et al.
8,036,366 B2	10/2011	Chu	8,810,392 B1	8/2014	Teller et al.
8,041,022 B1	10/2011	Andreasen et al.	8,819,566 B2	8/2014	Mehin et al.
8,050,273 B2	11/2011	Gass	8,837,360 B1	9/2014	Mishra et al.
8,060,887 B2	11/2011	Kropivny	8,838,539 B1	9/2014	Ashcraft et al.
8,078,164 B2	12/2011	Ganesan	8,848,887 B2	9/2014	Willman et al.
8,111,690 B2	2/2012	Hussain et al.	8,862,701 B2	10/2014	Havriluk
8,116,307 B1	2/2012	Thesayi et al.	8,885,609 B2	11/2014	Nix
8,125,982 B2	2/2012	Feuer	8,903,051 B2	12/2014	Li et al.
8,127,005 B2	2/2012	Gutierrez	8,903,360 B2	12/2014	Celi, Jr. et al.
8,145,182 B2	3/2012	Rudolf et al.	8,909,556 B2	12/2014	Huxham
8,161,078 B2	4/2012	Gaurav et al.	8,938,209 B2	1/2015	Crawford et al.
8,166,533 B2	4/2012	Yuan	8,938,534 B2	1/2015	Le et al.
8,166,547 B2	4/2012	Bevan et al.	8,948,061 B2	2/2015	Sridhar
8,189,568 B2	5/2012	Qiu et al.	8,972,612 B2	3/2015	Le et al.
8,190,739 B2	5/2012	Gutierrez	8,982,719 B2	3/2015	Seetharaman et al.
8,200,575 B2	6/2012	Torres et al.	8,995,428 B2	3/2015	Haster
8,204,044 B2	6/2012	Lebizay	9,003,306 B2	4/2015	Mehin et al.
8,219,115 B1	7/2012	Nelissen	9,137,385 B2	9/2015	Björzell et al.
8,223,927 B2	7/2012	Di Serio et al.	9,143,608 B2	9/2015	Björzell et al.
8,228,837 B2	7/2012	Sheriff et al.	9,154,417 B2	10/2015	Huttunen et al.
8,228,897 B2	7/2012	Mitchell	9,179,005 B2	11/2015	Perreault et al.
8,243,730 B1	8/2012	Wong et al.	9,537,762 B2	1/2017	Perreault et al.
			9,549,071 B2	1/2017	Björzell et al.
			9,565,307 B2	2/2017	Björzell et al.
			2001/0027478 A1	10/2001	Meier et al.
			2001/0052081 A1	12/2001	McKibben et al.
			2002/0002041 A1	1/2002	Lindgren et al.

US 9,826,002 B2

Page 4

(56)

References Cited

U.S. PATENT DOCUMENTS							
2002/0018445	A1	2/2002	Kobayashi	2006/0268921	A1	11/2006	Ekstrom et al.
2002/0051518	A1	5/2002	Bondy et al.	2006/0281437	A1	12/2006	Cook
2002/0057764	A1	5/2002	Salvucci et al.	2007/0016524	A1	1/2007	Diveley et al.
2002/0116464	A1	8/2002	Mak	2007/0036139	A1	2/2007	Patel et al.
2002/0122391	A1	9/2002	Shalit	2007/0036143	A1	2/2007	Alt et al.
2002/0122547	A1	9/2002	Hinchey et al.	2007/0047548	A1	3/2007	Yazaki et al.
2002/0141352	A1	10/2002	Fangman et al.	2007/0053382	A1	3/2007	Bevan et al.
2002/0150080	A1*	10/2002	Bhattacharya H04L 29/06027 370/351	2007/0064919	A1	3/2007	Chen et al.
				2007/0092070	A1	4/2007	Croy et al.
				2007/0112964	A1	5/2007	Guedalia et al.
				2007/0115935	A1	5/2007	Qiu et al.
				2007/0121590	A1*	5/2007	Turner H04L 12/66 370/352
2003/0012196	A1	1/2003	Ramakrishnan	2007/0121593	A1	5/2007	Vance et al.
2003/0043974	A1	3/2003	Emerson, III	2007/0121602	A1*	5/2007	Sin H04L 12/6418 370/356
2003/0095539	A1	5/2003	Feuer	2007/0127676	A1	6/2007	Khadri
2003/0179747	A1	9/2003	Pyke et al.	2007/0174469	A1	7/2007	Andress et al.
2003/0200311	A1	10/2003	Baum	2007/0217354	A1	9/2007	Buckley
2003/0219103	A1	11/2003	Rao et al.	2007/0220038	A1	9/2007	Crago
2004/0022237	A1	2/2004	Elliott et al.	2007/0253418	A1	11/2007	Shiri et al.
2004/0034793	A1	2/2004	Yuan	2007/0253429	A1	11/2007	James
2004/0157629	A1	8/2004	Kallio et al.	2007/0263609	A1	11/2007	Mitchell
2004/0165709	A1	8/2004	Pence et al.	2007/0297376	A1	12/2007	Gass
2004/0181599	A1	9/2004	Kreusch et al.	2008/0013523	A1	1/2008	Nambakkam
2004/0202295	A1	10/2004	Shen et al.	2008/0037715	A1	2/2008	Prozeniuk et al.
2004/0203565	A1	10/2004	Chin et al.	2008/0043718	A1*	2/2008	Chu H04M 7/0075 370/352
2004/0203582	A1	10/2004	Dorenbosch et al.	2008/0056235	A1	3/2008	Albina et al.
2004/0218748	A1	11/2004	Fisher	2008/0056243	A1	3/2008	Roy et al.
2004/0240439	A1	12/2004	Castleberry et al.	2008/0056302	A1	3/2008	Erdal et al.
2004/0255126	A1	12/2004	Reith	2008/0063153	A1	3/2008	Krivorot et al.
2005/0007999	A1	1/2005	Becker et al.	2008/0160953	A1	7/2008	Mia et al.
2005/0025043	A1	2/2005	Mussman et al.	2008/0166999	A1	7/2008	Guedalia et al.
2005/0063519	A1	3/2005	James	2008/0167019	A1	7/2008	Guedalia et al.
2005/0069097	A1	3/2005	Hanson et al.	2008/0167020	A1	7/2008	Guedalia et al.
2005/0083911	A1	4/2005	Grabelsky et al.	2008/0167039	A1	7/2008	Guedalia et al.
2005/0094651	A1	5/2005	Lutz et al.	2008/0187122	A1	8/2008	Baker
2005/0131813	A1	6/2005	Gallagher et al.	2008/0188198	A1	8/2008	Patel et al.
2005/0169248	A1	8/2005	Truesdale et al.	2008/0188227	A1	8/2008	Guedalia et al.
2005/0171898	A1	8/2005	Bishop et al.	2008/0205378	A1	8/2008	Wyss et al.
2005/0174937	A1	8/2005	Scoggins et al.	2008/0310599	A1	12/2008	Purnadi et al.
2005/0177843	A1	8/2005	Williams	2009/0003535	A1	1/2009	Grabelsky et al.
2005/0188081	A1	8/2005	Gibson et al.	2009/0017842	A1	1/2009	Fukasaku
2005/0190892	A1	9/2005	Dawson et al.	2009/0028146	A1	1/2009	Kleyman et al.
2005/0192897	A1	9/2005	Rogers et al.	2009/0129566	A1	5/2009	Feuer
2005/0192901	A1	9/2005	McCoy et al.	2009/0135724	A1	5/2009	Zhang et al.
2005/0198499	A1	9/2005	Salapaka et al.	2009/0135735	A1	5/2009	Zhang et al.
2005/0202799	A1	9/2005	Rollender	2009/0141883	A1	6/2009	Bastien
2005/0222952	A1	10/2005	Garrett et al.	2009/0213839	A1	8/2009	Davis et al.
2005/0267842	A1	12/2005	Weichert et al.	2009/0214000	A1	8/2009	Patel et al.
2005/0287979	A1	12/2005	Rollender	2009/0238168	A1	9/2009	Lavoie et al.
2006/0006224	A1	1/2006	Modi	2009/0268615	A1	10/2009	Pelletier
2006/0007940	A1	1/2006	Sollee et al.	2009/0292539	A1	11/2009	Jaroker
2006/0013266	A1	1/2006	Vega-Garcia et al.	2009/0296900	A1	12/2009	Breen et al.
2006/0030290	A1	2/2006	Rudolf et al.	2009/0325558	A1	12/2009	Pridmore et al.
2006/0036522	A1	2/2006	Perham	2010/0002701	A1	1/2010	Hsieh et al.
2006/0072547	A1	4/2006	Florkey et al.	2010/0008345	A1	1/2010	Lebizay
2006/0072550	A1	4/2006	Davis et al.	2010/0039946	A1	2/2010	Imbimbo et al.
2006/0078094	A1	4/2006	Breen et al.	2010/0083364	A1	4/2010	Gutierrez
2006/0093135	A1	5/2006	Fiatal et al.	2010/0086119	A1	4/2010	De Luca et al.
2006/0095320	A1	5/2006	Jones	2010/0105379	A1	4/2010	Bonner et al.
2006/0109960	A1	5/2006	D'Evelyn et al.	2010/0114896	A1	5/2010	Clark et al.
2006/0111116	A1	5/2006	Palmer et al.	2010/0115018	A1	5/2010	Yoon et al.
2006/0116892	A1	6/2006	Grimes et al.	2010/0142382	A1	6/2010	Jungck et al.
2006/0142011	A1	6/2006	Kallio	2010/0150138	A1	6/2010	Björnsell et al.
2006/0146797	A1	7/2006	Lebizay	2010/0150328	A1	6/2010	Perrault et al.
2006/0153342	A1	7/2006	Sasaki	2010/0172345	A1	7/2010	Björnsell et al.
2006/0160565	A1	7/2006	Singh et al.	2010/0177671	A1	7/2010	Qiu et al.
2006/0177035	A1	8/2006	Cope et al.	2010/0220852	A1	9/2010	Willman et al.
2006/0189303	A1	8/2006	Rollender	2010/0233991	A1	9/2010	Crawford et al.
2006/0195398	A1	8/2006	Dheer et al.	2010/0246589	A1	9/2010	Pelletier
2006/0195584	A1*	8/2006	Baumann H04M 3/54 709/227	2010/0272242	A1	10/2010	Croy et al.
2006/0205383	A1	9/2006	Rollender et al.	2010/0278534	A1	11/2010	Leiden et al.
2006/0209768	A1	9/2006	Yan et al.	2010/0316195	A1	12/2010	Di Serio et al.
2006/0233317	A1	10/2006	Coster et al.	2011/0013541	A1	1/2011	Croy et al.
2006/0248186	A1	11/2006	Smith	2011/0072095	A1	3/2011	Havriluk
2006/0251056	A1	11/2006	Feuer	2011/0122827	A1	5/2011	Björnsell et al.
2006/0258328	A1	11/2006	Godoy	2011/0153809	A1	6/2011	Ghanem et al.
2006/0264200	A1	11/2006	Laiho et al.				

US 9,826,002 B2

Page 5

(56)		References Cited	CA	2 299 037	A1	8/2000
			CA	2 437 275	A1	10/2002
		U.S. PATENT DOCUMENTS	CA	2598200	A1	2/2008
			CA	2668025	A1	5/2008
			CA	2670510	A1	6/2008
2011/0167164	A1	7/2011 Gutierrez	CA	2 681 984	A1	10/2008
2011/0176541	A1	7/2011 James	CA	2 690 236	A1	12/2008
2011/0201321	A1	8/2011 Bonner	CA	2 659 007	A1	9/2009
2011/0208859	A1	8/2011 Gutierrez	CA	2732148	A1	2/2010
2011/0235543	A1	9/2011 Seetharaman et al.	CA	2 778 905	A1	8/2010
2011/0255553	A1	10/2011 Bobba et al.	CA	2812174	A1	3/2011
2011/0261717	A1	10/2011 Akuzuwa et al.	CA	1498029	A	5/2004
2011/0267986	A1	11/2011 Grabelsky et al.	CN	1498482	A	5/2004
2011/0273526	A1	11/2011 Mehin et al.	CN	1668137	A	9/2005
2011/0276903	A1	11/2011 Mehin et al.	CN	1274114	C	9/2006
2011/0276904	A1	11/2011 Mehin et al.	CN	101005503	A	7/2007
2011/0292929	A1	12/2011 Haster	CN	101069390	A	11/2007
2012/0014383	A1	1/2012 Geromel et al.	CN	101095329	A	12/2007
2012/0089717	A1	4/2012 Chen	CN	101584150	A	11/2009
2012/0096145	A1	4/2012 Le et al.	CN	101584166	A	11/2009
2012/0099599	A1	4/2012 Keränen et al.	CN	101605342	A	12/2009
2012/0113981	A1	5/2012 Feuer	CN	1498029	B	5/2010
2012/0155333	A1	6/2012 Yoon et al.	CN	101772929	A	7/2010
2012/0170574	A1	7/2012 Huttunen et al.	CN	101069390	B	12/2010
2012/0195236	A1	8/2012 Knight	CN	102137024	A	7/2011
2012/0195415	A1	8/2012 Wyss et al.	CN	102457494	A	5/2012
2012/0227101	A1	9/2012 Yuan	CN	102484656	A	5/2012
2012/0250624	A1	10/2012 Lebizay	CN	102572123	A	7/2012
2012/0259975	A1	10/2012 Le et al.	CN	101095329	B	10/2012
2012/0270554	A1	10/2012 Hellwig et al.	CN	101605342	B	12/2012
2012/0282881	A1	11/2012 Mitchell	CN	102833232	A	12/2012
2012/0314699	A1	12/2012 Qiu et al.	CN	101005503	B	1/2013
2013/0039226	A1	2/2013 Sridhar	CN	101772929	B	7/2014
2013/0097308	A1	4/2013 Le et al.	CN	102457494	B	10/2014
2013/0114589	A1	5/2013 Fangman et al.	CN	602 01 827	T2	11/2005
2013/0128879	A1	5/2013 Kyle	DE	11 2005 003 306	T5	1/2008
2013/0148549	A1	6/2013 Crawford et al.	DE	601 33 316	T2	7/2008
2013/0173534	A1	7/2013 Nelakonda et al.	DE	603 17 751	T2	11/2008
2013/0223276	A1	8/2013 Padgett	DE	0 841 832	A2	5/1998
2013/0229950	A1	9/2013 Björnsell et al.	EP	0 841 832	A3	5/1999
2013/0237198	A1	9/2013 Vashi et al.	EP	1 032 224	A2	8/2000
2013/0254301	A1	9/2013 Lin et al.	EP	1 032 224	A3	2/2001
2013/0272297	A1	10/2013 Breen et al.	EP	1 244 250	A1	9/2002
2013/0281147	A1	10/2013 Denman et al.	EP	1 266 516	A2	12/2002
2013/0287006	A1	10/2013 Nix	EP	1 362 456	A2	11/2003
2013/0310002	A1	11/2013 Celi, Jr. et al.	EP	1 371 173	A1	12/2003
2013/0318166	A1	11/2013 Jungck et al.	EP	1 389 862	A1	2/2004
2013/0329722	A1	12/2013 Perrault et al.	EP	1 411 743	A1	4/2004
2013/0329864	A1	12/2013 Björnsell et al.	EP	1 389 862	B1	11/2004
2014/0010119	A1	1/2014 Björnsell et al.	EP	1 526 697	A2	4/2005
2014/0016764	A1	1/2014 Björnsell et al.	EP	1 362 456	A4	5/2005
2014/0024367	A1	1/2014 Björnsell et al.	EP	1 575 327	A1	9/2005
2014/0101749	A1	4/2014 Yuan	EP	1 610 583	A1	12/2005
2014/0141884	A1	5/2014 Kropivny	EP	1 526 697	A3	3/2006
2014/0153477	A1	6/2014 Huttunen et al.	EP	1 721 446	A1	11/2006
2014/0211789	A1	7/2014 Feuer	EP	1 829 300	A1	9/2007
2014/0215642	A1	7/2014 Huxham	EP	1 371 173	B1	11/2007
2014/0220944	A1	8/2014 Balasubramanian	EP	1 411 743	B1	11/2007
2014/0244393	A1	8/2014 Rimmer et al.	EP	1 362 456	B1	3/2008
2014/0247730	A1	9/2014 Thota et al.	EP	1 974 304	A2	10/2008
2014/0269624	A1	9/2014 Khay-Ibbat et al.	EP	1 974 304	A4	10/2008
2014/0307858	A1	10/2014 Li et al.	EP	1 610 583	B1	8/2009
2014/0321333	A1	10/2014 Björnsell et al.	EP	2 084 868		8/2009
2014/0324969	A1	10/2014 Riddle	EP	2 090 024		8/2009
2014/0337961	A1	11/2014 Chien et al.	EP	2 127 232	A1	12/2009
2014/0337962	A1	11/2014 Brandstatter	EP	2 165 489	A1	3/2010
2014/0349602	A1	11/2014 Majumdar et al.	EP	2 215 755	A1	8/2010
2015/0327320	A1	11/2015 Huttunen et al.	EP	2 227 048	A1	9/2010
2015/0358470	A1	12/2015 Björnsell et al.	EP	2 127 232	A4	3/2011
2016/0006882	A1	1/2016 Björnsell et al.	EP	2 165 489	A4	3/2011
2016/0028619	A1	1/2016 Perreault et al.	EP	2 311 292		4/2011
2017/0104868	A1	4/2017 Björnsell et al.	EP	1 829 300	A4	5/2012
2017/0111265	A1	4/2017 Perreault et al.	EP	2 449 749	A1	5/2012
2017/0126752	A1	5/2017 Perreault et al.	EP	2 478 678		7/2012
2017/0142256	A1	5/2017 Björnsell et al.	EP	2 215 755	A4	10/2012
			EP	1 829 300	B1	11/2012
			EP	2 449 749	B1	3/2014
			EP	1 266 516	B1	5/2014
			GB	2 332 337	A	6/1999
		FOREIGN PATENT DOCUMENTS				
CA	2 218 218	A1	10/1997			
CA	2249668	A1	4/1999			

US 9,826,002 B2

Page 6

(56)

References Cited

FOREIGN PATENT DOCUMENTS

ID	W00200902627	9/2009
IN	24/2009	6/2009
IN	29/2009	7/2009
IN	287412	9/2017
JP	2011-199384 A	10/2011
KR	10-2009-0086428 A	8/2009
KR	10-2009-0095621 A	9/2009
MX	2009004811 A	8/2009
MX	2009005751 A	8/2009
SG	151991 A1	6/2009
SG	152752 A1	6/2009
SG	155474	10/2009
WO	WO 01/50693 A1	7/2001
WO	WO 01/69899 A2	9/2001
WO	WO 01/69899 A3	9/2001
WO	WO 01/80587 A1	10/2001
WO	WO 01/89145 A2	11/2001
WO	WO 02/082728 A1	10/2002
WO	WO 02/082782 A2	10/2002
WO	WO 02/082782 A3	10/2002
WO	WO 03/027801 A2	4/2003
WO	WO 2005/084002 A1	9/2005
WO	WO 2006/067269 A1	6/2006
WO	WO 2006/072099 A1	7/2006
WO	WO 2006/078175 A2	7/2006
WO	WO 2006/078175 A3	7/2006
WO	WO 2007/044454 A2	4/2007
WO	WO 2007/056158 A2	5/2007
WO	WO 2007/087077 A2	8/2007
WO	WO 2007/087077 A3	8/2007
WO	WO 2008/027065 A1	3/2008
WO	WO 2008/052340 A1	5/2008
WO	WO 2008/064481 A1	6/2008
WO	WO 2008/085614 A2	7/2008
WO	WO 2008/085614 A3	7/2008
WO	WO 2008/086350 A2	7/2008
WO	WO 2008/086350 A3	7/2008
WO	WO 2008/103652 A1	8/2008
WO	WO 2008/116296 A1	10/2008
WO	WO 2008/085614 A8	12/2008
WO	WO 2008/151406 A1	12/2008
WO	WO 2008/151406 A8	12/2008
WO	WO 2009/070202 A1	6/2009
WO	WO 2009/070278 A1	6/2009
WO	WO 2010/012090 A2	2/2010
WO	WO 2011/000405 A1	1/2011
WO	WO 2011/032256 A1	3/2011
WO	WO 2013/013189 A2	1/2013
WO	WO 2013/120069 A1	8/2013
WO	WO 2014/066155 A2	5/2014
WO	WO 2014/117599 A1	8/2014
WO	WO 2014/166258 A1	10/2014

OTHER PUBLICATIONS

Canadian Office Action dated Jun. 9, 2017 for Candian Patent Application No. CA 2,916,217.

European Examination Report dated May 12, 2017 for European Patent Application No. EP 09-802-316.1.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01201, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pp.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01198, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Order, Conduct of Proceeding, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 37, Filed: Jun. 13, 2017, 3 pages.

Canadian Office Action dated Mar. 31, 2017 for Canadian Patent Application No. CA 2,916,220.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated May 9, 2017, 63 pages.

Petitioner Apple Inc. Exhibit 1003, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.

Petitioner Apple Inc. Exhibit 1004, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.

Petitioner Apple Inc. Exhibit 1005, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Declaration of Henry H. Hough, PhD, 45 pages.

Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. Patent of *Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 9, 2017. 54 pages.

Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.

Petitioner Apple Inc. Exhibit 1007, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.

Petitioner Apple Inc. Exhibit 1008, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Declaration of Henry H. Hough, PhD, 41 pages.

Petitioner Apple Inc. Exhibit 1009, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, Case

US 9,826,002 B2

Page 7

(56) References Cited

OTHER PUBLICATIONS

No. IPR2017-01382; U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated May 8, 2017, 84 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc., Petitioner v. Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 8,542,815, Inter Partes Review No. IPR2017-01382; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; with Appendices A through II, 2113 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix A, James R. Bress, Curriculum Vitae, 26 pages. Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix B, Chapter 5, Telecommunications Essentials, Lillian Goleniewski, © 2002, 40 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix C, Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 41 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix D, ITU-T Recommendation E.164 (May 1997), 27 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix E, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 3-8-3-14, 9 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix F, Chapter 4, Telecommunications Essentials, Lillian Goleniewski, © 2002, pp. 99-100, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix G, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 18-1-18-20, 22 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix H, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 2, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix I, Telecommunications Act of 1996, 104th Congress of the U.S.A., Jan. 1996, 128 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix J, Perspectives on the AIN Architecture, Berman et al., IEEE Communications Magazine, Feb. 1992, 6 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix K, U.S. Pat. No. 7,907,714 B2, to Baniak et al., 21 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix L, The IMS, Poikselka & Mayer, © 2009, John Wiley & Sons Ltd, Chapter 1 Introduction, 14 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix M, The IMS, Poikselka & Mayer, © 2009, John Wiley & Sons Ltd, pp. 24-25 and 86-94, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix N, Chapter 9, Telecommunications Essentials, Lillian Goleniewski, © 2002, 42 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix O, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, pp. 238-239, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix P, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 4, pp. 67-86, 22 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Q, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 5, pp. 87-112, 28 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix R, Telecommunications Essentials, Lillian Goleniewski, © 2002, p. 221, 3 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix S, Network Working Group, RFC (Request for Comments): 1122, Internet Engineering Task Force, R. Braden, Ed., Oct. 1989, pp. 18-25, 9 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix T, RFC (Request for Comments): 791, Internet

Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix U, Network Working Group, RFC (Request for Comments): 1034, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix V, Network Working Group, RFC (Request for Comments): 1035, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix W, Network Working Group, RFC (Request for Comments): 3761, P. Faltstrom et al., Apr. 2004, pp. 1-18, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix X, U.S. Pat. No. 6,594,254 131, to Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Y, ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Z, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 6-306-6-309, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix AA, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-10-14-13, 6 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix BB, The Internet Engineering Task Force (IETF®), May 5, 2017, 2 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix CC, Network Working Group, RFC (Request for Comments): 3261, J. Rosenberg et al., Jun. 2002, 269 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix DD, Network Working Group, RFC (Request for Comments): 3666, A. Johnston et al., Dec. 2003, 118 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix EE, Network Working Group, RFC (Request for Comments): 3665, A. Johnston et al., Dec. 2003, 94 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix FF, Network Working Group, RFC (Request for Comments): 2327, M. Handley et al., Apr. 1998, 42 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix GG, ITU-T Recommendation Q.931 (May 1998), 345 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix HH, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-76-14-77, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix II, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01382; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01382; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01382; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003 to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01382; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01382; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner, v. Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, Administrative Patent Judges, 33 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01382; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01382; RFC (Request for Comments): 791, Internet Protocol,

US 9,826,002 B2

Page 8

(56) References Cited

OTHER PUBLICATIONS

DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01382; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01382; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc., Petitioner v. Digifonica (International) Limited* Patent Owner, Case No. IPR2017-01383; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 8, 2017, 92 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc., Petitioner v. Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 9,179,005, Inter Partes Review No. IPR2017-01383; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2094 pages.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01383; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01383; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01383; U.S. Publication No. 2004/0218748 A1, Published Nov. 4, 2004, by Stephen Fisher, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01383; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01383; U.S. Pat. No. 6,674,850 B2, Issued Jan. 6, 2004, to Vu et al., 10 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01383; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner v. Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, Administrative Patent Judges, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01383; Patent Owner Response to Petition, Filed Feb. 10, 2017, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, 78 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc., Petitioner v. Digifonica (International) Limited* Patent Owner, Case No. IPR2017-01384; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 7, 2017, 70 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc., Petitioner v. Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 9,179,005, Inter Partes Review No. IPR2017-01384; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2085 pages.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01384; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01384; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01384; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01384; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01384; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner v. Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, Administrative Patent Judges, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01384; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01384; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01384; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01384; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Petitioner's Reply to Patent Owner's Response, Dated May 17, 2017, 34 pages.

Petitioner Apple Inc. Exhibit 1007, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1008, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1009, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Johan Emil Viktor Bjorsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc., Petitioner v. Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-

(56) **References Cited**

OTHER PUBLICATIONS

01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . ." from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Email dated May 1, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Petitioner's Reply to Patent Owner's Response, Paper 34, Dated May 17, 2017, 33 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1015, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Johan Emil Viktor Bjorsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1016, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . ." from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1017, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Email dated May 1, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Abrazhevich, Dennis. "Electronic Payment Systems: a User-Centered Perspective and Interaction Design," *Thesis under the auspices of the J.F. Schouten School for User-System Interaction Research*, Technische Universiteit Eindhoven, Netherlands, 2004, pp. Cover page-p. 189.

Baker et al., "Cisco Support for Lawful Intercept in IP Networks." Internet Draft—working document of the Internet Engineering Task Force (IETF), accessible at <http://www.ietf.org/ietf/lid-abstracts.txt>, Apr. 2003, expires Sep. 30, 2003, pp. 1-15.

F. Baker et al. "RFC 3924—Cisco Architecture for Lawful Intercept in IP Networks." Oct. 2004.

Bhushan et al., "Federated Accounting: Service Charging and Billing in a Business-to-Business Environment," 0-7803-6719-7/01, © 2001 IEEE, pp. 107-121.

Cisco. "Lawful Intercept Requirements Summary." <http://www.faqs.org/rfcs/rfc3924.html>. Nov. 8, 2006.

DOTS IP Address Validation, "Overview", http://www.serviceobjects.com/products/dots_ipgeo.asp; printed Jun. 21, 2012.

Dots Phone Exchange, "Overview", <http://www.serviceobjects.com/demos/PhoneExchangeDemo.asp> (URL no longer valid, current URL is <http://www.serviceobjects.com/products/phone/phone-exchange>); printed Jun. 21, 2012.

ETSI Technical Specification. "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 5: Service-specific details for IP Multimedia Services." Apr. 2008, 25 pgs, v.2.3.1, France.

Handley, M. et al. "RFC 2543—SIP: Session Initiation Protocol." Mar. 1999.

IETF ENUM WG R STASTNY OEFEG Informational Numbering for VOIP and Other IP Communications: "Numbering for ViOP and other IP Communications, draft-stastny-enum-numbering-voip-00.txt", Oct. 1, 2003, Oct. 1, 2003, pp. 1-43, XP015035676, ISSN: 0000-0004.

IP2Location, <http://www.ip2location.com/>; printed Jun. 20, 2012.

ETSI TS 122 173 V12.7.0 (Oct. 2014) Digital cellular telecommunications system (Phase 2+); Technical Specification 8.2.2.3—Interoperability with PSTN/ISDN and mobile CS Networks, Contents and Forward, pp. 1-9; Sec. 8, pp. 14-17.

Huitema et al., "Architecture for Internet Telephony Service for Residential Customers," Academic Paper for *Bellcore*, Mar. 2, 1999, pp. 1-14.

Jajszczyk et al., "Emergency Calls in Flow-Aware Networks," *IEEE Communications Letters*, vol. 11, No. 9, Sep. 2007, pp. 753-755.

Ketchpel et al. "U-PAI: A universal payment application interface" *Second USENIX Workshop on Electronic Commerce Proceedings*, Aug. 1996, pp. 1-17.

Kim et al., "An Enhanced VoIP Emergency Services Prototype," *Proceedings of the 3rd International ISCRAM Conference* (B. Van de Walle and M. Turoff, eds.), Newark, NJ (USA), May 2006, pp. 1-8.

Kornfeld et al., "DVB-H and IP Datacast—Broadcast to Handheld Devices," *IEEE Transactions on Broadcasting*, vol. 53, No. 1, Mar. 2007, pp. 161-170.

Kortebi et al., "SINR-Based Routing in Multi-Hop Wireless Networks to Improve VoIP Applications Support," 1-4244-0667-6/07, © 2007 IEEE, pp. 491-496.

Lee et al., "VoIP Interoperation with KT-NGN," in *The 6th International Conference on Advanced Communication Technology*, Technical Proceedings, 2004, pp. 126-128, accompanied by Title and Contents—4 pages.

(56) **References Cited**

OTHER PUBLICATIONS

- Lin et al., "Effective VoIP Call Routing in WLAN and Cellular Integration," *IEEE Communications Letters*, vol. 9, No. 10, Oct. 2005, pp. 874-876.
- Lind AT&T S: "ENUM Call Flows for VoIP Interworking; draft-lind-enum-callflows-03.txt", Feb. 1, 2002, No. 3, Feb. 1, 2002, pp. 1-17, XP015004214, ISSN: 0000-0004.
- List of North American Numbering Plan area codes, http://en.wikipedia.org/wiki/List_of_NANP_area_codes; printed Jun. 20, 2012.
- Ma et al., "Realizing MPEG4 Video Transmission Based on Mobile Station over GPRS," 0-7803-9335-X/05, © 2005 IEEE, pp. 1241-1244.
- Mintz-Habib et al., "A VoIP Emergency Services Architecture and Prototype," {mm2571,asr,hgs,xiaotaow}@cs.columbia.edu, 0-7803-9428-3/05, © 2005 IEEE, pp. 523-528.
- Moberg & Drummond, "MIME-Based Secure Peer-to-Peer Business Data Interchange Using HTTP, Applicability Statement 2 (AS2)," *Network Working Group, Request for Comments: 4130, Category: Standards Track*, Copyright © The Internet Society Jul. 2005, pp. 1-47.
- Munir, Muhammad Farukh, "Study of an Adaptive Scheme for Voice Transmission on IP in a Wireless Networking Environment 802.11e," *Dept. of Networks and Distributed Computing, Ecole Supérieure En Sciences Informatiques (ESSI), Université De Nice*, Jun. 2005, (pp. 1-35), Best Available Copy—pp. 1-11.
- Rosenberg, et al.; "RFC 3261—SIP: Session Initiation Protocol", Jun. 2002.
- Sippy SIP B2BUA. "About Sippy RTPproxy." <http://www.rtpproxy.org>. Jul. 15, 2009.
- Sripanidkulchai et al., "Call Routing Management in Enterprise VoIP Networks," Copyright 2007 ACM 978-1-59593-788-9/07/0008, 6 pages.
- Stallings, William, "The Session Initiation Protocol," *The Internet Protocol Journal*, vol. 6, No. 1, Mar. 2003, pp. 20-30.
- Technical Report, "3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Study into routing of MT-SMs via the HPLMN (Release 7)," 3GPP TR 23.840 V0.1.0 (Feb. 2006), 13 pages.
- Thernelius, Fredrik, "SIP, NAT, and Firewalls," Master's Thesis, *ERICSSON, Department of Teleinformatics*, May 2000, pp. 1-69.
- Townsend, et al.; "RFC 2661—Layer Two Tunneling Protocol 'L2TP'", Aug. 1999.
- Trad et al., "Adaptive VoIP Transmission over Heterogeneous Wired/Wireless Networks," V. Roca and F. Rousscau (Eds.): *MIPS 2004, LNCS 3311*, pp. 25-36, 2004, © Springer-Verlag Berlin Heidelberg 2004.
- Wikipedia, "International mobile subscriber identity (IMSI)," <http://en.wikipedia.org/wiki/IMSI>, Jul. 16, 2013.
- Wikipedia, "Roaming," <http://en.wikipedia.org/wiki/Roaming>, Jul. 16, 2013.
- Yu et al., "Service-Oriented Issues: Mobility, Security, Charging and Billing Management in Mobile Next Generation Networks," *IEEE BcN2006*, 1-4244-0146-1/06, © 2006 IEEE, pp. 1-10.
- International Search Report and Written Opinion of the International Searching Authority dated Jun. 6, 2008 for PCT/CA2008/000545.
- International Search Report and Written Opinion of the International Searching Authority dated Feb. 6, 2008 for PCT/CA2007/001956.
- International Preliminary Report on Patentability dated May 14, 2009 for PCT/CA2007/001956.
- International Search Report and Written Opinion of the International Searching Authority dated Mar. 3, 2008 for PCT/CA2007/002150.
- International Preliminary Report on Patentability dated Feb. 13, 2009 for PCT/CA2007/002150.
- International Preliminary Report on Patentability and Written Opinion of the International Searching Authority dated Feb. 10, 2011 for PCT/CA2009/001062.
- International Search Report and Written Opinion dated Jun. 18, 2010 for PCT/CA2009/001317.
- International Search Report and Written Opinion dated Mar. 12, 2010 for PCT/CA2009/001062.
- International Preliminary Report on Patentability dated Sep. 29, 2009 for PCT/CA2008/000545.
- International Preliminary Report on Patentability dated Mar. 20, 2012 for PCT/CA2009/001317.
- Extended European Search Report dated Nov. 2, 2012 for European Application No. EP 07 855 436.7.
- Extended European Search Report dated Dec. 20, 2013 for European Application No. EP 09 849 358.8.
- Extended European Search Report dated Apr. 16, 2014 for European Patent Application No. EP 09 802 316.1.
- Supplementary European Search Report for European Application No. 07 816 106, dated Jun. 18, 2012.
- Supplementary European Search Report for European Application No. 07 816 106, dated Nov. 2, 2012.
- European Examination Report dated Nov. 26, 2015 for European Patent Application No. EP 07 816 106.4.
- Communication for European Patent Application No. EP 07 816 106.4—Invitation pursuant to Article 94(3) and Rule 71(1) EPC dated Apr. 15, 2016.
- European Examination Report dated Aug. 29, 2016 for European Patent Application No. EP 07 855 436.7.
- Communication under Rule 71(3) EPC—Intention to Grant—dated Oct. 14, 2016 for European Patent Application No. EP 07 816 106.4.
- Canadian Office Action dated Jan. 27, 2015 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Nov. 18, 2015 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Dec. 1, 2015 for Canadian Patent Application No. CA 2,812,174.
- Canadian Office Action dated Jan. 22, 2016 for Canadian Patent Application No. CA 2,916,220.
- Canadian Office Action dated Mar. 3, 2016 for Canadian Patent Application No. CA 2,670,510.
- Canadian Office Action dated Jun. 8, 2016 for Canadian Patent Application No. CA 2,916,217.
- Canadian Office Action dated Aug. 16, 2016 for Canadian Patent Application No. CA 2,681,984.
- Chinese Office Action dated Mar. 24, 2011 for Chinese Patent Application No. CN 200780049791.5.
- Chinese Office Action dated Jun. 23, 2011 for Chinese Patent Application No. CN 200780049136.X.
- Indonesian Examination Report dated Jul. 5, 2012 for Indonesian Patent Application No. W-00200901414.
- Indonesian Examination Report dated Feb. 8, 2013 for Indonesian Patent Application No. W-00200901165.
- First Examination Report dated Dec. 9, 2015, India Patent Application No. 1047/MUMNP/2009, which corresponds to subject U.S. Appl. No. 14/802,929.
- Mexican Exam Report dated Jul. 11, 2011 for Mexican Patent Application No. MX/a/2009/004811.
- Mexican Notice of Allowance dated Sep. 2, 2011 for Mexican Patent Application No. MX/a/2009/005751.
- Document Title: Complaint for Patent Infringement [Jury Demand] ; Case Title: *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Verizon Wireless Services, LLC*, a Delaware limited liability corporation; *Verizon Communications, Inc.*, a Delaware corporation; *AT&T, Inc.*, a Delaware corporation; *AT&T Corp.*, a Delaware corporation; and *DOES I through X*, inclusive, Defendants; Case No. 2:16-CV-00271; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Exhibit E; Chart 1 to Exhibit E; Chart 2 to Exhibit E; Chart 3 to Exhibit E; Chart 4 to Exhibit E; Chart 5 to Exhibit E; Chart 6 to Exhibit E; Exhibit F; Chart 1 to Exhibit F; Chart 2 to Exhibit F; Chart 3 to Exhibit F; Chart 4 to Exhibit F; Chart 5 to Exhibit F; Chart 6 to Exhibit F; Exhibit G; Exhibit H; and Addendum 1 to Exhibit H.
- Document Title: Complaint for Patent Infringement [Jury Demand] ; Case Title: *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation; Defendants; Case No. 2:16-

US 9,826,002 B2

Page 11

(56)

References Cited

OTHER PUBLICATIONS

CV-00260; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Chart 1 to Exhibit D; Chart 2 to Exhibit D; Chart 3 to Exhibit D; Chart 4 to Exhibit D; Exhibit E; Exhibit F; and Addendum 1 to Exhibit F.

Letter dated Nov. 30, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Apple Inc. in the U.S.

Letter dated Dec. 1, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Verizon Communications in the U.S.

Letters dated Dec. 18, 2015, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Airtel in India; Alcatel-Lucent in France; Avaya Inc. in the U.S.; AT&T in the U.S.; Blackberry in Canada; Cable One in the U.S.; CenturyLink in the U.S.; Charter Communications in the U.S.; Cisco Systems in the U.S.; Comcast in the U.S.; Cox Communications in the U.S.; Cricket Wireless in the U.S.; Facebook in the U.S.; Freedom Pop in the U.S.; Frontier Communications in the U.S.; Google Inc. in the U.S.; HP in the U.S.; Juniper Networks in the U.S.; LoopPay, Inc. in the U.S.; Magic Jack in the U.S.; MetroPCS in the U.S.; Ooma in the U.S.; PayPal in the U.S.; Republic Wireless in the U.S.; Rok Mobile in the U.S.; Samsung Electronics—America in the U.S.; ShoreTel, Inc. in the U.S.; Siemens in Germany; Skype USA in the U.S.; Sprint in the U.S.; Square Cash in the U.S.; Suddenlink Communications in the U.S.; Talktone in the U.S.; Tango in the U.S.; Time Warner Cable in the U.S.; T-mobile in the U.S.; Twitter in the U.S.; US Cellular in the U.S.; Venmo in the U.S.; Virgin Mobile USA in the U.S.; Vodafone in the UK; and Vonage in the U.S.

Letters dated Jan. 4, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Rogers Communications Inc. in Canada; Shaw Cable in Canada; Walmart in Alaska; and WIND Mobile in Canada.

Letters dated Jan. 21, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Alibaba (China) Co., Ltd in China; Comwave Telecommunications in Canada; and Intel in the U.S.

Letters dated Feb. 2, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here. only to the first letter.) Sent to the following companies: Netflix Inc. in the U.S.; Skype Technologies in the U.S.; and WhatsApp Inc. in the U.S.

Document Title: Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Dated May 24, 2016. 64 sheets.

Document Title: Declaration of Michael Caloyannides; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing

Routing Messages for Voice Over IP Communications; Signed May 23, 2016; Filed May 24, 2016. 84 sheets.

Document Title: Public Switched Telephone Networks: A Network Analysis of Emerging Networks; Daniel Livengood, Jijun Lin and Chintan Vaishnav; Engineering Systems Division; Massachusetts Institute of Technology; Submitted May 16, 2006; to Dan Whitney, Joel Moses and Chris Magee. 27 sheets.

Document Title: A Brief History of VoIP; Document One—The Past; Joe Hallock; joe@sitedifference.com; date on cover page: Nov. 26, 2004; Evolution and Trends in Digital Media Technologies—COM 538; Masters of Communication in Digital Media; University of Washington. 17 sheets.

Document Title: Petitioner's Voluntary Interrogatory Responses; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; IPR20161082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed and Filed not later than May 24, 2016. 8 sheets.

Document Title: VoIP-Pal, the World is Calling!, "Over \$7 Billion in Lawsuits Filed by Voip-Pal.com Inc. vs Apple, Verizon and AT&T for Various Patent Infringements," *Business Wire®*, a *Berkshire Hathaway Company*, Feb. 11, 2016. 2 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated Jun. 15, 2016. 70 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 Et Seq.; In re U.S. Pat. No. 9,179,005; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Nov. 3, 2015; Application Filed: Aug. 13, 2013; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated Jun. 15, 2016. 67 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 Et Seq.; In re U.S. Pat. No. 8,542,815; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Sep. 24, 2013; Application Filed: Nov. 1, 2007; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Complaint for Patent Infringement, United States District Court, District of Nevada, Case No. 2:16-cv-2338, *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendant, Filed Oct. 6, 2016, 8 pages.

Civil Docket for Case #: 2:16-cv-02338-RFB-CWH, United States District Court, District of Nevada (Las Vegas), *Voip-Pal.com, Inc. v. Twitter, Inc.*, Date Filed: Oct. 6, 2016, 2 pages.

Table of Exhibits, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, 1 page.

Exhibit A, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 8,542,815 B2, Issued Sep. 24, 2013, to Clay Perrault et al., 60 pages.

Exhibit B, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 9,179,005 B2, Issued Nov. 3, 2015, to Clay Perrault et al., 63 pages.

Exhibit C, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Letter dated Dec. 18, 2015 giving notice of U.S. Pat. Nos. 8,542,815 B2; 9,179,005 B2; and related Patents listed in Attachment A, 4 pages.

Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Asserted Claims and Infringement Conditions, United States District Court, District of Nevada, *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 6 pages.

US 9,826,002 B2

Page 12

(56) **References Cited**

OTHER PUBLICATIONS

Chart 1 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 1, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 8,542,815, United States District Court, District of Nevada, *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 20 pages.

Chart 2 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 2, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 9,179,005, United States District Court, District of Nevada, *Voip-Pal.com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 28 pages.

Exhibit E, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, VPLM Active U.S. Patent Matters as of Oct. 1, 2016, 2 pages.

Exhibit F, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Twitter Royalty Monetization Analysis Overview, 4 pages.

Patent Owner's Preliminary Response, Case No. IPR2016-01082, U.S. Pat. No. 8,542,815, *Unified Patents Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Filing Date: Aug. 26, 2016, 80 pages. Voip-Pal.com, Inc. Exhibit 2001, Comparison of portions of Petition with portions of Declaration, IPR2016-01082, *Unified Patents v. Voip-Pal*, Filing Date: Aug. 26, 2016, 9 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 19, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01201, *Apple v. Voip-Pal*, Filing Date: Sep. 19, 2016, 19 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 21, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01198, *Apple v. Voip-Pal*, Filing Date: Sep. 21, 2016, 21 pages.

Decision: Denying Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01082, U.S. Pat. No. 8,542,815 B2, Paper 8, Entered: Nov. 18, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Paper 6, Entered: Nov. 21, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Paper 6, Entered: Nov. 21, 2016.

Scheduling Order: United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Cases IPR2016-01201, IPR2016-01198, U.S. Pat. No. 8,542,815 B2, U.S. Pat. No. 9,179,005 B2, Paper 7, Entered: Nov. 21, 2016.

Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 76 pages. Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01201, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S.

Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01201, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01201, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, to: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01201, Memo—"Subject: Digifonica TEchnology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; to: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01201, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, to: John Rutter, et al., 3 pages.

Voip-Pal Ex. 2007, IPR2016-01201, DigiFonica International Inc Memo—" [Fwd: Digifonica Technical Review—draft report]," From Clay Perreault, to: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01201, John Rutter—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01201, Stuart Gare—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01201, Pentti Kalevi Huttunen—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01201, Ryan Purita—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex. 2012, IPR2016-01201, Johan Emil Viktor Björnell—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01201, Clay Perreault—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01201, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

Voip-Pal Ex. 2015, IPR2016-01201, RBR Source Code Log for Trunk Directory, "r1879 | cdelaiane | Oct. 31, 2006 17:07:46-0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016, IPR2016-01201, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 82 pages.

Voip-Pal Ex. 2017, IPR2016-01201, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, to: Emil Björnell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Voip-Pal Ex. 2018, IPR2016-01201, David Terry—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01201, DF DigiFonica International Inc Memo—"Software release 10:30 am PST-11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, to: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01201, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies. Technology Overview, Draft Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. to: E. Björsell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01201, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björsell to: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

Voip-Pal Ex. 2023, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 353 added, 1 message" Fuad A. to: E. Norsell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 358 added, 1 message" Fuad A. to: E. Björsell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 361 updated, 1 message" Fuad A. to: E. Bjorsell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" David Terry to: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" Emil Björsell to: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01201, Df DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Rev 541 updated, 1 message" Fuad A. to: E. Björsell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" David Terry to: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björsell to: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 554 added, 1 message" Fuad A. to: Emil Bjorsell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry to: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björsell to: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01201, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards to: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff to: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01201, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01201, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

Voip-Pal Ex. 2047, IPR2016-01201, "Merlin® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.

Voip-Pal Ex. 2048, IPR2016-01201, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.

Voip-Pal Ex. 2049, IPR2016-01201, Valdar, Andy, *Understanding Telecommunications Networks*, © 2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.

Voip-Pal Ex. 2050, IPR2016-01201, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.

Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 78 pages. Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01198, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01198, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01198, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, to: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01198, Memo—"Subject: Digifonica TTechnology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; to: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01198, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, to: John Rutter, et al., 3 pages.

Voip-Pal Ex. 2007, IPR2016-01198, DigiFonica International Inc Memo—" [Fwd: Digifonica Technical Review—draft report], " From Clay Perreault, to: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01198, John Rutter—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01198, Stuart Gare—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No.

US 9,826,002 B2

Page 14

(56)

References Cited

OTHER PUBLICATIONS

IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01198, Pentti Kalevi Huttunen—“Declaration in Support Patent Owner Response to Inter Partes Petition,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01198, Ryan Purita—“Declaration in Support Patent Owner Response to Inter Partes Petition,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex. 2012, IPR2016-01198, Johan Emil Viktor Björnell—“Declaration in Support Patent Owner Response to Inter Partes Petition,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01198, Clay Perreault—“Declaration in Support Patent Owner Response to Inter Partes Petition,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01198, RBR Source Code, Version 361, “call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59,” 45 pages.

Voip-Pal Ex. 2015, IPR2016-01198, RBR Source Code Log for trunk Directory, “r1879 | cdalalande | Oct. 31, 2006 17:07:46-0800 (Tue, Oct. 31, 2006) | 3 lines,” 56 pages.

Voip-Pal Ex. 2016, IPR2016-01198, William Henry Mangione-Smith—“Declaration in Support Patent Owner Response to Inter Partes Petition,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 96 pages.

Voip-Pal Ex. 2017, IPR2016-01198, DF DigiFonica International Inc Memo—“notes from your presentation, 1 message” From Konstantin Kropivny, to: Emil Björnell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01198, David Terry—“Declaration in Support Patent Owner Response to Inter Partes Petition,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01198, DF DigiFonica International Inc Memo—“Software release 10:30 am PST-11:00am PST for Aug. 25, 2005. 1 message” From Samantha Edwards, to: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01198, “Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies. Technology Overview, Draft Jun. 3, 2005, Not for Distribution,” by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01198, DF DigiFonica International Inc Memo—“Software roll out for supernodes.:Salm Rev 341, RBR Rev 341 added, 1 message” Fuad A. to: E. Björnell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01198, DF DigiFonica International Inc Memo—“Salm Rev 341, RBR Rev 341, 2 messages” Emil Björnell to: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

Voip-Pal Ex. 2023, IPR2016-01198, DF DigiFonica International Inc Memo—“Software roll out for supernodes.:RBR Roll out Rev 353 added, 1 message” Fuad A. to: E. Björnell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01198, DF DigiFonica International Inc Memo—“Software roll out for supernodes.:RBR Roll out Rev 358 added, 1 message” Fuad A. to: E. Björnell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01198, DF DigiFonica International Inc Memo—“Software roll out for supernodes.:RBR Roll out Rev 361 updated, 1 message” Fuad A. to: E. Björnell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Roll out Rev 361, 1 message” David Terry to: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Roll out Rev 361, 1 message” Emil Björnell to: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01198, DF DigiFonica International Inc Memo—“Software roll out for supernodes.:RBR Rev 541 updated, 1 message” Fuad A. to: E. Björnell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Rev 541, 1 message” David Terry to: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Rev 541, 1 message” Emil Björnell to: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01198, DF DigiFonica International Inc Memo—“Software roll out for supernodes.:RBR Roll out Rev 554 added, 1 message” Fuad A. to: Emil Björnell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Roll out Rev 554, 2 messages” David Terry to: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Roll out Rev 554, 1 message” Emil Björnell to: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01198, DF DigiFonica International Inc Memo—“Digifonica : RBR and Salma Deployment,” Samantha Edwards to: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01198, DF DigiFonica International Inc Memo—“RBR Roll out Rev 693==>694, 1 message” Chris Huff to: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01198, “Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01198, “Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner,” *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01198, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01198, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

Voip-Pal Ex. 2047, IPR2016-01198, “Merlin® Communications System, Centrex/PBS Connection,” Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.

Voip-Pal Ex. 2048, IPR2016-01198, “Telephone Features,” Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.

Voip-Pal Ex. 2049, IPR2016-01198, Valdar, Andy, *Understanding Telecommunications Networks*, ©2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.

US 9,826,002 B2

Page 15

(56)

References Cited

OTHER PUBLICATIONS

Voip-Pal Ex. 2050, IPR2016-01198, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, page 133.

Voip-Pal Ex. 2053, IPR2016-01198, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Voip-Pal Ex. 2053, IPR2016-01201, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Order, Conduct of Proceeding, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner, v. Voip-Pal.Com, Inc.*, Patent Owner. Cases IPR2016-01198 and IPR2018-01201, U.S. Pat. No. 9,179,005 B2 and U.S. Pat. No. 8,542,815 B2, Paper No. 43, Filed: Jun. 22, 2017, 4 pages.

Order, Trial Hearing, 37 C.F.R. § 42.70, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner, v. Voip-Pal.Com, Inc.*, Patent Owner. Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. No. 9,179,005 B2 and U.S. Pat. No. 8,542,815 B2, Paper No. 45, Filed: Jun. 26, 2017, 4 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner v. Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, Date: Jun. 26, 2017, 15 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner v. Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, Date: Jun. 26, 2017, 15 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner, v. Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR 2016-01198, U.S. Pat. No. 9,179,005, Filed: Jul. 3, 2017, 8 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc., Petitioner, v. Voip-Pal.Com, Inc.*, Patent Owner, Case No. IPR 2016-01201, U.S. Pat. No. 8,542,815, Filed: Jul. 3, 2017, 8 pages.

Voip-Pal Ex. 2054, IPR2016-01198, Voip-Pal's Demonstratives for Oral Hearing, *Apple Inc. v. Voip-Pal.Com, Inc.*, Case IPR2016-01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Voip-Pal Ex. 2054, IPR2016-01201, Voip-Pal's Demonstratives for Oral Hearing, *Apple Inc. v. Voip-Pal.com, Inc.*, Case IPR2016-

01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Petitioner Apple Inc. Ex. 1018, Petitioner's Demonstrative Exhibits, Inter Partes Reviews, U.S. Pat. No. 9,179,005 & 8,542,815, Oral Argument, July 20, 2017, *Apple Inc. v. Voip-Pal.com, Inc.*, Case IPR2016-01198; U.S. Pat. No. 9,179,005, Case IPR2016-01201; U.S. Pat. No. 8,542,815, 46 pages.

Canadian Office Action dated Aug. 2, 2017 for Canadian Patent Application No. CA 2,681,984.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2017-01382, U.S. Pat. No. 8,542,815, dated Aug. 24, 2017, 71 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2017-01383, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 74 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2017-01384, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 61 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2017-01398, U.S. Pat. No. 9,179,005, dated Aug. 25, 2017, 76 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2017-01399, U.S. Pat. No. 8,542,815, dated Aug. 25, 2017, 77 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.* Patent Owner; Cases IPR2016-01198 and IPR2016-01201; U.S. Pat. No. 9,179,005 B2 and U.S. Pat. No. 8,542,815 B2; Record of Oral Hearing, Held: Jul. 20, 2017; Before Josiah C. Cocks, Jennifer Meyer Chagnon, and John A. Hudalla, Administrative Patent Judges, 83 pages.

Indian Office Action dated Jun. 21, 2017 for Indian Patent Application No. IN 1227/MUMNP/2009.

Intimation of the grant and recordal of India Patent No. 287412 entitled "Producing Routing Messages for Voice Over IP Communications", dated Sep. 15, 2017, for India Patent Application No. IN 1047/MUMNP/2009 filed Nov. 1, 2007.

* cited by examiner

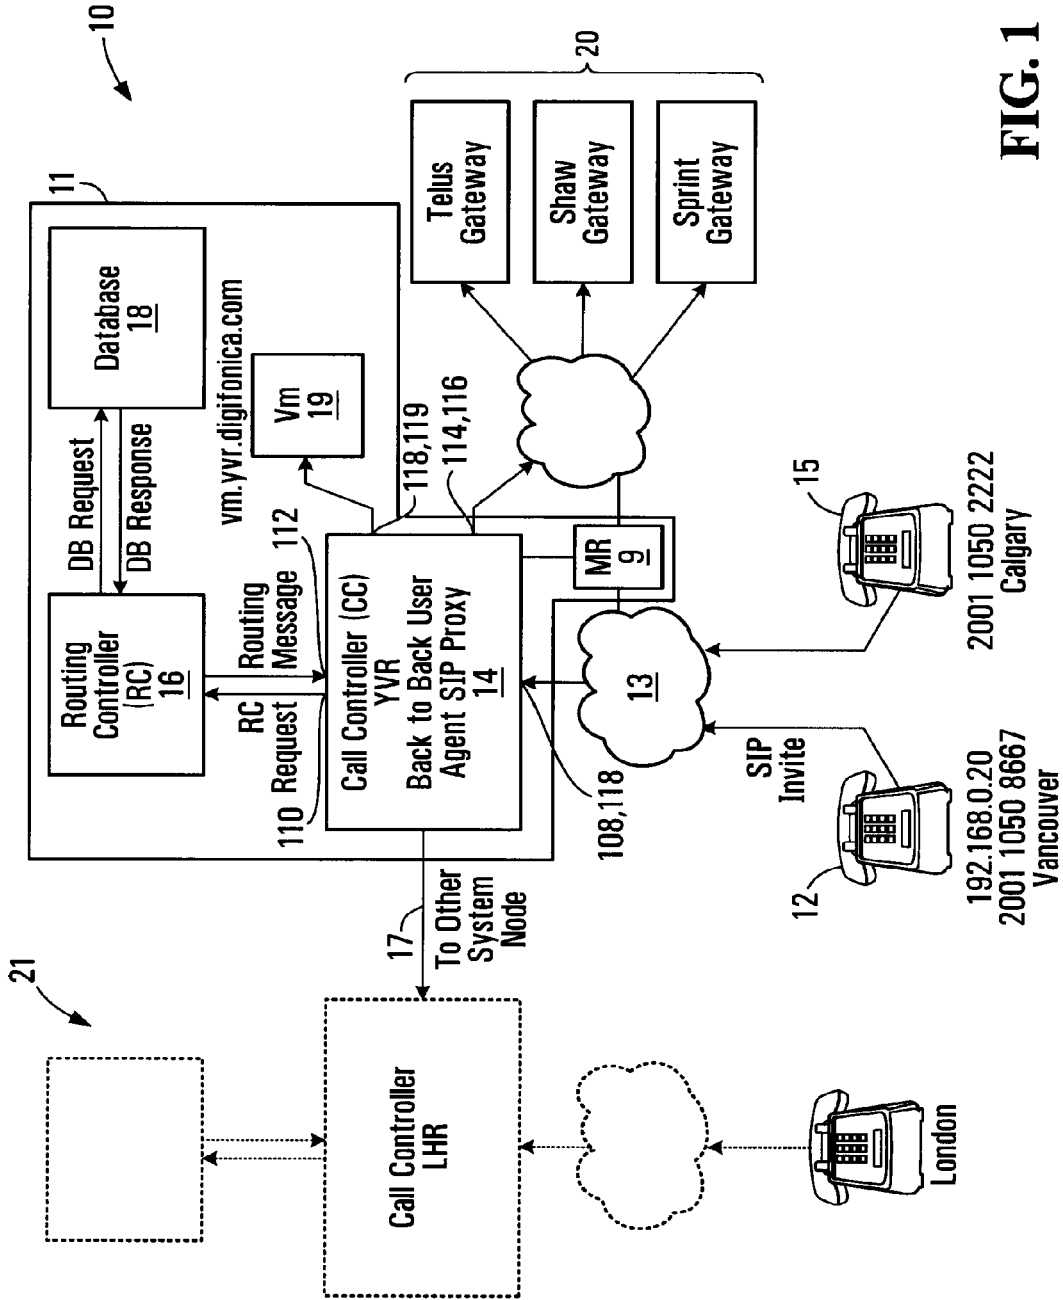


FIG. 1

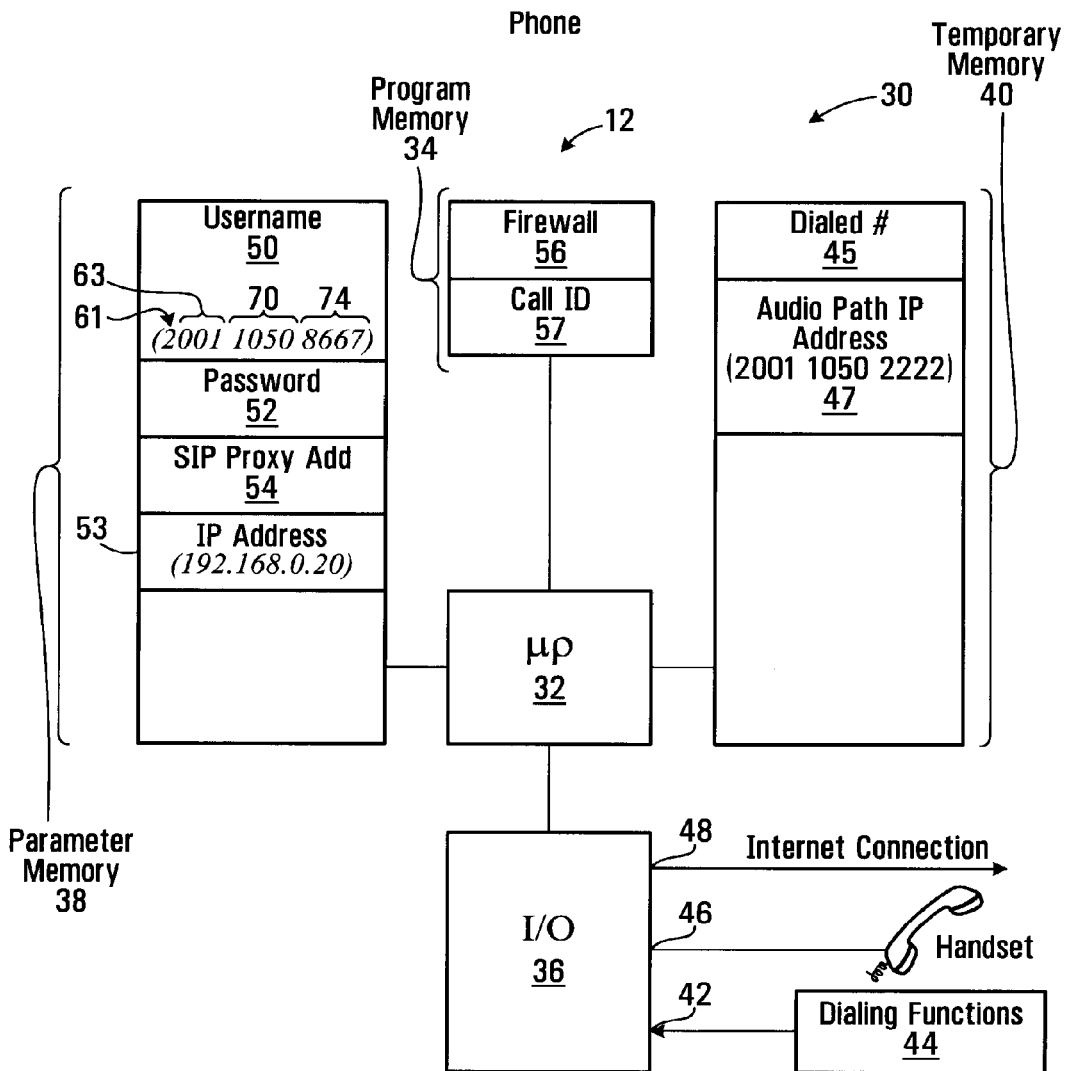


FIG. 2

SIP Invite Message

60 ~ Caller 2001 1050 8667
 62 ~ Callee 2001 1050 2222
 64 ~ Digest Parameters XXXXXXXX
 65 ~ Call ID FF10@ 192.168.0.20
 67 ~ IP Address 192.168.0.20
 69 ~ Caller UDP Port 1

FIG. 3

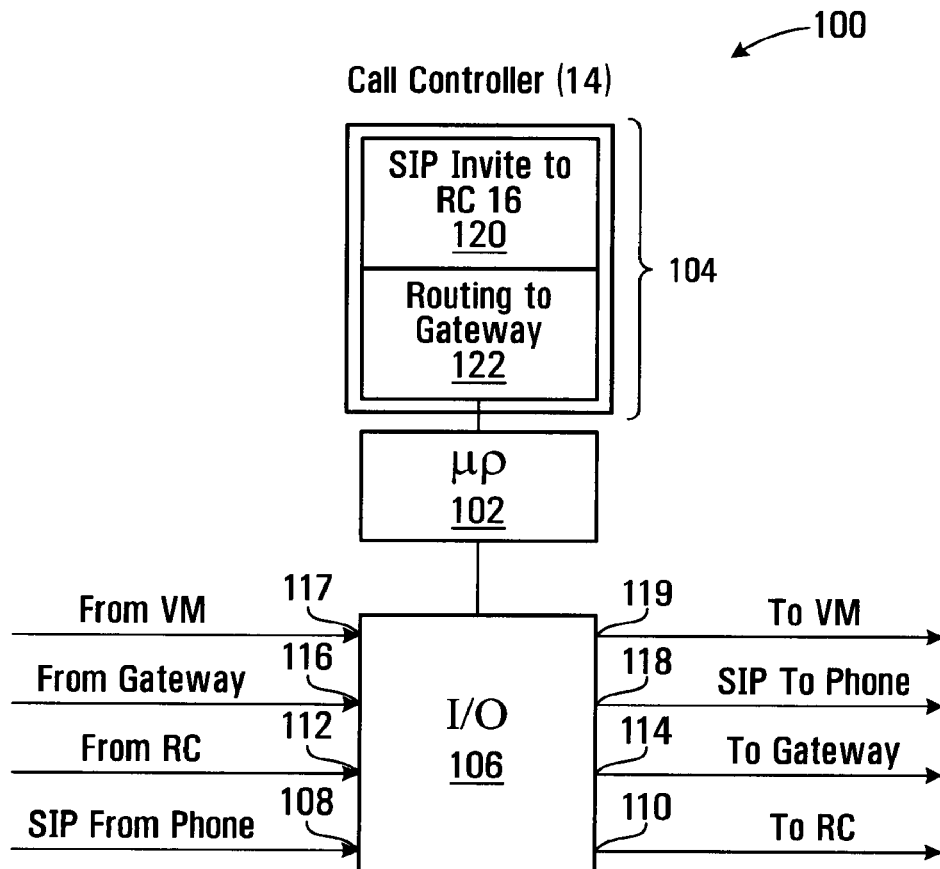


FIG. 4

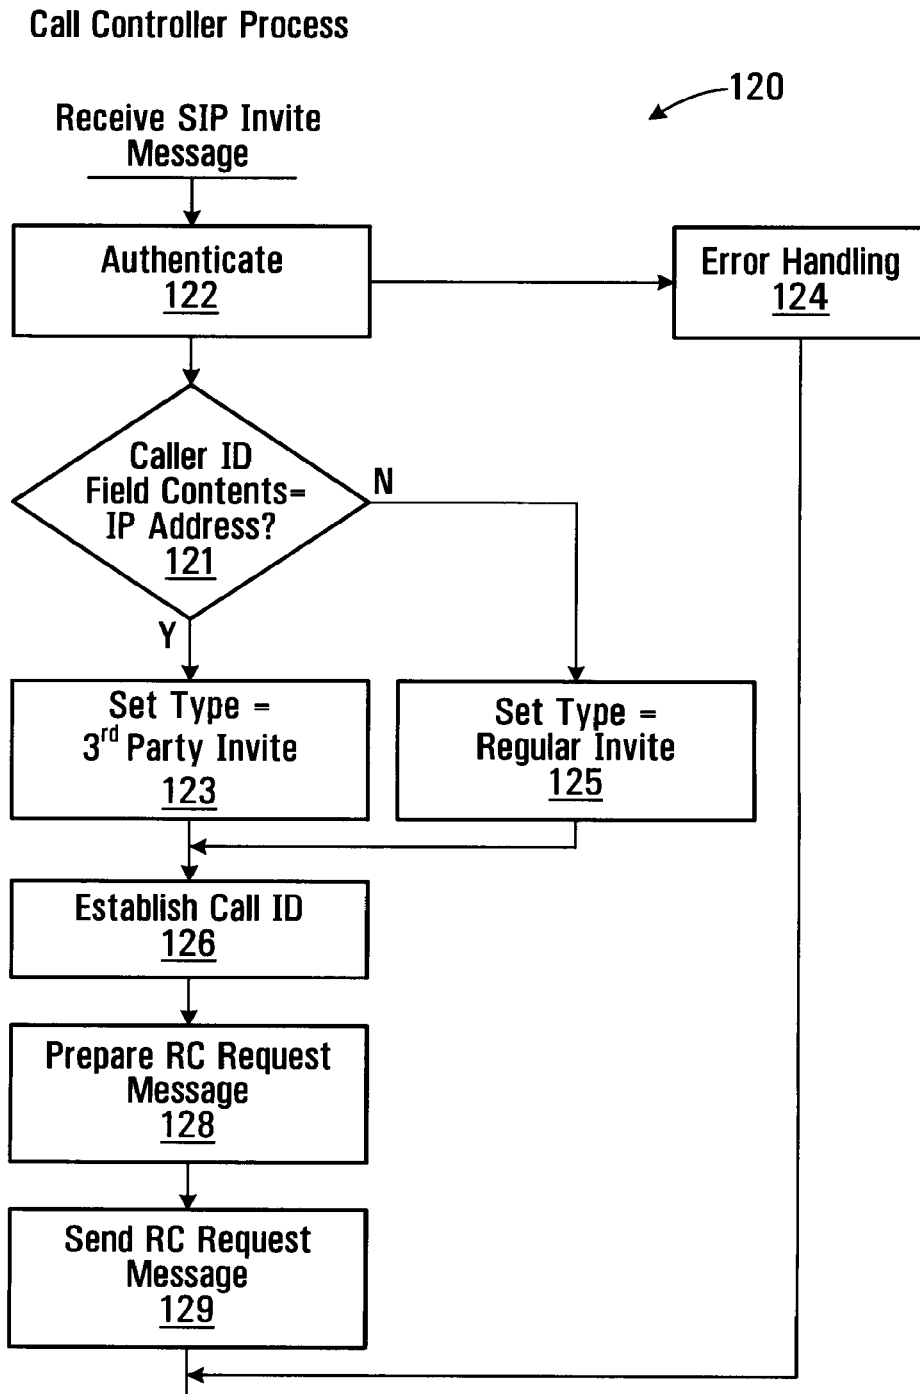


FIG. 5

150

RC Request Message

152 ~ Caller 2001 1050 8667
 154 ~ Callee 2001 1050 2222
 156 ~ Digest XXXXXXXX
 158 ~ Call ID FF10@ 192.168.0.20
 160 ~ Type Subscriber

FIG. 6

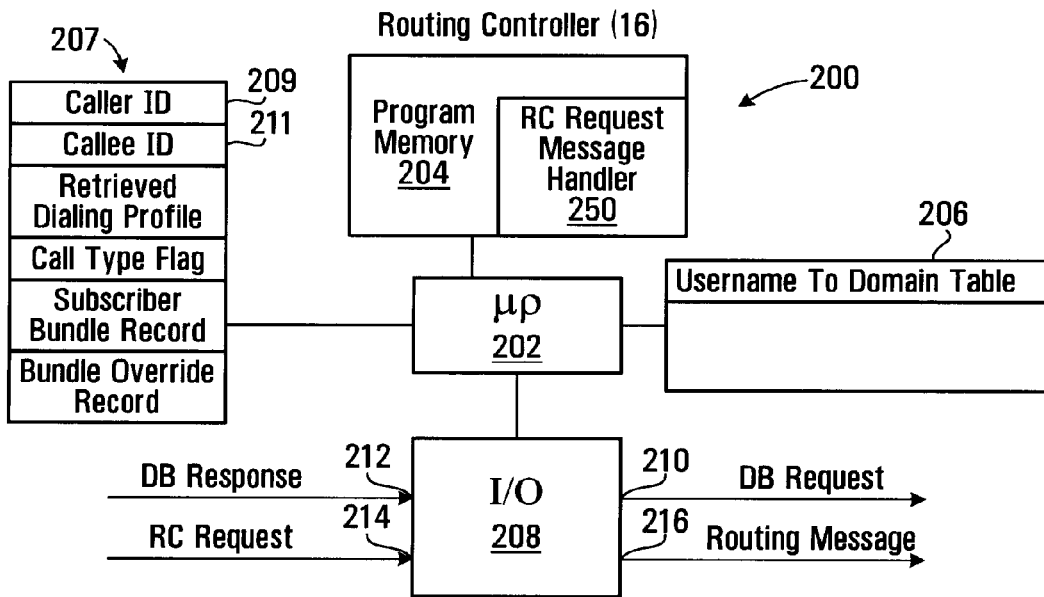


FIG. 7

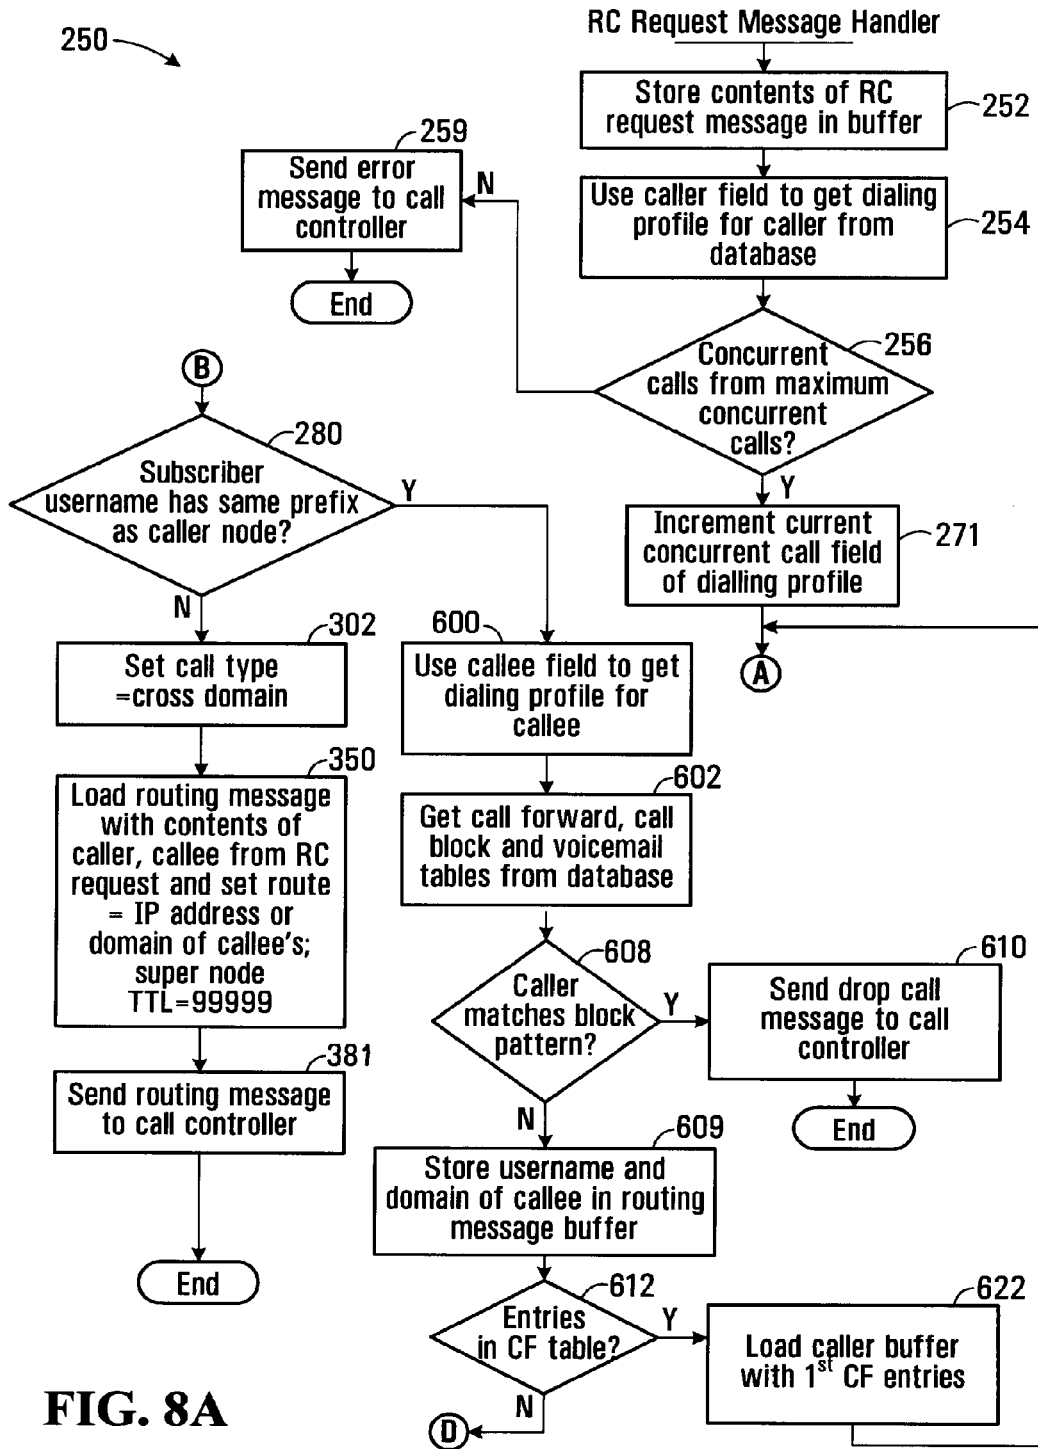


FIG. 8A

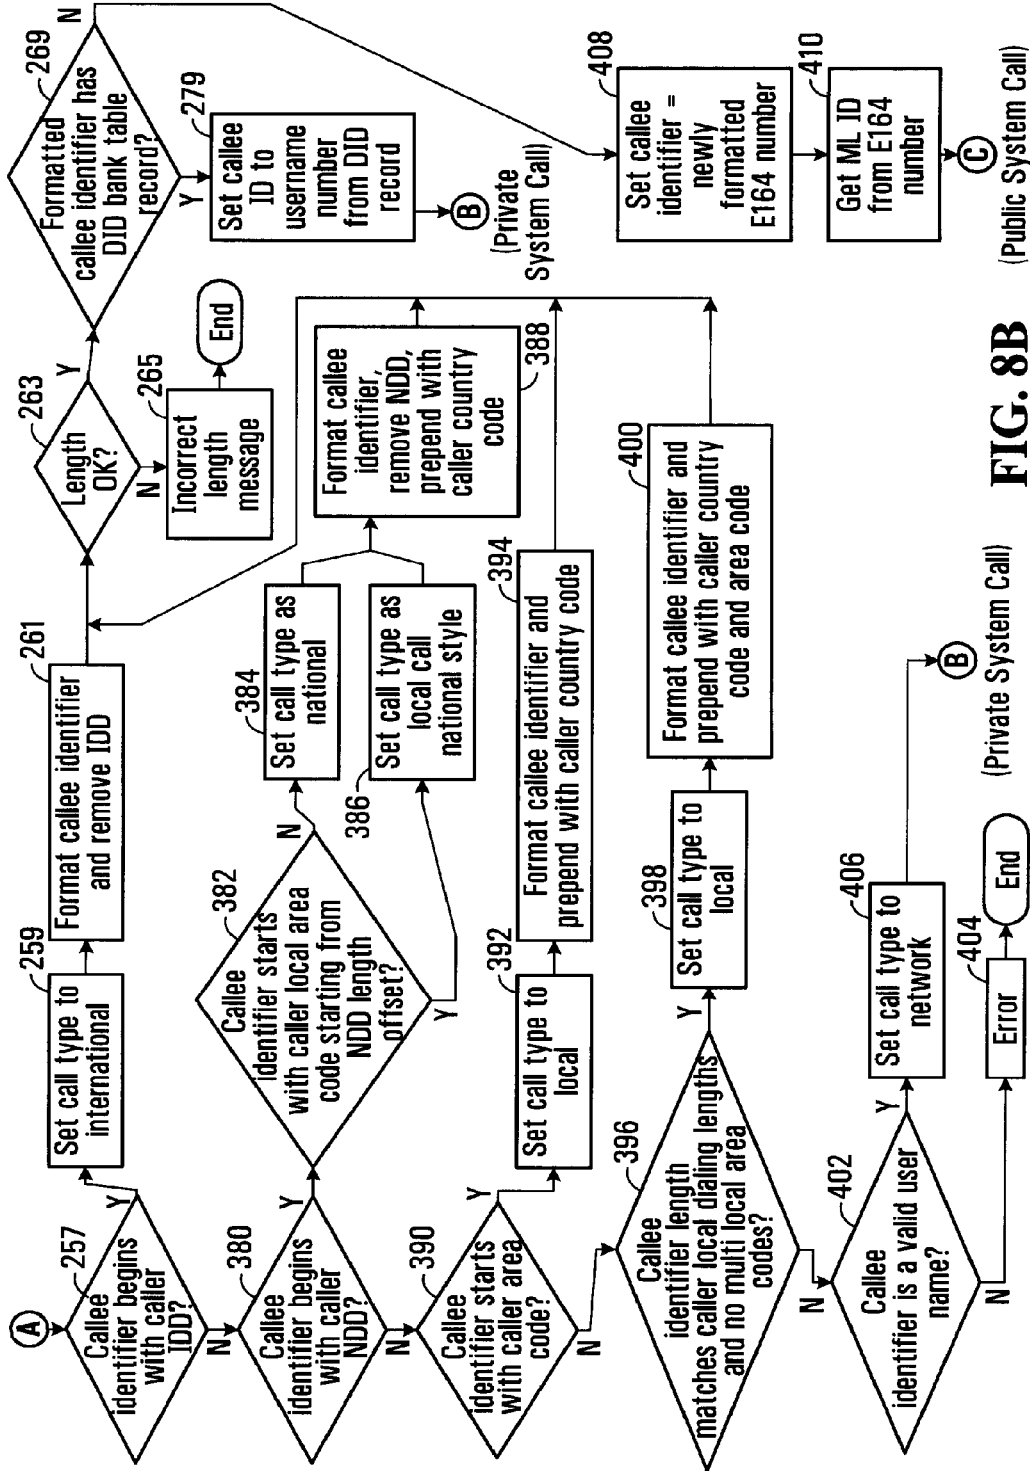
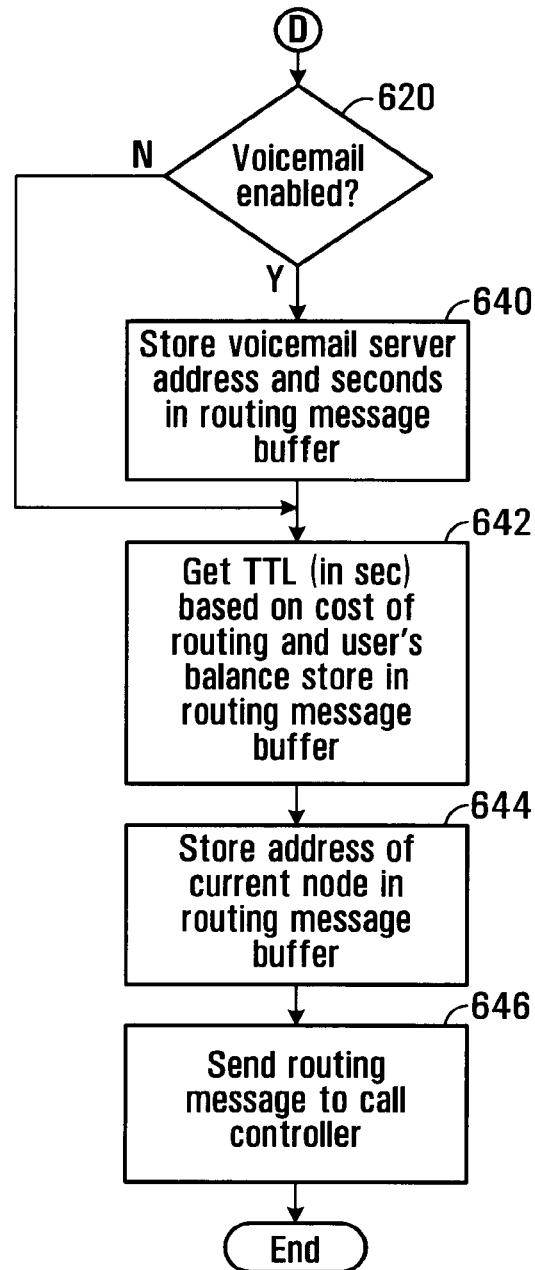


FIG. 8B

(Private System Call)

(Public System Call)

**FIG. 8C**

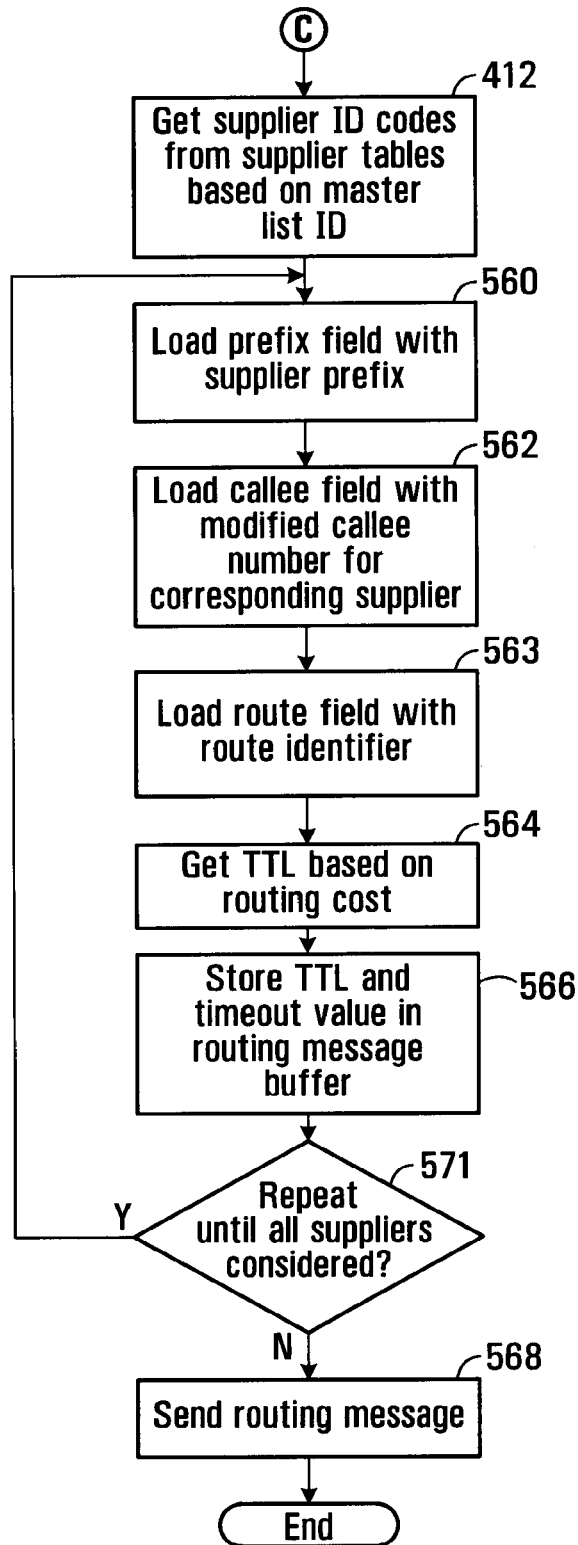


FIG. 8D

↖ 253

Dialing Profile for a User

258 ~ Username	Assigned on Subscription
260 ~ Domain	Domain Associated with User
262 ~ NDD	1
264 ~ IDD	011
266 ~ Country Code	1
267 ~ Local Area Codes	604;778
268 ~ Caller Minimum Local Length	10
270 ~ Caller Maximum Local Length	10
273 ~ Reseller	Retailer
275 ~ Maximum # of concurrent calls	Assigned on Subscription
277 ~ Current # of concurrent calls	Assigned on Subscription

FIG. 9

Dialing Profile for Caller (Vancouver Subscriber)

	61			
	284	63	70	74
258 ~ Username	2001	1050	8667	
260 ~ Domain	sp.yvr.digifonica.com ← 282			
262 ~ NDD	1			
264 ~ IDD	011	286	288	290
266 ~ Country Code	1			
267 ~ Local Area Codes	604;778 (Vancouver)			
268 ~ Caller Minimum Local Length	10			
270 ~ Caller Maximum Local Length	10			
273 ~ Reseller	Klondike			
275 ~ Maximum # of concurrent calls	5			
277 ~ Current # of concurrent calls	0			

↖ 276

FIG. 10

Callee Profile for Calgary Subscriber

Username	2001 1050 2222
Domain	sp.yvr.digifonica.com
NDD	1
IDD	011
Country Code	1
Local Area Codes	403 (Calgary)
Caller Minimum Local Length	7
Caller Maximum Local Length	10
Reseller	Deerfoot
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 11**Callee Profile for London Subscriber**

Username	4401 1062 4444
Domain	sp.lhr.digifonica.com
NDD	0
IDD	00
Country Code	44
Local Area Codes	20 (London)
Caller Minimum Local Length	10
Caller Maximum Local Length	11
Reseller	Marble Arch
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 12

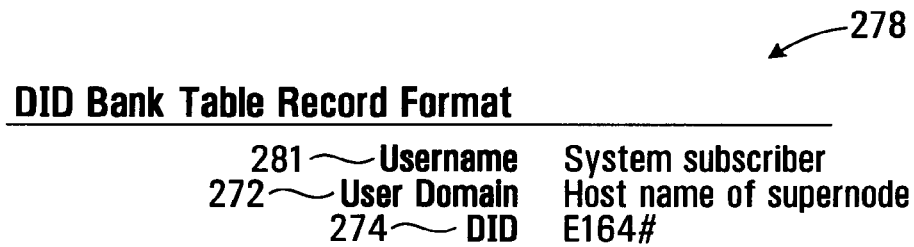


FIG. 13

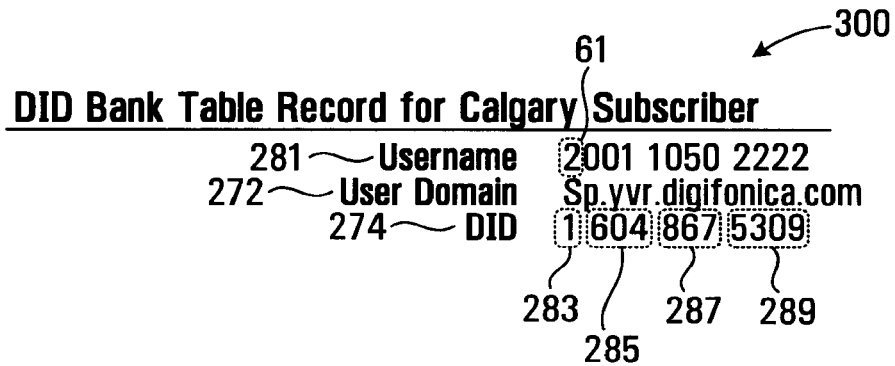


FIG. 14

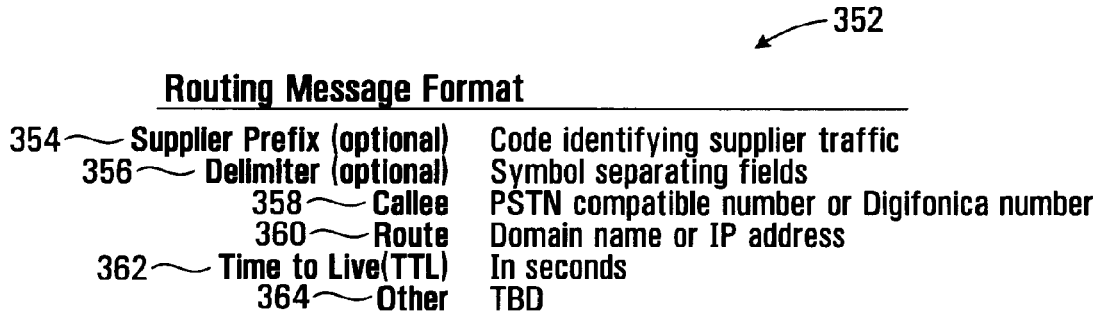


FIG. 15



FIG. 16

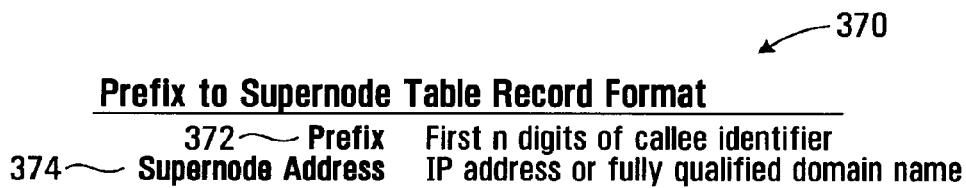


FIG. 17




FIG. 18

Master List Record Format

500	~	ml_id	Alphanumeric
502	~	Dialing code	Number Sequence
504	~	Country code	The country code is the national prefix to be used when dialing TO a particular country FROM another country.
506	~	Nat Sign #(Area Code)	Number Sequence
508	~	Min Length	Numeric
510	~	Max Length	Numeric
512	~	NDD	The NDD prefix is the access code used to make a call WITHIN that country from one city to another (when calling another city in the same vicinity, this may not be necessary).
514	~	IDD	The IDD prefix is the international prefix needed to dial a call FROM the country listed TO another country.
516	~	Buffer rate	Safe charge rate above the highest rate charged by suppliers

FIG. 19**Example: Master List Record with Populated Fields**

ml_id	1019
Dialing code	1604
Country code	1
Nat Sign #(Area Code)	604
Min Length	7
Max Length	7
NDD	1
IDD	011
Buffer rate	\$0.009/min

FIG. 20

Suppliers List Record Format

540 ~	Sup_id	Name code
542 ~	MI_id	Numeric code
544 ~	Prefix (optional)	String identifying supplier's traffic #
546 ~	Specific Route	IP address
548 ~	NDD/IDD rewrite	
550 ~	Rate	Cost per second to Digifonica to use this route
551 ~	Timeout	Maximum time to wait for a response when requesting this gateway

FIG. 21**Telus Supplier Record**

Sup_id	2010 (Telus)
MI_id	1019
Prefix (optional)	4973#
Specific Route	72.64.39.58
NDD/IDD rewrite	011
Rate	\$0.02/min
Timeout	20

FIG. 22**Shaw Supplier Record**

Sup_id	2011 (Shaw)
MI_id	1019
Prefix (optional)	4974#
Specific Route	73.65.40.59
NDD/IDD rewrite	011
Rate	\$0.025/min
Timeout	30

FIG. 23**Sprint Supplier Record**

Sup_id	2012 (Sprint)
MI_id	1019
Prefix (optional)	4975#
Specific Route	74.66.41.60
NDD/IDD rewrite	011
Rate	\$0.03/min
Timeout	40

FIG. 24

Routing Message Buffer for Gateway Call

4973#0116048675309@72.64.39.58;ttl=3600;to=20 ~ 570
 4974#0116048675309@73.65.40.59;ttl=3600;to=30 ~ 572
 4975#0116048675309@74.66.41.60;ttl=3600;to=40 ~ 574

FIG. 25**Call Block Table Record Format**

604 ~ Username Digifonica #
 606 ~ Block Pattern PSTN compatible or Digifonica #

FIG. 26**Call Block Table Record for Calgary Callee**

604 ~ Username of Callee 2001 1050 2222
 606 ~ Block Pattern 2001 1050 8664

FIG. 27**Call Forwarding Table Record Format for Callee**

614 ~ Username of Callee Digifonica #
 616 ~ Destination Number Digifonica #
 618 ~ Sequence Number Integer indicating order to try this

FIG. 28**Call Forwarding Table Record for Calgary Callee**

614 ~ Username of Callee 2001 1050 2222
 616 ~ Destination Number 2001 1055 2223
 618 ~ Sequence Number 1

FIG. 29

Voicemail Table Record Format

624	Username of Callee	Digifonica #
626	Vm Server	domain name
628	Seconds to Voicemail	time to wait before engaging voicemail
630	Enabled	yes/no

FIG. 30**Voicemail Table Record for Calgary Callee**

Username of Callee	2001 1050 2222
Vm Server	vm.yvr.digifonica.com
Seconds to Voicemail	20
Enabled	1

FIG. 31**Routing Message Buffer - Same Node**

650	200110502222@sp.yvr.digifonica.com;ttl=3600
652	200110552223@sp.yvr.digifonica.com;ttl=3600
654	vm.yvr.digifonica.com;20;ttl=60
656	sp.yvr.digifonica.com

FIG. 32

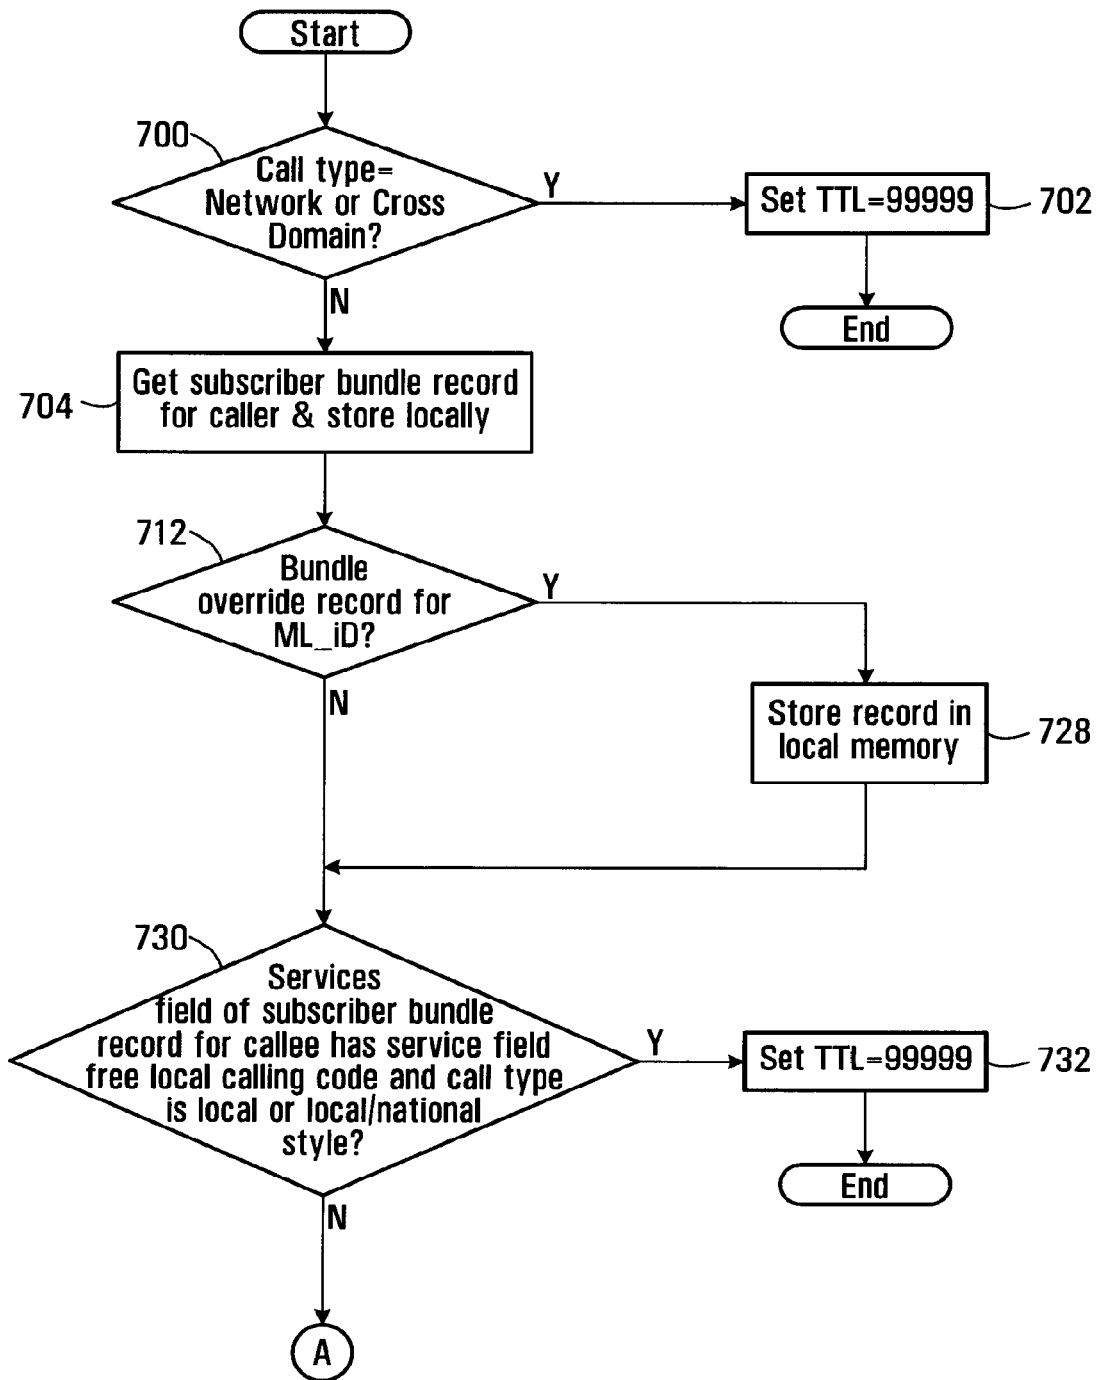


FIG. 33A

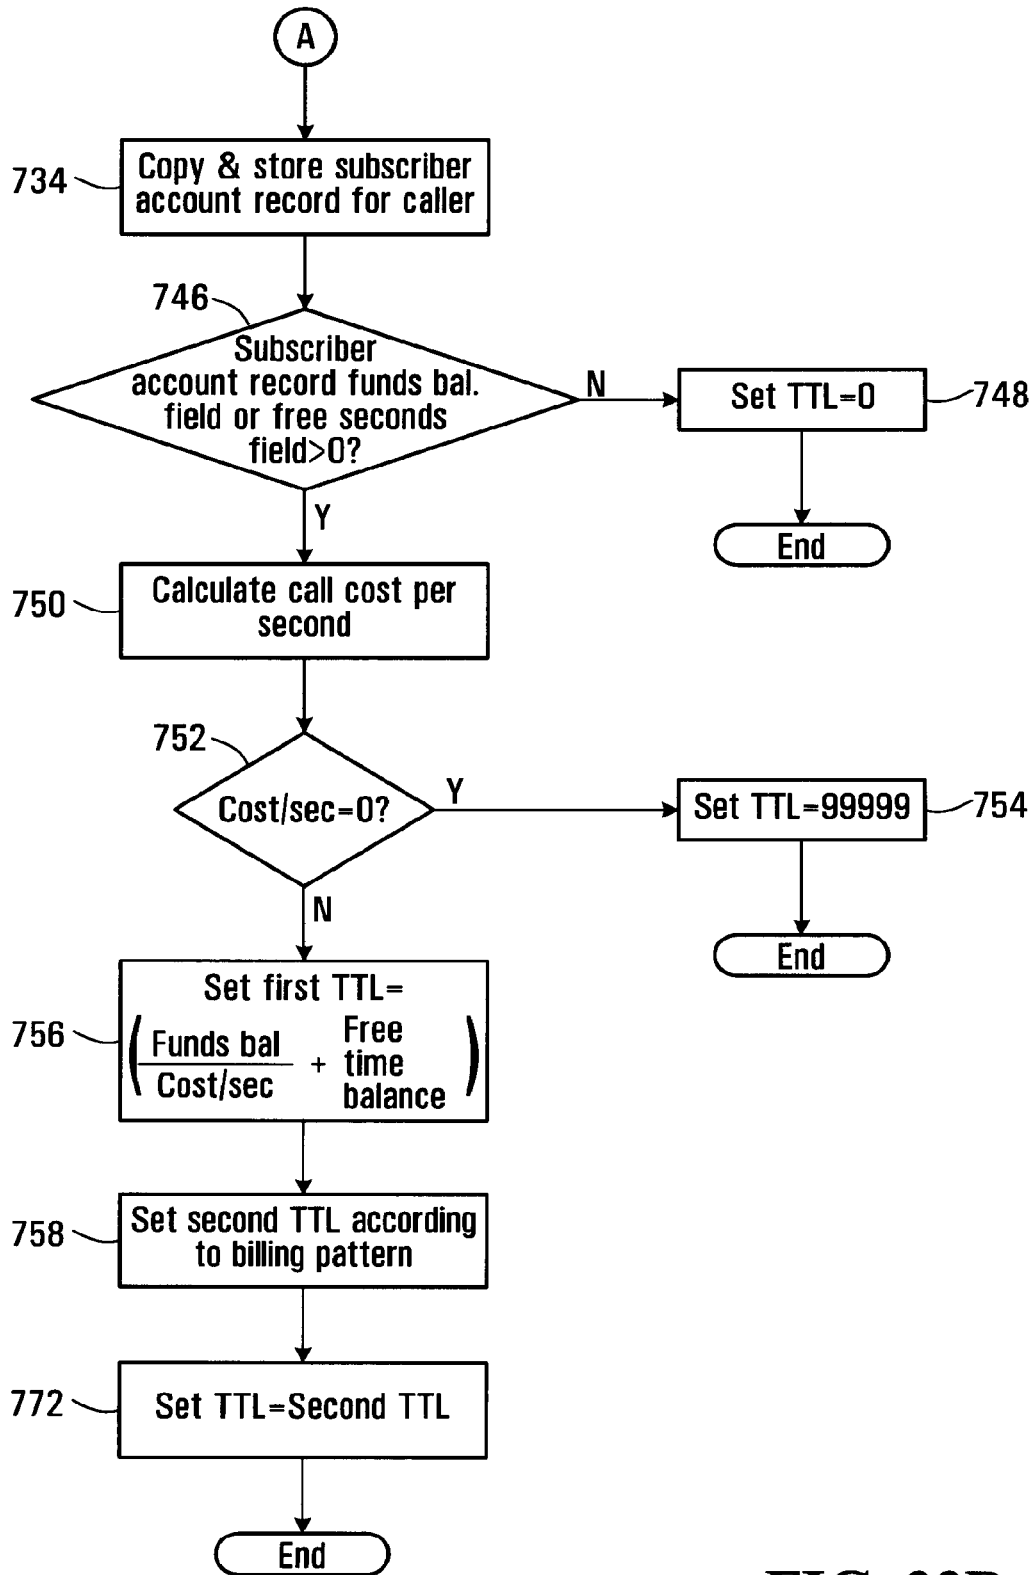


FIG. 33B

Subscriber Bundle Table Record

708 ~ Username Subscriber username
 710 ~ Services Codes identifying service features
 (e.g. Free local calling; call blocking, voicemail)

706

FIG. 34

Subscriber Bundle Record for Vancouver Caller

708 ~ Username 2001 1050 8667
 710 ~ Services 10; 14; 16

FIG. 35

Bundle Override Table Record

716 ~ ML_Id Master list ID code
 718 ~ Override type Fixed; percent; cents
 720 ~ Override value real number representing value of override type
 722 ~ Inc1 first level of charging (minimum # of seconds) charge
 724 ~ Inc2 second level of charging

714

FIG. 36

Bundle Override Record for Located ML_id

716 ~ ML_Id 1019
 718 ~ Override type percent
 720 ~ Override value 10.0
 722 ~ Inc1 30 seconds
 724 ~ Inc2 6 seconds

726

FIG. 37

		736
<u>Subscriber Account Table Record</u>		
738 ~	Username	Subscriber username
740 ~	Funds balance	real number representing \$ value of credit
742 ~	Free time balance	integer representing # of free seconds

FIG. 38

		744
<u>Subscriber Account Record for Vancouver Caller</u>		
738 ~	Username	2001 1050 8667
740 ~	Funds balance	\$10.00
742 ~	Free time balance	100

FIG. 39

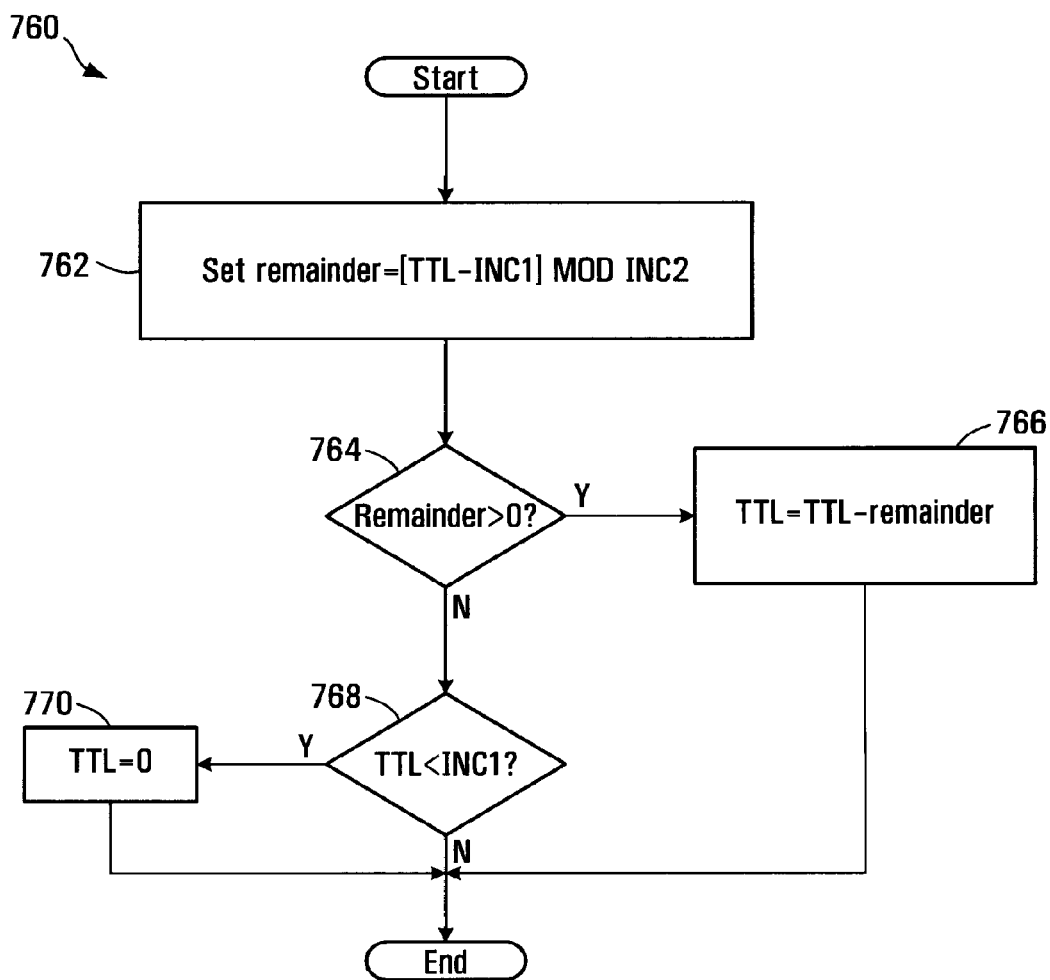


FIG. 40

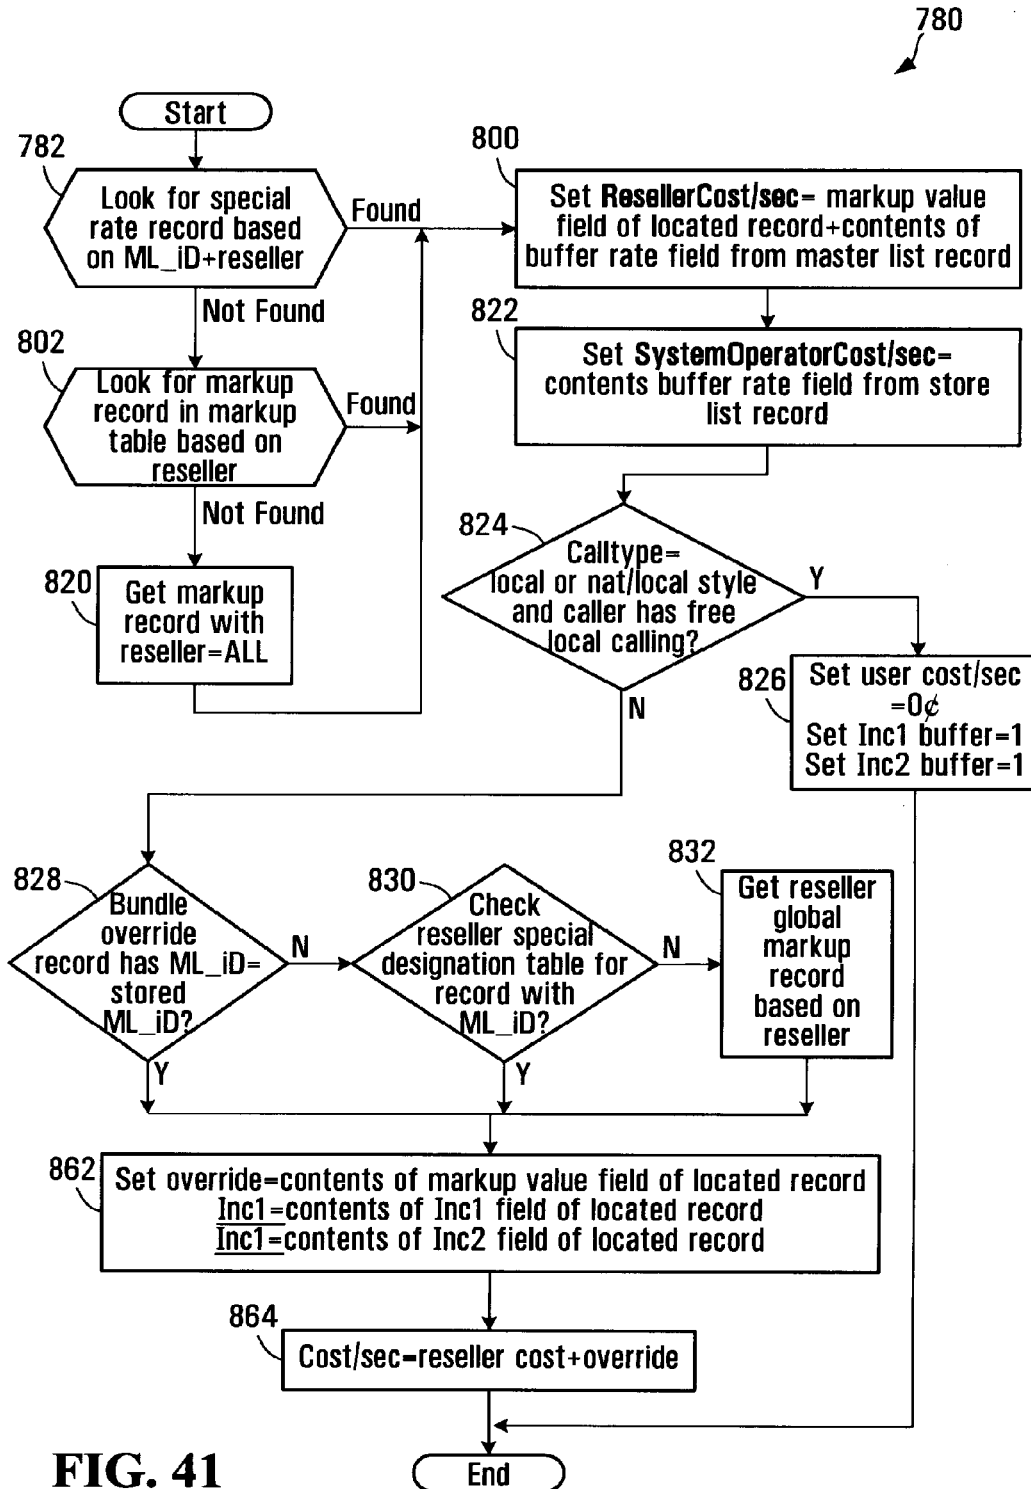


FIG. 41

784

System Operator Special Rates Table Record

786	Reseller	retailer id
788	ML_Id	master list id
790	Markup Table	fixed; percent; cents
792	Markup Value	real number representing value of markup type
794	Inc1	first level of charging (minimum # of seconds) charge
796	Inc2	second level of charging

FIG. 42

798

System Operator Special Rates Table Record for Klondike

786	Reseller	Klondike
788	ML_Id	1019
790	Markup Table	cents
792	Markup Value	\$0.001
794	Inc1	30
796	Inc2	6

FIG. 43

System Operator Markup Table Record

804

806	Reseller	reseller id code
808	Markup Table	fixed; percent; cents
810	Markup Value	real number representing value of markup type
812	Inc1	first level of charging (minimum # of seconds) charge
814	Inc2	second level of charging

FIG. 44

System Operator Markup Table Record for the Reseller Klondike

806	Reseller	Klondike
808	Markup Table	cents
810	Markup Value	\$0.01
812	Inc1	30
814	Inc2	6

FIG. 45

System Operator Markup Table Record

806	Reseller	all
808	Markup Table	percent
810	Markup Value	1.0
812	Inc1	30
814	Inc2	6

FIG. 46

Reseller Special Destinations Table Record

834	Reseller	reseller id code
836	ML_id	Master List ID code
838	Markup Table	fixed; percent; cents
840	Markup Value	real number representing value of markup type
842	Inc1	first level of charging (minimum # of seconds) charge
844	Inc2	second level of charging

832

FIG. 47

Reseller Special Destinations Table Record for the Reseller Klondike

834	Reseller	Klondike
836	ML_id	1019
838	Markup Table	percent
840	Markup Value	5%
842	Inc1	30
844	Inc2	6

846

FIG. 48

Reseller Global Markup Table Record

850	Reseller	reseller id code
852	Markup Table	fixed; percent; cents
854	Markup Value	real number representing value of markup type
856	Inc1	first level of charging (minimum # of seconds) charge
858	Inc2	second level of charging

848

FIG. 49

Reseller Global Markup Table Record for the Reseller Klondike

850	Reseller	Klondike
852	Markup Table	percent
854	Markup Value	10%
856	Inc1	30
858	Inc2	6

860

FIG. 50

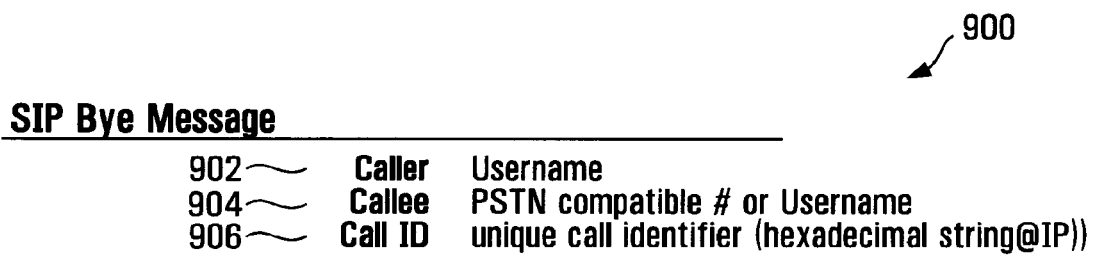


FIG. 51

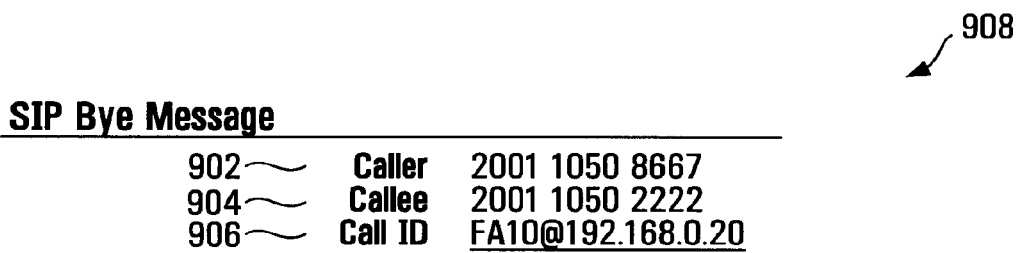
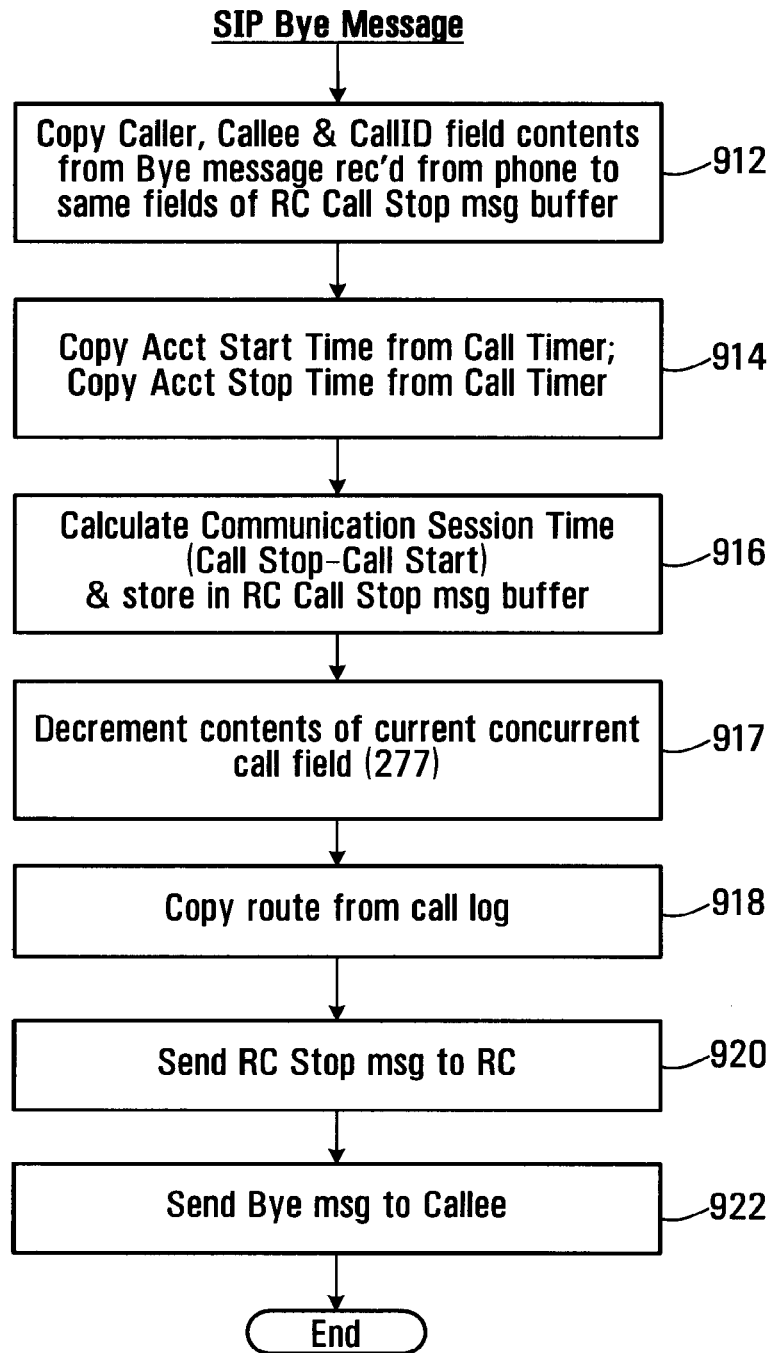


FIG. 52

910

**FIG. 53**

1000

RC Call Stop Message

1002	Caller	Username
1004	Callee	PSTN compatible # or Username
1006	Call ID	unique call identifier (hexadecimal string@IP)
1008	Acct Start Time	start time of call
1010	Acct Stop Time	time the call ended
1012	Acct Session Time	start time-stop time (in seconds)
1014	Route	IP address for the communications link that was established

FIG. 54

1020

RC Call Stop Message for Calgary Callee

1002	Caller	2001 1050 8667
1004	Callee	2001 1050 2222
1006	Call ID	FA10@192.168.0.20
1008	Acct Start Time	2006-12-30 12:12:12
1010	Acct Stop Time	2006-12-30 12:12:14
1012	Acct Session Time	2
1014	Route	72.64.39.58

FIG. 55

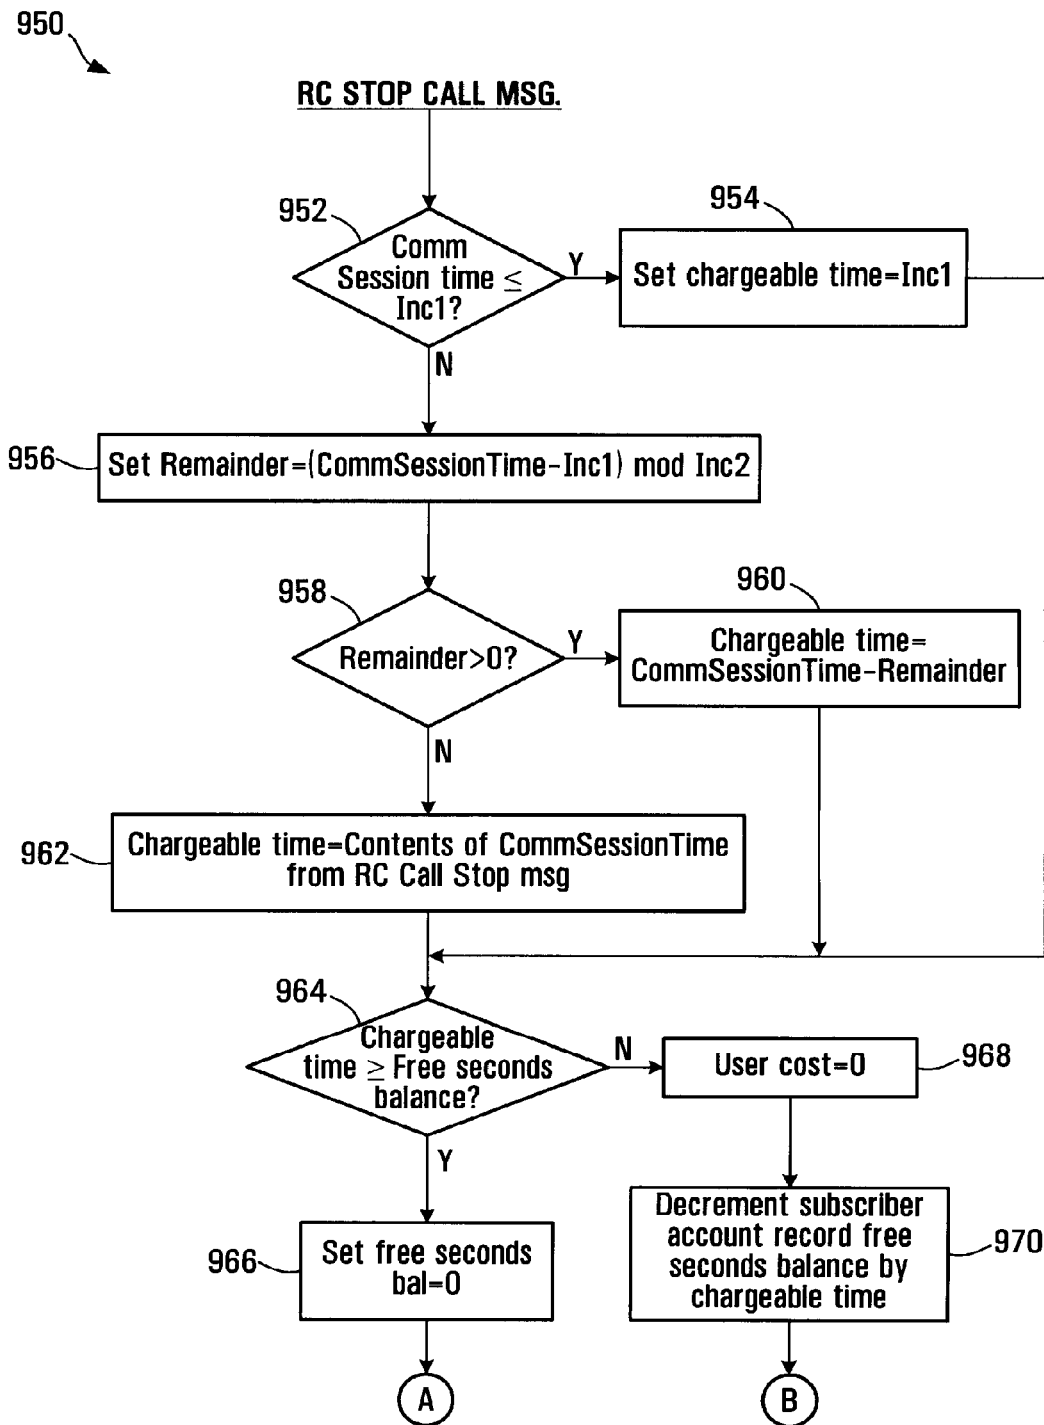


FIG. 56A

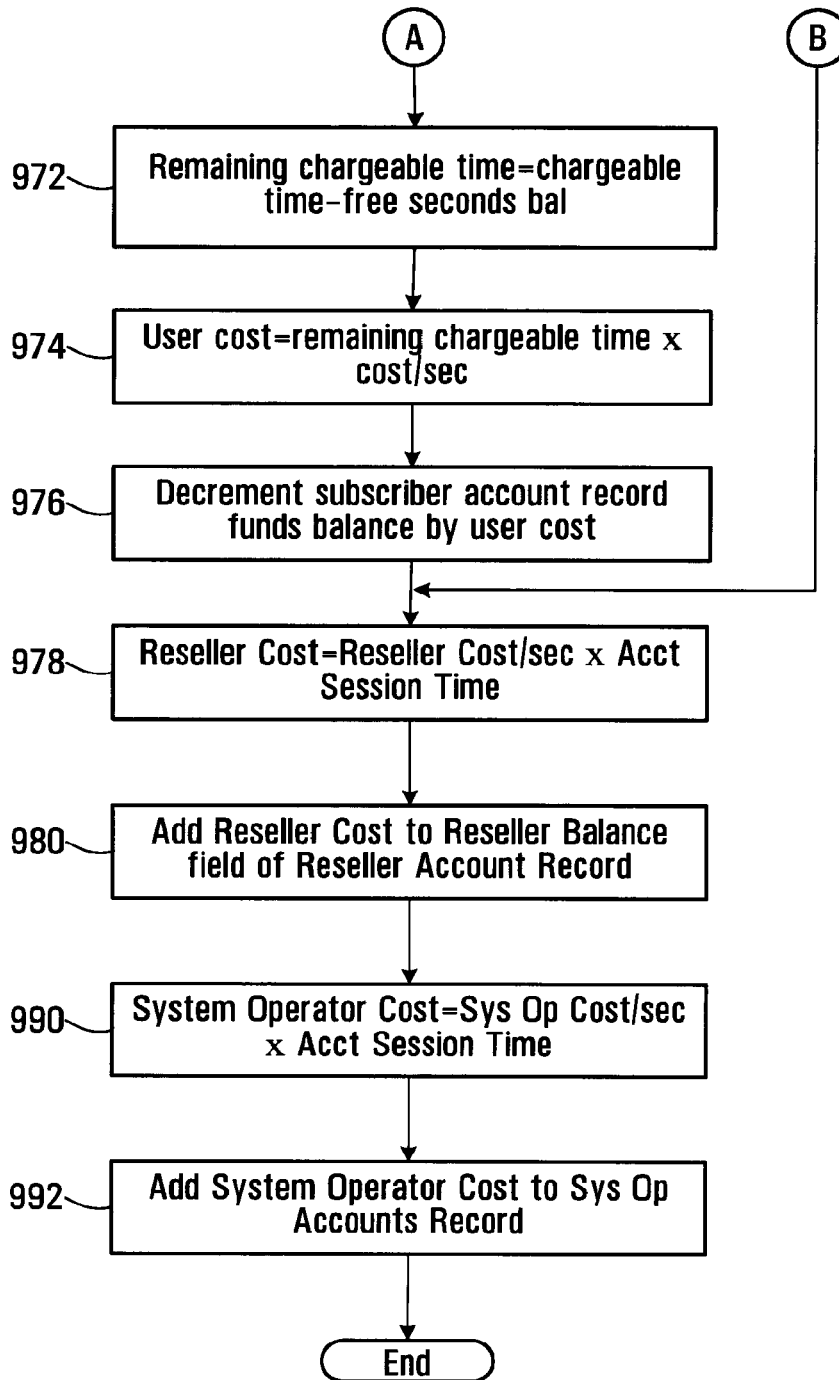


FIG. 56B

982 ↙

Reseller Accounts Table Record

984 ~	Reseller ID	reseller id code
986 ~	Reseller balance	accumulated balance of charges

FIG. 57

988 ↙

Reseller Accounts Table Record for Klondike

984 ~	Reseller ID	Klondike
986 ~	Reseller balance	\$100.02

FIG. 58

994 ↙

System Operator Accounts Table Record

996 ~	System Operator balance	accumulated balance of charges
-------	-------------------------	--------------------------------

FIG. 59

System Operator Accounts Record for this System Operator

996 ~	System Operator balance	\$1000.02
-------	-------------------------	-----------

FIG. 60

US 9,826,002 B2

1

PRODUCING ROUTING MESSAGES FOR VOICE OVER IP COMMUNICATIONS

This application is a continuation of U.S. application Ser. No. 15/396,344, filed Dec. 30, 2016, which is a continuation of U.S. application Ser. No. 14/877,570, filed Oct. 7, 2015, now U.S. Pat. No. 9,537,762, which is a continuation of U.S. application Ser. No. 13/966,096, filed Aug. 13, 2013, now U.S. Pat. No. 9,179,005, which is a continuation of U.S. application Ser. No. 12/513,147, filed Mar. 1, 2010, now U.S. Pat. No. 8,542,815, which is a national phase entry of PCT/CA2007/001956, filed Nov. 1, 2007, which claims priority to U.S. Provisional Application No. 60/856,212, filed Nov. 2, 2006, all of which are incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

1. Field of Invention

This invention relates to voice over IP communications and methods and apparatus for routing and billing.

2. Description of Related Art

Internet protocol (IP) telephones are typically personal computer (PC) based telephones connected within an IP network, such as the public Internet or a private network of a large organization. These IP telephones have installed "voice-over-IP" (VoIP) software enabling them to make and receive voice calls and send and receive information in data and video formats.

IP telephony switches installed within the IP network enable voice calls to be made within or between IP networks, and between an IP network and a switched circuit network (SCN), such as the public switched telephone network (PSTN). If the IP switch supports the Signaling System 7 (SS7) protocol, the IP telephone can also access PSTN databases.

The PSTN network typically includes complex network nodes that contain all information about a local calling service area including user authentication and call routing. The PSTN network typically aggregates all information and traffic into a single location or node, processes it locally and then passes it on to other network nodes, as necessary, by maintaining route tables at the node. PSTN nodes are redundant by design and thus provide reliable service, but if a node should fail due to an earthquake or other natural disaster, significant, if not complete service outages can occur, with no other nodes being able to take up the load.

Existing VoIP systems do not allow for high availability and resiliency in delivering Voice Over IP based Session Initiation Protocol (SIP) Protocol service over a geographically dispersed area such as a city, region or continent. Most resiliency originates from the provision of IP based telephone services to one location or a small number of locations such as a single office or network of branch offices.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, there is provided a process for operating a call routing controller to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The process involves, in response to initiation of a call by a calling subscriber, receiving a caller identifier and a callee identifier. The process also involves using call classification criteria associated with the caller identifier to classify the call as a public network call or a private network call. The process further involves

2

producing a routing message identifying an address, on the private network, associated with the callee when the call is classified as a private network call. The process also involves producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The process may involve receiving a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

Using the call classification criteria may involve searching a database to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

Locating a record may involve locating a caller dialing profile comprising a username associated with the caller, a domain associated with the caller, and at least one calling attribute.

Using the call classification criteria may involve comparing calling attributes associated with the caller dialing profile with aspects of the callee identifier.

Comparing may involve determining whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier has a length within a range specified in the caller dialing profile.

The process may involve formatting the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier.

Formatting may involve removing an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

Formatting may involve removing a national dialing digit from the callee identifier and prepending a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

Formatting may involve prepending a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

Formatting may involve prepending a caller country code and an area code to the callee identifier when the callee identifier has a length that matches a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The process may involve classifying the call as a private network call when the re-formatted callee identifier identifies a subscriber to the private network.

The process may involve determining whether the callee identifier complies with a pre-defined username format and if so, classifying the call as a private network call.

The process may involve causing a database of records to be searched to locate a direct in dial (DID) bank table record associating a public telephone number with the re-formatted callee identifier and if the DID bank table record is found, classifying the call as a private network call and if a DID bank table record is not found, classifying the call as a public network call.

US 9,826,002 B2

3

Producing the routing message identifying a node on the private network may involve setting a callee identifier in response to a username associated with the DID bank table record.

Producing the routing message may involve determining whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier.

Determining whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier may involve determining whether a prefix of the re-formatted callee identifier matches a corresponding prefix of a username associated with the caller dialing profile.

When the node associated with the caller is not the same as the node associated with the callee, the process involves producing a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and communicating the routing message to a call controller.

When the node associated with the caller is the same as the node associated with the callee, the process involves determining whether to perform at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee.

Producing the routing message may involve producing a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The process may involve communicating the routing message to a call controller.

Producing a routing message identifying a gateway to the public network may involve searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve loading a routing message buffer with the reformatted callee identifier and an identification of specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The process may involve communicating a routing message involving the contents of the routing message buffer to a call controller.

The process may involve causing the dialing profile to include a maximum concurrent call value and a concurrent call count value and causing the concurrent call count value to be incremented when the user associated with the dialing profile initiates a call and causing the concurrent call count value to be decremented when a call with the user associated with the dialing profile is ended.

In accordance with another aspect of the invention, there is provided a call routing apparatus for facilitating communications between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The apparatus includes receiving provisions for receiving a caller identifier and a callee identifier, in

4

response to initiation of a call by a calling subscriber. The apparatus also includes classifying provisions for classifying the call as a private network call or a public network call according to call classification criteria associated with the caller identifier. The apparatus further includes provisions for producing a routing message identifying an address, on the private network, associated with the callee when the call is classified as a private network call. The apparatus also includes provisions for producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The receiving provisions may be operably configured to receive a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

The apparatus may further include searching provisions for searching a database including records associating calling attributes with subscribers to the private network to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

The records may include dialing profiles each including a username associated with the subscriber, an identification of a domain associated with the subscriber, and an identification of at least one calling attribute associated with the subscriber.

The call classification provisions may be operably configured to compare calling attributes associated with the caller dialing profile with aspects of the callee identifier.

The calling attributes may include an international dialing digit and call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

The calling attributes may include a national dialing digit and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

The calling attributes may include an area code and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

The calling attribute may include a number length range and the call classification provisions may be operably configured to determine whether the callee identifier has a length within a number length range specified in the caller dialing profile.

The apparatus may further include formatting provisions for formatting the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier.

The formatting provisions may be operably configured to remove an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

The formatting provisions may be operably configured to remove a national dialing digit from the callee identifier and prepend a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

The formatting provisions may be operably configured to prepend a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

The formatting provisions may be operably configured to prepend a caller country code and area code to the callee identifier when the callee identifier has a length that matches

US 9,826,002 B2

5

a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The classifying provisions may be operably configured to classify the call as a private network call when the reformatted callee identifier identifies a subscriber to the private network.

The classifying provisions may be operably configured to classify the call as a private network call when the callee identifier complies with a pre-defined username format.

The apparatus may further include searching provisions for searching a database of records to locate a direct in dial (DID) bank table record associating a public telephone number with the reformatted callee identifier and the classifying provisions may be operably configured to classify the call as a private network call when the DID bank table record is found and to classify the call as a public network call when a DID bank table record is not found

The private network routing message producing provisions may be operably configured to produce a routing message having a callee identifier set according to a username associated with the DID bank table record.

The private network routing message producing provisions may be operably configured to determine whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier.

The private network routing provisions may include provisions for determining whether a prefix of the reformatted callee identifier matches a corresponding prefix of a username associated with the caller dialing profile.

The private network routing message producing provisions may be operably configured to produce a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and to communicate the routing message to a call controller.

The private network routing message producing provisions may be operably configured to perform at least one of the following forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee, when the node associated with the caller is the same as the node associated with the callee.

The provisions for producing the private network routing message may be operably configured to produce a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The apparatus further includes provisions for communicating the routing message to a call controller.

The provisions for producing a public network routing message identifying a gateway to the public network may include provisions for searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The apparatus further includes provisions for searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The apparatus further includes a routing message buffer and provisions for loading the routing message buffer with the reformatted callee identifier and an identification of

6

specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The apparatus further includes provisions for communicating a routing message including the contents of the routing message buffer to a call controller.

The apparatus further includes means for causing said dialing profile to include a maximum concurrent call value and a concurrent call count value and for causing said concurrent call count value to be incremented when the user associated with said dialing profile initiates a call and for causing said concurrent call count value to be decremented when a call with said user associated with said dialing profile is ended.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes dialing profile records comprising fields for associating with respective subscribers to the system, a subscriber user name, direct-in-dial records comprising fields for associating with respective subscriber usernames, a user domain and a direct-in-dial number, prefix to node records comprising fields for associating with at least a portion of the respective subscriber usernames, a node address of a node in the system, whereby a subscriber name can be used to find a user domain, at least a portion of the a subscriber name can be used to find a node with which the subscriber identified by the subscriber name is associated, and a user domain and subscriber name can be located in response to a direct-in-dial number.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes master list records comprising fields for associating a dialing code with respective master list identifiers and supplier list records linked to master list records by the master list identifiers, said supplier list records comprising fields for associating with a communications services supplier, a supplier id, a master list id, a route identifier and a billing rate code, whereby communications services suppliers are associated with dialing codes, such that dialing codes can be used to locate suppliers capable of providing a communications link associated with a given dialing code.

In accordance with another aspect of the invention, there is provided a method for determining a time to permit a communication session to be conducted. The method involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Calculating the first time value may involve retrieving a record associated with the participant and obtaining from the record at least one of the free time and the funds balance.

Producing the second time value may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

US 9,826,002 B2

7

Producing the second time value may involve setting a difference between the first time value and the remainder as the second time value.

The method may further involve setting the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

Calculating the cost per unit time may involve locating a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and setting a reseller rate equal to the sum of the markup value and the buffer rate.

Locating the record in a database may involve locating at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller and a default reseller markup record.

Calculating the cost per unit time value further may involve locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator markup record specifying a default cost per unit time.

The method may further involve setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a reseller balance by the product of the reseller rate and the communication session time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided an apparatus for determining a time to permit a communication session to be conducted. The apparatus includes a processor circuit, a computer readable medium coupled to the processor circuit and encoded with instructions for directing the processor circuit to calculate a cost per unit time for the communication session, calculate a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and produce a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

The instructions may include instructions for directing the processor circuit to retrieve a record associated with the participant and obtain from the record at least one of the free time and the funds balance.

The instructions may include instructions for directing the processor circuit to produce the second time value by producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

The instructions may include instructions for directing the processor circuit to produce the second time value comprises setting a difference between the first time value and the

8

remainder as the second time value. The instructions may include instructions for directing the processor circuit to set the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

The instructions for directing the processor circuit to calculate the cost per unit time may include instructions for directing the processor circuit to locate a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and set a reseller rate equal to the sum of the markup value and the buffer rate.

The instructions for directing the processor circuit to locate the record in a database may include instructions for directing the processor circuit to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller markup record. The instructions for directing the processor circuit to calculate the cost per unit time value may further include instructions for directing the processor circuit to locate at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator markup record specifying a default cost per unit time.

The instructions may include instructions for directing the processor circuit to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a reseller balance by the product of the reseller rate and the communication session time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided a process for attributing charges for communications services. The process involves determining a first chargeable time in response to a communication session time and a pre-defined billing pattern, determining a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, changing an account balance associated with the user in response to a user cost per unit time. The process may further involve changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

Determining the first chargeable time may involve locating at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and setting as the

US 9,826,002 B2

9

pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may involve a first billing interval and a second billing interval.

Determining the first chargeable time may involve setting the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

Determining the first chargeable time may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and setting the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and setting the first chargeable time to the communication session time when the remainder is not greater than zero.

The process may further involve determining a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Determining the second chargeable time may involve setting the second chargeable time to a difference between the first chargeable time.

The process may further involve resetting the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Changing an account balance associated with the user may involve calculating a user cost value in response to the second chargeable time and the user cost per unit time.

The process may further involve changing a user free cost balance in response to the user cost value.

The process may further involve setting the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The process may further involve changing a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided an apparatus for attributing charges for communications services. The apparatus includes a processor circuit, a computer readable medium in communication with the processor circuit and encoded with instructions for directing the processor circuit to determine a first chargeable time in response to a communication session time and a pre-defined billing pattern, determine a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, change an account balance associated with the user in response to a user cost per unit time.

The instructions may further include instructions for changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

The instructions for directing the processor circuit to determine the first chargeable time may further include instructions for causing the processor circuit to communicate with a database to locate at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller

10

of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and instructions for setting as the pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may include a first billing interval and a second billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for directing the processor circuit to set the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and instructions for causing the processor circuit to set the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and instructions for causing the processor circuit to set the first chargeable time to the communication session time when the remainder is not greater than zero.

The instructions may further include instructions for causing the processor circuit to determine a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to determine the second chargeable time may include instructions for causing the processor circuit to set the second chargeable time to a difference between the first chargeable time.

The instructions may further include instructions for causing the processor circuit to reset the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to change an account balance associated with the user may include instructions for causing the processor circuit to calculate a user cost value in response to the second chargeable time and the user cost per unit time.

The instructions may further include instructions for causing the processor circuit to change a user free cost balance in response to the user cost value.

The instructions may further include instructions for causing the processor circuit to set the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The instructions may further include instructions for causing the processor circuit to change a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided a computer readable medium encoded with codes for directing a processor circuit to execute one or more of the methods described above and/or variants thereof.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon

US 9,826,002 B2

11

review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention, FIG. 1 is a block diagram of a system according to a first embodiment of the invention;

FIG. 2 is a block diagram of a caller telephone according to the first embodiment of the invention;

FIG. 3 is a schematic representation of a SIP invite message transmitted between the caller telephone and a controller shown in FIG. 1;

FIG. 4 is a block diagram of a call controller shown in FIG. 1;

FIG. 5 is a flowchart of a process executed by the call controller shown in FIG. 1;

FIG. 6 is a schematic representation of a routing, billing and rating (RC) request message produced by the call controller shown in FIG. 1;

FIG. 7 is a block diagram of a processor circuit of a routing, billing, rating element of the system shown in FIG. 1;

FIGS. 8A-8D is a flowchart of a RC request message handler executed by the RC processor circuit shown in FIG. 7;

FIG. 9 is a tabular representation of a dialing profile stored in a database accessible by the RC shown in FIG. 1;

FIG. 10 is a tabular representation of a dialing profile for a caller using the caller telephone shown in FIG. 1;

FIG. 11 is a tabular representation of a callee profile for a callee located in Calgary;

FIG. 12 is a tabular representation of a callee profile for a callee located in London;

FIG. 13 is a tabular representation of a Direct-in-Dial (DID) bank table record stored in the database shown in FIG. 1;

FIG. 14 is a tabular representation of an exemplary DID bank table record for the Calgary callee referenced in FIG. 11;

FIG. 15 is a tabular representation of a routing message transmitted from the RC to the call controller shown in FIG. 1;

FIG. 16 is a schematic representation of a routing message buffer holding a routing message for routing a call to the Calgary callee referenced in FIG. 11;

FIG. 17 is a tabular representation of a prefix to supernode table record stored in the database shown in FIG. 1;

FIG. 18 is a tabular representation of a prefix to supernode table record that would be used for the Calgary callee referenced in FIG. 11;

FIG. 19 is a tabular representation of a master list record stored in a master list table in the database shown in FIG. 1;

FIG. 20 is a tabular representation of a populated master list record;

FIG. 21 is a tabular representation of a suppliers list record stored in the database shown in FIG. 1;

FIG. 22 is a tabular representation of a specific supplier list record for a first supplier;

FIG. 23 is a tabular representation of a specific supplier list record for a second supplier;

FIG. 24 is a tabular representation of a specific supplier list record for a third supplier;

12

FIG. 25 is a schematic representation of a routing message, held in a routing message buffer, identifying to the controller a plurality of possible suppliers that may carry the call;

FIG. 26 is a tabular representation of a call block table record;

FIG. 27 is a tabular representation of a call block table record for the Calgary callee;

FIG. 28 is a tabular representation of a call forwarding table record;

FIG. 29 is a tabular representation of a call forwarding table record specific for the Calgary callee;

FIG. 30 is a tabular representation of a voicemail table record specifying voicemail parameters to enable the caller to leave a voicemail message for the callee;

FIG. 31 is a tabular representation of a voicemail table record specific to the Calgary callee;

FIG. 32 is a schematic representation of an exemplary routing message, held in a routing message buffer, indicating call forwarding numbers and a voicemail server identifier;

FIGS. 33A and 33B are respective portions of a flowchart of a process executed by the RC processor for determining a time to live value;

FIG. 34 is a tabular representation of a subscriber bundle table record;

FIG. 35 is a tabular representation of a subscriber bundle record for the Vancouver caller;

FIG. 36 is a tabular representation of a bundle override table record;

FIG. 37 is a tabular representation of bundle override record for a located master list ID;

FIG. 38 is a tabular representation of a subscriber account table record;

FIG. 39 is a tabular representation of a subscriber account record for the Vancouver caller;

FIG. 40 is a flowchart of a process for producing a second time value executed by the RC processor circuit shown in FIG. 7;

FIG. 41 is a flowchart for calculating a call cost per unit time;

FIG. 42 is a tabular representation of a system operator special rates table record;

FIG. 43 is a tabular representation of a system operator special rates table record for a reseller named Klondike;

FIG. 44 is a tabular representation of a system operator mark-up table record;

FIG. 45 is a tabular representation of a system operator mark-up table record for the reseller Klondike;

FIG. 46 is a tabular representation of a default system operator mark-up table record;

FIG. 47 is a tabular representation of a reseller special destinations table record;

FIG. 48 is a tabular representation of a reseller special destinations table record for the reseller Klondike;

FIG. 49 is a tabular representation of a reseller global mark-up table record;

FIG. 50 is a tabular representation of a reseller global mark-up table record for the reseller Klondike;

FIG. 51 is a tabular representation of a SIP bye message transmitted from either of the telephones shown in FIG. 1 to the call controller;

FIG. 52 is a tabular representation of a SIP bye message sent to the controller from the Calgary callee;

FIG. 53 is a flowchart of a process executed by the call controller for producing a RC stop message in response to receipt of a SIP bye message;

US 9,826,002 B2

13

FIG. 54 is a tabular representation of an exemplary RC call stop message;

FIG. 55 is a tabular representation of an RC call stop message for the Calgary callee;

FIGS. 56A and 56B are respective portions of a flowchart of a RC call stop message handling routine executed by the RC shown in FIG. 1;

FIG. 57 is a tabular representation of a reseller accounts table record;

FIG. 58 is a tabular representation of a reseller accounts table record for the reseller Klondike;

FIG. 59 is a tabular representation of a system operator accounts table record; and

FIG. 60 is a tabular representation of a system operator accounts record for the system operator described herein.

DETAILED DESCRIPTION

Referring to FIG. 1, a system for making voice over IP telephone/videophone calls is shown generally at 10. The system includes a first super node shown generally at 11 and a second super node shown generally at 21. The first super node 11 is located in geographical area, such as Vancouver, B.C., Canada for example and the second super node 21 is located in London, England, for example. Different super nodes may be located in different geographical regions throughout the world to provide telephone/videophone service to subscribers in respective regions. These super nodes may be in communication with each other by high speed/high data throughput links including optical fiber, satellite and/or cable links, forming a backbone to the system. These super nodes may alternatively or, in addition, be in communication with each other through conventional internet services.

In the embodiment shown, the Vancouver supernode 11 provides telephone/videophone service to western Canadian customers from Vancouver Island to Ontario. Another node (not shown) may be located in Eastern Canada to provide services to subscribers in that area.

Other nodes of the type shown may also be employed within the geographical area serviced by a supernode, to provide for call load sharing, for example within a region of the geographical area serviced by the supernode. However, in general, all nodes are similar and have the properties described below in connection with the Vancouver supernode 11.

In this embodiment, the Vancouver supernode includes a call controller (C) 14, a routing controller (RC) 16, a database 18 and a voicemail server 19 and a media relay 9. Each of these may be implemented as separate modules on a common computer system or by separate computers, for example. The voicemail server 19 need not be included in the node and can be provided by an outside service provider.

Subscribers such as a subscriber in Vancouver and a subscriber in Calgary communicate with the Vancouver supernode using their own internet service providers which route internet traffic from these subscribers over the internet shown generally at 13 in FIG. 1. To these subscribers the Vancouver supernode is accessible at a pre-determined internet protocol (IP) address or a fully qualified domain name that can be accessed in the usual way through a subscriber's internet service provider. The subscriber in Vancouver uses a telephone 12 that is capable of communicating with the Vancouver supernode 11 using Session Initiation Protocol (SIP) messages and the Calgary subscriber uses a similar telephone 15, in Calgary AB.

14

It should be noted that throughout the description of the embodiments of this invention, the IP/UDP addresses of all elements such as the caller and callee telephones, call controller, media relay, and any others, will be assumed to be valid IP/UDP addresses directly accessible via the Internet or a private IP network, for example, depending on the specific implementation of the system. As such, it will be assumed, for example, that the caller and callee telephones will have IP/UDP addresses directly accessible by the call controllers and the media relays on their respective supernodes, and those addresses will not be obscured by Network Address Translation (NAT) or similar mechanisms. In other words, the IP/UDP information contained in SIP messages (for example the SIP Invite message or the RC Request message which will be described below) will match the IP/UDP addresses of the IP packets carrying these SIP messages.

It will be appreciated that in many situations, the IP addresses assigned to various elements of the system may be in a private IP address space, and thus not directly accessible from other elements. Furthermore, it will also be appreciated that NAT is commonly used to share a "public" IP address between multiple devices, for example between home PCs and IP telephones sharing a single Internet connection. For example, a home PC may be assigned an IP address such as 192.168.0.101 and a Voice over IP telephone may be assigned an IP address of 192.168.0.103. These addresses are located in so called "non-routable" (IP) address space and cannot be accessed directly from the Internet. In order for these devices to communicate with other computers located on the Internet, these IP addresses have to be converted into a "public" IP address, for example 24.10.10.123 assigned by the Internet Service Provider to the subscriber, by a device performing NAT, typically a home router. In addition to translating the IP addresses, NAT typically also translates UDP port numbers, for example an audio path originating at a VoIP telephone and using a UDP port 12378 at its private IP address, may have been translated to a UDP port 23465 associated with the public IP address of the NAT device. In other words, when a packet originating from the above VoIP telephone arrives at an Internet-based supernode, the source IP/UDP address contained in the IP packet header will be 24.10.10.1:23465, whereas the source IP/UDP address information contained in the SIP message inside this IP packet will be 192.168.0.103:12378. The mismatch in the IP/UDP addresses may cause a problem for SIP-based VoIP systems because, for example, a supernode will attempt to send messages to a private address of a telephone but the messages will never get there.

Referring to FIG. 1, in an attempt to make a call by the Vancouver telephone/videophone 12 to the Calgary telephone/videophone 15, the Vancouver telephone/videophone sends a SIP invite message to the Vancouver supernode 11 and in response, the call controller 14 sends an RC request message to the RC 16 which makes various enquiries of the database 18 to produce a routing message which is sent back to the call controller 14. The call controller 14 then communicates with the media relay 9 to cause a communications link including an audio path and a videophone (if a video-path call) to be established through the media relay to the same node, a different node or to a communications supplier gateway as shown generally at 20 to carry audio, and where applicable, video traffic to the call recipient or callee.

Generally, the RC 16 executes a process to facilitate communication between callers and callees. The process involves, in response to initiation of a call by a calling

US 9,826,002 B2

15

subscriber, receiving a callee identifier from the calling subscriber, using call classification criteria associated with the calling subscriber to classify the call as a public network call or a private network call and producing a routing message identifying an address on the private network, associated with the callee when the call is classified as a private network call and producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

Subscriber Telephone

In greater detail, referring to FIG. 2, in this embodiment, the telephone/videophone 12 includes a processor circuit shown generally at 30 comprising a microprocessor 32, program memory 34, an input/output (I/O) port 36, parameter memory 38 and temporary memory 40. The program memory 34, I/O port 36, parameter memory 38 and temporary memory 40 are all in communication with the microprocessor 32. The I/O port 36 has a dial input 42 for receiving a dialled telephone/videophone number from a keypad, for example, or from a voice recognition unit or from pre-stored telephone/videophone numbers stored in the parameter memory 38, for example. For simplicity, in FIG. 2 a box labelled dialing functions 44 represents any device capable of informing the microprocessor 32 of a callee identifier, e.g., a callee telephone/videophone number.

The processor 32 stores the callee identifier in a dialled number buffer 45. In this case, assume the dialled number is 2001 1050 2222 and that it is a number associated with the Calgary subscriber. The I/O port 36 also has a handset interface 46 for receiving and producing signals from and to a handset that the user may place to his ear. This interface 46 may include a BLUETOOTH™ wireless interface, a wired interface or speaker phone, for example. The handset acts as a termination point for an audio path (not shown) which will be appreciated later. The I/O port 36 also has an internet connection 48 which is preferably a high speed internet connection and is operable to connect the telephone/videophone to an internet service provider. The internet connection 48 also acts as a part of the voice path, as will be appreciated later. It will be appreciated that where the subscriber device is a videophone, a separate video path is established in the same way an audio path is established. For simplicity, the following description refers to a telephone call, but it is to be understood that a videophone call is handled similarly, with the call controller causing the media relay to facilitate both an audio path and a video path instead of only an audio path.

The parameter memory 38 has a username field 50, a password field 52 an IP address field 53 and a SIP proxy address field 54, for example. The user name field 50 is operable to hold a user name, which in this case is 2001 1050 8667. The user name is assigned upon subscription or registration into the system and, in this embodiment, includes a twelve digit number having a continent code 61, a country code 63, a dealer code 70 and a unique number code 74. The continent code 61 is comprised of the first or left-most digit of the user name in this embodiment. The country code 63 is comprised of the next three digits. The dealer code 70 is comprised of the next four digits and the unique number code 74 is comprised of the last four digits. The password field 52 holds a password of up to 512 characters, in this example. The IP address field 53 stores an IP address of the telephone, which for this explanation is 192.168.0.20. The SIP proxy address field 54 holds an IP protocol compatible proxy address which may be provided to the telephone through the internet connection 48 as part of a registration procedure.

16

The program memory 34 stores blocks of codes for directing the processor 32 to carry out the functions of the telephone, one of which includes a firewall block 56 which provides firewall functions to the telephone, to prevent access by unauthorized persons to the microprocessor 32 and memories 34, 38 and 40 through the internet connection 48. The program memory 34 also stores codes 57 for establishing a call ID. The call ID codes 57 direct the processor 32 to produce a call identifier having a format comprising a hexadecimal string at an IP address, the IP address being the IP address of the telephone. Thus, an exemplary call identifier might be FF10@192.168.0.20.

Generally, in response to picking up the handset interface 46 and activating a dialing function 44, the microprocessor 32 produces and sends a SIP invite message as shown in FIG. 3, to the routing controller 16 shown in FIG. 1. This SIP invite message is essentially to initiate a call by a calling subscriber.

Referring to FIG. 3, the SIP invite message includes a caller ID field 60, a callee identifier field 62, a digest parameters field 64, a call ID field 65 an IP address field 67 and a caller UDP port field 69. In this embodiment, the caller ID field 60 includes the user name 2001 1050 8667 that is the Vancouver user name stored in the user name field 50 of the parameter memory 38 in the telephone 12 shown in FIG. 2. In addition, referring back to FIG. 3, the callee identifier field 62 includes a callee identifier which in this embodiment is the user name 2001 1050 2222 that is the dialled number of the Calgary subscriber stored in the dialled number buffer 45 shown in FIG. 2. The digest parameters field 64 includes digest parameters and the call ID field 65 includes a code comprising a generated prefix code (FF10) and a suffix which is the Internet Protocol (IP) address of the telephone 12 stored in the IP address field 53 of the telephone. The IP address field 67 holds the IP address assigned to the telephone, in this embodiment 192.168.0.20, and the caller UDP port field 69 includes a UDP port identifier identifying a UDP port at which the audio path will be terminated at the caller's telephone.

Call Controller

Referring to FIG. 4, a call controller circuit of the call controller 14 (FIG. 1) is shown in greater detail at 100. The call controller circuit 100 includes a microprocessor 102, program memory 104 and an I/O port 106. The circuit 100 may include a plurality of microprocessors, a plurality of program memories and a plurality of I/O ports to be able to handle a large volume of calls. However, for simplicity, the call controller circuit 100 will be described as having only one microprocessor 102, program memory 104 and I/O port 106, it being understood that there may be more.

Generally, the I/O port 106 includes an input 108 for receiving messages such as the SIP invite message shown in FIG. 3, from the telephone shown in FIG. 2. The I/O port 106 also has an RC request message output 110 for transmitting an RC request message to the RC 16 of FIG. 1, an RC message input 112 for receiving routing messages from the RC 16, a gateway output 114 for transmitting messages to one of the gateways 20 shown in FIG. 1 to advise the gateway to establish an audio path, for example, and a gateway input 116 for receiving messages from the gateway. The I/O port 106 further includes a SIP output 118 for transmitting messages to the telephone 12 to advise the telephone of the IP addresses of the gateways which will establish the audio path. The I/O port 106 further includes a voicemail server input and output 117, 119 respectively for communicating with the voicemail server 19 shown in FIG. 1.

US 9,826,002 B2

17

While certain inputs and outputs have been shown as separate, it will be appreciated that some may be a single IP address and IP port. For example, the messages sent to the RC 16 and received from the RC 16 may be transmitted and received on the same single IP port.

The program memory 104 includes blocks of code for directing the microprocessor 102 to carry out various functions of the call controller 14. For example, these blocks of code include a first block 120 for causing the call controller circuit 100 to execute a SIP invite to RC request process to produce an RC request message in response to a received SIP invite message. In addition, there is a routing message to gateway message block 122 which causes the call controller circuit 100 to produce a gateway query message in response to a received routing message from the RC 16.

Referring to FIG. 5, the SIP invite to RC request process is shown in more detail at 120. On receipt of a SIP invite message of the type shown in FIG. 3, block 122 of FIG. 5 directs the call controller circuit 100 of FIG. 4 to authenticate the user. This may be done, for example, by prompting the user for a password, by sending a message back to the telephone 12 which is interpreted at the telephone as a request for a password entry or the password may automatically be sent to the call controller 14 from the telephone, in response to the message. The call controller 14 may then make enquiries of databases to which it has access, to determine whether or not the user's password matches a password stored in the database. Various functions may be used to pass encryption keys or hash codes back and forth to ensure that the transmittal of passwords is secure.

Should the authentication process fail, the call controller circuit 100 is directed to an error handling routine 124 which causes messages to be displayed at the telephone 12 to indicate there was an authentication problem. If the authentication procedure is passed, block 121 directs the call controller circuit 100 to determine whether or not the contents of the caller ID field 60 of the SIP invite message received from the telephone is an IP address. If it is an IP address, then block 123 directs the call controller circuit 100 to set the contents of a type field variable maintained by the microprocessor 102 to a code representing that the call type is a third party invite. If at block 121 the caller ID field contents do not identify an IP address, then block 125 directs the microprocessor to set the contents of the type field to a code indicating that the call is being made by a system subscriber. Then, block 126 directs the call controller circuit to read the call identifier 65 provided in the SIP invite message from the telephone 12, and at block 128 the processor is directed to produce an RC request message that includes that call ID. Block 129 then directs the call controller circuit 100 to send the RC request to the RC 16.

Referring to FIG. 6, an RC request message is shown generally at 150 and includes a caller field 152, a callee field 154, a digest field 156, a call ID field 158 and a type field 160. The caller, callee, digest call ID fields 152, 154, 156 and 158 contain copies of the caller, callee, digest parameters and call ID fields 60, 62, 64 and 65 of the SIP invite message shown in FIG. 3. The type field 160 contains the type code established at blocks 123 or 125 of FIG. 5 to indicate whether the call is from a third party or system subscriber, respectively. The caller identifier field may include a PSTN number or a system subscriber username as shown, for example.

Routing Controller (RC)

Referring to FIG. 7, the RC 16 is shown in greater detail and includes an RC processor circuit shown generally at 200. The RC processor circuit 200 includes a processor 202,

18

program memory 204, a table memory 206, buffer memory 207, and an I/O port 208, all in communication with the processor 202. (As earlier indicated, there may be a plurality of processor circuits (202), memories (204), etc.) The buffer memory 207 includes a caller id buffer 209 and a callee id buffer 211.

The I/O port 208 includes a database request port 210 through which a request to the database (18 shown in FIG. 1) can be made and includes a database response port 212 for receiving a reply from the database 18. The I/O port 208 further includes an RC request message input 214 for receiving the RC request message from the call controller (14 shown in FIG. 1) and includes a routing message output 216 for sending a routing message back to the call controller 14. The I/O port 208 thus acts to receive caller identifier and a callee identifier contained in the RC request message from the call controller, the RC request message being received in response to initiation of a call by a calling subscriber.

The program memory 204 includes blocks of codes for directing the processor 202 to carry out various functions of the RC (16). One of these blocks includes an RC request message handler 250 which directs the RC to produce a routing message in response to a received RC request message. The RC request message handler process is shown in greater detail at 250 in FIGS. 8A through 8D.
RC Request Message Handler

Referring to FIG. 8A, the RC request message handler begins with a first block 252 that directs the RC processor circuit (200) to store the contents of the RC request message (150) in buffers in the buffer memory 207 of FIG. 7, one of which includes the caller ID buffer 209 of FIG. 7 for separately storing the contents of the callee field 154 of the RC request message. Block 254 then directs the RC processor circuit to use the contents of the caller field 152 in the RC request message shown in FIG. 6, to locate and retrieve from the database 18 a record associating calling attributes with the calling subscriber. The located record may be referred to as a dialing profile for the caller. The retrieved dialing profile may then be stored in the buffer memory 207, for example.

Referring to FIG. 9, an exemplary data structure for a dialing profile is shown generally at 253 and includes a user name field 258, a domain field 260, and calling attributes comprising a national dialing digits (NDD) field 262, an international dialing digits (IDD) field 264, a country code field 266, a local area codes field 267, a caller minimum local length field 268, a caller maximum local length field 270, a reseller field 273, a maximum number of concurrent calls field 275 and a current number of concurrent calls field 277. Effectively the dialing profile is a record identifying calling attributes of the caller identified by the caller identifier. More generally, dialing profiles represent calling attributes of respective subscribers.

An exemplary caller profile for the Vancouver subscriber is shown generally at 276 in FIG. 10 and indicates that the user name field 258 includes the user name (2001 1050 8667) that has been assigned to the subscriber and is stored in the user name field 50 in the telephone as shown in FIG. 2.

Referring back to FIG. 10, the domain field 260 includes a domain name as shown at 282, including a node type identifier 284, a location code identifier 286, a system provider identifier 288 and a domain portion 290. The domain field 260 effectively identifies a domain or node associated with the user identified by the contents of the user name field 258.

In this embodiment, the node type identifier 284 includes the code "sp" identifying a supernode and the location

US 9,826,002 B2

19

identifier **286** identifies the supernode as being in Vancouver (YVR). The system provider identifier **288** identifies the company supplying the service and the domain portion **290** identifies the “com” domain.

The national dialled digit field **262** in this embodiment includes the digit “1” and, in general, includes a number specified by the International Telecommunications Union (ITU-T) Telecommunications Standardization Sector (ITU-T) E.164 Recommendation which assigns national dialing digits to countries.

The international dialing digit field **264** includes a code also assigned according to the ITU-T according to the country or location of the user.

The country code field **266** also includes the digit “1” and, in general, includes a number assigned according to the ITU-T to represent the country in which the user is located.

The local area codes field **267** includes a list of area codes that have been assigned by the ITU-T to the geographical area in which the subscriber is located. The caller minimum and maximum local number length fields **268** and **270** hold numbers representing minimum and maximum local number lengths permitted in the area code(s) specified by the contents of the local area codes field **267**. The reseller field **273** is optional and holds a code identifying a retailer of the services, in this embodiment “Klondike”. The maximum number of concurrent calls field **275** holds a code identifying the maximum number of concurrent calls that the user is entitled to cause to concurrently exist. This permits more than one call to occur concurrently while all calls for the user are billed to the same account. The current number of concurrent calls field **277** is initially 0 and is incremented each time a concurrent call associated with the user is initiated and is decremented when a concurrent call is terminated. The area codes associated with the user are the area codes associated with the location code identifier **286** of the contents of the domain field **260**.

A dialing profile of the type shown in FIG. 9 is produced whenever a user registers with the system or agrees to become a subscriber to the system. Thus, for example, a user wishing to subscribe to the system may contact an office maintained by a system operator and personnel in the office may ask the user certain questions about his location and service preferences, whereupon tables can be used to provide office personnel with appropriate information to be entered into the user name **258**, domain **260**, NDD **262**, IDD **264**, country code **266**, local area codes **267**, caller minimum and maximum local length fields **268** and **270** reseller field **273** and concurrent call fields **275** and **277** to establish a dialing profile for the user.

Referring to FIGS. 11 and 12, callee dialing profiles for users in Calgary and London, respectively for example, are shown.

In addition to creating dialing profiles when a user registers with the system, a direct-in-dial (DID) record of the type shown at **278** in FIG. 13 is added to a direct-in-dial bank table in the database (**18** in FIG. 1) to associate the username and a host name of the supernode with which the user is associated, with an E.164 number associated with the user on the PSTN network.

An exemplary DID table record entry for the Calgary callee is shown generally at **300** in FIG. 14. The user name field **281** and user domain field **272** are analogous to the user name and user domain fields **258** and **260** of the caller dialing profile shown in FIG. 10. The contents of the DID field **274** include a E.164 public telephone number including a country code **283**, an area code **285**, an exchange code **287** and a number **289**. If the user has multiple telephone

20

numbers, then multiple records of the type shown at **300** would be included in the DID bank table, each having the same user name and user domain, but different DID field **274** contents reflecting the different telephone numbers associated with that user.

In addition to creating dialing profiles as shown in FIG. 9 and DID records as shown in FIG. 13 when a user registers with the system, call blocking records of the type shown in FIG. 26, call forwarding records of the type shown in FIG. 28 and voicemail records of the type shown in FIG. 30 may be added to the database **18** when a new subscriber is added to the system.

Referring back to FIG. 8A, after retrieving a dialing profile for the caller, such as shown at **276** in FIG. 10, the RC processor circuit **200** is directed to block **256** which directs the processor circuit (**200**) to determine whether the contents of the concurrent call field **277** are less than the contents of the maximum concurrent call field **275** of the dialing profile for the caller and, if so, block **271** directs the processor circuit to increment the contents of the concurrent call field **277**. If the contents of concurrent call field **277** are equal to or greater than the contents of the maximum concurrent call field **275**, block **259** directs the processor circuit **200** to send an error message back to the call controller (**14**) to cause the call controller to notify the caller that the maximum number of concurrent calls has been reached and no further calls can exist concurrently, including the presently requested call.

Assuming block **256** allows the call to proceed, the RC processor circuit **200** is directed to perform certain checks on the callee identifier provided by the contents of the callee field **154** in FIG. 6, of the RC request message **150**. These checks are shown in greater detail in FIG. 8B.

Referring to FIG. 8B, the processor (**202** in FIG. 7) is directed to a first block **257** that causes it to determine whether a digit pattern of the callee identifier (**154**) provided in the RC request message (**150**) includes a pattern that matches the contents of the international dialing digits (IDD) field **264** in the caller profile shown in FIG. 10. If so, then block **259** directs the processor (**202**) to set a call type code identifier variable maintained by the processor to indicate that the call is an international call and block **261** directs the processor to produce a reformatted callee identifier by reformatting the callee identifier into a predefined digit format. In this embodiment, this is done by removing the pattern of digits matching the IDD field contents **264** of the caller dialing profile to effectively shorten the callee identifier. Then, block **263** directs the processor **202** to determine whether or not the callee identifier has a length which meets criteria establishing it as a number compliant with the E.164 Standard set by the ITU. If the length does not meet this criteria, block **265** directs the processor **202** to send back to the call controller (**14**) a message indicating the length is not correct. The process is then ended. At the call controller **14**, routines (not shown) stored in the program memory **104** may direct the processor (**102** of FIG. 4) to respond to the incorrect length message by transmitting a message back to the telephone (**12** shown in FIG. 1) to indicate that an invalid number has been dialed.

Still referring to FIG. 8B, if the length of the amended callee identifier meets the criteria set forth at block **263**, block **269** directs the processor (**202** of FIG. 7) to make a database request to determine whether or not the amended callee identifier is found in a record in the direct-in-dial bank (DID) table. Referring back to FIG. 8B, at block **269**, if the processor **202** receives a response from the database indicating that the reformatted callee identifier produced at

US 9,826,002 B2

21

block **261** is found in a record in the DID bank table, then the callee is a subscriber to the system and the call is classified as a private network call by directing the processor to block **279** which directs the processor to copy the contents of the corresponding user name field (**281** in FIG. **14**) from the callee DID bank table record (**300** in FIG. **14**) into the callee ID buffer (**211** in FIG. **7**). Thus, the processor **202** locates a subscriber user name associated with the reformatted callee identifier. The processor **202** is then directed to point B in FIG. **8A**.

Subscriber to Subscriber Calls Between Different Nodes

Referring to FIG. **8A**, block **280** directs the processor (**202** of FIG. **7**) to execute a process to determine whether or not the node associated with the reformatted callee identifier is the same node that is associated with the caller identifier. To do this, the processor **202** determines whether or not a prefix (e.g., continent code **61**) of the callee name held in the callee ID buffer (**211** in FIG. **7**), is the same as the corresponding prefix of the caller name held in the username field **258** of the caller dialing profile shown in FIG. **10**. If the corresponding prefixes are not the same, block **302** in FIG. **8A** directs the processor (**202** in FIG. **7**) to set a call type flag in the buffer memory (**207** in FIG. **7**) to indicate the call is a cross-domain call. Then, block **350** of FIG. **8A** directs the processor (**202** of FIG. **7**) to produce a routing message identifying an address on the private network with which the callee identified by the contents of the callee ID buffer is associated and to set a time to live for the call at a maximum value of 99999, for example.

Thus the routing message includes a caller identifier, a call identifier set according to a username associated with the located DID bank table record and includes an identifier of a node on the private network with which the callee is associated.

The node in the system with which the callee is associated is determined by using the callee identifier to address a supernode table having records of the type as shown at **370** in FIG. **17**. Each record **370** has a prefix field **372** and a supernode address field **374**. The prefix field **372** includes the first n digits of the callee identifier. In this embodiment n=2. The supernode address field **374** holds a code representing the IP address or a fully qualified domain name of the node associated with the code stored in the callee identifier prefix field **372**. Referring to FIG. **18**, for example, if the prefix is 20, the supernode address associated with that prefix is sp.yvr.digifonica.com.

Referring to FIG. **15**, a generic routing message is shown generally at **352** and includes an optional supplier prefix field **354**, and optional delimiter field **356**, a callee user name field **358**, at least one route field **360**, a time to live field **362** and other fields **364**. The optional supplier prefix field **354** holds a code for identifying supplier traffic. The optional delimiter field **356** holds a symbol that delimits the supplier prefix code from the callee user name field **358**. In this embodiment, the symbol is a number sign (#). The route field **360** holds a domain name or IP address of a gateway or node that is to carry the call, and the time to live field **362** holds a value representing the number of seconds the call is permitted to be active, based on subscriber available minutes and other billing parameters.

Referring to FIG. **8A** and FIG. **16**, an example of a routing message produced by the processor at block **350** for a caller associated with a different node than the caller is shown generally at **366** and includes only a callee field **359**, a route field **361** and a time to live field **362**.

Referring to FIG. **8A**, having produced a routing message as shown in FIG. **16**, block **381** directs the processor (**202** of

22

FIG. **7**) to send the routing message shown in FIG. **16** to the call controller **14** shown in FIG. **1**.

Referring back to FIG. **8B**, if at block **257**, the callee identifier stored in the callee id buffer (**211** in FIG. **7**) does not begin with an international dialing digit, block **380** directs the processor (**202**) to determine whether or not the callee identifier begins with the same national dial digit code as assigned to the caller. To do this, the processor (**202**) is directed to refer to the retrieved caller dialing profile as shown in FIG. **10**. In FIG. **10**, the national dialing digit code **262** is the number 1. Thus, if the callee identifier begins with the number 1, then the processor (**202**) is directed to block **382** in FIG. **8B**.

Block **382** directs the processor (**202** of FIG. **7**) to examine the callee identifier to determine whether or not the digits following the NDD digit identify an area code that is the same as any of the area codes identified in the local area codes field **267** of the caller dialing profile **276** shown in FIG. **10**. If not, block **384** of FIG. **8B** directs the processor **202** to set the call type flag to indicate that the call is a national call. If the digits following the NDD digit identify an area code that is the same as a local area code associated with the caller as indicated by the caller dialing profile, block **386** directs the processor **202** to set the call type flag to indicate a local call, national style. After executing blocks **384** or **386**, block **388** directs the processor **202** to format the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier by removing the national dialled digit and prepending a caller country code identified by the country code field **266** of the caller dialing profile shown in FIG. **10**. The processor (**202**) is then directed to block **263** of FIG. **8B** to perform other processing as already described above.

If at block **380**, the callee identifier does not begin with a national dialled digit, block **390** directs the processor (**202**) to determine whether the callee identifier begins with digits that identify the same area code as the caller. Again, the reference for this is the retrieved caller dialing profile shown in FIG. **10**. The processor (**202**) determines whether or not the first few digits of the callee identifier identify an area code corresponding to the local area code field **267** of the retrieved caller dialing profile. If so, then block **392** directs the processor **202** to set the call type flag to indicate that the call is a local call and block **394** directs the processor (**202**) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending the caller country code to the callee identifier, the caller country code being determined from the country code field **266** of the retrieved caller dialing profile shown in FIG. **10**. The processor (**202**) is then directed to block **263** for further processing as described above.

Referring back to FIG. **8B**, at block **390**, the callee identifier does not start with the same area code as the caller, block **396** directs the processor (**202** of FIG. **7**) to determine whether the number of digits in the callee identifier, i.e. the length of the callee identifier, is within the range of digits indicated by the caller minimum local number length field **268** and the caller maximum local number length field **270** of the retrieved caller dialing profile shown in FIG. **10**. If so, then block **398** directs the processor (**202**) to set the call type flag to indicate a local call and block **400** directs the processor (**202**) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending to the callee identifier the caller country code (as indicated by the country code field **266** of the retrieved caller dialing profile shown in FIG. **10**) followed by the caller area code (as indicated by the local area code

US 9,826,002 B2

23

field **267** of the caller profile shown in FIG. **10**). The processor (**202**) is then directed to block **263** of FIG. **8B** for further processing as described above.

Referring back to FIG. **8B**, if at block **396**, the callee identifier has a length that does not fall within the range specified by the caller minimum local number length field (**268** in FIG. **10**) and the caller maximum local number length field (**270** in FIG. **10**), block **402** directs the processor **202** of FIG. **7** to determine whether or not the callee identifier identifies a valid user name. To do this, the processor **202** searches through the database (**18** of FIG. **10**) of dialing profiles to find a dialing profile having user name field contents (**258** in FIG. **10**) that match the callee identifier. If no match is found, block **404** directs the processor (**202**) to send an error message back to the call controller (**14**). If at block **402**, a dialing profile having a user name field **258** that matches the callee identifier is found, block **406** directs the processor **202** to set the call type flag to indicate that the call is a private network call and then the processor is directed to block **280** of FIG. **8A**. Thus, the call is classified as a private network call when the callee identifier identifies a subscriber to the private network.

From FIG. **8B**, it will be appreciated that there are certain groups of blocks of codes that direct the processor **202** in FIG. **7** to determine whether the callee identifier has certain features such as an international dialing digit, a national dialing digit, an area code and a length that meet certain criteria, and cause the processor **202** to reformat the callee identifier stored in the callee id buffer **211**, as necessary into a predetermined target format including only a country code, area code, and a normal telephone number, for example, to cause the callee identifier to be compatible with the E.164 number plan standard in this embodiment. This enables block **269** in FIG. **8B** to have a consistent format of callee identifiers for use in searching through the DID bank table records of the type shown in FIG. **13** to determine how to route calls for subscriber to subscriber calls on the same system. Effectively, therefore blocks **257**, **380**, **390**, **396** and **402** establish call classification criteria for classifying the call as a public network call or a private network call. Block **269** classifies the call, depending on whether or not the formatted callee identifier has a DID bank table record and this depends on how the call classification criteria are met and block **402** directs the processor **202** of FIG. **7** to classify the call as a private network call when the callee identifier complies with a pre-defined format, i.e. is a valid user name and identifies a subscriber to the private network, after the callee identifier has been subjected to the classification criteria of blocks **257**, **380**, **390** and **396**.

Subscriber to Non-Subscriber Calls

Not all calls will be subscriber to subscriber calls and this will be detected by the processor **202** of FIG. **7** when it executes block **269** in FIG. **8B**, and does not find a DID bank table record that is associated with the callee, in the DID bank table. When this occurs, the call is classified as a public network call by directing the processor **202** to block **408** of FIG. **8B** which causes it to set the contents of the callee id buffer **211** of FIG. **7** equal to the newly formatted callee identifier, i.e., a number compatible with the E.164 standard. Then, block **410** of FIG. **8B** directs the processor (**202**) to search a database of route or master list records associating route identifiers with dialing codes shown in FIG. **19** to locate a router having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

Referring to FIG. **19**, a data structure for a master list or route list record is shown. Each master list record includes

24

a master list ID field **500**, a dialing code field **502**, a country code field **504**, a national sign number field **506**, a minimum length field **508**, a maximum length field **510**, a national dialled digit field **512**, an international dialled digit field **514** and a buffer rate field **516**.

The master list ID field **500** holds a unique code such as 1019, for example, identifying the record. The dialing code field **502** holds a predetermined number pattern that the processor **202** of FIG. **7** uses at block **410** in FIG. **8B** to find the master list record having a dialing code matching the first few digits of the amended callee identifier stored in the callee id buffer **211**. The country code field **504** holds a number representing the country code associated with the record and the national sign number field **506** holds a number representing the area code associated with the record. (It will be observed that the dialing code is a combination of the contents of the country code field **504** and the national sign number field **506**.) The minimum length field **508** holds a number representing the minimum length of digits associated with the record and the maximum length field **510** holds a number representing the maximum number of digits in a number with which the record may be compared. The national dialled digit (NDD) field **512** holds a number representing an access code used to make a call within the country specified by the country code, and the international dialled digit (IDD) field **514** holds a number representing the international prefix needed to dial a call from the country indicated by the country code.

Thus, for example, a master list record may have a format as shown in FIG. **20** with exemplary field contents as shown.

Referring back to FIG. **8B**, using the country code and area code portions of the reformatted callee identifier stored in the callee id buffer **211**, block **410** directs the processor **202** of FIG. **7** to find a master list record such as the one shown in FIG. **20** having a dialing code that matches the country code (**1**) and area code (**604**) of the callee identifier. Thus, in this example, the processor (**202**) would find a master list record having an ID field containing the number 1019. This number may be referred to as a route ID. Thus, a route ID number is found in the master list record associated with a predetermined number pattern in the reformatted callee identifier.

After executing block **410** in FIG. **8B**, the process continues as shown in FIG. **8D**. Referring to FIG. **8D**, block **412** directs the processor **202** of FIG. **7** to use the route ID number to search a database of supplier records associating supplier identifiers with route identifiers to locate at least one supplier record associated with the route identifier to identify at least one supplier operable to supply a communications link for the route.

Referring to FIG. **21**, a data structure for a supplier list record is shown. Supplier list records include a supplier ID field **540**, a master list ID field **542**, an optional prefix field **544**, a specific route identifier field **546**, a NDD/IDD rewrite field **548**, a rate field **550**, and a timeout field **551**. The supplier ID field **540** holds a code identifying the name of the supplier and the master list ID field **542** holds a code for associating the supplier record with a master list record. The prefix field **544** holds a string used to identify the supplier traffic and the specific route identifier field **546** holds an IP address of a gateway operated by the supplier indicated by the supplier ID field **540**. The NDD/IDD rewrite field **548** holds a code representing a rewritten value of the NDD/IDD associated with this route for this supplier, and the rate field **550** holds a code indicating the cost per second to the system operator to use the route provided by the gateway specified by the contents of the route identifier field **546**. The timeout

US 9,826,002 B2

25

field **551** holds a code indicating a time that the call controller should wait for a response from the associated gateway before giving up and trying the next gateway. This time value may be in seconds, for example. Exemplary supplier records are shown in FIGS. **22**, **23** and **24** for the exemplary suppliers shown at **20** in FIG. **1**, namely Telus, Shaw and Sprint.

Referring back to FIG. **8D**, at block **412** the processor **202** finds all supplier records that identify the master list ID found at block **410** of FIG. **8B**.

Referring back to FIG. **8D**, block **560** directs the processor **202** of FIG. **7** to begin to produce a routing message of the type shown in FIG. **15**. To do this, the processor **202** loads a routing message buffer as shown in FIG. **25** with a supplier prefix of the least costly supplier where the least costly supplier is determined from the rate fields **550** of FIG. **21** of the records associated with respective suppliers.

Referring to FIGS. **22-24**, in the embodiment shown, the supplier "Telus" has the lowest number in the rate field **550** and therefore the prefix **4973** associated with that supplier is loaded into the routing message buffer shown in FIG. **25** first.

Block **562** in FIG. **8D** directs the processor to delimit the prefix **4973** by the number sign (#) and to next load the reformatted callee identifier into the routing message buffer shown in FIG. **25**. At block **563** of FIG. **8D**, the contents of the route identifier field **546** of FIG. **21** of the record associated with the supplier "Telus" are added by the processor **202** of FIG. **7** to the routing message buffer shown in FIG. **25** after an @ sign delimiter, and then block **564** in FIG. **8D** directs the processor to get a time to live value, which in one embodiment may be 3600 seconds, for example. Block **566** then directs the processor **202** to load this time to live value and the timeout value (**551**) in FIG. **21** in the routing message buffer of FIG. **25**. Accordingly, a first part of the routing message for the Telus gateway is shown generally at **570** in FIG. **25**.

Referring back to FIG. **8D**, block **571** directs the processor **202** back to block **560** and causes it to repeat blocks **560**, **562**, **563**, **564** and **566** for each successive supplier until the routing message buffer is loaded with information pertaining to each supplier identified by the processor at block **412**. Thus, a second portion of the routing message as shown at **572** in FIG. **25** relates to the second supplier identified by the record shown in FIG. **23**. Referring back to FIG. **25**, a third portion of the routing message as shown at **574** and is associated with a third supplier as indicated by the supplier record shown in FIG. **24**.

Consequently, referring to FIG. **25**, the routing message buffer holds a routing message identifying a plurality of different suppliers able to provide gateways to the public telephone network (i.e. specific routes) to establish at least part of a communication link through which the caller may contact the callee. In this embodiment, each of the suppliers is identified, in succession, according to rate. Other criteria for determining the order in which suppliers are listed in the routing message may include preferred supplier priorities which may be established based on service agreements, for example. Referring back to FIG. **8D**, block **568** directs the processor **202** of FIG. **7** to send the routing message shown in FIG. **25** to the call controller **14** in FIG. **1**.

Subscriber to Subscriber Calls within the Same Node

Referring back to FIG. **8A**, if at block **280**, the callee identifier received in the RC request message has a prefix that identifies the same node as that associated with the caller, block **600** directs the processor **202** to use the callee identifier in the callee id buffer **211** to locate and retrieve a

26

dialing profile for the callee. The dialing profile may be of the type shown in FIG. **11** or **12**, for example. Block **602** of FIG. **8A** then directs the processor **202** of FIG. **7** to get call block, call forward and voicemail records from the database **18** of FIG. **1** based on the user name identified in the callee dialing profile retrieved by the processor at block **600**. Call block, call forward and voicemail records may be as shown in FIGS. **26**, **27**, **28** and **30** for example.

Referring to FIG. **26**, the call block records include a user name field **604** and a block pattern field **606**. The user name field holds a user name corresponding to the user name in the user name field (**258** in FIG. **10**) of the callee profile and the block pattern field **606** holds one or more E.164-compatible numbers or user names identifying PSTN numbers or system subscribers from whom the subscriber identified in the user name field **604** does not wish to receive calls.

Referring to FIG. **8A** and FIG. **27**, block **608** directs the processor **202** of FIG. **7** to determine whether or not the caller identifier received in the RC request message matches a block pattern stored in the block pattern field **606** of the call block record associated with the callee identified by the contents of the user name field **604** in FIG. **26**. If the caller identifier matches a block pattern, block **610** directs the processor to send a drop call or non-completion message to the call controller (**14**) and the process is ended. If the caller identifier does not match a block pattern associated with the callee, block **609** directs the processor to store the username and domain of the callee, as determined from the callee dialing profile, and a time to live value in the routing message buffer as shown at **650** in FIG. **32**. Referring back to FIG. **8A**, block **612** then directs the processor **202** to determine whether or not call forwarding is required.

Referring to FIG. **28**, the call forwarding records include a user name field **614**, a destination number field **616**, and a sequence number field **618**. The user name field **614** stores a code representing a user with which the record is associated. The destination number field **616** holds a user name representing a number to which the current call should be forwarded, and the sequence number field **618** holds an integer number indicating the order in which the user name associated with the corresponding destination number field **616** should be attempted for call forwarding. The call forwarding table may have a plurality of records for a given user. The processor **202** of FIG. **7** uses the contents of the sequence number field **618** to place the records for a given user in order. As will be appreciated below, this enables the call forwarding numbers to be tried in an ordered sequence.

Referring to FIG. **8A** and FIG. **29**, if at block **612**, the call forwarding record for the callee identified by the callee identifier contains no contents in the destination number field **616** and accordingly no contents in the sequence number field **618**, there are no call forwarding entries for this callee, and the processor **202** is directed to block **620** in FIG. **8C**. If there are entries in the call forwarding table **27**, block **622** in FIG. **8A** directs the processor **202** to search the dialing profile table to find a dialing profile record as shown in FIG. **9**, for the user identified by the destination number field **616** of the call forward record shown in FIG. **28**. The processor **202** of FIG. **7** is further directed to store the username and domain for that user and a time to live value in the routing message buffer as shown at **652** in FIG. **32**, to produce a routing message as illustrated. This process is repeated for each call forwarding record associated with the callee identified by the callee id buffer **211** in FIG. **7** to add to the routing message buffer all call forwarding usernames and domains associated with the callee.

US 9,826,002 B2

27

Referring back to FIG. 8A, if at block 612 there are no call forwarding records, then at block 620 in FIG. 8C the processor 202 is directed to determine whether or not the user identified by the callee identifier has paid for voicemail service. This is done by checking to see whether or not a flag is set in a voicemail record of the type shown in FIG. 30 in a voicemail table stored in the database 18 shown in FIG. 1.

Referring to FIG. 30, voicemail records in this embodiment may include a user name field 624, a voicemail server field 626, a seconds to voicemail field 628 and an enable field 630. The user name field 624 stores the user name of the callee. The voicemail server field 626 holds a code identifying a domain name of a voicemail server associated with the user identified by the user name field 624. The seconds to voicemail field 628 holds a code identifying the time to wait before engaging voicemail, and the enable field 630 holds a code representing whether or not voicemail is enabled for the user. Referring back to FIG. 8C, at block 620 if the processor 202 of FIG. 7 finds a voicemail record as shown in FIG. 30 having user name field 624 contents matching the callee identifier, the processor is directed to examine the contents of the enable field 630 to determine whether or not voicemail is enabled. If voicemail is enabled, then block 640 in FIG. 8C directs the processor 202 to FIG. 7 to store the contents of the voicemail server field 626 and the contents of the seconds to voicemail field 628 in the routing message buffer, as shown at 654 in FIG. 32. Block 642 then directs the processor 202 to get time to live values for each path specified by the routing message according to the cost of routing and the user's balance. These time to live values are then appended to corresponding paths already stored in the routing message buffer.

Referring back to FIG. 8C, block 644 then directs the processor 202 of FIG. 7 to store the IP address of the current node in the routing message buffer as shown at 656 in FIG. 32. Block 646 then directs the processor 202 to send the routing message shown in FIG. 32 to the call controller 14 in FIG. 1. Thus in the embodiment described the routing controller will produce a routing message that will cause at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server.

Referring back to FIG. 1, the routing message whether of the type shown in FIG. 16, 25 or 32, is received at the call controller 14 and the call controller interprets the receipt of the routing message as a request to establish a call.

Referring to FIG. 4, the program memory 104 of the call controller 14 includes a routing to gateway routine depicted generally at 122.

Where a routing message of the type shown in FIG. 32 is received by the call controller 14, the routing to gateway routine 122 shown in FIG. 4 may direct the processor 102 to cause a message to be sent back through the internet 13 shown in FIG. 1 to the callee telephone 15, knowing the IP address of the callee telephone 15 from the user name.

Alternatively, if the routing message is of the type shown in FIG. 16, which identifies a domain associated with another node in the system, the call controller may send a SIP invite message along the high speed backbone 17 connected to the other node. The other node functions as explained above, in response to receipt of a SIP invite message.

If the routing message is of the type shown in FIG. 25 where there are a plurality of gateway suppliers available, the call controller sends a SIP invite message to the first supplier, in this case Telus, using a dedicated line or an internet connection to determine whether or not Telus is able to handle the call. If the Telus gateway returns a message

28

indicating it is not able to handle the call, the call controller 14 then proceeds to send a SIP invite message to the next supplier, in this case Shaw. The process is repeated until one of the suppliers responds indicating that it is available to carry the call. Once a supplier responds indicating that it is able to carry the call, the supplier sends back to the call controller 14 an IP address for a gateway provided by the supplier through which the call or audio path of the call will be carried. This IP address is sent in a message from the call controller 14 to the media relay 9 which responds with a message indicating an IP address to which the caller telephone should send its audio/video, traffic and an IP address to which the gateway should send its audio/video for the call. The call controller conveys the IP address at which the media relay expects to receive audio/video from the caller telephone, to the caller telephone 12 in a message. The caller telephone replies to the call controller with an IP address at which it would like to receive audio/video and the call controller conveys that IP address to the media relay. The call may then be conducted between the caller and callee through the media relay and gateway.

Referring back to FIG. 1, if the call controller 14 receives a routing message of the type shown in FIG. 32, and which has at least one call forwarding number and/or a voicemail number, the call controller attempts to establish a call to the callee telephone 15 by seeking from the callee telephone a message indicating an IP address to which the media relay should send audio/video. If no such message is received from the callee telephone, no call is established. If no call is established within a pre-determined time, the call controller 14 attempts to establish a call with the next user identified in the call routing message in the same manner. This process is repeated until all call forwarding possibilities have been exhausted, in which case the call controller communicates with the voicemail server 19 identified in the routing message to obtain an IP address to which the media relay should send audio/video and the remainder of the process mentioned above for establishing IP addresses at the media relay 9 and the caller telephone is carried out to establish audio/video paths to allowing the caller to leave a voicemail message with the voicemail server.

When an audio/video path through the media relay is established, a call timer maintained by the call controller 14 logs the start date and time of the call and logs the call ID and an identification of the route (i.e., audio/video path IP address) for later use in billing.

Time to Live

Referring to FIGS. 33A and 33B, a process for determining a time to live value for any of blocks 642 in FIG. 8C, 350 in FIG. 8A or 564 in FIG. 8D above is described. The process is executed by the processor 202 shown in FIG. 7. Generally, the process involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Referring to FIG. 33A, in this embodiment, the process begins with a first block 700 that directs the RC processor to determine whether or not the call type set at block 302 in FIG. 8A indicates the call is a network or cross-domain call. If the call is a network or cross-domain call, block 702 of FIG. 33A directs the RC processor to set the time to live

US 9,826,002 B2

29

equal to 99999 and the process is ended. Thus, the network or cross-domain call type has a long time to live. If at block 700 the call type is determined not to be a network or cross-domain type, block 704 directs the RC processor to get a subscriber bundle table record from the database 18 in FIG. 1 and store it locally in the subscriber bundle record buffer at the RC 14.

Referring to FIG. 34, a subscriber bundle table record is shown generally at 706. The record includes a user name field 708 and a services field 710. The user name field 708 holds a code identifying the subscriber user name and the services field 710 holds codes identifying service features assigned to the subscriber, such as free local calling, call blocking and voicemail, for example.

FIG. 35 shows an exemplary subscriber bundle record for the Vancouver caller. In this record the user name field 708 is loaded with the user name 2001 1050 8667 and the services field 710 is loaded with codes 10, 14 and 16 corresponding to free local calling, call blocking and voicemail, respectively. Thus, user 2001 1050 8667 has free local calling, call blocking and voicemail features.

Referring back to FIG. 33A, after having loaded a subscriber bundle record into the subscriber bundle record buffer, block 712 directs the RC processor to search the database (18) to determine whether or not there is a bundle override table record for the master list ID value that was determined at block 410 in FIG. 8B. An exemplary bundle override table record is shown at 714 in FIG. 36. The bundle table record includes a master list ID field 716, an override type field 718, an override value field 720 a first interval field 722 and a second interval field 724. The master list ID field 716 holds a master list ID code. The override type field 718 holds an override type code indicating a fixed, percent or cent amount to indicate the amount by which a fee will be increased. The override value field 720 holds a real number representing the value of the override type. The first interval field 722 holds a value indicating the minimum number of seconds for a first level of charging and the second interval field 724 holds a number representing a second level of charging.

Referring to FIG. 37, a bundle override record for the located master list ID code is shown generally at 726 and includes a master list ID field 716 holding the code 1019 which was the code located in block 410 of FIG. 8B. The override type field 718 includes a code indicating the override type is a percentage value and the override value field 720 holds the value 10.0 indicating that the override will be 10.0% of the charged value. The first interval field 722 holds a value representing 30 seconds and the second interval field 724 holds a value representing 6 seconds. The 30 second value in the first interval field 722 indicates that charges for the route will be made at a first rate for 30 seconds and thereafter the charges will be made at a different rate in increments of 6 seconds, as indicated by the contents of the second interval field 724.

Referring back to FIG. 33A, if at block 712 the processor finds a bundle override record of the type shown in FIG. 37, block 728 directs the processor to store the bundle override record in local memory. In the embodiment shown, the bundle override record shown in FIG. 37 is stored in the bundle override record buffer at the RC as shown in FIG. 7. Still referring to FIG. 33A, block 730 then directs the RC processor to determine whether or not the subscriber bundle table record 706 in FIG. 35 has a services field including a code identifying that the user is entitled to free local calling and also directs the processor to determine whether or not the call type is not a cross domain cell, i.e. it is a local or

30

local/national style. If both of these conditions are satisfied, block 732 directs the processor to set the time to live equal to 99999, giving the user a long period of time for the call. The process is then ended. If the conditions associated with block 730 are not satisfied, block 734 of FIG. 33B directs the RC processor to retrieve a subscriber account record associated with a participant in the call. This is done by copying and storing in the subscriber account record buffer a subscriber account record for the caller.

Referring to FIG. 38, an exemplary subscriber account table record is shown generally at 736. The record includes a user name field 738, a funds balance field 740 and a free time field 742. The user name field 738 holds a subscriber user name, the funds balance field 740 holds a real number representing the dollar value of credit available to the subscriber and the free time field 742 holds an integer representing the number of free seconds that the user is entitled to.

An exemplary subscriber account record for the Vancouver caller is shown generally at 744 in FIG. 39, wherein the user name field 738 holds the user name 2001 1050 8667, the funds balance field 740 holds the value \$10.00, and the free time field 742 holds the value 100. The funds balance field holding the value of \$10.00 indicates the user has \$10.00 worth of credit and the free time field having the value of 100 indicates that the user has a balance of 100 free seconds of call time.

Referring back to FIG. 33B, after copying and storing the subscriber account record shown in FIG. 39 from the database to the subscriber account record buffer RC, block 746 directs the processor to determine whether or not the subscriber account record funds balance field 740 or free time field 742 are greater than zero. If they are not greater than zero, block 748 directs the processor to set the time to live equal to zero and the process is ended. The RC then sends a message back to the call controller to cause the call controller to deny the call to the caller. If the conditions associated with block 746 are satisfied, block 750 directs the processor to calculate the call cost per unit time. A procedure for calculating the call cost per unit time is described below in connection with FIG. 41.

Assuming the procedure for calculating the cost per second returns a number representing the call cost per second, block 752 directs the processor 202 in FIG. 7 to determine whether or not the cost per second is equal to zero. If so, block 754 directs the processor to set the time to live to 99999 to give the caller a very long length of call and the process is ended.

If at block 752 the call cost per second is not equal to zero, block 756 directs the processor 202 in FIG. 7 to calculate a first time to live value as a sum of a free time attributed to the participant in the communication session and the quotient of the funds balance held by the participant to the cost per unit time value. To do this, the processor 202 of FIG. 7 is directed to set a first time value or temporary time to live value equal to the sum of the free time provided in the free time field 742 of the subscriber account record shown in FIG. 39 and the quotient of the contents of the funds balance field 740 in the subscriber account record for the call shown in FIG. 39 and the cost per second determined at block 750 of FIG. 33B. Thus, for example, if at block 750 the cost per second is determined to be three cents per second and the funds balance field holds the value \$10.00, the quotient of the funds balance and cost per second is 333 seconds and this is added to the contents of the free time field 742, which is 100, resulting in a time to live of 433 seconds.

US 9,826,002 B2

31

Block **758** then directs the RC processor to produce a second time value in response to the first time value and the billing pattern associated with the participant as established by the bundle override record shown in FIG. **37**. This process is shown in greater detail at **760** in FIG. **40** and generally involves producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

Referring to FIG. **40**, the process for producing the second time value begins with a first block **762** that directs the processor **202** in FIG. **7** to set a remainder value equal to the difference between the time to live value calculated at block **756** in FIG. **33B** and the contents of the first interval field **722** of the record shown in FIG. **37**, modulus the contents of the second interval field **724** of FIG. **37**. Thus, in the example given, the difference between the time to live field and the first interval field is 433 minus 30, which is 403 and therefore the remainder produced by 403 divided by 6 is 1. Block **764** then directs the processor to determine whether or not this remainder value is greater than zero and, if so, block **766** directs the processor to subtract the remainder from the first time value and set the difference as the second time value. To do this the processor is directed to set the time to live value equal to the current time to live of 433 minus the remainder of 1, i.e., 432 seconds. The processor is then returned back to block **758** of FIG. **33B**.

Referring back to FIG. **40**, if at block **764** the remainder is not greater than zero, block **768** directs the processor **202** of FIG. **7** to determine whether or not the time to live is less than the contents of the first interval field **722** in the record shown in FIG. **37**. If so, then block **770** of FIG. **40** directs the processor to set the time to live equal to zero. Thus, the second time value is set to zero when the remainder is not greater than zero and the first time value is less than the first billing interval. If at block **768** the conditions of that block are not satisfied, the processor returns the first time to live value as the second time to live value.

Thus, referring to FIG. **33B**, after having produced a second time to live value, block **772** directs the processor to set the time to live value for use in blocks **642**, **350** or **564**. Cost Per Second

Referring back to FIG. **33B**, at block **750** it was explained that a call cost per unit time is calculated. The following explains how that call cost per unit time value is calculated.

Referring to FIG. **41**, a process for calculating a cost per unit time is shown generally at **780**. The process is executed by the processor **202** in FIG. **7** and generally involves locating a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and setting a reseller rate equal to the sum of the markup value and the buffer rate, locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default operator markup record specifying a default cost per unit time and setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The process begins with a first set of blocks **782**, **802** and **820** which direct the processor **202** in FIG. **7** to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller mark-up record. Block **782**, in

32

particular, directs the processor to address the database **18** to look for a record associated with a reseller and a route with the reseller by looking for a special rate record based on the master list ID established at block **410** in FIG. **8B**.

Referring to FIG. **42**, a system operator special rate table record is shown generally at **784**. The record includes a reseller field **786**, a master list ID field **788**, a mark-up type field **790**, a mark-up value field **792**, a first interval field **794** and a second interval field **796**. The reseller field **786** holds a reseller ID code and the master list ID field **788** holds a master list ID code. The mark-up type field **790** holds a mark-up type such as fixed percent or cents and the mark-up value field **792** holds a real number representing the value corresponding to the mark-up type. The first interval field **794** holds a number representing a first level of charging and the second interval field **796** holds a number representing a second level of charging.

An exemplary system operator special rate table for a reseller known as "Klondike" is shown at **798** in FIG. **43**. In this record, the reseller field **786** holds a code indicating the retailer ID is Klondike, the master list ID field **788** holds the code 1019 to associate the record with the master list ID code 1019. The mark-up type field **790** holds a code indicating the mark-up type is cents and the mark-up value field **792** holds a mark-up value indicating $\frac{1}{10}$ of one cent. The first interval field **794** holds the value 30 and the second interval field **796** holds the value 6, these two fields indicating that the operator allows 30 seconds for free and then billing is done in increments of 6 seconds after that.

Referring back to FIG. **41**, if at block **782** a record such as the one shown in FIG. **43** is located in the system operator special rates table, the processor is directed to block **800** in FIG. **41**. If such a record is not found in the system operator special rates table, block **802** directs the processor to address the database **18** to look in a system operator mark-up table for a mark-up record associated with the reseller.

Referring to FIG. **44**, an exemplary system operator mark-up table record is shown generally at **804**. The record includes a reseller field **806**, a mark-up type field **808**, a mark-up value field **810**, a first interval field **812** and a second interval field **814**. The reseller mark-up type, mark-up value, first interval and second interval fields are as described in connection with the fields by the same names in the system operator special rates table shown in FIG. **42**.

FIG. **45** provides an exemplary system operator mark-up table record for the reseller known as Klondike and therefore the reseller field **806** holds the value "Klondike", the mark-up type field **808** holds the value cents, the mark-up value field holds the value 0.01, the first interval field **812** holds the value 30 and the second interval field **814** holds the value 6. This indicates that the reseller "Klondike" charges by the cent at a rate of one cent per minute. The first 30 seconds of the call are free and billing is charged at the rate of one cent per minute in increments of 6 seconds.

FIG. **46** provides an exemplary system operator mark-up table record for cases where no specific system operator mark-up table record exists for a particular reseller, i.e., a default reseller mark-up record. This record is similar to the record shown in FIG. **45** and the reseller field **806** holds the value "all", the mark-up type field **808** is loaded with a code indicating mark-up is based on a percentage, the mark-up value field **810** holds the percentage by which the cost is marked up, and the first and second interval fields **812** and **814** identify first and second billing levels.

Referring back to FIG. **41**, if at block **802** a specific mark-up record for the reseller identified at block **782** is not located, block **820** directs the processor to get the mark-up

US 9,826,002 B2

33

record shown in FIG. 46, having the “all” code in the reseller field 806. The processor is then directed to block 800.

Referring back to FIG. 41, at block 800, the processor 202 of FIG. 7 is directed to set a reseller rate equal to the sum of the mark-up value of the record located by blocks 782, 802 or 820 and the buffer rate specified by the contents of the buffer rate field 516 of the master list record shown in FIG. 20. To do this, the RC processor sets a variable entitled “reseller cost per second” to a value equal to the sum of the contents of the mark-up value field (792, 810) of the associated record, plus the contents of the buffer rate field (516) from the master list record associated with the master list ID. Then, block 822 directs the processor to set a system operator cost per second variable equal to the contents of the buffer rate field (516) from the master list record. Block 824 then directs the processor to determine whether the call type flag indicates the call is local or national/local style and whether the caller has free local calling. If both these conditions are met, then block 826 sets the user cost per second variable equal to zero and sets two increment variables equal to one, for use in later processing. The cost per second has thus been calculated and the process shown in FIG. 41 is ended.

If at block 824 the conditions of that block are not met, the processor 202 of FIG. 7 is directed to locate at least one of a bundle override table record specifying a route cost per unit time associated with a route associated with the communication session, a reseller special destinations table record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default reseller global markup record specifying a default cost per unit time.

To do this block 828 directs the processor 202 of FIG. 7 to determine whether or not the bundle override record 726 in FIG. 37 located at block 712 in FIG. 33A has a master list ID equal to the stored master list ID that was determined at block 410 in FIG. 8B. If not, block 830 directs the processor to find a reseller special destinations table record in a reseller special destinations table in the database (18), having a master list ID code equal to the master list ID code of the master list ID that was determined at block 410 in FIG. 8B. An exemplary reseller special destinations table record is shown in FIG. 47 at 832. The reseller special destinations table record includes a reseller field 834, a master list ID field 836, a mark-up type field 838, a mark-up value field 840, a first interval field 842 and a second interval field 844. This record has the same format as the system operator special rates table record shown in FIG. 42, but is stored in a different table to allow for different mark-up types and values and time intervals to be set according to resellers’ preferences. Thus, for example, an exemplary reseller special destinations table record for the reseller “Klondike” is shown at 846 in FIG. 48. The reseller field 834 holds a value indicating the reseller as the reseller “Klondike” and the master list ID field holds the code 1019. The mark-up type field 838 holds a code indicating the mark-up type is percent and the mark-up value field 840 holds a number representing the mark-up value as 5%. The first and second interval fields identify different billing levels used as described earlier.

Referring back to FIG. 41, the record shown in FIG. 48 may be located at block 830, for example. If at block 830 such a record is not found, then block 832 directs the processor to get a default operator global mark-up record based on the reseller ID.

Referring to FIG. 49, an exemplary default reseller global mark-up table record is shown generally at 848. This record

34

includes a reseller field 850, a mark-up type field 852, a mark-up value field 854, a first interval field 856 and a second interval field 858. The reseller field 850 holds a code identifying the reseller. The mark-up type field 852, the mark-up value field 854 and the first and second interval fields 856 and 858 are of the same type as described in connection with fields of the same name in FIG. 47, for example. The contents of the fields of this record 860 may be set according to system operator preferences, for example.

Referring to FIG. 50, an exemplary reseller global mark-up table record is shown generally at 860. In this record, the reseller field 850 holds a code indicating the reseller is “Klondike”, the mark-up type field 852 holds a code indicating the mark-up type is percent, the mark-up value field 854 holds a value representing 10% as the mark-up value, the first interval field 856 holds the value 30 and the second interval field 858 holds the values 30 and 6 respectively to indicate the first 30 seconds are free and billing is to be done in 6 second increments after that.

Referring back to FIG. 41, should the processor get to block 832, the reseller global mark-up table record as shown in FIG. 50 is retrieved from the database and stored locally at the RC. As seen in FIG. 41, it will be appreciated that if the conditions are met in blocks 828 or 830, or if the processor executes block 832, the processor is then directed to block 862 which causes it to set an override value equal to the contents of the mark-up value field of the located record, to set the first increment variable equal to the contents of the first interval field of the located record and to set the second increment variable equal to the contents of the second interval field of the located record. (The increment variables were alternatively set to specific values at block 826 in FIG. 41.)

It will be appreciated that the located record could be a bundle override record of the type shown in FIG. 37 or the located record could be a reseller special destination record of the type shown in FIG. 48 or the record could be a reseller global mark-up table record of the type shown in FIG. 50. After the override and first and second increment variables have been set at block 862, the processor 202 of FIG. 7 is directed to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time, depending on which record was located. To do this, block 864 directs the processor to set the cost per unit time equal to the sum of the reseller cost set at block 800 in FIG. 41, plus the contents of the override variable calculated in block 862 in FIG. 41. The cost per unit time has thus been calculated and it is this cost per unit time that is used in block 752 of FIG. 33B, for example.

Terminating the Call

In the event that either the caller or the callee terminates a call, the telephone of the terminating party sends a SIP bye message to the controller 14. An exemplary SIP bye message is shown at 900 in FIG. 51 and includes a caller field 902, a callee field 904 and a call ID field 906. The caller field 902 holds a twelve digit user name, the callee field 904 holds a PSTN compatible number or user name, and the call ID field 906 holds a unique call identifier field of the type shown in the call ID field 65 of the SIP invite message shown in FIG. 3.

Thus, for example, referring to FIG. 52, a SIP bye message for the Calgary callee is shown generally at 908 and the caller field 902 holds a user name identifying the caller, in this case 2001 1050 8667, the callee field 904 holds a user name identifying the Calgary callee, in this case 2001 1050

US 9,826,002 B2

35

2222, and the call ID field **906** holds the code FA10 @ 192.168.0.20, which is the call ID for the call.

The SIP bye message shown in FIG. **52** is received at the call controller **14** and the call controller executes a process as shown generally at **910** in FIG. **53**. The process includes a first block **912** that directs the call controller processor **102** of FIG. **4** to copy the caller, callee and call ID field contents from the SIP bye message received from the terminating party to corresponding fields of an RC stop message buffer (not shown). Block **914** then directs the processor to copy the call start time from the call timer and to obtain a call stop time from the call timer. Block **916** then directs the call controller to calculate a communication session time by determining the difference in time between the call start time and the call stop time. This session time is then stored in a corresponding field of the RC call stop message buffer. Block **917** then directs the processor to decrement the contents of the current concurrent call field **277** of the dialing profile for the caller as shown in FIG. **10**, to indicate that there is one less concurrent call in progress. A copy of the amended dialing profile for the caller is then stored in the database **18** of FIG. **1**. Block **918** then directs the processor to copy the route from the call log. An RC call stop message produced as described above is shown generally at **1000** in FIG. **54**. An RC call stop message specifically associated with the call made to the Calgary callee is shown generally at **1020** in FIG. **55**.

Referring to FIG. **54**, the RC stop call message includes a caller field **1002**, callee field **1004**, a call ID field **1006**, an account start time field **1008**, an account stop time field **1010**, a communication session time **1012** and a route field **1014**. The caller field **1002** holds a username, the callee field **1004** holds a PSTN-compatible number or system number, the call ID field **1006** hold the unique call identifier received from the SIP invite message shown in FIG. **3**, the account start time field **1008** holds the date and start time of the call, the account stop time field **1010** holds the date and time the call ended, the communication session time field **1012** holds a value representing the difference between the start time and the stop time, in seconds, and the route field **1014** holds the IP address for the communications link that was established.

Referring to FIG. **55**, an exemplary RC stop call message for the Calgary callee is shown generally at **1020**. In this example the caller field **1002** holds the user name 2001 1050 8667 identifying the Vancouver-based caller and the callee field **1004** holds the user name 2001 1050 2222 identifying the Calgary callee. The contents of the call ID field **1006** are FA10 @ 192.168.0.20. The contents of the account start time field **1008** are 2006-12-30 12:12:12 and the contents of the account stop time field are 2006-12-30 12:12:14. The contents of the communication session time field **1012** are 2 to indicate 2 seconds call duration and the contents of the route field are 72.64.39.58.

Referring back to FIG. **53**, after having produced an RC call stop message, block **920** directs the processor **102** of FIG. **4** to send the RC stop message compiled in the RC call stop message buffer to the RC **16** of FIG. **1**. Block **922** directs the call controller **14** to send a “bye” message back to the party that did not terminate the call.

The RC **16** of FIG. **1** receives the call stop message and an RC call stop message process is invoked at the RC, the process being shown at **950** in FIGS. **56A**, **56B** and **56C**. Referring to FIG. **56A**, the RC stop message process **950** begins with a first block **952** that directs the processor **202** in FIG. **7** to determine whether or not the communication session time is less than or equal to the first increment value

36

set by the cost calculation routine shown in FIG. **41**, specifically blocks **826** or **862** thereof. If this condition is met, then block **954** of FIG. **56A** directs the RC processor to set a chargeable time variable equal to the first increment value set at block **826** or **862** of FIG. **41**. If at block **952** of FIG. **56A** the condition is not met, block **956** directs the RC processor to set a remainder variable equal to the difference between the communication session time and the first increment value mod the second increment value produced at block **826** or **862** of FIG. **41**. Then, the processor is directed to block **958** of FIG. **56A** which directs it to determine whether or not the remainder is greater than zero. If so, block **960** directs the RC processor to set the chargeable time variable equal to the difference between the communication session time and the remainder value. If at block **958** the remainder is not greater than zero, block **962** directs the RC processor to set the chargeable time variable equal to the contents of the communication session time from the RC stop message. The processor is then directed to block **964**. In addition, after executing block **954** or block **960**, the processor is directed to block **964**.

Block **964** directs the processor **202** of FIG. **7** to determine whether or not the chargeable time variable is greater than or equal to the free time balance as determined from the free time field **742** of the subscriber account record shown in FIG. **39**. If this condition is satisfied, block **966** of FIG. **56A** directs the processor to set the free time field **742** in the record shown in FIG. **39**, to zero. If the chargeable time variable is not greater than or equal to the free time balance, block **968** directs the RC processor to set a user cost variable to zero and Block **970** then decrements the free time field **742** of the subscriber account record for the caller by the chargeable time amount determined by block **954**, **960** or **962**.

If at Block **964** the processor **202** of FIG. **7** was directed to Block **966** which causes the free time field (**742** of FIG. **39**) to be set to zero, referring to FIG. **56B**, Block **972** directs the processor to set a remaining chargeable time variable equal to the difference between the chargeable time and the contents of the free time field (**742** of FIG. **39**). Block **974** then directs the processor to set the user cost variable equal to the product of the remaining chargeable time and the cost per second calculated at Block **750** in FIG. **33B**. Block **976** then directs the processor to decrement the funds balance field (**740**) of the subscriber account record shown in FIG. **39** by the contents of the user cost variable calculated at Block **974**.

After completing Block **976** or after completing Block **970** in FIG. **56A**, block **978** of FIG. **56B** directs the processor **202** of FIG. **7** to calculate a reseller cost variable as the product of the reseller rate as indicated in the mark-up value field **810** of the system operator mark-up table record shown in FIG. **45** and the communication session time determined at Block **916** in FIG. **53**. Then, Block **980** of FIG. **56B** directs the processor to add the reseller cost to the reseller balance field **986** of a reseller account record of the type shown in FIG. **57** at **982**.

The reseller account record includes a reseller ID field **984** and the aforementioned reseller balance field **986**. The reseller ID field **984** holds a reseller ID code, and the reseller balance field **986** holds an accumulated balance of charges.

Referring to FIG. **58**, a specific reseller accounts record for the reseller “Klondike” is shown generally at **988**. In this record the reseller ID field **984** holds a code representing the reseller “Klondike” and the reseller balance field **986** holds a balance of \$100.02. Thus, the contents of the reseller

US 9,826,002 B2

37

balance field **986** in FIG. **58** are incremented by the reseller cost calculated at block **978** of FIG. **56B**.

Still referring to FIG. **56B**, after adding the reseller cost to the reseller balance field as indicated by Block **980**, Block **990** directs the processor to **202** of FIG. **7** calculate a system operator cost as the product of the system operator cost per second, as set at block **822** in FIG. **41**, and the communication session time as determined at Block **916** in FIG. **53**. Block **992** then directs the processor to add the system operator cost value calculated at Block **990** to a system operator accounts table record of the type shown at **994** in FIG. **59**. This record includes a system operator balance field **996** holding an accumulated charges balance. Referring to FIG. **60** in the embodiment described, the system operator balance field **996** may hold the value \$1,000.02 for example, and to this value the system operator cost calculated at Block **990** is added when the processor executes Block **992** of FIG. **56B**.

Ultimately, the final reseller balance **986** in FIG. **58** holds a number representing an amount owed to the reseller by the system operator and the system operator balance **996** of FIG. **59** holds a number representing an amount of profit for the system operator.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

What is claimed is:

1. A method of routing a communication in a communication system between an Internet-connected first participant device associated with a first participant and a second participant device associated with a second participant, the method comprising:

in response to initiation of the communication by the first participant device, receiving, by a controller comprising at least one processor, over an Internet protocol (IP) network a first participant identifier and a second participant identifier, the second participant identifier being associated with the second participant device;

causing the at least one processor to access a database comprising user profiles, using the first participant identifier, each user profile associating a respective plurality of attributes with a respective user, to locate a plurality of first participant attributes;

processing the second participant identifier, using the at least one processor, based on at least one of the plurality of first participant attributes obtained from a user profile for the first participant, to produce a new second participant identifier;

classifying the communication, based on the new second participant identifier, as a system communication or an external network communication, using the at least one processor;

when the communication is classified as a system communication, producing a system routing message identifying an Internet address associated with the second participant device, using the at least one processor, wherein the system routing message causes the communication to be established to the second participant device; and

when the communication is classified as an external network communication, producing an external network routing message identifying an Internet address associated with a gateway to an external network, using the at least one processor, wherein the external network routing message causes the communication to the sec-

38

ond participant device to be established using the gateway to the external network.

2. The method of claim **1**, wherein producing the system routing message causes the communication to be established over an Internet protocol (IP) network; and

wherein producing the external network routing message causes a portion of a path taken by the communication to be established over a circuit switched network.

3. The method of claim **1**, wherein classifying the communication further comprises causing the at least one processor to:

determine whether the second participant device is operably configured to communicate via the Internet; and if the second participant device is not operably configured to communicate via the Internet, classify the communication as the external network communication.

4. The method of claim **1**, wherein classifying the communication further comprises causing the at least one processor to:

determine whether a user profile associated with the new second participant identifier exists in the database; and if a user profile associated with the new second participant identifier does not exist in the database, classify the communication as the external network communication.

5. The method of claim **4**, wherein classifying the communication further comprises causing the at least one processor to:

if a user profile associated with the new second participant identifier exists in the database, classify the communication as the system communication.

6. The method of claim **5**, wherein the Internet address associated with the second participant device is based on the user profile associated with the new second participant identifier.

7. The method of claim **2**, wherein classifying the communication further comprises causing the at least one processor to:

determine whether a user profile associated with the new second participant identifier exists in the database; if a user profile associated with the new second participant identifier does not exist in the database, classify the communication as the external network communication;

and if a user profile associated with the new second participant identifier exists in the database, classify the communication as the system communication, wherein the Internet address associated with the second participant device is based on the user profile associated with the new second participant identifier.

8. The method of claim **1**, further comprising: processing a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication, wherein the plurality of communications are concurrent; and

producing a respective plurality of routing messages, based on the classifying of each respective one of the plurality of communications, each respective routing message identifying an Internet address associated with a recipient device or identifying an Internet address associated with a gateway to an external network.

9. A method of routing a communication in a communication system between an Internet-connected first partici-

US 9,826,002 B2

39

pant device associated with a first participant and a second participant device associated with a second participant, the method comprising:

in response to initiation of the communication by the first participant device over the Internet, receiving, by a controller comprising at least one processor, a first participant identifier and a second participant identifier, the second participant identifier being associated with the second participant device;

causing the at least one processor to access at least one database using the first participant identifier, the at least one database comprising user profiles and each user profile associating a respective plurality of attributes with a respective user, to locate a plurality of first participant attributes including at least one user-specific attribute associated with the first participant;

processing the second participant identifier, using the at least one processor, based on at least one of the plurality of first participant attributes obtained from a user profile for the first participant to produce a new second participant identifier;

determining whether a user profile associated with the new second participant identifier exists in the at least one database;

classifying the communication, based on the new second participant identifier, as a system communication if a user profile associated with the new second participant identifier exists in the at least one database, and as an external network communication if a user profile associated with the new second participant identifier does not exist in the at least one database;

when the communication is classified as a system communication, using the at least one processor to produce a system routing message identifying an Internet address associated with the second participant device based on the user profile associated with the new second participant identifier, causing the communication to be established entirely over an Internet protocol (IP) network;

when the communication is classified as an external network communication, using the at least one processor to produce an external network routing message identifying an Internet address associated with a gateway to an external network, causing at least a portion of a path taken by the communication to be established over a circuit switched network; and

updating the at least one database to cause at least one of the plurality of first participant attributes to be modified.

10. The method of claim 9, further comprising:

processing a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication, wherein the plurality of communications are concurrent; and

producing a respective plurality of routing messages, based on the classifying of each respective one of the plurality of communications, each respective routing message identifying an Internet address associated with a recipient device or identifying an Internet address associated with a gateway to an external network.

11. The method of claim 9,

wherein processing the second participant identifier comprises causing the at least one processor to modify the second participant identifier, based on at least one of the

40

plurality of first participant attributes, to produce the new second participant identifier;

wherein producing the system routing message comprises causing the at least one processor to determine the Internet address associated with the second participant device based on a user profile for the second participant; and

wherein producing the external network routing message comprises causing the at least one processor to select the Internet address associated with the gateway to the external network from among a plurality of Internet addresses associated with a respective plurality of gateways to the external network, and wherein the external network routing message comprises a code identifying a communication supplier associated with the gateway to the external network.

12. An apparatus for routing communications in a communication system that includes an Internet-connected first participant device associated with a first participant, the first participant device operable to initiate a communication to a second participant device associated with a second participant, the apparatus comprising:

a controller comprising at least one processor in communication with at least one memory storing processor readable instructions, wherein the at least one processor is operably configured by the processor readable instructions to:

in response to initiation of the communication by the first participant device, receive over an Internet protocol (IP) network a first participant identifier and a second participant identifier, the second participant identifier being associated with the second participant device;

access a database comprising user profiles, using the first participant identifier, each user profile associating a respective plurality of attributes with a respective user, to locate a plurality of first participant attributes including at least one user-specific attribute associated with the first participant;

process the second participant identifier, based on at least one of the plurality of first participant attributes obtained from a user profile for the first participant, to produce a new second participant identifier;

classify the communication, based on the new second participant identifier, as a system communication or an external network communication;

when the communication is classified as a system communication, produce a system routing message identifying an Internet address associated with the second participant device, wherein the system routing message causes the communication to be established to the second participant device; and

when the communication is classified as an external network communication, produce an external network routing message identifying an Internet address associated with a gateway to an external network, wherein the external network routing message causes the communication to the second participant device to be established using the gateway to the external network.

13. The apparatus of claim 12,

wherein producing the system routing message causes the communication to be established over an Internet protocol (IP) network; and

wherein producing the external network routing message causes a portion of a path taken by the communication to be established over a circuit switched network.

US 9,826,002 B2

41

14. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

determine whether the second participant device is operably configured to communicate via the Internet; and if the second participant device is not operably configured to communicate via the Internet, classify the communication as the external network communication.

15. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

determine whether a user profile associated with the new second participant identifier exists in the database; and if a user profile associated with the new second participant identifier does not exist in the database, classify the communication as the external network communication.

16. The apparatus of claim 15, wherein the at least one processor is further operably configured to:

if a user profile associated with the new second participant identifier exists in the database, classify the communication as the system communication, wherein the Internet address associated with the second participant device is determined based on the user profile associated with the new second participant identifier.

17. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

process a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication, wherein the plurality of communications are concurrent; and

produce a respective plurality of routing messages, based on the classifying of each respective one of the plurality of communications, each respective routing message identifying an Internet address associated with a recipient device or identifying an Internet address associated with a gateway to an external network.

18. The apparatus of claim 13, wherein the at least one processor is further operably configured to update the database to cause at least one of the plurality of first participant attributes to be modified.

19. The apparatus of claim 13, wherein the external network routing message comprises a code identifying a communication supplier associated with the gateway to the external network.

20. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 1.

21. The method of claim 1,

wherein processing the second participant identifier comprises causing the at least one processor to modify the second participant identifier, based on at least one of the plurality of first participant attributes, to produce the new second participant identifier.

22. The method of claim 1,

wherein producing the system routing message comprises causing the at least one processor to determine the Internet address associated with the second participant device based on a user profile for the second participant.

23. The method of claim 1,

wherein producing the external network routing message comprises causing the at least one processor to select the Internet address associated with the gateway to the external network from among a plurality of Internet addresses associated with a respective plurality of gateways to the external network, and wherein the

42

external network routing message comprises a code identifying a communication supplier associated with the gateway to the external network.

24. The method of claim 1,

wherein the Internet address associated with the second participant device comprises an IP address or domain name of a first communication system node associated with the second participant device, the first communication system node being one of a plurality of communication system nodes each operably configured to provide communications services to a plurality of communication system subscribers.

25. The method of claim 24,

wherein the first communication system node is operably configured to establish the communication to the second participant device, the first communication system node being identified by a first Internet address, and wherein the second participant device is identified by a second Internet address distinct from the first Internet address;

wherein a user profile for the second participant exists in the database and is associated with communication forwarding information identifying at least one destination device other than the second participant device for the communication; and

wherein the first communication system node is operably configured to use the communication forwarding information associated with the second participant to establish the communication to the at least one destination device using at least one Internet address that is distinct from the first and second Internet addresses.

26. The method of claim 1, further comprising:

accessing the database to locate communication blocking information associated with the second participant, using the at least one processor; and

blocking the communication when the communication blocking information identifies the first participant identifier.

27. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

modify the second participant identifier, based on at least one of the plurality of first participant attributes, to produce the new second participant identifier.

28. The apparatus of claim 13, wherein the at least one processor is further operably configured to:

determine the Internet address associated with the second participant device based on a user profile for the second participant.

29. The apparatus of claim 12, wherein the at least one processor is further operably configured to:

select the Internet address associated with the gateway to the external network from among a plurality of Internet addresses associated with a respective plurality of gateways to the external network.

30. The apparatus of claim 12,

wherein the Internet address associated with the second participant device comprises an IP address or domain name of a communication system node associated with the second participant device, the communication system node being one of a plurality of communication system nodes each operably configured to provide communications services to a plurality of communication system subscribers; and

wherein the Internet address associated with the gateway to the external network is selected from among a plurality of Internet addresses associated with a respective plurality of gateways to the external network.

- 31. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 2.
- 32. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 3. 5
- 33. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 4.
- 34. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 7. 10
- 35. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 8. 15
- 36. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 9.
- 37. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 21. 20
- 38. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 22.
- 39. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 23. 25
- 40. A non-transitory computer readable medium encoded with program code for directing the at least one processor to execute the method of claim 26. 30

* * * * *

EXHIBIT 4



US009948549B2

(12) **United States Patent**
Perreault et al.

(10) **Patent No.:** US 9,948,549 B2
 (45) **Date of Patent:** *Apr. 17, 2018

(54) **PRODUCING ROUTING MESSAGES FOR VOICE OVER IP COMMUNICATIONS**

(58) **Field of Classification Search**
 None
 See application file for complete search history.

(71) Applicant: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

(56) **References Cited**

(72) Inventors: **Clay Perreault**, Panama (PA); **Steve Nicholson**, Hamilton (NZ); **Rod Thomson**, North Vancouver (CA); **Johan Emil Viktor Björzell**, Vancouver (CA); **Fuad Arafa**, Vancouver (CA)

U.S. PATENT DOCUMENTS

4,747,124 A 5/1988 Ladd
 4,916,491 A 4/1990 Katoh
 (Continued)

(73) Assignee: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

FOREIGN PATENT DOCUMENTS

BR PI 0718312-7 A2 11/2013
 BR PI 0719682-2 A2 1/2014
 (Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

This patent is subject to a terminal disclaimer.

Abrazhevich, Dennis. "Electronic Payment Systems: a User-Centered Perspective and Interaction Design," *Thesis under the auspices of the J.F. Schouten School for User-System Interaction Research*, Technische Universiteit Eindhoven, Netherlands, 2004, pp. Cover page—p. 189.

(21) Appl. No.: **15/788,666**

(Continued)

(22) Filed: **Oct. 19, 2017**

(65) **Prior Publication Data**

US 2018/0041427 A1 Feb. 8, 2018

Primary Examiner — Kodzovi Acolatse

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear LLP

Related U.S. Application Data

(63) Continuation of application No. 15/396,344, filed on Dec. 30, 2016, now Pat. No. 9,813,330, which is a (Continued)


(57) **ABSTRACT**

(51) **Int. Cl.**
H04L 12/725 (2013.01)
H04M 7/00 (2006.01)
 (Continued)

A process and apparatus to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated is disclosed. In response to initiation of a call by a calling subscriber, a caller identifier and a callee identifier are received. Call classification criteria associated with the caller identifier are used to classify the call as a public network call or a private network call. A routing message identifying an address, on the private network, associated with the callee is produced when the call is classified as a private network call and a routing message identifying a

(52) **U.S. Cl.**
 CPC **H04L 45/3065** (2013.01); **H04M 3/4211** (2013.01); **H04M 7/006** (2013.01); **H04M 7/0075** (2013.01); **H04Q 3/70** (2013.01)

(Continued)

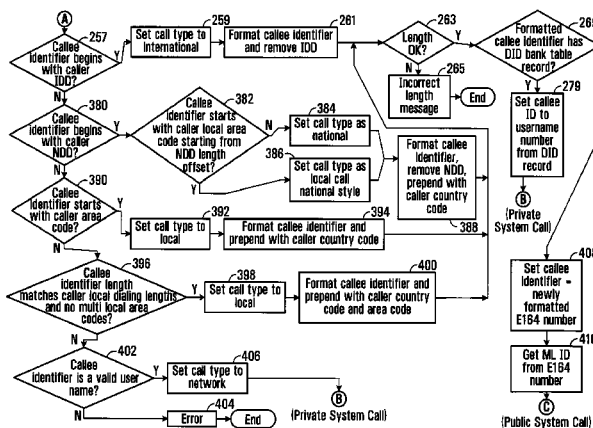

US 9,948,549 B2

Page 2

gateway to the public network is produced when the call is classified as a public network call.

30 Claims, 32 Drawing Sheets

Related U.S. Application Data

continuation of application No. 14/877,570, filed on Oct. 7, 2015, now Pat. No. 9,537,762, which is a continuation of application No. 13/966,096, filed on Aug. 13, 2013, now Pat. No. 9,179,005, which is a continuation of application No. 12/513,147, filed as application No. PCT/CA2007/001956 on Nov. 1, 2007, now Pat. No. 8,542,815.

(60) Provisional application No. 60/856,212, filed on Nov. 2, 2006.

(51) Int. Cl.

H04Q 3/70 (2006.01)

H04M 3/42 (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

4,992,971 A	2/1991	Hayashi	5,917,899 A	6/1999	Moss et al.
5,146,491 A	9/1992	Silver et al.	5,923,659 A	7/1999	Curry et al.
5,247,571 A	9/1993	Kay et al.	5,930,343 A	7/1999	Vasquez
5,303,297 A	4/1994	Hillis	5,937,045 A	8/1999	Yaoya et al.
5,325,421 A	6/1994	Hou et al.	5,940,598 A	8/1999	Strauss et al.
5,359,642 A	10/1994	Castro	5,953,504 A	9/1999	Sokal et al.
5,425,085 A	6/1995	Weinberger et al.	5,956,391 A	9/1999	Melen et al.
5,440,621 A	8/1995	Castro	5,970,477 A	10/1999	Roden
5,454,030 A	9/1995	de Oliveira et al.	5,974,043 A	10/1999	Solomon
5,469,497 A	11/1995	Pierce et al.	5,991,291 A	11/1999	Asai et al.
5,506,893 A	4/1996	Buscher et al.	5,991,378 A	11/1999	Apel
5,519,769 A	5/1996	Weinberger et al.	6,005,870 A	12/1999	Leung et al.
5,559,871 A	9/1996	Smith	6,005,926 A	12/1999	Mashinsky
5,590,133 A	12/1996	Billstrom et al.	6,014,379 A	1/2000	White et al.
5,602,907 A	2/1997	Hata et al.	6,021,126 A	2/2000	White et al.
5,608,786 A	3/1997	Gordon	6,029,062 A	2/2000	Hanson
5,621,787 A	4/1997	McKoy et al.	6,036,090 A	3/2000	Rahman et al.
5,633,913 A	5/1997	Talarino	6,052,445 A	4/2000	Bashoura et al.
5,661,790 A	8/1997	Hsu	6,058,300 A	5/2000	Hanson
5,677,955 A	10/1997	Doggett et al.	6,069,890 A	5/2000	White et al.
5,712,907 A	1/1998	Wegner et al.	6,073,013 A	6/2000	Agre et al.
5,719,926 A	2/1998	Hill	6,078,647 A	6/2000	D'Eletto
5,722,067 A	2/1998	Fougnyes et al.	6,104,704 A	8/2000	Buhler et al.
5,724,355 A	3/1998	Bruno et al.	6,104,711 A	8/2000	Voit
5,726,984 A	3/1998	Kubler et al.	6,115,737 A	9/2000	Ely et al.
5,737,414 A	4/1998	Walker et al.	6,128,304 A	10/2000	Gardell et al.
5,742,596 A	4/1998	Baratz et al.	6,137,869 A	10/2000	Voit et al.
5,751,961 A	5/1998	Smyk	6,141,404 A	10/2000	Westerlage et al.
5,768,521 A	6/1998	Dedrick	6,151,385 A	11/2000	Reich et al.
5,793,762 A	8/1998	Penners et al.	6,173,272 B1	1/2001	Thomas et al.
5,799,072 A	8/1998	Vulcan et al.	6,185,414 B1	2/2001	Brunner et al.
5,802,502 A	9/1998	Gell et al.	6,188,752 B1	2/2001	Lesley
5,825,863 A	10/1998	Walker	6,236,851 B1	5/2001	Fougnyes et al.
5,828,740 A	10/1998	Khuc et al.	6,240,449 B1	5/2001	Nadeau
5,838,682 A	11/1998	Dekelbaum et al.	6,243,689 B1	6/2001	Norton
5,845,267 A	12/1998	Ronen	6,249,573 B1	6/2001	Hudson
5,850,433 A	12/1998	Rondeau	6,282,574 B1	8/2001	Voit
5,864,610 A	1/1999	Ronen	6,298,062 B1	10/2001	Gardell et al.
5,867,495 A	2/1999	Elliott et al.	6,298,250 B1	10/2001	Nilsson
5,883,810 A	3/1999	Franklin et al.	6,310,859 B1	10/2001	Morita et al.
5,883,891 A	3/1999	Williams et al.	6,327,351 B1	12/2001	Walker et al.
5,889,774 A	3/1999	Mirashrafi et al.	6,351,464 B1	2/2002	Galvin et al.
5,905,736 A	5/1999	Ronen et al.	6,359,880 B1	3/2002	Curry et al.
5,907,547 A	5/1999	Foladare et al.	6,430,275 B1	8/2002	Voit et al.
5,910,946 A	6/1999	Csapo	6,434,143 B1	8/2002	Donovan
5,915,005 A	6/1999	He	6,445,694 B1	9/2002	Swartz
5,915,093 A	6/1999	Berlin et al.	6,507,644 B1	1/2003	Henderson et al.
			6,553,025 B1	4/2003	Kung et al.
			6,560,224 B1	5/2003	Kung et al.
			6,574,328 B1	6/2003	Wood et al.
			6,594,254 B1	7/2003	Kelly
			6,597,686 B1	7/2003	Smyk
			6,597,783 B1	7/2003	Tada et al.
			6,603,977 B1	8/2003	Walsh et al.
			6,636,833 B1	10/2003	Flitcroft et al.
			6,650,641 B1	11/2003	Albert et al.
			6,674,745 B1	1/2004	Schuster et al.
			6,674,850 B2	1/2004	Vu et al.
			6,724,860 B2	4/2004	Stumer et al.
			6,744,858 B1	6/2004	Ryan et al.
			6,760,324 B1	7/2004	Scott et al.
			6,766,159 B2	7/2004	Lindholm
			6,772,188 B1	8/2004	Cloutier
			6,775,534 B2	8/2004	Lindgren et al.
			6,785,266 B2	8/2004	Swartz
			6,798,767 B1	9/2004	Alexander et al.
			6,819,929 B2	11/2004	Antonucci et al.
			6,873,599 B1	3/2005	Han
			6,892,184 B1	5/2005	Komen et al.
			6,934,279 B1	8/2005	Sollee et al.
			6,937,713 B1	8/2005	Kung et al.
			6,947,531 B1	9/2005	Lewis et al.
			6,954,453 B1	10/2005	Schindler
			6,961,334 B1	11/2005	Kaczmarczyk
			6,963,557 B2	11/2005	Knox
			6,963,739 B2	11/2005	Dorenbosch et al.
			6,985,440 B1	1/2006	Albert et al.
			6,993,015 B2	1/2006	Kobayashi
			7,006,508 B2	2/2006	Bondy et al.

US 9,948,549 B2

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

7,010,727	B1	3/2006	Stucker	8,024,785	B2	9/2011	Andress et al.
7,027,564	B2	4/2006	James	8,027,333	B2	9/2011	Grabelsky et al.
7,042,985	B1	5/2006	Wright	8,036,366	B2	10/2011	Chu
7,046,658	B1	5/2006	Kundaje	8,041,022	B1	10/2011	Andreasen et al.
7,051,072	B2	5/2006	Stewart et al.	8,050,273	B2	11/2011	Gass
7,055,174	B1	5/2006	Cope et al.	8,060,887	B2	11/2011	Kropivny
7,068,668	B2	6/2006	Feuer	8,078,164	B2	12/2011	Ganesan
7,068,772	B1	6/2006	Widger et al.	8,111,690	B2	2/2012	Hussain et al.
7,079,526	B1	7/2006	Wipliez et al.	8,116,307	B1	2/2012	Thesayi et al.
7,120,682	B1	10/2006	Salama	8,125,982	B2	2/2012	Feuer
7,151,772	B1	12/2006	Kalmanek, Jr. et al.	8,127,005	B2	2/2012	Gutierrez
7,174,156	B1	2/2007	Mangal	8,145,182	B2	3/2012	Rudolf et al.
7,177,399	B2	2/2007	Dawson et al.	8,161,078	B2	4/2012	Gaurav et al.
7,203,478	B2	4/2007	Benco et al.	8,166,533	B2	4/2012	Yuan
7,212,522	B1	5/2007	Shankar et al.	8,166,547	B2	4/2012	Bevan et al.
7,218,722	B1	5/2007	Turner et al.	8,189,568	B2	5/2012	Qiu et al.
7,277,528	B2	10/2007	Rao et al.	8,190,739	B2	5/2012	Gutierrez
7,330,835	B2	2/2008	Deggendorf	8,200,575	B2	6/2012	Torres et al.
7,366,157	B1	4/2008	Valentine et al.	8,204,044	B2	6/2012	Lebizay
7,400,881	B2	7/2008	Kallio	8,219,115	B1	7/2012	Nelissen
7,426,492	B1	9/2008	Bishop et al.	8,223,927	B2	7/2012	Di Serio et al.
7,436,835	B2	10/2008	Castleberry et al.	8,228,837	B2	7/2012	Sheriff et al.
7,437,665	B2	10/2008	Perham	8,228,897	B2	7/2012	Mitchell
7,440,441	B2	10/2008	Lakhani et al.	8,243,730	B1	8/2012	Wong et al.
7,440,442	B2	10/2008	Grabelsky et al.	8,244,204	B1	8/2012	Chen et al.
7,447,707	B2	11/2008	Gaurav et al.	8,275,404	B2	9/2012	Berger et al.
7,454,200	B2	11/2008	Cai et al.	8,300,632	B2	10/2012	Davis et al.
7,454,510	B2	11/2008	Kleyman et al.	8,306,063	B2	11/2012	Erdal et al.
7,457,865	B2	11/2008	Ramakrishnan et al.	8,315,521	B2	11/2012	Leiden et al.
7,477,843	B1 *	1/2009	Peeters H04Q 11/0062 398/49	8,363,647	B2	1/2013	Fangman et al.
7,486,664	B2	2/2009	Swartz	8,364,172	B2	1/2013	Guanfeng et al.
7,486,667	B2	2/2009	Feuer	8,396,445	B2	3/2013	Crawford et al.
7,486,684	B2	2/2009	Chu et al.	8,410,907	B2	4/2013	Twitchell, Jr.
7,512,117	B2	3/2009	Swartz	8,417,791	B1	4/2013	Peretz et al.
7,545,761	B1	6/2009	Kalbag	8,422,507	B2	4/2013	Björzell et al.
7,565,131	B2	7/2009	Rollender	8,423,791	B1	4/2013	Yu et al.
7,573,982	B2	8/2009	Breen et al.	8,427,981	B2	4/2013	Wyss et al.
7,580,886	B1	8/2009	Schulz	8,437,340	B2	5/2013	James
7,587,036	B2	9/2009	Wood et al.	8,462,915	B2	6/2013	Breen et al.
7,593,390	B2	9/2009	Lebizay	8,468,196	B1	6/2013	Roskind et al.
7,593,884	B2	9/2009	Rothman et al.	8,493,931	B1	7/2013	Nix
7,599,944	B2	10/2009	Gaurav et al.	8,509,225	B2	8/2013	Grabelsky et al.
7,639,792	B2	12/2009	Qiu et al.	8,526,306	B2	9/2013	Jungck et al.
7,644,037	B1	1/2010	Ostrovsky	8,532,075	B2	9/2013	Rassool et al.
7,647,500	B2	1/2010	Machiraju et al.	8,537,805	B2	9/2013	Björzell et al.
7,657,011	B1	2/2010	Zielinski et al.	8,542,815	B2	9/2013	Perreault et al.
7,664,495	B1	2/2010	Bonner et al.	8,543,477	B2	9/2013	Love et al.
7,676,215	B2	3/2010	Chin et al.	8,594,298	B2	11/2013	Klein et al.
7,676,431	B2	3/2010	O'Leary et al.	8,599,747	B1	12/2013	Saleem et al.
7,680,114	B2	3/2010	Yazaki et al.	8,599,837	B2	12/2013	Kyle
7,680,737	B2	3/2010	Smith et al.	8,605,714	B2	12/2013	Lebizay
7,702,308	B2	4/2010	Rollender	8,605,869	B1	12/2013	Mobarak et al.
7,715,413	B2	5/2010	Vaziri et al.	8,607,323	B2	12/2013	Yuan
7,715,821	B2	5/2010	Rollender	8,611,354	B2	12/2013	Keränen et al.
7,734,544	B2	6/2010	Schleicher	8,625,578	B2	1/2014	Roy et al.
7,738,384	B2	6/2010	Pelletier	8,627,211	B2	1/2014	Kropivny
7,764,777	B2	7/2010	Wood et al.	8,630,234	B2	1/2014	Björzell et al.
7,764,944	B2	7/2010	Rollender	8,634,838	B2	1/2014	Hellwig et al.
7,765,261	B2	7/2010	Kropivny	8,675,566	B2	3/2014	Huttunen et al.
7,765,266	B2	7/2010	Kropivny	8,682,919	B1	3/2014	Golliher
7,774,711	B2	8/2010	Valeski	8,702,505	B2	4/2014	Kropivny
7,797,459	B1	9/2010	Roy et al.	8,713,098	B1	4/2014	Adya et al.
7,882,011	B2	2/2011	Sandhu et al.	8,724,643	B2	5/2014	Feuer
7,894,441	B2	2/2011	Yazaki et al.	8,749,610	B1	6/2014	Gossweiler et al.
7,899,742	B2	3/2011	Berkert et al.	8,750,290	B2	6/2014	Vance et al.
7,907,551	B2	3/2011	Croy et al.	8,763,081	B2	6/2014	Bogdanovic et al.
7,907,714	B2	3/2011	Baniak et al.	8,767,717	B2	7/2014	Siegel et al.
7,929,955	B1	4/2011	Bonner	8,768,951	B2	7/2014	Crago
7,944,909	B2	5/2011	James	8,774,171	B2	7/2014	Mitchell
7,950,046	B2	5/2011	Kropivny	8,774,378	B2	7/2014	Björzell et al.
7,958,233	B2	6/2011	Gutierrez	8,774,721	B2	7/2014	Hertel et al.
7,965,645	B2	6/2011	Pelletier	8,780,703	B1	7/2014	Eidelson et al.
7,979,529	B2	7/2011	Kreusch et al.	8,792,374	B1	7/2014	Jain et al.
7,995,589	B2	8/2011	Sollée et al.	8,792,905	B1	7/2014	Li et al.
				8,804,705	B2	8/2014	Fangman et al.
				8,805,345	B2	8/2014	Ling et al.
				8,810,392	B1	8/2014	Teller et al.
				8,819,566	B2	8/2014	Mehin et al.
				8,837,360	B1	9/2014	Mishra et al.

US 9,948,549 B2

Page 4

(56)		References Cited					
		U.S. PATENT DOCUMENTS					
8,838,539	B1	9/2014	Ashcraft et al.	2005/0198499	A1	9/2005	Salapaka et al.
8,848,887	B2	9/2014	Willman et al.	2005/0202799	A1	9/2005	Rollender
8,862,701	B2	10/2014	Havrilik	2005/0222952	A1	10/2005	Garrett et al.
8,885,609	B2	11/2014	Nix	2005/0267842	A1	12/2005	Weichert et al.
8,903,051	B2	12/2014	Li et al.	2005/0287979	A1	12/2005	Rollender
8,903,360	B2	12/2014	Celi, Jr. et al.	2006/0006224	A1	1/2006	Modi
8,909,556	B2	12/2014	Huxham	2006/0007940	A1	1/2006	Sollee et al.
8,938,209	B2	1/2015	Crawford et al.	2006/0013266	A1	1/2006	Vega-Garcia et al.
8,938,534	B2	1/2015	Le et al.	2006/0025122	A1	2/2006	Harris et al.
8,948,061	B2	2/2015	Sridhar	2006/0030290	A1	2/2006	Rudolf et al.
8,972,612	B2	3/2015	Le et al.	2006/0036522	A1	2/2006	Perham
8,982,719	B2	3/2015	Seetharaman et al.	2006/0072547	A1	4/2006	Florkey et al.
8,995,428	B2	3/2015	Haster	2006/0072550	A1	4/2006	Davis et al.
9,003,306	B2	4/2015	Mehin et al.	2006/0078094	A1	4/2006	Breen et al.
9,137,385	B2	9/2015	Björzell et al.	2006/0093135	A1	5/2006	Fiatl et al.
9,143,608	B2	9/2015	Björzell et al.	2006/0095320	A1	5/2006	Jones
9,154,417	B2	10/2015	Huttunen et al.	2006/0109960	A1	5/2006	D'Evelyn et al.
9,179,005	B2	11/2015	Perreault et al.	2006/0111116	A1	5/2006	Palmer et al.
9,432,830	B2	8/2016	Lahtiranta et al.	2006/0116892	A1	6/2006	Grimes et al.
9,537,762	B2	1/2017	Perrault et al.	2006/0142011	A1	6/2006	Kallio
9,549,071	B2	1/2017	Björzell et al.	2006/0146797	A1	7/2006	Lebizay
9,565,307	B2	2/2017	Björzell et al.	2006/0153342	A1	7/2006	Sasaki
9,813,330	B2	11/2017	Perreault et al.	2006/0160565	A1	7/2006	Singh et al.
9,826,002	B2	11/2017	Perreault et al.	2006/0177035	A1	8/2006	Cope et al.
2001/0027478	A1	10/2001	Meier et al.	2006/0189303	A1	8/2006	Rollender
2001/0052081	A1	12/2001	McKibben et al.	2006/0195398	A1	8/2006	Dheer et al.
2002/0002041	A1	1/2002	Lindgren et al.	2006/0195584	A1*	8/2006	Baumann H04M 3/54 709/227
2002/0018445	A1	2/2002	Kobayashi	2006/0205383	A1	9/2006	Rollender et al.
2002/0051518	A1	5/2002	Bondy et al.	2006/0209768	A1	9/2006	Yan et al.
2002/0057764	A1	5/2002	Salvucci et al.	2006/0233317	A1	10/2006	Coster et al.
2002/0068545	A1	6/2002	Oyama et al.	2006/0248186	A1	11/2006	Smith
2002/0116464	A1	8/2002	Mak	2006/0251056	A1	11/2006	Feuer
2002/0122391	A1	9/2002	Shalit	2006/0258328	A1	11/2006	Godoy
2002/0122547	A1	9/2002	Hinchey et al.	2006/0264200	A1	11/2006	Laiho et al.
2002/0141352	A1	10/2002	Fangman et al.	2006/0268921	A1	11/2006	Ekstrom et al.
2002/0150080	A1*	10/2002	Bhattacharya H04L 29/06027 370/351	2006/0281437	A1	12/2006	Cook
2003/0008635	A1	1/2003	Ung et al.	2007/0016524	A1	1/2007	Diveley et al.
2003/0012196	A1	1/2003	Ramakrishnan	2007/0036139	A1	2/2007	Patel et al.
2003/0043974	A1	3/2003	Emerson, III	2007/0036143	A1	2/2007	Alt et al.
2003/0095539	A1	5/2003	Feuer	2007/0047548	A1	3/2007	Yazaki et al.
2003/0121967	A1	7/2003	Goldberg et al.	2007/0053382	A1	3/2007	Bevan et al.
2003/0179747	A1	9/2003	Pyke et al.	2007/0064919	A1	3/2007	Chen et al.
2003/0200311	A1	10/2003	Baum	2007/0092070	A1	4/2007	Croy et al.
2003/0211840	A1	11/2003	Castrogiovanni et al.	2007/0112964	A1	5/2007	Guedalia et al.
2003/0219103	A1	11/2003	Rao et al.	2007/0115935	A1	5/2007	Qiu et al.
2004/0009761	A1	1/2004	Money et al.	2007/0121590	A1*	5/2007	Turner H04L 12/66 370/352
2004/0019539	A1	1/2004	Raman et al.	2007/0121593	A1	5/2007	Vance et al.
2004/0022237	A1	2/2004	Elliot et al.	2007/0121602	A1*	5/2007	Sin H04L 12/6418 370/356
2004/0034793	A1	2/2004	Yuan	2007/0127676	A1	6/2007	Khadri
2004/0157629	A1	8/2004	Kallio et al.	2007/0174469	A1	7/2007	Andress et al.
2004/0165709	A1	8/2004	Pence et al.	2007/0217354	A1	9/2007	Buckley
2004/0181599	A1	9/2004	Kreusch et al.	2007/0220038	A1	9/2007	Crago
2004/0202295	A1	10/2004	Shen et al.	2007/0253418	A1	11/2007	Shiri et al.
2004/0203565	A1	10/2004	Chin et al.	2007/0253429	A1	11/2007	James
2004/0203582	A1	10/2004	Dorenbosch et al.	2007/0263609	A1	11/2007	Mitchell
2004/0218748	A1	11/2004	Fisher	2007/0297376	A1	12/2007	Gass
2004/0240439	A1	12/2004	Castleberry et al.	2008/0013523	A1	1/2008	Nambakkam
2004/0255126	A1	12/2004	Reith	2008/0037715	A1	2/2008	Prozeniuk et al.
2005/0007999	A1	1/2005	Becker et al.	2008/0043718	A1	2/2008	Chu
2005/0021939	A1	1/2005	Le et al.	2008/0056235	A1	3/2008	Albina et al.
2005/0025043	A1	2/2005	Mussman et al.	2008/0056243	A1	3/2008	Roy et al.
2005/0063519	A1	3/2005	James	2008/0056302	A1	3/2008	Erdal et al.
2005/0069097	A1	3/2005	Hanson et al.	2008/0063153	A1	3/2008	Krivorot et al.
2005/0083911	A1	4/2005	Grabelsky et al.	2008/0160953	A1	7/2008	Mia et al.
2005/0094651	A1	5/2005	Lutz et al.	2008/0166999	A1	7/2008	Guedalia et al.
2005/0131813	A1	6/2005	Gallagher et al.	2008/0167019	A1	7/2008	Guedalia et al.
2005/0169248	A1	8/2005	Truesdale et al.	2008/0167020	A1	7/2008	Guedalia et al.
2005/0171898	A1	8/2005	Bishop et al.	2008/0167039	A1	7/2008	Guedalia et al.
2005/0174937	A1	8/2005	Scoggins et al.	2008/0187122	A1	8/2008	Baker
2005/0177843	A1	8/2005	Williams	2008/0188198	A1	8/2008	Patel et al.
2005/0188081	A1	8/2005	Gibson et al.	2008/0188227	A1	8/2008	Guedalia et al.
2005/0190892	A1	9/2005	Dawson et al.	2008/0205378	A1	8/2008	Wyss et al.
2005/0192897	A1	9/2005	Rogers et al.	2008/0310599	A1	12/2008	Purnadi et al.
2005/0192901	A1	9/2005	McCoy et al.	2009/0003535	A1	1/2009	Grabelsky et al.
				2009/0012851	A1	1/2009	Marc
				2009/0017842	A1	1/2009	Fukasaku

US 9,948,549 B2

Page 5

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0028146	A1	1/2009	Kleyman et al.
2009/0129566	A1	5/2009	Feuer
2009/0135724	A1	5/2009	Zhang et al.
2009/0135735	A1	5/2009	Zhang et al.
2009/0141883	A1	6/2009	Bastien
2009/0213839	A1	8/2009	Davis et al.
2009/0214000	A1	8/2009	Patel et al.
2009/0238168	A1	9/2009	Lavoie et al.
2009/0268615	A1	10/2009	Pelletier
2009/0292539	A1	11/2009	Jaroker
2009/0296900	A1	12/2009	Breen et al.
2009/0325558	A1	12/2009	Pridmore et al.
2010/0002701	A1	1/2010	Hsieh et al.
2010/0008345	A1	1/2010	Lebizay
2010/0039946	A1	2/2010	Imbimbo et al.
2010/0083364	A1	4/2010	Gutierrez
2010/0086119	A1	4/2010	De Luca et al.
2010/0105379	A1	4/2010	Bonner et al.
2010/0114896	A1	5/2010	Clark et al.
2010/0115018	A1	5/2010	Yoon et al.
2010/0128729	A1	5/2010	Yazaki et al.
2010/0142382	A1	6/2010	Jungck et al.
2010/0150138	A1	6/2010	Björnsell et al.
2010/0150328	A1	6/2010	Perrault et al.
2010/0172345	A1	7/2010	Björnsell et al.
2010/0177671	A1	7/2010	Qiu et al.
2010/0220852	A1	9/2010	Willman et al.
2010/0233991	A1	9/2010	Crawford et al.
2010/0246589	A1	9/2010	Pelletier
2010/0272242	A1	10/2010	Croy et al.
2010/0278534	A1	11/2010	Leiden et al.
2010/0316195	A1	12/2010	Di Serio et al.
2011/0013541	A1	1/2011	Croy et al.
2011/0072095	A1	3/2011	Havruluk
2011/0122827	A1	5/2011	Björnsell et al.
2011/0153809	A1	6/2011	Ghanem et al.
2011/0167164	A1	7/2011	Gutierrez
2011/0176541	A1	7/2011	James
2011/0201321	A1	8/2011	Bonner
2011/0208859	A1	8/2011	Gutierrez
2011/0235543	A1	9/2011	Seetharaman et al.
2011/0255553	A1	10/2011	Bobba et al.
2011/0261717	A1	10/2011	Akuzuwa et al.
2011/0267986	A1	11/2011	Grabelsky et al.
2011/0273526	A1	11/2011	Mehin et al.
2011/0276903	A1	11/2011	Mehin et al.
2011/0276904	A1	11/2011	Mehin et al.
2011/0292929	A1	12/2011	Hester
2012/0014383	A1	1/2012	Geromel et al.
2012/0089717	A1	4/2012	Chen
2012/0096145	A1	4/2012	Le et al.
2012/0099599	A1	4/2012	Keränen et al.
2012/0113981	A1	5/2012	Feuer
2012/0155333	A1	6/2012	Yoon et al.
2012/0170574	A1	7/2012	Huttunen et al.
2012/0195236	A1	8/2012	Knight
2012/0195415	A1	8/2012	Wyss et al.
2012/0227101	A1	9/2012	Yuan
2012/0250624	A1	10/2012	Lebizay
2012/0259975	A1	10/2012	Le et al.
2012/0270554	A1	10/2012	Hellwig et al.
2012/0282881	A1	11/2012	Mitchell
2012/0314699	A1	12/2012	Qiu et al.
2013/0039226	A1	2/2013	Sridhar
2013/0097308	A1	4/2013	Le et al.
2013/0114589	A1	5/2013	Fangman et al.
2013/0128879	A1	5/2013	Kyle
2013/0148549	A1	6/2013	Crawford et al.
2013/0173534	A1	7/2013	Nelakonda et al.
2013/0223276	A1	8/2013	Padgett
2013/0229950	A1	9/2013	Björnsell et al.
2013/0237198	A1	9/2013	Vashi et al.
2013/0254301	A1	9/2013	Lin et al.
2013/0272297	A1	10/2013	Breen et al.
2013/0281147	A1	10/2013	Denman et al.
2013/0287006	A1	10/2013	Nix
2013/0310002	A1	11/2013	Celi, Jr. et al.
2013/0318166	A1	11/2013	Jungck et al.
2013/0329722	A1	12/2013	Perrault et al.
2013/0329864	A1	12/2013	Björnsell et al.
2014/0010119	A1	1/2014	Björnsell et al.
2014/0016764	A1	1/2014	Björnsell et al.
2014/0024367	A1	1/2014	Björnsell et al.
2014/0101749	A1	4/2014	Yuan
2014/0141884	A1	5/2014	Kropivny
2014/0153477	A1	6/2014	Huttunen et al.
2014/0211789	A1	7/2014	Feuer
2014/0215642	A1	7/2014	Huxham
2014/0220944	A1	8/2014	Balasubramanian
2014/0244393	A1	8/2014	Rimmer et al.
2014/0247730	A1	9/2014	Thota et al.
2014/0269624	A1	9/2014	Khay-lbbat et al.
2014/0307858	A1	10/2014	Li et al.
2014/0321333	A1	10/2014	Björnsell et al.
2014/0324969	A1	10/2014	Riddle
2014/0337961	A1	11/2014	Chien et al.
2014/0337962	A1	11/2014	Brandstatter
2014/0349602	A1	11/2014	Majumdar et al.
2015/0327320	A1	11/2015	Huttunen et al.
2015/0358470	A1	12/2015	Björnsell et al.
2016/0006882	A1	1/2016	Björnsell et al.
2016/0028619	A1	1/2016	Perreault et al.
2017/0104868	A1	4/2017	Björnsell et al.
2017/0111265	A1	4/2017	Perreault et al.
2017/0126752	A1	5/2017	Perreault et al.
2017/0142256	A1	5/2017	Björnsell et al.

FOREIGN PATENT DOCUMENTS

CA	2 218 218	A1	10/1997
CA	2249668	A1	4/1999
CA	2 299 037	A1	8/2000
CA	2 437 275	A1	10/2002
CA	2598200	A1	2/2008
CA	2668025	A1	5/2008
CA	2670510	A1	6/2008
CA	2 681 984	A1	10/2008
CA	2 690 236	A1	12/2008
CA	2 659 007	A1	9/2009
CA	2732148	A1	2/2010
CA	2 778 905	A1	8/2010
CA	2812174	A1	3/2011
CN	1498029	A	5/2004
CN	1498482	A	5/2004
CN	1668137	A	9/2005
CN	1274114	C	9/2006
CN	101005503	A	7/2007
CN	101069390	A	11/2007
CN	101095329	A	12/2007
CN	101584150	A	11/2009
CN	101584166	A	11/2009
CN	101605342	A	12/2009
CN	1498029	B	5/2010
CN	101772929	A	7/2010
CN	101069390	B	12/2010
CN	102137024	A	7/2011
CN	102457494	A	5/2012
CN	102484656	A	5/2012
CN	102572123	A	7/2012
CN	101095329	B	10/2012
CN	101605342	B	12/2012
CN	102833232	A	12/2012
CN	101005503	B	1/2013
CN	101772929	B	7/2014
CN	102457494	B	10/2014
DE	602 01 827	T2	11/2005
DE	11 2005 003 306	T5	1/2008
DE	601 33 316	T2	7/2008
DE	603 17 751	T2	11/2008
EP	0 841 832	A2	5/1998
EP	0 841 832	A3	5/1999
EP	1 032 224	A2	8/2000
EP	1 032 224	A3	2/2001
EP	1 244 250	A1	9/2002

US 9,948,549 B2

Page 6

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	1 266 516	A2	12/2002
EP	1 362 456	A2	11/2003
EP	1 371 173	A1	12/2003
EP	1 389 862	A1	2/2004
EP	1 411 743	A1	4/2004
EP	1 389 862	B1	11/2004
EP	1 526 697	A2	4/2005
EP	1 362 456	A4	5/2005
EP	1 575 327	A1	9/2005
EP	1 610 583	A1	12/2005
EP	1 526 697	A3	3/2006
EP	1 721 446	A1	11/2006
EP	1 829 300	A1	9/2007
EP	1 371 173	B1	11/2007
EP	1 411 743	B1	11/2007
EP	1 362 456	B1	3/2008
EP	1 974 304	A2	10/2008
EP	1 974 304	A4	10/2008
EP	1 610 583	B1	8/2009
EP	2 084 868		8/2009
EP	2 090 024		8/2009
EP	2 127 232	A1	12/2009
EP	2 165 489	A1	3/2010
EP	2 215 755	A1	8/2010
EP	2 227 048	A1	9/2010
EP	2 127 232	A4	3/2011
EP	2 165 489	A4	3/2011
EP	2 311 292		4/2011
EP	1 829 300	A4	5/2012
EP	2 449 749	A1	5/2012
EP	2 478 678		7/2012
EP	2 215 755	A4	10/2012
EP	1 829 300	B1	11/2012
EP	2 449 749	B1	3/2014
EP	1266 516	B1	5/2014
GB	2 332 337	A	6/1999
ID	W00200902627		9/2009
IN	24/2009		6/2009
IN	29/2009		7/2009
IN	287412		9/2017
JP	2011-199384	A	10/2011
KR	10-2009-0095621	A	9/2009
KR	10-2009-0086428	A	9/2009
MX	2009004811	A	8/2009
MX	2009005751	A	8/2009
SG	151991	A1	6/2009
SG	152752	A1	6/2009
SG	155474		10/2009
WO	WO 01/50693	A1	7/2001
WO	WO 01/69899	A2	9/2001
WO	WO 01/69899	A3	9/2001
WO	WO 01/80587	A1	10/2001
WO	WO 01/89145	A2	11/2001
WO	WO 02/082728	A1	10/2002
WO	WO 02/082782	A2	10/2002
WO	WO 02/082782	A3	10/2002
WO	WO 03/027801	A2	4/2003
WO	WO 2005/084002	A1	9/2005
WO	WO 2006/067269	A1	6/2006
WO	WO 2006/072099	A1	7/2006
WO	WO 2006/078175	A2	7/2006
WO	WO 2006/078175	A3	7/2006
WO	WO 2007/044454	A2	4/2007
WO	WO 2007/056158	A2	5/2007
WO	WO 2007/087077	A2	8/2007
WO	WO 2007/087077	A3	8/2007
WO	WO 2008/027065	A1	3/2008
WO	WO 2008/052340	A1	5/2008
WO	WO 2008/064481	A1	6/2008
WO	WO 2008/085614	A2	7/2008
WO	WO 2008/085614	A3	7/2008
WO	WO 2008/086350	A3	7/2008
WO	WO 20081086350	A2	7/2008
WO	WO 2008/103652	A1	8/2008
WO	WO 2008/116296	A1	10/2008
WO	WO 2008/085614	A8	12/2008
WO	WO 2008/151406	A1	12/2008
WO	WO 2008/151406	A8	12/2008
WO	WO 2009/070202	A1	6/2009
WO	WO 2009/070278	A1	6/2009
WO	WO 2010/012090	A2	2/2010
WO	WO 2011/000405	A1	1/2011
WO	WO 2011/032256	A1	3/2011
WO	WO 2013/013189	A2	1/2013
WO	WO 2013/120069	A1	8/2013
WO	WO 2014/066155	A2	5/2014
WO	WO 2014/117599	A1	8/2014
WO	WO 2014/166258	A1	10/2014

OTHER PUBLICATIONS

Baker et al., "Cisco Support for Lawful Intercept in IP Networks," Internet Draft—working document of the Internet Engineering Task Force (IETF), accessible at <http://www.ietf.org/ietf/lid-abstracts.txt>, Apr. 2003, expires Sep. 30, 2003, pp. 1-15.

F. Baker et al. "RFC 3924—Cisco Architecture for Lawful Intercept in IP Networks." Oct. 2004.

Bhushan et al., "Federated Accounting: Service Charging and Billing in a Business-to-Business Environment," 0-7803-6719-7/01, © 2001 IEEE, pp. 107-121.

Cisco. "Lawful Intercept Requirements Summary." <http://www.faqs.org/rfcs/rfc3924.html>, Nov. 8, 2006.

DOTS IP Address Validation, "Overview", http://www.serviceobjects.com/products/dots_ipgeo.asp; printed Jun. 21, 2012.
DOTS Phone Exchange, "Overview", <http://www.serviceobjects.com/demos/PhoneExchangeDemo.asp> (URL no longer valid, current URL is <http://www.serviceobjects.com/products/phone/phone-exchange>); printed Jun. 21, 2012.

ETSI Technical Specification. "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 5: Service-specific details for IP Multimedia Services," Apr. 2008, 25 pgs, v.2.3.1, France.

Handley, M. et al. "RFC 2543—SIP: Session Initiation Protocol." Mar. 1999.

IETF ENUM WG R Stastny OEFEG Informational Numbering for VOIP and Other IP Communications: "Numbering for VoIP and other IP Communications, draft-stastny-enum-numbering-voip-00.txt", Oct. 1, 2003, Oct. 12, 2003, pp. 1-43, XP015035676, ISSN: 0000-0004.

IP2Location, <http://www.ip2location.com/>; printed Jun. 20, 2012.

ETSI TS 122 173 V12.7.0 (Oct. 2014) Digital cellular telecommunications system (Phase 2+); Technical Specification 8.2.2.3—Interoperability with PSTN/ISDN and mobile CS Networks, Contents and Forward, pp. 1-9; Sec. 8, pp. 14-17.

Huitema et al., "Architecture for Internet Telephony Service for Residential Customers," Academic Paper for *Bellcore*, Mar. 2, 1999, pp. 1-14.

Jajszczyk et al., "Emergency Calls in Flow-Aware Networks," *IEEE Communications Letters*, vol. 11, No. 9, Sep. 2007, pp. 753-755.

Ketchpel et al. "U-PAI: A universal payment application interface" *Second USENIX Workshop on Electronic Commerce Proceedings*, 1996-8, pp. 1-17.

Kim et al., "An Enhanced VoIP Emergency Services Prototype," *Proceedings of the 3rd International ISCRAM Conference (B. Van de Walle and M. Tuoff, eds.)*, Newark, NJ (USA), May 2006, pp. 1-8.

Kornfeld et al., "DVB-H and IP Datacast—Broadcast to Handheld Devices," *IEEE Transactions on Broadcasting*, vol. 53, No. 1, Mar. 2007, pp. 161-170.

Kortebi et al., "SINR-Based Routing in Multi-Hop Wireless Networks to Improve VoIP Applications Support," 1-4244-0667-6/07, © 2007 IEEE, pp. 491-496.

Lee et al., "VoIP Interoperation with KT-NGN," in *The 6th International Conference on Advanced Communication Technology*, Technical Proceedings, 2004, pp. 126-128, accompanied by Title and Contents—4 pages.

Lin et al., "Effective VoIP Call Routing in WLAN and Cellular Integration," *IEEE Communications Letters*, vol. 9, No. 10, Oct. 2005, pp. 874-876.

(56) **References Cited**

OTHER PUBLICATIONS

- Lind AT&T S: "ENUM Call Flows for VoIP Interworking; draft-lind-enum-callflows-03.txt", Feb. 1, 2002, No. 3, Feb. 1, 2002, pp. 1-17, XP015004214, ISSN: 0000-0004.
- List of North American Numbering Plan area codes, http://en.wikipedia.org/wiki/List_of_NANP_area_codes; printed Jun. 20, 2012.
- Ma et al., "Realizing MPEG4 Video Transmission Based on Mobile Station over GPRS," 0-7803-9335-X/05, © 2005 IEEE, pp. 1241-1244.
- Mintz-Habib et al., "A VoIP Emergency Services Architecture and Prototype," {mm2571,asr,hgs,xiaotaow}@cs.columbia.edu, 0-7803-9428-3/05, © 2005 IEEE, pp. 523-528.
- Moberg & Drummond, "MIME-Based Secure Peer-to-Peer Business Data Interchange Using HTTP; Applicability Statement 2 (AS2)," Network Working Group, Request for Comments: 4130, *Category: Standards Track*, Copyright © The Internet Society Jul. 2005, pp. 1-47.
- Munir, Muhammad Farukh, "Study of an Adaptive Scheme for Voice Transmission on IP in a Wireless Networking Environment 802.11e," *Dept. of Networks and Distributed Computing, Ecole Supérieure En Sciences Informatiques (ESSI), Université De Nice*, Jun. 2005, (pp. 1-35), Best Available Copy—pp. 1-11.
- Rosenberg, et al.; "RFC 3261—SIP: Session Initiation Protocol", Jun. 2002.
- Sippy SIP B2BUA. "About Sippy RTPproxy." <http://www.rtpproxy.org>. Jul. 15, 2009.
- Sripanidkulchai et al., "Call Routing Management in Enterprise VoIP Networks," *Copyright 2007 ACM 978-1-59593-788-9/07/0008*, 6 pages.
- Stallings, William, "The Session Initiation Protocol," *The Internet Protocol Journal*, vol. 6, No. 1, Mar. 2003, pp. 20-30.
- Technical Report, "3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Study into routing of MT-SMs via the HPLMN (Release 7)," *3GPP TR 23.840 V0.1.0* (Feb. 2006), 13 pages.
- Thernelius, Fredrik, "SIP, NAT, and Firewalls," Master's Thesis, *ERICSSON, Department of Teleinformatics*, May 2000, pp. 1-69.
- Townsend, et al.; "RFC 2661—Layer Two Tunneling Protocol 'L2TP'", Aug. 1999.
- Trad et al., "Adaptive VoIP Transmission over Heterogeneous Wired/Wireless Networks," V. Roca and F. Rousscau (Eds.): *MIPS 2004, LNCS 3311*, pp. 25-36, 2004, © Springer-Verlag Berlin Heidelberg 2004.
- Wikipedia, "International mobile subscriber identity (IMSI)," <http://en.wikipedia.org/wiki/IMSI>, Jul. 16, 2013.
- Wikipedia, "Roaming," <http://en.wikipedia.org/wiki/Roaming>, Jul. 16, 2013.
- Yu et al., "Service-Oriented Issues: Mobility, Security, Charging and Billing Management in Mobile Next Generation Networks," *IEEE BeN2006*, 1-4244-0146-1/06, © 2006 IEEE, pp. 1-10.
- International Search Report and Written Opinion of the International Searching Authority completed Jun. 6, 2008 for PCT/CA2008/000545.
- International Search Report and Written Opinion of the International Searching Authority completed Feb. 6, 2008 for PCT/CA2007/001956.
- International Preliminary Report on Patentability dated May 14, 2009 for PCT/CA2007/001956.
- International Search Report and Written Opinion of the International Searching Authority completed Mar. 3, 2008 for PCT/CA2007/002150.
- International Preliminary Report on Patentability dated Feb. 13, 2009 for PCT/CA2007/002150.
- International Preliminary Report on Patentability and Written Opinion of the International Searching Authority dated Feb. 10, 2011 for PCT/CA2009/001062.
- International Search Report and Written Opinion completed on Jun. 18, 2010 for PCT/CA2009/001317.
- International Search Report and Written Opinion dated Mar. 12, 2010 for PCT/CA2009/001062.
- International Preliminary Report on Patentability dated Sep. 29, 2009 for PCT/CA2008/000545.
- International Preliminary Report on Patentability dated Mar. 20, 2012 for PCT/CA2009/001317.
- Canadian Office Action dated Jan. 27, 2015 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Nov. 18, 2015 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Dec. 1, 2015 for Canadian Patent Application No. CA 2,812,174.
- Canadian Office Action dated Jan. 22, 2016 for Canadian Patent Application No. CA 2,916,220.
- Canadian Office Action dated Mar. 3, 2016 for Canadian Patent Application No. CA 2,670,510.
- Canadian Office Action dated Jun. 8, 2016 for Canadian Patent Application No. CA 2,916,217.
- Canadian Office Action dated Aug. 16, 2016 for Canadian Patent Application No. CA 2,681,984.
- Canadian Office Action dated Mar. 31, 2017 for Canadian Patent Application No. CA 2,916,220.
- Canadian Office Action dated May 29, 2017 for Canadian Patent Application No. CA 2,668,025.
- Canadian Office Action dated Jun. 9, 2017 for Canadian Patent Application No. CA 2,916,217.
- Canadian Office Action dated Aug. 2, 2017 for Canadian Patent Application No. CA 2,681,984.
- Chinese Office Action dated Mar. 24, 2011 for Chinese Patent Application No. CN 200780049791.5.
- Chinese Office Action dated Jun. 23, 2011 for Chinese Patent Application No. CN 200780049136.X.
- Supplementary European Search Report for European Application No. 07 816 106, dated Jun. 18, 2012.
- Extended European Search Report dated Nov. 2, 2012 for European Application No. EP 07 855 436.7.
- Extended European Search Report dated Dec. 20, 2013 for European Application No. EP 09 849 358.8.
- Extended European Search Report dated Apr. 16, 2014 for European Patent Application No. EP 09 802 316.1.
- European Examination Report dated Nov. 26, 2015 for European Patent Application No. EP 07 816 106.4.
- Communication for European Patent Application No. EP 07 816 106.4—Invitation pursuant to Article 94(3) and Rule 71(1) EPC dated Apr. 15, 2016. All pages.
- European Examination Report dated Aug. 29, 2016 for European Patent Application No. EP 07 855 436.7.
- Communication under Rule 71(3) EPC—Intention to Grant—dated Oct. 14, 2016 for European Patent Application No. EP 07 816 106.4.
- European Examination Report dated May 12, 2017 for European Patent Application No. EP 09-802-316.1.
- First Examination Report dated Dec. 9, 2015, India Patent Application No. 1047/MUMNP/2009, which corresponds to subject U.S. Appl. No. 14/802,929.
- Indian Office Action dated Jun. 21, 2017 for Indian Patent Application No. IN 1227/MUMNP/2009.
- Intimation of the grant and recordal of India Patent No. 28/7412 entitled "Producing Routing Messages for Voice Over IP Communications", dated Sep. 15, 2017, for India Patent Application No. IN 1047/MUMNP/2009 filed Nov. 1, 2007.
- Indonesian Examination Report dated Jul. 5, 2012 for Indonesian Patent Application No. W-00200901414.
- Indonesian Examination Report dated Feb. 8, 2013 for Indonesian Patent Application No. W-00200901165.
- Mexican Exam Report dated Jul. 11, 2011 for Mexican Patent Application No. MX/a/2009/004811.
- Mexican Notice of Allowance dated Sep. 2, 2011 for Mexican Patent Application No. MX/a/2009/005751.
- Document Title: Complaint for Patent Infringement [Jury Demand]; Case Title: *VoIP-PAL.Com, Inc.*, a Nevada corporation, Plaintiff, v. *Verizon Wireless Services, LLC*, a Delaware limited liability corporation; *Verizon Communications, Inc.*, a Delaware corporation; *AT&T, Inc.*, a Delaware corporation; *AT&T Corp.*, a

US 9,948,549 B2

Page 8

(56) References Cited

OTHER PUBLICATIONS

Delaware corporation; and DOES I through X, inclusive, Defendants; Case No. 2:16-CV-00271; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Exhibit E; Chart 1 to Exhibit E; Chart 2 to Exhibit E; Chart 3 to Exhibit E; Chart 4 to Exhibit E; Chart 5 to Exhibit E; Chart 6 to Exhibit E; Exhibit F; Chart 1 to Exhibit F; Chart 2 to Exhibit F; Chart 3 to Exhibit F; Chart 4 to Exhibit F; Chart 5 to Exhibit F; Chart 6 to Exhibit F; Exhibit G; Exhibit H; and Addendum 1 to Exhibit H.

Document Title: Complaint for Patent Infringement [Jury Demand] ; Case Title: *VoIP-Pal.Com, Inc.*, a Nevada corporation, Plaintiff, v. *Apple, Inc.*, a California corporation; Defendants; Case No. 2:16-CV-00260; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Chart 1 to Exhibit D; Chart 2 to Exhibit D; Chart 3 to Exhibit D; Chart 4 to Exhibit D; Exhibit E; Exhibit F; and Addendum 1 to Exhibit F.

Letter dated Nov. 30, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Apple Inc. in the U.S.

Letter dated Dec. 1, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Verizon Communications in the U.S.

Letters dated Dec. 18, 2015, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Airtel in India; Alcatel-Lucent in France; Avaya Inc. in the U.S.; AT&T in the U.S.; Blackberry in Canada; Cable One in the U.S.; CenturyLink in the U.S.; Charter Communications in the U.S.; Cisco Systems in the U.S.; Comcast in the U.S.; Cox Communications in the U.S.; Cricket Wireless in the U.S.; Facebook in the U.S.; Freedom Pop in the U.S.; Frontier Communications in the U.S.; HP in the U.S.; Juniper Networks in the U.S.; LoopPay, Inc. in the U.S.; Magic Jack in the U.S.; MetroPCS in the U.S.; Ooma in the U.S.; PayPal in the U.S.; Republic Wireless in the U.S.; Rok Mobile in the U.S.; Samsung Electronics-America in the U.S.; ShoreTel, Inc. in the U.S.; Siemens in Germany; Skype USA in the U.S.; Sprint in the U.S.; Square Cash in the U.S.; Suddenlink Communications in the U.S.; Talktone in the U.S.; Tango in the U.S.; Time Warner Cable in the U.S.; T-mobile in the U.S.; Twitter in the U.S.; US Cellular in the U.S.; Venmo in the U.S.; Virgin Mobile USA in the U.S.; Vodafone in the UK; and Vonage in the U.S.

Letters dated Jan. 4, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Rogers Communications Inc. in Canada; Shaw Cable in Canada; Walmart in Alaska; and WIND Mobile in Canada.

Letters dated Jan. 21, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Alibaba (China) Co., Ltd in China; Comwave Telecommunications in Canada; and Intel in the U.S.

Letters dated Feb. 2, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the

following companies: Netflix Inc. in the U.S.; Skype Technologies in the U.S.; and WhatsApp Inc. in the U.S.

Document Title: Petition for *Inter Partes* Review of U.S. Pat. No. 8,542,815; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Dated May 24, 2016. 64 sheets.

Document Title: Declaration of Michael Caloyannides; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed May 23, 2016; Filed May 24, 2016. 84 sheets.

Document Title: Public Switched Telephone Networks: A Network Analysis of Emerging Networks; Daniel Livengood, Jijun Lin and Chintan Vaishnav; Engineering Systems Division; Massachusetts Institute of Technology; Submitted May 16, 2006; To Dan Whitney, Joel Moses and Chris Magee. 27 sheets.

Document Title: A Brief History of VoIP; Document One—The Past; Joe Hallock; joe@sitedifference.com; date on cover page: Nov. 26, 2004; Evolution and Trends in Digital Media Technologies—COM 538; Masters of Communication in Digital Media; University of Washington. 17 sheets.

Document Title: Petitioner's Voluntary Interrogatory Responses; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner; IPR20161082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed and Filed not later than May 24, 2016. 8 sheets.

Document Title: VoIP-Pal, The World is Calling!, "Over \$7 Billion in Lawsuits File by *Voip-Pal.com Inc. vs Apple, Verizon and AT&T* for Various Patent Infringements," Business Wire®, A Berkshire Hathaway Company, Feb. 11, 2016. 2 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 9,179,005; Petition for *Inter Partes* Review of U.S. Pat. No. 9,179,005; Dated Jun. 15, 2016. 70 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for *Inter Partes* Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 9,179,005; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No. 2:16-cv-00260-RFB-VCF; Issued: Nov. 3, 2015; Application Filed: Aug. 13, 2013; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 8,542,815; Petition for *Inter Partes* Review of U.S. Pat. No. 8,542,815; Dated Jun. 15, 2016. 67 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for *Inter Partes* Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 8,542,815; Currently in Litigation Styled: *VoIP-Pal.com, Inc. v. Apple Inc.*, Case No. 2:16-cv-00260-RFB-VCF; Issued: Sep. 24, 2013; Application Filed: Nov. 1, 2007; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Complaint for Patent Infringement, United States District Court, District of Nevada, Case No. 2:16-cv-2338, *VoIP-Pal.Com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendant, Filed Oct. 6, 2016, 8 pages.

Civil Docket for Case #: 2:16-cv-02338-RFB-CWH, United States District Court, District of Nevada (Las Vegas), *Voip-Pal.com, Inc. v. Twitter, Inc.*, Date Filed: Oct. 6, 2016, 2 pages.

Table of Exhibits, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, 1 page.

Exhibit A, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 8,542,815 B2, Issued Sep. 24, 2013, to Clay Perrault et al., 60 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Exhibit B, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 9,179,005 B2, Issued Nov. 3, 2015, to Clay Perrault et al., 63 pages.

Exhibit C, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Letter dated Dec. 18, 2015 giving notice of U.S. Pat. Nos. 8,542,815 B2; 9,179,005 B2; and related Patents listed in Attachment A, 4 pages.

Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Asserted Claims and Infringement Conditions, United States District Court, District of Nevada, *VoIP-Pal.Com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 6 pages.

Chart 1 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 1, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 8,542,815, United States District Court, District of Nevada, *VoIP-Pal.Com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 20 pages.

Chart 2 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 2, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 9,179,005, United States District Court, District of Nevada, *VoIP-Pal.Com, Inc.*, a Nevada corporation, Plaintiff v. *Twitter, Inc.*, a California corporation, Defendants, 28 pages.

Exhibit E, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, VPLM Active U.S. Patent Matters as of Oct. 1, 2016, 2 pages.

Exhibit F, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Twitter Royalty Monetization Analysis Overview, 4 pages.

Patent Owner's Preliminary Response, Case No. IPR2016-01082, U.S. Pat. No. 8,542,815, *Unified Patents Inc.*, Petitioner, v. *VoIP-Pal.Com Inc.*, Patent Owner, Filing Date: Aug. 26, 2016, 80 pages. Voip-Pal.com, Inc. Exhibit 2001, Comparison of portions of Petition with portions of Declaration, IPR2016-01082, *Unified Patents v. Voip-Pal*, Filing Date: Aug. 26, 2016, 9 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com Inc.*, Patent Owner, Filing Date: Sep. 19, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01201, *Apple v. Voip-Pal*, Filing Date: Sep. 19, 2016, 19 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com Inc.*, Patent Owner, Filing Date: Sep. 21, 2016, 74 pages.

Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01198, *Apple v. Voip-Pal*, Filing Date: Sep. 21, 2016, 21 pages.

Decision: Denying Institution of *Inter Partes* Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Unified Patents Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner, Case IPR2016-01082, U.S. Pat. No. 8,542,815 B2, Paper 8, Entered: Nov. 18, 2016.

Decision: Institution of *Inter Partes* Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Paper 6, Entered: Nov. 21, 2016.

Decision: Institution of *Inter Partes* Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Paper 6, Entered: Nov. 21, 2016.

Scheduling Order: United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner, Cases IPR2016-01201, IPR2016-01198, U.S. Pat. No. 8,542,815 B2, U.S. Pat. No. 9,179,005 B2, Paper 7, Entered: Nov. 21, 2016.

Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 76 pages. Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01201, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01201, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01201, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, To: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01201, Memo—"Subject: Digifonica Technology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; To: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01201, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, To: John Rutter, et al., 3 pages.

Voip-Pal Ex. 2007, IPR2016-01201, DigiFonica International Inc Memo—" [Fwd: Digifonica Technical Review—draft report]," From Clay Perreault, To: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01201, John Rutter—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01201, Stuart Gare—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01201, Pentti Kalevi Huttunen—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Palcom, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01201, Ryan Purita—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex. 2012, IPR2016-01201, Johan Emil Viktor Björnsell—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01201, Clay Perreault—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01201, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Voip-Pal Ex. 2015, IPR2016-01201, RBR Source Code Log for Trunk Directory, "r1879 | cdelalande | Oct. 31, 2006 17:07:46-0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016, IPR2016-01201, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 82 pages.

Voip-Pal Ex. 2017, IPR2016-01201, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, To: Emil Björzell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01201, David Terry—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01201, DF DigiFonica International Inc Memo—"Software release 10:30am PST—11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, To: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01201, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies. Technology Overview, DRAFT Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. To: E. Björzell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01201, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björzell To: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

Voip-Pal Ex. 2023, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 353 added, 1 message" Fuad A. To: E. Björzell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 358 added, 1 message" Fuad A. To: E. Björzell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:BR Roll out Rev 361 updated, 1 message" Fuad A. To: E. Björzell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" David Terry To: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" Emil Björzell To: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for * supernodes.:RBR Rev 541 updated, 1 message" Fuad A. To: E. Björzell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541..1 message" David Terry To: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björzell To: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 554 added, 1 message" Fuad A. To: Emil Björzell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry To: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björzell To: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01201, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards To: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff To: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01201, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01201, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

Voip-Pal Ex. 2047, IPR2016-01201, "MERLIN® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.

Voip-Pal Ex. 2048, IPR2016-01201, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.

Voip-Pal Ex. 2049, IPR2016-01201, Valdar, Andy, *Understanding Telecommunications Networks*, © 2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.

Voip-Pal Ex. 2050, IPR2016-01201, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.

Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 78 pages. Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01198, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01198, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01198, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, To: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01198, Memo—"Subject: Digifonica TEchnology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; To: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01198, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, To: John Rutter, et al., 3 pages.

US 9,948,549 B2

Page 11

(56) References Cited

OTHER PUBLICATIONS

Voip-Pal Ex. 2007, IPR2016-01198, DigiFonica International Inc Memo—"[Fwd: Digifonica Technical Review—draft report]," From Clay Perreault, To: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01198, John Rutter—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01198, Stuart Gare—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01198, Pentti Kalevi Huttunen—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01198, Ryan Purita—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex. 2012, IPR2016-01198, Johan Emil Viktor Björzell—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01198, Clay Perreault—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01198, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

Voip-Pal Ex. 2015, IPR2016-01198, RBR Source Code Log for Trunk Directory, "r1879 | cdalalande | Oct. 31, 2006 17:07:46 -0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016, IPR2016-01198, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 96 pages.

Voip-Pal Ex. 2017, IPR2016-01198, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, To: Emil Björzell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01198, David Terry—"Declaration in Support Patent Owner Response to *Inter Partes* Petition," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01198, DF DigiFonica International Inc Memo—"Software release 10:30am PST-11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, To: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01198, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies.

Technology Overview, DRAFT Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. To: E. Björzell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01198, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björzell To: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

Voip-Pal Ex. 2023, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 353 added, 1 message" Fuad A. To: E. Björzell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 358 added, 1 message" Fuad A. To: E. Björzell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 361 updated, 1 message" Fuad A. To: E. Björzell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rolf out Rev 361, 1 message" David Terry To: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rolf out Rev 361, 1 message," Emil Björzell To: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Rev 541 updated, 1 message" Fuad A. To: E. Björzell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" David Terry To: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björzell To: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.:RBR Roll out Rev 554 added, 1 message" Fuad A. To: Emil Björzell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry To: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björzell To: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01198, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards To: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff To: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01198, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01198, "Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *VoIP-Pal.Com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01198, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01198, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

US 9,948,549 B2

Page 12

(56) References Cited

OTHER PUBLICATIONS

- Voip-Pal Ex. 2047, IPR2016-01198, "MERLIN® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.
- Voip-Pal Ex. 2048, IPR2016-01198, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.
- Voip-Pal Ex. 2049, IPR2016-01198, Valdar, Andy, *Understanding Telecommunications Networks*, © 2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.
- Voip-Pal Ex. 2050, IPR2016-01198, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.
- Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.Com Inc.*, Patent Owner; Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Petition for *Inter Partes* Review of U.S. Pat. No. 8,542,815; Dated May 9, 2017, 63 pages.
- Petitioner Apple Inc. Exhibit 1003, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.
- Petitioner Apple Inc. Exhibit 1004, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.
- Petitioner Apple Inc. Exhibit 1005, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Declaration of Henry H. Hough, PhD, 45 pages.
- Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.
- Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. Patent of *VoIP-Pal.Com Inc.*, Patent Owner; Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Petition for *Inter Partes* Review of U.S. Pat. No. 9,179,005; Dated May 9, 2017, 54 pages.
- Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.
- Petitioner Apple Inc. Exhibit 1007, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.
- Petitioner Apple Inc. Exhibit 1008, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Declaration of Henry H. Hough, PhD, 41 pages.
- Petitioner Apple Inc. Exhibit 1009, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.
- Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, Case No. IPR2017-01382; U.S. Pat. No. 8,542,815; Petition for *Inter Partes* Review of U.S. Pat. No. 8,542,815; Dated May 8, 2017, 84 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 8,542,815, *Inter Partes* Review No. IPR2017-01382; Declaration of James Bress in Support of Petition for *Inter Partes* Review of U.S. Pat. No. 8,542,815; with Appendices A through II, 2113 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix A, James R. Bress, Curriculum Vitae, 26 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix B, Chapter 5, Telecommunications Essentials, Lillian Goleniewski, © 2002, 40 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix C, Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 41 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix D, ITU-T Recommendation E.164 (May 1997), 27 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix E, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 3-8-3-14, 9 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix F, Chapter 4, Telecommunications Essentials, Lillian Goleniewski, © 2002, pp. 99-100, 4 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix G, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 18-1-18-20, 22 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix H, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 2, 32 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix I, Telecommunications Act of 1996, 104th Congress of the U.S.A., Jan. 1996, 128 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix J, Perspectives on the Ain Architecture, Berman et al., IEEE Communications Magazine, Feb. 1992, 6 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix K, U.S. Pat. No. 7,907,714 B2, to Baniak et al., 21 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix L, The IMS, Poikselkä & Mayer, © 2009, John Wiley & Sons Ltd, Chapter 1 Introduction, 14 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix M, The IMS, Poikselkä & Mayer, © 2009, John Wiley & Sons Ltd, pp. 24-25 and 86-94, 13 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix N, Chapter 9, Telecommunications Essentials, Lillian Goleniewski, © 2002, 42 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix O, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, pp. 238-239, 4 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix P, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 4, pp. 67-86, 22 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Q, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 5, pp. 87-112, 28 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix R, Telecommunications Essentials, Lillian Goleniewski, © 2002, p. 221, 3 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix S, Network Working Group, RFC (Request for Comments): 1122, Internet Engineering Task Force, R. Braden, Ed., Oct. 1989, pp. 18-25, 9 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix T, RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix U, Network Working Group, RFC (Request for Comments): 1034, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix V, Network Working Group, RFC (Request for Comments): 1035, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix W, Network Working Group, RFC (Request for Comments): 3761, P. Fallstrom et al., Apr. 2004, pp. 1-18, 18 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix X, U.S. Pat. No. 6,594,254 B1, to Kelly, 18 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Y, ITU-T Recommendation H.323 (Jul. 2003), 298 pages.
- Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Z, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 6-306-6-309, 4 pages.

US 9,948,549 B2

Page 13

(56)

References Cited

OTHER PUBLICATIONS

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix AA, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-10-14-13, 6 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix BB, The Internet Engineering Task Force (IETF®), May 5, 2017, 2 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix CC, Network Working Group, RFC (Request for Comments): 3261, J. Rosenberg et al., Jun. 2002, 269 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix DD, Network Working Group, RFC (Request for Comments): 3666, A. Johnston et al., Dec. 2003, 118 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix EE, Network Working Group, RFC (Request for Comments): 3665, A. Johnston et al., Dec. 2003, 94 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix FF, Network Working Group, RFC (Request for Comments): 2327, M. Handley et al., Apr. 1998, 42 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix GG, ITU-T Recommendation Q.931 (May 1998), 345 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix HH, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-76-14-77, 4 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix II, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01382; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01382; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01382; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003 to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01382; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01382; Decision, Institution of *Inter Partes* Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 33 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01382; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01382; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01382; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01382; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, Case No. IPR2017-01383; U.S. Pat. No. 9,179,005; Petition for *Inter Partes* Review of U.S. Pat. No. 9,179,005; Dated May 8, 2017, 92 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 9,179,005; *Inter Partes* Review No. IPR2017-01383; Declaration of James Bress in Support of

Petition for *Inter Partes* Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2094 pages, Appendices A through II are identical to those previously listed hereinabove as cite Nos. 876-910.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01383; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01383; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01383; U.S. Publication No. 2004/0218748 A1, Published Nov. 4, 2004, by Stephen Fisher, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01383; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01383; U.S. Pat. No. 6,674,850 B2, Issued Jan. 6, 2004, to Vu et al., 10 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01383; Decision, Institution of *Inter Partes* Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01383; Patent Owner Response to Petition, Filed Feb. 10, 2017, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, 78 pages.

Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, Case No. IPR2017-01384; U.S. Pat. No. 9,179,005; Petition for *Inter Partes* Review of U.S. Pat. No. 9,179,005; Dated May 7, 2017, 70 pages.

Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica (International) Limited* Patent Owner, U.S. Pat. No. 9,179,005, *Inter Partes* Review No. IPR2017-01384; Declaration of James Bress in Support of Petition for *Inter Partes* Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2085 pages. Appendices A through II are identical to those previously listed hereinabove as cite Nos. 876-910.

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01384; James R. Bress, Curriculum Vitae, 26 pages.

Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01384; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.

Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01384; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.

Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01384; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.

Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01384; Decision, Institution of *Inter Partes* Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 32 pages.

Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01384; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.

Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01384; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.

US 9,948,549 B2

Page 14

(56)

References Cited

OTHER PUBLICATIONS

Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01384; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.

Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01384; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Petitioner's Reply to Patent Owner's Response, Dated May 17, 2017, 34 pages.

Petitioner Apple Inc. Exhibit 1007, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1008, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1009, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *VoIP-Pal.com Inc.*, a Nevada corporation, Plaintiff, v. *Apple Inc.*, a California corporation, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Johan Emil Viktor Bjorsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . ." from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Email dated May 1, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Petitioner's Reply to Patent Owner's Response, Paper 34, Dated May 17, 2017, 33 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *VoIP-Pal.com Inc.*, a Nevada corporation, Plaintiff, v. *Apple Inc.*, a California corporation, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1015, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Johan Emil Viktor Bjorsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1016, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . ." from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1017, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Email dated May 1, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and

US 9,948,549 B2

Page 15

(56) References Cited

OTHER PUBLICATIONS

Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01201, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01198, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Order, *Conduct of Proceeding*, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 37, Filed: Jun. 13, 2017, 3 pages.

Voip-Pal Ex. 2053, IPR2016-01198, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Voip-Pal Ex. 2053, IPR2016-01201, *Apple Inc. vs. Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Order, *Conduct of Proceeding*, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 43, Filed: Jun. 22, 2017, 4 pages.

Order, *Trial Hearing*, 37 C.F.R. § 42.70, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 45, Filed: Jun. 26, 2017, 4 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, Date: Jun. 26, 2017, 15 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial

and Appeal Board, *Apple Inc.*, Petitioner v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, Date: Jun. 26, 2017, 15 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR 2016-01198, U.S. Pat. No. 9,179,005, Filed: Jul. 3, 2017, 8 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR 2016-01201, U.S. Pat. No. 8,542,815, Filed: Jul. 3, 2017, 8 pages.

Voip-Pal Ex. 2054, IPR2016-01198, Voip-PAL's Demonstratives for Oral Hearing, *Apple Inc. v. VoIP-Pal.com, Inc.*, Case IPR2016-01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Voip-Pal Ex. 2054, IPR2016-01201, Voip-PAL's Demonstratives for Oral Hearing, *Apple Inc. v. VoIP-Pal.com, Inc.*, Case IPR2016-01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Petitioner Apple Inc. Ex. 1018, Petitioner's Demonstrative Exhibits, *Inter Partes* Reviews, U.S. Pat. Nos. 9,179,005 & 8,542,815, Oral Argument, July 20, 2017, *Apple Inc. v. Voip-Pal.com, Inc.*, Case IPR2016-01198; U.S. Pat. No. 9,179,005, Case IPR2016-01201; U.S. Pat. No. 8,542,815, 46 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-PAL.COM, INC.*, Patent Owner, Case No. IPR2017-01382, U.S. Pat. No. 8,542,815, dated Aug. 24, 2017, 71 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-PAL.COM, INC.*, Patent Owner, Case No. IPR2017-01383, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 74 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-PAL.COM, INC.*, Patent Owner, Case No. IPR2017-01384, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 61 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01398, U.S. Pat. No. 9,179,005, dated Aug. 25, 2017, 76 pages.

Patent Owner's Preliminary Response to Petition for *Inter Partes* Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-PAL.COM, INC.*, Patent Owner, Case No. IPR2017-01399, U.S. Pat. No. 8,542,815, dated Aug. 25, 2017, 77 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Cases IPR2016-01198 and IPR2016-01201; U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2; Record of Oral Hearing, Held: Jul. 20, 2017; Before Josiah C. Cocks, Jennifer Meyer Chagnon, and John A. Hudalla, *Administrative Patent Judges*, 83 pages.

Canadian Office Action dated Sep. 18, 2014 for Canadian Patent Application No. CA 2,670,510.

Canadian Office Action dated Aug. 18, 2015 for Canadian Patent Application No. CA 2,732,148.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2; Order, *Conduct of Proceeding*, 37 C.F.R. § 42.5; Paper No. 54, Entered: Dec. 20, 2017; 4 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Motion for Entry of Judgment in Favor of Petitioner etc; Paper 55, Date: Dec. 20, 2017; 18 pages.

US 9,948,549 B2

Page 16

(56)

References Cited

OTHER PUBLICATIONS

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Updated Exhibit List; Date: Dec. 22, 2017; 4 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Exhibit 1019—Sep. 18, 2017 VoIP-Pal Website advertising Dr. Sawyer's Letters; Date: Dec. 20, 2017; 1 page.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Exhibit 1020—Sep. 2017 VoIP-Pal Website posting and linking all of Dr. Sawyer's Letters; Date: Dec. 20, 2017; 2 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, vs. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005 B2 and Case No. IPR2016-01201, U.S. Pat. No. 8,542,815 B2; IPR2016-01201 Exhibit 1021—Telephonic Hearing Before the Administrative Patent Judges: Dec. 19, 2017; 25 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Motion for Entry of Judgment in Favor of Petitioner etc; Date: Dec. 20, 2017; 18 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Updated Exhibit List; Date: Dec. 22, 2017; 4 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2; Exhibit 1019—Sep. 18, 2017 VoIP-Pal Website advertising Dr. Sawyer's Letters; Date: Dec. 20, 2017; 1 page.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2; Exhibit 1020—Sep. 2017 VoIP-Pal Website posting and linking all of Dr. Sawyer's Letters; Date: Dec. 20, 2017; 2 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005 B2 and Case No. IPR2016-01201, U.S. Pat. No. 8,542,815 B2; IPR2016-01198 Exhibit 1021—Telephonic Hearing Before the Administrative Patent Judges: Dec. 19, 2017; 25 pages.

Exhibit 3001 filed Dec. 20, 2017—Letter from Ryan L. Thomas dated Dec. 19, 2017 re Representation of VoIP-Pal.com, Inc. in Conference Call to the Administrative Patent Judges in re IPR2016-01198 and IPR-2016-01201; 1 page.

Exhibit 3002 filed Dec. 20, 2017—Email from Attorney Adam Seitz dated Dec. 15, 2017 to the Administrative Patent Judges in re IPR2016-01198 and IPR-2016-01201 re Authorization to File Motion for Sanctions; 1 page.

Exhibit 3003 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated May 1, 2017 to PTAB Chief Judge David P. Ruschke in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 6 pages.

Exhibit 3004 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Jun. 21, 2017 to PTAB Chief Judge David P. Ruschke in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 3 pages.

Exhibit 3005 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Jul. 11, 2017 to PTAB Chief Judge David P. Ruschke in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 5 pages.

Exhibit 3006 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Jul. 27, 2017 to the Secretary of the Department of Commerce Hon. Wilbur Ross et al. in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 6 pages.

Exhibit 3007 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Aug. 31, 2017 to the Secretary of the Department of Commerce Hon. Wilbur Ross in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 8 pages.

Exhibit 3008 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Oct. 23, 2017 to the PTAB Chief Judge David P. Ruschke et al. in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 10 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2; Final Written Decision; Paper 53, Entered: Nov. 20, 2017; 29 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2; Final Written Decision; Paper 54, Entered: Nov. 20, 2017; 29 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2017-01399, U.S. Pat. No. 8,542,815 B2; Decision: Denying Institution of *Inter Partes* Review; Paper No. 6, Entered: Nov. 20, 2017; 23 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2017-01398, U.S. Pat. No. 9,179,005 B2; Decision: Denying Institution of *Inter Partes* Review; Paper No. 6, Entered: Nov. 20, 2017; 23 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2017-01382, U.S. Pat. No. 8,542,815 B2; Decision: Denying Institution of *Inter Partes* Review; Paper No. 8, Entered: Nov. 20, 2017; 28 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2017-01383, U.S. Pat. No. 9,179,005 B2; Decision: Denying Institution of *Inter Partes* Review; Paper No. 8, Entered: Nov. 20, 2017; 43 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case IPR2017-01384, U.S. Pat. No. 9,179,005 B2; Decision: Denying Institution of *Inter Partes* Review; Paper No. 8, Entered: Nov. 20, 2017; 31 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner's Opposition to Apple's Motion for Sanctions Pursuant to Board Order of Dec. 20, 2017; Filed: Jan. 12, 2018; 17 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner's Updated Exhibit List; Filed: Jan. 12, 2018; 9 pages.

Voip-Pal Exhibit 2056, IPR2016-01198; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Declaration in Support of Patent Owner's Opposition to Motion for Sanctions; Dated: Jan. 12, 2018; 12 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner's Opposition to Apple's Motion for Sanctions Pursuant to Board Order of Dec. 20, 2017; Filed: Jan. 12, 2018; 17 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner's Updated Exhibit List; Filed: Jan. 12, 2018; 9 pages.

Voip-Pal Exhibit 2056, IPR2016-01198; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Declaration in Support of Patent Owner's Opposition to Motion for Sanctions; Dated: Jan. 12, 2018; 12 pages.

US 9,948,549 B2

Page 17

(56)

References Cited

OTHER PUBLICATIONS

Voip-Pal Exhibit 2057; IPR2016-01198 and IPR2016-01201; Declaration of Adam R. Knecht, Esq. Regarding Notice of Various Letters From Dr. Thomas Sawyer to the Honorable Judge Richard F. Boulware II (ECF Nos. 28 and 32); including Exhibit A (7 pages), Exhibit B (19 pages) and Exhibit C (12 pages); Executed on Dec. 18, 2017 40 pages.

Voip-Pal Exhibit 2058; IPR2016-01198 and PR2016-01201; O'Brien et al., "Revealed: Federal Judges Guilty of Owning Stock in Corporations They Ruled on," *Occupy.com* (May 1, 2014) 11 pages.

Voip-Pal Exhibit 2059; IPR2016-01198 and IPR2016-01201; Letter dated Aug. 7, 2013 from Kathryn Siehndel, USPTO FOIA Officer Re: Freedom of Information Act (FOIA) Request No. F-13-00218 concerning U.S. Pat. No. 7,139,761; 77 pages.

Voip-Pal Exhibit 2060; IPR2016-01198 and IPR2016-01201; Questionnaire for Non-Judicial Nominees; Affidavit executed by Michelle K. Lee Oct. 28, 2014; 40 pages.

Voip-Pal Exhibit 2061; IPR2016-01198 and IPR2016-01201; Davis, R., "PTAB's 'Death Squad' Label Not Totally Off-Base, Chief Says," *Law360*, New York (Aug. 14, 2014) 4 pages.

Voip-Pal Exhibit 2062; IPR2016-01198 and IPR2016-01201; Graham et al., "The Brainy Bunch," *Intellectual Property: An ALM Supplement*, Fall 2015, 7 pages.

Voip-Pal Exhibit 2063; IPR2016-01198 and IPR2016-01201; Patent Trial and Appeal Board Statistics, USPTO, Jan. 31, 2017, 15 pages.

Voip-Pal Exhibit 2064; IPR2016-01198 and IPR2016-01201; Davis, R., "Fed. Circ. Reverses PTAB Nix of Synopsys Circuit Patent," *Law360*, New York, Apr. 24, 2017, 5 pages.

Voip-Pal Exhibit 2065; IPR2016-01198 and IPR2016-01201; Scheller et al. "Federal Circuit to PTAB: No Short Cuts Allowed," *The National Law Review*; Apr. 25, 2017, 5 pages.

Voip-Pal Exhibit 2066; IPR2016-01198 and IPR2016-01201; Couturier, K. "How Europe is Going After Apple, Google and Other U.S. Tech Giants," *New York Times* Apr. 13, 2015, 1 page.

Voip-Pal Exhibit 2067; IPR2016-01198 and IPR2016-01201; Manjoo, F., "Tech Giants Seem Invincible. That Worries Lawmakers." *New York Times*, Jan. 4, 2017, 5 pages.

Voip-Pal Exhibit 2068; IPR2016-01198 and IPR2016-01201; Quinn et al., "Michelle Lee's views on patent quality out of touch with reality facing patent applicants," *IPWatchdog*®, Feb. 2, 2017, 5 pages.

Voip-Pal Exhibit 2069; IPR2016-01198 and IPR2016-01201; Quinn, G., "Michelle Lee launches PTAB initiative to 'shape and improve' IPR proceedings," *IPWatchdog*®, Apr. 10, 2017, 3 pages.

Voip-Pal Exhibit 2070; IPR2016-01198 and IPR2016-01201; Kampis, J., "Google employees have enjoyed revolving door during Obama administration," *watchdog.org*, Aug. 8, 2016, 6 pages.

Voip-Pal Exhibit 2071; IPR2016-01198 and IPR2016-01201; Dayen, D., "The Android Administration," *The Intercept*_, Apr. 22, 2016, 16 pages.

Voip-Pal Exhibit 2072; IPR2016-01198 and IPR2016-01201; Editor Charlie, "@scland: How Google is Anti-employment Anti-property & Pro-regulation," *Artist Rights Watch, News for the Artist Rights Advocacy Community*, Nov. 18, 2016, 3 pages.

Voip-Pal Exhibit 2073; IPR2016-01198 and IPR2016-01201; Press Release: "Voip-Pal Issues a Correction to its Press Release of Sep. 18, 2017," *Voip-Pal.com Inc.*, Jan. 11, 2018, 1 page.

Voip-Pal Exhibit 2074; IPR2016-01198 and IPR2016-01201; "Former head of Google patent strategy appointed to run U.S. patent agency," *al (/Profile/12836/AppleInsider)*, Dec. 12, 2013, 8 pages.

Voip-Pal Exhibit 2075; IPR2016-01198 and IPR2016-01201; Vermont, S. "IPR Statistics Revisited: Yep, It's a Patent Killing Field," *PatentAttorney.com*, Feb. 8, 2017, 9 pages.

Voip-Pal Exhibit 2076; IPR2016-01198 and IPR2016-01201; Sterne et al., "PTAB Death Squads: Are All Commercially Viable Patents Invalid?" *IPWatchdog*®, Mar. 24, 2014, 5 pages.

Voip-Pal Exhibit 2077; IPR2016-01198 and IPR2016-01201; Sheafe, B., "Dear Congress: A Small Request on Behalf of the Innovators You (Theoretically) Represent: Part 2," *IPWire*, Jan. 12, 2018, 5 pages.

Voip-Pal Exhibit 2078; IPR2016-01198 and IPR2016-01201; Brachmann, S., "Are conflicts of interest at the PTAB leading to preferential decisions for Apple?" *IPWatchdog*®, Apr. 28, 2017, 5 pages.

Voip-Pal Exhibit 2079; IPR2016-01198 and IPR2016-01201; Quinn et al., "Patent owners do not like IPRs despite what Bloomberg Law, *AIPLA study says*," *IPWatchdog*®, Feb. 6, 2017, 5 pages.

Voip-Pal Exhibit 2080; IPR2016-01198 and IPR2016-01201; "Does Google's Michelle Lee Work for Both Google and the U.S. Patent Office at the Same Time?" *The Corruption Times, Your Public New WIKI for Social Updates*, Apr. 6, 2016, 8 pages.

Voip-Pal Exhibit 2081; IPR2016-01198 and IPR2016-01201; Morinville, P., "The Senate Must Vet Vishal Amin," *IPWatchdog*®, Apr. 23, 2017, 4 pages.

Voip-Pal Exhibit 2082; IPR2016-01198 and IPR2016-01201; The New York Times "May 15, 1911, Supreme Court Orders Standard Oil to Be Broken Up," *By the Learning Network*, May 15, 2012, 3 pages.

Voip-Pal Exhibit 2083; IPR2016-01198 and IPR2016-01201; Simpson et al., "PTAB Kill Rates: How IPRs are Affecting Patents," *Law360*, New York, Sep. 15, 2015, 6 pages.

Voip-Pal Exhibit 2084; IPR2016-01198 and IPR2016-01201; Vermont, S., "IPR Statistics Revisited: Yep, It's a Patent Killing Field," *PatentAttorney.com*, Feb. 8, 2017, 9 pages.

Voip-Pal Exhibit 2085; IPR2016-01198 and IPR2016-01201; Robinson, E., "Why the Unified Patents Model Would Not Work in China," *IPWatchdog*®, Apr. 26, 2017, 4 pages.

Voip-Pal Exhibit 2086; IPR2016-01198 and IPR2016-01201; Brachmann et al., "US Inventor sets patents on fire as part of PTAB protest at USPTO," *IPWatchdog*®, Aug. 11, 2017, 4 pages.

Voip-Pal Exhibit 2087; IPR2016-01198 and IPR2016-01201; "Selection process for assigning judges to expanded PTAB panels," 717 Madison Place, Aug. 28, 2017, 3 pages.

Voip-Pal Exhibit 2088; IPR2016-01198 and IPR2016-01201; Eden, S., "How the U.S. Patent Office Got So Screwed Up," *Popular Mechanics*, Jun. 21, 2016, 21 pages.

Voip-Pal Exhibit 2089; IPR2016-01198 and IPR2016-01201; Quinn, G., "Supreme Court to decide if Inter Patios Review is Unconstitutional," *IPWatchdog*®, Jun. 12, 2017, 4 pages.

Voip-Pal Exhibit 2090; IPR2016-01198 and IPR2016-01201; Quinn, G., "Industry reaction to Scotus patent venue decision in *TC Heartland v. Kraft Food Group*," *IPWatchdog*®, May 22, 2017, 7 pages.

Voip-Pal Exhibit 2091; IPR2016-01198 and IPR2016-01201; Flibbert et al., "5 Distinctions Between IPRs and District Court Patent Litigation," *Finnegan*, Dec. 16, 2015, 6 pages.

Voip-Pal Exhibit 2092; IPR2016-01198 and IPR2016-01201; "2404. Hobbs Act—Under Color of Official Right," *USAM*, Department of Justice, downloaded on Jan. 12, 2018, 5 pages.

Voip-Pal Exhibit 2093; IPR2016-01198 and IPR2016-01201; "Selection process for assigning judges to expanded PTAB panels," 717 Madison Place, Aug. 28, 2017, 3 pages.

Voip-Pal Exhibit 2094; IPR2016-01198 and IPR2016-01201; "2015 Summary of Ethics Rules," *Economic Development Administration*, U.S. Department of Commerce, 16 pages.

Voip-Pal Exhibit 2095; IPR2016-01198 and IPR2016-01201; "Patent Trial and Appeal Board Statistics," United States Patent and Trademark Office, *USPTO*, Mar. 31, 2017, 15 pages.

Voip-Pal Exhibit 2096; IPR2016-01198 and IPR2016-01201; Madigan et al., "Turning Gold to Lead: How Patent Eligibility Doctrine is Undermining U.S. Leadership in Innovation," *George Mason Law & Economics Research Paper No. 17-16*, Mar. 30, 2017, 21 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2; ORDER, Conduct of Proceeding, 37 C.F.R. § 42.5, for both proceedings; Paper No. 62, Entered: Jan. 19, 2018, 4 pages.

US 9,948,549 B2

Page 18

(56)

References Cited

OTHER PUBLICATIONS

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; IPR2016-01198, U.S. Pat. No. 9,179,005; Notice of Appeal, Dated: Jan. 22, 2018, 5 pages.

Apple Exhibit 1022, IPR2016-01198, Telephonic Hearing Before the Administrative Patent Judges; Jan. 19, 2018; 14 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; IPR2016-01201, U.S. Pat. No. 8,542,815; Notice of Appeal, Dated: Jan. 22, 2018, 5 pages.

Apple Exhibit 1022, IPR2016-01201, Telephonic Hearing Before the Administrative Patent Judges; Jan. 19, 2018; 14 pages.

Case: 18/1456; Document: 1-1; Filed: Jan. 23, 2018, 1 page: United States Court of Appeals for the Federal Circuit; *Notice of Docketing*; 18-1456—*Apple Inc. v. Voip-Pal.com, Inc.*; Date of Docketing: Jan. 23, 2018, IPR2016-01198; 1 page.

Case: 18-1456; Document: 1-2; Filed: Jan. 23, 2018, 34 pages: United States Court of Appeals for the Federal Circuit; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; IPR2016-01198, U.S. Pat. No. 9,179,005; Notice of Appeal, (Dated: Jan. 22, 2018, 5 pages); with Paper 53; Entered: Nov. 20, 2017; Final Written Decision; 35 U.S.C. § 318(a) and 37 C.F.R. § 42.73; (29 pages).

Case: 18-1456; Document 6; Filed: Jan. 25, 2018; 14 pages: In the United States Court of Appeals for the Federal Circuit, *Apple Inc.*, Petitioner—Appellant, v. *VoIP-Pal.com, Inc.*, Patent Owner—Appellee. On Appeal from the United States Patent and Trademark Office, Patent Trial and Appeal Board, in Case No. IPR2016-01198; Motion of Appellant Apple Inc. to Stay Appeal or for a Limited Remand to Allow Conclusion of Administrative Proceedings.

Case: 18-1457; Document: 1-1; Filed: Jan. 23, 2018, 1 page: United States Court of Appeals for the Federal Circuit; *Notice of Docketing*; 18-1457—*Apple Inc. v. Voip-Pal.com, Inc.*; Date of Docketing: Jan. 23, 2018, IPR2016-01201; 1 page.

Case: 18-1457; Document: 1-2; Filed: Jan. 23, 2018, 34 pages: United States Court of Appeals for the Federal Circuit; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; IPR2016-01201, U.S. Pat. No. 8,542,815; Notice of Appeal, (Dated: Jan. 22, 2018, 5 pages); with Paper 54; Entered: Nov. 20, 2017; Final Written Decision; 35 U.S.C. § 318(a) and 37 C.F.R. § 42.73; (29 pages).

Case: 18-1457; Document 6; Filed: Jan. 25, 2018; 14 pages: in the United States Court of Appeals for the Federal Circuit, *Apple Inc.*, Petitioner—Appellant, v. *VoIP-Pal.com, Inc.*, Patent Owner—Appellee. On Appeal from the United States Patent and Trademark Office, Patent Trial and Appeal Board, in Case No. IPR2016-01201; Motion of Appellant Apple Inc. to Stay Appeal or for a Limited Remand to Allow Conclusion of Administrative Proceedings.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Reply in Support of Its Motion for Entry of Judgment in Favor of Petitioner as a Sanction for Improper *Ex Parte* Communications by Patent Owner, or, Alternatively, for New and Constitutionally Correct Proceedings, Date: Jan. 26, 2018, 11 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Updated Exhibit List, Date: Jan. 26, 2018, 4 pages.

Apple Exhibit 1023, IPR2016-01198, Voip-Pal Issues a Correction to its Press Release of Sep. 18, 2017; Jan. 12, 2018, 1 page.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Reply in Support of Its Motion for Entry of Judgment in Favor of Petitioner as a Sanction for Improper *Ex Parte* Communications by Patent Owner, or, Alternatively, for New and Constitutionally Correct Proceedings, Date: Jan. 26, 2018, 11 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Updated Exhibit List, Date: Jan. 26, 2018, 4 pages.

Apple Exhibit 1023, IPR2016-01201, Voip-Pal Issues a Correction to Its Press Release of Sep. 18, 2017; Jan. 12, 2018, 1 page.

Case: 18-1456; Document 7; Filed: Jan. 29, 2018; 2 pages: United States Court of Appeals for the Federal Circuit, Order; consolidating the appeals.

Case: 18-1457; Document 7; Filed: Jan. 29, 2018; 2 pages: United States Court of Appeals for the Federal Circuit, Order; consolidating the appeals.

* cited by examiner

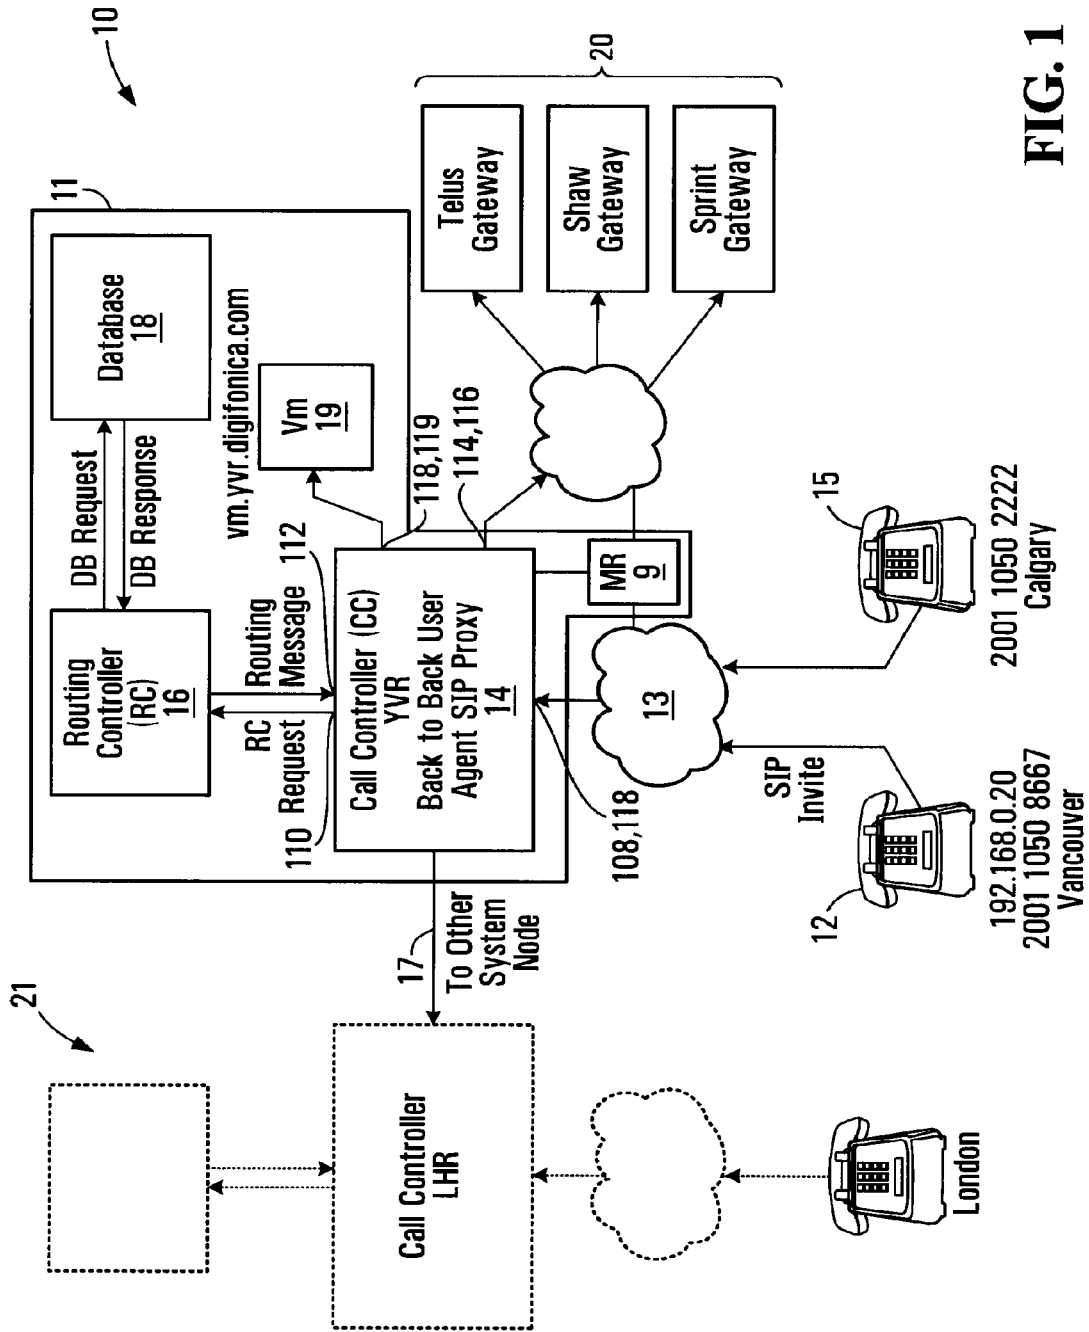


FIG. 1

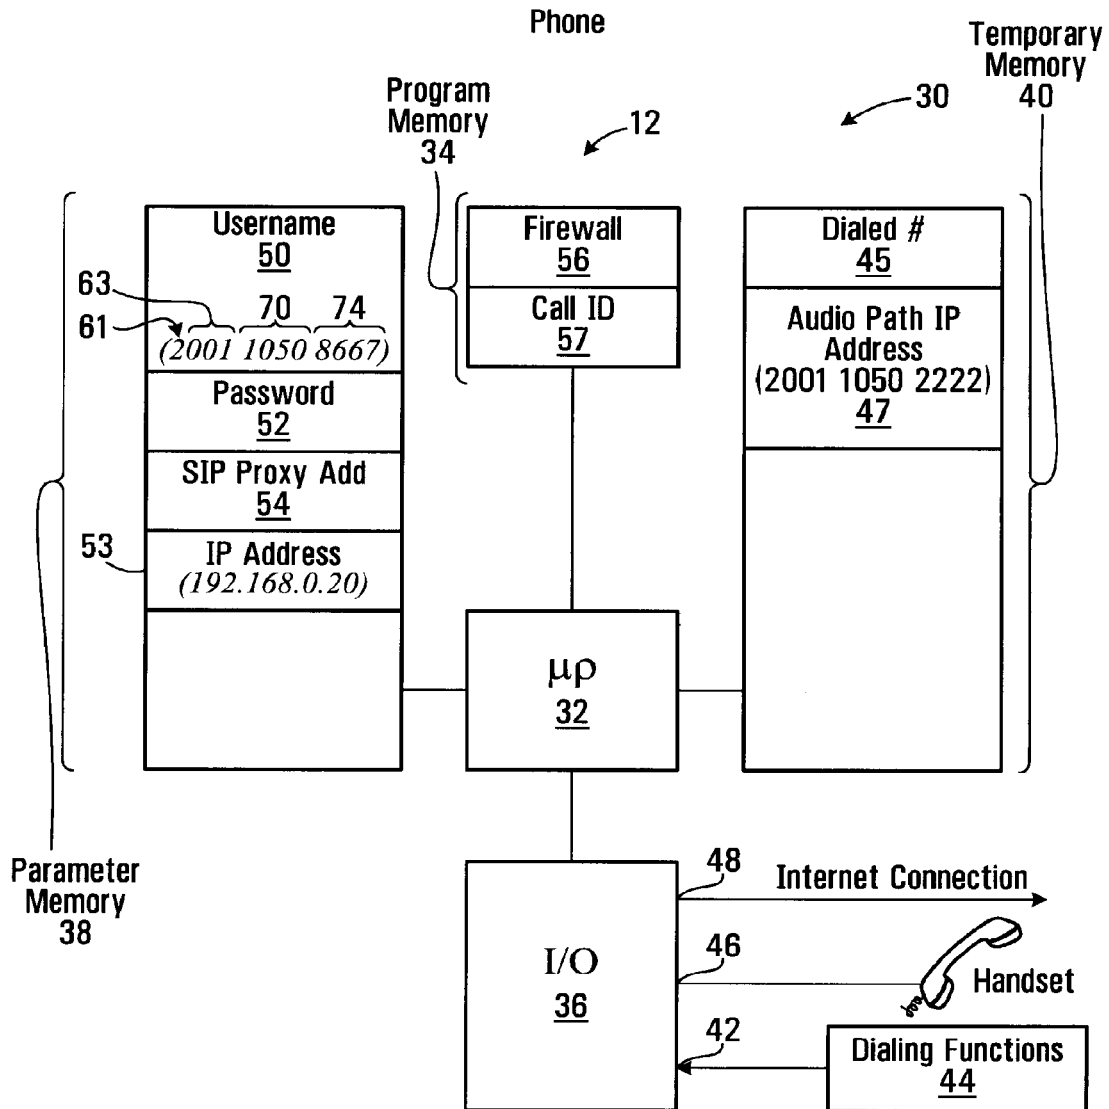


FIG. 2

SIP Invite Message

60 ~ Caller 2001 1050 8667
 62 ~ Callee 2001 1050 2222
 64 ~ Digest Parameters XXXXXXX
 65 ~ Call ID FF10@ 192.168.0.20
 67 ~ IP Address 192.168.0.20
 69 ~ Caller UDP Port 1

FIG. 3

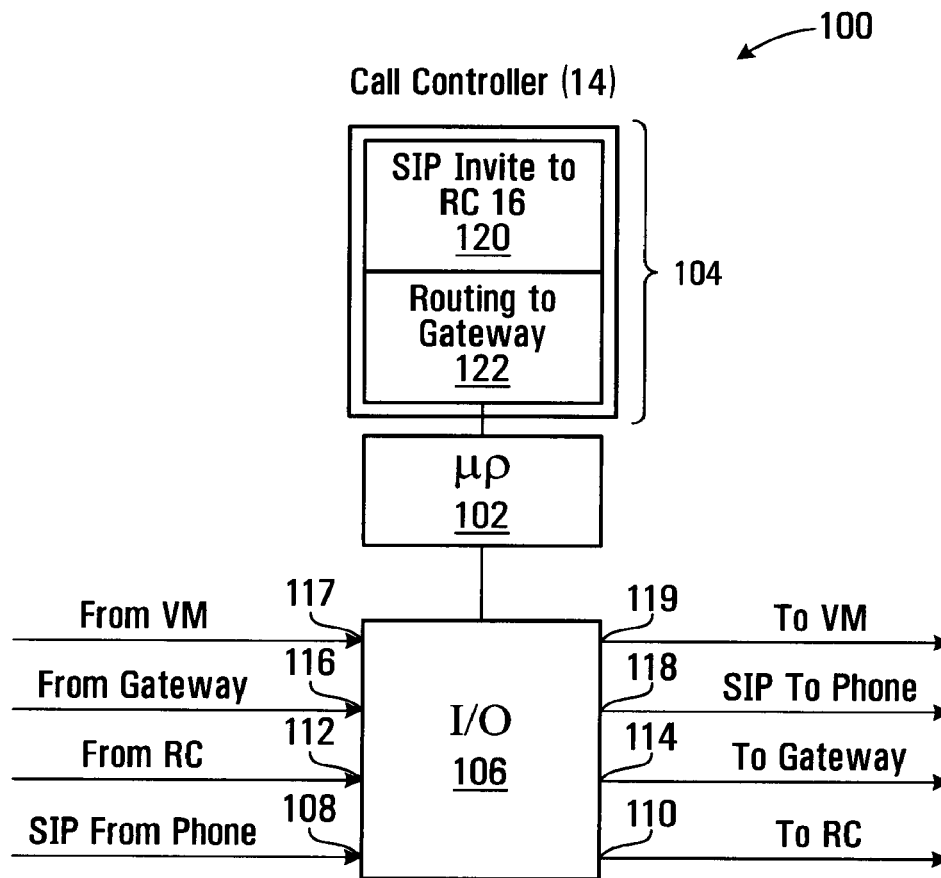


FIG. 4

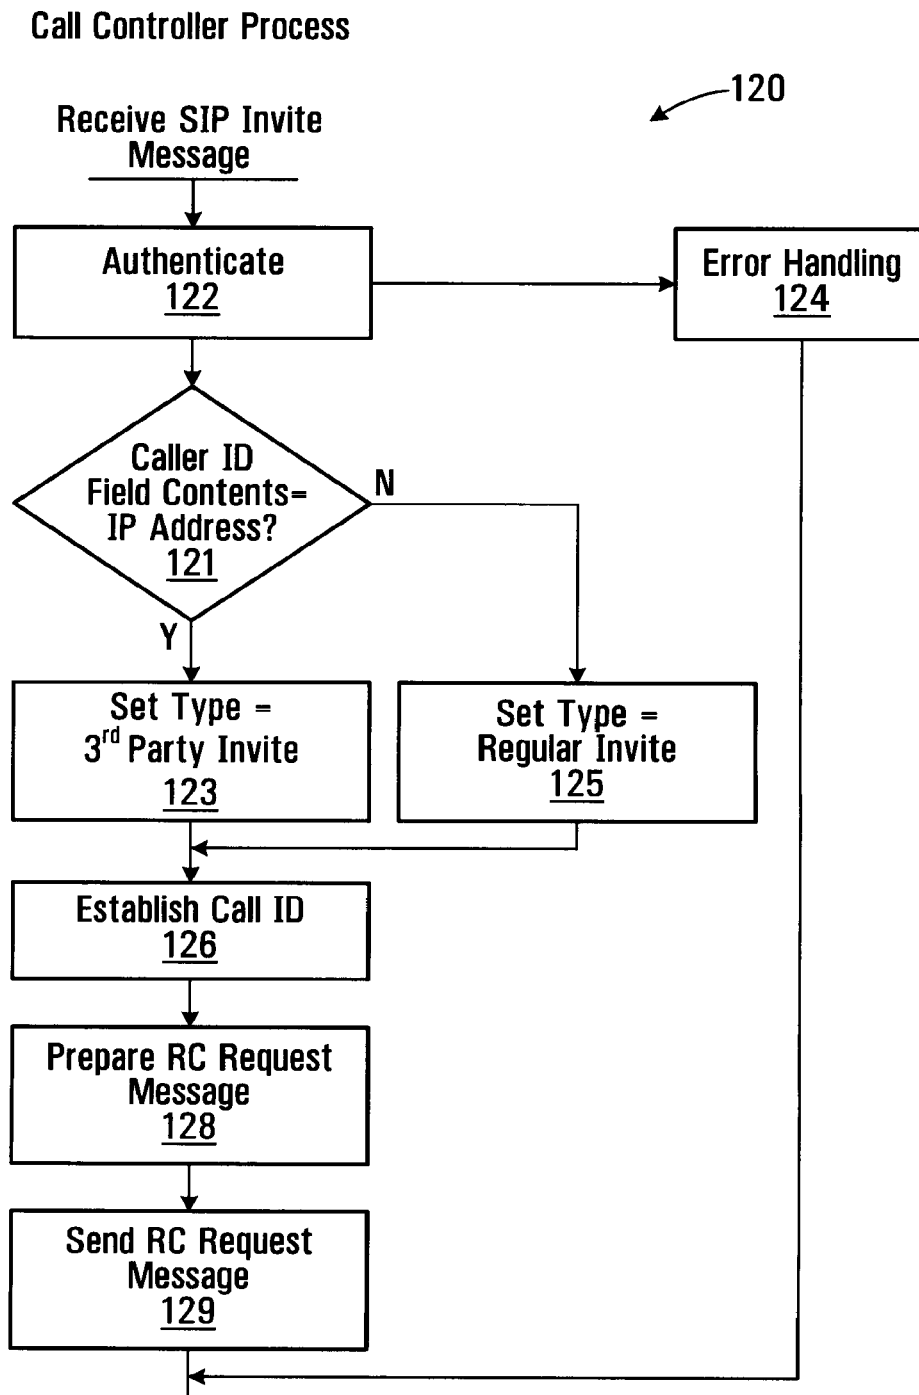


FIG. 5

150

RC Request Message

152 ~ Caller 2001 1050 8667
 154 ~ Callee 2001 1050 2222
 156 ~ Digest XXXXXXXX
 158 ~ Call ID FF10@ 192.168.0.20
 160 ~ Type Subscriber

FIG. 6

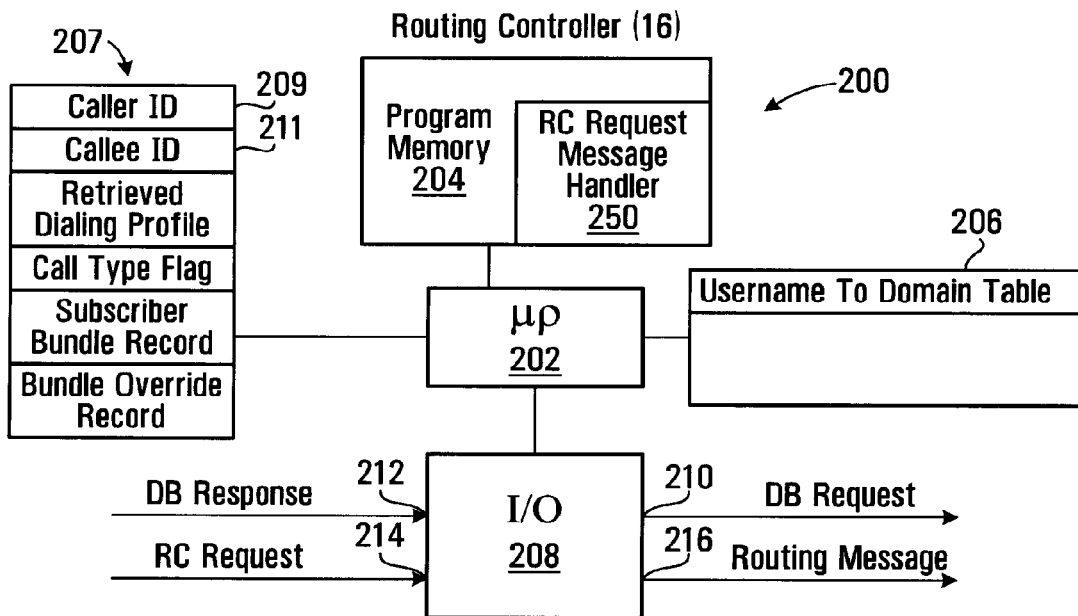


FIG. 7

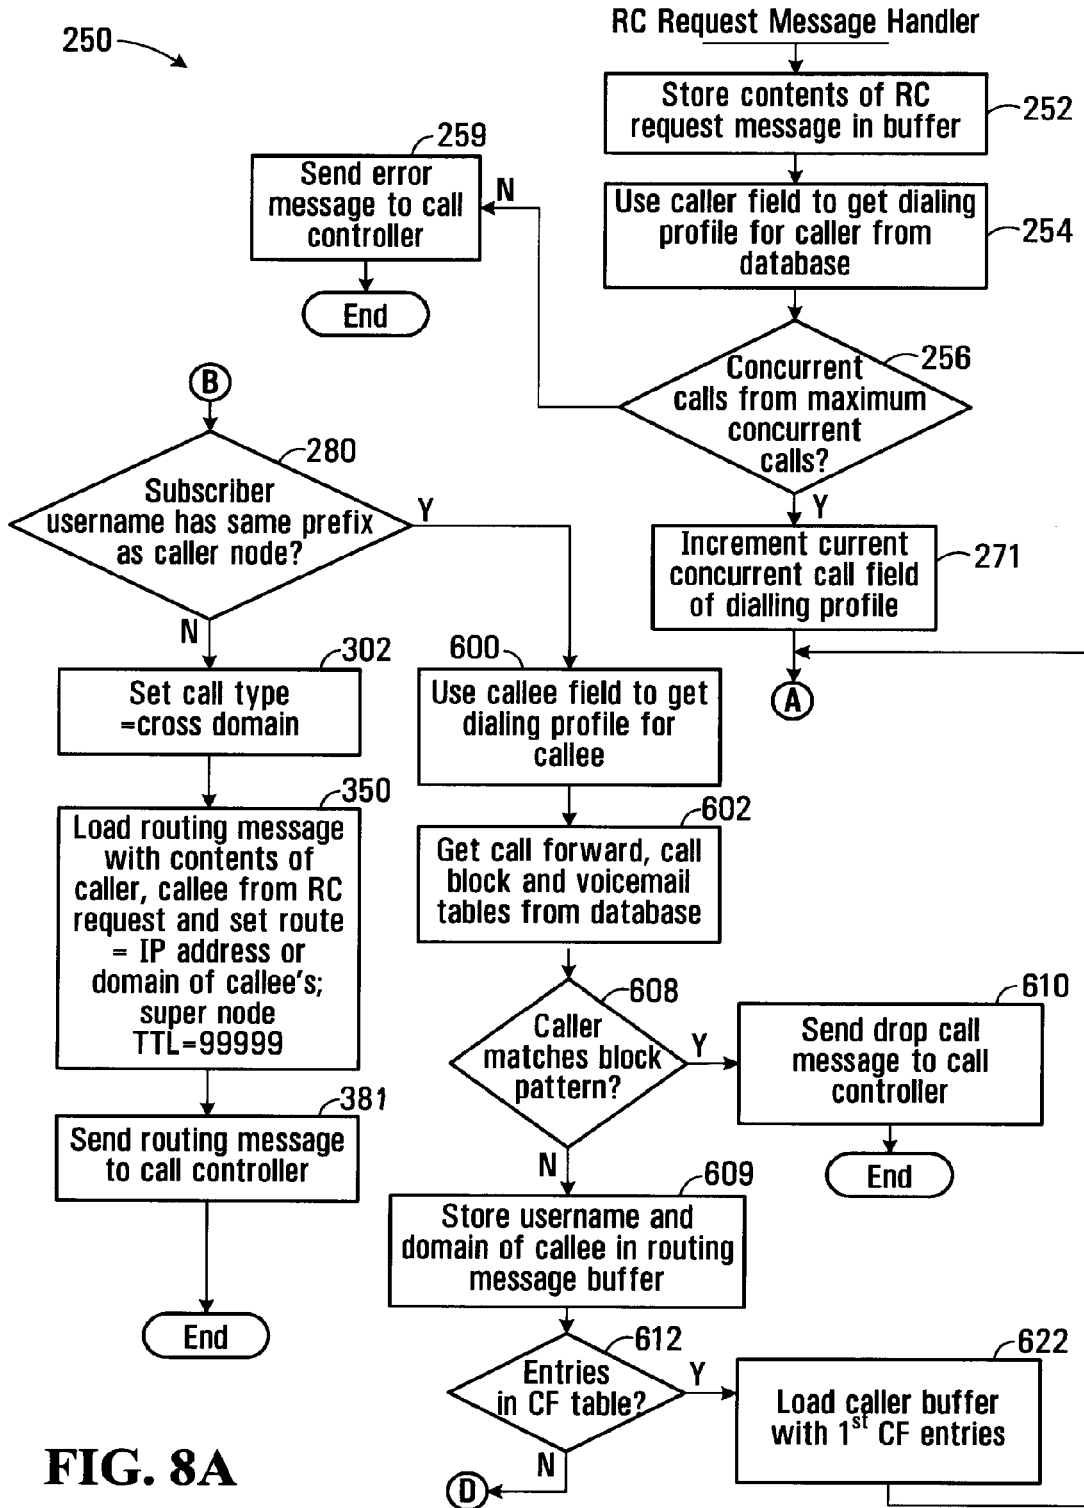


FIG. 8A

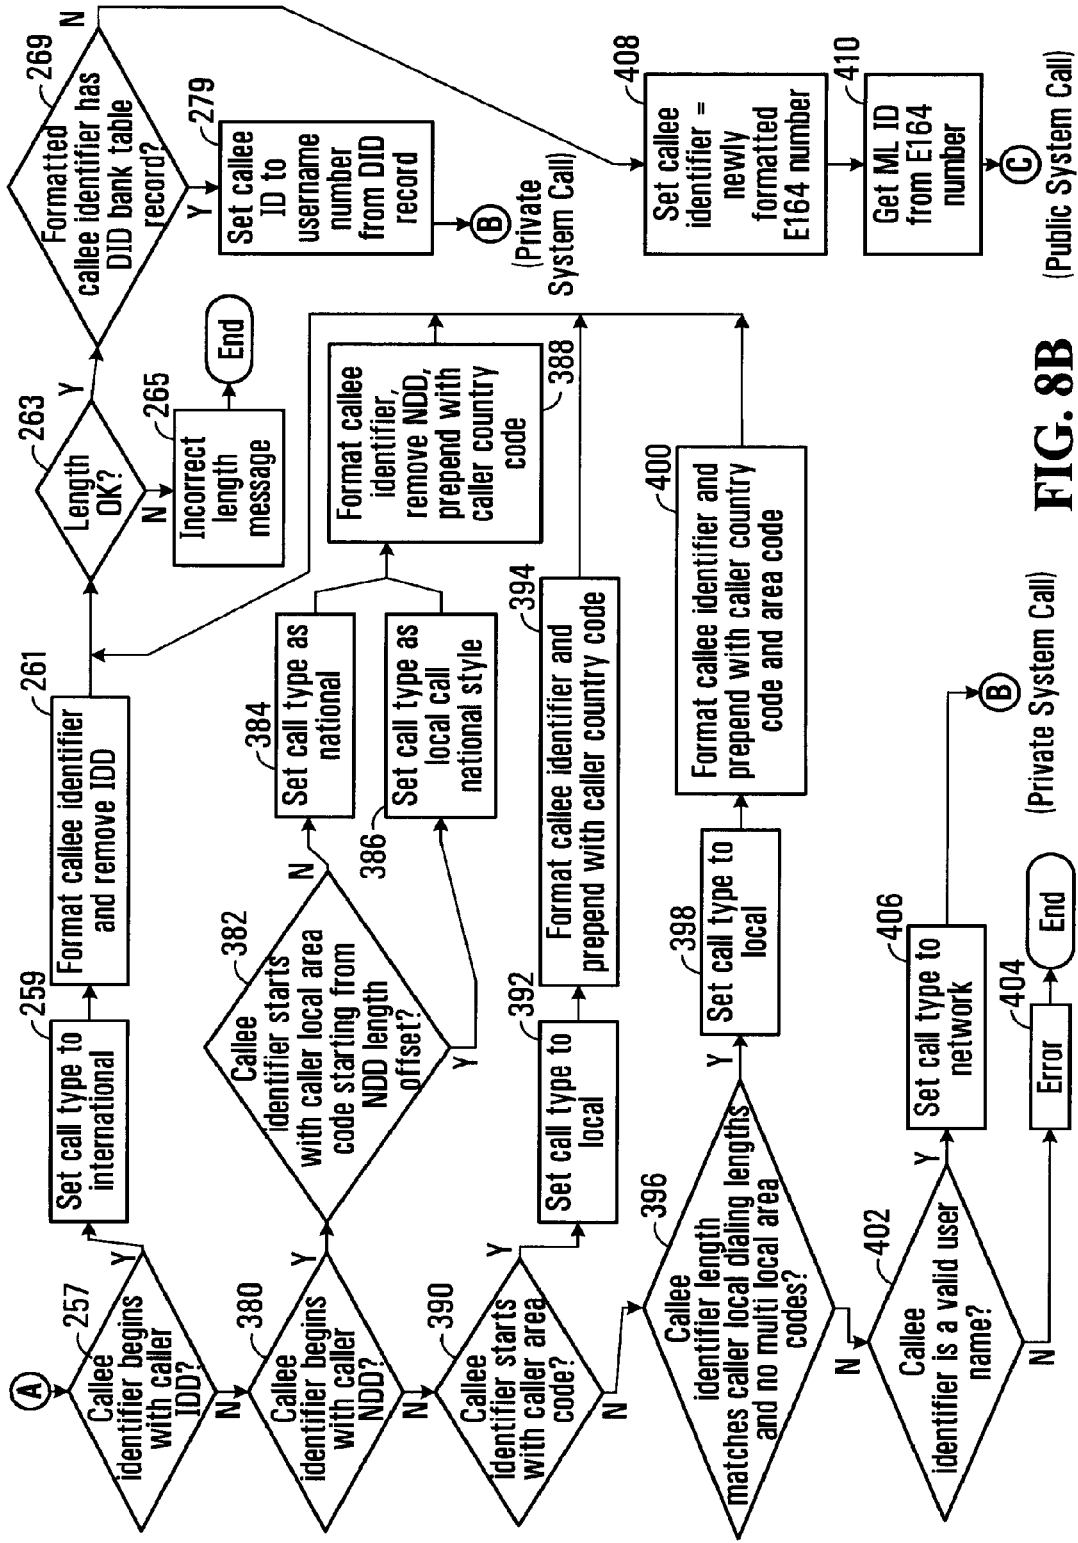


FIG. 8B

(Private System Call)

(Public System Call)

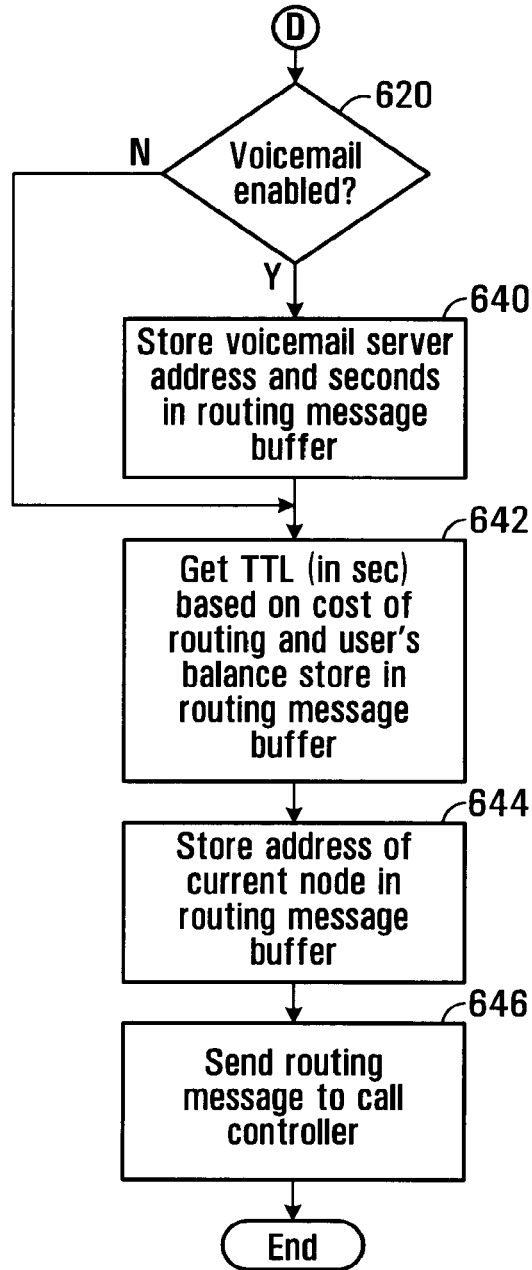


FIG. 8C

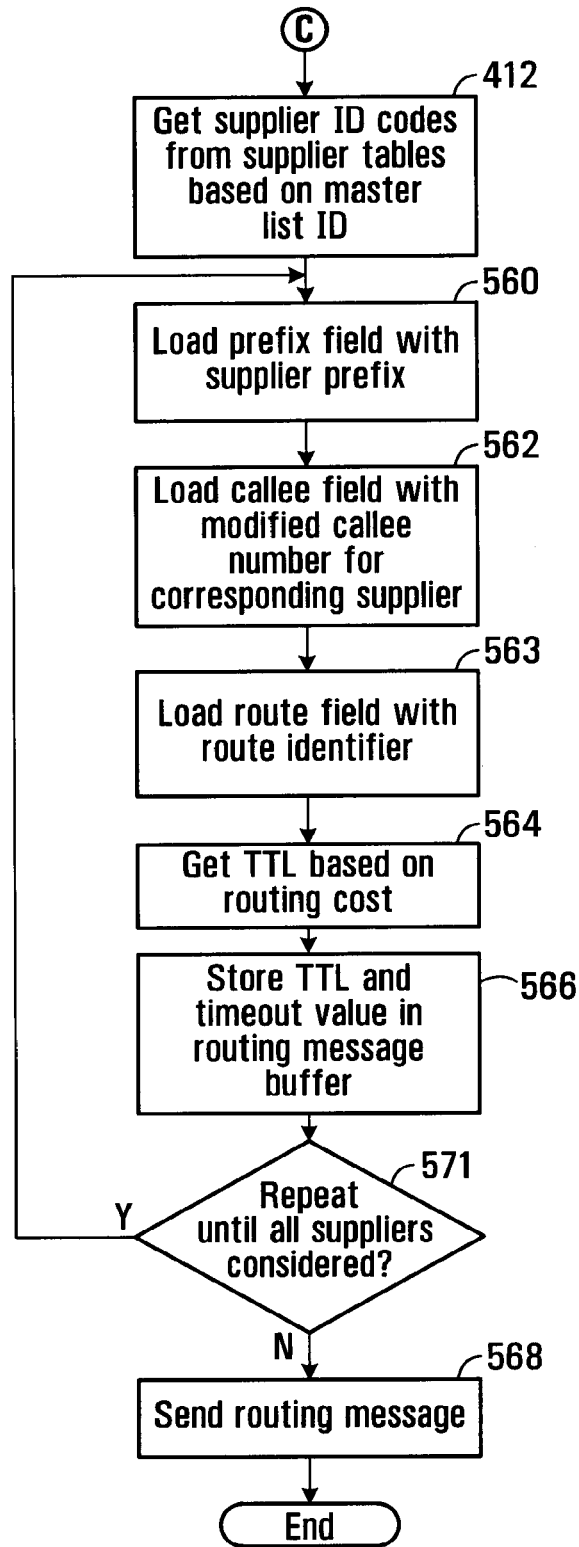


FIG. 8D

↖ 253

Dialing Profile for a User

258 ~ Username	Assigned on Subscription
260 ~ Domain	Domain Associated with User
262 ~ NDD	1
264 ~ IDD	011
266 ~ Country Code	1
267 ~ Local Area Codes	604;778
268 ~ Caller Minimum Local Length	10
270 ~ Caller Maximum Local Length	10
273 ~ Reseller	Retailer
275 ~ Maximum # of concurrent calls	Assigned on Subscription
277 ~ Current # of concurrent calls	Assigned on Subscription

FIG. 9

Dialing Profile for Caller (Vancouver Subscriber)

258 ~ Username	2001 1050 8667	↖ 276
260 ~ Domain	sp.yvr.digifonica.com	← 282
262 ~ NDD	1	
264 ~ IDD	011 286 288 290	
266 ~ Country Code	1	
267 ~ Local Area Codes	604;778 (Vancouver)	
268 ~ Caller Minimum Local Length	10	
270 ~ Caller Maximum Local Length	10	
273 ~ Reseller	Klondike	
275 ~ Maximum # of concurrent calls	5	
277 ~ Current # of concurrent calls	0	

Annotations: 284 points to '2001', 61 points to '1050', 63 points to '8667', 70 points to 'sp', 74 points to 'yvr', 282 points to the domain 'sp.yvr.digifonica.com'.

FIG. 10

Callee Profile for Calgary Subscriber

Username	2001 1050 2222
Domain	sp.yvr.digifonica.com
NDD	1
IDD	011
Country Code	1
Local Area Codes	403 (Calgary)
Caller Minimum Local Length	7
Caller Maximum Local Length	10
Reseller	Deerfoot
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 11**Callee Profile for London Subscriber**

Username	4401 1062 4444
Domain	sp.lhr.digifonica.com
NDD	0
IDD	00
Country Code	44
Local Area Codes	20 (London)
Caller Minimum Local Length	10
Caller Maximum Local Length	11
Reseller	Marble Arch
Maximum # of concurrent calls	5
Current # of concurrent calls	0

FIG. 12

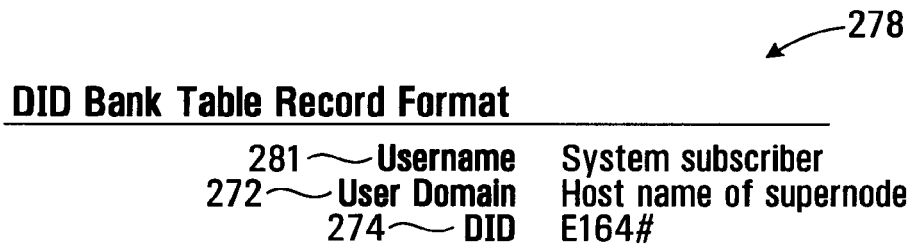


FIG. 13

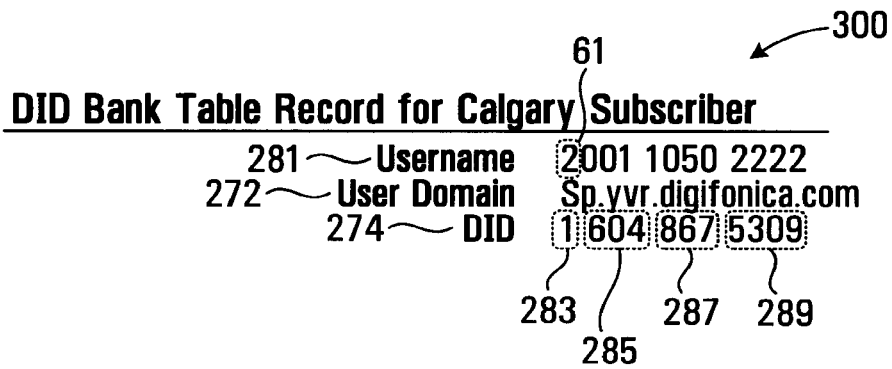


FIG. 14

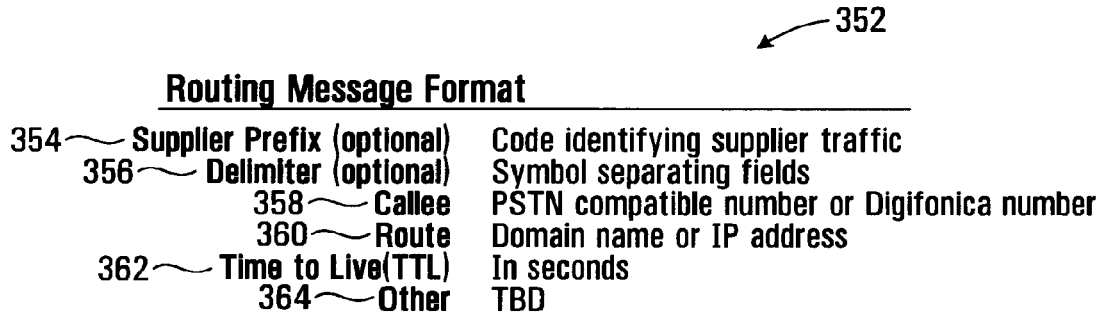


FIG. 15



FIG. 16

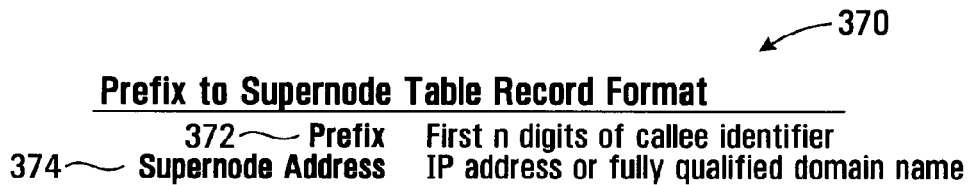


FIG. 17



FIG. 18

Master List Record Format

500	~ ml_id	Alphanumeric
502	~ Dialing code	Number Sequence
504	~ Country code	The country code is the national prefix to be used when dialing TO a particular country FROM another country.
506	~ Nat Sign #(Area Code)	Number Sequence
508	~ Min Length	Numeric
510	~ Max Length	Numeric
512	~ NDD	The NDD prefix is the access code used to make a call WITHIN that country from one city to another (when calling another city in the same vicinity, this may not be necessary).
514	~ IDD	The IDD prefix is the international prefix needed to dial a call FROM the country listed TO another country.
516	~ Buffer rate	Safe change rate above the highest rate charged by suppliers

FIG. 19

Example: Master List Record with Populated Fields

ml_id	1019
Dialing code	1604
Country code	1
Nat Sign #(Area Code)	604
Min Length	7
Max Length	7
NDD	1
IDD	011
Buffer rate	\$0.009/min

FIG. 20

Suppliers List Record Format

540 ~	Sup_id	Name code
542 ~	MI_id	Numeric code
544 ~	Prefix (optional)	String identifying supplier's traffic #
546 ~	Specific Route	IP address
548 ~	NDD/IDD rewrite	
550 ~	Rate	Cost per second to Digifonica to use this route
551 ~	Timeout	Maximum time to wait for a response when requesting this gateway

FIG. 21**Telus Supplier Record**

Sup_id	2010 (Telus)
MI_id	1019
Prefix (optional)	4973#
Specific Route	72.64.39.58
NDD/IDD rewrite	011
Rate	\$0.02/min
Timeout	20

FIG. 22**Shaw Supplier Record**

Sup_id	2011 (Shaw)
MI_id	1019
Prefix (optional)	4974#
Specific Route	73.65.40.59
NDD/IDD rewrite	011
Rate	\$0.025/min
Timeout	30

FIG. 23**Sprint Supplier Record**

Sup_id	2012 (Sprint)
MI_id	1019
Prefix (optional)	4975#
Specific Route	74.66.41.60
NDD/IDD rewrite	011
Rate	\$0.03/min
Timeout	40

FIG. 24

Routing Message Buffer for Gateway Call

4973#0116048675309@72.64.39.58;ttl=3600;to=20 ~ 570
 4974#0116048675309@73.65.40.59;ttl=3600;to=30 ~ 572
 4975#0116048675309@74.66.41.60;ttl=3600;to=40 ~ 574

FIG. 25

Call Block Table Record Format

604 ~ Username Digifonica #
 606 ~ Block Pattern PSTN compatible or Digifonica #

FIG. 26

Call Block Table Record for Calgary Callee

604 ~ Username of Callee 2001 1050 2222
 606 ~ Block Pattern 2001 1050 8664

FIG. 27

Call Forwarding Table Record Format for Callee

614 ~ Username of Callee Digifonica #
 616 ~ Destination Number Digifonica #
 618 ~ Sequence Number Integer indicating order to try this

FIG. 28

Call Forwarding Table Record for Calgary Callee

614 ~ Username of Callee 2001 1050 2222
 616 ~ Destination Number 2001 1055 2223
 618 ~ Sequence Number 1

FIG. 29

Voicemail Table Record Format

624	Username of Callee	Digifonica #
626	Vm Server	domain name
628	Seconds to Voicemail	time to wait before engaging voicemail
630	Enabled	yes/no

FIG. 30

Voicemail Table Record for Calgary Callee

Username of Callee	2001 1050 2222
Vm Server	vm.yvr.digifonica.com
Seconds to Voicemail	20
Enabled	1

FIG. 31

Routing Message Buffer - Same Node

650	200110502222@sp.yvr.digifonica.com;ttl=3600
652	200110552223@sp.yvr.digifonica.com;ttl=3600
654	vm.yvr.digifonica.com;20;ttl=60
656	sp.yvr.digifonica.com

FIG. 32

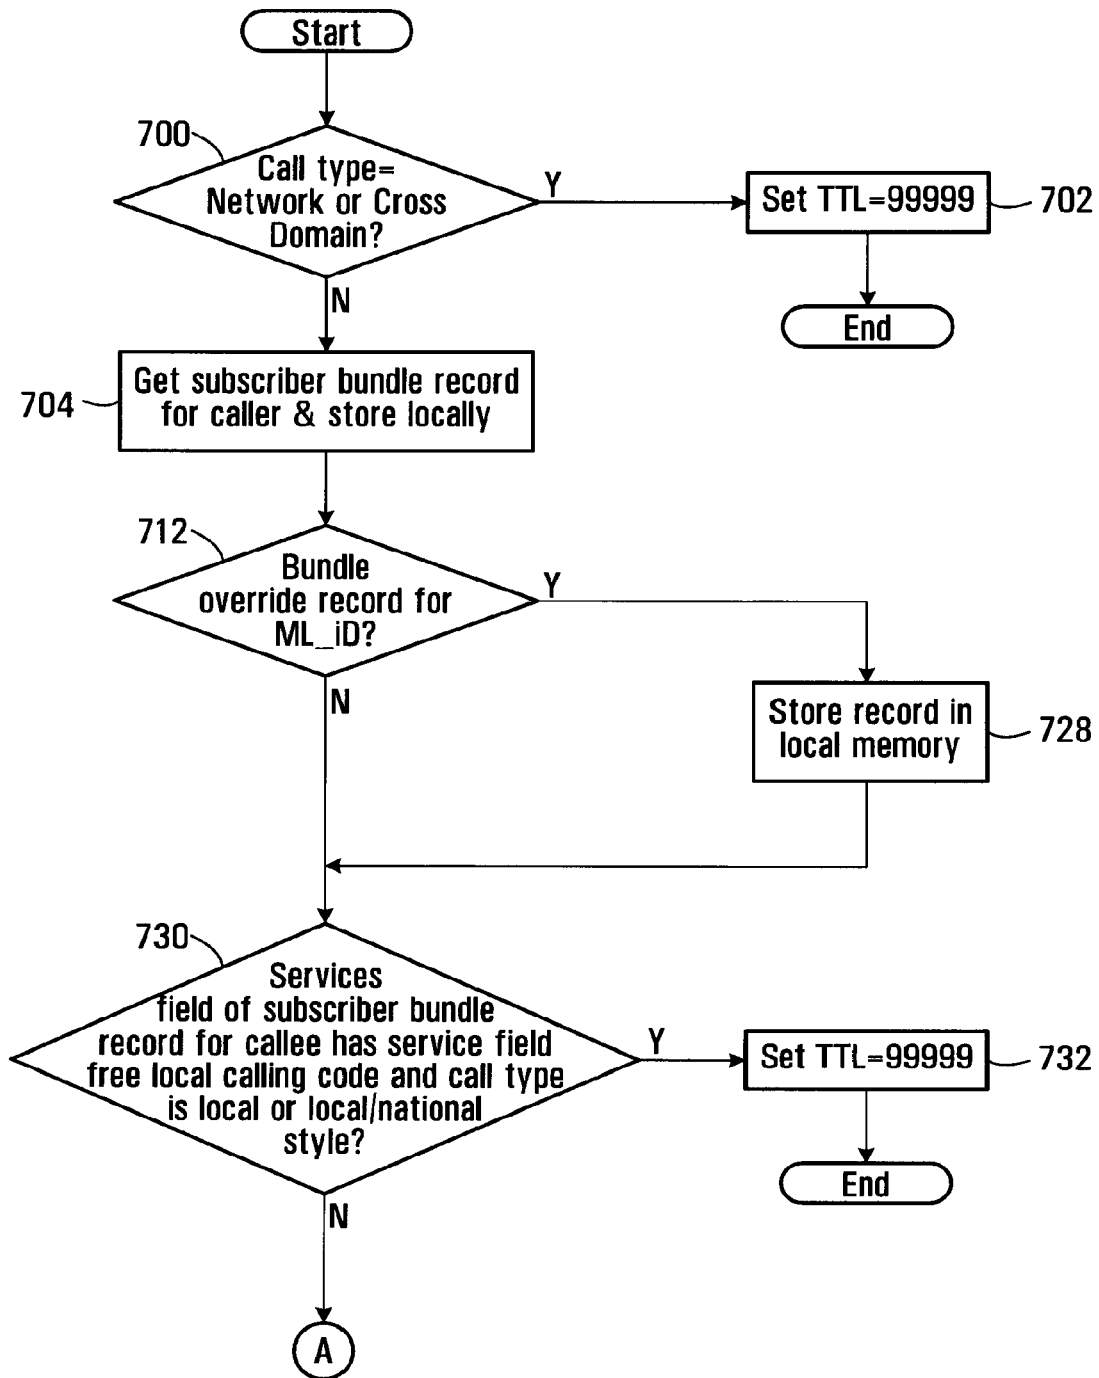


FIG. 33A

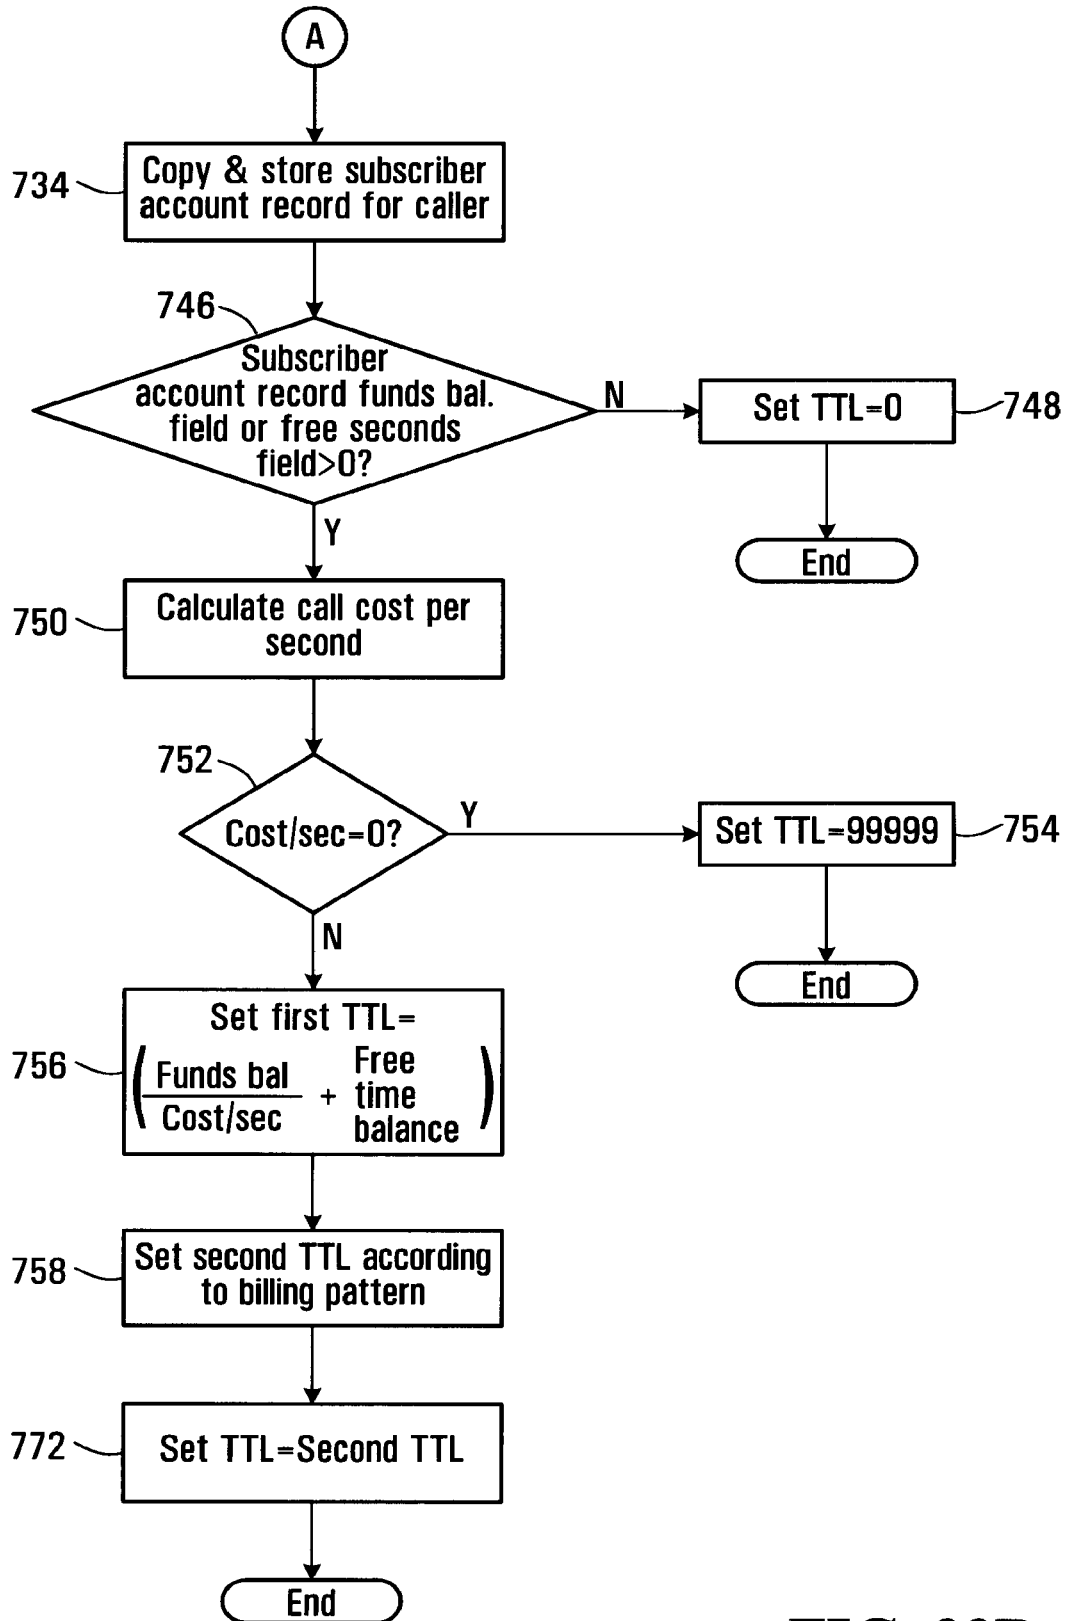


FIG. 33B

Subscriber Bundle Table Record

708 ~ 710 ~	Username Services	Subscriber username Codes identifying service features (e.g. Free local calling; call blocking, voicemail)
----------------	----------------------	--

706

FIG. 34

Subscriber Bundle Record for Vancouver Caller

708 ~ 710 ~	Username Services	2001 1050 8667 10; 14; 16
----------------	----------------------	------------------------------

FIG. 35

Bundle Override Table Record

716 ~ 718 ~ 720 ~ 722 ~ 724 ~	ML_Id Override type Override value Inc1 Inc2	Master list ID code Fixed; percent; cents real number representing value of override type first level of charging (minimum # of seconds) charge second level of charging
---	--	--

714

FIG. 36

Bundle Override Record for Located ML_id

716 ~ 718 ~ 720 ~ 722 ~ 724 ~	ML_Id Override type Override value Inc1 Inc2	1019 percent 10.0 30 seconds 6 seconds
---	--	--

726

FIG. 37

		736
<u>Subscriber Account Table Record</u>		↙
738 ~	Username	Subscriber username
740 ~	Funds balance	real number representing \$ value of credit
742 ~	Free time balance	integer representing # of free seconds

FIG. 38

		744
<u>Subscriber Account Record for Vancouver Caller</u>		↙
738 ~	Username	2001 1050 8667
740 ~	Funds balance	\$10.00
742 ~	Free time balance	100

FIG. 39

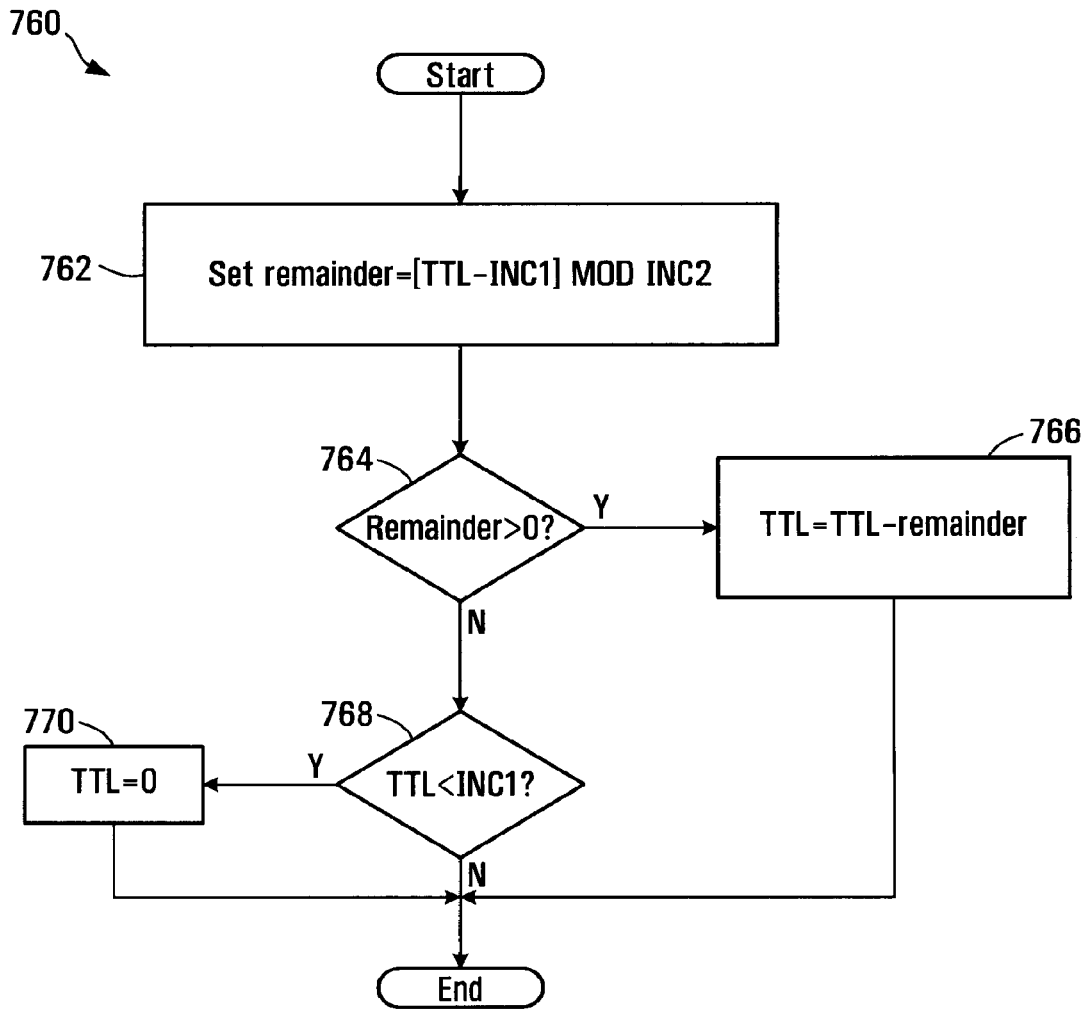


FIG. 40

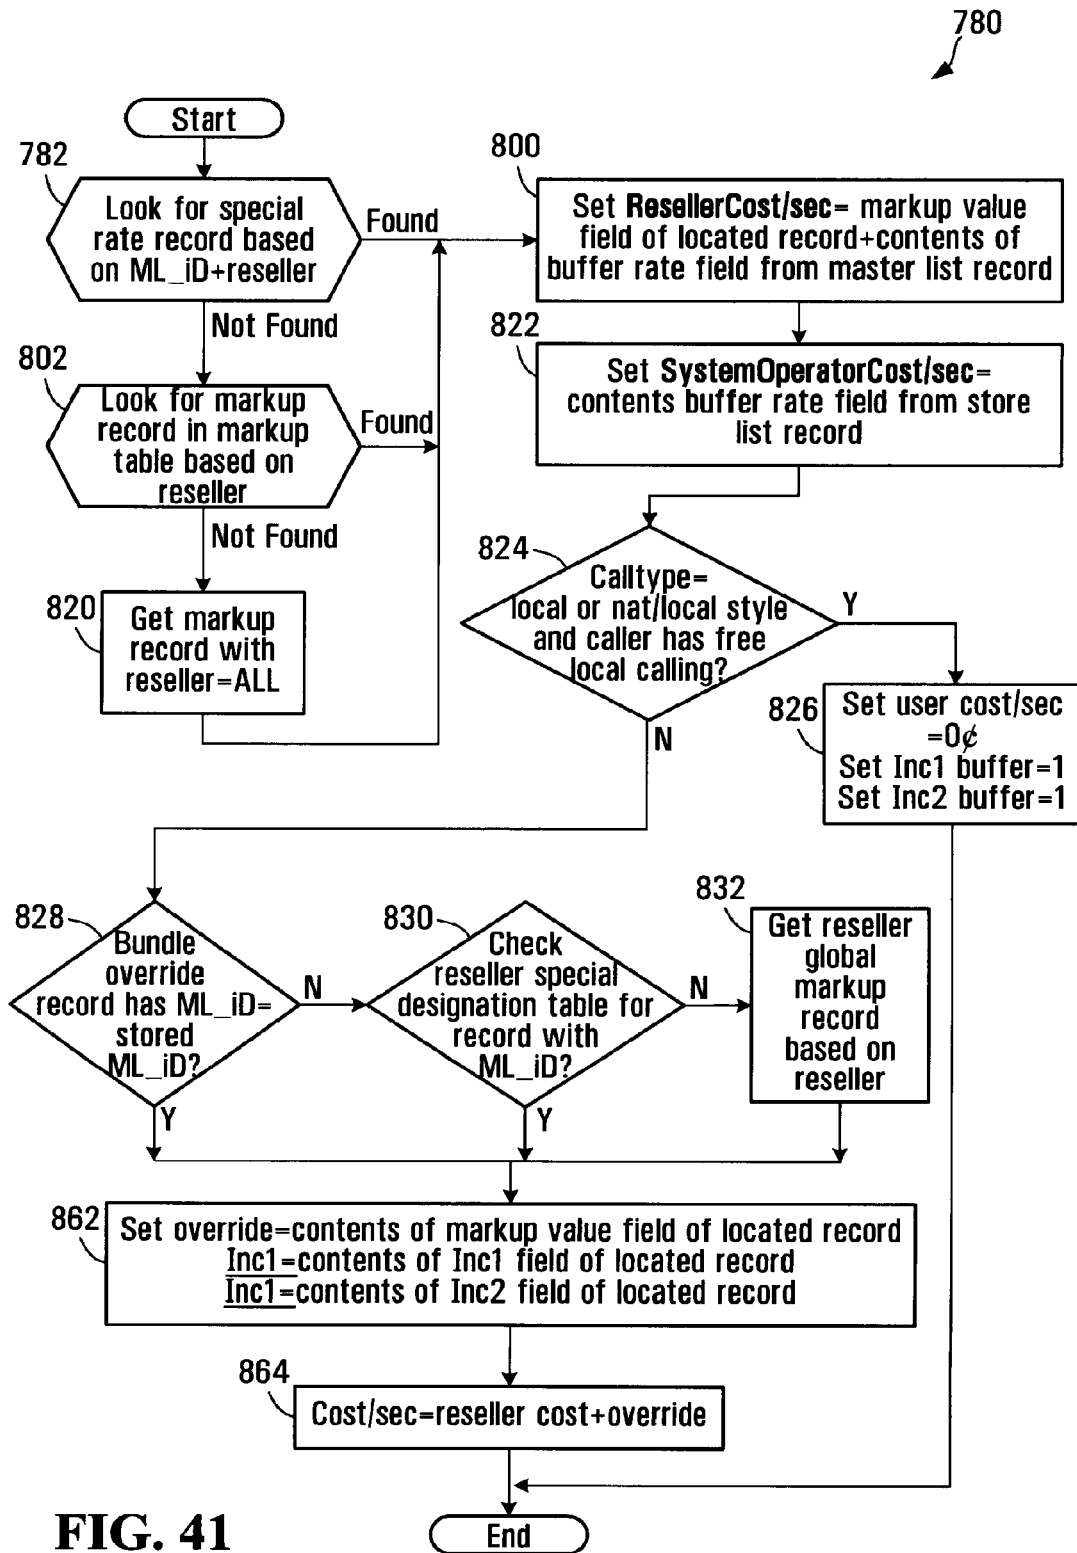


FIG. 41

784

System Operator Special Rates Table Record

786	Reseller	retailer id
788	ML_Id	master list id
790	Markup Table	fixed; percent; cents
792	Markup Value	real number representing value of markup type
794	Inc1	first level of charging (minimum # of seconds) charge
796	Inc2	second level of charging

FIG. 42

798

System Operator Special Rates Table Record for Klondike

786	Reseller	Klondike
788	ML_Id	1019
790	Markup Table	cents
792	Markup Value	\$0.001
794	Inc1	30
796	Inc2	6

FIG. 43

System Operator Markup Table Record

806	Reseller	reseller id code
808	Markup Table	fixed; percent; cents
810	Markup Value	real number representing value of markup type
812	Inc1	first level of charging (minimum # of seconds) charge
814	Inc2	second level of charging

804

FIG. 44System Operator Markup Table Record for the Reseller Klondike

806	Reseller	Klondike
808	Markup Table	cents
810	Markup Value	\$0.01
812	Inc1	30
814	Inc2	6

FIG. 45System Operator Markup Table Record

806	Reseller	all
808	Markup Table	percent
810	Markup Value	1.0
812	Inc1	30
814	Inc2	6

FIG. 46

Reseller Special Destinations Table Record

834	Reseller	reseller id code
836	ML_id	Master List ID code
838	Markup Table	fixed; percent; cents
840	Markup Value	real number representing value of markup type
842	Inc1	first level of charging (minimum # of seconds) charge
844	Inc2	second level of charging

832

FIG. 47

Reseller Special Destinations Table Record for the Reseller Klondike

834	Reseller	Klondike
836	ML_id	1019
838	Markup Table	percent
840	Markup Value	5%
842	Inc1	30
844	Inc2	6

846

FIG. 48

Reseller Global Markup Table Record

850	Reseller	reseller id code
852	Markup Table	fixed; percent; cents
854	Markup Value	real number representing value of markup type
856	Inc1	first level of charging (minimum # of seconds) charge
858	Inc2	second level of charging

848

FIG. 49

Reseller Global Markup Table Record for the Reseller Klondike

850	Reseller	Klondike
852	Markup Table	percent
854	Markup Value	10%
856	Inc1	30
858	Inc2	6

860

FIG. 50

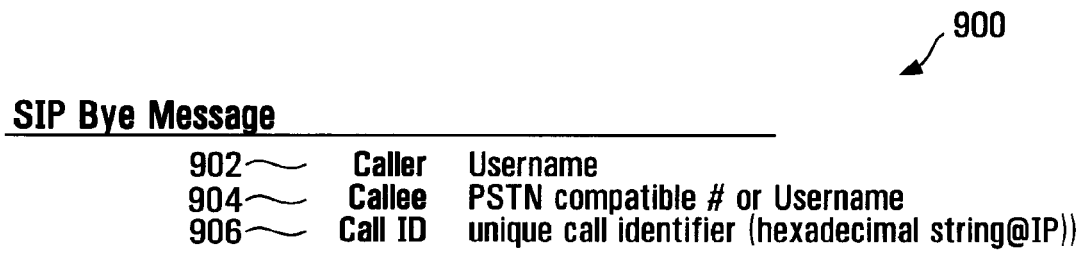


FIG. 51

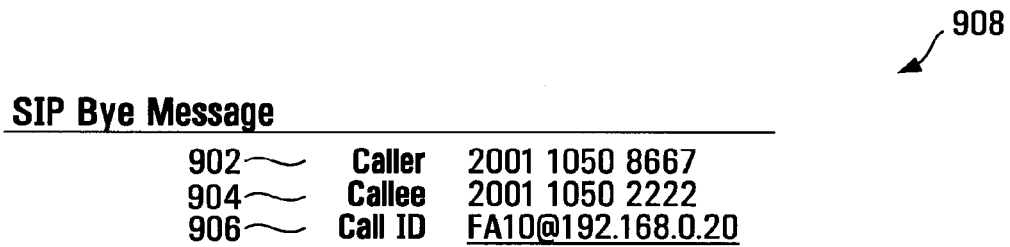
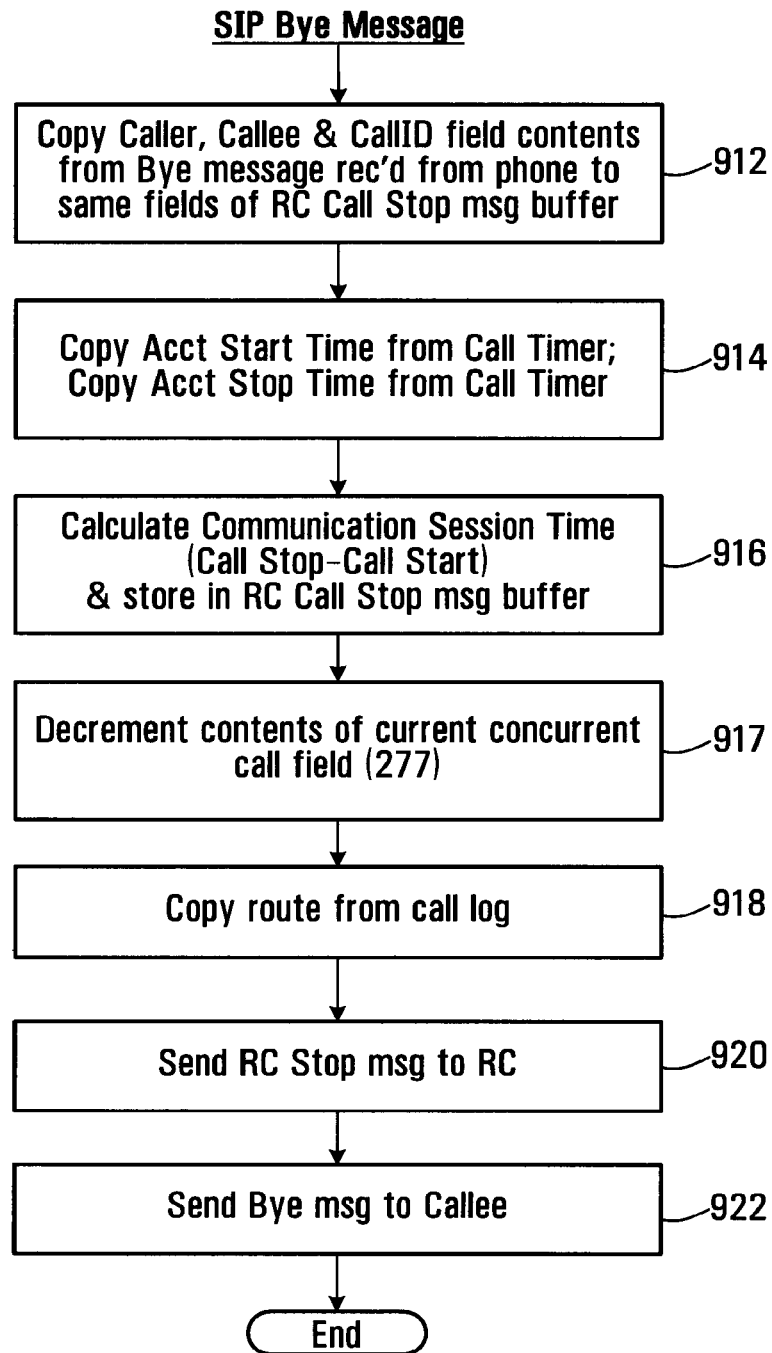


FIG. 52

910

**FIG. 53**

1000

RC Call Stop Message

1002	Caller	Username
1004	Callee	PSTN compatible # or Username
1006	Call ID	unique call identifier (hexadecimal string@IP)
1008	Acct Start Time	start time of call
1010	Acct Stop Time	time the call ended
1012	Acct Session Time	start time-stop time (in seconds)
1014	Route	IP address for the communications link that was established

FIG. 54

1020

RC Call Stop Message for Calgary Callee

1002	Caller	2001 1050 8667
1004	Callee	2001 1050 2222
1006	Call ID	FA10@192.168.0.20
1008	Acct Start Time	2006-12-30 12:12:12
1010	Acct Stop Time	2006-12-30 12:12:14
1012	Acct Session Time	2
1014	Route	72.64.39.58

FIG. 55

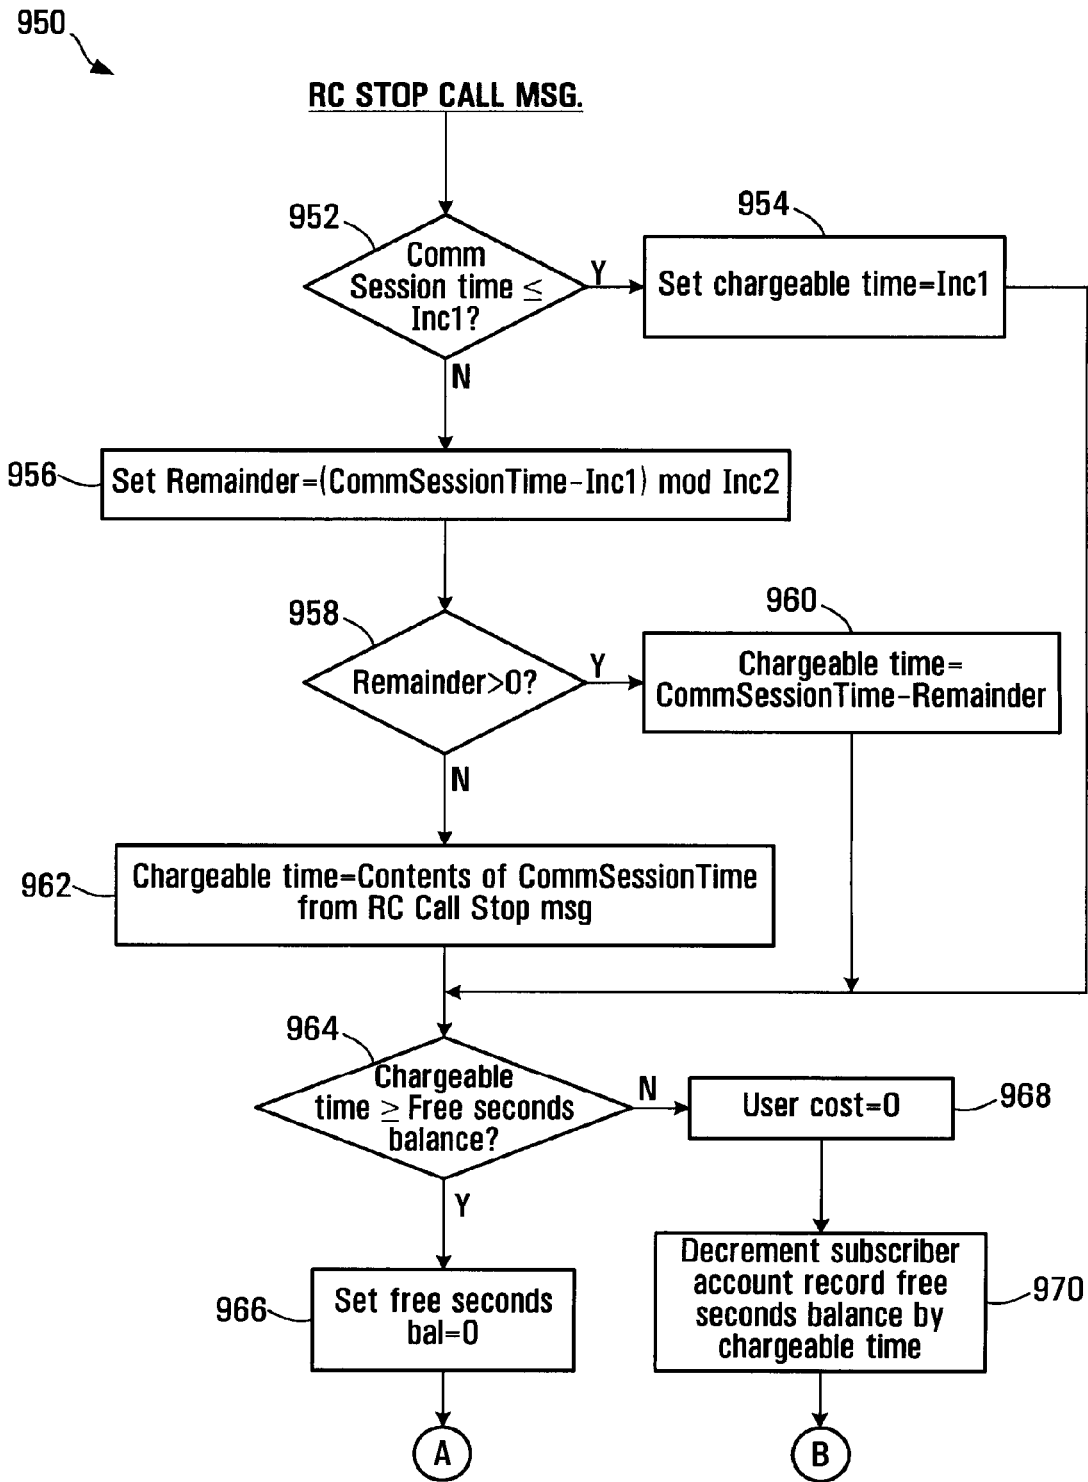


FIG. 56A

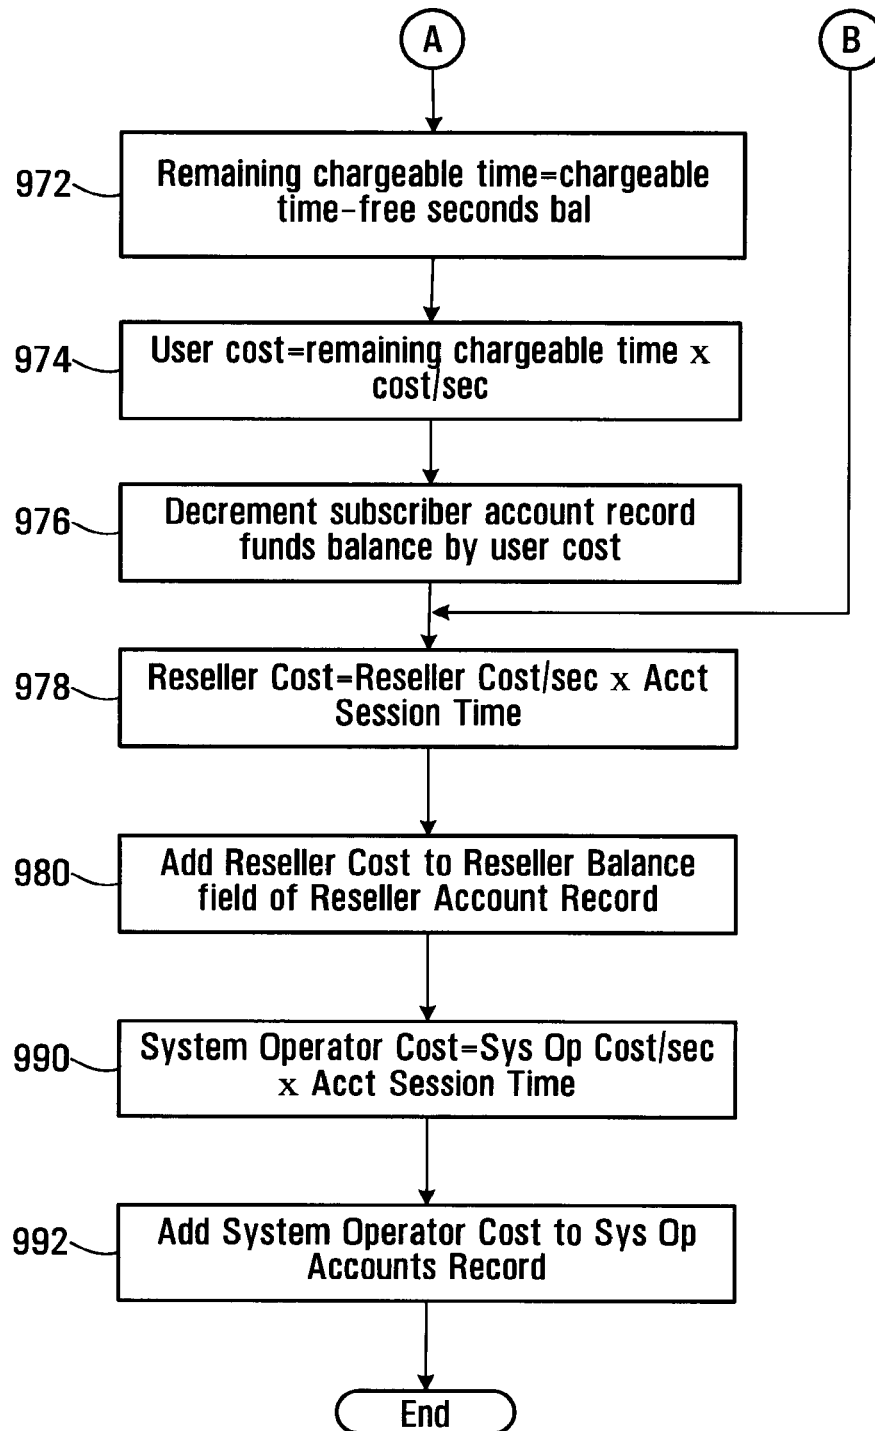


FIG. 56B

982

Reseller Accounts Table Record

984 ~	Reseller ID	reseller id code
986 ~	Reseller balance	accumulated balance of charges

FIG. 57

988

Reseller Accounts Table Record for Klondike

984 ~	Reseller ID	Klondike
986 ~	Reseller balance	\$100.02

FIG. 58

994

System Operator Accounts Table Record

996 ~	System Operator balance	accumulated balance of charges
-------	-------------------------	--------------------------------

FIG. 59

System Operator Accounts Record for this System Operator

996 ~	System Operator balance	\$1000.02
-------	-------------------------	-----------

FIG. 60

US 9,948,549 B2

1

PRODUCING ROUTING MESSAGES FOR VOICE OVER IP COMMUNICATIONS

This is a continuation of U.S. application Ser. No. 15/396,344, filed Dec. 30, 2016, which is a continuation of U.S. application Ser. No. 14/877,570 filed Oct. 7, 2015, now U.S. Pat. No. 9,537,762, which is a continuation of U.S. application Ser. No. 13/966,096, filed Aug. 13, 2013, now U.S. Pat. No. 9,179,005, which is a continuation of U.S. application Ser. No. 12/513,147, filed Mar. 1, 2010, now U.S. Pat. No. 8,542,815, which is a national phase entry of PCT/CA2007/001956, filed Nov. 1, 2007, which claims priority to U.S. Provisional Application No. 60/856,212, filed Nov. 2, 2006, all of which are incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

Field of Invention

This invention relates to voice over IP communications and methods and apparatus for routing and billing.

Description of Related Art

Internet protocol (IP) telephones are typically personal computer (PC) based telephones connected within an IP network, such as the public Internet or a private network of a large organization. These IP telephones have installed "voice-over-IP" (VoIP) software enabling them to make and receive voice calls and send and receive information in data and video formats.

IP telephony switches installed within the IP network enable voice calls to be made within or between IP networks, and between an IP network and a switched circuit network (SCN), such as the public switched telephone network (PSTN). If the IP switch supports the Signaling System 7 (SS7) protocol, the IP telephone can also access PSTN databases.

The PSTN network typically includes complex network nodes that contain all information about a local calling service area including user authentication and call routing. The PSTN network typically aggregates all information and traffic into a single location or node, processes it locally and then passes it on to other network nodes, as necessary, by maintaining route tables at the node. PSTN nodes are redundant by design and thus provide reliable service, but if a node should fail due to an earthquake or other natural disaster, significant, if not complete service outages can occur, with no other nodes being able to take up the load.

Existing VoIP systems do not allow for high availability and resiliency in delivering Voice Over IP based Session Initiation Protocol (SIP) Protocol service over a geographically dispersed area such as a city, region or continent. Most resiliency originates from the provision of IP based telephone services to one location or a small number of locations such as a single office or network of branch offices.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, there is provided a process for operating a call routing controller to facilitate communication between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The process involves, in response to initiation of a call by a calling subscriber, receiving a caller identifier and a callee identifier. The process also involves using call classification criteria associated with the caller identifier to classify the call as a public network call or a private network call. The process further involves

2

producing a routing message identifying an address, on the private network, associated with the callee when the call is classified as a private network call. The process also involves producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The process may involve receiving a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

Using the call classification criteria may involve searching a database to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

Locating a record may involve locating a caller dialing profile comprising a username associated with the caller, a domain associated with the caller, and at least one calling attribute.

Using the call classification criteria may involve comparing calling attributes associated with the caller dialing profile with aspects of the callee identifier.

Comparing may involve determining whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

Comparing may involve determining whether the callee identifier has a length within a range specified in the caller dialing profile.

The process may involve formatting the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier.

Formatting may involve removing an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

Formatting may involve removing a national dialing digit from the callee identifier and prepending a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

Formatting may involve prepending a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

Formatting may involve prepending a caller country code and an area code to the callee identifier when the callee identifier has a length that matches a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The process may involve classifying the call as a private network call when the re-formatted callee identifier identifies a subscriber to the private network. The process may involve determining whether the callee identifier complies with a pre-defined username format and if so, classifying the call as a private network call.

The process may involve causing a database of records to be searched to locate a direct in dial (DID) bank table record associating a public telephone number with the reformed callee identifier and if the DID bank table record is found, classifying the call as a private network call and if a DID bank table record is not found, classifying the call as a public network call.

US 9,948,549 B2

3

Producing the routing message identifying a node on the private network may involve setting a callee identifier in response to a username associated with the DID bank table record.

Producing the routing message may involve determining whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier.

Determining whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier may involve determining whether a prefix of the re-formatted callee identifier matches a corresponding prefix of a username associated with the caller dialing profile.

When the node associated with the caller is not the same as the node associated with the callee, the process involves producing a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and communicating the routing message to a call controller.

When the node associated with the caller is the same as the node associated with the callee, the process involves determining whether to perform at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee.

Producing the routing message may involve producing a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The process may involve communicating the routing message to a call controller.

Producing a routing message identifying a gateway to the public network may involve searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The process may involve loading a routing message buffer with the reformatted callee identifier and an identification of specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The process may involve communicating a routing message involving the contents of the routing message buffer to a call controller.

The process may involve causing the dialing profile to include a maximum concurrent call value and a concurrent call count value and causing the concurrent call count value to be incremented when the user associated with the dialing profile initiates a call and causing the concurrent call count value to be decremented when a call with the user associated with the dialing profile is ended.

In accordance with another aspect of the invention, there is provided a call routing apparatus for facilitating communications between callers and callees in a system comprising a plurality of nodes with which callers and callees are associated. The apparatus includes receiving provisions for receiving a caller identifier and a callee identifier, in

4

response to initiation of a call by a calling subscriber. The apparatus also includes classifying provisions for classifying the call as a private network call or a public network call according to call classification criteria associated with the caller identifier. The apparatus further includes provisions for producing a routing message identifying an address, on the private network, associated with the callee when the call is classified as a private network call. The apparatus also includes provisions for producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

The receiving provisions may be operably configured to receive a request to establish a call, from a call controller in communication with a caller identified by the callee identifier.

The apparatus may further include searching provisions for searching a database including records associating calling attributes with subscribers to the private network to locate a record identifying calling attributes associated with a caller identified by the caller identifier.

The records may include dialing profiles each including a username associated with the subscriber, an identification of a domain associated with the subscriber, and an identification of at least one calling attribute associated with the subscriber.

The call classification provisions may be operably configured to compare calling attributes associated with the caller dialing profile with aspects of the callee identifier.

The calling attributes may include an international dialing digit and call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an IDD associated with the caller dialing profile.

The calling attributes may include a national dialing digit and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an NDD associated with the caller dialing profile.

The calling attributes may include an area code and the call classification provisions may be operably configured to determine whether the callee identifier includes a portion that matches an area code associated with the caller dialing profile.

The calling attribute may include a number length range and the call classification provisions may be operably configured to determine whether the callee identifier has a length within a number length range specified in the caller dialing profile.

The apparatus may further include formatting provisions for formatting the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier.

The formatting provisions may be operably configured to remove an international dialing digit from the callee identifier, when the callee identifier begins with a digit matching an international dialing digit specified by the caller dialing profile associated with the caller.

The formatting provisions may be operably configured to remove a national dialing digit from the callee identifier and prepend a caller country code to the callee identifier when the callee identifier begins with a national dialing digit.

The formatting provisions may be operably configured to prepend a caller country code to the callee identifier when the callee identifier begins with digits identifying an area code specified by the caller dialing profile.

The formatting provisions may be operably configured to prepend a caller country code and area code to the callee identifier when the callee identifier has a length that matches

US 9,948,549 B2

5

a caller dialing number format specified by the caller dialing profile and only one area code is specified as being associated with the caller in the caller dialing profile.

The classifying provisions may be operably configured to classify the call as a private network call when the reformatted callee identifier identifies a subscriber to the private network.

The classifying provisions may be operably configured to classify the call as a private network call when the callee identifier complies with a pre-defined username format.

The apparatus may further include searching provisions for searching a database of records to locate a direct in dial (DID) bank table record associating a public telephone number with the reformatted callee identifier and the classifying provisions may be operably configured to classify the call as a private network call when the DID bank table record is found and to classify the call as a public network call when a DID bank table record is not found

The private network routing message producing provisions may be operably configured to produce a routing message having a callee identifier set according to a username associated with the DID bank table record.

The private network routing message producing provisions may be operably configured to determine whether a node associated with the reformatted callee identifier is the same as a node associated with the caller identifier.

The private network routing provisions may include provisions for determining whether a prefix of the reformatted callee identifier matches a corresponding prefix of a username associated with the caller dialing profile.

The private network routing message producing provisions may be operably configured to produce a routing message including the caller identifier, the reformatted callee identifier and an identification of a private network node associated with the callee and to communicate the routing message to a call controller.

The private network routing message producing provisions may be operably configured to perform at least one of the following forward the call to another party, block the call and direct the caller to a voicemail server associated with the callee, when the node associated with the caller is the same as the node associated with the callee.

The provisions for producing the private network routing message may be operably configured to produce a routing message having an identification of at least one of the callee identifier, an identification of a party to whom the call should be forwarded and an identification of a voicemail server associated with the callee.

The apparatus further includes provisions for communicating the routing message to a call controller.

The provisions for producing a public network routing message identifying a gateway to the public network may include provisions for searching a database of route records associating route identifiers with dialing codes to find a route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The apparatus further includes provisions for searching a database of supplier records associating supplier identifiers with the route identifiers to locate at least one supplier record associated with the route identifier associated with the route record having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

The apparatus further includes a routing message buffer and provisions for loading the routing message buffer with the reformatted callee identifier and an identification of

6

specific routes associated respective ones of the supplier records associated with the route record and loading the routing message buffer with a time value and a timeout value.

The apparatus further includes provisions for communicating a routing message including the contents of the routing message buffer to a call controller.

The apparatus further includes means for causing said dialing profile to include a maximum concurrent call value and a concurrent call count value and for causing said concurrent call count value to be incremented when the user associated with said dialing profile initiates a call and for causing said concurrent call count value to be decremented when a call with said user associated with said dialing profile is ended.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes dialing profile records comprising fields for associating with respective subscribers to the system, a subscriber user name, direct-in-dial records comprising fields for associating with respective subscriber usernames, a user domain and a direct-in-dial number, prefix to node records comprising fields for associating with at least a portion of the respective subscriber usernames, a node address of a node in the system, whereby a subscriber name can be used to find a user domain, at least a portion of the a subscriber name can be used to find a node with which the subscriber identified by the subscriber name is associated, and a user domain and subscriber name can be located in response to a direct-in-dial number.

In accordance with another aspect of the invention, there is provided a data structure for access by an apparatus for producing a routing message for use by a call routing controller in a communications system. The data structure includes master list records comprising fields for associating a dialing code with respective master list identifiers and supplier list records linked to master list records by the master list identifiers, said supplier list records comprising fields for associating with a communications services supplier, a supplier id, a master list id, a route identifier and a billing rate code, whereby communications services suppliers are associated with dialing codes, such that dialing codes can be used to locate suppliers capable of providing a communications link associated with a given dialing code.

In accordance with another aspect of the invention, there is provided a method for determining a time to permit a communication session to be conducted. The method involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Calculating the first time value may involve retrieving a record associated with the participant and obtaining from the record at least one of the free time and the funds balance.

Producing the second time value may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

US 9,948,549 B2

7

Producing the second time value may involve setting a difference between the first time value and the remainder as the second time value.

The method may further involve setting the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

Calculating the cost per unit time may involve locating a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and setting a reseller rate equal to the sum of the markup value and the buffer rate.

Locating the record in a database may involve locating at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller and a default reseller markup record.

Calculating the cost per unit time value further may involve locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator markup record specifying a default cost per unit time.

The method may further involve setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a reseller balance by the product of the reseller rate and the communication session time.

The method may further involve receiving a communication session time representing a duration of the communication session and incrementing a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided an apparatus for determining a time to permit a communication session to be conducted. The apparatus includes a processor circuit, a computer readable medium coupled to the processor circuit and encoded with instructions for directing the processor circuit to calculate a cost per unit time for the communication session, calculate a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and produce a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

The instructions may include instructions for directing the processor circuit to retrieve a record associated with the participant and obtain from the record at least one of the free time and the funds balance.

The instructions may include instructions for directing the processor circuit to produce the second time value by producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

The instructions may include instructions for directing the processor circuit to produce the second time value comprises setting a difference between the first time value and the

8

remainder as the second time value. The instructions may include instructions for directing the processor circuit to set the second time value to zero when the remainder is greater than zero and the first time value is less than the free time associated with the participant.

The instructions for directing the processor circuit to calculate the cost per unit time may include instructions for directing the processor circuit to locate a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and set a reseller rate equal to the sum of the markup value and the buffer rate.

The instructions for directing the processor circuit to locate the record in a database may include instructions for directing the processor circuit to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller markup record. The instructions for directing the processor circuit to calculate the cost per unit time value may further include instructions for directing the processor circuit to locate at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session, a default operator markup record specifying a default cost per unit time.

The instructions may include instructions for directing the processor circuit to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a reseller balance by the product of the reseller rate and the communication session time.

The instructions may include instructions for directing the processor circuit to receive a communication session time representing a duration of the communication session and increment a system operator balance by a product of the buffer rate and the communication session time.

In accordance with another aspect of the invention, there is provided a process for attributing charges for communications services. The process involves determining a first chargeable time in response to a communication session time and a pre-defined billing pattern, determining a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, changing an account balance associated with the user in response to a user cost per unit time. The process may further involve changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

Determining the first chargeable time may involve locating at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and setting as the

US 9,948,549 B2

9

pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may involve a first billing interval and a second billing interval.

Determining the first chargeable time may involve setting the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

Determining the first chargeable time may involve producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and setting the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and setting the first chargeable time to the communication session time when the remainder is not greater than zero.

The process may further involve determining a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Determining the second chargeable time may involve setting the second chargeable time to a difference between the first chargeable time.

The process may further involve resetting the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

Changing an account balance associated with the user may involve calculating a user cost value in response to the second chargeable time and the user cost per unit time.

The process may further involve changing a user free cost balance in response to the user cost value.

The process may further involve setting the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The process may further involve changing a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided an apparatus for attributing charges for communications services. The apparatus includes a processor circuit, a computer readable medium in communication with the processor circuit and encoded with instructions for directing the processor circuit to determine a first chargeable time in response to a communication session time and a pre-defined billing pattern, determine a user cost value in response to the first chargeable time and a free time value associated with a user of the communications services, change an account balance associated with the user in response to a user cost per unit time.

The instructions may further include instructions for changing an account balance associated with a reseller of the communications services in response to a reseller cost per unit time and the communication session time and changing an account balance associated with an operator of the communications services in response to an operator cost per unit time and the communication session time.

The instructions for directing the processor circuit to determine the first chargeable time may further include instructions for causing the processor circuit to communicate with a database to locate at least one of an override record specifying a route cost per unit time and billing pattern associated with a route associated with the communication session, a reseller record associated with a reseller

10

of the communications session, the reseller record specifying a reseller cost per unit time and billing pattern associated with the reseller for the communication session and a default record specifying a default cost per unit time and billing pattern and instructions for setting as the pre-defined billing pattern the billing pattern of the record located. The billing pattern of the record located may include a first billing interval and a second billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for directing the processor circuit to set the first chargeable time equal to the first billing interval when the communication session time is less than or equal to the first billing interval.

The instructions for causing the processor circuit to determine the first chargeable time may include instructions for producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between communication session time and the first interval when the communication session time is greater than the communication session time and instructions for causing the processor circuit to set the first chargeable time to a difference between the communication session time and the remainder when the remainder is greater than zero and instructions for causing the processor circuit to set the first chargeable time to the communication session time when the remainder is not greater than zero.

The instructions may further include instructions for causing the processor circuit to determine a second chargeable time in response to the first chargeable time and the free time value associated with the user of the communications services when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to determine the second chargeable time may include instructions for causing the processor circuit to set the second chargeable time to a difference between the first chargeable time.

The instructions may further include instructions for causing the processor circuit to reset the free time value associated with the user to zero when the first chargeable time is greater than or equal to the free time value associated with the user of the communications services.

The instructions for causing the processor circuit to change an account balance associated with the user may include instructions for causing the processor circuit to calculate a user cost value in response to the second chargeable time and the user cost per unit time.

The instructions may further include instructions for causing the processor circuit to change a user free cost balance in response to the user cost value.

The instructions may further include instructions for causing the processor circuit to set the user cost to zero when the first chargeable time is less than the free time value associated with the user.

The instructions may further include instructions for causing the processor circuit to change a user free time balance in response to the first chargeable time.

In accordance with another aspect of the invention, there is provided a computer readable medium encoded with codes for directing a processor circuit to execute one or more of the methods described above and/or variants thereof.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon

US 9,948,549 B2

11

review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments of the invention,

FIG. 1 is a block diagram of a system according to a first embodiment of the invention;

FIG. 2 is a block diagram of a caller telephone according to the first embodiment of the invention;

FIG. 3 is a schematic representation of a SIP invite message transmitted between the caller telephone and a controller shown in FIG. 1;

FIG. 4 is a block diagram of a call controller shown in FIG. 1;

FIG. 5 is a flowchart of a process executed by the call controller shown in FIG. 1;

FIG. 6 is a schematic representation of a routing, billing and rating (RC) request message produced by the call controller shown in FIG. 1;

FIG. 7 is a block diagram of a processor circuit of a routing, billing, rating element of the system shown in FIG. 1;

FIGS. 8A-8D is a flowchart of a RC request message handler executed by the RC processor circuit shown in FIG. 7;

FIG. 9 is a tabular representation of a dialing profile stored in a database accessible by the RC shown in FIG. 1;

FIG. 10 is a tabular representation of a dialing profile for a caller using the caller telephone shown in FIG. 1;

FIG. 11 is a tabular representation of a callee profile for a callee located in Calgary;

FIG. 12 is a tabular representation of a callee profile for a callee located in London;

FIG. 13 is a tabular representation of a Direct-in-Dial (DID) bank table record stored in the database shown in FIG. 1;

FIG. 14 is a tabular representation of an exemplary DID bank table record for the Calgary callee referenced in FIG. 11;

FIG. 15 is a tabular representation of a routing message transmitted from the RC to the call controller shown in FIG. 1;

FIG. 16 is a schematic representation of a routing message buffer holding a routing message for routing a call to the Calgary callee referenced in FIG. 11;

FIG. 17 is a tabular representation of a prefix to supernode table record stored in the database shown in FIG. 1;

FIG. 18 is a tabular representation of a prefix to supernode table record that would be used for the Calgary callee referenced in FIG. 11;

FIG. 19 is a tabular representation of a master list record stored in a master list table in the database shown in FIG. 1;

FIG. 20 is a tabular representation of a populated master list record;

FIG. 21 is a tabular representation of a suppliers list record stored in the database shown in FIG. 1;

FIG. 22 is a tabular representation of a specific supplier list record for a first supplier;

FIG. 23 is a tabular representation of a specific supplier list record for a second supplier;

FIG. 24 is a tabular representation of a specific supplier list record for a third supplier;

12

FIG. 25 is a schematic representation of a routing message, held in a routing message buffer, identifying to the controller a plurality of possible suppliers that may carry the call;

FIG. 26 is a tabular representation of a call block table record;

FIG. 27 is a tabular representation of a call block table record for the Calgary callee;

FIG. 28 is a tabular representation of a call forwarding table record;

FIG. 29 is a tabular representation of a call forwarding table record specific for the Calgary callee;

FIG. 30 is a tabular representation of a voicemail table record specifying voicemail parameters to enable the caller to leave a voicemail message for the callee;

FIG. 31 is a tabular representation of a voicemail table record specific to the Calgary callee;

FIG. 32 is a schematic representation of an exemplary routing message, held in a routing message buffer, indicating call forwarding numbers and a voicemail server identifier;

FIGS. 33A and 33B are respective portions of a flowchart of a process executed by the RC processor for determining a time to live value;

FIG. 34 is a tabular representation of a subscriber bundle table record;

FIG. 35 is a tabular representation of a subscriber bundle record for the Vancouver caller;

FIG. 36 is a tabular representation of a bundle override table record;

FIG. 37 is a tabular representation of bundle override record for a located master list ID;

FIG. 38 is a tabular representation of a subscriber account table record;

FIG. 39 is a tabular representation of a subscriber account record for the Vancouver caller;

FIG. 40 is a flowchart of a process for producing a second time value executed by the RC processor circuit shown in FIG. 7;

FIG. 41 is a flowchart for calculating a call cost per unit time;

FIG. 42 is a tabular representation of a system operator special rates table record;

FIG. 43 is a tabular representation of a system operator special rates table record for a reseller named Klondike;

FIG. 44 is a tabular representation of a system operator mark-up table record;

FIG. 45 is a tabular representation of a system operator mark-up table record for the reseller Klondike;

FIG. 46 is a tabular representation of a default system operator mark-up table record;

FIG. 47 is a tabular representation of a reseller special destinations table record;

FIG. 48 is a tabular representation of a reseller special destinations table record for the reseller Klondike;

FIG. 49 is a tabular representation of a reseller global mark-up table record;

FIG. 50 is a tabular representation of a reseller global mark-up table record for the reseller Klondike;

FIG. 51 is a tabular representation of a SIP bye message transmitted from either of the telephones shown in FIG. 1 to the call controller;

FIG. 52 is a tabular representation of a SIP bye message sent to the controller from the Calgary callee;

FIG. 53 is a flowchart of a process executed by the call controller for producing a RC stop message in response to receipt of a SIP bye message;

US 9,948,549 B2

13

FIG. 54 is a tabular representation of an exemplary RC call stop message;

FIG. 55 is a tabular representation of an RC call stop message for the Calgary callee;

FIGS. 56A and 56B are respective portions of a flowchart of a RC call stop message handling routine executed by the RC shown in FIG. 1;

FIG. 57 is a tabular representation of a reseller accounts table record;

FIG. 58 is a tabular representation of a reseller accounts table record for the reseller Klondike;

FIG. 59 is a tabular representation of a system operator accounts table record; and

FIG. 60 is a tabular representation of a system operator accounts record for the system operator described herein.

DETAILED DESCRIPTION

Referring to FIG. 1, a system for making voice over IP telephone/videophone calls is shown generally at 10. The system includes a first super node shown generally at 11 and a second super node shown generally at 21. The first super node 11 is located in geographical area, such as Vancouver, B.C., Canada for example and the second super node 21 is located in London, England, for example. Different super nodes may be located in different geographical regions throughout the world to provide telephone/videophone service to subscribers in respective regions. These super nodes may be in communication with each other by high speed/high data throughput links including optical fiber, satellite and/or cable links, forming a backbone to the system. These super nodes may alternatively or, in addition, be in communication with each other through conventional internet services.

In the embodiment shown, the Vancouver supernode 11 provides telephone/videophone service to western Canadian customers from Vancouver Island to Ontario. Another node (not shown) may be located in Eastern Canada to provide services to subscribers in that area.

Other nodes of the type shown may also be employed within the geographical area serviced by a supernode, to provide for call load sharing, for example within a region of the geographical area serviced by the supernode. However, in general, all nodes are similar and have the properties described below in connection with the Vancouver supernode 11.

In this embodiment, the Vancouver supernode includes a call controller (C) 14, a routing controller (RC) 16, a database 18 and a voicemail server 19 and a media relay 9. Each of these may be implemented as separate modules on a common computer system or by separate computers, for example. The voicemail server 19 need not be included in the node and can be provided by an outside service provider.

Subscribers such as a subscriber in Vancouver and a subscriber in Calgary communicate with the Vancouver supernode using their own internet service providers which route internet traffic from these subscribers over the internet shown generally at 13 in FIG. 1. To these subscribers the Vancouver supernode is accessible at a pre-determined internet protocol (IP) address or a fully qualified domain name that can be accessed in the usual way through a subscriber's internet service provider. The subscriber in Vancouver uses a telephone 12 that is capable of communicating with the Vancouver supernode 11 using Session Initiation Protocol (SIP) messages and the Calgary subscriber uses a similar telephone 15, in Calgary AB.

14

It should be noted that throughout the description of the embodiments of this invention, the IP/UDP addresses of all elements such as the caller and callee telephones, call controller, media relay, and any others, will be assumed to be valid IP/UDP addresses directly accessible via the Internet or a private IP network, for example, depending on the specific implementation of the system. As such, it will be assumed, for example, that the caller and callee telephones will have IP/UDP addresses directly accessible by the call controllers and the media relays on their respective supernodes, and those addresses will not be obscured by Network Address Translation (NAT) or similar mechanisms. In other words, the IP/UDP information contained in SIP messages (for example the SIP Invite message or the RC Request message which will be described below) will match the IP/UDP addresses of the IP packets carrying these SIP messages.

It will be appreciated that in many situations, the IP addresses assigned to various elements of the system may be in a private IP address space, and thus not directly accessible from other elements. Furthermore, it will also be appreciated that NAT is commonly used to share a "public" IP address between multiple devices, for example between home PCs and IP telephones sharing a single Internet connection. For example, a home PC may be assigned an IP address such as 192.168.0.101 and a Voice over IP telephone may be assigned an IP address of 192.168.0.103. These addresses are located in so called "non-routable" (IP) address space and cannot be accessed directly from the Internet. In order for these devices to communicate with other computers located on the Internet, these IP addresses have to be converted into a "public" IP address, for example 24.10.10.123 assigned by the Internet Service Provider to the subscriber, by a device performing NAT, typically a home router. In addition to translating the IP addresses, NAT typically also translates UDP port numbers, for example an audio path originating at a VoIP telephone and using a UDP port 12378 at its private IP address, may have been translated to a UDP port 23465 associated with the public IP address of the NAT device. In other words, when a packet originating from the above VoIP telephone arrives at an Internet-based supernode, the source IP/UDP address contained in the IP packet header will be 24.10.10.1:23465, whereas the source IP/UDP address information contained in the SIP message inside this IP packet will be 192.168.0.103:12378. The mismatch in the IP/UDP addresses may cause a problem for SIP-based VoIP systems because, for example, a supernode will attempt to send messages to a private address of a telephone but the messages will never get there.

Referring to FIG. 1, in an attempt to make a call by the Vancouver telephone/videophone 12 to the Calgary telephone/videophone 15, the Vancouver telephone/videophone sends a SIP invite message to the Vancouver supernode 11 and in response, the call controller 14 sends an RC request message to the RC 16 which makes various enquiries of the database 18 to produce a routing message which is sent back to the call controller 14. The call controller 14 then communicates with the media relay 9 to cause a communications link including an audio path and a videophone (if a video-path call) to be established through the media relay to the same node, a different node or to a communications supplier gateway as shown generally at 20 to carry audio, and where applicable, video traffic to the call recipient or callee.

Generally, the RC 16 executes a process to facilitate communication between callers and callees. The process involves, in response to initiation of a call by a calling

US 9,948,549 B2

15

subscriber, receiving a callee identifier from the calling subscriber, using call classification criteria associated with the calling subscriber to classify the call as a public network call or a private network call and producing a routing message identifying an address on the private network, associated with the callee when the call is classified as a private network call and producing a routing message identifying a gateway to the public network when the call is classified as a public network call.

Subscriber Telephone

In greater detail, referring to FIG. 2, in this embodiment, the telephone/videophone 12 includes a processor circuit shown generally at 30 comprising a microprocessor 32, program memory 34, an input/output (I/O) port 36, parameter memory 38 and temporary memory 40. The program memory 34, I/O port 36, parameter memory 38 and temporary memory 40 are all in communication with the microprocessor 32. The I/O port 36 has a dial input 42 for receiving a dialed telephone/videophone number from a keypad, for example, or from a voice recognition unit or from pre-stored telephone/videophone numbers stored in the parameter memory 38, for example. For simplicity, in FIG. 2 a box labelled dialing functions 44 represents any device capable of informing the microprocessor 32 of a callee identifier, e.g., a callee telephone/videophone number.

The processor 32 stores the callee identifier in a dialed number buffer 45. In this case, assume the dialed number is 2001 1050 2222 and that it is a number associated with the Calgary subscriber. The I/O port 36 also has a handset interface 46 for receiving and producing signals from and to a handset that the user may place to his ear. This interface 46 may include a BLUETOOTH™ wireless interface, a wired interface or speaker phone, for example. The handset acts as a termination point for an audio path (not shown) which will be appreciated later. The I/O port 36 also has an internet connection 48 which is preferably a high speed internet connection and is operable to connect the telephone/videophone to an internet service provider. The internet connection 48 also acts as a part of the voice path, as will be appreciated later. It will be appreciated that where the subscriber device is a videophone, a separate video path is established in the same way an audio path is established. For simplicity, the following description refers to a telephone call, but it is to be understood that a videophone call is handled similarly, with the call controller causing the media relay to facilitate both an audio path and a video path instead of only an audio path.

The parameter memory 38 has a username field 50, a password field 52 an IP address field 53 and a SIP proxy address field 54, for example. The user name field 50 is operable to hold a user name, which in this case is 2001 1050 8667. The user name is assigned upon subscription or registration into the system and, in this embodiment, includes a twelve digit number having a continent code 61, a country code 63, a dealer code 70 and a unique number code 74. The continent code 61 is comprised of the first or left-most digit of the user name in this embodiment. The country code 63 is comprised of the next three digits. The dealer code 70 is comprised of the next four digits and the unique number code 74 is comprised of the last four digits. The password field 52 holds a password of up to 512 characters, in this example. The IP address field 53 stores an IP address of the telephone, which for this explanation is 192.168.0.20. The SIP proxy address field 54 holds an IP protocol compatible proxy address which may be provided to the telephone through the internet connection 48 as part of a registration procedure.

16

The program memory 34 stores blocks of codes for directing the processor 32 to carry out the functions of the telephone, one of which includes a firewall block 56 which provides firewall functions to the telephone, to prevent access by unauthorized persons to the microprocessor 32 and memories 34, 38 and 40 through the internet connection 48. The program memory 34 also stores codes 57 for establishing a call ID. The call ID codes 57 direct the processor 32 to produce a call identifier having a format comprising a hexadecimal string at an IP address, the IP address being the IP address of the telephone. Thus, an exemplary call identifier might be FF10@192.168.0.20.

Generally, in response to picking up the handset interface 46 and activating a dialing function 44, the microprocessor 32 produces and sends a SIP invite message as shown in FIG. 3, to the routing controller 16 shown in FIG. 1. This SIP invite message is essentially to initiate a call by a calling subscriber.

Referring to FIG. 3, the SIP invite message includes a caller ID field 60, a callee identifier field 62, a digest parameters field 64, a call ID field 65 an IP address field 67 and a caller UDP port field 69. In this embodiment, the caller ID field 60 includes the user name 2001 1050 8667 that is the Vancouver user name stored in the user name field 50 of the parameter memory 38 in the telephone 12 shown in FIG. 2. In addition, referring back to FIG. 3, the callee identifier field 62 includes a callee identifier which in this embodiment is the user name 2001 1050 2222 that is the dialed number of the Calgary subscriber stored in the dialed number buffer 45 shown in FIG. 2. The digest parameters field 64 includes digest parameters and the call ID field 65 includes a code comprising a generated prefix code (FF10) and a suffix which is the Internet Protocol (IP) address of the telephone 12 stored in the IP address field 53 of the telephone. The IP address field 67 holds the IP address assigned to the telephone, in this embodiment 192.168.0.20, and the caller UDP port field 69 includes a UDP port identifier identifying a UDP port at which the audio path will be terminated at the caller's telephone.

Call Controller

Referring to FIG. 4, a call controller circuit of the call controller 14 (FIG. 1) is shown in greater detail at 100. The call controller circuit 100 includes a microprocessor 102, program memory 104 and an I/O port 106. The circuit 100 may include a plurality of microprocessors, a plurality of program memories and a plurality of I/O ports to be able to handle a large volume of calls. However, for simplicity, the call controller circuit 100 will be described as having only one microprocessor 102, program memory 104 and I/O port 106, it being understood that there may be more.

Generally, the I/O port 106 includes an input 108 for receiving messages such as the SIP invite message shown in FIG. 3, from the telephone shown in FIG. 2. The I/O port 106 also has an RC request message output 110 for transmitting an RC request message to the RC 16 of FIG. 1, an RC message input 112 for receiving routing messages from the RC 16, a gateway output 114 for transmitting messages to one of the gateways 20 shown in FIG. 1 to advise the gateway to establish an audio path, for example, and a gateway input 116 for receiving messages from the gateway. The I/O port 106 further includes a SIP output 118 for transmitting messages to the telephone 12 to advise the telephone of the IP addresses of the gateways which will establish the audio path. The I/O port 106 further includes a voicemail server input and output 117, 119 respectively for communicating with the voicemail server 19 shown in FIG. 1.

US 9,948,549 B2

17

While certain inputs and outputs have been shown as separate, it will be appreciated that some may be a single IP address and IP port. For example, the messages sent to the RC 16 and received from the RC 16 may be transmitted and received on the same single IP port.

The program memory 104 includes blocks of code for directing the microprocessor 102 to carry out various functions of the call controller 14. For example, these blocks of code include a first block 120 for causing the call controller circuit 100 to execute a SIP invite to RC request process to produce an RC request message in response to a received SIP invite message. In addition, there is a routing message to gateway message block 122 which causes the call controller circuit 100 to produce a gateway query message in response to a received routing message from the RC 16.

Referring to FIG. 5, the SIP invite to RC request process is shown in more detail at 120. On receipt of a SIP invite message of the type shown in FIG. 3, block 122 of FIG. 5 directs the call controller circuit 100 of FIG. 4 to authenticate the user. This may be done, for example, by prompting the user for a password, by sending a message back to the telephone 12 which is interpreted at the telephone as a request for a password entry or the password may automatically be sent to the call controller 14 from the telephone, in response to the message. The call controller 14 may then make enquiries of databases to which it has access, to determine whether or not the user's password matches a password stored in the database. Various functions may be used to pass encryption keys or hash codes back and forth to ensure that the transmittal of passwords is secure.

Should the authentication process fail, the call controller circuit 100 is directed to an error handling routine 124 which causes messages to be displayed at the telephone 12 to indicate there was an authentication problem. If the authentication procedure is passed, block 121 directs the call controller circuit 100 to determine whether or not the contents of the caller ID field 60 of the SIP invite message received from the telephone is an IP address. If it is an IP address, then block 123 directs the call controller circuit 100 to set the contents of a type field variable maintained by the microprocessor 102 to a code representing that the call type is a third party invite. If at block 121 the caller ID field contents do not identify an IP address, then block 125 directs the microprocessor to set the contents of the type field to a code indicating that the call is being made by a system subscriber. Then, block 126 directs the call controller circuit to read the call identifier 65 provided in the SIP invite message from the telephone 12, and at block 128 the processor is directed to produce an RC request message that includes that call ID. Block 129 then directs the call controller circuit 100 to send the RC request to the RC 16.

Referring to FIG. 6, an RC request message is shown generally at 150 and includes a caller field 152, a callee field 154, a digest field 156, a call ID field 158 and a type field 160. The caller, callee, digest call ID fields 152, 154, 156 and 158 contain copies of the caller, callee, digest parameters and call ID fields 60, 62, 64 and 65 of the SIP invite message shown in FIG. 3. The type field 160 contains the type code established at blocks 123 or 125 of FIG. 5 to indicate whether the call is from a third party or system subscriber, respectively. The caller identifier field may include a PSTN number or a system subscriber username as shown, for example.

Routing Controller (RC)

Referring to FIG. 7, the RC 16 is shown in greater detail and includes an RC processor circuit shown generally at 200. The RC processor circuit 200 includes a processor 202,

18

program memory 204, a table memory 206, buffer memory 207, and an I/O port 208, all in communication with the processor 202. (As earlier indicated, there may be a plurality of processor circuits (202), memories (204), etc.) The buffer memory 207 includes a caller id buffer 209 and a callee id buffer 211.

The I/O port 208 includes a database request port 210 through which a request to the database (18 shown in FIG. 1) can be made and includes a database response port 212 for receiving a reply from the database 18. The I/O port 208 further includes an RC request message input 214 for receiving the RC request message from the call controller (14 shown in FIG. 1) and includes a routing message output 216 for sending a routing message back to the call controller 14. The I/O port 208 thus acts to receive caller identifier and a callee identifier contained in the RC request message from the call controller, the RC request message being received in response to initiation of a call by a calling subscriber.

The program memory 204 includes blocks of codes for directing the processor 202 to carry out various functions of the RC (16). One of these blocks includes an RC request message handler 250 which directs the RC to produce a routing message in response to a received RC request message. The RC request message handler process is shown in greater detail at 250 in FIGS. 8A through 8D.
RC Request Message Handler

Referring to FIG. 8A, the RC request message handler begins with a first block 252 that directs the RC processor circuit (200) to store the contents of the RC request message (150) in buffers in the buffer memory 207 of FIG. 7, one of which includes the caller ID buffer 209 of FIG. 7 for separately storing the contents of the callee field 154 of the RC request message. Block 254 then directs the RC processor circuit to use the contents of the caller field 152 in the RC request message shown in FIG. 6, to locate and retrieve from the database 18 a record associating calling attributes with the calling subscriber. The located record may be referred to as a dialing profile for the caller. The retrieved dialing profile may then be stored in the buffer memory 207, for example.

Referring to FIG. 9, an exemplary data structure for a dialing profile is shown generally at 253 and includes a user name field 258, a domain field 260, and calling attributes comprising a national dialing digits (NDD) field 262, an international dialing digits (IDD) field 264, a country code field 266, a local area codes field 267, a caller minimum local length field 268, a caller maximum local length field 270, a reseller field 273, a maximum number of concurrent calls field 275 and a current number of concurrent calls field 277. Effectively the dialing profile is a record identifying calling attributes of the caller identified by the caller identifier. More generally, dialing profiles represent calling attributes of respective subscribers.

An exemplary caller profile for the Vancouver subscriber is shown generally at 276 in FIG. 10 and indicates that the user name field 258 includes the user name (2001 1050 8667) that has been assigned to the subscriber and is stored in the user name field 50 in the telephone as shown in FIG. 2.

Referring back to FIG. 10, the domain field 260 includes a domain name as shown at 282, including a node type identifier 284, a location code identifier 286, a system provider identifier 288 and a domain portion 290. The domain field 260 effectively identifies a domain or node associated with the user identified by the contents of the user name field 258. In this embodiment, the node type identifier 284 includes the code "sp" identifying a supernode and the location identifier 286 identifies the supernode as being in

US 9,948,549 B2

19

Vancouver (YVR). The system provider identifier **288** identifies the company supplying the service and the domain portion **290** identifies the “corn” domain.

The national dialed digit field **262** in this embodiment includes the digit “1” and, in general, includes a number specified by the International Telecommunications Union (ITU) Telecommunications Standardization Sector (ITU-T) E.164 Recommendation which assigns national dialing digits to countries.

The international dialing digit field **264** includes a code also assigned according to the ITU-T according to the country or location of the user.

The country code field **266** also includes the digit “1” and, in general, includes a number assigned according to the ITU-T to represent the country in which the user is located.

The local area codes field **267** includes a list of area codes that have been assigned by the ITU-T to the geographical area in which the subscriber is located. The caller minimum and maximum local number length fields **268** and **270** hold numbers representing minimum and maximum local number lengths permitted in the area code(s) specified by the contents of the local area codes field **267**. The reseller field **273** is optional and holds a code identifying a retailer of the services, in this embodiment “Klondike”. The maximum number of concurrent calls field **275** holds a code identifying the maximum number of concurrent calls that the user is entitled to cause to concurrently exist. This permits more than one call to occur concurrently while all calls for the user are billed to the same account. The current number of concurrent calls field **277** is initially 0 and is incremented each time a concurrent call associated with the user is initiated and is decremented when a concurrent call is terminated. The area codes associated with the user are the area codes associated with the location code identifier **286** of the contents of the domain field **260**.

A dialing profile of the type shown in FIG. 9 is produced whenever a user registers with the system or agrees to become a subscriber to the system. Thus, for example, a user wishing to subscribe to the system may contact an office maintained by a system operator and personnel in the office may ask the user certain questions about his location and service preferences, whereupon tables can be used to provide office personnel with appropriate information to be entered into the user name **258**, domain **260**, NDD **262**, IDD **264**, country code **266**, local area codes **267**, caller minimum and maximum local length fields **268** and **270** reseller field **273** and concurrent call fields **275** and **277** to establish a dialing profile for the user.

Referring to FIGS. 11 and 12, callee dialing profiles for users in Calgary and London, respectively for example, are shown.

In addition to creating dialing profiles when a user registers with the system, a direct-in-dial (DID) record of the type shown at **278** in FIG. 13 is added to a direct-in-dial bank table in the database (**18** in FIG. 1) to associate the username and a host name of the supernode with which the user is associated, with an E.164 number associated with the user on the PSTN network.

An exemplary DID table record entry for the Calgary callee is shown generally at **300** in FIG. 14. The user name field **281** and user domain field **272** are analogous to the user name and user domain fields **258** and **260** of the caller dialing profile shown in FIG. 10. The contents of the DID field **274** include a E.164 public telephone number including a country code **283**, an area code **285**, an exchange code **287** and a number **289**. If the user has multiple telephone numbers, then multiple records of the type shown at **300**

20

would be included in the DID bank table, each having the same user name and user domain, but different DID field **274** contents reflecting the different telephone numbers associated with that user.

In addition to creating dialing profiles as shown in FIG. 9 and DID records as shown in FIG. 13 when a user registers with the system, call blocking records of the type shown in FIG. 26, call forwarding records of the type shown in FIG. 28 and voicemail records of the type shown in FIG. 30 may be added to the database **18** when a new subscriber is added to the system.

Referring back to FIG. 8A, after retrieving a dialing profile for the caller, such as shown at **276** in FIG. 10, the RC processor circuit **200** is directed to block **256** which directs the processor circuit (**200**) to determine whether the contents of the concurrent call field **277** are less than the contents of the maximum concurrent call field **275** of the dialing profile for the caller and, if so, block **271** directs the processor circuit to increment the contents of the concurrent call field **277**. If the contents of concurrent call field **277** are equal to or greater than the contents of the maximum concurrent call field **275**, block **259** directs the processor circuit **200** to send an error message back to the call controller (**14**) to cause the call controller to notify the caller that the maximum number of concurrent calls has been reached and no further calls can exist concurrently, including the presently requested call.

Assuming block **256** allows the call to proceed, the RC processor circuit **200** is directed to perform certain checks on the callee identifier provided by the contents of the callee field **154** in FIG. 6, of the RC request message **150**. These checks are shown in greater detail in FIG. 8B.

Referring to FIG. 8B, the processor (**202** in FIG. 7) is directed to a first block **257** that causes it to determine whether a digit pattern of the callee identifier (**154**) provided in the RC request message (**150**) includes a pattern that matches the contents of the international dialing digits (IDD) field **264** in the caller profile shown in FIG. 10. If so, then block **259** directs the processor (**202**) to set a call type code identifier variable maintained by the processor to indicate that the call is an international call and block **261** directs the processor to produce a reformatted callee identifier by reformatting the callee identifier into a predefined digit format. In this embodiment, this is done by removing the pattern of digits matching the IDD field contents **264** of the caller dialing profile to effectively shorten the callee identifier. Then, block **263** directs the processor **202** to determine whether or not the callee identifier has a length which meets criteria establishing it as a number compliant with the E.164 Standard set by the ITU. If the length does not meet this criteria, block **265** directs the processor **202** to send back to the call controller (**14**) a message indicating the length is not correct. The process is then ended. At the call controller **14**, routines (not shown) stored in the program memory **104** may direct the processor (**102** of FIG. 4) to respond to the incorrect length message by transmitting a message back to the telephone (**12** shown in FIG. 1) to indicate that an invalid number has been dialed.

Still referring to FIG. 8B, if the length of the amended callee identifier meets the criteria set forth at block **263**, block **269** directs the processor (**202** of FIG. 7) to make a database request to determine whether or not the amended callee identifier is found in a record in the direct-in-dial bank (DID) table. Referring back to FIG. 8B, at block **269**, if the processor **202** receives a response from the database indicating that the reformatted callee identifier produced at block **261** is found in a record in the DID bank table, then

US 9,948,549 B2

21

the callee is a subscriber to the system and the call is classified as a private network call by directing the processor to block 279 which directs the processor to copy the contents of the corresponding user name field (281 in FIG. 14) from the callee DID bank table record (300 in FIG. 14) into the callee ID buffer (211 in FIG. 7). Thus, the processor 202 locates a subscriber user name associated with the reformatted callee identifier. The processor 202 is then directed to point B in FIG. 8A.

Subscriber to Subscriber Calls Between Different Nodes

Referring to FIG. 8A, block 280 directs the processor (202 of FIG. 7) to execute a process to determine whether or not the node associated with the reformatted callee identifier is the same node that is associated with the caller identifier. To do this, the processor 202 determines whether or not a prefix (e.g., continent code 61) of the callee name held in the callee ID buffer (211 in FIG. 7), is the same as the corresponding prefix of the caller name held in the username field 258 of the caller dialing profile shown in FIG. 10. If the corresponding prefixes are not the same, block 302 in FIG. 8A directs the processor (202 in FIG. 7) to set a call type flag in the buffer memory (207 in FIG. 7) to indicate the call is a cross-domain call. Then, block 350 of FIG. 8A directs the processor (202 of FIG. 7) to produce a routing message identifying an address on the private network with which the callee identified by the contents of the callee ID buffer is associated and to set a time to live for the call at a maximum value of 99999, for example.

Thus the routing message includes a caller identifier, a call identifier set according to a username associated with the located DID bank table record and includes an identifier of a node on the private network with which the callee is associated.

The node in the system with which the callee is associated is determined by using the callee identifier to address a supernode table having records of the type as shown at 370 in FIG. 17. Each record 370 has a prefix field 372 and a supernode address field 374. The prefix field 372 includes the first n digits of the callee identifier. In this embodiment n=2. The supernode address field 374 holds a code representing the IP address or a fully qualified domain name of the node associated with the code stored in the callee identifier prefix field 372. Referring to FIG. 18, for example, if the prefix is 20, the supernode address associated with that prefix is sp.yvr.digifonica.com.

Referring to FIG. 15, a generic routing message is shown generally at 352 and includes an optional supplier prefix field 354, and optional delimiter field 356, a callee user name field 358, at least one route field 360, a time to live field 362 and other fields 364. The optional supplier prefix field 354 holds a code for identifying supplier traffic. The optional delimiter field 356 holds a symbol that delimits the supplier prefix code from the callee user name field 358. In this embodiment, the symbol is a number sign (#). The route field 360 holds a domain name or IP address of a gateway or node that is to carry the call, and the time to live field 362 holds a value representing the number of seconds the call is permitted to be active, based on subscriber available minutes and other billing parameters.

Referring to FIG. 8A and FIG. 16, an example of a routing message produced by the processor at block 350 for a caller associated with a different node than the caller is shown generally at 366 and includes only a callee field 359, a route field 361 and a time to live field 362.

Referring to FIG. 8A, having produced a routing message as shown in FIG. 16, block 381 directs the processor (202 of

22

FIG. 7) to send the routing message shown in FIG. 16 to the call controller 14 shown in FIG. 1.

Referring back to FIG. 8B, if at block 257, the callee identifier stored in the callee id buffer (211 in FIG. 7) does not begin with an international dialing digit, block 380 directs the processor (202) to determine whether or not the callee identifier begins with the same national dial digit code as assigned to the caller. To do this, the processor (202) is directed to refer to the retrieved caller dialing profile as shown in FIG. 10. In FIG. 10, the national dialing digit code 262 is the number 1. Thus, if the callee identifier begins with the number 1, then the processor (202) is directed to block 382 in FIG. 8B.

Block 382 directs the processor (202 of FIG. 7) to examine the callee identifier to determine whether or not the digits following the NDD digit identify an area code that is the same as any of the area codes identified in the local area codes field 267 of the caller dialing profile 276 shown in FIG. 10. If not, block 384 of FIG. 8B directs the processor 202 to set the call type flag to indicate that the call is a national call. If the digits following the NDD digit identify an area code that is the same as a local area code associated with the caller as indicated by the caller dialing profile, block 386 directs the processor 202 to set the call type flag to indicate a local call, national style. After executing blocks 384 or 386, block 388 directs the processor 202 to format the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier by removing the national dialed digit and prepending a caller country code identified by the country code field 266 of the caller dialing profile shown in FIG. 10. The processor (202) is then directed to block 263 of FIG. 8B to perform other processing as already described above.

If at block 380, the callee identifier does not begin with a national dialed digit, block 390 directs the processor (202) to determine whether the callee identifier begins with digits that identify the same area code as the caller. Again, the reference for this is the retrieved caller dialing profile shown in FIG. 10. The processor (202) determines whether or not the first few digits of the callee identifier identify an area code corresponding to the local area code field 267 of the retrieved caller dialing profile. If so, then block 392 directs the processor 202 to set the call type flag to indicate that the call is a local call and block 394 directs the processor (202) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending the caller country code to the callee identifier, the caller country code being determined from the country code field 266 of the retrieved caller dialing profile shown in FIG. 10. The processor (202) is then directed to block 263 for further processing as described above.

Referring back to FIG. 8B, at block 390, the callee identifier does not start with the same area code as the caller, block 396 directs the processor (202 of FIG. 7) to determine whether the number of digits in the callee identifier, i.e. the length of the callee identifier, is within the range of digits indicated by the caller minimum local number length field 268 and the caller maximum local number length field 270 of the retrieved caller dialing profile shown in FIG. 10. If so, then block 398 directs the processor (202) to set the call type flag to indicate a local call and block 400 directs the processor (202) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending to the callee identifier the caller country code (as indicated by the country code field 266 of the retrieved caller dialing profile shown in FIG. 10) followed by the caller area code (as indicated by the local area code

US 9,948,549 B2

23

field **267** of the caller profile shown in FIG. **10**). The processor (**202**) is then directed to block **263** of FIG. **8B** for further processing as described above.

Referring back to FIG. **8B**, if at block **396**, the callee identifier has a length that does not fall within the range specified by the caller minimum local number length field (**268** in FIG. **10**) and the caller maximum local number length field (**270** in FIG. **10**), block **402** directs the processor **202** of FIG. **7** to determine whether or not the callee identifier identifies a valid user name. To do this, the processor **202** searches through the database (**18** of FIG. **10**) of dialing profiles to find a dialing profile having user name field contents (**258** in FIG. **10**) that match the callee identifier. If no match is found, block **404** directs the processor (**202**) to send an error message back to the call controller (**14**). If at block **402**, a dialing profile having a user name field **258** that matches the callee identifier is found, block **406** directs the processor **202** to set the call type flag to indicate that the call is a private network call and then the processor is directed to block **280** of FIG. **8A**. Thus, the call is classified as a private network call when the callee identifier identifies a subscriber to the private network.

From FIG. **8B**, it will be appreciated that there are certain groups of blocks of codes that direct the processor **202** in FIG. **7** to determine whether the callee identifier has certain features such as an international dialing digit, a national dialing digit, an area code and a length that meet certain criteria, and cause the processor **202** to reformat the callee identifier stored in the callee id buffer **211**, as necessary into a predetermined target format including only a country code, area code, and a normal telephone number, for example, to cause the callee identifier to be compatible with the E.164 number plan standard in this embodiment. This enables block **269** in FIG. **8B** to have a consistent format of callee identifiers for use in searching through the DID bank table records of the type shown in FIG. **13** to determine how to route calls for subscriber to subscriber calls on the same system. Effectively, therefore blocks **257**, **380**, **390**, **396** and **402** establish call classification criteria for classifying the call as a public network call or a private network call. Block **269** classifies the call, depending on whether or not the formatted callee identifier has a DID bank table record and this depends on how the call classification criteria are met and block **402** directs the processor **202** of FIG. **7** to classify the call as a private network call when the callee identifier complies with a pre-defined format, i.e. is a valid user name and identifies a subscriber to the private network, after the callee identifier has been subjected to the classification criteria of blocks **257**, **380**, **390** and **396**.

Subscriber to Non-Subscriber Calls

Not all calls will be subscriber to subscriber calls and this will be detected by the processor **202** of FIG. **7** when it executes block **269** in FIG. **8B**, and does not find a DID bank table record that is associated with the callee, in the DID bank table. When this occurs, the call is classified as a public network call by directing the processor **202** to block **408** of FIG. **8B** which causes it to set the contents of the callee id buffer **211** of FIG. **7** equal to the newly formatted callee identifier, i.e., a number compatible with the E.164 standard. Then, block **410** of FIG. **8B** directs the processor (**202**) to search a database of route or master list records associating route identifiers with dialing codes shown in FIG. **19** to locate a router having a dialing code having a number pattern matching at least a portion of the reformatted callee identifier.

Referring to FIG. **19**, a data structure for a master list or route list record is shown. Each master list record includes

24

a master list ID field **500**, a dialing code field **502**, a country code field **504**, a national sign number field **506**, a minimum length field **508**, a maximum length field **510**, a national dialed digit field **512**, an international dialed digit field **514** and a buffer rate field **516**.

The master list ID field **500** holds a unique code such as **1019**, for example, identifying the record. The dialing code field **502** holds a predetermined number pattern that the processor **202** of FIG. **7** uses at block **410** in FIG. **8B** to find the master list record having a dialing code matching the first few digits of the amended callee identifier stored in the callee id buffer **211**. The country code field **504** holds a number representing the country code associated with the record and the national sign number field **506** holds a number representing the area code associated with the record. (It will be observed that the dialing code is a combination of the contents of the country code field **504** and the national sign number field **506**.) The minimum length field **508** holds a number representing the minimum length of digits associated with the record and the maximum length field **510** holds a number representing the maximum number of digits in a number with which the record may be compared. The national dialed digit (NDD) field **512** holds a number representing an access code used to make a call within the country specified by the country code, and the international dialed digit (IDD) field **514** holds a number representing the international prefix needed to dial a call from the country indicated by the country code.

Thus, for example, a master list record may have a format as shown in FIG. **20** with exemplary field contents as shown.

Referring back to FIG. **8B**, using the country code and area code portions of the reformatted callee identifier stored in the callee id buffer **211**, block **410** directs the processor **202** of FIG. **7** to find a master list record such as the one shown in FIG. **20** having a dialing code that matches the country code (**1**) and area code (**604**) of the callee identifier. Thus, in this example, the processor (**202**) would find a master list record having an ID field containing the number **1019**. This number may be referred to as a route ID. Thus, a route ID number is found in the master list record associated with a predetermined number pattern in the reformatted callee identifier.

After executing block **410** in FIG. **8B**, the process continues as shown in FIG. **8D**. Referring to FIG. **8D**, block **412** directs the processor **202** of FIG. **7** to use the route ID number to search a database of supplier records associating supplier identifiers with route identifiers to locate at least one supplier record associated with the route identifier to identify at least one supplier operable to supply a communications link for the route.

Referring to FIG. **21**, a data structure for a supplier list record is shown. Supplier list records include a supplier ID field **540**, a master list ID field **542**, an optional prefix field **544**, a specific route identifier field **546**, a NDD/IDD rewrite field **548**, a rate field **550**, and a timeout field **551**. The supplier ID field **540** holds a code identifying the name of the supplier and the master list ID field **542** holds a code for associating the supplier record with a master list record. The prefix field **544** holds a string used to identify the supplier traffic and the specific route identifier field **546** holds an IP address of a gateway operated by the supplier indicated by the supplier ID field **540**. The NDD/IDD rewrite field **548** holds a code representing a rewritten value of the NDD/IDD associated with this route for this supplier, and the rate field **550** holds a code indicating the cost per second to the system operator to use the route provided by the gateway specified by the contents of the route identifier field **546**. The timeout

US 9,948,549 B2

25

field **551** holds a code indicating a time that the call controller should wait for a response from the associated gateway before giving up and trying the next gateway. This time value may be in seconds, for example. Exemplary supplier records are shown in FIGS. **22**, **23** and **24** for the exemplary suppliers shown at **20** in FIG. **1**, namely Telus, Shaw and Sprint.

Referring back to FIG. **8D**, at block **412** the processor **202** finds all supplier records that identify the master list ID found at block **410** of FIG. **8B**.

Referring back to FIG. **8D**, block **560** directs the processor **202** of FIG. **7** to begin to produce a routing message of the type shown in FIG. **15**. To do this, the processor **202** loads a routing message buffer as shown in FIG. **25** with a supplier prefix of the least costly supplier where the least costly supplier is determined from the rate fields **550** of FIG. **21** of the records associated with respective suppliers.

Referring to FIGS. **22-24**, in the embodiment shown, the supplier "Telus" has the lowest number in the rate field **550** and therefore the prefix **4973** associated with that supplier is loaded into the routing message buffer shown in FIG. **25** first. Block **562** in FIG. **8D** directs the processor to delimit the prefix **4973** by the number sign (#) and to next load the reformatted callee identifier into the routing message buffer shown in FIG. **25**. At block **563** of FIG. **8D**, the contents of the route identifier field **546** of FIG. **21** of the record associated with the supplier "Telus" are added by the processor **202** of FIG. **7** to the routing message buffer shown in FIG. **25** after an @ sign delimiter, and then block **564** in FIG. **8D** directs the processor to get a time to live value, which in one embodiment may be 3600 seconds, for example. Block **566** then directs the processor **202** to load this time to live value and the timeout value (**551**) in FIG. **21** in the routing message buffer of FIG. **25**. Accordingly, a first part of the routing message for the Telus gateway is shown generally at **570** in FIG. **25**.

Referring back to FIG. **8D**, block **571** directs the processor **202** back to block **560** and causes it to repeat blocks **560**, **562**, **563**, **564** and **566** for each successive supplier until the routing message buffer is loaded with information pertaining to each supplier identified by the processor at block **412**. Thus, a second portion of the routing message as shown at **572** in FIG. **25** relates to the second supplier identified by the record shown in FIG. **23**. Referring back to FIG. **25**, a third portion of the routing message as shown at **574** and is associated with a third supplier as indicated by the supplier record shown in FIG. **24**.

Consequently, referring to FIG. **25**, the routing message buffer holds a routing message identifying a plurality of different suppliers able to provide gateways to the public telephone network (i.e. specific routes) to establish at least part of a communication link through which the caller may contact the callee. In this embodiment, each of the suppliers is identified, in succession, according to rate. Other criteria for determining the order in which suppliers are listed in the routing message may include preferred supplier priorities which may be established based on service agreements, for example. Referring back to FIG. **8D**, block **568** directs the processor **202** of FIG. **7** to send the routing message shown in FIG. **25** to the call controller **14** in FIG. **1**.

Subscriber to Subscriber Calls within the Same Node

Referring back to FIG. **8A**, if at block **280**, the callee identifier received in the RC request message has a prefix that identifies the same node as that associated with the caller, block **600** directs the processor **202** to use the callee identifier in the callee id buffer **211** to locate and retrieve a dialing profile for the callee. The dialing profile may be of

26

the type shown in FIG. **11** or **12**, for example. Block **602** of FIG. **8A** then directs the processor **202** of FIG. **7** to get call block, call forward and voicemail records from the database **18** of FIG. **1** based on the user name identified in the callee dialing profile retrieved by the processor at block **600**. Call block, call forward and voicemail records may be as shown in FIGS. **26**, **27**, **28** and **30** for example.

Referring to FIG. **26**, the call block records include a user name field **604** and a block pattern field **606**. The user name field holds a user name corresponding to the user name in the user name field (**258** in FIG. **10**) of the callee profile and the block pattern field **606** holds one or more E.164-compatible numbers or user names identifying PSTN numbers or system subscribers from whom the subscriber identified in the user name field **604** does not wish to receive calls.

Referring to FIG. **8A** and FIG. **27**, block **608** directs the processor **202** of FIG. **7** to determine whether or not the caller identifier received in the RC request message matches a block pattern stored in the block pattern field **606** of the call block record associated with the callee identified by the contents of the user name field **604** in FIG. **26**. If the caller identifier matches a block pattern, block **610** directs the processor to send a drop call or non-completion message to the call controller (**14**) and the process is ended. If the caller identifier does not match a block pattern associated with the callee, block **609** directs the processor to store the username and domain of the callee, as determined from the callee dialing profile, and a time to live value in the routing message buffer as shown at **650** in FIG. **32**. Referring back to FIG. **8A**, block **612** then directs the processor **202** to determine whether or not call forwarding is required.

Referring to FIG. **28**, the call forwarding records include a user name field **614**, a destination number field **616**, and a sequence number field **618**. The user name field **614** stores a code representing a user with which the record is associated. The destination number field **616** holds a user name representing a number to which the current call should be forwarded, and the sequence number field **618** holds an integer number indicating the order in which the user name associated with the corresponding destination number field **616** should be attempted for call forwarding. The call forwarding table may have a plurality of records for a given user. The processor **202** of FIG. **7** uses the contents of the sequence number field **618** to place the records for a given user in order. As will be appreciated below, this enables the call forwarding numbers to be tried in an ordered sequence.

Referring to FIG. **8A** and FIG. **29**, if at block **612**, the call forwarding record for the callee identified by the callee identifier contains no contents in the destination number field **616** and accordingly no contents in the sequence number field **618**, there are no call forwarding entries for this callee, and the processor **202** is directed to block **620** in FIG. **8C**. If there are entries in the call forwarding table **27**, block **622** in FIG. **8A** directs the processor **202** to search the dialing profile table to find a dialing profile record as shown in FIG. **9**, for the user identified by the destination number field **616** of the call forward record shown in FIG. **28**. The processor **202** of FIG. **7** is further directed to store the username and domain for that user and a time to live value in the routing message buffer as shown at **652** in FIG. **32**, to produce a routing message as illustrated. This process is repeated for each call forwarding record associated with the callee identified by the callee id buffer **211** in FIG. **7** to add to the routing message buffer all call forwarding usernames and domains associated with the callee.

Referring back to FIG. **8A**, if at block **612** there are no call forwarding records, then at block **620** in FIG. **8C** the

US 9,948,549 B2

27

processor 202 is directed to determine whether or not the user identified by the callee identifier has paid for voicemail service. This is done by checking to see whether or not a flag is set in a voicemail record of the type shown in FIG. 30 in a voicemail table stored in the database 18 shown in FIG. 1.

Referring to FIG. 30, voicemail records in this embodiment may include a user name field 624, a voicemail server field 626, a seconds to voicemail field 628 and an enable field 630. The user name field 624 stores the user name of the callee. The voicemail server field 626 holds a code identifying a domain name of a voicemail server associated with the user identified by the user name field 624. The seconds to voicemail field 628 holds a code identifying the time to wait before engaging voicemail, and the enable field 630 holds a code representing whether or not voicemail is enabled for the user. Referring back to FIG. 8C, at block 620 if the processor 202 of FIG. 7 finds a voicemail record as shown in FIG. 30 having user name field 624 contents matching the callee identifier, the processor is directed to examine the contents of the enabled field 630 to determine whether or not voicemail is enabled. If voicemail is enabled, then block 640 in FIG. 8C directs the processor 202 to FIG. 7 to store the contents of the voicemail server field 626 and the contents of the seconds to voicemail field 628 in the routing message buffer, as shown at 654 in FIG. 32. Block 642 then directs the processor 202 to get time to live values for each path specified by the routing message according to the cost of routing and the user's balance. These time to live values are then appended to corresponding paths already stored in the routing message buffer.

Referring back to FIG. 8C, block 644 then directs the processor 202 of FIG. 7 to store the IP address of the current node in the routing message buffer as shown at 656 in FIG. 32. Block 646 then directs the processor 202 to send the routing message shown in FIG. 32 to the call controller 14 in FIG. 1. Thus in the embodiment described the routing controller will produce a routing message that will cause at least one of the following: forward the call to another party, block the call and direct the caller to a voicemail server.

Referring back to FIG. 1, the routing message whether of the type shown in FIG. 16, 25 or 32, is received at the call controller 14 and the call controller interprets the receipt of the routing message as a request to establish a call.

Referring to FIG. 4, the program memory 104 of the call controller 14 includes a routing to gateway routine depicted generally at 122.

Where a routing message of the type shown in FIG. 32 is received by the call controller 14, the routing to gateway routine 122 shown in FIG. 4 may direct the processor 102 to cause a message to be sent back through the internet 13 shown in FIG. 1 to the callee telephone 15, knowing the IP address of the callee telephone 15 from the user name.

Alternatively, if the routing message is of the type shown in FIG. 16, which identifies a domain associated with another node in the system, the call controller may send a SIP invite message along the high speed backbone 17 connected to the other node. The other node functions as explained above, in response to receipt of a SIP invite message.

If the routing message is of the type shown in FIG. 25 where there are a plurality of gateway suppliers available, the call controller sends a SIP invite message to the first supplier, in this case Telus, using a dedicated line or an internet connection to determine whether or not Telus is able to handle the call. If the Telus gateway returns a message indicating it is not able to handle the call, the call controller 14 then proceeds to send a SIP invite message to the next

28

supplier, in this case Shaw. The process is repeated until one of the suppliers responds indicating that it is available to carry the call. Once a supplier responds indicating that it is able to carry the call, the supplier sends back to the call controller 14 an IP address for a gateway provided by the supplier through which the call or audio path of the call will be carried. This IP address is sent in a message from the call controller 14 to the media relay 9 which responds with a message indicating an IP address to which the caller telephone should send its audio/video, traffic and an IP address to which the gateway should send its audio/video for the call. The call controller conveys the IP address at which the media relay expects to receive audio/video from the caller telephone, to the caller telephone 12 in a message. The caller telephone replies to the call controller with an IP address at which it would like to receive audio/video and the call controller conveys that IP address to the media relay. The call may then be conducted between the caller and callee through the media relay and gateway.

Referring back to FIG. 1, if the call controller 14 receives a routing message of the type shown in FIG. 32, and which has at least one call forwarding number and/or a voicemail number, the call controller attempts to establish a call to the callee telephone 15 by seeking from the callee telephone a message indicating an IP address to which the media relay should send audio/video. If no such message is received from the callee telephone, no call is established. If no call is established within a pre-determined time, the call controller 14 attempts to establish a call with the next user identified in the call routing message in the same manner. This process is repeated until all call forwarding possibilities have been exhausted, in which case the call controller communicates with the voicemail server 19 identified in the routing message to obtain an IP address to which the media relay should send audio/video and the remainder of the process mentioned above for establishing IP addresses at the media relay 9 and the caller telephone is carried out to establish audio/video paths to allowing the caller to leave a voicemail message with the voicemail server.

When an audio/video path through the media relay is established, a call timer maintained by the call controller 14 logs the start date and time of the call and logs the call ID and an identification of the route (i.e., audio/video path IP address) for later use in billing.

Time to Live

Referring to FIGS. 33A and 33B, a process for determining a time to live value for any of blocks 642 in FIG. 8C, 350 in FIG. 8A or 564 in FIG. 8D above is described. The process is executed by the processor 202 shown in FIG. 7. Generally, the process involves calculating a cost per unit time, calculating a first time value as a sum of a free time attributed to a participant in the communication session and the quotient of a funds balance held by the participant to the cost per unit time value and producing a second time value in response to the first time value and a billing pattern associated with the participant, the billing pattern including first and second billing intervals and the second time value being the time to permit a communication session to be conducted.

Referring to FIG. 33A, in this embodiment, the process begins with a first block 700 that directs the RC processor to determine whether or not the call type set at block 302 in FIG. 8A indicates the call is a network or cross-domain call. If the call is a network or cross-domain call, block 702 of FIG. 33A directs the RC processor to set the time to live equal to 99999 and the process is ended. Thus, the network or cross-domain call type has a long time to live. If at block

US 9,948,549 B2

29

700 the call type is determined not to be a network or cross-domain type, block 704 directs the RC processor to get a subscriber bundle table record from the database 18 in FIG. 1 and store it locally in the subscriber bundle record buffer at the RC 14.

Referring to FIG. 34, a subscriber bundle table record is shown generally at 706. The record includes a user name field 708 and a services field 710. The user name field 708 holds a code identifying the subscriber user name and the services field 710 holds codes identifying service features assigned to the subscriber, such as free local calling, call blocking and voicemail, for example.

FIG. 35 shows an exemplary subscriber bundle record for the Vancouver caller. In this record the user name field 708 is loaded with the user name 2001 1050 8667 and the services field 710 is loaded with codes 10, 14 and 16 corresponding to free local calling, call blocking and voicemail, respectively. Thus, user 2001 1050 8667 has free local calling, call blocking and voicemail features.

Referring back to FIG. 33A, after having loaded a subscriber bundle record into the subscriber bundle record buffer, block 712 directs the RC processor to search the database (18) to determine whether or not there is a bundle override table record for the master list ID value that was determined at block 410 in FIG. 8B. An exemplary bundle override table record is shown at 714 in FIG. 36. The bundle table record includes a master list ID field 716, an override type field 718, an override value field 720 a first interval field 722 and a second interval field 724. The master list ID field 716 holds a master list ID code. The override type field 718 holds an override type code indicating a fixed, percent or cent amount to indicate the amount by which a fee will be increased. The override value field 720 holds a real number representing the value of the override type. The first interval field 722 holds a value indicating the minimum number of seconds for a first level of charging and the second interval field 724 holds a number representing a second level of charging.

Referring to FIG. 37, a bundle override record for the located master list ID code is shown generally at 726 and includes a master list ID field 716 holding the code 1019 which was the code located in block 410 of FIG. 8B. The override type field 718 includes a code indicating the override type is a percentage value and the override value field 720 holds the value 10.0 indicating that the override will be 10.0% of the charged value. The first interval field 722 holds a value representing 30 seconds and the second interval field 724 holds a value representing 6 seconds. The 30 second value in the first interval field 722 indicates that charges for the route will be made at a first rate for 30 seconds and thereafter the charges will be made at a different rate in increments of 6 seconds, as indicated by the contents of the second interval field 724.

Referring back to FIG. 33A, if at block 712 the processor finds a bundle override record of the type shown in FIG. 37, block 728 directs the processor to store the bundle override record in local memory. In the embodiment shown, the bundle override record shown in FIG. 37 is stored in the bundle override record buffer at the RC as shown in FIG. 7. Still referring to FIG. 33A, block 730 then directs the RC processor to determine whether or not the subscriber bundle table record 706 in FIG. 35 has a services field including a code identifying that the user is entitled to free local calling and also directs the processor to determine whether or not the call type is not a cross domain cell, i.e. it is a local or local/national style. If both of these conditions are satisfied, block 732 directs the processor to set the time to live equal

30

to 99999, giving the user a long period of time for the call. The process is then ended. If the conditions associated with block 730 are not satisfied, block 734 of FIG. 33B directs the RC processor to retrieve a subscriber account record associated with a participant in the call. This is done by copying and storing in the subscriber account record buffer a subscriber account record for the caller.

Referring to FIG. 38, an exemplary subscriber account table record is shown generally at 736. The record includes a user name field 738, a funds balance field 740 and a free time field 742. The user name field 738 holds a subscriber user name, the funds balance field 740 holds a real number representing the dollar value of credit available to the subscriber and the free time field 742 holds an integer representing the number of free seconds that the user is entitled to.

An exemplary subscriber account record for the Vancouver caller is shown generally at 744 in FIG. 39, wherein the user name field 738 holds the user name 2001 1050 8667, the funds balance field 740 holds the value \$10.00, and the free time field 742 holds the value 100. The funds balance field holding the value of \$10.00 indicates the user has \$10.00 worth of credit and the free time field having the value of 100 indicates that the user has a balance of 100 free seconds of call time.

Referring back to FIG. 33B, after copying and storing the subscriber account record shown in FIG. 39 from the database to the subscriber account record buffer RC, block 746 directs the processor to determine whether or not the subscriber account record funds balance field 740 or free time field 742 are greater than zero. If they are not greater than zero, block 748 directs the processor to set the time to live equal to zero and the process is ended. The RC then sends a message back to the call controller to cause the call controller to deny the call to the caller. If the conditions associated with block 746 are satisfied, block 750 directs the processor to calculate the call cost per unit time. A procedure for calculating the call cost per unit time is described below in connection with FIG. 41.

Assuming the procedure for calculating the cost per second returns a number representing the call cost per second, block 752 directs the processor 202 in FIG. 7 to determine whether or not the cost per second is equal to zero. If so, block 754 directs the processor to set the time to live to 99999 to give the caller a very long length of call and the process is ended.

If at block 752 the call cost per second is not equal to zero, block 756 directs the processor 202 in FIG. 7 to calculate a first time to live value as a sum of a free time attributed to the participant in the communication session and the quotient of the funds balance held by the participant to the cost per unit time value. To do this, the processor 202 of FIG. 7 is directed to set a first time value or temporary time to live value equal to the sum of the free time provided in the free time field 742 of the subscriber account record shown in FIG. 39 and the quotient of the contents of the funds balance field 740 in the subscriber account record for the call shown in FIG. 39 and the cost per second determined at block 750 of FIG. 33B. Thus, for example, if at block 750 the cost per second is determined to be three cents per second and the funds balance field holds the value \$10.00, the quotient of the funds balance and cost per second is 333 seconds and this is added to the contents of the free time field 742, which is 100, resulting in a time to live of 433 seconds.

Block 758 then directs the RC processor to produce a second time value in response to the first time value and the billing pattern associated with the participant as established

US 9,948,549 B2

31

by the bundle override record shown in FIG. 37. This process is shown in greater detail at 760 in FIG. 40 and generally involves producing a remainder value representing a portion of the second billing interval remaining after dividing the second billing interval into a difference between the first time value and the first billing interval.

Referring to FIG. 40, the process for producing the second time value begins with a first block 762 that directs the processor 202 in FIG. 7 to set a remainder value equal to the difference between the time to live value calculated at block 756 in FIG. 33B and the contents of the first interval field 722 of the record shown in FIG. 37 modulus the contents of the second interval field 724 of FIG. 37. Thus, in the example given, the difference between the time to live field and the first interval field is 433 minus 30, which is 403 and therefore the remainder produced by 403 divided by 6 is 1. Block 764 then directs the processor to determine whether or not this remainder value is greater than zero and, if so, block 766 directs the processor to subtract the remainder from the first time value and set the difference as the second time value. To do this the processor is directed to set the time to live value equal to the current time to live of 433 minus the remainder of 1, i.e., 432 seconds. The processor is then returned back to block 758 of FIG. 33B.

Referring back to FIG. 40, if at block 764 the remainder is not greater than zero, block 768 directs the processor 202 of FIG. 7 to determine whether or not the time to live is less than the contents of the first interval field 722 in the record shown in FIG. 37. If so, then block 770 of FIG. 40 directs the processor to set the time to live equal to zero. Thus, the second time value is set to zero when the remainder is not greater than zero and the first time value is less than the first billing interval. If at block 768 the conditions of that block are not satisfied, the processor returns the first time to live value as the second time to live value.

Thus, referring to FIG. 33B, after having produced a second time to live value, block 772 directs the processor to set the time to live value for use in blocks 642, 350 or 564. Cost Per Second

Referring back to FIG. 33B, at block 750 it was explained that a call cost per unit time is calculated. The following explains how that call cost per unit time value is calculated.

Referring to FIG. 41, a process for calculating a cost per unit time is shown generally at 780. The process is executed by the processor 202 in FIG. 7 and generally involves locating a record in a database, the record comprising a markup type indicator, a markup value and a billing pattern and setting a reseller rate equal to the sum of the markup value and the buffer rate, locating at least one of an override record specifying a route cost per unit time amount associated with a route associated with the communication session, a reseller record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default operator markup record specifying a default cost per unit time and setting as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time.

The process begins with a first set of blocks 782, 802 and 820 which direct the processor 202 in FIG. 7 to locate at least one of a record associated with a reseller and a route associated with the reseller, a record associated with the reseller, and a default reseller mark-up record. Block 782, in particular, directs the processor to address the database 18 to look for a record associated with a reseller and a route with

32

the reseller by looking for a special rate record based on the master list ID established at block 410 in FIG. 8B.

Referring to FIG. 42, a system operator special rate table record is shown generally at 784. The record includes a reseller field 786, a master list ID field 788, a mark-up type field 790, a mark-up value field 792, a first interval field 794 and a second interval field 796. The reseller field 786 holds a reseller ID code and the master list ID field 788 holds a master list ID code. The mark-up type field 790 holds a mark-up type such as fixed percent or cents and the mark-up value field 792 holds a real number representing the value corresponding to the mark-up type. The first interval field 794 holds a number representing a first level of charging and the second interval field 796 holds a number representing a second level of charging.

An exemplary system operator special rate table for a reseller known as "Klondike" is shown at 798 in FIG. 43. In this record, the reseller field 786 holds a code indicating the retailer ID is Klondike, the master list ID field 788 holds the code 1019 to associate the record with the master list ID code 1019. The mark-up type field 790 holds a code indicating the mark-up type is cents and the mark-up value field 792 holds a mark-up value indicating $\frac{1}{10}$ of one cent. The first interval field 794 holds the value 30 and the second interval field 796 holds the value 6, these two fields indicating that the operator allows 30 seconds for free and then billing is done in increments of 6 seconds after that.

Referring back to FIG. 41, if at block 782 a record such as the one shown in FIG. 43 is located in the system operator special rates table, the processor is directed to block 800 in FIG. 41. If such a record is not found in the system operator special rates table, block 802 directs the processor to address the database 18 to look in a system operator mark-up table for a mark-up record associated with the reseller.

Referring to FIG. 44, an exemplary system operator mark-up table record is shown generally at 804. The record includes a reseller field 806, a mark-up type field 808, a mark-up value field 810, a first interval field 812 and a second interval field 814. The reseller mark-up type, mark-up value, first interval and second interval fields are as described in connection with the fields by the same names in the system operator special rates table shown in FIG. 42.

FIG. 45 provides an exemplary system operator mark-up table record for the reseller known as Klondike and therefore the reseller field 806 holds the value "Klondike", the mark-up type field 808 holds the value cents, the mark-up value field holds the value 0.01, the first interval field 812 holds the value 30 and the second interval field 814 holds the value 6. This indicates that the reseller "Klondike" charges by the cent at a rate of one cent per minute. The first 30 seconds of the call are free and billing is charged at the rate of one cent per minute in increments of 6 seconds.

FIG. 46 provides an exemplary system operator mark-up table record for cases where no specific system operator mark-up table record exists for a particular reseller, i.e., a default reseller mark-up record. This record is similar to the record shown in FIG. 45 and the reseller field 806 holds the value "all", the mark-up type field 808 is loaded with a code indicating mark-up is based on a percentage, the mark-up value field 810 holds the percentage by which the cost is marked up, and the first and second interval fields 812 and 814 identify first and second billing levels.

Referring back to FIG. 41, if at block 802 a specific mark-up record for the reseller identified at block 782 is not located, block 820 directs the processor to get the mark-up record shown in FIG. 46, having the "all" code in the reseller field 806. The processor is then directed to block 800.

US 9,948,549 B2

33

Referring back to FIG. 41, at block 800, the processor 202 of FIG. 7 is directed to set a reseller rate equal to the sum of the mark-up value of the record located by blocks 782, 802 or 820 and the buffer rate specified by the contents of the buffer rate field 516 of the master list record shown in FIG. 20. To do this, the RC processor sets a variable entitled “reseller cost per second” to a value equal to the sum of the contents of the mark-up value field (792, 810) of the associated record, plus the contents of the buffer rate field (516) from the master list record associated with the master list ID. Then, block 822 directs the processor to set a system operator cost per second variable equal to the contents of the buffer rate field (516) from the master list record. Block 824 then directs the processor to determine whether the call type flag indicates the call is local or national/local style and whether the caller has free local calling. If both these conditions are met, then block 826 sets the user cost per second variable equal to zero and sets two increment variables equal to one, for use in later processing. The cost per second has thus been calculated and the process shown in FIG. 41 is ended.

If at block 824 the conditions of that block are not met, the processor 202 of FIG. 7 is directed to locate at least one of a bundle override table record specifying a route cost per unit time associated with a route associated with the communication session, a reseller special destinations table record associated with a reseller of the communications session, the reseller record specifying a reseller cost per unit time associated with the reseller for the communication session and a default reseller global markup record specifying a default cost per unit time.

To do this block 828 directs the processor 202 of FIG. 7 to determine whether or not the bundle override record 726 in FIG. 37 located at block 712 in FIG. 33A has a master list ID equal to the stored master list ID that was determined at block 410 in FIG. 8B. If not, block 830 directs the processor to find a reseller special destinations table record in a reseller special destinations table in the database (18), having a master list ID code equal to the master list ID code of the master list ID that was determined at block 410 in FIG. 8B. An exemplary reseller special destinations table record is shown in FIG. 47 at 832. The reseller special destinations table record includes a reseller field 834, a master list ID field 836, a mark-up type field 838, a mark-up value field 840, a first interval field 842 and a second interval field 844. This record has the same format as the system operator special rates table record shown in FIG. 42, but is stored in a different table to allow for different mark-up types and values and time intervals to be set according to resellers’ preferences. Thus, for example, an exemplary reseller special destinations table record for the reseller “Klondike” is shown at 846 in FIG. 48. The reseller field 834 holds a value indicating the reseller as the reseller “Klondike” and the master list ID field holds the code 1019. The mark-up type field 838 holds a code indicating the mark-up type is percent and the mark-up value field 840 holds a number representing the mark-up value as 5%. The first and second interval fields identify different billing levels used as described earlier.

Referring back to FIG. 41, the record shown in FIG. 48 may be located at block 830, for example. If at block 830 such a record is not found, then block 832 directs the processor to get a default operator global mark-up record based on the reseller ID.

Referring to FIG. 49, an exemplary default reseller global mark-up table record is shown generally at 848. This record includes a reseller field 850, a mark-up type field 852, a mark-up value field 854, a first interval field 856 and a

34

second interval field 858. The reseller field 850 holds a code identifying the reseller. The mark-up type field 852, the mark-up value field 854 and the first and second interval fields 856 and 858 are of the same type as described in connection with fields of the same name in FIG. 47, for example. The contents of the fields of this record 860 may be set according to system operator preferences, for example.

Referring to FIG. 50, an exemplary reseller global mark-up table record is shown generally at 860. In this record, the reseller field 850 holds a code indicating the reseller is “Klondike”, the mark-up type field 852 holds a code indicating the mark-up type is percent, the mark-up value field 854 holds a value representing 10% as the mark-up value, the first interval field 856 holds the value 30 and the second interval field 858 holds the values 30 and 6 respectively to indicate the first 30 seconds are free and billing is to be done in 6 second increments after that.

Referring back to FIG. 41, should the processor get to block 832, the reseller global mark-up table record as shown in FIG. 50 is retrieved from the database and stored locally at the RC. As seen in FIG. 41, it will be appreciated that if the conditions are met in blocks 828 or 830, or if the processor executes block 832, the processor is then directed to block 862 which causes it to set an override value equal to the contents of the mark-up value field of the located record, to set the first increment variable equal to the contents of the first interval field of the located record and to set the second increment variable equal to the contents of the second interval field of the located record. (The increment variables were alternatively set to specific values at block 826 in FIG. 41.)

It will be appreciated that the located record could be a bundle override record of the type shown in FIG. 37 or the located record could be a reseller special destination record of the type shown in FIG. 48 or the record could be a reseller global mark-up table record of the type shown in FIG. 50. After the override and first and second increment variables have been set at block 862, the processor 202 of FIG. 7 is directed to set as the cost per unit time the sum of the reseller rate and at least one of the route cost per unit time, the reseller cost per unit time and the default cost per unit time, depending on which record was located. To do this, block 864 directs the processor to set the cost per unit time equal to the sum of the reseller cost set at block 800 in FIG. 41, plus the contents of the override variable calculated in block 862 in FIG. 41. The cost per unit time has thus been calculated and it is this cost per unit time that is used in block 752 of FIG. 33B, for example.

Terminating the Call

In the event that either the caller or the callee terminates a call, the telephone of the terminating party sends a SIP bye message to the controller 14. An exemplary SIP bye message is shown at 900 in FIG. 51 and includes a caller field 902, a callee field 904 and a call ID field 906. The caller field 902 holds a twelve digit user name, the callee field 904 holds a PSTN compatible number or user name, and the call ID field 906 holds a unique call identifier field of the type shown in the call ID field 65 of the SIP invite message shown in FIG. 3.

Thus, for example, referring to FIG. 52, a SIP bye message for the Calgary callee is shown generally at 908 and the caller field 902 holds a user name identifying the caller, in this case 2001 1050 8667, the callee field 904 holds a user name identifying the Calgary callee, in this case 2001 1050 2222, and the call ID field 906 holds the code FA10 @ 192.168.0.20, which is the call ID for the call.

US 9,948,549 B2

35

The SIP bye message shown in FIG. 52 is received at the call controller 14 and the call controller executes a process as shown generally at 910 in FIG. 53. The process includes a first block 912 that directs the call controller processor 102 of FIG. 4 to copy the caller, callee and call ID field contents from the SIP bye message received from the terminating party to corresponding fields of an RC stop message buffer (not shown). Block 914 then directs the processor to copy the call start time from the call timer and to obtain a call stop time from the call timer. Block 916 then directs the call controller to calculate a communication session time by determining the difference in time between the call start time and the call stop time. This session time is then stored in a corresponding field of the RC call stop message buffer. Block 917 then directs the processor to decrement the contents of the current concurrent call field 277 of the dialing profile for the caller as shown in FIG. 10, to indicate that there is one less concurrent call in progress. A copy of the amended dialing profile for the caller is then stored in the database 18 of FIG. 1. Block 918 then directs the processor to copy the route from the call log. An RC call stop message produced as described above is shown generally at 1000 in FIG. 54. An RC call stop message specifically associated with the call made to the Calgary callee is shown generally at 1020 in FIG. 55.

Referring to FIG. 54, the RC stop call message includes a caller field 1002, callee field 1004, a call ID field 1006, an account start time field 1008, an account stop time field 1010, a communication session time 1012 and a route field 1014. The caller field 1002 holds a username, the callee field 1004 holds a PSTN-compatible number or system number, the call ID field 1006 hold the unique call identifier received from the SIP invite message shown in FIG. 3, the account start time field 1008 holds the date and start time of the call, the account stop time field 1010 holds the date and time the call ended, the communication session time field 1012 holds a value representing the difference between the start time and the stop time, in seconds, and the route field 1014 holds the IP address for the communications link that was established.

Referring to FIG. 55, an exemplary RC stop call message for the Calgary callee is shown generally at 1020. In this example the caller field 1002 holds the user name 2001 1050 8667 identifying the Vancouver-based caller and the callee field 1004 holds the user name 2001 1050 2222 identifying the Calgary callee. The contents of the call ID field 1006 are FA10@192.168.0.20. The contents of the account start time field 1008 are 2006-12-30 12:12:12 and the contents of the account stop time field are 2006-12-30 12:12:14. The contents of the communication session time field 1012 are 2 to indicate 2 seconds call duration and the contents of the route field are 72.64.39.58.

Referring back to FIG. 53, after having produced an RC call stop message, block 920 directs the processor 102 of FIG. 4 to send the RC stop message compiled in the RC call stop message buffer to the RC 16 of FIG. 1. Block 922 directs the call controller 14 to send a "bye" message back to the party that did not terminate the call.

The RC 16 of FIG. 1 receives the call stop message and an RC call stop message process is invoked at the RC, the process being shown at 950 in FIGS. 56A, 56B and 56C. Referring to FIG. 56A, the RC stop message process 950 begins with a first block 952 that directs the processor 202 in FIG. 7 to determine whether or not the communication session time is less than or equal to the first increment value set by the cost calculation routine shown in FIG. 41, specifically blocks 826 or 862 thereof. If this condition is

36

met, then block 954 of FIG. 56A directs the RC processor to set a chargeable time variable equal to the first increment value set at block 826 or 862 of FIG. 41. If at block 952 of FIG. 56A the condition is not met, block 956 directs the RC processor to set a remainder variable equal to the difference between the communication session time and the first increment value mod the second increment value produced at block 826 or 862 of FIG. 41. Then, the processor is directed to block 958 of FIG. 56A which directs it to determine whether or not the remainder is greater than zero. If so, block 960 directs the RC processor to set the chargeable time variable equal to the difference between the communication session time and the remainder value. If at block 958 the remainder is not greater than zero, block 962 directs the RC processor to set the chargeable time variable equal to the contents of the communication session time from the RC stop message. The processor is then directed to block 964. In addition, after executing block 954 or block 960, the processor is directed to block 964.

Block 964 directs the processor 202 of FIG. 7 to determine whether or not the chargeable time variable is greater than or equal to the free time balance as determined from the free time field 742 of the subscriber account record shown in FIG. 39. If this condition is satisfied, block 966 of FIG. 56A directs the processor to set the free time field 742 in the record shown in FIG. 39, to zero. If the chargeable time variable is not greater than or equal to the free time balance, block 968 directs the RC processor to set a user cost variable to zero and Block 970 then decrements the free time field 742 of the subscriber account record for the caller by the chargeable time amount determined by block 954, 960 or 962.

If at Block 964 the processor 202 of FIG. 7 was directed to Block 966 which causes the free time field (742 of FIG. 39) to be set to zero, referring to FIG. 56B, Block 972 directs the processor to set a remaining chargeable time variable equal to the difference between the chargeable time and the contents of the free time field (742 of FIG. 39). Block 974 then directs the processor to set the user cost variable equal to the product of the remaining chargeable time and the cost per second calculated at Block 750 in FIG. 33B. Block 976 then directs the processor to decrement the funds balance field (740) of the subscriber account record shown in FIG. 39 by the contents of the user cost variable calculated at Block 974.

After completing Block 976 or after completing Block 970 in FIG. 56A, block 978 of FIG. 56B directs the processor 202 of FIG. 7 to calculate a reseller cost variable as the product of the reseller rate as indicated in the mark-up value field 810 of the system operator mark-up table record shown in FIG. 45 and the communication session time determined at Block 916 in FIG. 53. Then, Block 980 of FIG. 56B directs the processor to add the reseller cost to the reseller balance field 986 of a reseller account record of the type shown in FIG. 57 at 982.

The reseller account record includes a reseller ID field 984 and the aforementioned reseller balance field 986. The reseller ID field 984 holds a reseller ID code, and the reseller balance field 986 holds an accumulated balance of charges.

Referring to FIG. 58, a specific reseller accounts record for the reseller "Klondike" is shown generally at 988. In this record the reseller ID field 984 holds a code representing the reseller "Klondike" and the reseller balance field 986 holds a balance of \$100.02. Thus, the contents of the reseller balance field 986 in FIG. 58 are incremented by the reseller cost calculated at block 978 of FIG. 56B.

US 9,948,549 B2

37

Still referring to FIG. 56B, after adding the reseller cost to the reseller balance field as indicated by Block 980, Block 990 directs the processor to 202 of FIG. 7 calculate a system operator cost as the product of the system operator cost per second, as set at block 822 in FIG. 41, and the communication session time as determined at Block 916 in FIG. 53. Block 992 then directs the processor to add the system operator cost value calculated at Block 990 to a system operator accounts table record of the type shown at 994 in FIG. 59. This record includes a system operator balance field 996 holding an accumulated charges balance. Referring to FIG. 60 in the embodiment described, the system operator balance field 996 may hold the value \$1,000.02 for example, and to this value the system operator cost calculated at Block 990 is added when the processor executes Block 992 of FIG. 56B.

Ultimately, the final reseller balance 986 in FIG. 58 holds a number representing an amount owed to the reseller by the system operator and the system operator balance 996 of FIG. 59 holds a number representing an amount of profit for the system operator.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

What is claimed is:

1. A method of routing a communication in a communication system between an Internet-connected first participant device associated with a first participant and a second participant device associated with a second participant, the method comprising:

causing at least one processor to access at least one memory storing a first participant profile identifying at least one first participant attribute;

receiving, by the at least one processor, a second participant identifier inputted by the first participant using the first participant device to initiate a communication, the second participant identifier being associated with the second participant device;

processing the second participant identifier, based on the at least one first participant attribute obtained from the first participant profile, to produce a new second participant identifier;

classifying the communication as a system communication or an external network communication;

when the communication is classified as a system communication, producing a system routing message, based on the new second participant identifier, that identifies an Internet Protocol (IP) address of a network element through which the communication is to be routed thereby causing the communication to be established to the second participant device; and

when the communication is classified as an external network communication, producing an external network routing message, based on the new second participant identifier, that identifies an address associated with a gateway to an external network thereby causing the communication to the second participant device to be established by use of the gateway to the external network.

2. The method of claim 1,

wherein producing the system routing message causes the communication to be established over an Internet Protocol (IP) network.

38

3. The method of claim 1,

wherein producing the external network routing message causes at least a portion of a path taken by the communication to be established over a circuit switched network that is external to the communication system.

4. The method of claim 1, wherein classifying the communication comprises causing the at least one processor to: determine whether the second participant device is accessible to the communication system over an Internet Protocol (IP) network, and

when the second participant device is not accessible over the Internet Protocol (IP) network, classify the communication as an external network communication.

5. The method of claim 1, wherein classifying the communication comprises causing the at least one processor to: determine whether the second participant device is accessible to the communication system over an Internet Protocol (IP) network;

when the second participant device is not accessible over the Internet Protocol (IP) network, classify the communication as an external network communication; and when the second participant device is accessible over the Internet Protocol (IP) network, classify the communication as a system communication.

6. The method of claim 1, wherein classifying the communication comprises causing the at least one processor to: determine whether the second participant device is operably configured to communicate via the communication system, and

when the second participant device is not operably configured to communicate via the communication system, classify the communication as an external network communication.

7. The method of claim 1, wherein classifying the communication comprises causing the at least one processor to: determine whether the second participant device is operably configured to communicate with the first participant device via an Internet Protocol (IP) network;

when the second participant device is not operably configured to communicate with the first participant device via the Internet Protocol (IP) network, classify the communication as an external network communication; and

when the second participant device is operably configured to communicate with the first participant device via the Internet Protocol (IP) network, classify the communication as a system communication.

8. The method of claim 1, wherein classifying the communication comprises causing the at least one processor to: determine whether a profile associated with the new second participant identifier exists in a database, and when a profile associated with the new second participant identifier does not exist in the database, classify the communication as an external network communication.

9. The method of claim 8, wherein, when a profile associated with the new second participant identifier exists in the database, causing the at least one processor to classify the communication as a system communication.

10. The method of claim 1, further comprising: processing a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication; producing a respective plurality of routing messages, based on the classifying of each respective one of the

US 9,948,549 B2

39

plurality of communications, each respective routing message identifying an Internet Protocol (IP) address of a network element through which the communication is to be routed or identifying an address associated with a gateway to the external network, wherein the gateway to the external network is selected from a plurality of available gateways to the external network; and updating the first participant profile to cause at least one of the plurality of first participant attributes to be modified.

11. The method of claim 1, further comprising:

processing a user-specific first participant attribute from the plurality of first participant attributes, using the at least one processor, to determine whether a further communication that was initiated by the first participant to a third participant device is allowed to proceed;

if the at least one processor determines that the further communication is not allowed to proceed based on the user-specific first participant attribute, preventing the further communication from being established.

12. The method of claim 11, wherein:

if the further communication is allowed to proceed based on the user-specific first participant attribute, causing the at least one processor to search a database for communication blocking information associated with the third participant device, and if the communication blocking information is found, preventing the further communication from being established; and

if the further communication is allowed to proceed based on the at least one user-specific first participant attribute and no communication blocking information associated with the third participant device is found in the database, causing the at least one processor to produce a corresponding routing message to cause the further communication to be established to the third participant device.

13. The method of claim 11, wherein the plurality of first participant attributes comprises at least one location-based first participant attribute that is associated with a local calling area for which the first participant has registered, and wherein the method further comprises:

causing the at least one processor to use the at least one location-based first participant attribute to determine whether a third participant identifier inputted by the first participant complies with pre-defined format criteria; and

if the third participant identifier does not comply with the pre-defined format criteria, causing the at least one processor to prevent the further communication from being established.

14. A method of routing a communication in a communication system between an Internet-connected first participant device associated with a first participant and a second participant device associated with a second participant, the method comprising:

causing at least one processor to access a first participant profile to load a plurality of first participant attributes into at least one memory;

receiving, by the at least one processor, a second participant identifier inputted by the first participant using the first participant device to initiate a communication, the second participant identifier being associated with the second participant device;

processing the second participant identifier based on at least one of the plurality of first participant attributes

40

that was loaded into the at least one memory from the first participant profile to produce a new second participant identifier;

classifying the communication as a system communication, an external network communication, or a blocked communication;

when call blocking information is associated with the new second participant identifier, preventing the communication from being established;

when call blocking information is not associated with the new second participant identifier and the communication is classified as a system communication, producing a system routing message, based on the new second participant identifier, that identifies an Internet Protocol (IP) address of a network element through which the communication is to be routed thereby causing the communication to be established over an Internet Protocol (IP) network; and

when call blocking information is not associated with the new second participant identifier and the communication is classified as an external network communication, producing an external network routing message, based on the new second participant identifier, that identifies an address associated with a gateway to an external network thereby causing at least a portion of a path taken by the communication to be established over a circuit switched network.

15. The method of claim 14, wherein classifying the communication comprises causing the at least one processor to:

determine whether the communication system is operably configured to communicate with the second participant device via the Internet Protocol (IP) network, and

when the communication system is operably configured to communicate to the second participant device via the Internet Protocol (IP) network and call blocking information is not associated with the new second participant identifier, classify the communication as a system communication.

16. The method of claim 14, wherein classifying the communication comprises causing the at least one processor to:

determine whether a profile associated with the new second participant identifier exists in a database, and when a profile associated with the new second participant identifier exists in the database and call blocking information is not associated with the new second participant identifier, classify the communication as a system communication.

17. An apparatus for routing a communication in a communication system between an Internet-connected first participant device and a second participant device, the apparatus comprising:

at least one processor operably configured to access at least one memory having processor readable instructions, wherein the at least one processor is operably configured by the processor readable instructions to: access a first participant profile to load, into the at least one memory, a plurality of first participant attributes associated with communications initiated from the first participant device;

receive a second participant identifier inputted by the first participant to initiate a communication to the second participant device, the second participant identifier being associated with the second participant device;

US 9,948,549 B2

41

process the second participant identifier, based on at least one of the plurality of first participant attributes loaded by use of from the first participant profile, to produce a new second participant identifier; classify the communication as a system communication or an external network communication;

when the communication is classified as a system communication, produce a system routing message, based on the new second participant identifier, that identifies an Internet Protocol (IP) address of a network element through which the communication is to be routed to the second participant device; and when the communication is classified as an external network communication, produce an external network routing message, based on the new second participant identifier, that identifies an address associated with a gateway to an external network; wherein one of the system routing message or the external network routing message causes the communication to be established to the second participant device.

18. The apparatus of claim 17, wherein the system routing message causes the communication to be established over an Internet Protocol (IP) network.

19. The apparatus of claim 17, wherein the external network routing message causes at least a portion of a path taken by the communication to be established over a circuit switched network that is external to the communication system.

20. The apparatus of claim 18, wherein the at least one processor is operably configured to: determine whether the second participant device is accessible to the communication system over the Internet Protocol (IP) network; when the second participant device is not accessible over the Internet Protocol (IP) network, classify the communication as an external network communication.

21. The apparatus of claim 18, wherein the at least one processor is operably configured to: determine whether the second participant device is accessible to the communication system over the Internet Protocol (IP) network; when the second participant device is not accessible over the Internet Protocol (IP) network, classify the communication as an external network communication; and when the second participant device is accessible over the Internet Protocol (IP) network, classify the communication as a system communication.

22. The apparatus of claim 18, wherein the at least one processor is operably configured to: determine whether the second participant device is operably configured to communicate with the first participant device via the Internet Protocol (IP) network; when the second participant device is not operably configured to communicate with the first participant device via the Internet Protocol (IP) network, classify the communication as an external network communication.

23. The apparatus of claim 18, wherein the at least one processor is operably configured to: determine whether the second participant device is operably configured to communicate via the communication system; when the second participant device is operably configured to communicate via the communication system, classify the communication as a system communication.

42

24. The apparatus of claim 18, wherein the at least one processor is operably configured to:

determine whether a profile associated with the new second participant identifier exists in a database; when a profile associated with the new second participant identifier does not exist in the database, classify the communication as an external network communication.

25. The apparatus of claim 18, wherein the at least one processor is operably configured to:

determine whether a profile associated with the new second participant identifier exists in a database; when a profile associated with the new second participant identifier exists in the database, classify the communication as a system communication.

26. The apparatus of claim 17, wherein the at least one processor is further operably configured to:

process a plurality of communications from the first participant device to a plurality of communication recipient devices to classify each of the plurality of communications as a system communication or an external network communication, wherein the plurality of communications are concurrent;

produce a respective plurality of routing messages, based on the classifying of each respective one of the plurality of communications, each respective routing message identifying a respective Internet Protocol (IP) address of a network element through which the respective communication is to be routed or identifying a respective address associated with a gateway selected from among a plurality of gateways to the external network, wherein each routing message causes the respective communication to be routed to a respective destination; and

update the first participant profile to cause at least one of the plurality of first participant attributes to be modified.

27. The apparatus of claim 17, wherein the first participant profile identifies a plurality of user-specific attributes of the first participant, including at least one user-specific attribute that represents a location-based service preference, and wherein the at least one processor is further operably configured to:

(a) process a first user-specific attribute from the first participant attributes to determine whether a further communication initiated by the first participant to a third participant device is allowed to proceed;

(b) if the further communication is not allowed to proceed, prevent the further communication from being established;

(c) if the further communication is allowed to proceed, classify the further communication, based on a third participant identifier associated with the third participant device, as either a system communication or an external network communication, and produce a further routing message, based on the third participant identifier, identifying an address through which the further communication can be established to the third participant device;

(d) wherein when the further communication is classified as a system communication, the further routing message is produced to identify an Internet Protocol (IP) address of a network element of the communication system through which the further communication can be established to the third participant device;

(e) wherein when the further communication is classified as an external network communication, the further routing message is produced to identify an address

43

associated with a gateway to a communication network that is external to the communication system through which the further communication can be established to the third participant device; and

(f) wherein the further routing message causes the further communication to be established to the third participant device.

28. The apparatus of claim 17, wherein the first participant profile identifies a plurality of user-specific attributes of the first participant, including at least one user-specific attribute that represents a location-based service preference, and wherein the at least one processor is further operably configured to:

- (a) process a first user-specific attribute from the first participant attributes to determine whether a further communication initiated by the first participant to a third participant device is allowed to proceed;
- (b) if the further communication is allowed to proceed, process a second user-specific attribute from the first participant attributes to determine whether a third participant identifier associated with the third participant device complies with pre-defined format criteria;
- (c) if the third participant identifier complies with the pre-defined format criteria, search a database for call blocking information associated with the third participant identifier; and
- (d) if the call blocking information is not found, produce a further routing message identifying an address through which the further communication can be estab-

44

lished to the third participant device, causing the further communication to be established to the third participant device;

(e) wherein the second user-specific attribute identifies a location-based service preference.

29. The apparatus of claim 18, wherein the Internet Protocol (IP) address of the network element through which the communication is to be routed comprises an IP address or domain name identifying a communication system node associated with the second participant device, the communication system node being one of a plurality of communication system nodes each operably configured to provide communications services to a plurality of communication system subscribers; and

wherein the communication system node is operably configured to send a first message to the first participant device identifying a first IP address of a media relay to which data traffic comprising the communication should be sent from the first participant device, the communication system node being operably configured to cause the media relay to establish the communication from the first participant device via the first IP address to a second IP address at which the second participant device is operably configured to receive data traffic comprising the communication.

30. A non-transitory computer readable medium encoded with instructions for directing the at least one processor to execute the method of claim 1.

* * * * *